

Date: 2022/7/21

DJ RDX2 3M mode 2404.5MHz Back side ANT0 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;
 Frequency: 2404.5 MHz;
 Medium parameters used (interpolated): $f = 2404.5$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.51$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:


- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (16x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.487 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
 Reference Value = 0.4390 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.604 W/kg
SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.193 W/kg
 Maximum value of SAR (measured) = 0.497 W/kg

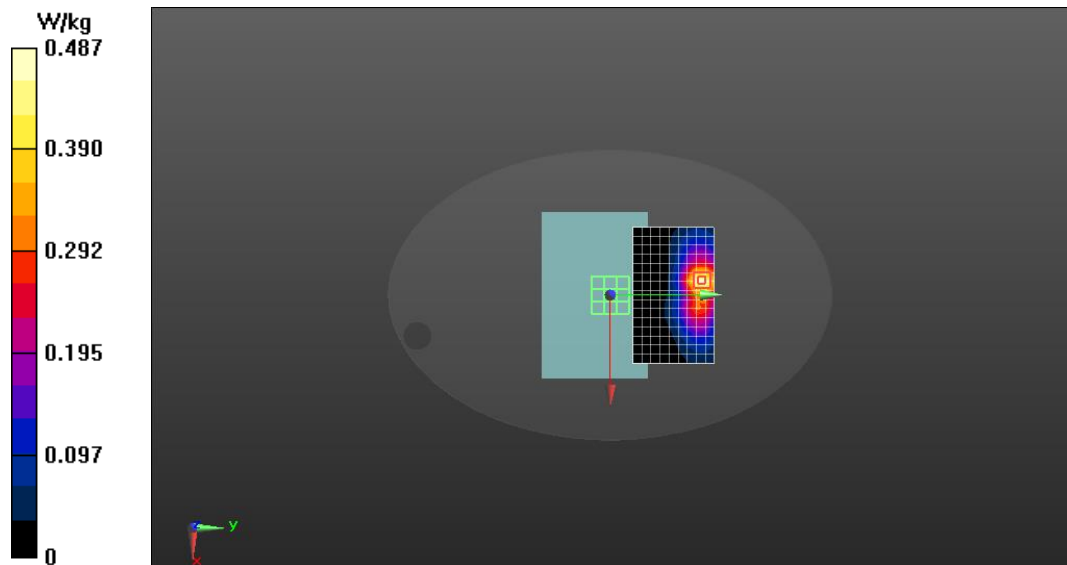

DJ RDX2 20M mode 2437.5MHz Back side ANT0 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2437.5 MHz;

Medium parameters used (interpolated): $f = 2437.5$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0667 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0659 W/kg

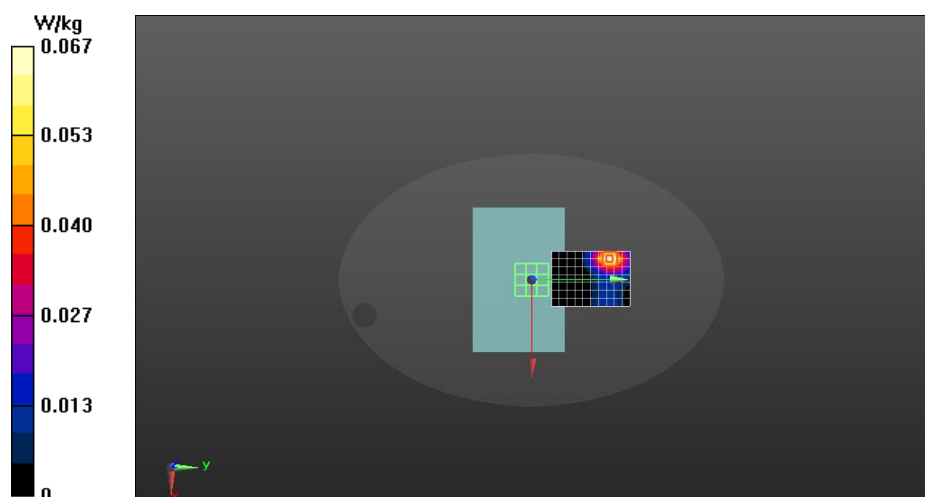

DJ RDX2 3M mode 5787.5MHz Back side ANT0 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5787.5 MHz;

Medium parameters used (interpolated): $f = 5787.5$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 9.50 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 5.06 W/kg; SAR(10 g) = 2.19 W/kg

Maximum value of SAR (measured) = 10.3 W/kg

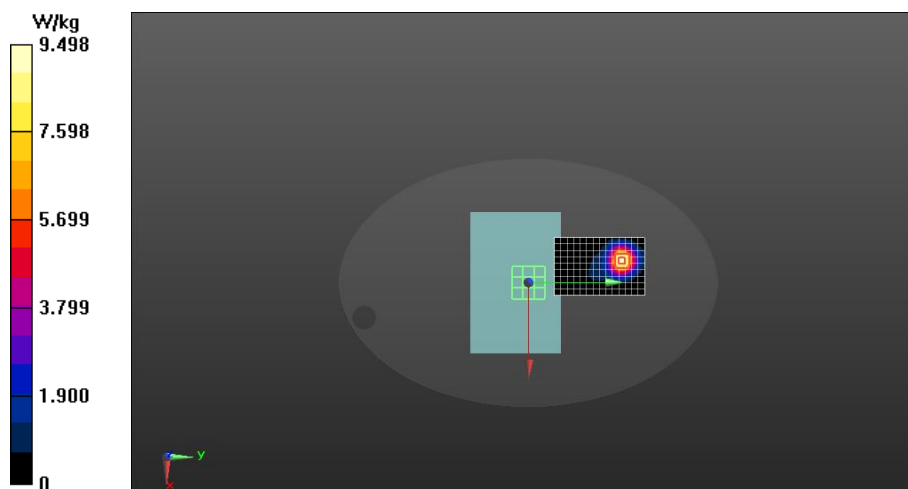

DJ RDX2 20M mode 5786.5MHz Back side ANT0 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5786.5 MHz;

Medium parameters used (interpolated): $f = 5786.5$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.874 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.954 W/kg

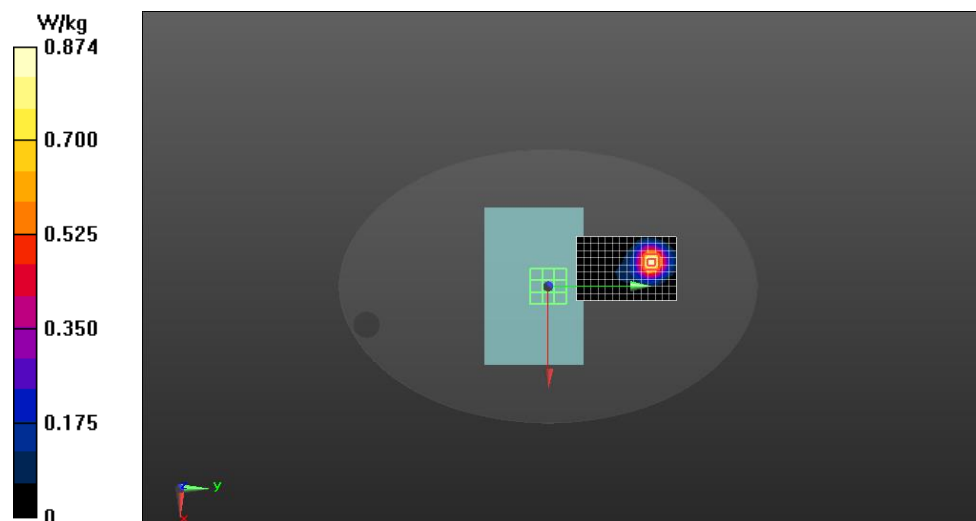

DJ RDX2 3M mode 2434.5MHz Back side ANT1 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2434.5 MHz;

Medium parameters used (interpolated): $f = 2434.5$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (16x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.999 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (9x11x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.8740 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.531 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

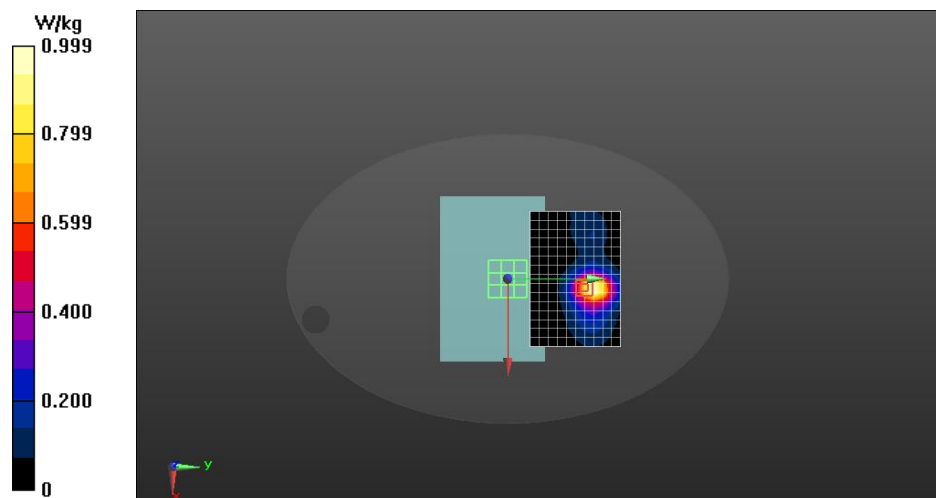

DJ RDX2 10M mode 2407.5MHz Back side ANT1 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2407.5 MHz;

Medium parameters used (interpolated): $f = 2407.5$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.116 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.6490 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

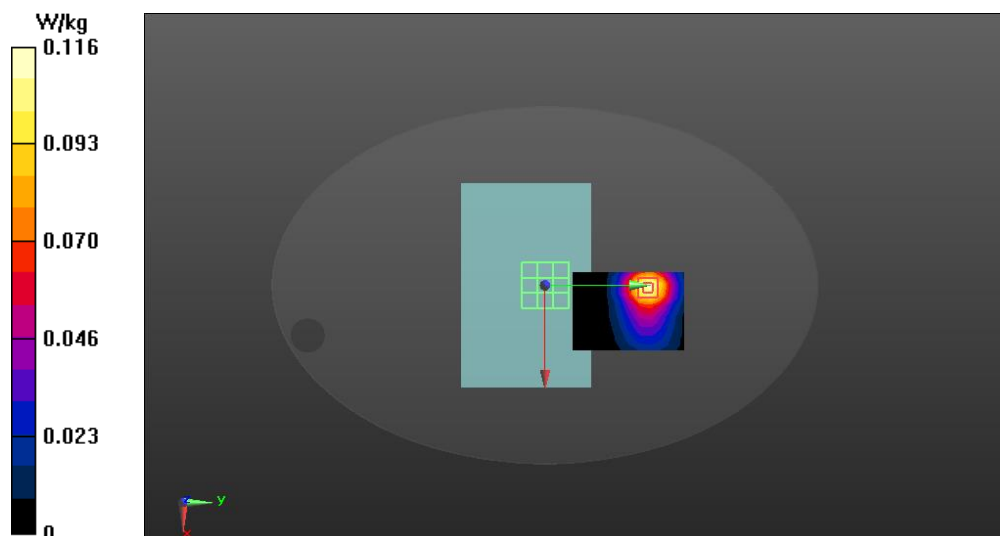

DJ RDX2 3M CA mode 5730.2MHz Back side ANT1 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5730.2 MHz;

Medium parameters used (interpolated): $f = 5730.2$ MHz; $\sigma = 5.29$ S/m; $\epsilon_r = 35.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 4.58 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.136 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 7.01 W/kg

SAR(1 g) = 2.3 W/kg; SAR(10 g) = 0.997 W/kg

Maximum value of SAR (measured) = 4.68 W/kg

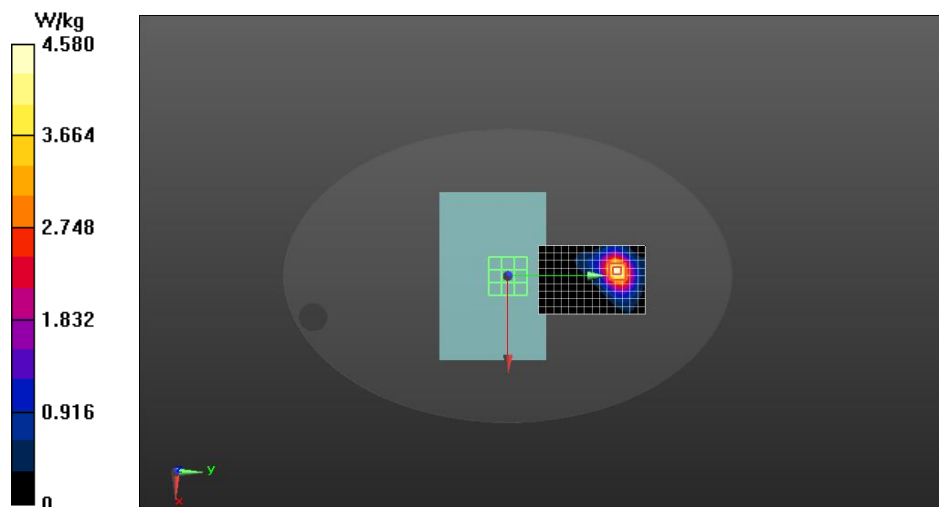

DJ RDX2 20M mode 5839.5MHz Back side ANT1 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5839.5 MHz;

Medium parameters used: $f = 5840$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 35.58$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.486 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.797 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

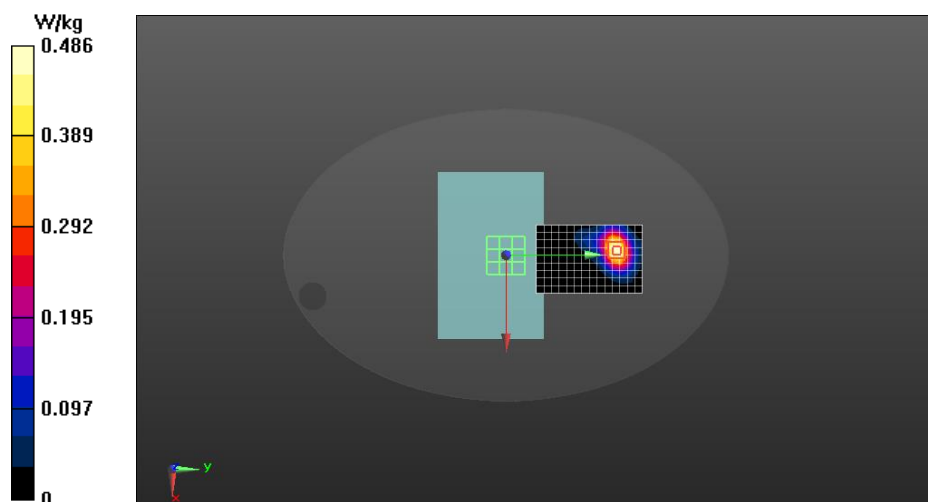

DJ RDX2 3M mode 2404.5MHz Back side ANT2 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2404.5 MHz;

Medium parameters used (interpolated): $f = 2404.5$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (16x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.09 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.491 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

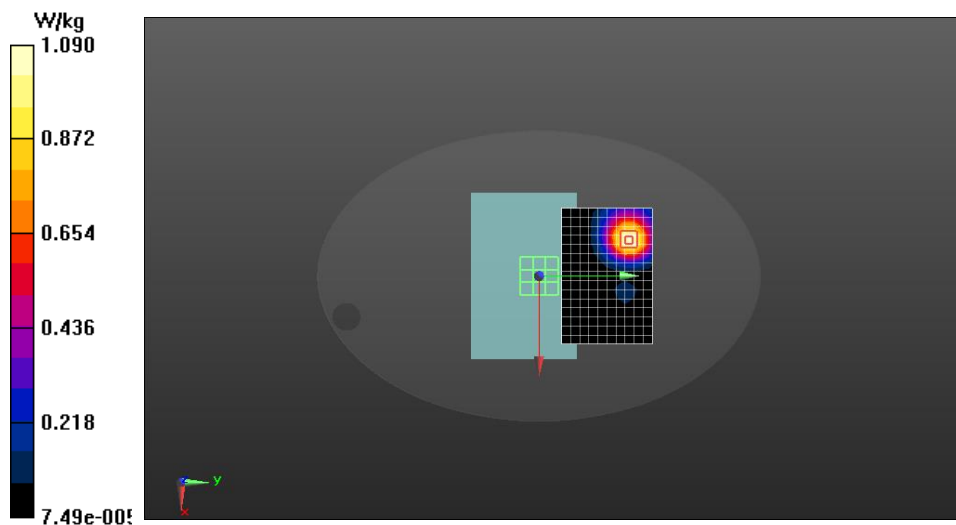

DJ RDX2 10M mode 2467.5MHz Back side ANT2 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2467.5 MHz;

Medium parameters used (interpolated): $f = 2467.5$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.124 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (9x9x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

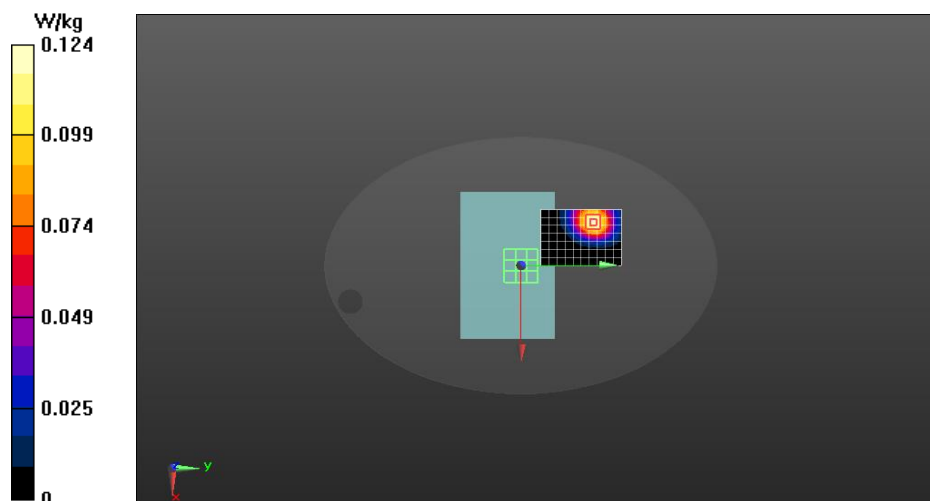

DJ RDX2 3M CA mode 5790.2MHz Back side ANT2 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5790.2 MHz;

Medium parameters used (interpolated): $f = 5790.2$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 8.69 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 13.5 W/kg

SAR(1 g) = 4.52 W/kg; SAR(10 g) = 1.96 W/kg

Maximum value of SAR (measured) = 9.18 W/kg

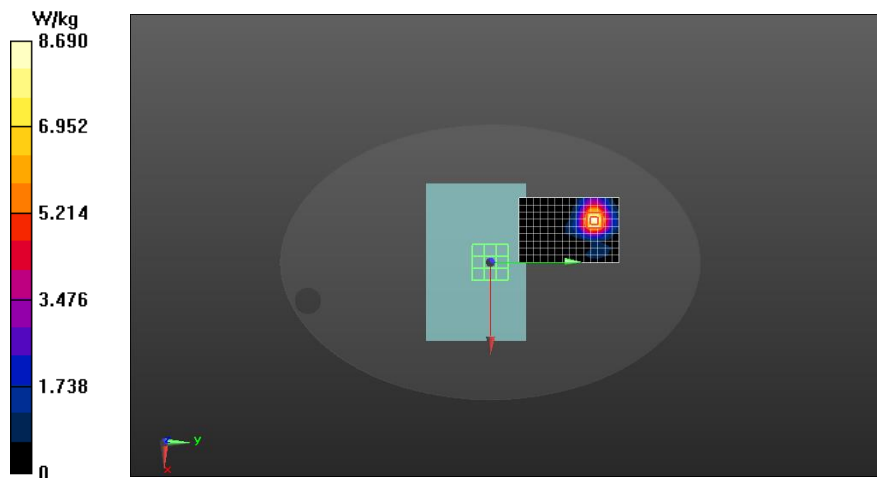

DJ RDX2 10M mode 5786.5MHz Back side ANT2 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5786.5 MHz;

Medium parameters used (interpolated): $f = 5786.5$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.802 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.804 W/kg

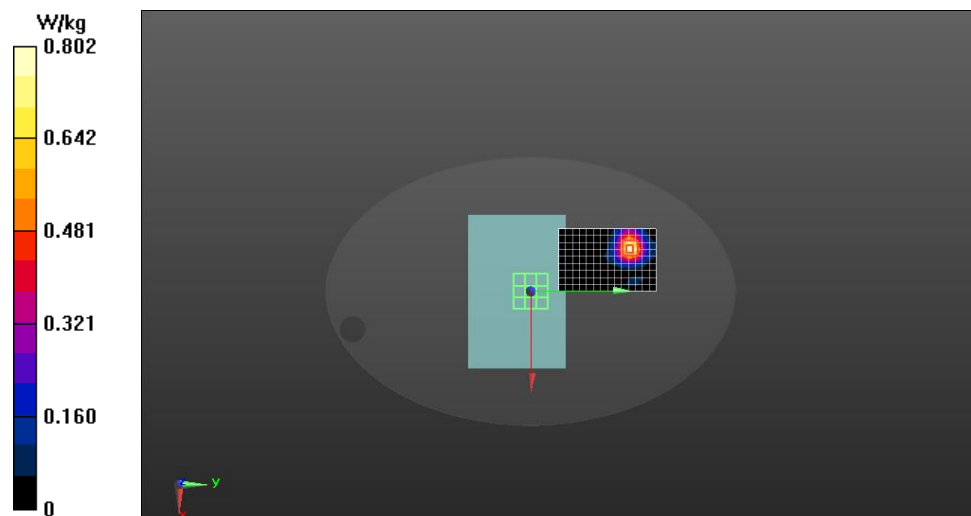

DJ RDX2 3M mode 2434.5MHz Back side ANT3 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2434.5 MHz;

Medium parameters used (interpolated): $f = 2434.5$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (16x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.32 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.943 W/kg; SAR(10 g) = 0.552 W/kg

Maximum value of SAR (measured) = 1.38 W/kg

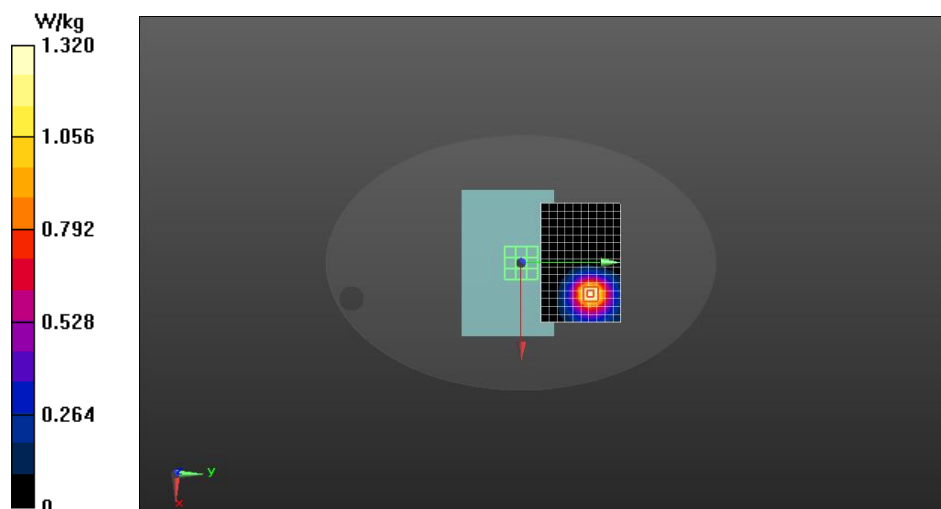

DJ RDX2 20M mode 2437.5MHz Back side ANT3 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2437.5 MHz;

Medium parameters used (interpolated): $f = 2437.5$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.107 W/kg


Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.044 W/kg

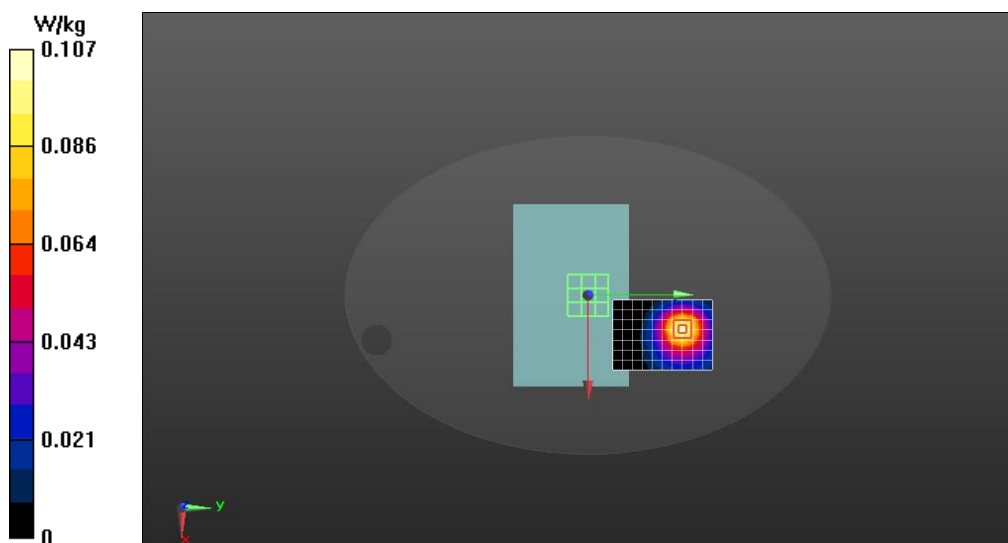

DJ RDX2 1.4M mode 5726.5MHz Back side ANT3 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5786.5 MHz;

Medium parameters used (interpolated): $f = 5786.5$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 3.92 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 6.06 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 0.884 W/kg

Maximum value of SAR (measured) = 4.09 W/kg

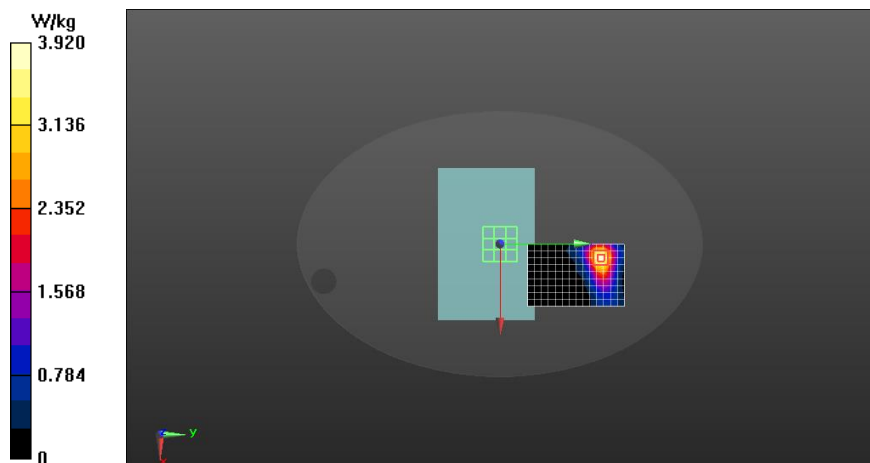

DJ RDX2 10M mode 5786.5MHz Left side ANT3 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5786.5 MHz;

Medium parameters used (interpolated): $f = 5786.5$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.489 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.728 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

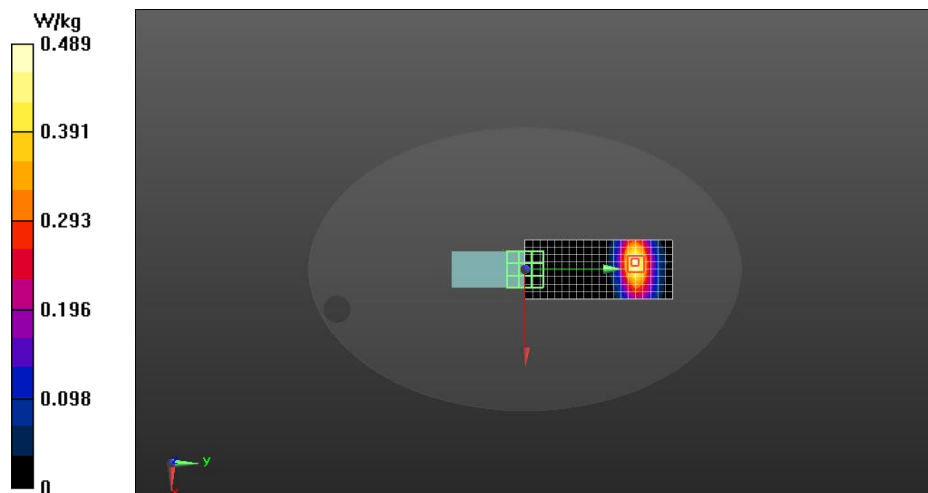

DJ RDX2 3M mode 2434.5MHz Back side ANT3 0mm-worst case

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2434.5 MHz;

Medium parameters used (interpolated): $f = 2434.5$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 40.76$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 2.67 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.5740 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 1.87 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 2.77 W/kg

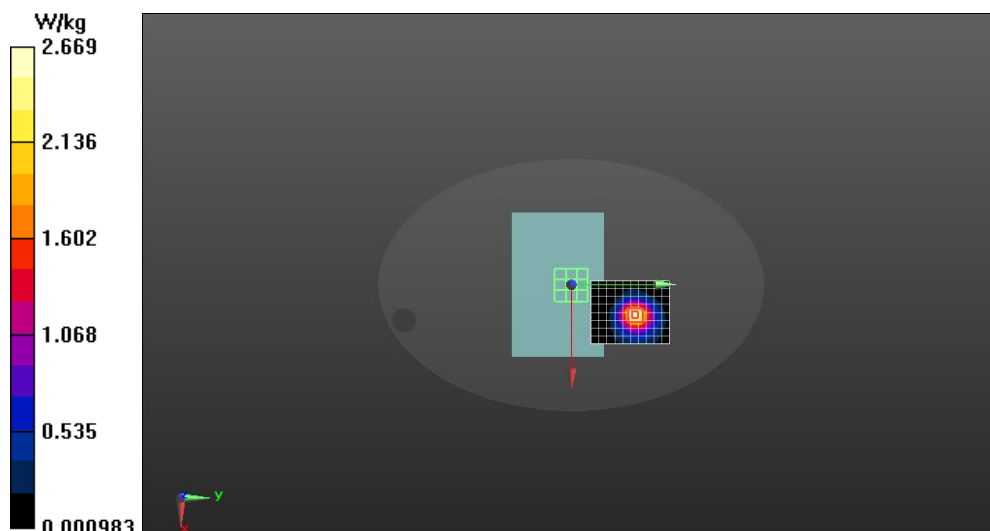

DJ RDX2 3M mode 5787.5MHz Back side ANT0 0mm-Worst case

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;
Frequency: 5787.5 MHz;
Medium parameters used (interpolated): $f = 5787.5$ MHz; $\sigma = 5.055$ S/m; $\epsilon_r = 35.196$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 12.0 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 7.271 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 6.13 W/kg; SAR(10 g) = 2.52 W/kg

Maximum value of SAR (measured) = 12.4 W/kg

