

Prüfbericht-Nr.: <i>Test report no.:</i>	CN244E0L 004	Auftrags-Nr.: <i>Order no.:</i>	168449632	Seite 1 von 29 <i>Page 1 of 29</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2023-10-26	
Auftraggeber: <i>Client:</i>	SZ DJI Osmo Technology Co.,Ltd. 4F, Jingkou Community Comprehensive Service Building, No. 83 Bishui Road North, Guangming Street, Guangming District, Shenzhen, China			
Prüfgegenstand: <i>Test item:</i>	DJI SDR Transmission			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	TX5 (Trademark: DJI)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart E Section 15.407			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2023-12-05	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003612445-001~047			
Prüfzeitraum: <i>Testing period:</i>	2023-12-14 - 2024-02-06			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	<u>x Bell Hu</u>	genehmigt von: <i>authorized by:</i>	<u>x Jonathan Li</u>	
Datum: <i>Date:</i>	2024-05-21	Ausstellungsdatum: <i>Issue date:</i>	2024-05-21	
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / Other:	FCC ID: 2ANDR-TX53209 This report is for 5GHz SRD.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende: * Legend:	P(ass) = entspricht o.g. Prüfgrundlage(n) P(ass) = passed a.m. test specification(s)	F(fail) = entspricht nicht o.g. Prüfgrundlage(n) F(fail) = failed a.m. test specification(s)	N/A = nicht anwendbar N/A = not applicable	N/T = nicht getestet N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht-Nr.: CN244E0L 004

Test report no.:

Seite 2 von 29

Page 2 of 29

Anmerkungen

Remarks

1	<p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfills the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>
2	<p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i></p>
3	<p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>
4	<p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p>

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 3 von 29
Page 3 of 29

Test Summary

5.1.1 ANTENNA REQUIREMENT
RESULT: Pass

5.1.2 MAXIMUM OUTPUT POWER
RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY
RESULT: Pass

5.1.4 FREQUENCY STABILITY
RESULT: Pass

5.1.5 6dB BANDWIDTH
RESULT: Pass

5.1.6 26dB BANDWIDTH AND 99% BANDWIDTH
RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION
RESULT: Pass

5.1.8 DYNAMIC FREQUENCY SELECTION (DFS)
RESULT: Pass

5.1.9 CONDUCTED EMISSION ON AC MAINS
RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES.....	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA.....	8
2.7	STATUS OF FACILITY USED FOR TESTING	8
3	GENERAL PRODUCT INFORMATION	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	15
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	15
3.5	SUBMITTED DOCUMENTS.....	15
4	TEST SET-UP AND OPERATION MODES.....	16
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	16
4.2	TEST OPERATION AND TEST SOFTWARE	16
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	16
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	16
4.5	TEST SETUP DIAGRAM	17
5	TEST RESULTS	19
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	19
5.1.1	Antenna Requirement.....	19
5.1.2	Maximum Output Power.....	20
5.1.3	Conducted Power Spectral Density.....	22
5.1.4	Frequency Stability.....	23
5.1.5	6dB Bandwidth	24
5.1.6	26dB Bandwidth and 99% Bandwidth	25
5.1.7	Radiated Spurious Emission	26
5.1.8	Dynamic Frequency Selection (DFS)	27
5.1.9	Conducted Emission on AC Mains	28
6	PHOTOGRAPHS OF THE TEST SET-UP	29
7	LIST OF TABLES.....	29

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of 5.6GHz SRD

Appendix B: Test Results of 5.8GHz SRD

Appendix C: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

FCC Accreditation Designation No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2023-09-22	2024-09-21
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2023-09-22	2024-09-21
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2023-09-22	2024-09-21
DC power supply	Keysight	E3642A	MY61276100	2023-09-22	2024-09-21
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2023-09-22	2024-09-21
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2023-09-22	2024-09-21
Test Software	Tonscend	JS1120-3	N/A	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A	N/A
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2021-06-22	2024-06-22
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2023-07-26	2024-07-25
Signal Analyzer	R&S	FSV 40	101439	2023-07-26	2024-07-25
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2023-07-26	2024-07-25
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-07-26	2024-07-25
Amplifier	R&S	SCU-18F	180070	2023-07-26	2024-07-25
Amplifier	R&S	SCU40A	100475	2023-07-26	2024-07-25
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-07	2024-08-06

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

 Seite 7 von 29
 Page 7 of 29

Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-07	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-28	2024-08-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-08-07	2024-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2021-06-22	2024-06-22

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2024-07-30
Artificial Mains Network	R&S	ENV216	102333	2024-07-31
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	±4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

Prüfbericht - Nr.: **CN244E0L 004**
Test Report No.:

Seite 8 von 29
Page 8 of 29

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The Product is DJI SDR Transmission which supports 2.4GHz SRD, 5GHz SRD, 2.4GHz Wi-Fi and 5GHz Wi-Fi functions.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	DJI SDR Transmission
Type Designation:	TX5
Trademark:	DJI
FCC ID	2ANDR-TX53209
Operating Voltage	7.4 V DC by battery or powered by AC/DC adapter (120V AC/60Hz)
Testing Voltage	DC 7.4V by battery or AC 120V, 60Hz
Extreme Temperature Range	-10°C to +45°C
Radiofrequency operating mode	1) 2.4GHz SRD: operating within 2400-2483.5MHz, supports 1.4MHz/3MHz/10MHz/20MHz/40MHz Bandwidth 2) 2.4GHz Wi-Fi: operating within 2400-2483.5MHz, supports 20MHz/40MHz Bandwidth and IEEE 802.11 b/g/n20/n40/ax20/ax40 3) 5.2GHz Wi-Fi: operating within 5150-5250MHz, supports 20MHz/40MHz/80MHz Bandwidth and IEEE 802.11 a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80 4) 5.6GHz SRD: operating within 5470-5725MHz, supports 20MHz/40MHz Bandwidth (Transmitting Only) 5) 5.8GHz SRD: operating within 5725-5850MHz, supports 1.4MHz/3MHz/10MHz/20MHz/40MHz Bandwidth
Technical Specification of 5.6GHz SRD	
Operating Frequency	5500-5700MHz for 20MHz Bandwidth 5510-5670MHz for 40MHz Bandwidth
Type of Modulation	OFDM
Channel Number	8 channels for 20MHz Bandwidth 3 channels for 40MHz Bandwidth
Antenna Type	Integral Antennas, only MIMO mode supported.
Antenna Number	2TX (ANT0+ANT1, or ANT0+ANT3, or ANT2+ANT1, or ANT2+ANT3)
Antenna Gain	Ant0: 3.23dBi, Ant1: 3.02dBi, Ant2: 3.71dBi, Ant3: 2.44dBi (as provided by client)
TPC	Not Supported
Equipment Type	Slave without DFS detection
Technical Specification of 5.8GHz SRD	
Operating Frequency	5728.5-5846.5MHz for 1.4MHz Bandwidth

Prüfbericht - Nr.: CN244E0L 004

Test Report No.:

Seite 10 von 29

Page 10 of 29

	5730.12-5848.12MHz for 1.4MHz Bandwidth CA Mode 5727.5-5844.5MHz for 3MHz Bandwidth 5730.2-5847.2MHz for 3MHz Bandwidth CA Mode 5730.5-5844.5MHz for 10MHz Bandwidth 5735.5-5839.5MHz for 20MHz Bandwidth 5745.5-5829.5MHz for 40MHz Bandwidth
Type of Modulation	OFDM
Channel Number	60 channels for 1.4MHz Bandwidth 60 channels for 1.4MHz Bandwidth CA Mode 40 channels for 3MHz Bandwidth 40 channels for 3MHz Bandwidth CA Mode 115 channels for 10MHz Bandwidth 105 channels for 20MHz Bandwidth 85 channels for 40MHz Bandwidth
Channel Separation	2MHz for 1.4MHz Bandwidth 2MHz for 1.4MHz Bandwidth CA Mode 3MHz for 3MHz Bandwidth 3MHz for 3MHz Bandwidth CA Mode 1MHz for 10MHz/20MHz/40MHz
Antenna Type	Integral Antennas, only MIMO mode supported.
Antenna Number	2Tx (ANT0+ANT1, or ANT0+ANT3, or ANT2+ANT1, or ANT2+ANT3)
Antenna Gain	Ant0: 3.07dBi, Ant1: 3.55dBi, Ant2: 3.48dBi, Ant3: 2.38dBi (Provided by the Client)

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 11 von 29

Page 11 of 29

Table 4: RF Channel and Frequency of 5.6GHz SRD

5.6GHz SRD 20MHz Bandwidth (5500MHz-5700MHz)	
Channel	Frequency
	(MHz)
1	5500
2	5520
3	5540
4	5560
5	5580
9	5660
10	5680
11	5700

5.6GHz SRD 40MHz Bandwidth (5510MHz-5670MHz)	
Channel	Frequency
	(MHz)
1	5510
2	5550
5	5670

Table 5: RF Channel and Frequency of 5.8GHz SRD

5.8GHz 1.4MHzBandwidth					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5728.5	21	5768.5	41	5808.5
2	5730.5	22	5770.5	42	5810.5
3	5732.5	23	5772.5	43	5812.5
4	5734.5	24	5774.5	44	5814.5
5	5736.5	25	5776.5	45	5816.5
6	5738.5	26	5778.5	46	5818.5
7	5740.5	27	5780.5	47	5820.5
8	5742.5	28	5782.5	48	5822.5
9	5744.5	29	5784.5	49	5824.5
10	5746.5	30	5786.5	50	5826.5
11	5748.5	31	5788.5	51	5828.5
12	5750.5	32	5790.5	52	5830.5
13	5752.5	33	5792.5	53	5832.5
14	5754.5	34	5794.5	54	5834.5
15	5756.5	35	5796.5	55	5836.5
16	5758.5	36	5798.5	56	5838.5
17	5760.5	37	5800.5	57	5840.5
18	5762.5	38	5802.5	58	5842.5
19	5764.5	39	5804.5	59	5844.5
20	5766.5	40	5806.5	60	5846.5

Prüfbericht - Produkte
Test Report - Products
Prüfbericht - Nr.: CN244E0L 004
Test Report No.:
Seite 12 von 29
Page 12 of 29

5.8GHz 1.4MHz Bandwidth (CA Mode)					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5730.12	21	5770.12	41	5810.12
2	5732.12	22	5772.12	42	5812.12
3	5734.12	23	5774.12	43	5814.12
4	5736.12	24	5776.12	44	5816.12
5	5738.12	25	5778.12	45	5818.12
6	5740.12	26	5780.12	46	5820.12
7	5742.12	27	5782.12	47	5822.12
8	5744.12	28	5784.12	48	5824.12
9	5746.12	29	5786.12	49	5826.12
10	5748.12	30	5788.12	50	5828.12
11	5750.12	31	5790.12	51	5830.12
12	5752.12	32	5792.12	52	5832.12
13	5754.12	33	5794.12	53	5834.12
14	5756.12	34	5796.12	54	5836.12
15	5758.12	35	5798.12	55	5838.12
16	5760.12	36	5800.12	56	5840.12
17	5762.12	37	5802.12	57	5842.12
18	5764.12	38	5804.12	58	5844.12
19	5766.12	39	5806.12	59	5846.12
20	5768.12	40	5808.12	60	5848.12

5.8GHz 3MHz Bandwidth					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5727.5	15	5769.5	29	5811.5
2	5730.5	16	5772.5	30	5814.5
3	5733.5	17	5775.5	31	5817.5
4	5736.5	18	5778.5	32	5820.5
5	5739.5	19	5781.5	33	5823.5
6	5742.5	20	5784.5	34	5826.5
7	5745.5	21	5787.5	35	5829.5
8	5748.5	22	5790.5	36	5832.5
9	5751.5	23	5793.5	37	5835.5
10	5754.5	24	5796.5	38	5838.5
11	5757.5	25	5799.5	39	5841.5
12	5760.5	26	5802.5	40	5844.5
13	5763.5	27	5805.5	/	/
14	5766.5	28	5808.5	/	/

5.8GHz 3MHz Bandwidth CA Mode					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5730.2	15	5772.2	29	5814.2
2	5733.2	16	5775.2	30	5817.2
3	5736.2	17	5778.2	31	5820.2
4	5739.2	18	5781.2	32	5823.2
5	5742.2	19	5784.2	33	5826.2
6	5745.2	20	5787.2	34	5829.2
7	5748.2	21	5790.2	35	5832.2
8	5751.2	22	5793.2	36	5835.2
9	5754.2	23	5796.2	37	5838.2
10	5757.2	24	5799.2	38	5841.2
11	5760.2	25	5802.2	39	5844.2
12	5763.2	26	5805.2	40	5847.2
13	5766.2	27	5808.2	/	/
14	5769.2	28	5811.2	/	/

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 13 von 29

Page 13 of 29

5.8GHz 10MHzBandwidth					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5730.5	40	5769.5	79	5808.5
2	5731.5	41	5770.5	80	5809.5
3	5732.5	42	5771.5	81	5810.5
4	5733.5	43	5772.5	82	5811.5
5	5734.5	44	5773.5	83	5812.5
6	5735.5	45	5774.5	84	5813.5
7	5736.5	46	5775.5	85	5814.5
8	5737.5	47	5776.5	86	5815.5
9	5738.5	48	5777.5	87	5816.5
10	5739.5	49	5778.5	88	5817.5
11	5740.5	50	5779.5	89	5818.5
12	5741.5	51	5780.5	90	5819.5
13	5742.5	52	5781.5	91	5820.5
14	5743.5	53	5782.5	92	5821.5
15	5744.5	54	5783.5	93	5822.5
16	5745.5	55	5784.5	94	5823.5
17	5746.5	56	5785.5	95	5824.5
18	5747.5	57	5786.5	96	5825.5
19	5748.5	58	5787.5	97	5826.5
20	5749.5	59	5788.5	98	5827.5
21	5750.5	60	5789.5	99	5828.5
22	5751.5	61	5790.5	100	5829.5
23	5752.5	62	5791.5	101	5830.5
24	5753.5	63	5792.5	102	5831.5
25	5754.5	64	5793.5	103	5832.5
26	5755.5	65	5794.5	104	5833.5
27	5756.5	66	5795.5	105	5834.5
28	5757.5	67	5796.5	106	5835.5
29	5758.5	68	5797.5	107	5836.5
30	5759.5	69	5798.5	108	5837.5
31	5760.5	70	5799.5	109	5838.5
32	5761.5	71	5800.5	110	5839.5
33	5762.5	72	5801.5	111	5840.5
34	5763.5	73	5802.5	112	5841.5
35	5764.5	74	5803.5	113	5842.5
36	5765.5	75	5804.5	114	5843.5
37	5766.5	76	5805.5	115	5844.5
38	5767.5	77	5806.5	/	/
39	5768.5	78	5807.5	/	/

Prüfbericht - Produkte
Test Report - Products
Prüfbericht - Nr.: CN244E0L 004
Test Report No.:
Seite 14 von 29
Page 14 of 29

5.8GHz 20MHz Bandwidth					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5735.5	36	5770.5	71	5805.5
2	5736.5	37	5771.5	72	5806.5
3	5737.5	38	5772.5	73	5807.5
4	5738.5	39	5773.5	74	5808.5
5	5739.5	40	5774.5	75	5809.5
6	5740.5	41	5775.5	76	5810.5
7	5741.5	42	5776.5	77	5811.5
8	5742.5	43	5777.5	78	5812.5
9	5743.5	44	5778.5	79	5813.5
10	5744.5	45	5779.5	80	5814.5
11	5745.5	46	5780.5	81	5815.5
12	5746.5	47	5781.5	82	5816.5
13	5747.5	48	5782.5	83	5817.5
14	5748.5	49	5783.5	84	5818.5
15	5749.5	50	5784.5	85	5819.5
16	5750.5	51	5785.5	86	5820.5
17	5751.5	52	5786.5	87	5821.5
18	5752.5	53	5787.5	88	5822.5
19	5753.5	54	5788.5	89	5823.5
20	5754.5	55	5789.5	90	5824.5
21	5755.5	56	5790.5	91	5825.5
22	5756.5	57	5791.5	92	5826.5
23	5757.5	58	5792.5	93	5827.5
24	5758.5	59	5793.5	94	5828.5
25	5759.5	60	5794.5	95	5829.5
26	5760.5	61	5795.5	96	5830.5
27	5761.5	62	5796.5	97	5831.5
28	5762.5	63	5797.5	98	5832.5
29	5763.5	64	5798.5	99	5833.5
30	5764.5	65	5799.5	100	5834.5
31	5765.5	66	5800.5	101	5835.5
32	5766.5	67	5801.5	102	5836.5
33	5767.5	68	5802.5	103	5837.5
34	5768.5	69	5803.5	104	5838.5
35	5769.5	70	5804.5	105	5839.5

5.8GHz 40MHz Bandwidth					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5745.5	30	5774.5	59	5803.5
2	5746.5	31	5775.5	60	5804.5
3	5747.5	32	5776.5	61	5805.5
4	5748.5	33	5777.5	62	5806.5
5	5749.5	34	5778.5	63	5807.5
6	5750.5	35	5779.5	64	5808.5
7	5751.5	36	5780.5	65	5809.5
8	5752.5	37	5781.5	66	5810.5
9	5753.5	38	5782.5	67	5811.5
10	5754.5	39	5783.5	68	5812.5

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 15 von 29

Page 15 of 29

11	5755.5	40	5784.5	69	5813.5
12	5756.5	41	5785.5	70	5814.5
13	5757.5	42	5786.5	71	5815.5
14	5758.5	43	5787.5	72	5816.5
15	5759.5	44	5788.5	73	5817.5
16	5760.5	45	5789.5	74	5818.5
17	5761.5	46	5790.5	75	5819.5
18	5762.5	47	5791.5	76	5820.5
19	5763.5	48	5792.5	77	5821.5
20	5764.5	49	5793.5	78	5822.5
21	5765.5	50	5794.5	79	5823.5
22	5766.5	51	5795.5	80	5824.5
23	5767.5	52	5796.5	81	5825.5
24	5768.5	53	5797.5	82	5826.5
25	5769.5	54	5798.5	83	5827.5
26	5770.5	55	5799.5	84	5828.5
27	5771.5	56	5800.5	85	5829.5
28	5772.5	57	5801.5	/	/
29	5773.5	58	5802.5	/	/

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 5GHz SRD
- B. wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- C. On, Normal operation + Charging
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- ID Label and Location Info
- User Manual
- Operation Description

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model TX5 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 6: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Portable Laptop	Lenovo	ThinkPad T480	SN: 10Q67059
Signal Cable	DJI	/	Type C to Type C, 0.3m
Signal Cable	DJI	/	BNC to BNC, 0.5m
DJI Transmission Air	DJI	RX5	SN: 7GZDLA40010264
Earphone	DJI	/	/
Smartphone	HUAWEI	/	/
Laptop	Lenovo	T480	SN: PF-16A6N8
AC/DC Adapter	/	PD-30CN	Input: 100-240V, 50/60Hz, 0.8A Max Output: 3.3-11V, 2.72A or 5V/3A or 9V/3A or 12V/2.5A or 15V/2A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

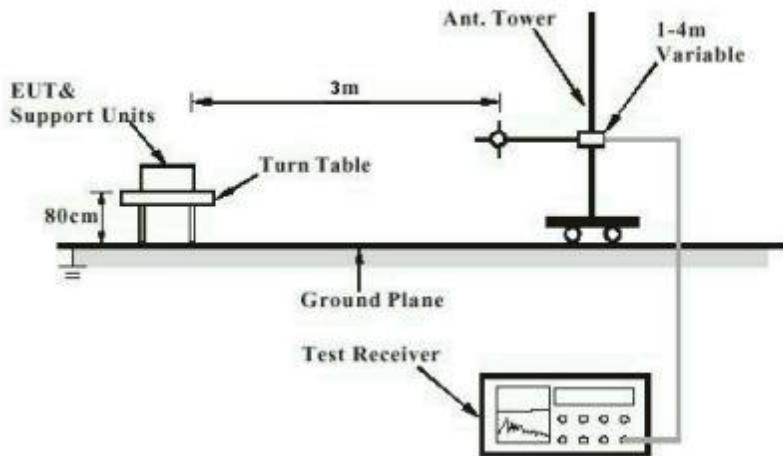


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

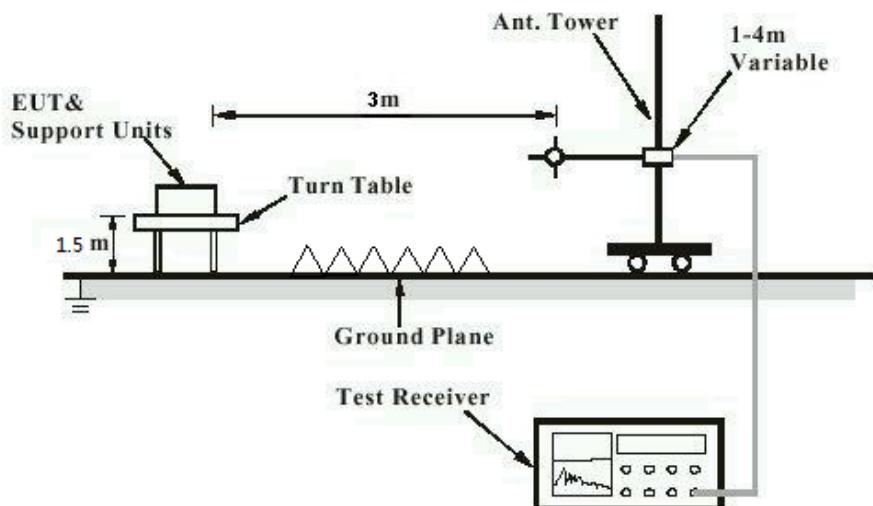


Diagram of Measurement Configuration for Mains Conduction Measurement


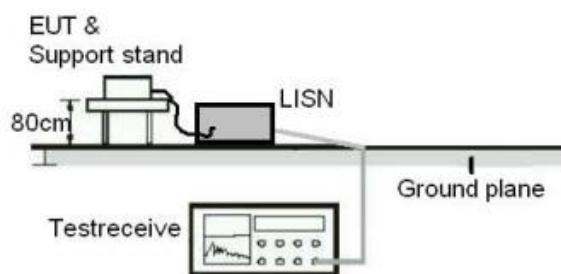


Diagram of Measurement Configuration for Conducted Transmitter Measurement

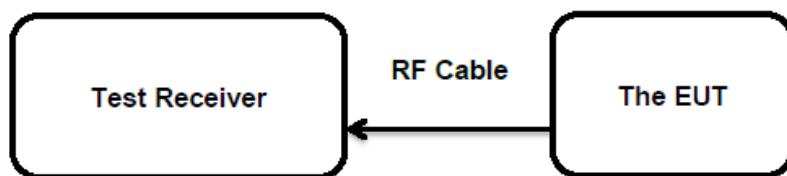

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT: Pass

Test Specification

Test standard : FCC Part 15.203
Limit : the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT have four Integral Antennas, the max. uncorrelated antenna gain antenna is 3.71dBi for 5.6GHz SRD, 3.07dBi for 5.8GHz SRD, permanent attachment and no consideration of replacement..

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 20 von 29
Page 20 of 29

5.1.2 Maximum Output Power

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.407 (a)
Basic standard	:	ANSI C63.10: 2013
Limits	:	<1W (30dBm) (5725-5850MHz)
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2024-01-26 to 2024-02-06
Input voltage	:	DC 7.4V by battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	45 %
Atmospheric pressure	:	101 kPa

For details refer to following test result.

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 21 von 29

Page 21 of 29

Table 7: Test Result of Maximum Conducted Output Power, 5.6GHz SRD

Test Mode	Test Channel (MHz)	Measured Average Power (MIMO mode_ANT2+3)		Limit (W)
		(dBm)	(W)	
20MHz BW	5500	20.85	0.1216	< 1.0
	5580	20.65	0.1161	
	5700	21.10	0.1288	
40MHz BW	5510	22.21	0.1663	< 1.0
	5550	22.08	0.1614	
	5670	23.06	0.2023	
Maximum Measured Value		23.06	0.2023	
Max. e.i.r.p.=23.06dBm+3.71dBi=26.77dBm, which is less than 36dBm=4W.				

Table 8: Test Result of Maximum Conducted Output Power, 5.8GHz SRD

Test Mode	Test Channel (MHz)	Measured Average Power (MIMO mode_ANT0+3)		Limit (W)
		(dBm)	(W)	
1.4MHz BW	5728.5	14.69	0.0294	< 1.0
	5786.5	15.42	0.0348	
	5846.5	15.66	0.0368	
1.4MHz BW CA	5730.12	15.07	0.0321	< 1.0
	5788.12	15.34	0.0342	
	5848.12	15.49	0.0354	
3MHz BW	5727.5	15.54	0.0358	< 1.0
	5784.5	15.56	0.0360	
	5844.5	15.72	0.0373	
3MHz BW CA	5730.2	15.00	0.0316	< 1.0
	5787.2	15.41	0.0348	
	5847.2	15.40	0.0347	
10MHz BW	5730.5	25.90	0.3890	< 1.0
	5786.5	25.49	0.3540	
	5844.5	26.03	0.4009	
20MHz BW	5735.5	25.98	0.3963	< 1.0
	5786.5	25.29	0.3381	
	5839.5	25.98	0.3963	
40MHz BW	5745.5	25.88	0.3873	< 1.0
	5786.5	25.24	0.3342	
	5829.5	25.69	0.3707	
Maximum Measured Value		26.03	0.4009	
Max. e.i.r.p.=26.03dBm+3.07dBi=29.10dBm, which is less than 36dBm=4W.				

Note:

- 1) The cable loss is taken into account in results, e.i.r.p.=P_(Peak power)+ G

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 22 von 29
Page 22 of 29

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407 (a)
Basic standard : ANSI C63.10: 2013
Limits : <30dBm/500KHz (5725-5850MHz)
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-01-26 to 2024-02-06
Input voltage : DC 7.4V by battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A, B.

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 23 von 29
Page 23 of 29

5.1.4 Frequency Stability

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.407 (g)
Basic standard	:	ANSI C63.10: 2013
Limits	:	Within assigned bands
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2024-01-26 to 2024-02-06
Input voltage	:	DC 7.4V by battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	45 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A, B.

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 24 von 29
Page 24 of 29

5.1.5 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.407 (e)
Basic standard	:	ANSI C63.10: 2013
Limits	:	At least 500KHz (5725-5850MHz)
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2024-01-26 to 2024-02-06
Input voltage	:	DC 7.4V by battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	45 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A, B.

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 25 von 29
Page 25 of 29

5.1.6 26dB Bandwidth and 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407
Basic standard : ANSI C63.10: 2013
Limits : N/A
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-01-26 to 2024-02-06
Input voltage : DC 7.4V by battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A, B.

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:Seite 26 von 29
Page 26 of 29

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209
Basic standard	:	ANSI C63.10: 2013
Limits	:	<ul style="list-style-type: none">For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.Restricted Bands meet the requirement of 15.209 limit
Kind of test site	:	3m Semi-anechoic Chamber

Test Setup

Date of testing	:	2024-01-30 to 2024-02-05
Input voltage	:	AC 120V, 60Hz
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A, B.

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 27 von 29
Page 27 of 29

5.1.8 Dynamic Frequency Selection (DFS)

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.407(h) RSS-247 clause 6.3
Basic standard	:	ANSI C63.10: 2013
Limits	:	5250-5350MHz, 5470-5725MHz FCC Part 15.407(h)(2)
Kind of test site	:	Shielded Room
Test standard	:	FCC Part 15.407(h) RSS-247 clause 6.3
Basic standard	:	ANSI C63.10: 2013

Test Setup

Date of testing	:	2023-12-14
Input voltage	:	DC 7.4V by battery
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	23.3 °C
Relative humidity	:	50.8 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN244E0L 004
Test Report No.:

Seite 28 von 29
Page 28 of 29

5.1.9 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.207(a)
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Classification	:	Class B
Limits	:	FCC Part 15.207(a)
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2023-12-14
Input voltage	:	AC 120V, 60Hz
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	23.3 °C
Relative humidity	:	50.8 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A, B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix C.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT.....	9
Table 4: RF Channel and Frequency of 5.6GHz SRD.....	11
Table 5: RF Channel and Frequency of 5.8GHz SRD.....	11
Table 6: List of Accessories and Auxiliary Equipment.....	16
Table 7: Test Result of Maximum Conducted Output Power, 5.6GHz SRD.....	21
Table 8: Test Result of Maximum Conducted Output Power, 5.8GHz SRD.....	21