

TEST REPORT

Product Name : Smart Jump Rope
Brand Mark : N/A
Model No. : CJ20B
CJ20A, CJ20C, CJ20D, CJ20E, CJ20F,
CJ20G, CJ20H, CJ20I, CJ20J, CJ20K,
Extension model : CJ20L, CJ20M, CJ20N, CJ20O, CJ20P,
CJ20Q, CJ20R, CJ20S, CJ20T, CJ20U,
CJ20V, CJ20W, CJ20X, CJ20Y, CJ20Z
Report Number : BLA-EMC-202303-A4202
FCC ID : 2ANDX-CJX00
Date of Sample Receipt : 2023/3/16
Date of Test : 2023/3/16 to 2023/3/23
Date of Issue : 2023/3/23
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Shenzhen Yolanda Technology Co., Ltd
Room 201, Jinfulai Building, No.49-1, Dabao Road, Dalang Area, Xinan
Street, Baoan, Shenzhen, China

Prepared by:

BlueAsia Technical Services(Shenzhen) Co.,Ltd.
No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict,
Bao'an District, Shenzhen,Guangdong ,China
TEL: +86-755-23059481

Compiled by:

Jozu

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2023/3/23



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/3/23	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
4	TEST ENVIRONMENT	9
5	TEST MODE	9
6	MEASUREMENT UNCERTAINTY	9
7	DESCRIPTION OF SUPPORT UNIT	10
8	LABORATORY LOCATION	10
9	TEST INSTRUMENTS LIST	11
10	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	13
10.1	LIMITS	13
10.2	BLOCK DIAGRAM OF TEST SETUP	13
10.3	PROCEDURE	13
10.4	TEST DATA	15
11	CONDUCTED BAND EDGES MEASUREMENT	18
11.1	LIMITS	18
11.2	BLOCK DIAGRAM OF TEST SETUP	18
11.3	TEST DATA	19
12	ANTENNA REQUIREMENT	20
12.1	CONCLUSION	20
13	RADIATED SPURIOUS EMISSIONS	21
13.1	LIMITS	21
13.2	BLOCK DIAGRAM OF TEST SETUP	22
13.3	PROCEDURE	22
13.4	TEST DATA	24
14	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	33
14.1	LIMITS	33
14.2	BLOCK DIAGRAM OF TEST SETUP	34
14.3	PROCEDURE	34
14.4	TEST DATA	36

15	CONDUCTED SPURIOUS EMISSIONS	41
15.1	LIMITS	41
15.2	BLOCK DIAGRAM OF TEST SETUP	41
15.3	TEST DATA	42
16	POWER SPECTRUM DENSITY	43
16.1	LIMITS	43
16.2	BLOCK DIAGRAM OF TEST SETUP	43
16.3	TEST DATA	43
17	CONDUCTED PEAK OUTPUT POWER	44
17.1	LIMITS	44
17.2	BLOCK DIAGRAM OF TEST SETUP	44
17.3	TEST DATA	45
18	MINIMUM 6DB BANDWIDTH	46
18.1	LIMITS	46
18.2	BLOCK DIAGRAM OF TEST SETUP	46
18.3	TEST DATA	46
19	APPENDIX	47
19.1	APPENDIX A: DTS BANDWIDTH	47
	<i>Test Result</i>	47
	<i>Test Graphs</i>	48
19.2	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	50
	<i>Test Result</i>	50
	<i>Test Graphs</i>	51
19.3	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	53
	<i>Test Result</i>	53
	<i>Test Graphs</i>	54
19.4	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	56
	<i>Test Result</i>	56
	<i>Test Graphs</i>	57
19.5	APPENDIX E: BAND EDGE MEASUREMENTS	59
	<i>Test Result</i>	59
	<i>Test Graphs</i>	60
19.6	APPENDIX F: CONDUCTED SPURIOUS EMISSION	61
	<i>Test Result</i>	61

Test Graphs 62

APPENDIX A: PHOTOGRAPHS OF TEST SETUP **67**

APPENDIX B: PHOTOGRAPHS OF EUT **69**

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass

2 GENERAL INFORMATION

Applicant	Shenzhen Yolanda Technology Co., Ltd
Address	Room 201, Jinfulai Building, No.49-1, Dabao Road, Dalang Area, Xinan Street, Baoan, Shenzhen, China
Manufacturer	Shenzhen Yolanda Technology Co., Ltd
Address	Room 201, Jinfulai Building, No.49-1, Dabao Road, Dalang Area, Xinan Street, Baoan, Shenzhen, China
Product Name	Smart Jump Rope
Test Model No.	CJ20B
Extension model	CJ20A, CJ20C, CJ20D, CJ20E, CJ20F, CJ20G, CJ20H, CJ20I, CJ20J, CJ20K, CJ20L, CJ20M, CJ20N, CJ20O, CJ20P, CJ20Q, CJ20R, CJ20S, CJ20T, CJ20U, CJ20V, CJ20W, CJ20X, CJ20Y, CJ20Z
Note	The above models all use the same PCB layout internal structure and circuit. The difference lies in the color and model name.

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	S05_56C_V1.0_20221022
Software Version	V2.1.0
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	PCB Antenna
Antenna Gain:	1.2dBi (Provided by the applicant)

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.7v

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2023/08/16
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2023/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2023/6/30

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

10.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

10.2 BLOCK DIAGRAM OF TEST SETUP

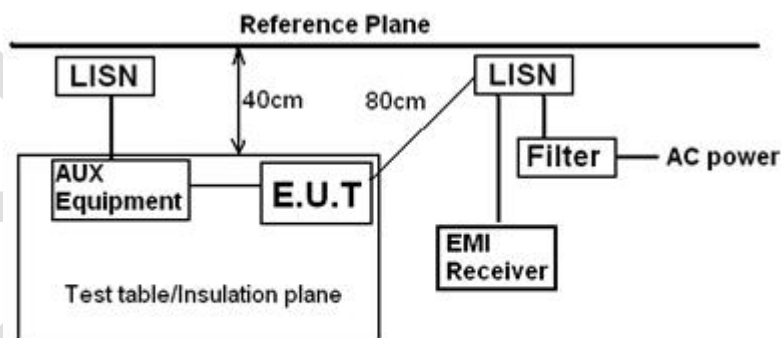

Remark
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

10.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.


- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

10.4 TEST DATA

[TestMode: TX]; [Line: Line] ;[Power:AC120V/60Hz]

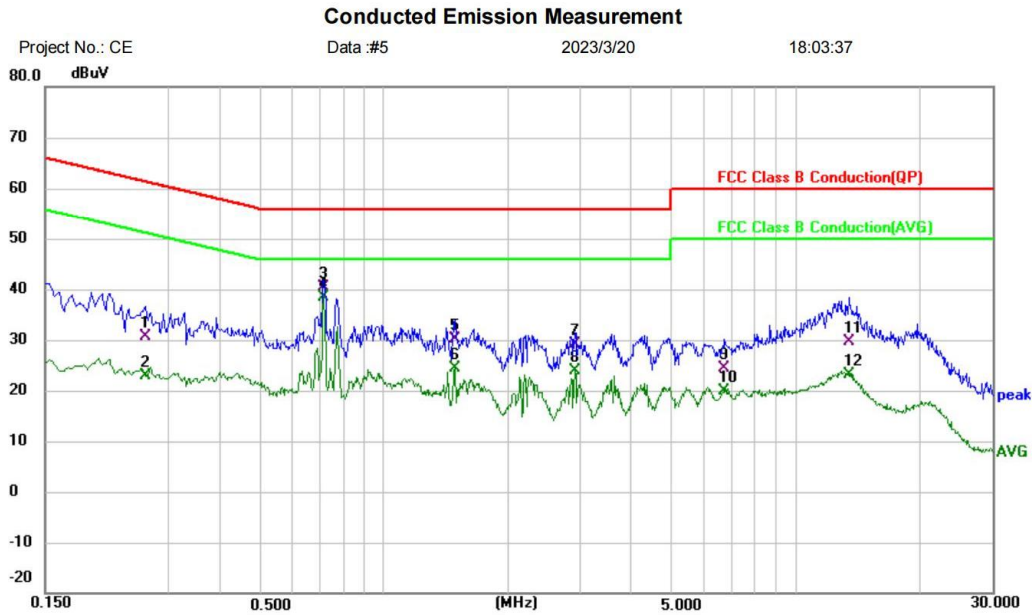

Site: _____ Phase: **L1** Temperature: (C)
 Limit: FCC Class B Conduction(QP) Power: _____ Humidity: %RH
 EUT: Smart Jump Rope
 M/N: CJ20B
 Mode: TX mode
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2620	20.00	10.62	30.62	61.37	-30.75	QP	
2	0.2620	12.31	10.62	22.93	51.37	-28.44	AVG	
3	0.7140	30.35	10.09	40.44	56.00	-15.56	QP	
4 *	0.7140	28.30	10.09	38.39	46.00	-7.61	AVG	
5	1.4860	19.92	10.21	30.13	56.00	-25.87	QP	
6	1.4860	14.29	10.21	24.50	46.00	-21.50	AVG	
7	2.9140	18.86	10.23	29.09	56.00	-26.91	QP	
8	2.9140	13.53	10.23	23.76	46.00	-22.24	AVG	
9	6.7020	14.30	10.06	24.36	60.00	-35.64	QP	
10	6.7020	9.89	10.06	19.95	50.00	-30.05	AVG	
11	13.4140	19.71	10.00	29.71	60.00	-30.29	QP	
12	13.4140	13.17	10.00	23.17	50.00	-26.83	AVG	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass