


Horizontal
70.0 dBuV/m

Fundamental frequency



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	67.9129	37.89	-19.33	18.56	40.00	-21.44
2	96.4362	41.16	-18.43	22.73	43.50	-20.77
3	119.8556	49.97	-19.93	30.04	43.50	-13.46
4	167.8243	45.19	-19.56	25.63	43.50	-17.87
5	332.5187	42.34	-14.40	27.94	46.00	-18.06
6	467.2349	39.90	-14.38	25.52	46.00	-20.48

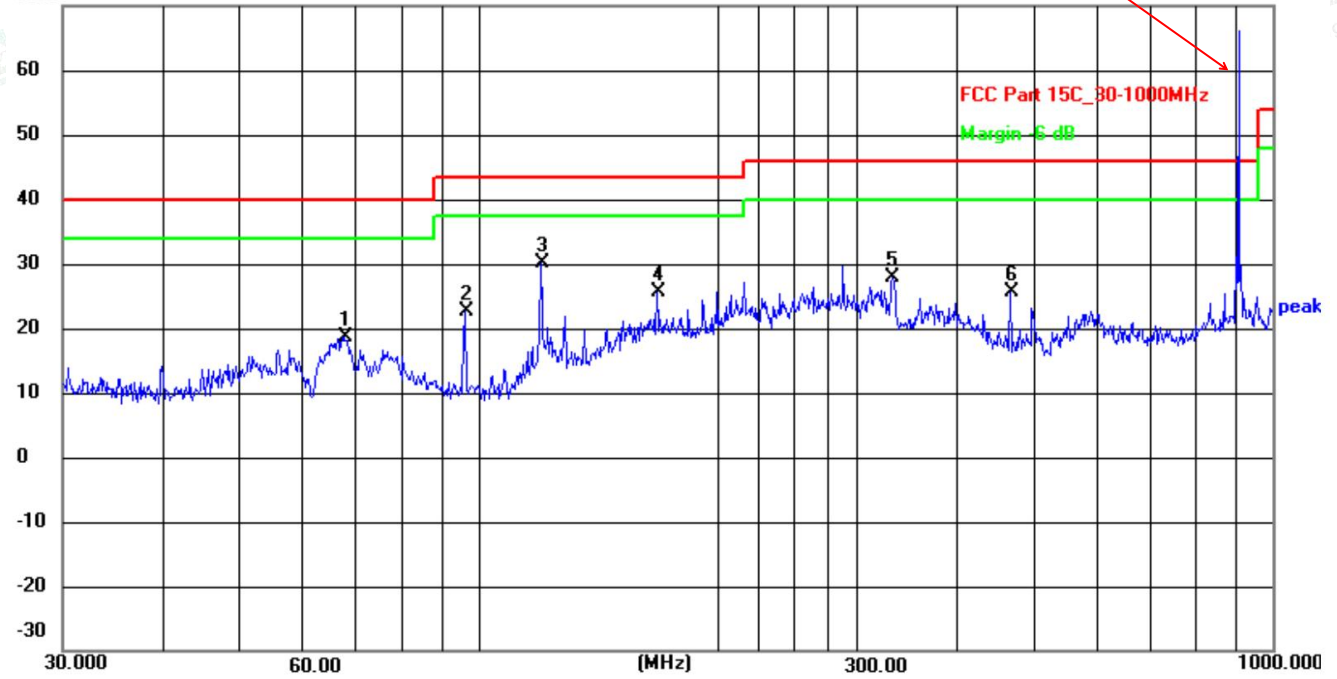




Channel 19 / 915.0 MHz

Vertical

70.0 dBuV/m

Fundamental frequency

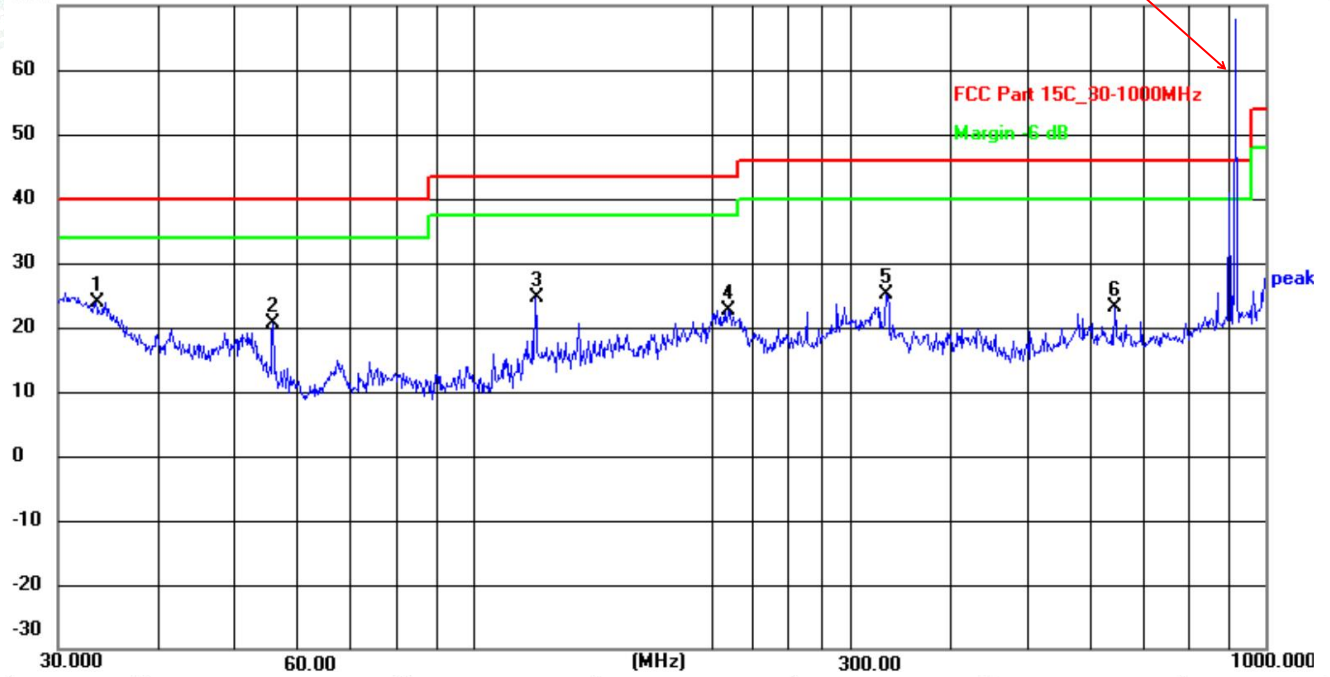


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	33.4449	41.83	-18.00	23.83	40.00	-16.17
2	56.0007	38.78	-18.13	20.65	40.00	-19.35
3	119.8556	44.50	-19.93	24.57	43.50	-18.93
4	210.0481	39.81	-17.13	22.68	43.50	-20.82
5	332.5187	39.43	-14.40	25.03	46.00	-20.97
6	645.1194	34.16	-11.04	23.12	46.00	-22.88






Horizontal
70.0 dBuV/m

Fundamental frequency

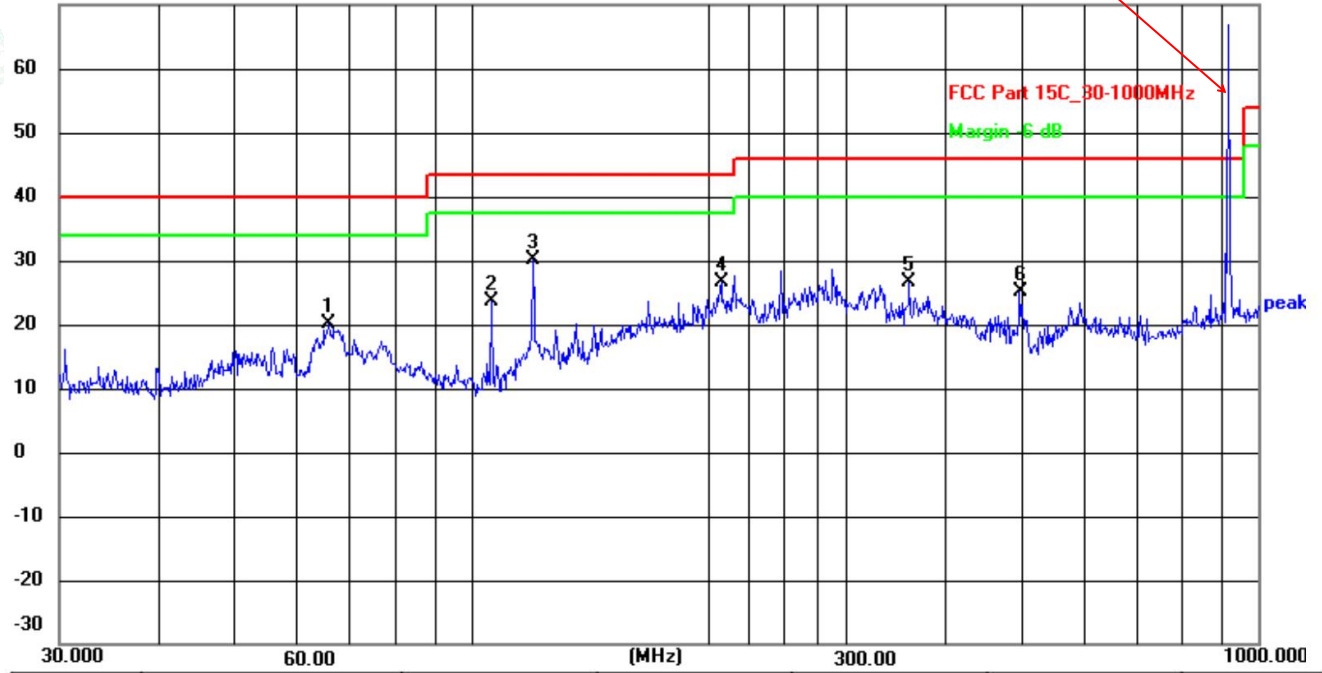

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	66.0342	39.26	-19.22	20.04	40.00	-19.96
2	106.0126	42.35	-18.71	23.64	43.50	-19.86
3	119.8556	50.09	-19.93	30.16	43.50	-13.34
4	207.8501	43.83	-17.18	26.65	43.50	-16.85
5	360.4476	41.33	-14.81	26.52	46.00	-19.48
6	497.6765	38.33	-13.28	25.05	46.00	-20.95






Channel 40 / 925.0 MHz

Vertical

70.0 dBuV/m

Fundamental frequency

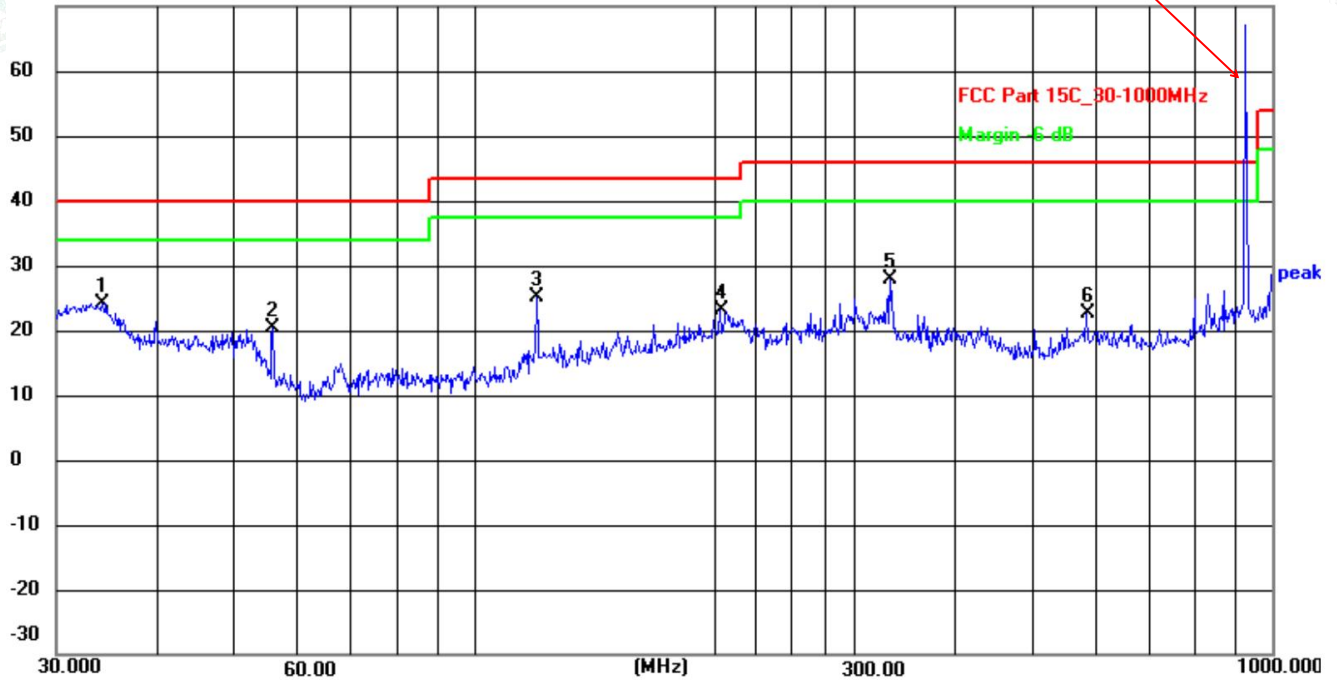


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	34.2760	42.14	-17.90	24.24	40.00	-15.76
2	56.0007	38.63	-18.13	20.50	40.00	-19.50
3	119.8556	45.13	-19.93	25.20	43.50	-18.30
4	203.5228	40.43	-17.31	23.12	43.50	-20.38
5	332.5187	42.19	-14.40	27.79	46.00	-18.21
6	584.7895	33.37	-10.69	22.68	46.00	-23.32





Horizontal
70.0 dBuV/m

Fundamental frequency

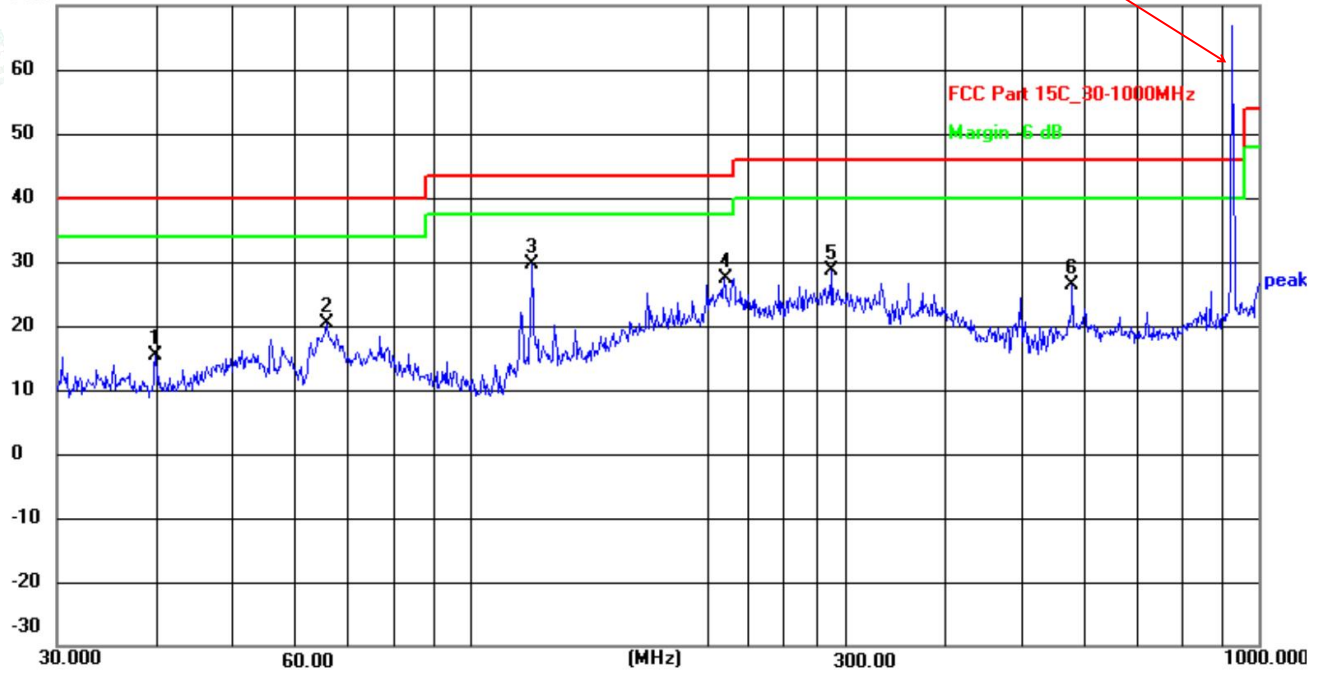

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	39.9942	32.92	-17.54	15.38	40.00	-24.62
2	65.8031	39.71	-19.21	20.50	40.00	-19.50
3	119.8556	49.57	-19.93	29.64	43.50	-13.86
4	210.0482	44.53	-17.14	27.39	43.50	-16.11
5	287.9904	44.15	-15.50	28.65	46.00	-17.35
6	580.7026	37.20	-10.77	26.43	46.00	-19.57






Temperature	23.8°C	Humidity	52.1%
Test Engineer	Mening Su	Modulation	4-FSK

Channel 0 /905.0 MHz

Vertical

70.0 dBuV/m

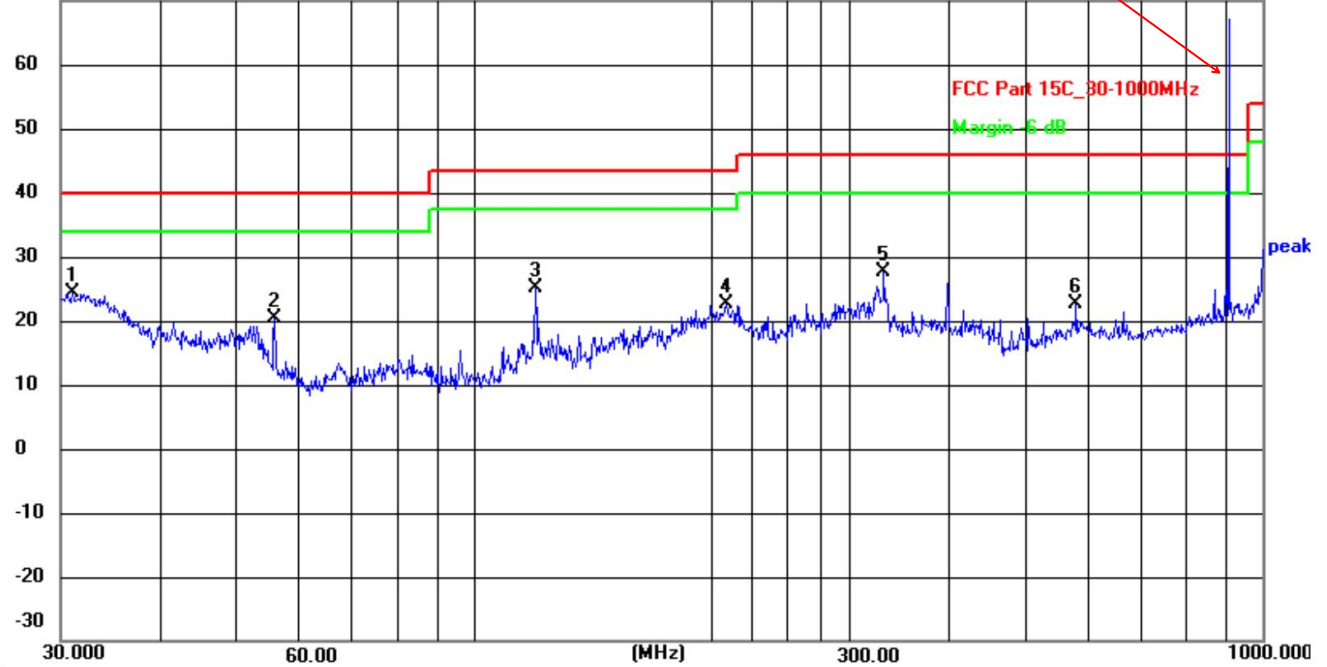


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	31.0706	42.72	-18.31	24.41	40.00	-15.59
2	56.0007	38.54	-18.13	20.41	40.00	-19.59
3	119.8556	45.07	-19.93	25.14	43.50	-18.36
4	209.3129	39.68	-17.15	22.53	43.50	-20.97
5	331.3546	42.09	-14.36	27.73	46.00	-18.27
6	580.7026	33.43	-10.77	22.66	46.00	-23.34





Horizontal
70.0 dBuV/m

Fundamental frequency

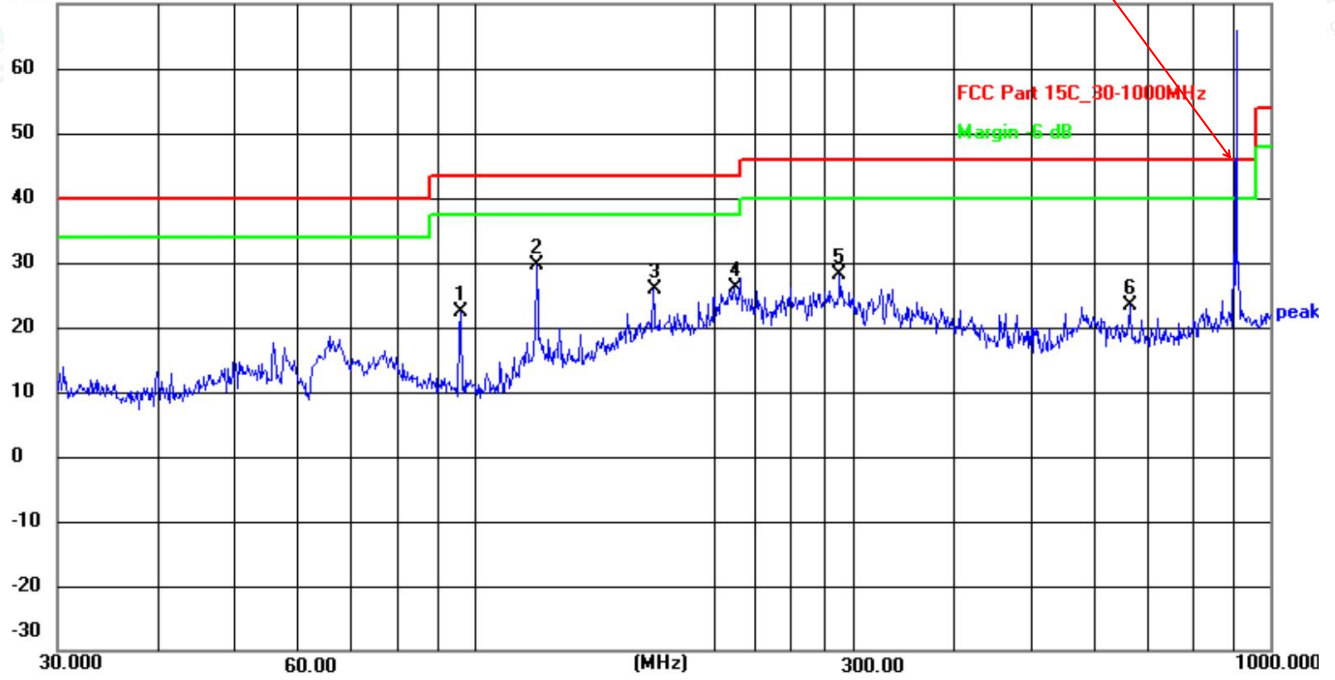

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	96.0986	40.94	-18.45	22.49	43.50	-21.01
2	119.8556	49.45	-19.93	29.52	43.50	-13.98
3	167.8243	45.53	-19.56	25.97	43.50	-17.53
4	212.2695	43.17	-17.08	26.09	43.50	-17.41
5	287.9904	43.70	-15.50	28.20	46.00	-17.80
6	665.8035	34.32	-11.06	23.26	46.00	-22.74






Channel 19 / 915.0 MHz

Vertical

70.0 dBuV/m

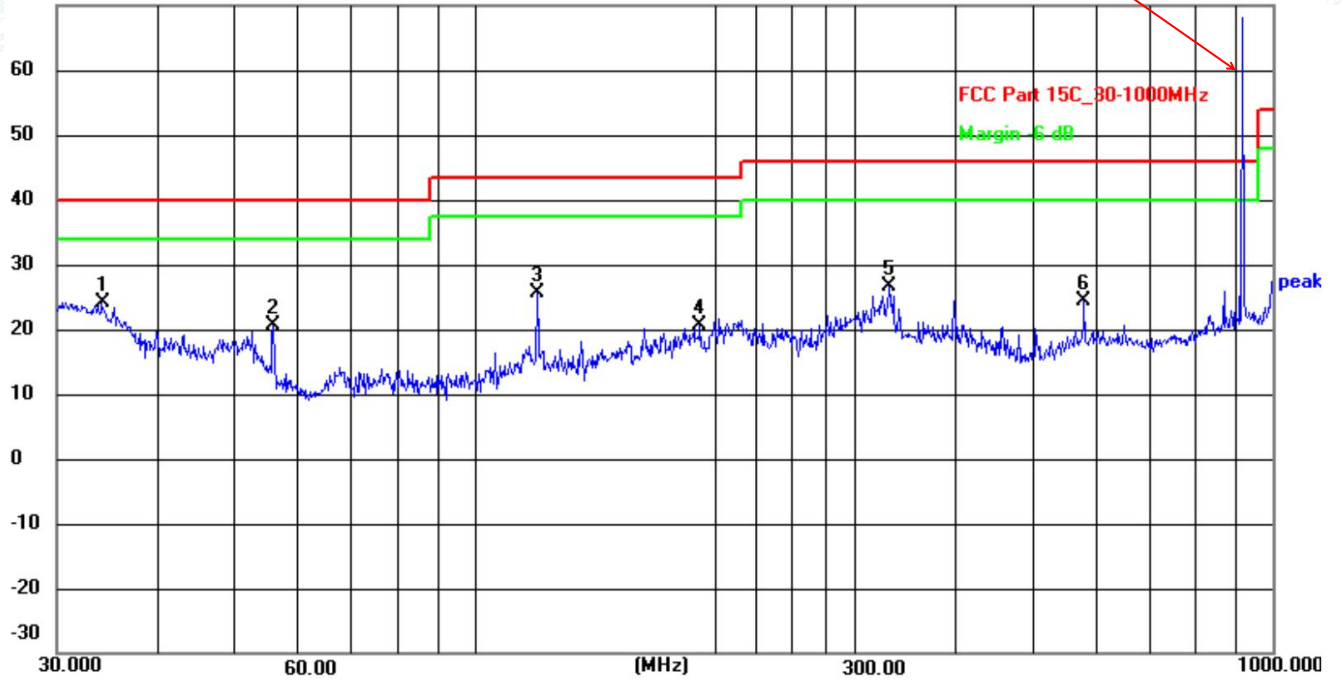


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	34.1561	42.16	-17.91	24.25	40.00	-15.75
2	56.0007	38.85	-18.13	20.72	40.00	-19.28
3	119.8556	45.64	-19.93	25.71	43.50	-17.79
4	191.7450	38.78	-18.17	20.61	43.50	-22.89
5	331.3546	40.87	-14.36	26.51	46.00	-19.49
6	580.7026	35.20	-10.77	24.43	46.00	-21.57





Horizontal
70.0 dBuV/m

Fundamental frequency

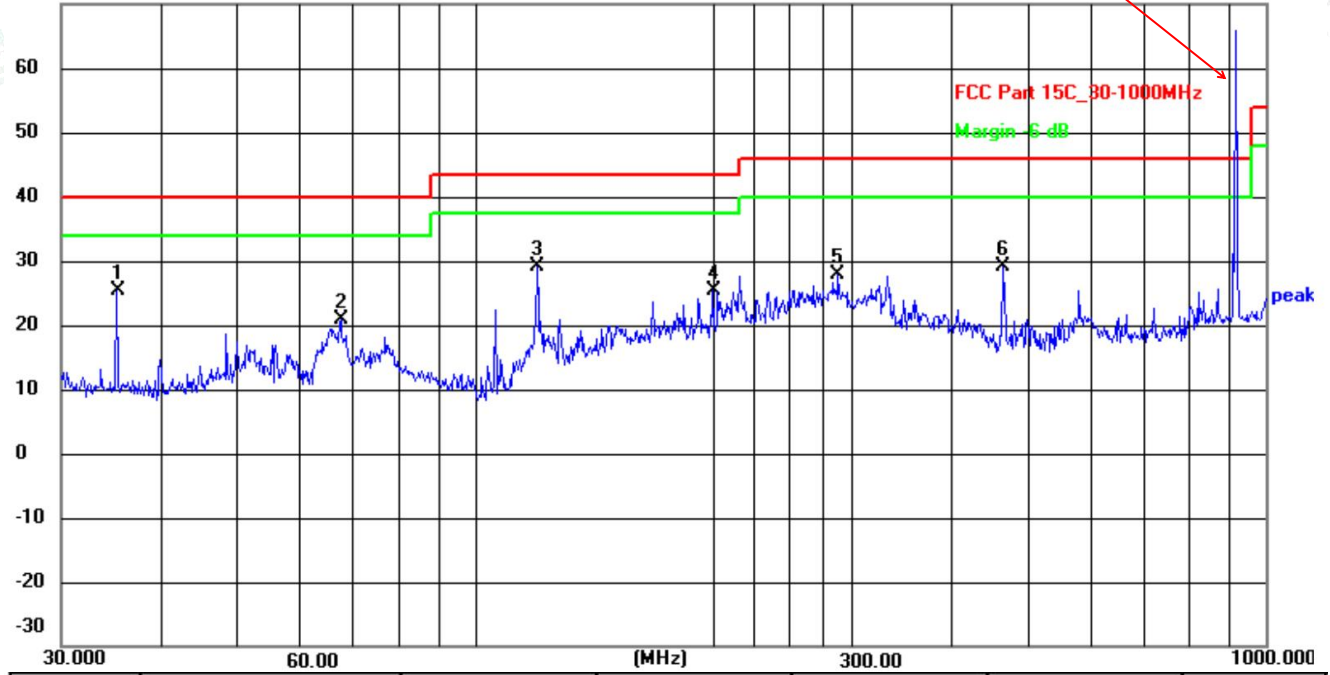

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	35.2512	43.10	-17.79	25.31	40.00	-14.69
2	67.6751	40.10	-19.32	20.78	40.00	-19.22
3	119.8556	48.98	-19.93	29.05	43.50	-14.45
4	199.9856	42.87	-17.39	25.48	43.50	-18.02
5	287.9904	43.37	-15.50	27.87	46.00	-18.13
6	465.5994	43.50	-14.36	29.14	46.00	-16.86






Channel 40 / 925.0 MHz

Vertical

70.0 dBuV/m

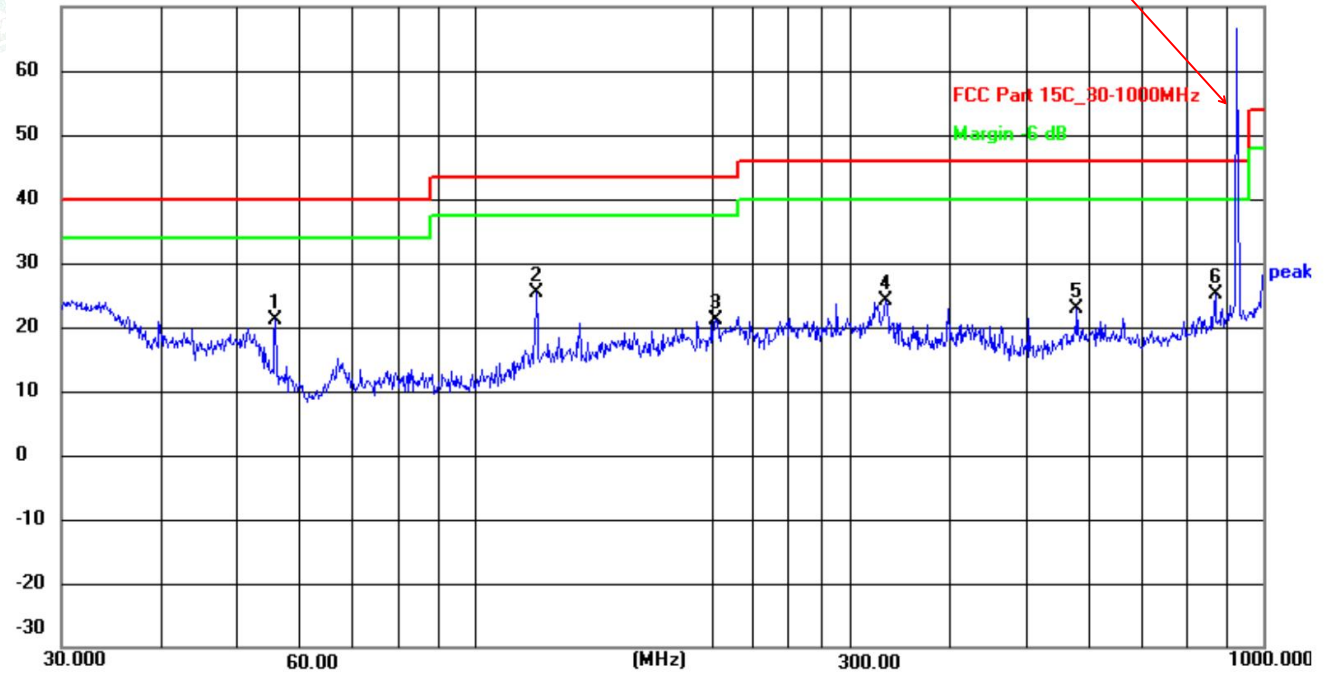


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	56.0007	39.16	-18.13	21.03	40.00	-18.97
2	119.8556	45.39	-19.93	25.46	43.50	-18.04
3	202.1005	38.56	-17.33	21.23	43.50	-22.27
4	332.5187	38.51	-14.40	24.11	46.00	-21.89
5	580.7026	33.64	-10.77	22.87	46.00	-23.13
6	869.1302	33.96	-8.75	25.21	46.00	-20.79





Horizontal
70.0 dBuV/m

Fundamental frequency

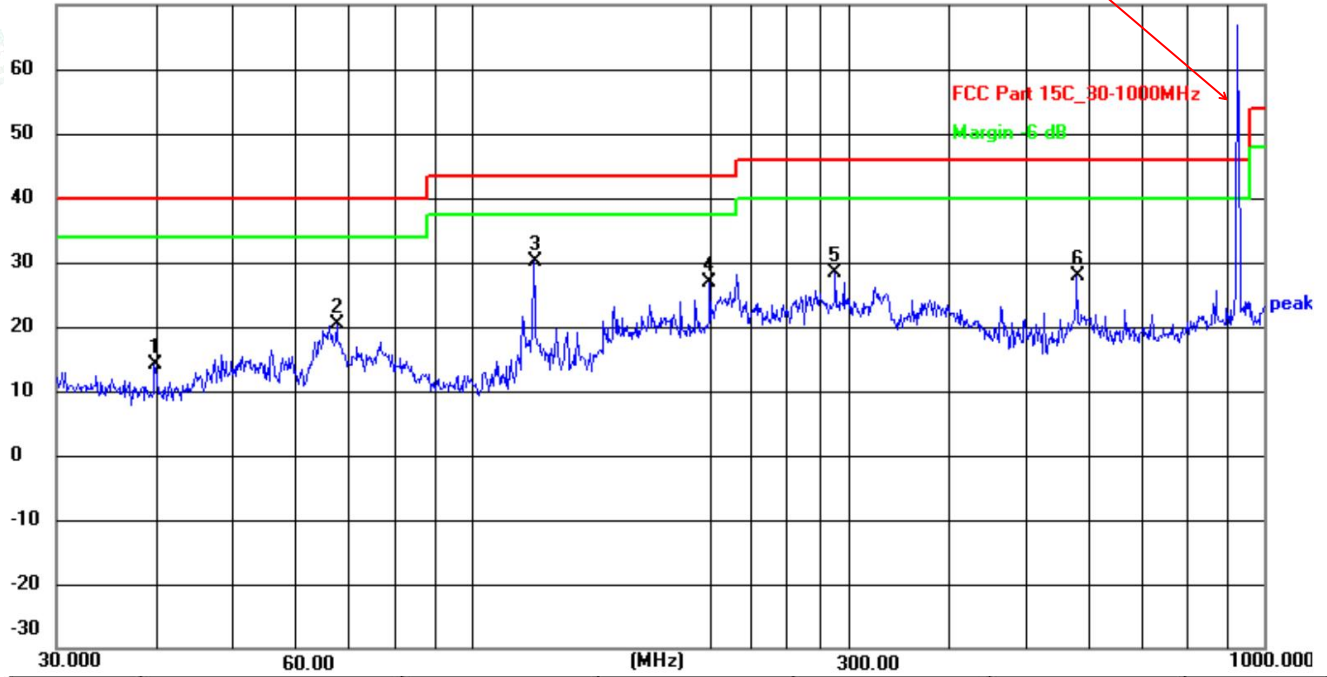

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	39.8542	31.68	-17.56	14.12	40.00	-25.88
2	67.6751	39.64	-19.32	20.32	40.00	-19.68
3	119.8556	50.15	-19.93	30.22	43.50	-13.28
4	199.9855	44.35	-17.39	26.96	43.50	-16.54
5	287.9904	43.95	-15.50	28.45	46.00	-17.55
6	580.7026	38.62	-10.77	27.85	46.00	-18.15






Temperature	23.8°C	Humidity	52.1%
Test Engineer	Mening Su	Modulation	4-GFSK05

Channel 0 /905.0 MHz

Vertical

70.0 dBuV/m

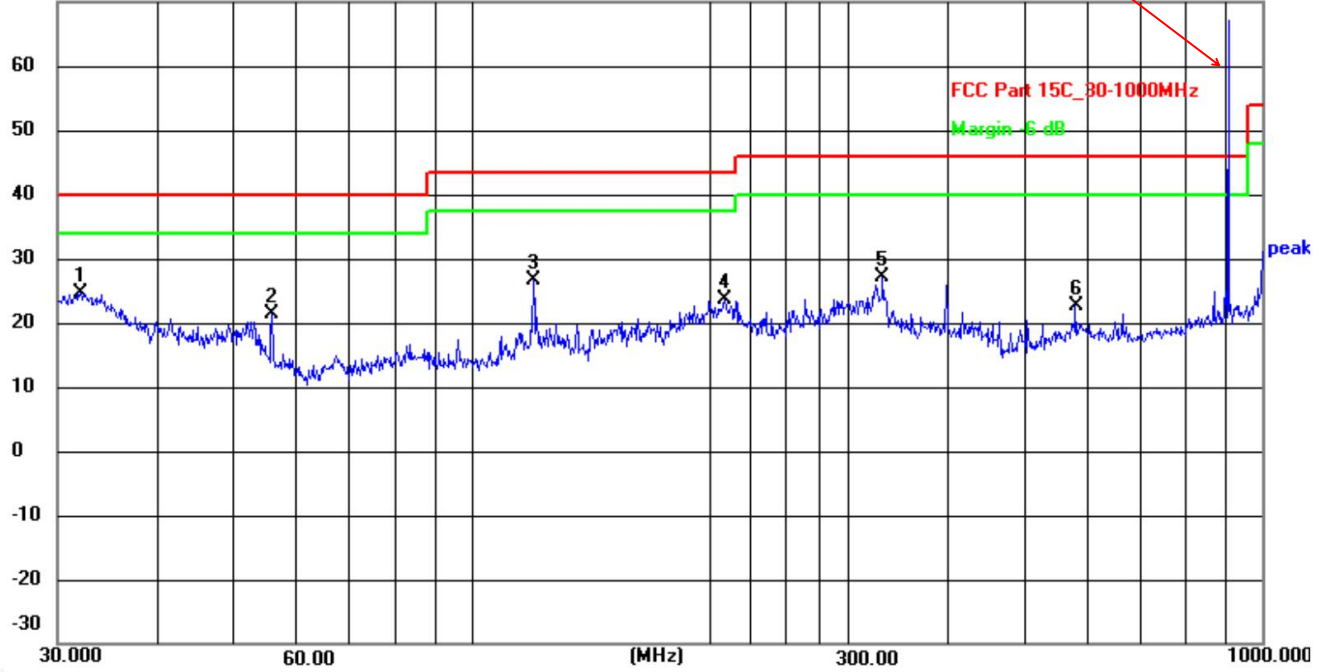


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	32.0667	42.79	-18.17	24.62	40.00	-15.38
2	56.0007	39.54	-18.13	21.41	40.00	-18.59
3	119.8555	46.57	-19.93	26.64	43.50	-16.86
4	209.3129	40.68	-17.15	23.53	43.50	-19.97
5	331.3546	41.59	-14.36	27.23	46.00	-18.77
6	580.7025	33.43	-10.77	22.66	46.00	-23.34





Horizontal
70.0 dBuV/m

Fundamental frequency

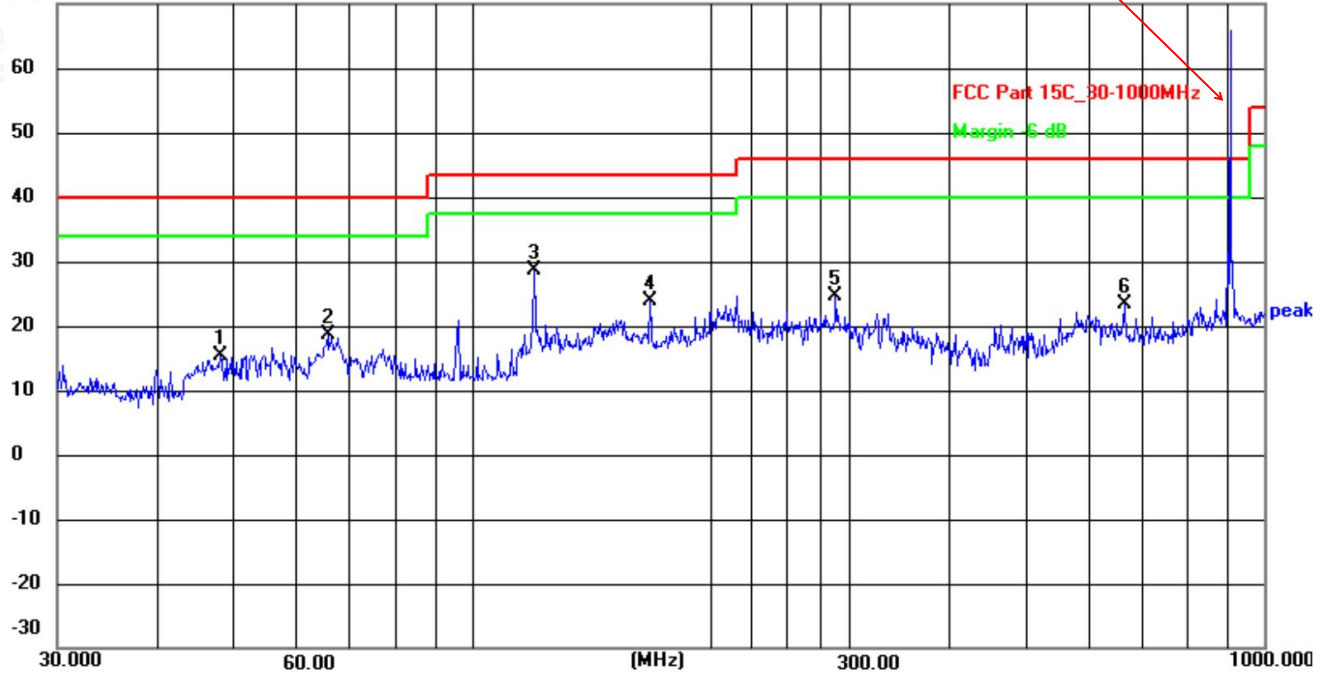

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	48.1625	32.33	-16.98	15.35	40.00	-24.65
2	65.8028	37.77	-19.21	18.56	40.00	-21.44
3	119.8555	48.45	-19.93	28.52	43.50	-14.98
4	167.8240	43.53	-19.56	23.97	43.50	-19.53
5	287.9904	40.20	-15.50	24.70	46.00	-21.30
6	665.8034	34.32	-11.06	23.26	46.00	-22.74






Channel 19 / 915.0 MHz

Vertical

70.0 dBuV/m

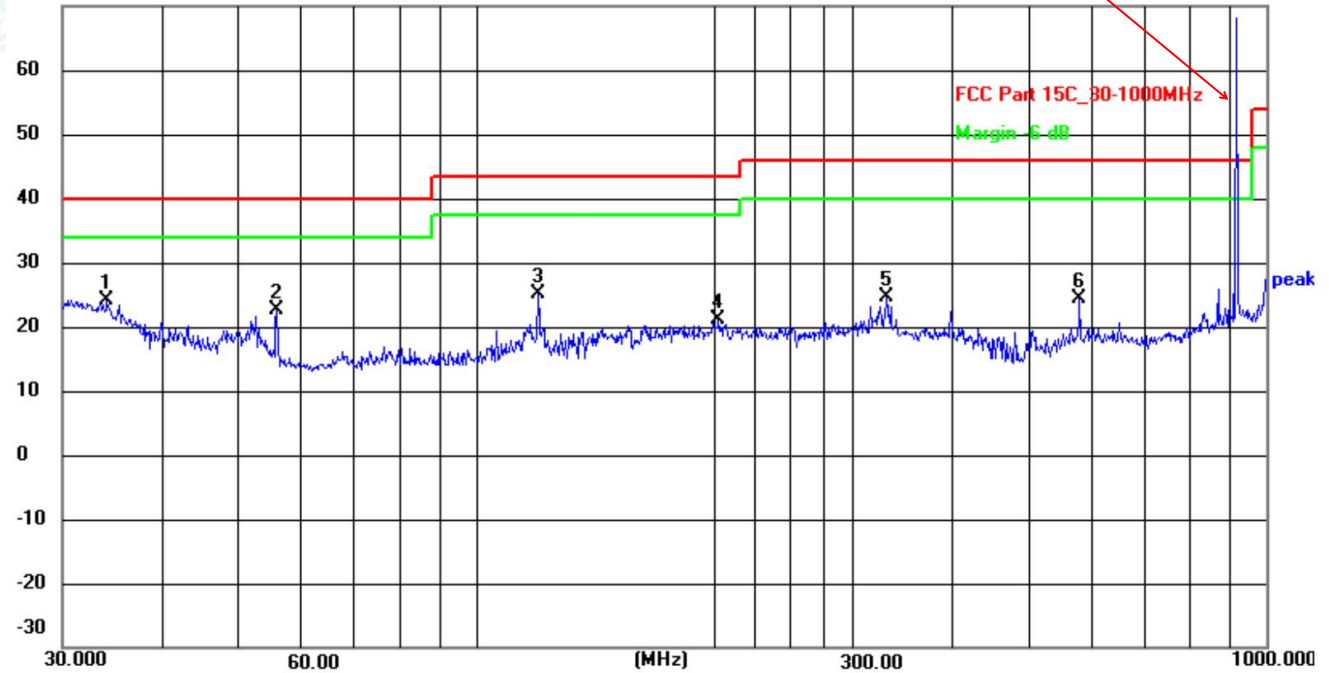


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	34.1559	42.16	-17.91	24.25	40.00	-15.75
2	56.0007	40.85	-18.13	22.72	40.00	-17.28
3	119.8555	45.14	-19.93	25.21	43.50	-18.29
4	202.8103	38.54	-17.31	21.23	43.50	-22.27
5	331.3546	38.87	-14.36	24.51	46.00	-21.49
6	580.7024	35.20	-10.77	24.43	46.00	-21.57





Horizontal
70.0 dBuV/m

Fundamental frequency

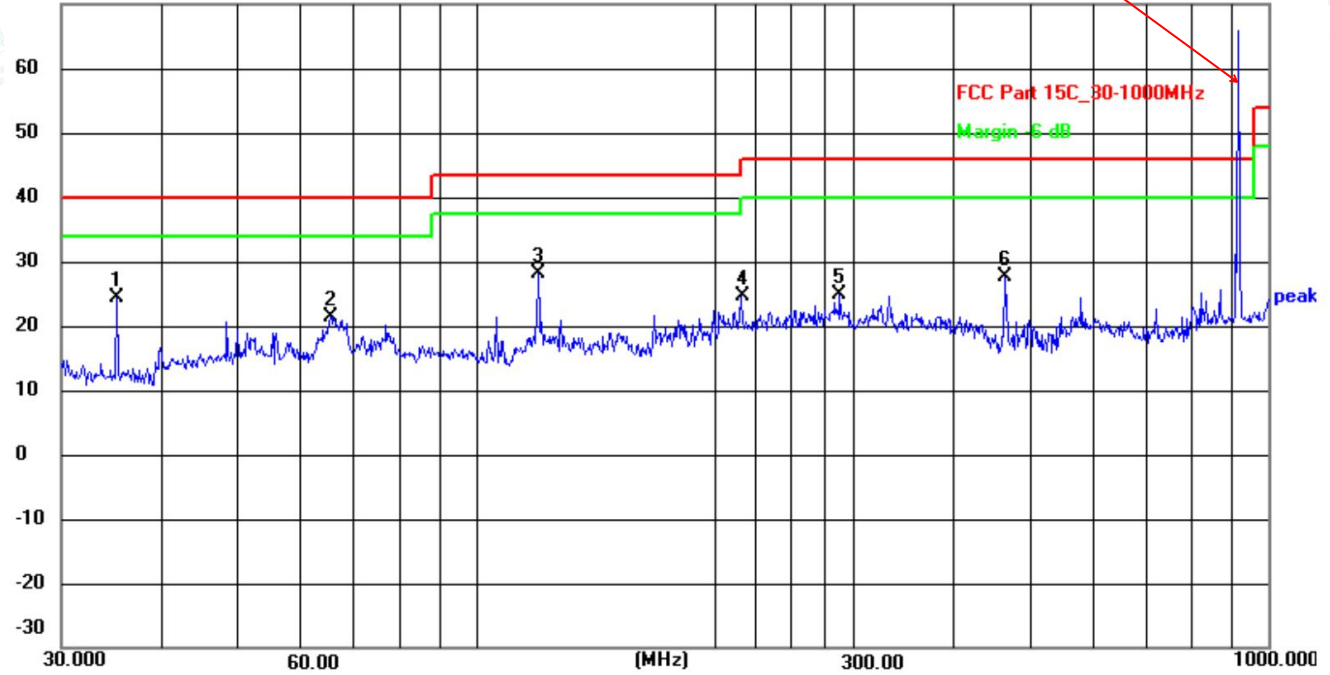

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	35.2511	42.10	-17.79	24.31	40.00	-15.69
2	65.5725	40.56	-19.19	21.37	40.00	-18.63
3	119.8555	47.98	-19.93	28.05	43.50	-15.45
4	216.0236	41.69	-16.98	24.71	46.00	-21.29
5	287.9904	40.37	-15.50	24.87	46.00	-21.13
6	465.5994	41.99	-14.35	27.64	46.00	-18.36






Channel 40 / 925.0 MHz

Vertical

70.0 dBuV/m

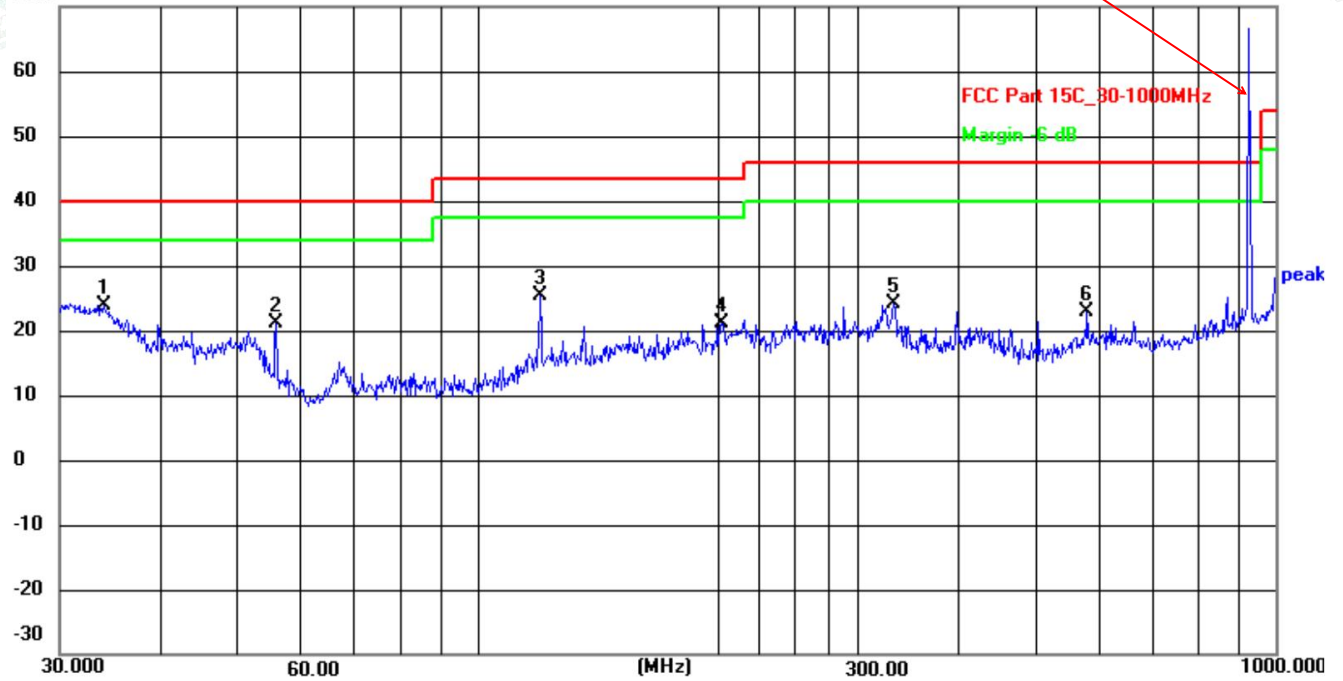


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	34.0363	41.90	-17.93	23.97	40.00	-16.03
2	56.0007	39.16	-18.13	21.03	40.00	-18.97
3	119.8555	45.39	-19.93	25.46	43.50	-18.04
4	202.1004	38.56	-17.33	21.23	43.50	-22.27
5	332.5187	38.51	-14.40	24.11	46.00	-21.89
6	580.7024	33.64	-10.77	22.87	46.00	-23.13






Horizontal
70.0 dBuV/m

Fundamental frequency

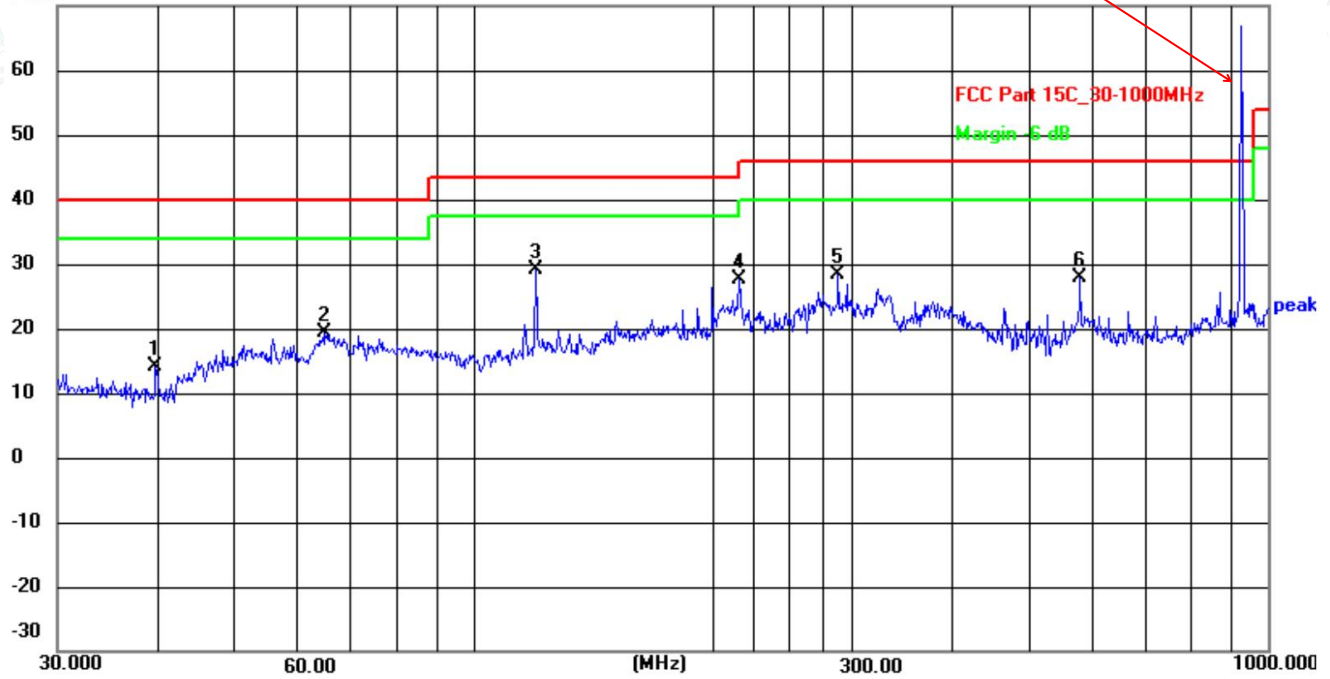

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	39.8541	31.68	-17.56	14.12	40.00	-25.88
2	65.1144	38.66	-19.17	19.49	40.00	-20.51
3	119.8555	49.15	-19.93	29.22	43.50	-14.28
4	216.0235	44.66	-16.98	27.68	46.00	-18.32
5	287.9904	43.95	-15.50	28.45	46.00	-17.55
6	580.7024	38.62	-10.77	27.85	46.00	-18.15






Temperature	23.8°C	Humidity	52.1%
Test Engineer	Mening Su	Modulation	ASK

Channel 0 /905.0 MHz

Vertical

70.0 dBuV/m

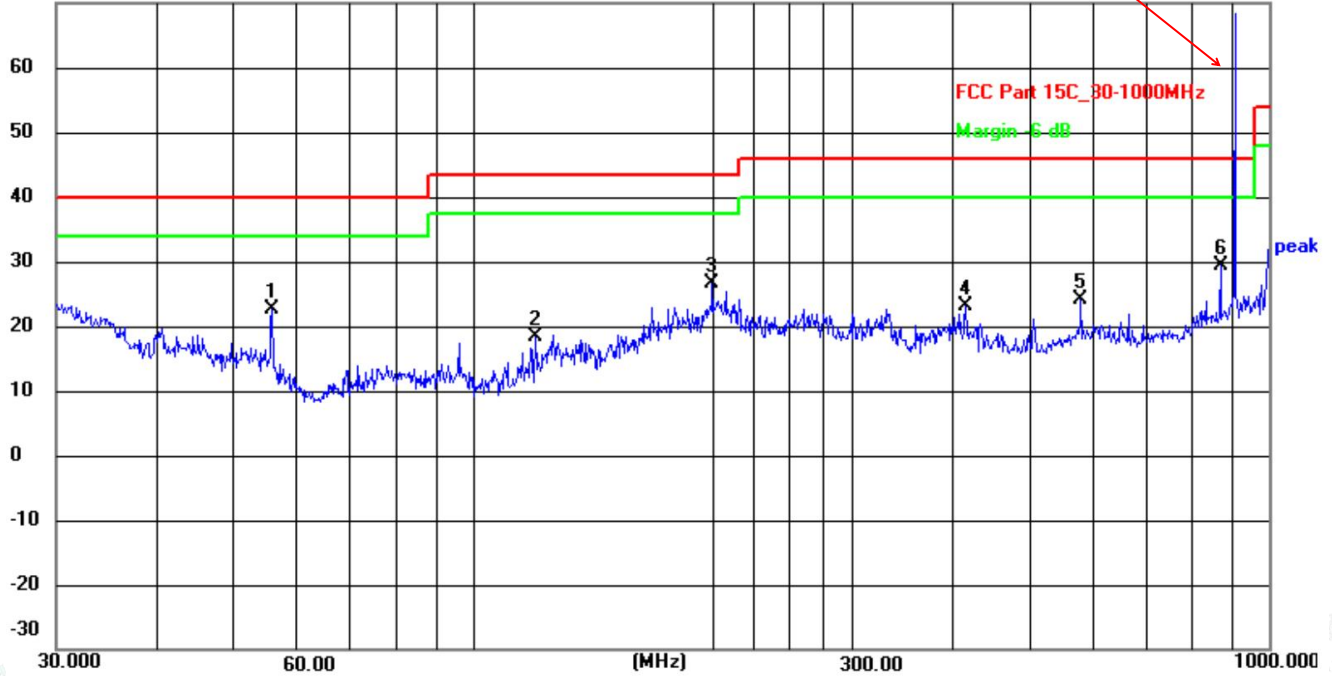


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	56.0007	40.86	-18.13	22.73	40.00	-17.27
2	119.8555	38.22	-19.93	18.29	43.50	-25.21
3	199.9855	43.98	-17.39	26.59	43.50	-16.91
4	416.1791	37.63	-14.42	23.21	46.00	-22.79
5	580.7024	35.00	-10.77	24.23	46.00	-21.77
6	869.1300	38.17	-8.75	29.42	46.00	-16.58





Horizontal
70.0 dBuV/m

Fundamental frequency

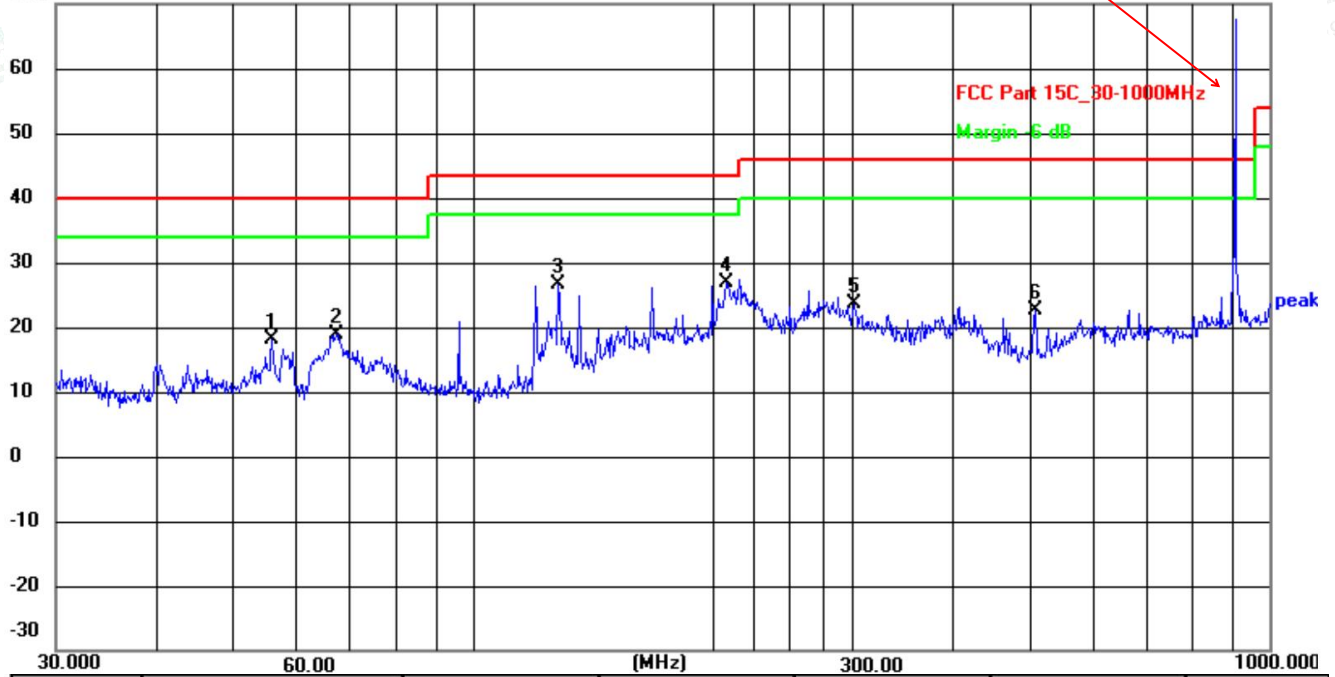

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	56.0007	36.31	-18.13	18.18	40.00	-21.82
2	67.4381	38.24	-19.32	18.92	40.00	-21.08
3	128.1125	47.18	-20.45	26.73	43.50	-16.77
4	207.8500	44.03	-17.19	26.84	43.50	-16.66
5	301.4223	39.08	-15.54	23.54	46.00	-22.46
6	508.2581	35.63	-13.02	22.61	46.00	-23.39






Channel 19 / 915.0 MHz


Vertical

70.0 dBuV/m

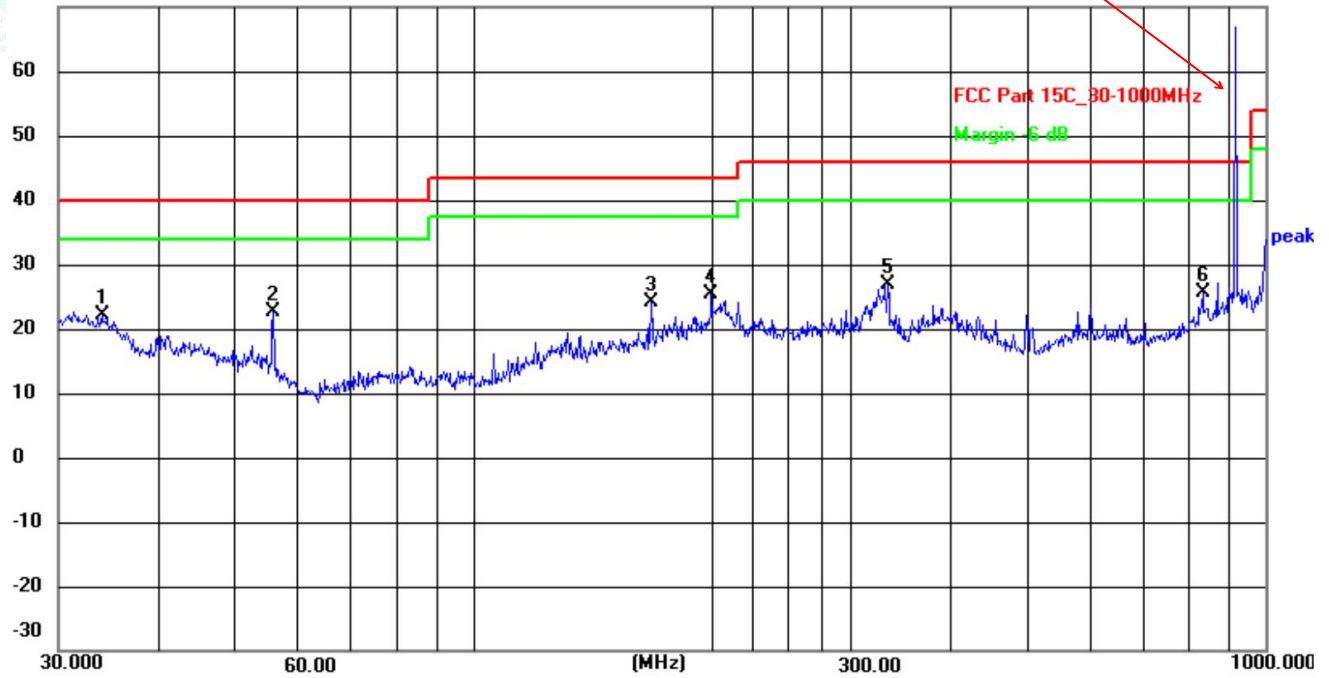


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	34.0363	40.07	-17.93	22.14	40.00	-17.86
2	56.0007	40.67	-18.13	22.54	40.00	-17.46
3	167.8240	43.60	-19.56	24.04	43.50	-19.46
4	199.9855	42.81	-17.39	25.42	43.50	-18.08
5	333.6865	41.38	-14.43	26.95	46.00	-19.05
6	833.3170	34.63	-9.04	25.59	46.00	-20.41





Horizontal
70.0 dBuV/m

Fundamental frequency

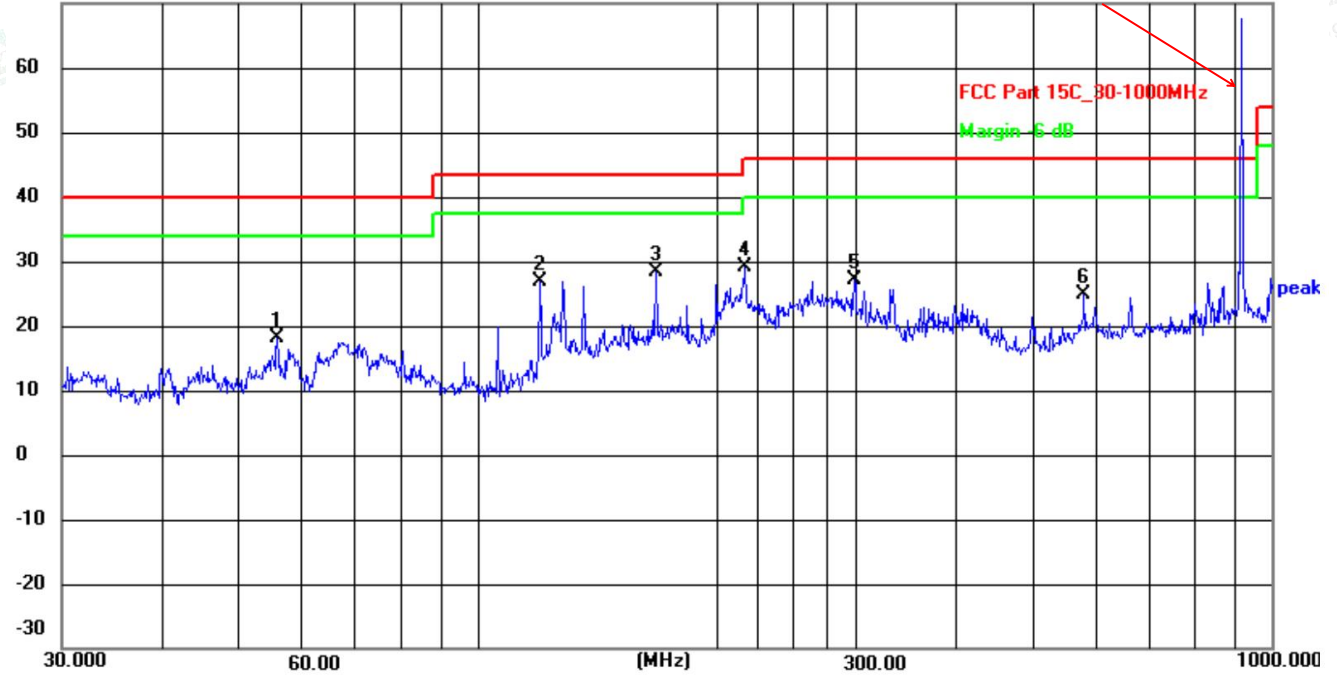

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	56.0007	36.22	-18.13	18.09	40.00	-21.91
2	119.8555	46.86	-19.93	26.93	43.50	-16.57
3	167.8240	47.96	-19.56	28.40	43.50	-15.10
4	217.5440	46.16	-16.94	29.22	46.00	-16.78
5	298.2681	42.74	-15.61	27.13	46.00	-18.87
6	580.7024	35.53	-10.77	24.76	46.00	-21.24






Channel 40 / 925.0 MHz

Vertical

70.0 dBuV/m

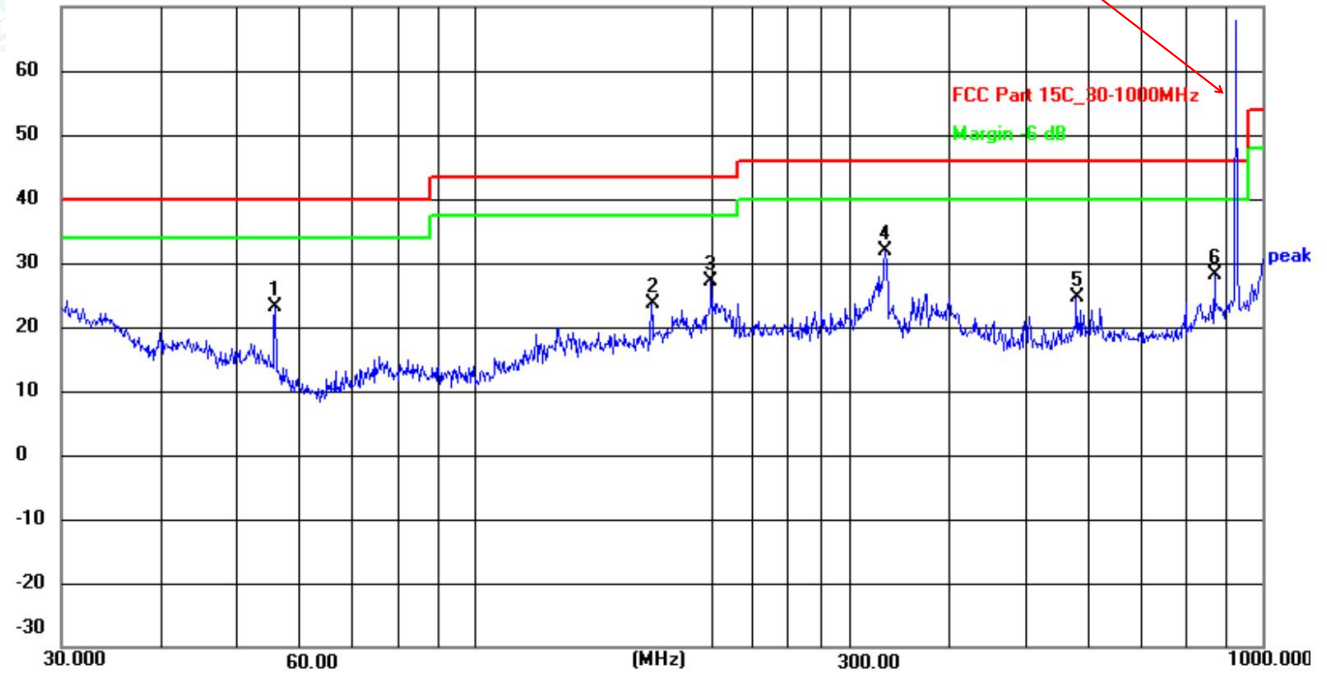


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	56.0007	41.21	-18.13	23.08	40.00	-16.92
2	167.8241	43.27	-19.56	23.71	43.50	-19.79
3	199.9855	44.47	-17.39	27.08	43.50	-16.42
4	332.5187	46.33	-14.40	31.93	46.00	-14.07
5	580.7025	35.50	-10.77	24.73	46.00	-21.27
6	869.1301	36.93	-8.75	28.18	46.00	-17.82





Horizontal
70.0 dBuV/m

Fundamental frequency

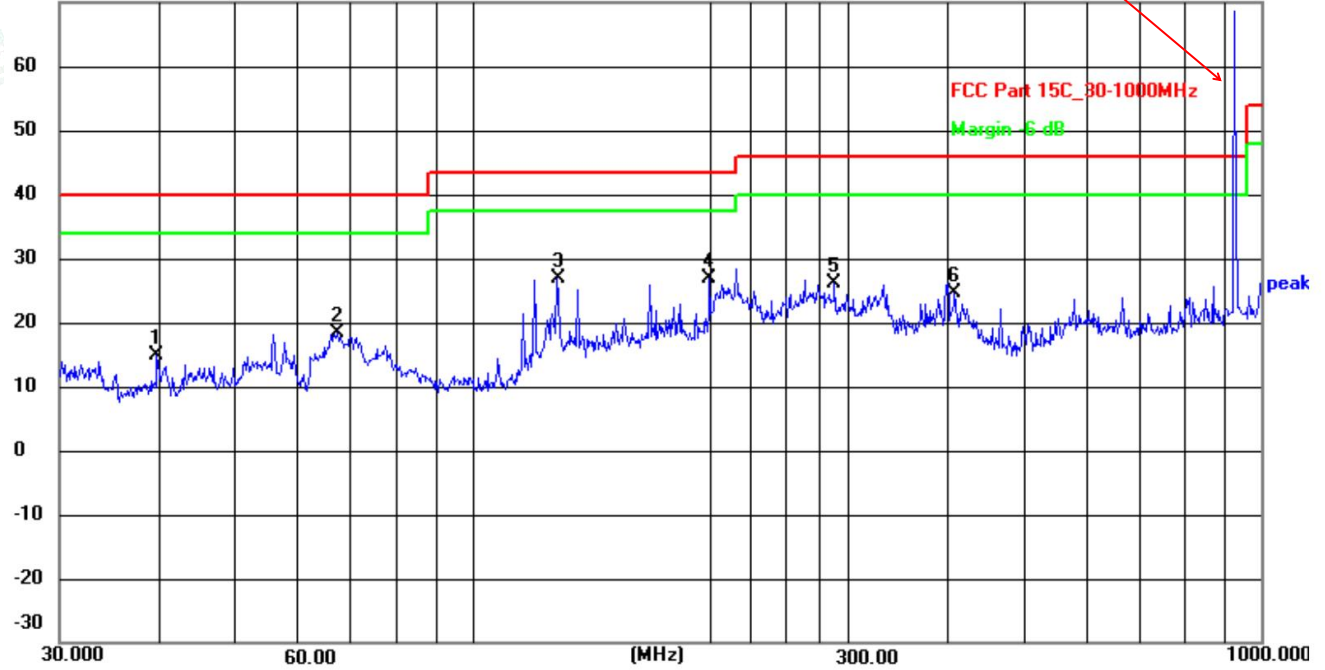

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	39.8541	32.42	-17.56	14.86	40.00	-25.14
2	67.4381	37.62	-19.32	18.30	40.00	-21.70
3	128.1127	47.27	-20.45	26.82	43.50	-16.68
4	199.9855	44.24	-17.39	26.85	43.50	-16.65
5	287.9904	41.74	-15.50	26.24	46.00	-19.76
6	408.9458	38.83	-14.12	24.71	46.00	-21.29






Temperature	23.8°C	Humidity	52.1%
Test Engineer	Mening Su	Modulation	OOK

Channel 0 /905.0 MHz

Vertical

70.0 dBuV/m

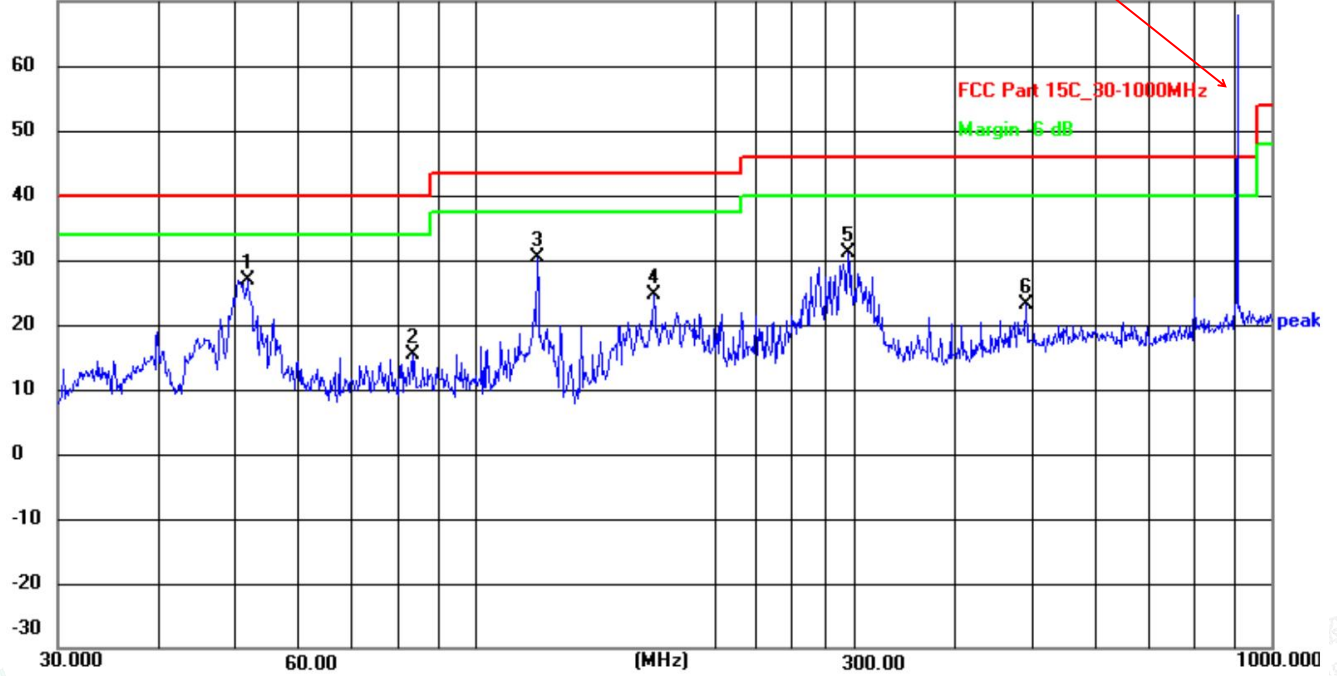

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	52.0251	44.37	-17.41	26.96	40.00	-13.04
2	83.8155	34.82	-19.50	15.32	40.00	-24.68
3	119.8555	50.36	-19.93	30.43	43.50	-13.07
4	167.8240	44.09	-19.56	24.53	43.50	-18.97
5	294.1136	46.71	-15.56	31.15	46.00	-14.85
6	492.4685	36.65	-13.56	23.09	46.00	-22.91






Horizontal

70.0 dBuV/m

Fundamental frequency

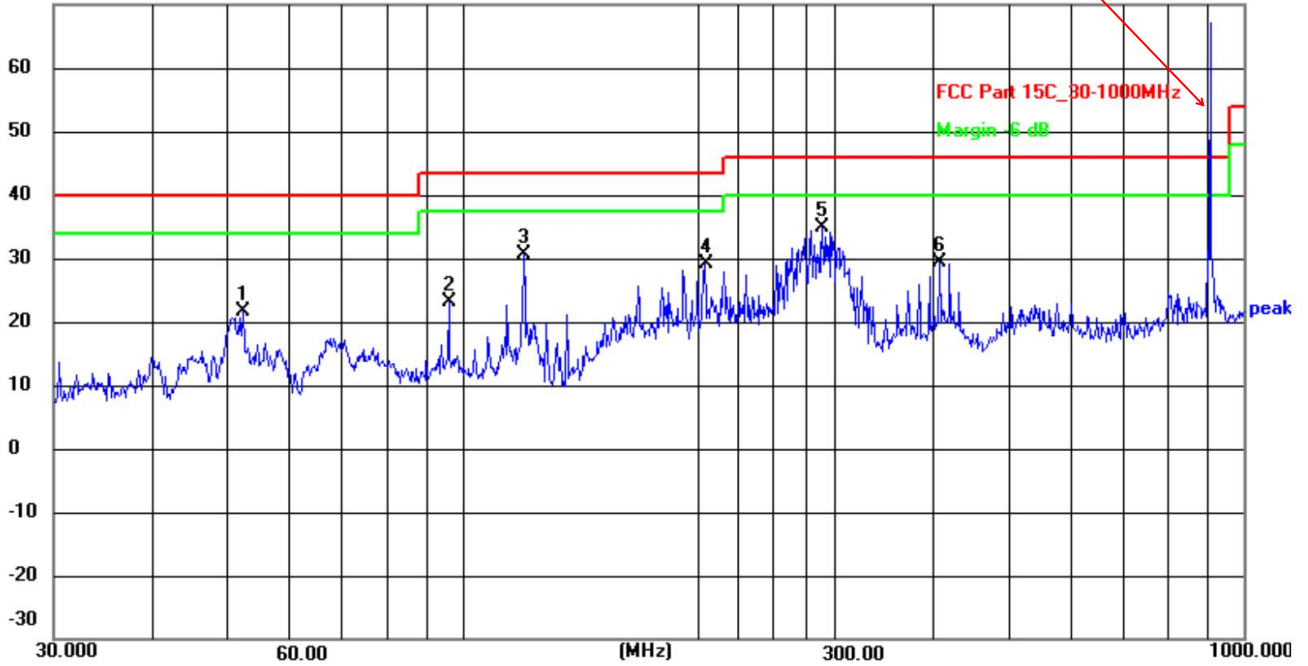

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	52.3911	39.06	-17.48	21.58	40.00	-18.42
2	96.0985	41.53	-18.45	23.08	43.50	-20.42
3	119.8555	50.58	-19.93	30.65	43.50	-12.85
4	204.2376	46.53	-17.29	29.24	43.50	-14.26
5	289.0020	50.38	-15.51	34.87	46.00	-11.13
6	408.9458	43.55	-14.12	29.43	46.00	-16.57

