




Horizontal

100.0 dBuV/m

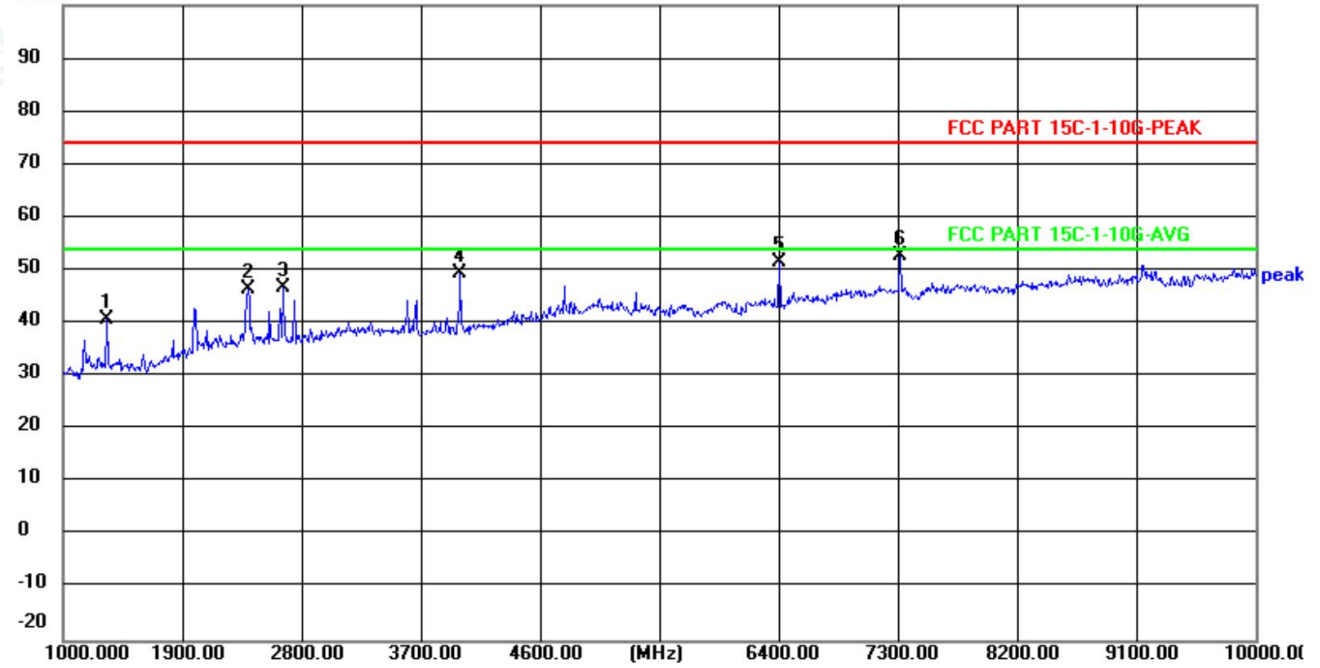

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1333.000	55.87	-15.25	40.62	74.00	-33.38	peak
2	2395.000	58.16	-11.71	46.45	74.00	-27.55	peak
3	2656.000	57.44	-10.81	46.63	74.00	-27.37	peak
4	3997.000	57.93	-8.54	49.39	74.00	-24.61	peak
5	6400.000	53.44	-1.90	51.54	74.00	-22.46	peak
6	7318.000	52.30	0.33	52.63	74.00	-21.37	peak





Channel 40 / 925.0 MHz

Vertical

100.0 dBuV/m




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2656.000	60.27	-10.81	49.46	74.00	-24.54	peak
2	3997.000	55.15	-8.54	46.61	74.00	-27.39	peak
3	4789.000	57.80	-5.16	52.64	74.00	-21.36	peak
4	6472.000	53.75	-1.57	52.18	74.00	-21.82	peak
5	7399.000	51.96	0.47	52.43	74.00	-21.57	peak
6	9253.000	49.76	2.30	52.06	74.00	-21.94	peak





Horizontal

100.0 dBuV/m

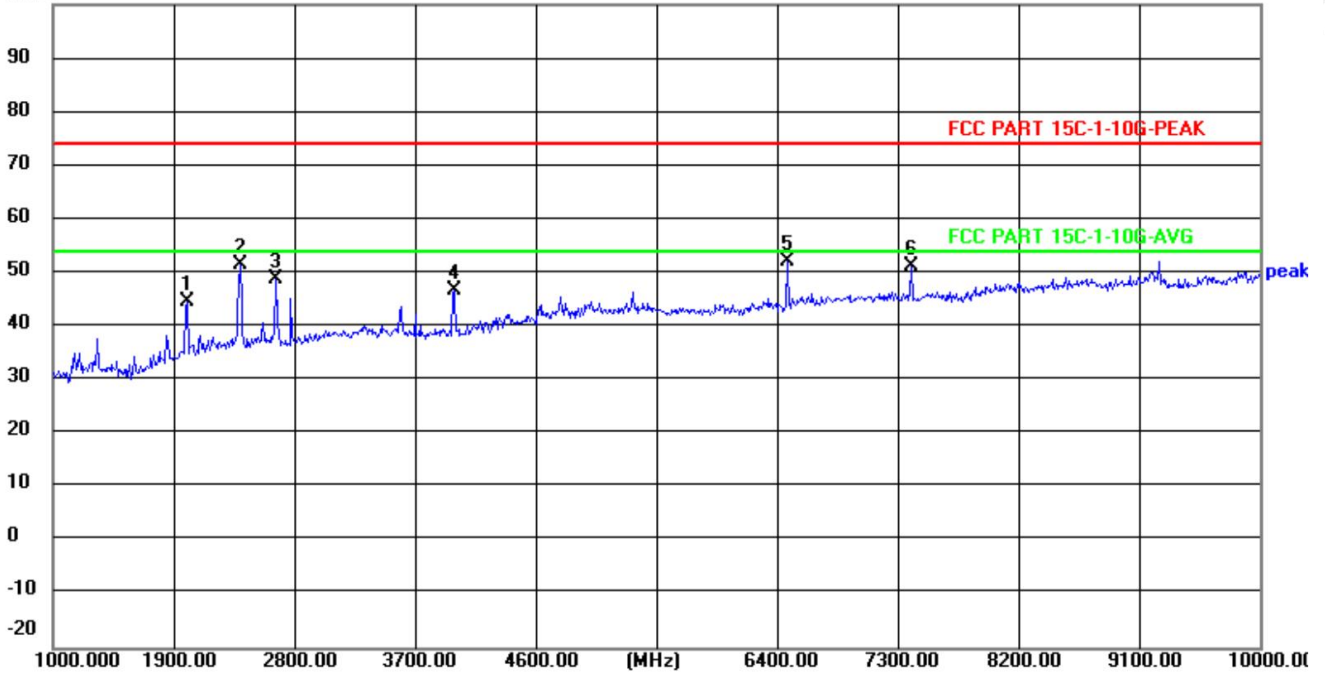

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1999.000	57.79	-13.11	44.68	74.00	-29.32	peak
2	2395.000	63.30	-11.71	51.59	74.00	-22.41	peak
3	2656.000	59.70	-10.81	48.89	74.00	-25.11	peak
4	3988.000	55.24	-8.57	46.67	74.00	-27.33	peak
5	6472.000	53.62	-1.57	52.05	74.00	-21.95	peak
6	7399.000	50.79	0.47	51.26	74.00	-22.74	peak






Temperature	23.8°C	Humidity	52.1%
Test Engineer	Mening Su	Modulation	4-FSK

Channel 0 /905.0 MHz

Vertical

100.0 dBuV/m

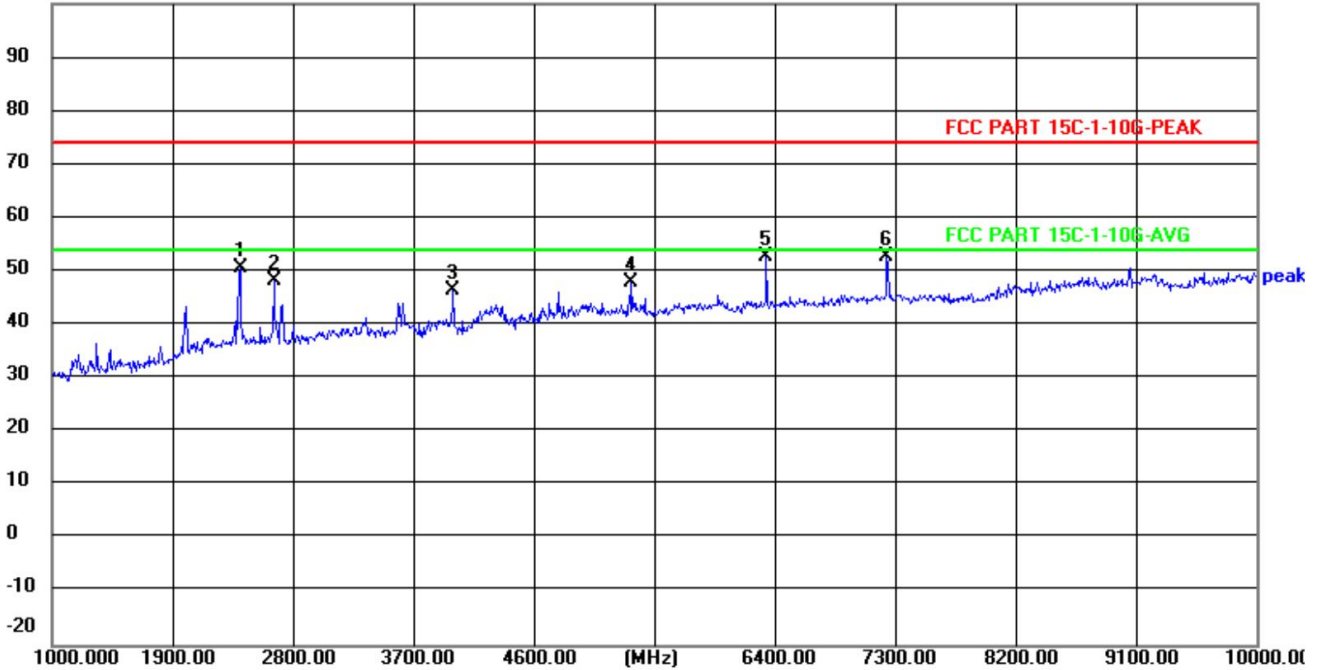

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2404.000	62.35	-11.68	50.67	74.00	-23.33	peak
2	2656.000	59.15	-10.81	48.34	74.00	-25.66	peak
3	3997.000	54.99	-8.54	46.45	74.00	-27.55	peak
4	5329.000	51.55	-3.52	48.03	74.00	-25.97	peak
5	6337.000	54.80	-2.18	52.62	74.00	-21.38	peak
6	7237.000	52.46	0.20	52.66	74.00	-21.34	peak





Horizontal
100.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	57.57	-11.71	45.86	74.00	-28.14	peak
2	3619.000	53.11	-9.21	43.90	74.00	-30.10	peak
3	3988.000	53.46	-8.57	44.89	74.00	-29.11	peak
4	4780.000	50.54	-5.20	45.34	74.00	-28.66	peak
5	6337.000	54.78	-2.18	52.60	74.00	-21.40	peak
6	7246.000	51.44	0.22	51.66	74.00	-22.34	peak






Channel 19 / 915.0 MHz

Vertical

100.0 dBuV/m

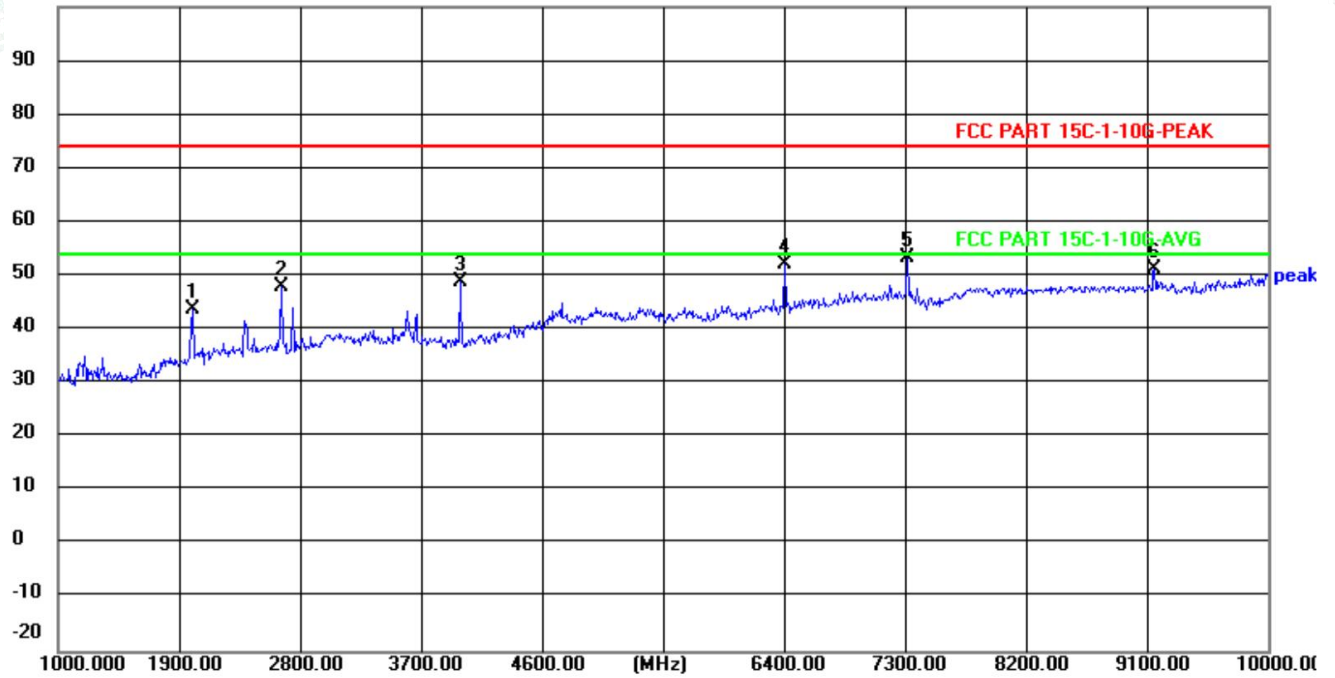


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1999.000	56.75	-13.11	43.64	74.00	-30.36	peak
2	2656.000	58.70	-10.81	47.89	74.00	-26.11	peak
3	3988.000	57.40	-8.57	48.83	74.00	-25.17	peak
4	6409.000	53.96	-1.86	52.10	74.00	-21.90	peak
5	7318.000	52.94	0.33	53.27	74.00	-20.73	peak
6	9154.000	49.23	2.14	51.37	74.00	-22.63	peak





Horizontal
100.0 dBuV/m

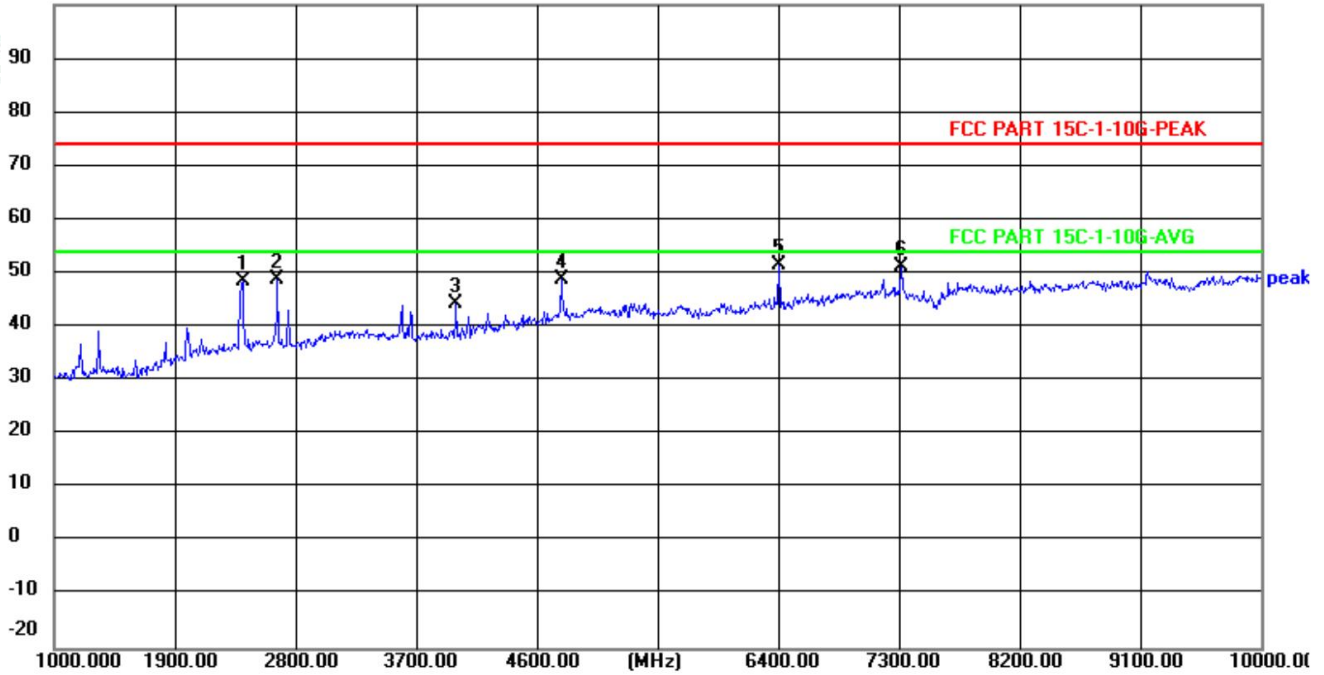

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2404.000	60.30	-11.68	48.62	74.00	-25.38	peak
2	2665.000	59.70	-10.76	48.94	74.00	-25.06	peak
3	3997.000	52.98	-8.54	44.44	74.00	-29.56	peak
4	4780.000	54.02	-5.20	48.82	74.00	-25.18	peak
5	6400.000	53.54	-1.90	51.64	74.00	-22.36	peak
6	7318.000	51.02	0.33	51.35	74.00	-22.65	peak





Channel 40 / 925.0 MHz

Vertical

100.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	63.94	-11.71	52.23	74.00	-21.77	peak
2	2656.000	58.74	-10.81	47.93	74.00	-26.07	peak
3	3997.000	53.55	-8.54	45.01	74.00	-28.99	peak
4	4798.000	57.95	-5.11	52.84	74.00	-21.16	peak
5	6472.000	53.70	-1.57	52.13	74.00	-21.87	peak
6	7399.000	50.48	0.47	50.95	74.00	-23.05	peak






Horizontal
100.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	60.42	-11.71	48.71	74.00	-25.29	peak
2	2656.000	55.27	-10.81	44.46	74.00	-29.54	peak
3	3988.000	54.59	-8.57	46.02	74.00	-27.98	peak
4	4780.000	53.49	-5.20	48.29	74.00	-25.71	peak
5	6472.000	54.00	-1.57	52.43	74.00	-21.57	peak
6	7399.000	49.74	0.47	50.21	74.00	-23.79	peak






Temperature	23.8°C	Humidity	52.1%
Test Engineer	Mening Su	Modulation	4-GFSK05

Channel 0 /905.0 MHz

Vertical

100.0 dBuV/m

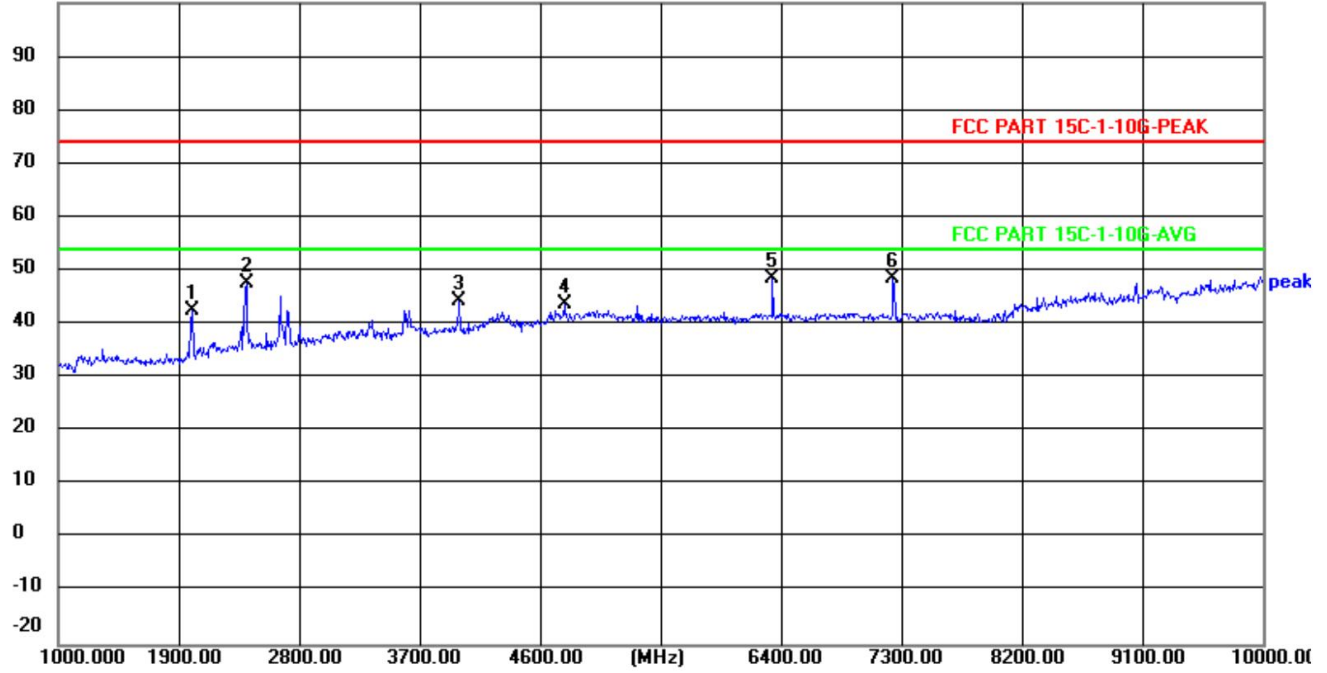


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1999.000	55.66	-13.11	42.55	74.00	-31.45	peak
2	2404.000	59.35	-11.68	47.67	74.00	-26.33	peak
3	3997.000	52.99	-8.54	44.45	74.00	-29.55	peak
4	4780.000	48.87	-5.20	43.67	74.00	-30.33	peak
5	6337.000	50.80	-2.18	48.62	74.00	-25.38	peak
6	7237.000	48.46	0.20	48.66	74.00	-25.34	peak





Horizontal

100.0 dBuV/m

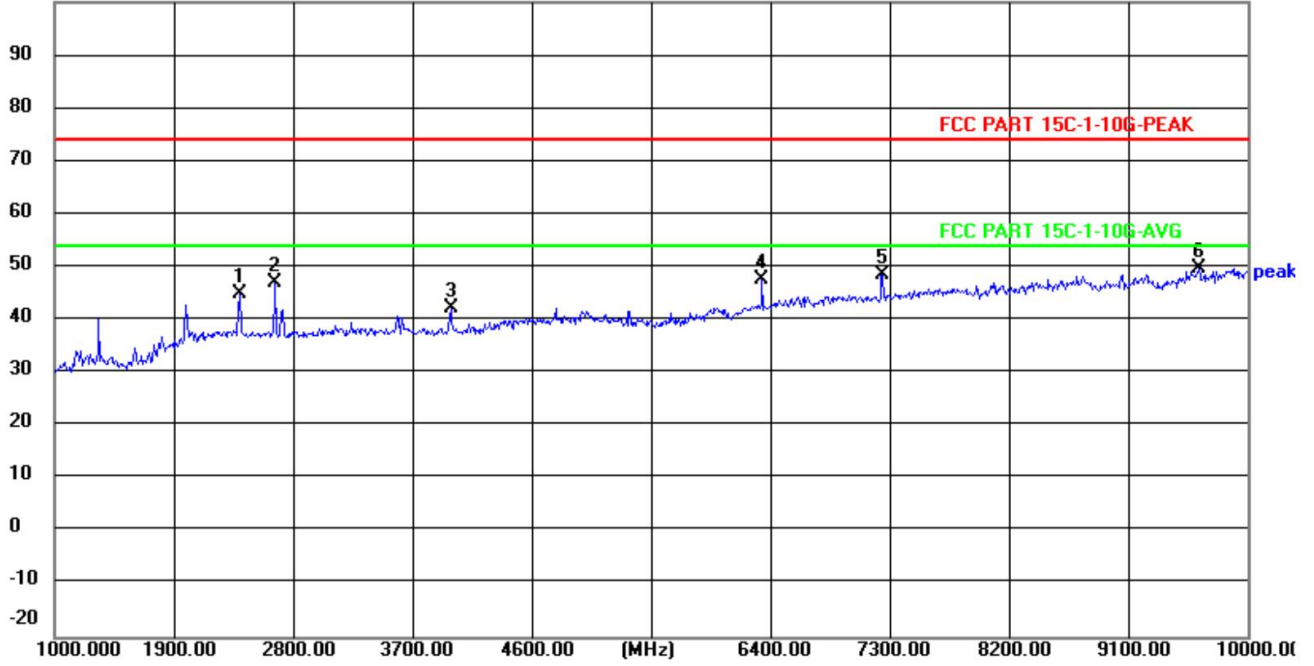

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	56.57	-11.71	44.86	74.00	-29.14	peak
2	2665.000	57.92	-10.76	47.16	74.00	-26.84	peak
3	3988.000	50.96	-8.57	42.39	74.00	-31.61	peak
4	6337.000	49.78	-2.18	47.60	74.00	-26.40	peak
5	7246.000	48.44	0.22	48.66	74.00	-25.34	peak
6	9631.000	46.72	2.94	49.66	74.00	-24.34	peak






Channel 19 / 915.0 MHz

Vertical

100.0 dBuV/m

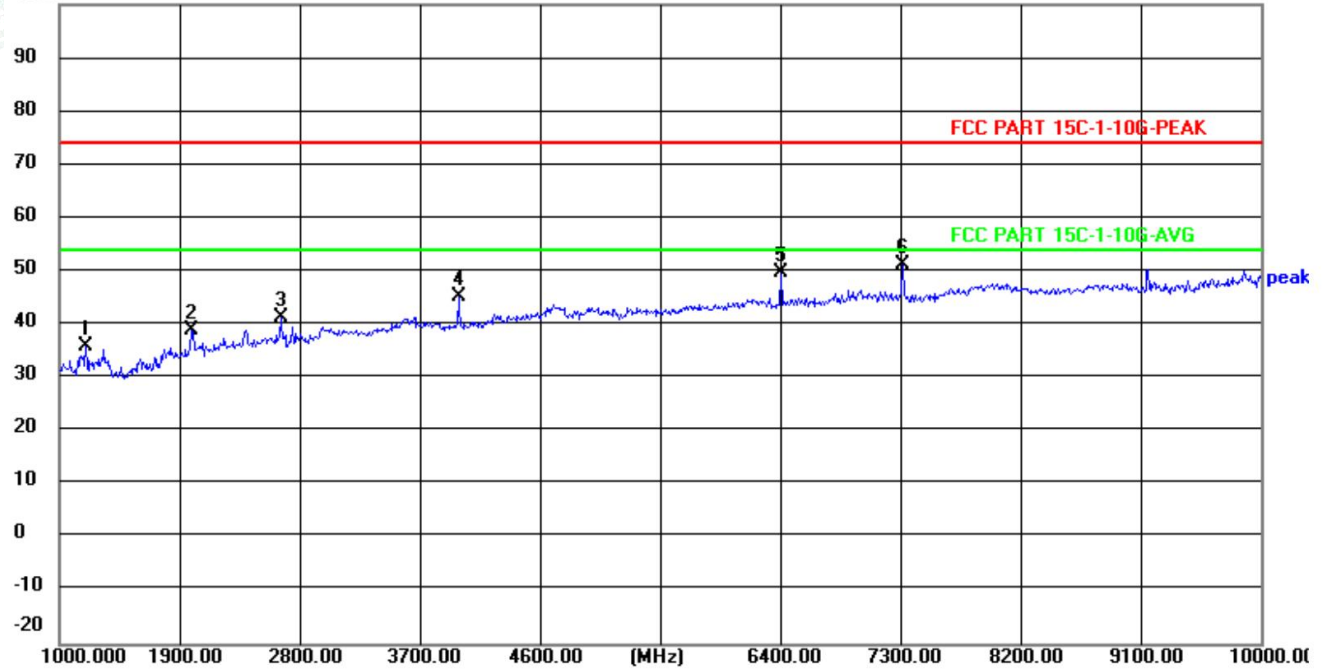


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1198.000	51.15	-15.21	35.94	74.00	-38.06	peak
2	1990.000	52.04	-13.16	38.88	74.00	-35.12	peak
3	2656.000	52.20	-10.81	41.39	74.00	-32.61	peak
4	3988.000	53.90	-8.57	45.33	74.00	-28.67	peak
5	6409.000	51.46	-1.86	49.60	74.00	-24.40	peak
6	7318.000	50.94	0.33	51.27	74.00	-22.73	peak






Horizontal
100.0 dBuV/m

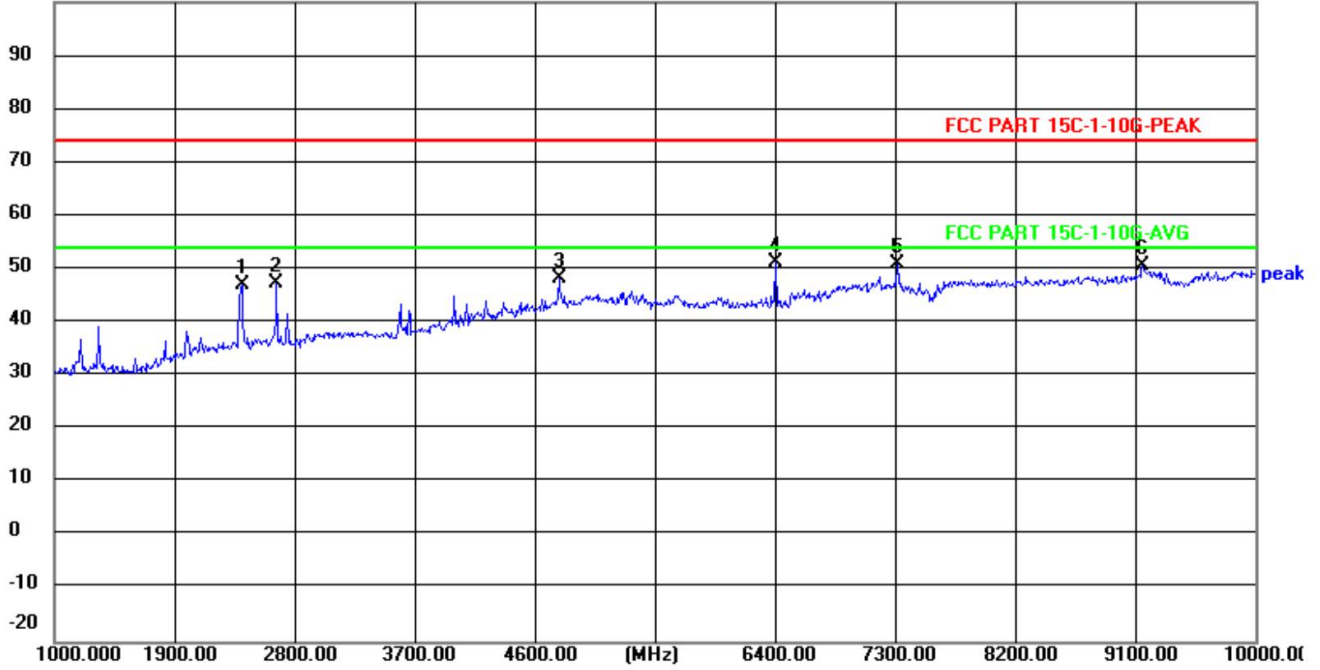

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2404.000	58.80	-11.68	47.12	74.00	-26.88	peak
2	2665.000	58.20	-10.76	47.44	74.00	-26.56	peak
3	4780.000	53.52	-5.20	48.32	74.00	-25.68	peak
4	6400.000	53.04	-1.90	51.14	74.00	-22.86	peak
5	7318.000	50.52	0.33	50.85	74.00	-23.15	peak
6	9154.000	48.63	2.14	50.77	74.00	-23.23	peak





Channel 40 / 925.0 MHz

Vertical

100.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	62.94	-11.71	51.23	74.00	-22.77	peak
2	3997.000	53.05	-8.54	44.51	74.00	-29.49	peak
3	4798.000	56.96	-5.12	51.84	74.00	-22.16	peak
4	6472.000	51.20	-1.57	49.63	74.00	-24.37	peak
5	7399.000	48.98	0.47	49.45	74.00	-24.55	peak
6	9253.000	49.26	2.30	51.56	74.00	-22.44	peak





Horizontal

100.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	59.42	-11.71	47.71	74.00	-26.29	peak
2	3601.000	52.11	-9.24	42.87	74.00	-31.13	peak
3	4780.000	52.49	-5.20	47.29	74.00	-26.71	peak
4	6472.000	53.00	-1.57	51.43	74.00	-22.57	peak
5	7399.000	48.74	0.47	49.21	74.00	-24.79	peak
6	9253.000	48.47	2.30	50.77	74.00	-23.23	peak






Temperature	23.8°C	Humidity	52.1%
Test Engineer	Mening Su	Modulation	ASK

Channel 0 /905.0 MHz

Vertical

100.0 dBuV/m

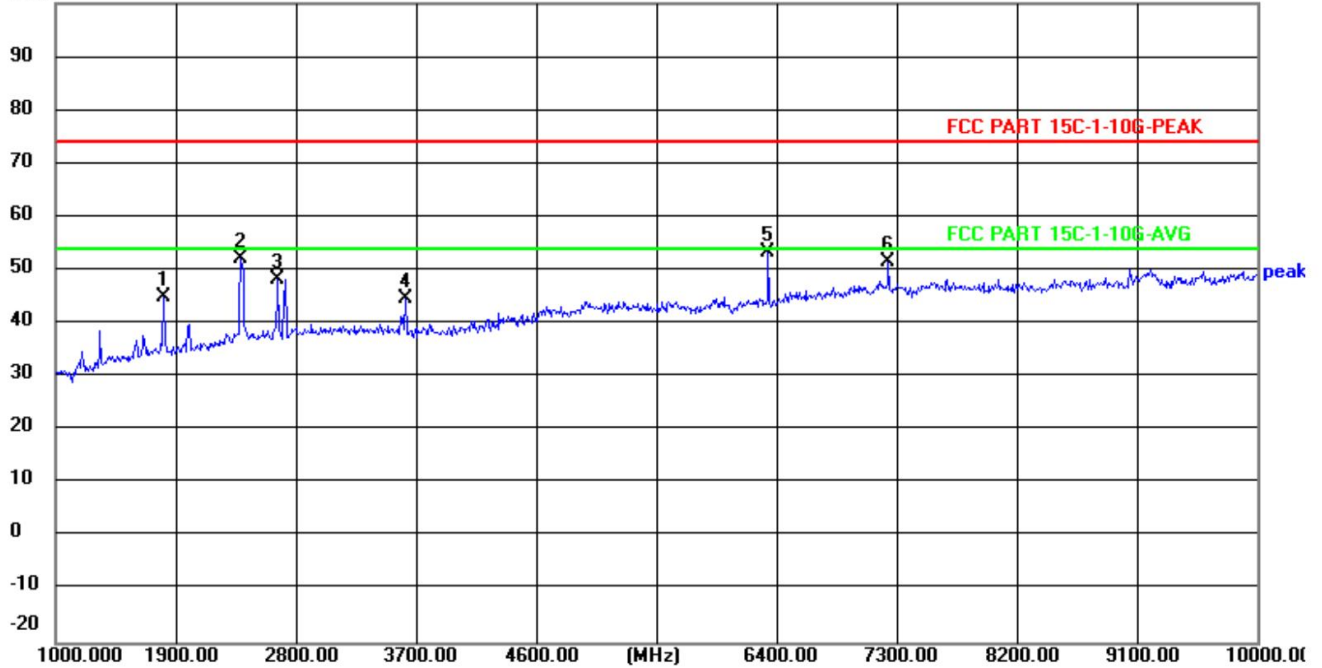


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1810.000	59.01	-14.10	44.91	74.00	-29.09	peak
2	2386.000	63.89	-11.74	52.15	74.00	-21.85	peak
3	2665.000	59.09	-10.76	48.33	74.00	-25.67	peak
4	3619.000	53.74	-9.21	44.53	74.00	-29.47	peak
5	6337.000	55.40	-2.18	53.22	74.00	-20.78	peak
6	7237.000	51.28	0.20	51.48	74.00	-22.52	peak






Horizontal

100.0 dBuV/m

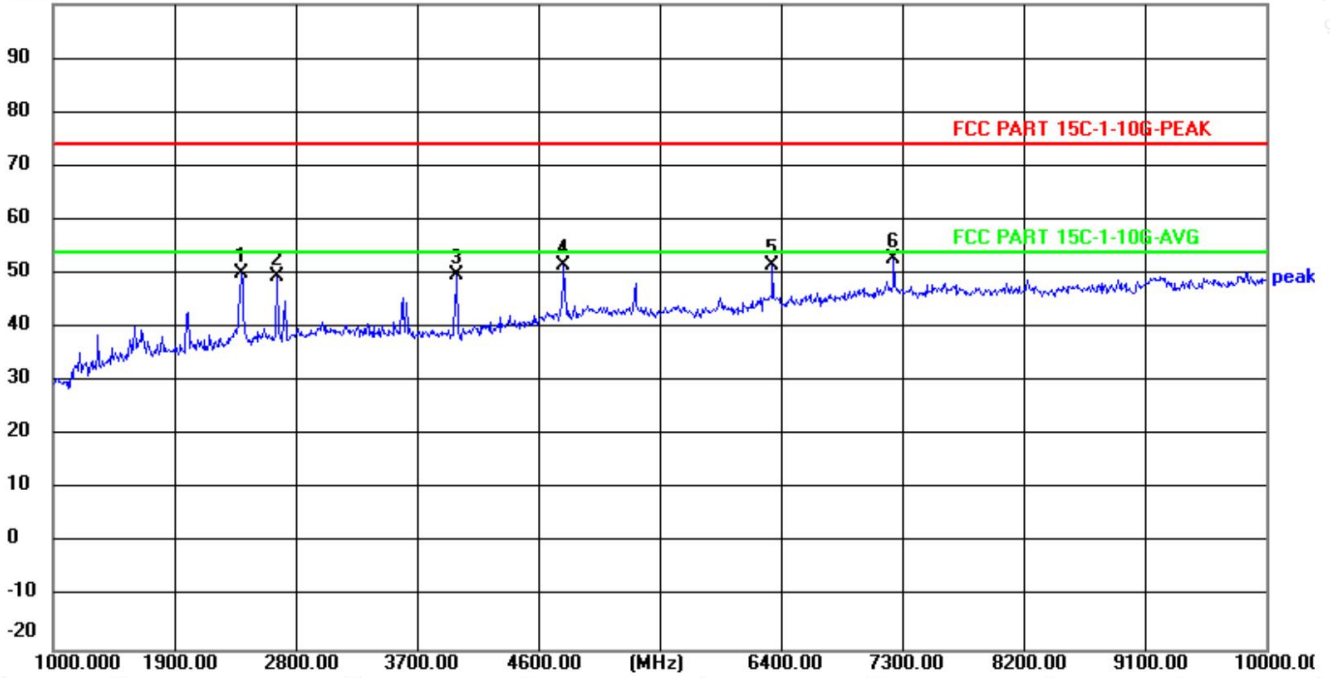

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	61.80	-11.71	50.09	74.00	-23.91	peak
2	2656.000	60.20	-10.81	49.39	74.00	-24.61	peak
3	3997.000	58.32	-8.54	49.78	74.00	-24.22	peak
4	4789.000	56.83	-5.16	51.67	74.00	-22.33	peak
5	6337.000	53.83	-2.18	51.65	74.00	-22.35	peak
6	7237.000	52.45	0.20	52.65	74.00	-21.35	peak






Channel 19 / 915.0 MHz

Vertical

100.0 dBuV/m

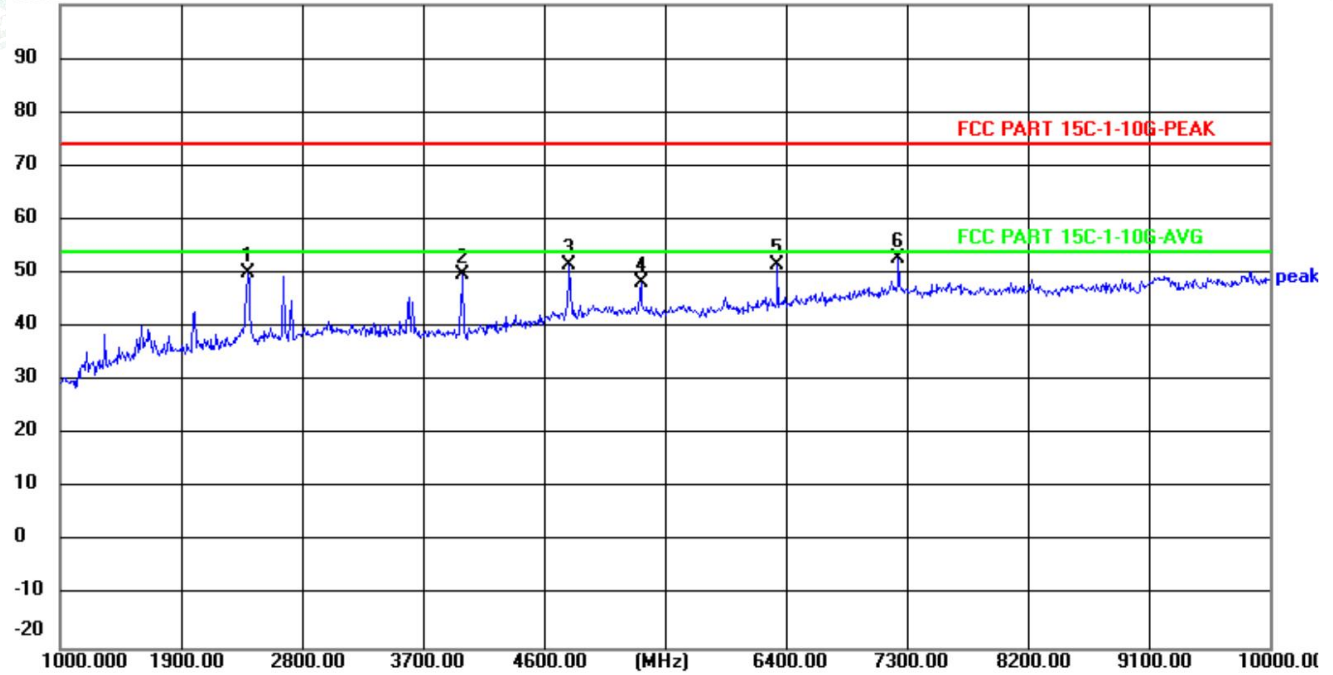


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	61.80	-11.71	50.09	74.00	-23.91	peak
2	3997.000	58.32	-8.54	49.78	74.00	-24.22	peak
3	4789.000	56.83	-5.16	51.67	74.00	-22.33	peak
4	5320.000	51.80	-3.53	48.27	74.00	-25.73	peak
5	6337.000	53.83	-2.18	51.65	74.00	-22.35	peak
6	7237.000	52.45	0.20	52.65	74.00	-21.35	peak






Horizontal
100.0 dBuV/m

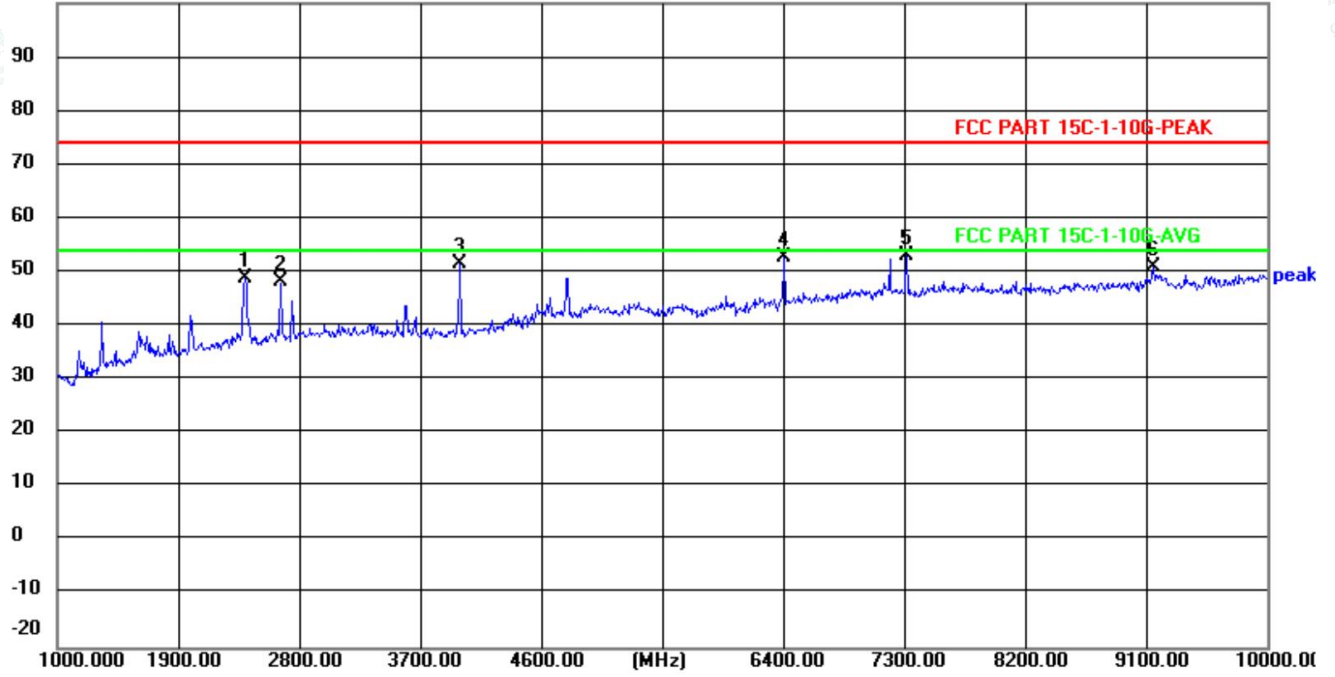

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	60.48	-11.71	48.77	74.00	-25.23	peak
2	2656.000	58.91	-10.81	48.10	74.00	-25.90	peak
3	3997.000	60.12	-8.54	51.58	74.00	-22.42	peak
4	6409.000	54.73	-1.86	52.87	74.00	-21.13	peak
5	7318.000	52.79	0.33	53.12	74.00	-20.88	peak
6	9154.000	48.85	2.14	50.99	74.00	-23.01	peak






Channel 40 / 925.0 MHz

Vertical

100.0 dBuV/m

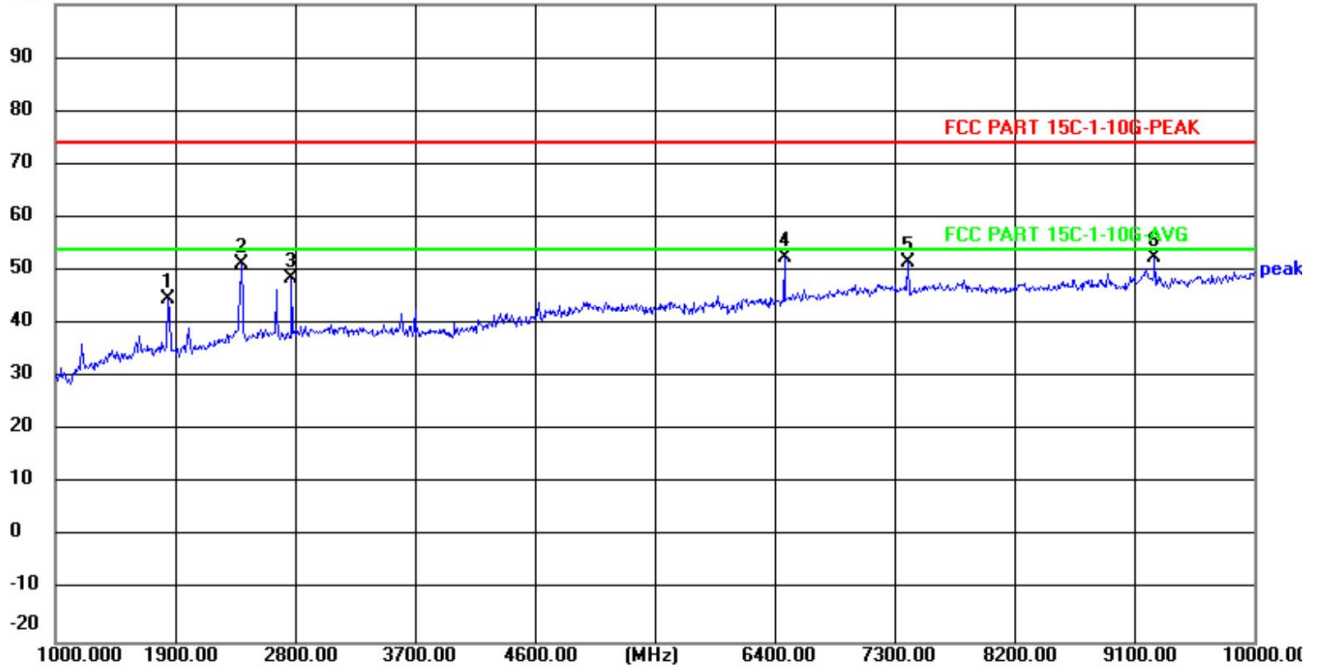


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1846.000	58.48	-13.91	44.57	74.00	-29.43	peak
2	2395.000	63.09	-11.71	51.38	74.00	-22.62	peak
3	2773.000	58.87	-10.38	48.49	74.00	-25.51	peak
4	6472.000	54.00	-1.57	52.43	74.00	-21.57	peak
5	7399.000	51.16	0.47	51.63	74.00	-22.37	peak
6	9253.000	50.18	2.30	52.48	74.00	-21.52	peak





Horizontal
100.0 dBuV/m

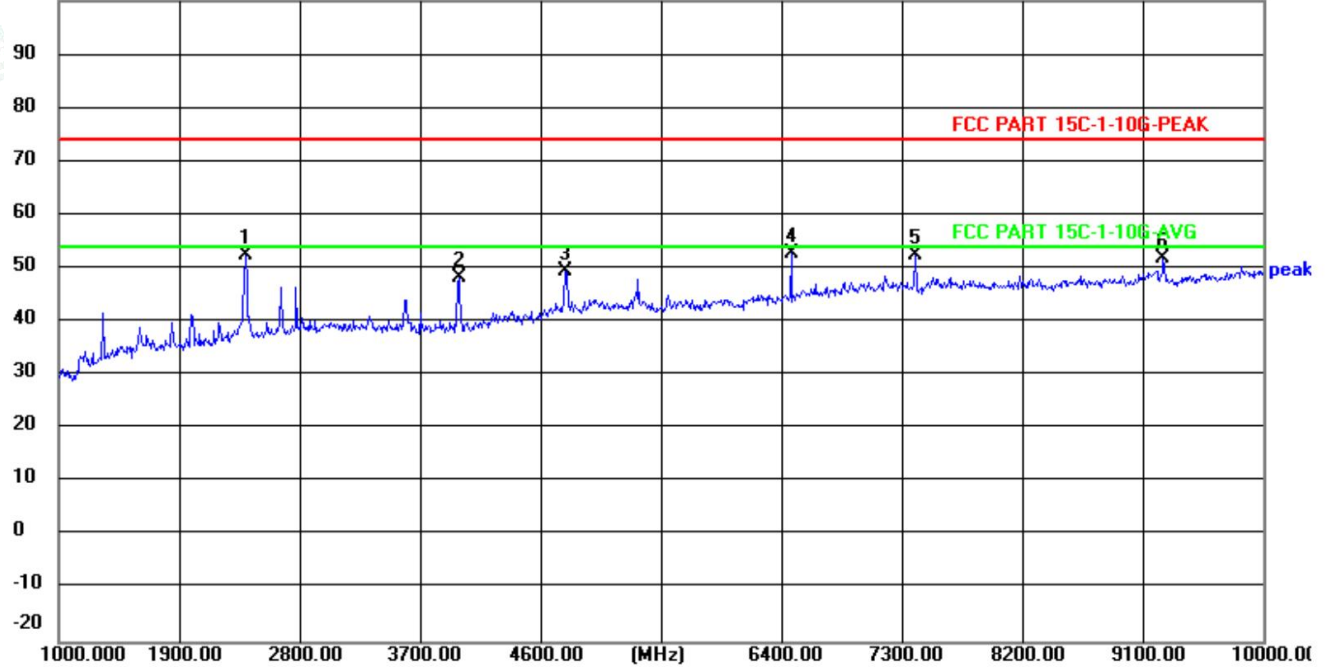

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.000	64.02	-11.71	52.31	74.00	-21.69	peak
2	3988.000	56.81	-8.57	48.24	74.00	-25.76	peak
3	4780.000	54.70	-5.20	49.50	74.00	-24.50	peak
4	6472.000	54.32	-1.57	52.75	74.00	-21.25	peak
5	7399.000	52.12	0.47	52.59	74.00	-21.41	peak
6	9253.000	49.43	2.30	51.73	74.00	-22.27	peak






Temperature	23.8°C	Humidity	52.1%
Test Engineer	Mening Su	Modulation	OOK

Channel 0 /905.0 MHz

Vertical

100.0 dBuV/m

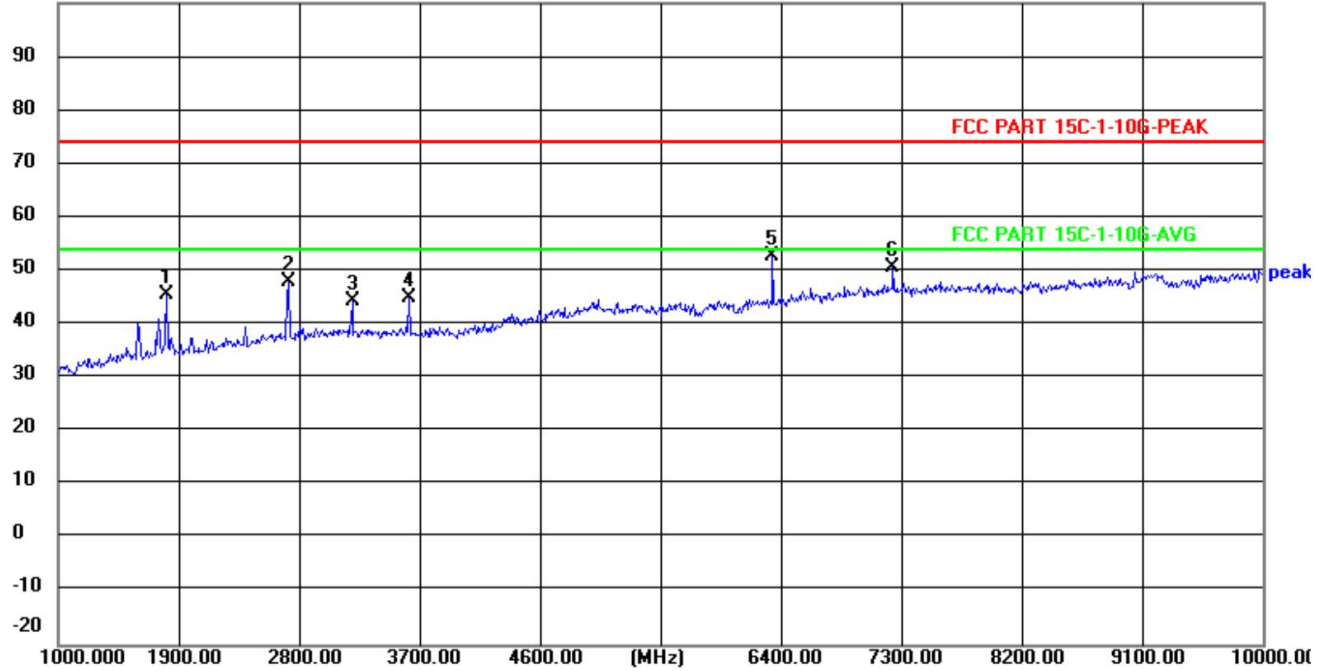


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1810.000	59.77	-14.10	45.67	74.00	-28.33	peak
2	2719.000	58.60	-10.57	48.03	74.00	-25.97	peak
3	3196.000	53.75	-9.52	44.23	74.00	-29.77	peak
4	3619.000	54.06	-9.21	44.85	74.00	-29.15	peak
5	6337.000	55.02	-2.18	52.84	74.00	-21.16	peak
6	7237.000	50.42	0.20	50.62	74.00	-23.38	peak





Horizontal

100.0 dBuV/m

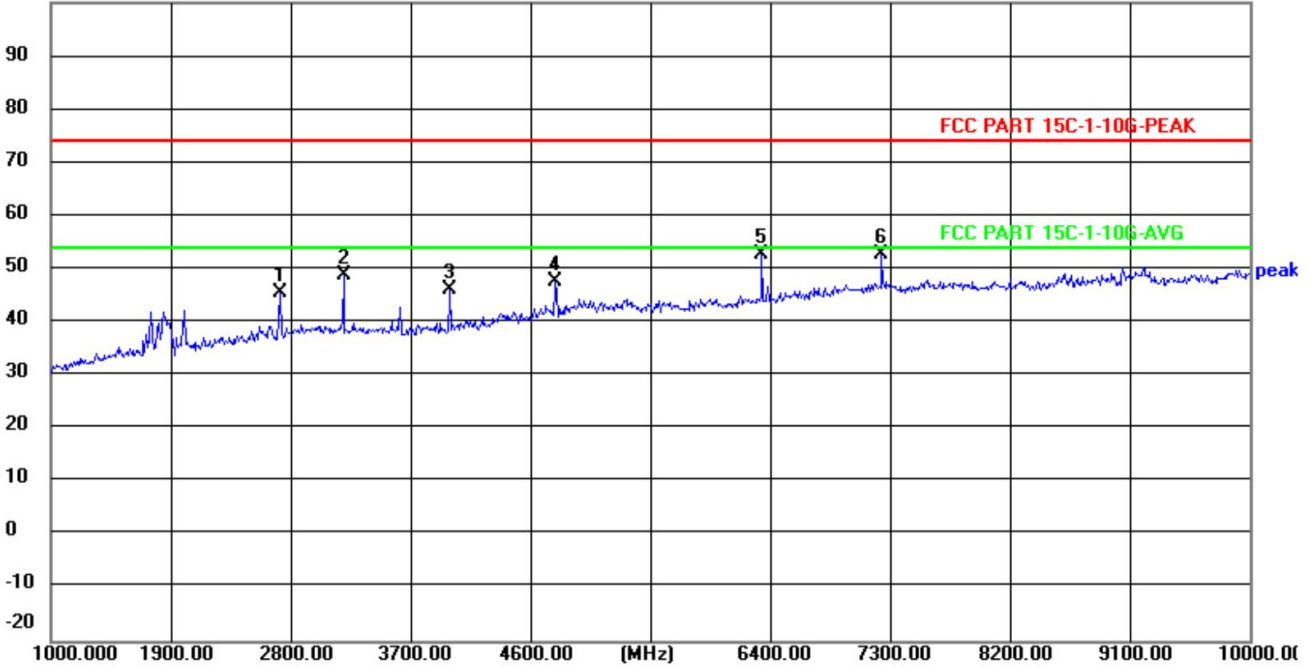

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2719.000	56.21	-10.57	45.64	74.00	-28.36	peak
2	3196.000	58.35	-9.52	48.83	74.00	-25.17	peak
3	3997.000	54.64	-8.54	46.10	74.00	-27.90	peak
4	4789.000	52.76	-5.16	47.60	74.00	-26.40	peak
5	6337.000	54.80	-2.18	52.62	74.00	-21.38	peak
6	7237.000	52.60	0.20	52.80	74.00	-21.20	peak






Channel 19 / 915.0 MHz

Vertical

100.0 dBuV/m

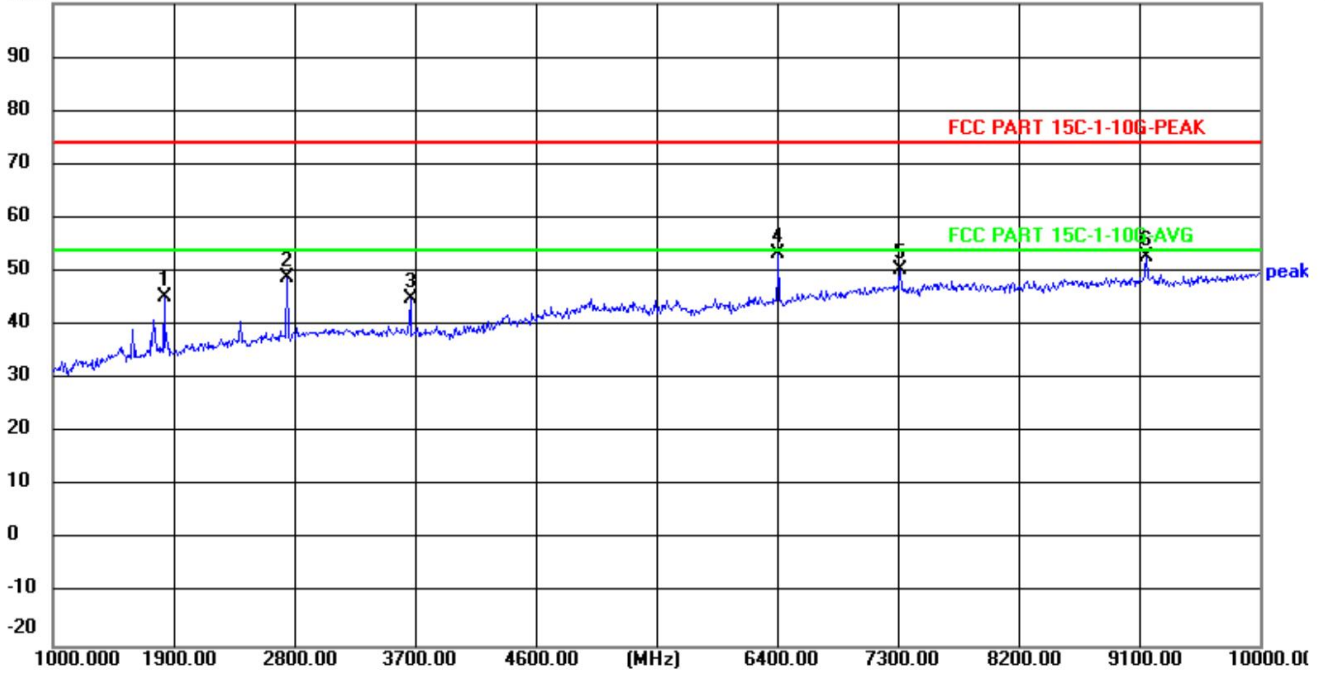


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1828.000	59.17	-14.01	45.16	74.00	-28.84	peak
2	2746.000	59.33	-10.48	48.85	74.00	-25.15	peak
3	3664.000	54.17	-9.13	45.04	74.00	-28.96	peak
4	6409.000	55.22	-1.86	53.36	74.00	-20.64	peak
5	7318.000	50.04	0.33	50.37	74.00	-23.63	peak
6	9154.000	50.65	2.14	52.79	74.00	-21.21	peak





Horizontal
100.0 dBuV/m

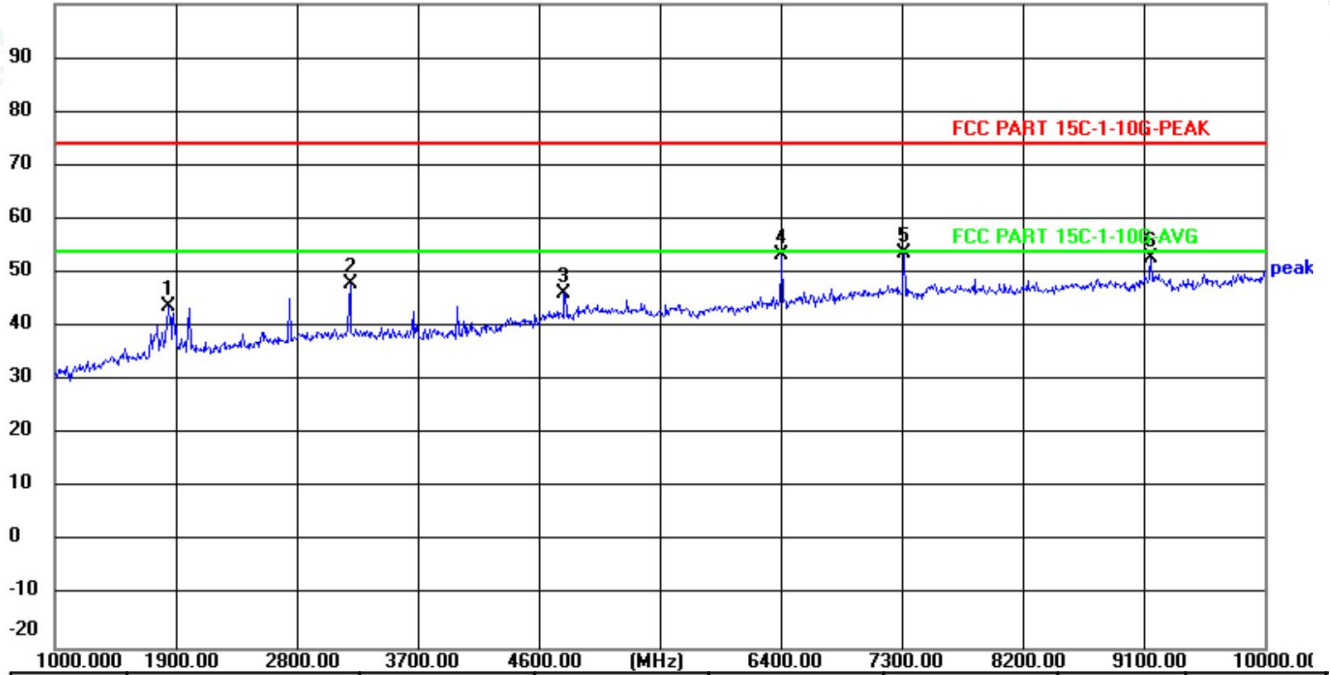

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1846.000	57.69	-13.91	43.78	74.00	-30.22	peak
2	3196.000	57.43	-9.52	47.91	74.00	-26.09	peak
3	4789.000	51.33	-5.16	46.17	74.00	-27.83	peak
4	6409.000	55.30	-1.86	53.44	74.00	-20.56	peak
5	7318.000	53.35	0.33	53.68	74.00	-20.32	peak
6	9154.000	50.70	2.14	52.84	74.00	-21.16	peak

