



ANTENNA PASSIVE TEST REPORT

Applicant: Grandsun
Product Name: BT Dongle
Model No.(EUT): U00B
Date of Receipt: 2022-10-28
Date of Test: 2022-10-28

Tested by: Max.Chen
Made by: Max.Chen
Checked by: Noki.Ho



REVISION HISTORY

Revision Record		
Version	Date	Reason for change
V0.1	2017-05-20	First edition



CONTENTS

1. GENERAL INFORMATION.....	4
1.1 Test Location.....	4
1.2 Test item and results.....	4
1.3 Laboratory Environment.....	4
1.4 Test Equipments List.....	4
1.5 Measurement Uncertainty.....	4
2. OTA MEASUREMENTS SYSTEM CONFIGURATION.....	5
3. TEST RESULTS.....	6
3.1 Efficiency & Gain.....	6
3.2 2-D antenna pattern.....	6
3.3 3-D antenna pattern.....	7
3.4 Passive pattern.....	8
4. APPENDIX A THE EUT AND TEST CONFIGURATION.....	10



1. GENERAL INFORMATION

1.1 Test Location

Company: Shenzhen Grandsun Electronics Co.,Ltd.
Address: Gaoqiao Industry Zone,Pingdi Town,Longgang District,Shenzhen,China
Post code: 518117
Telephone: +86-755-89234568

1.2 Test item and results

Test detailed items/section as below:

NO	Items
1	Gain
2	Efficiency
3	2-D/3-D pattern

1.3 Laboratory Environment

Temperature	Min.=18℃ Max.=24℃
Relative humidity	Min.=30% Max.=70℃
Shield effect	0.5-10GHZ > 100dB
Ground resistance	<0.4 Ω

1.4 Test Equipments List

Equipment Name	Model NO.	Manufacture	Calibration	Valid Period
Network Analyzer	E5071C	Keysight	2022-04-20	One year
Chamber	AMS-8923-195	ETS-LINDGERN	2022-04-20	One year


1.5 Measurement Uncertainty

Item	2.4GHZ-2.5GHZ(dB)
Gain	0.3
Efficiency	0.3



2. OTA MEASUREMENTS SYSTEM CONFIGURATION

The system is designed for fully-compliant radiated wireless antenna measurements over the frequency range from 700 MHz to 6 GHz with a 1.95-meter path length. The system includes a multi-antenna array with twenty-three (23) dual-polarized measurement antennas spaced every 15°, The chamber size is 5m*5m*5m

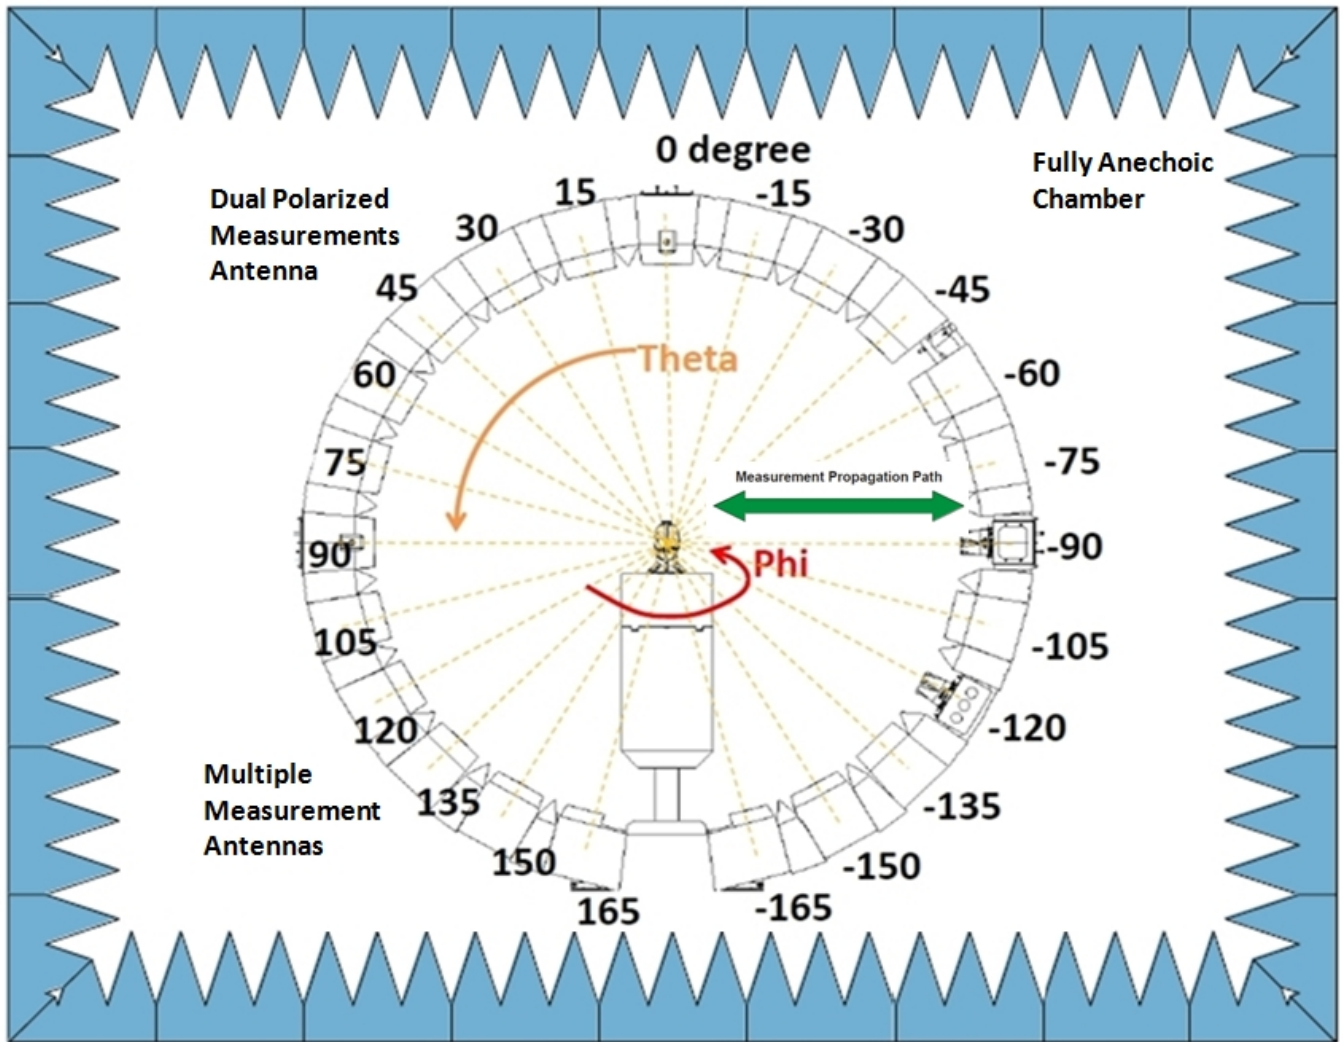

OTA measurement System Configuration

Note: Phi(The turntable) is from 0~180°, Theta(the ring, multiple antennas) is from -165° ~165°, Rotate the AUT and multi-antenna array record the data, the step of rotation is 15 degree.




3. TEST RESULTS

3.1 Efficiency & Gain




Frequency (Mhz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-2.98	50.2	2.26
2410	-2.75	53.0	2.41
2420	-2.61	54.8	2.55
2430	-2.68	53.8	2.51
2440	-2.61	54.8	2.65
2450	-2.45	56.8	2.98
2460	-2.46	56.6	2.88
2470	-2.50	56.2	2.86
2480	-2.65	54.2	2.60
2490	-2.69	53.7	2.57
2500	-2.80	52.4	2.48


3.2 2-D antenna pattern (Phi=90°)

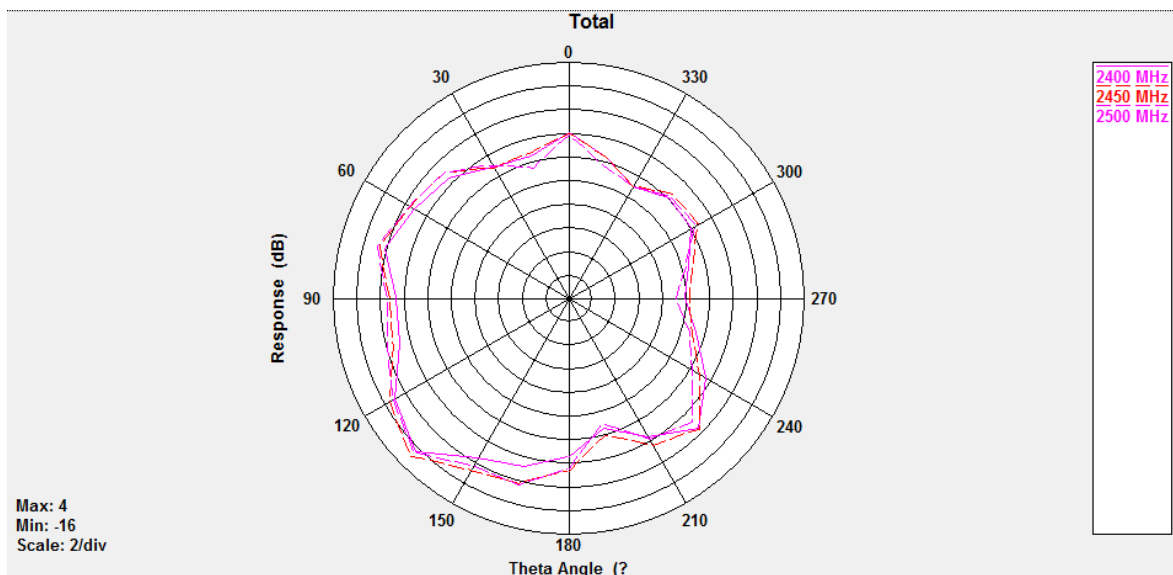




3.3 3-D antenna pattern

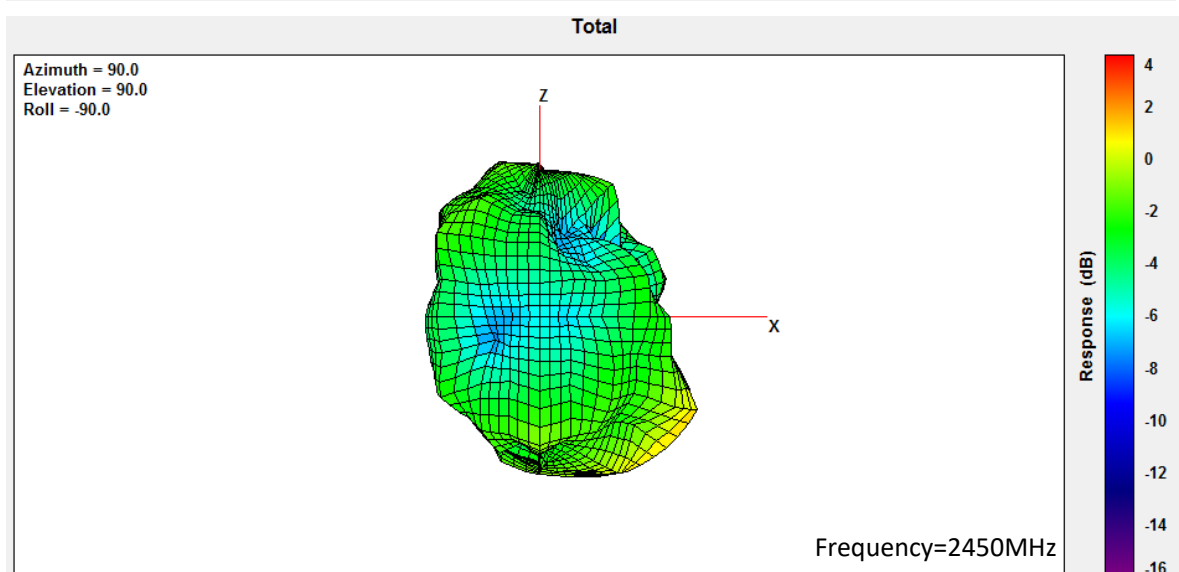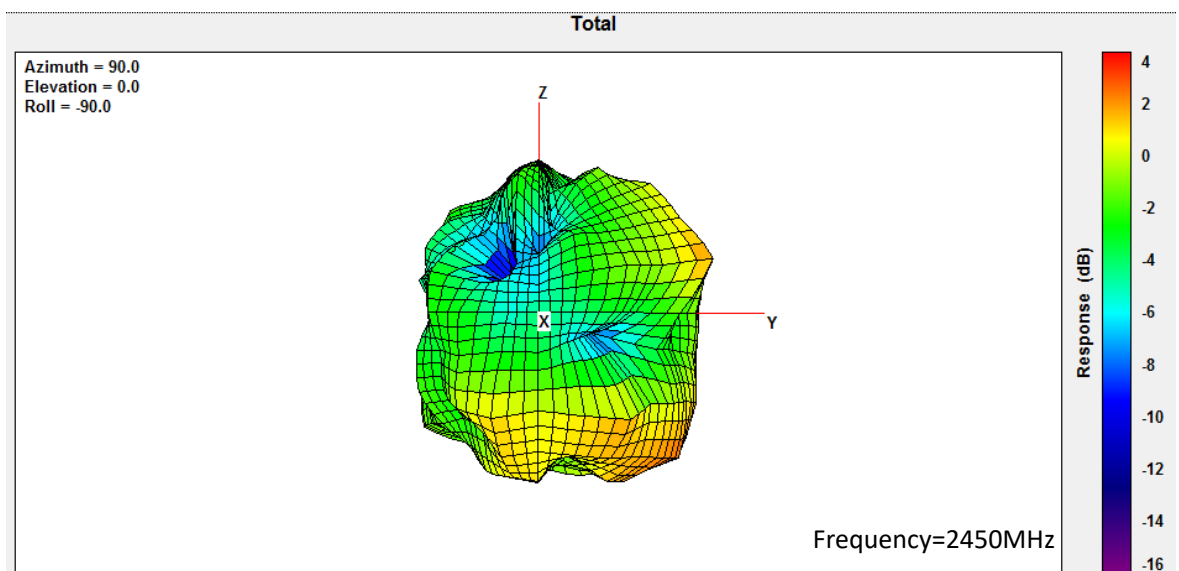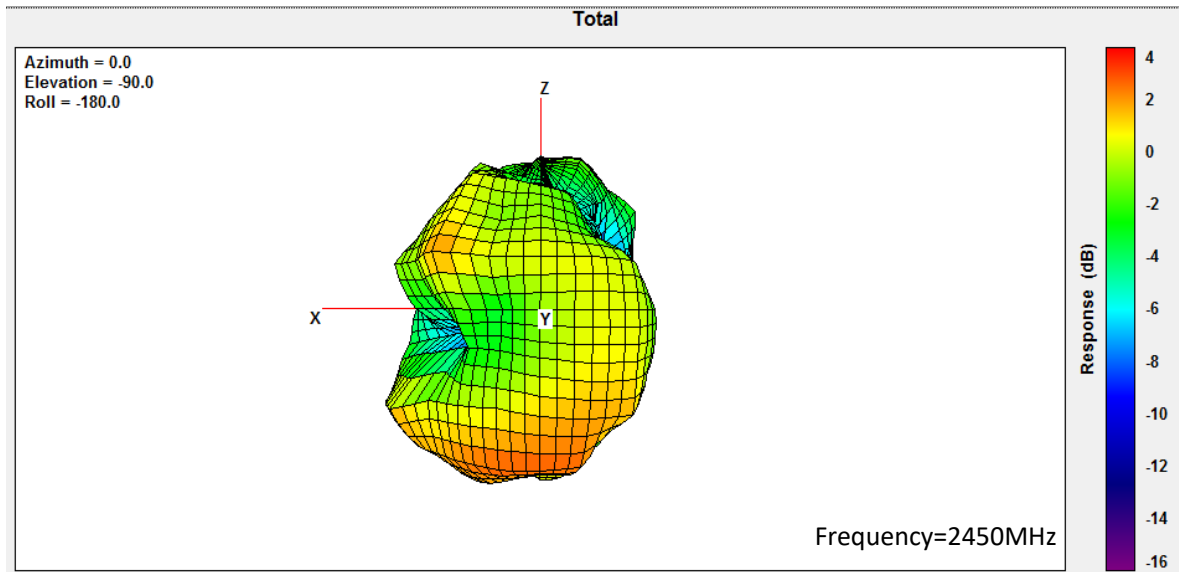

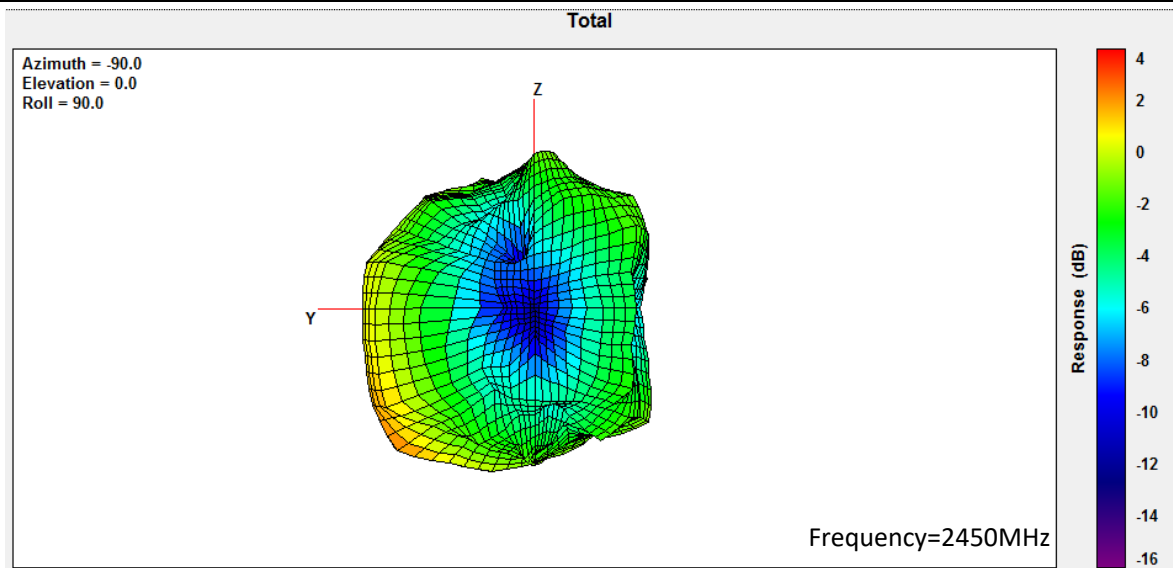


3.4 Passive pattern

3.4.1 VSWR

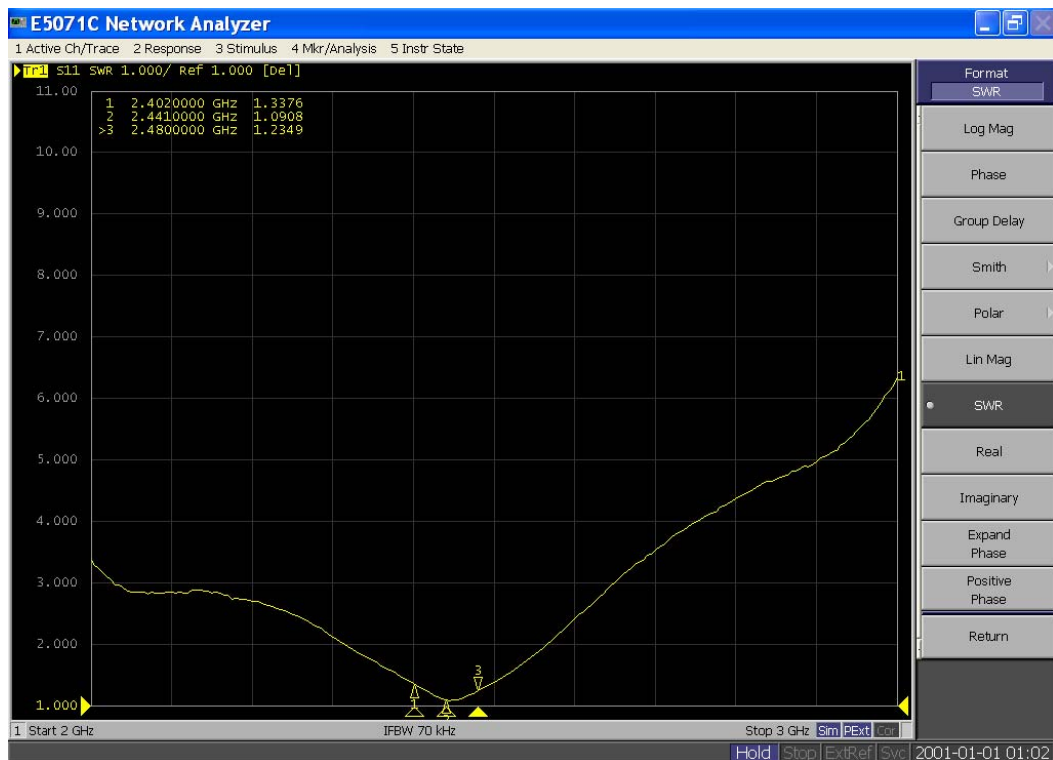




3.4.2 Return loss

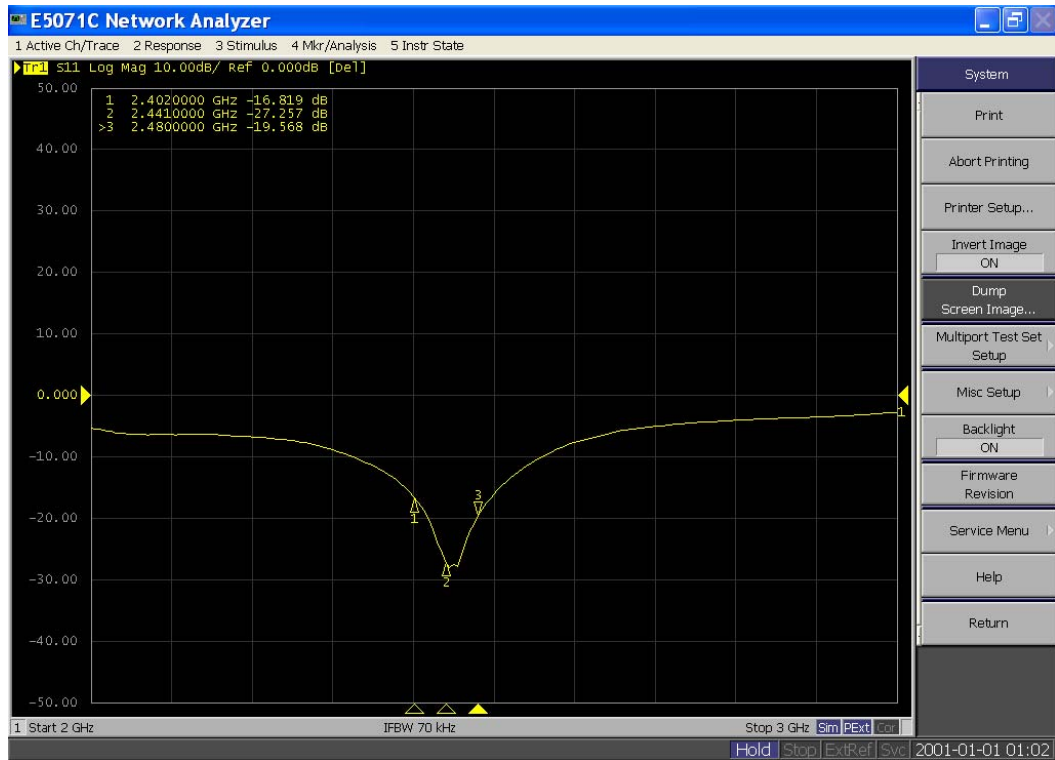

3.4.3 Impedance

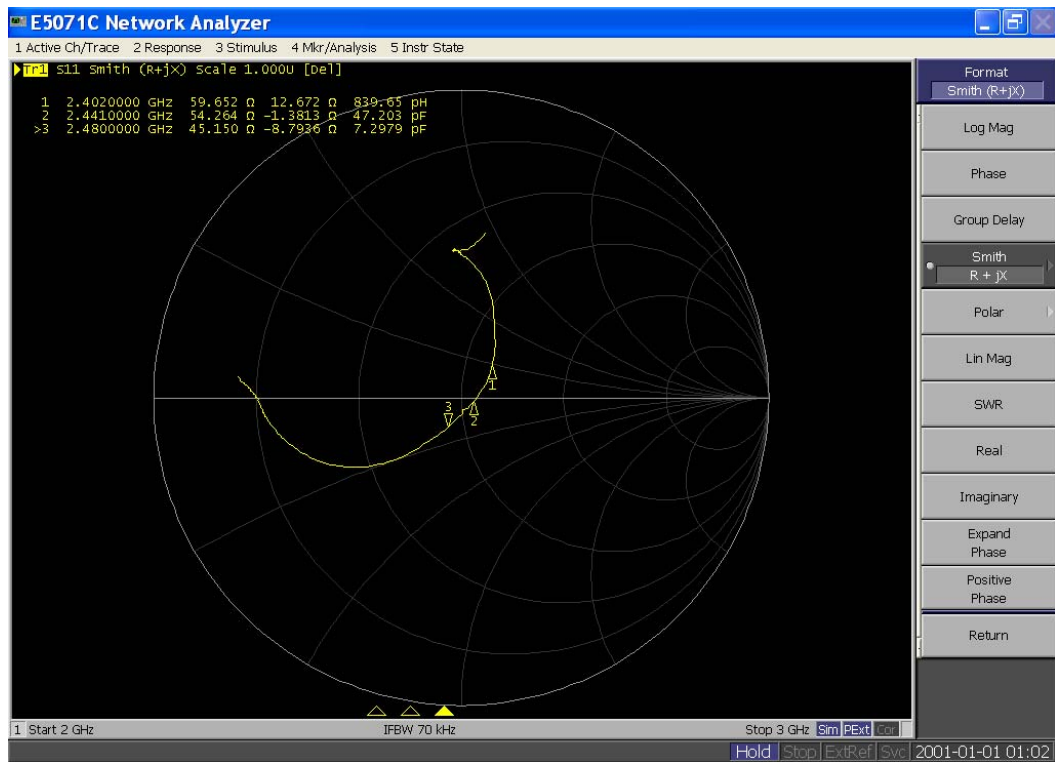



4.APPENDIX A THE EUT AND TEST CONFIGURATION

