



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: LUXPAD TABLET

Address: YangGuangGaoErFU Building, No 7008 SHENNAN Road, FuTian
SHENZHEN, China

FCC ID: 2ANIRASTRO10

Product Name: TABLET

Standard(s): 47 CFR Part 2, 47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E
47 CFR Part 27
47 CFR Part 90
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems
v03r01

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230634282-00F

Date Of Issue: 2023/7/11

Reviewed By: Calvin Chen

Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	6
1.2.2 Support Equipment List and Details	10
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 Applicable Standard For Part 22 Subpart H:.....	13
3.2 Applicable Standard For Part 24 Subpart E:	15
3.3 Applicable Standard For Part 27:.....	16
3.4 Applicable Standard For Part 90:.....	19
3.5 Test Method:	20
4. Test DATA AND RESULTS	27
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....	27
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....	33
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:.....	39
4.4 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 4:.....	46
4.5 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5:.....	53
4.6 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 2.....	60
4.7 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 4.....	81
4.8 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5.....	102
4.9 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 12.....	118
4.10 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 17.....	134
4.11 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 25.....	144
4.12 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 26.....	167
4.13 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41.....	201
4.14 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 66.....	217
4.15 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 71.....	238
4.16 RADIATED SPURIOUS EMISSIONS.....	254

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230634282-00F	Original Report	2023/7/11

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	TABLET
EUT Model:	ASTRO 10
Operation Bands and modes:	GSM/GPRS/EDGE: 850/1900 WCDMA: Band 2/4/5 LTE: Band 2/4/5/12/17/25/26/41/66/71
Modulation Type:	GMSK,8PSK, BPSK, QPSK, 16QAM
Rated Input Voltage:	DC 5V from adapter or DC 3.8V from battery
Serial Number:	26YR-1
EUT Received Date:	2023/6/16
EUT Received Status:	Good

Operation Voltage (V_{DC}) ▲:

Lowest:	3.65	Normal:	3.8	Highest:	4.35
---------	------	---------	-----	----------	------

Transmission Antenna Information ▲:

Antenna Manufacturer	Antenna Type	Operation Bands	Antenna Frequency Range(MHz)	Antenna Gain(G _r)(dBi)	L _c (dB)
Shenzhen 3Good Wireless Communication Co., Ltd	FPC	GSM850	824-849	-1.5	0.1
		PCS1900	1850-1910	-1	0.2
		WCDMA B2	1850-1910	-1	0.2
		WCDMA B4	1710-1755	-1	0.2
		WCDMA B5	824-849	-1.5	0.1
		LTE B2	1850-1910	-1	0.2
		LTE B4	1710-1755	-1	0.2
		LTE B5	824-849	-1.5	0.1
		LTE B12	699-716	-2	0.1
		LTE B17	704-716	-2	0.1
		LTE B25	1850-1915	-1	0.2
		LTE B26	814-849	-1.5	0.1
		LTE B41	2496-2690	0.5	0.3
		LTE B66	1710-1785	-1	0.2
LTE B71	663-698	-2.5	0.1		

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	MAXWEST	ASTRO 10

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting:	
GSM/GPRS/EGPRS	
Function: Menu select > GSM Mobile Station > GSM 850/1900	
Press Connection control to choose the different menus	
Press RESET > choose all the reset all settings	
Connection Press Signal Off to turn off the signal and change settings	
Network Support > GSM + GPRS or GSM + EGSM	
Main Service > Packet Data	
Service selection > Test Mode A – Auto Slot Config. off	
MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting	
> Slot configuration > Uplink/Gamma	
> 33 dBm for GPRS 850	
> 30 dBm for GPRS 1900	
> 27 dBm for EGPRS 850	
> 26 dBm for EGPRS 1900	
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel	
Frequency Offset > + 0 Hz	
Mode > BCCH and TCH	
BCCH Level > -85 dBm (May need to adjust if link is not stable)	
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]	
Channel Type > Off	
P0 > 4 dB	
Slot Config > Unchanged (if already set under MS signal)	
TCH > choose desired test channel	
Hopping > Off	
Main Timeslot > 3	
Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)	
Bit Stream > 2E9-1 PSR Bit Stream	
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input	
Connection Press Signal on to turn on the signal and change settings	

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/ 5	0
	β_{ec}	209/225	12/15	30 15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
CM(dB)	1.0	3.0	2.0	3.0	1.0	
PR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 96	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE(TDD):

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	
1	$19760 \cdot T_s$			$20480 \cdot T_s$			
2	$21952 \cdot T_s$			$23040 \cdot T_s$			
3	$24144 \cdot T_s$			$25600 \cdot T_s$			
4	$26336 \cdot T_s$			$7680 \cdot T_s$			
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	
6	$19760 \cdot T_s$			$23040 \cdot T_s$			
7	$21952 \cdot T_s$			$12800 \cdot T_s$			
8	$24144 \cdot T_s$			-			
9	$13168 \cdot T_s$			-			

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T_s) x # of S + # of U


Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:
 Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$
 where
 T_s = 1/(15000 x 2048) seconds

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
IPRO	Earphone	Phonenix 5.0s	EP221126001

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

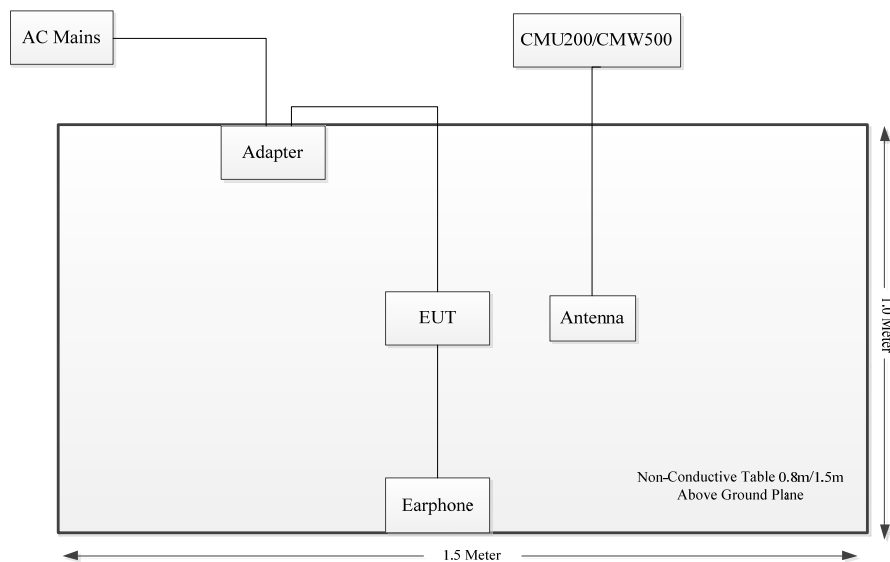1.2.4 Block Diagram of Test Setup

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232; §27.50; §90.635	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53; §90.209	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 22.917; § 24.238; §27.53; §90.691	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917; § 24.238; §27.53; §90.691	Out of band emission, Band Edge	Compliant
FCC§ 2.1055; § 22.355; § 24.235; §27.54; §90.213	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053; § 22.917; § 24.238; §27.53; §90.691	Field Strength of Spurious Radiation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile \leq3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.4 Applicable Standard For Part 90:

3.4.1 RF Output Power

FCC §90.635

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

3.4.2 Spurious Emissions

FCC §90.691

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

3.4.3 Frequency stability

FCC §90.213

809-824 MHz band, 2.5ppm for 2W or less output power.

3.5 Test Method:

3.5.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

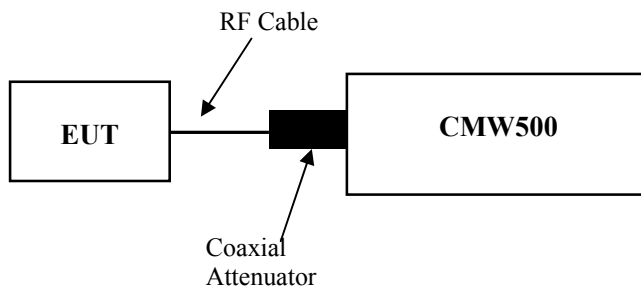

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.5.2 Occupied Bandwidth

According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.


c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

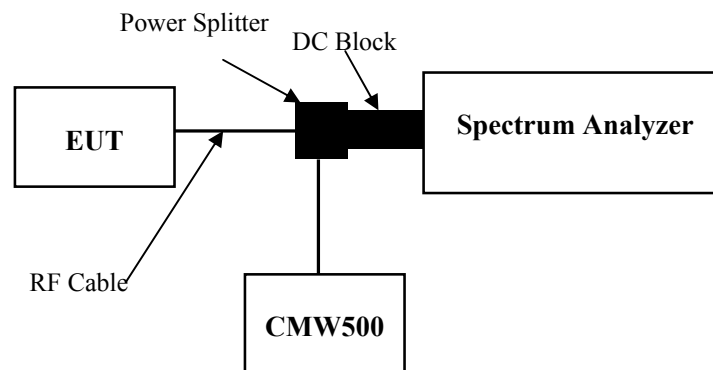


3.5.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),8 effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

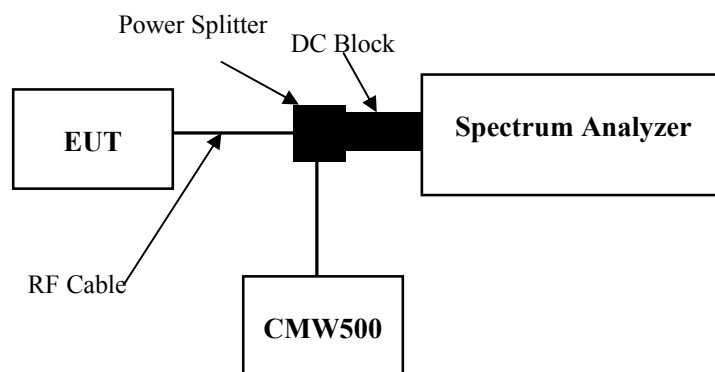


3.5.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/block (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

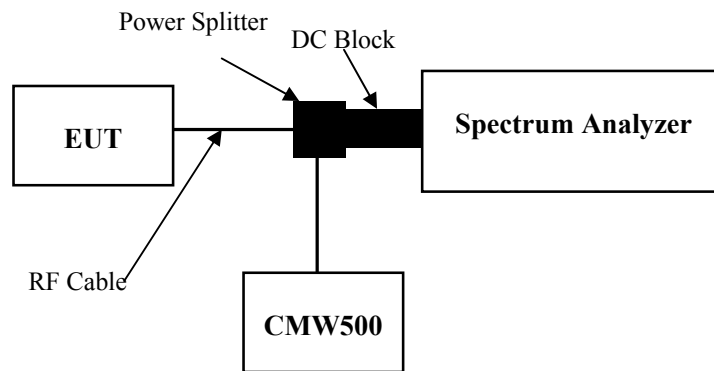

3.5.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

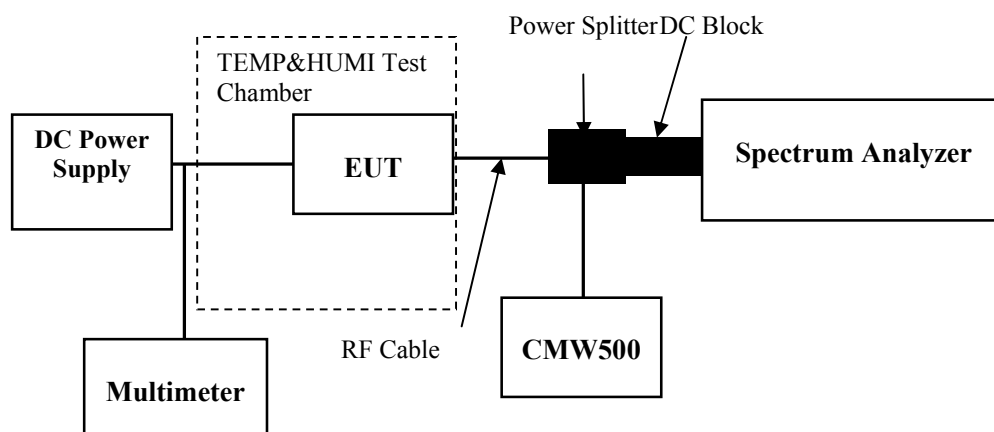

3.5.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

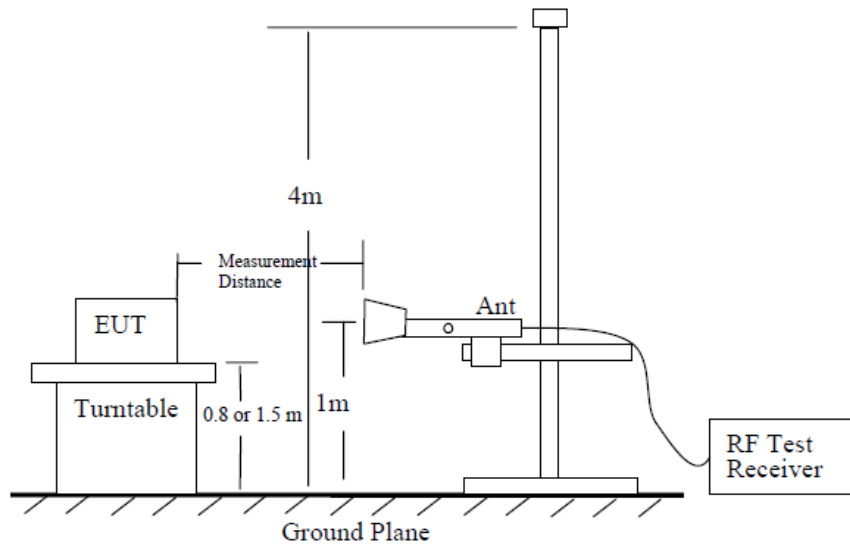


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

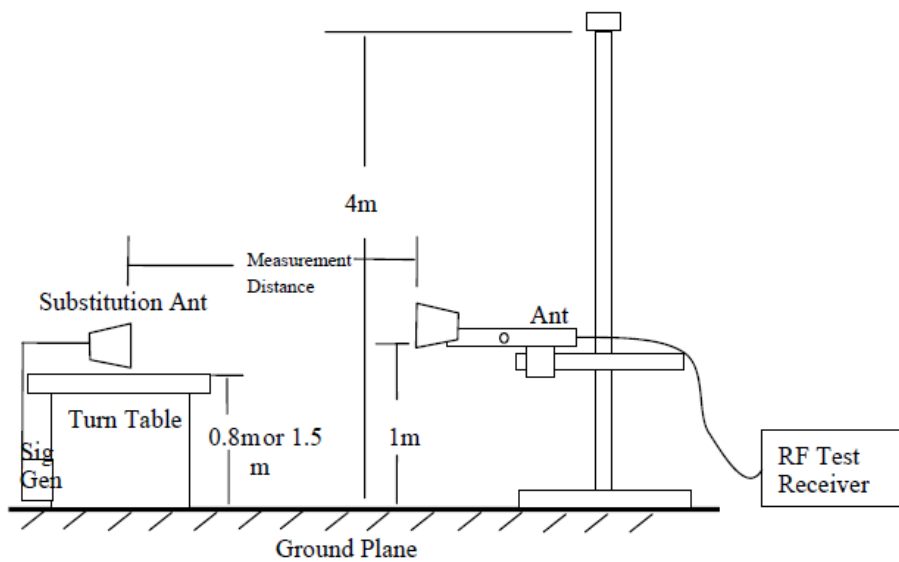


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 - P_e = equivalent emission power in dBm
 - P_s = source (signal generator) power in dBmNOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
-------------------	-----------	------------------------	-------	---------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

Test Data:

RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	31.93	31.97	31.86	28.22	38.45
GPRS 1 Slot	31.96	31.99	31.9	28.24	38.45
GPRS 2 Slots	31.33	31.34	31.26	27.59	38.45
GPRS 3 Slots	29.61	29.64	29.53	25.89	38.45
GPRS 4 Slots	28.56	28.59	28.51	24.84	38.45
EDGE 1 Slot	26.11	26.13	26.05	22.38	38.45
EDGE 2 Slots	24.93	24.98	24.88	21.23	38.45
EDGE 3 Slots	22.72	22.77	22.69	19.02	38.45
EDGE 4 Slots	21.49	21.51	21.42	17.76	38.45

Note:
ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)
Gr(dBd)=Gr(dBi)-2.15

Result:	Pass
----------------	-------------

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.242	0.242	0.244	0.302	0.31	0.305
EDGE	0.248	0.246	0.248	0.313	0.312	0.312

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a): Spurious Emissions at Antenna Terminal	
Result:	Pass, please refer to the test plots of Spurious Emissions at Antenna Terminal.


FCC §2.1051, §22.917(a): Out of band emission, Band Edge	
Result:	Pass, please refer to the test plots of Out of band emission, Band Edge.

Frequency Stability					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	26	0.031	2.5
	-20	3.8	51	0.061	2.5
	-10	3.8	23	0.027	2.5
	0	3.8	18	0.022	2.5
	10	3.8	6	0.007	2.5
	20	3.8	14	0.017	2.5
	30	3.8	2	0.002	2.5
	40	3.8	21	0.025	2.5
	50	3.8	45	0.054	2.5
Frequency Stability vs. Voltage	20	3.65	22	0.026	2.5
	20	4.35	18	0.022	2.5
Result:				Pass	

Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	9	0.011	2.5
	-20	3.8	22	0.026	2.5
	-10	3.8	2	0.002	2.5
	0	3.8	13	0.016	2.5
	10	3.8	4	0.005	2.5
	20	3.8	2	0.002	2.5
	30	3.8	12	0.014	2.5
	40	3.8	11	0.013	2.5
	50	3.8	36	0.043	2.5
Frequency Stability vs. Voltage	20	3.65	12	0.014	2.5
	20	4.35	20	0.024	2.5
Result:				Pass	

Test Plots (Note: The 4.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

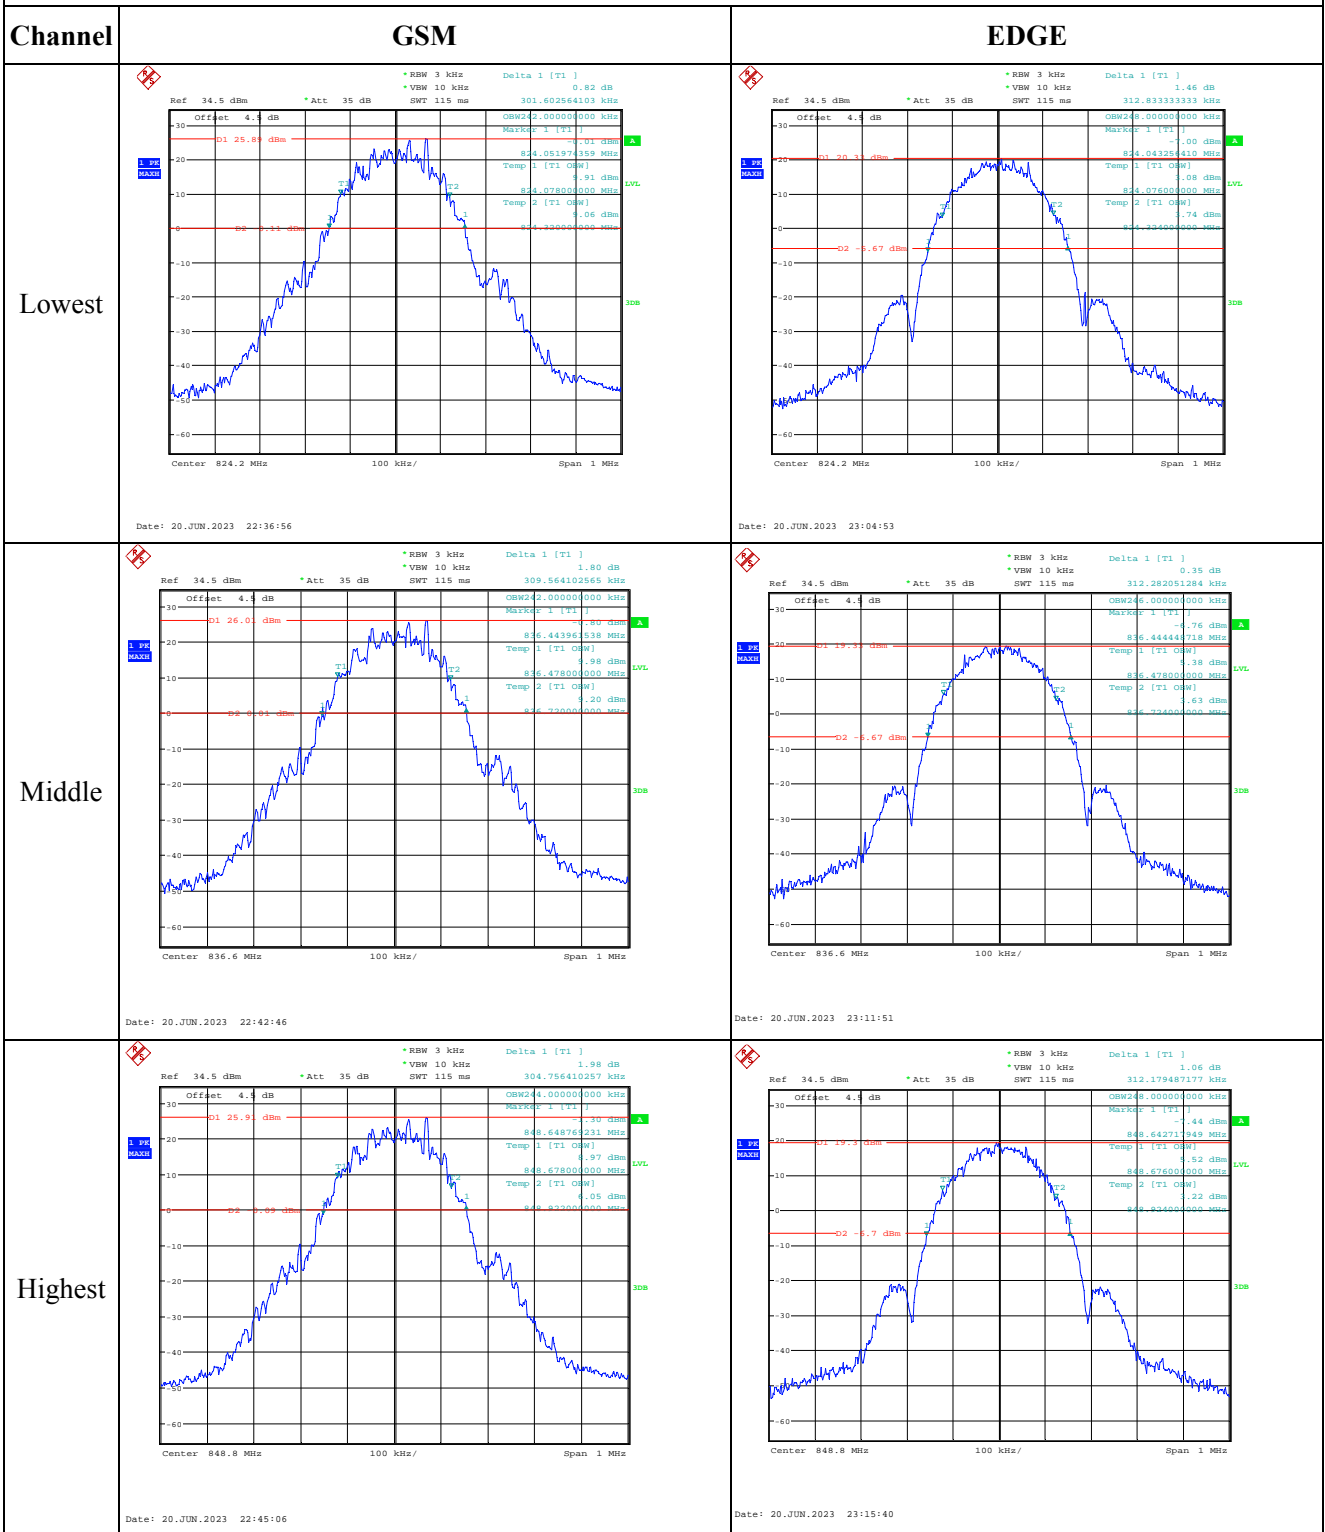

Spurious Emissions at Antenna Terminal

Channel	GSM	
Lowest	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -38.96 dBm</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 22:07:01</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -22.89 dBm</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 20.JUN.2023 22:07:36</p>
Middle	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -39.40 dBm</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 22:08:42</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -22.57 dBm</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 20.JUN.2023 22:09:20</p>
Highest	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -37.55 dBm</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 22:12:46</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -22.45 dBm</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 20.JUN.2023 22:13:08</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
GSM	<p>Date: 20.JUN.2023 22:39:24</p>	<p>Date: 20.JUN.2023 22:45:49</p>
EDGE	<p>Date: 20.JUN.2023 23:06:13</p>	<p>Date: 20.JUN.2023 23:16:31</p>

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

Test Data:

FCC§2.1046; § 24.232 (c): RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	29.67	29.65	29.5	28.47	33
GPRS 1 Slot	29.67	29.68	29.53	28.48	33
GPRS 2 Slots	28.99	28.98	28.88	27.79	33
GPRS 3 Slots	27.28	27.26	27.15	26.08	33
GPRS 4 Slots	26.23	26.18	26.09	25.03	33
EDGE 1 Slot	26.04	26.05	25.96	24.85	33
EDGE 2 Slots	24.86	24.87	24.75	23.67	33
EDGE 3 Slots	22.5	22.52	22.43	21.32	33
EDGE 4 Slots	21.31	21.33	21.26	20.13	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:	Pass
----------------	-------------

FCC §2.1049, §24.238: Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.24	0.242	0.242	0.3	0.301	0.303
EDGE	0.252	0.252	0.25	0.326	0.318	0.315

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.


FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.053	1850.000	1909.945	1910.000
	-20	3.8	1850.076	1850.000	1909.937	1910.000
	-10	3.8	1850.076	1850.000	1909.949	1910.000
	0	3.8	1850.069	1850.000	1909.951	1910.000
	10	3.8	1850.067	1850.000	1909.932	1910.000
	20	3.8	1850.080	1850.000	1909.922	1910.000
	30	3.8	1850.063	1850.000	1909.943	1910.000

	40	3.8	1850.069	1850.000	1909.938	1910.000
	50	3.8	1850.063	1850.000	1909.944	1910.000
Frequency Stability vs. Voltage	20	3.65	1850.073	1850.000	1909.933	1910.000
	20	4.35	1850.055	1850.000	1909.949	1910.000
					Result:	Pass

Test Mode:	8PSK		Test Channel: Lowest for Lower Edge, Highest for Upper Edge			
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.059	1850.000	1909.924	1910.000
	-20	3.8	1850.056	1850.000	1909.942	1910.000
	-10	3.8	1850.073	1850.000	1909.940	1910.000
	0	3.8	1850.052	1850.000	1909.942	1910.000
	10	3.8	1850.075	1850.000	1909.937	1910.000
	20	3.8	1850.076	1850.000	1909.924	1910.000
	30	3.8	1850.053	1850.000	1909.943	1910.000
	40	3.8	1850.057	1850.000	1909.949	1910.000
	50	3.8	1850.056	1850.000	1909.952	1910.000
Frequency Stability vs. Voltage	20	3.65	1850.049	1850.000	1909.943	1910.000
	20	4.35	1850.051	1850.000	1909.942	1910.000
					Result:	Pass

Test Plots (Note: The 4.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

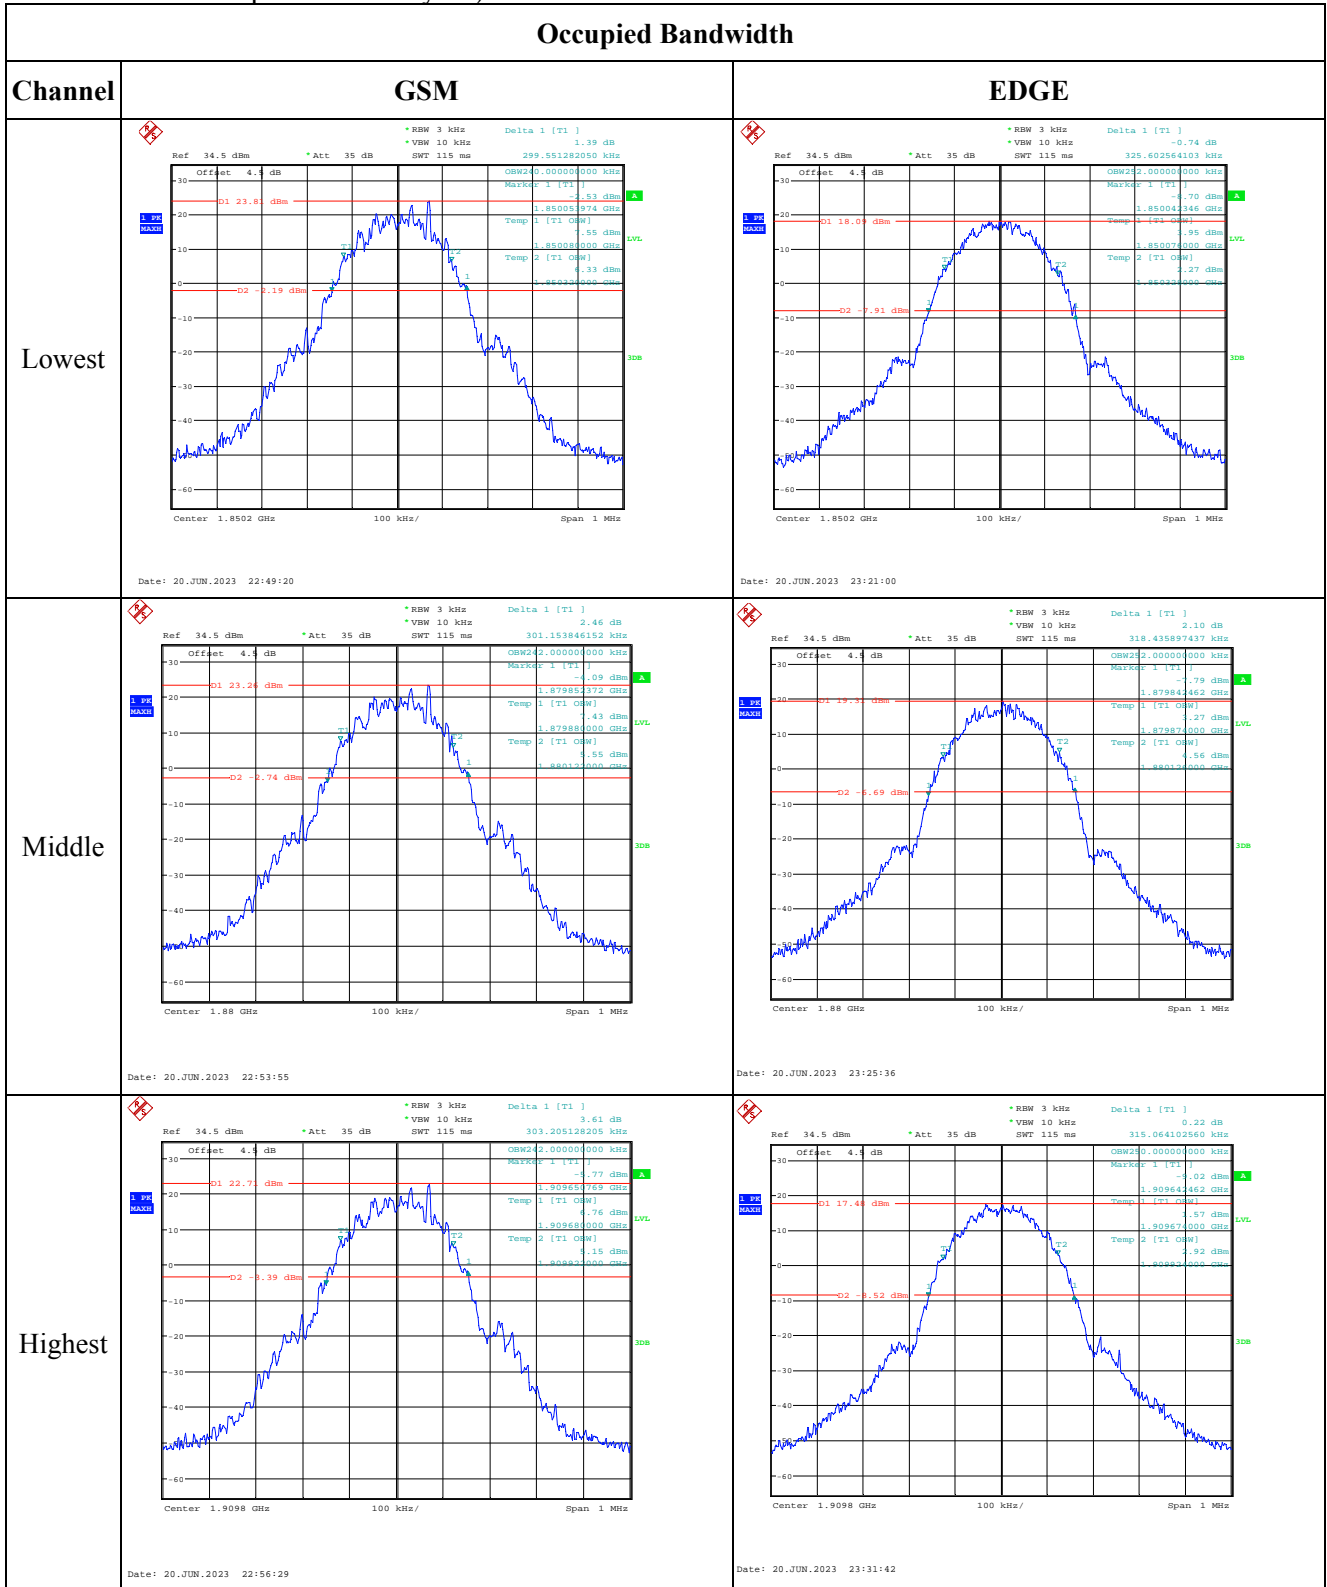

Spurious Emissions at Antenna Terminal

Channel	GSM	
Lowest	<p>Ref 34.5 dBm Att 40 dB RBW 100 kHz VSW 300 kHz SWT 100 ms Marker 1 [T1] -38.99 dBm</p> <p>Offset 4.1 dB D1 -13 dBm 858.657142857 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 22:15:58</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz VSW 3 MHz SWT 110 ms Marker 1 [T1] -33.13 dBm</p> <p>Offset 4.1 dB D1 -13 dBm 3.127025641 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 22:16:36</p>
Middle	<p>Ref 34.5 dBm Att 40 dB RBW 100 kHz VSW 300 kHz SWT 100 ms Marker 1 [T1] -38.74 dBm</p> <p>Offset 4.1 dB D1 -13 dBm 963.971428571 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 22:18:11</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz VSW 3 MHz SWT 110 ms Marker 1 [T1] -33.90 dBm</p> <p>Offset 4.1 dB D1 -13 dBm 3.127025641 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 22:19:45</p>
Highest	<p>Ref 34.5 dBm Att 40 dB RBW 100 kHz VSW 300 kHz SWT 100 ms Marker 1 [T1] -38.74 dBm</p> <p>Offset 4.1 dB D1 -13 dBm 121.457142857 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 22:21:52</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz VSW 3 MHz SWT 110 ms Marker 1 [T1] -33.11 dBm</p> <p>Offset 4.1 dB D1 -13 dBm 3.134576893 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 22:22:46</p>

Out of band emission, Band Edge

Channel	Lowest	Highest
GSM		
EDGE		

4.3 Antenna Port Test Data and Results for WCDMA Band 2:

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	------------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1852.4	1880	1907.6

Test Data:**FCC§2.1046; § 24.232****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.01	22.93	22.95	21.81	33
HSDPA Subtest 1	21.08	21.14	21.13	19.94	33
HSDPA Subtest 2	21.11	20.99	21.05	19.91	33
HSDPA Subtest 3	21.07	21.15	21.03	19.95	33
HSDPA Subtest 4	21.05	21.13	21.07	19.93	33
HSUPA Subtest 1	21.12	21.11	21.13	19.93	33
HSUPA Subtest 2	21.06	20.98	20.94	19.86	33
HSUPA Subtest 3	21.02	21.07	21.15	19.95	33
HSUPA Subtest 4	20.08	20.02	19.84	18.88	33
HSUPA Subtest 5	20.85	20.87	20.82	19.67	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:	Pass
----------------	-------------

Peak-to-average Ratio (PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	2.95	3.04	3.01	13
HSDPA	3.94	4.01	4.04	13
HSUPA	3.78	4.52	4.33	13

Result:	Pass
----------------	-------------

FCC §2.1049, §24.238: Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.18	4.18	4.18	4.736	4.726	4.729
HSDPA	4.18	4.2	4.22	4.739	4.769	5.056
HSUPA	4.18	4.18	4.22	4.729	4.725	4.906

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---


FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.291	1850.000	1909.690	1910.000
	-20	3.8	1850.293	1850.000	1909.680	1910.000
	-10	3.8	1850.291	1850.000	1909.693	1910.000
	0	3.8	1850.296	1850.000	1909.687	1910.000
	10	3.8	1850.288	1850.000	1909.702	1910.000
	20	3.8	1850.300	1850.000	1909.680	1910.000
	30	3.8	1850.299	1850.000	1909.702	1910.000
	40	3.8	1850.287	1850.000	1909.707	1910.000
	50	3.8	1850.276	1850.000	1909.692	1910.000
Frequency Stability vs. Voltage	20	3.65	1850.294	1850.000	1909.693	1910.000
	20	4.35	1850.271	1850.000	1909.692	1910.000
					Result:	Pass

Occupied Bandwidth

Channel


HSUPA

Lowest

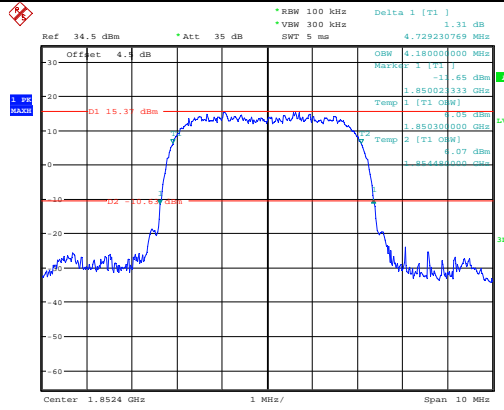


Date: 20 JUN.2023 15:40:48

Middle

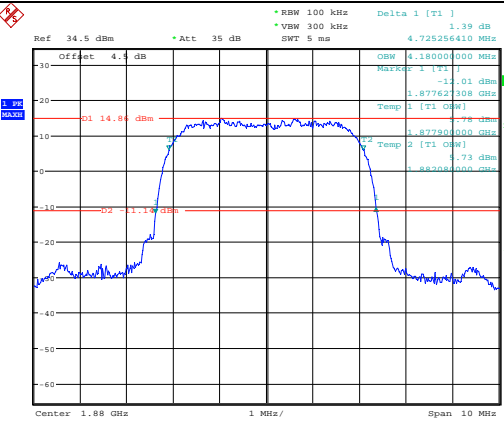

Date: 20 JUN.2023 15:52:15

Highest

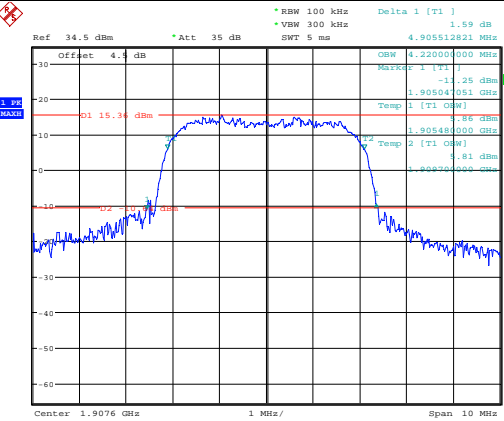

Date: 20 JUN.2023 15:49:17

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -41.42 dBm 205.985714286 MHz</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:48:10</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz *SWT 110 ms Marker 1 [T1] -33.83 dBm 3.128000000 GHz</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 16:27:06</p>
Middle	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -40.12 dBm 491.442857143 MHz</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:49:52</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz *SWT 110 ms Marker 1 [T1] -33.99 dBm 3.128000000 GHz</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 16:27:42</p>
Highest	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -40.40 dBm 168.571428571 MHz</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:50:15</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz *SWT 110 ms Marker 1 [T1] -34.98 dBm 17.720000000 GHz</p> <p>Offset 4.1 dB</p> <p>D1 -13 dBm</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 16:24:10</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
R99		
HSUPA		
HSDPA		

4.4 Antenna Port Test Data and Results for WCDMA Band 4:

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/7/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1712.4	1732.6	1752.6

Test Data:**FCC§2.1046; §27.50(d)(4)
RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.13	22.87	23.12	21.93	30
HSDPA Subtest 1	22.21	21.8	22.23	21.03	30
HSDPA Subtest 2	22.12	21.81	22.16	20.96	30
HSDPA Subtest 3	22.13	21.85	22.2	21	30
HSDPA Subtest 4	22.19	21.85	22.22	21.02	30
HSUPA Subtest 1	22.04	21.81	22.17	20.97	30
HSUPA Subtest 2	22.06	21.9	22.2	21	30
HSUPA Subtest 3	22.08	21.77	22.18	20.98	30
HSUPA Subtest 4	22.18	21.78	22.24	21.04	30
HSUPA Subtest 5	22.12	21.8	22.19	20.99	30

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:	Pass
----------------	-------------

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	2.53	2.66	2.37	13
HSDPA	4.07	4.1	3.88	13
HSUPA	3.56	3.62	3.97	13

Result:	Pass
----------------	-------------

FCC §2.1049, §27.53: Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.186	4.171	4.186	4.814	4.743	4.786
HSDPA	4.186	4.171	4.186	4.757	4.743	4.757
HSUPA	4.171	4.186	4.186	4.743	4.743	4.757

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.230	1710.000	1754.622	1755.000
	-20	3.8	1710.390	1710.000	1754.668	1755.000
	-10	3.8	1710.511	1710.000	1754.665	1755.000
	0	3.8	1710.136	1710.000	1754.745	1755.000
	10	3.8	1710.143	1710.000	1754.698	1755.000
	20	3.8	1710.300	1710.000	1754.686	1755.000
	30	3.8	1710.234	1710.000	1754.719	1755.000
	40	3.8	1710.250	1710.000	1754.625	1755.000
	50	3.8	1710.340	1710.000	1754.613	1755.000
Frequency Stability vs. Voltage	20	3.65	1710.270	1710.000	1754.645	1755.000
	20	4.35	1710.350	1710.000	1754.615	1755.000
					Result:	Pass

Test Plots (Note: The 4.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):


Occupied Bandwidth		
Channel	WCDMA R99	HSDPA
Lowest	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 4.69 dB *VBW 300 kHz *SWT 5 ms 4.814285714 MHz Offset 4.1 dB Marker 1 [T1] 4.69 dBm Marker 2 [T2] -1.64 dBm Marker 3 [T3] -1.70995143 GHz Marker 4 [T4] -1.51 dBm Marker 5 [T5] 1.71010000 GHz Marker 6 [T6] 1.40 dBm Marker 7 [T7] 1.714480714 MHz Center 1.7124 GHz 1 MHz/ Span 10 MHz Date: 20.JUN.2023 17:54:52</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.37 dB *VBW 300 kHz *SWT 5 ms 4.757142857 MHz Offset 4.1 dB Marker 1 [T1] 0.37 dBm Marker 2 [T2] -1.91 dBm Marker 3 [T3] 1.71001286 GHz Marker 4 [T4] -1.70 dBm Marker 5 [T5] 1.71010000 GHz Marker 6 [T6] 1.40 dBm Marker 7 [T7] 1.714480714 MHz Center 1.7124 GHz 1 MHz/ Span 10 MHz Date: 20.JUN.2023 18:09:00</p>
Middle	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 1.09 dB *VBW 300 kHz *SWT 5 ms 4.742857143 MHz Offset 4.1 dB Marker 1 [T1] 1.09 dBm Marker 2 [T2] -1.80 dBm Marker 3 [T3] 1.730228571 GHz Marker 4 [T4] -1.22 dBm Marker 5 [T5] 1.73051286 GHz Marker 6 [T6] 1.85 dBm Marker 7 [T7] 1.734680714 MHz Center 1.7326 GHz 1 MHz/ Span 10 MHz Date: 20.JUN.2023 18:15:29</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.54 dB *VBW 300 kHz *SWT 5 ms 4.742857143 MHz Offset 4.1 dB Marker 1 [T1] 0.54 dBm Marker 2 [T2] -1.67 dBm Marker 3 [T3] 1.730228571 GHz Marker 4 [T4] -1.33 dBm Marker 5 [T5] 1.73051286 GHz Marker 6 [T6] 1.32 dBm Marker 7 [T7] 1.734680714 MHz Center 1.7326 GHz 1 MHz/ Span 10 MHz Date: 20.JUN.2023 18:16:30</p>
Highest	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 1.75 dB *VBW 300 kHz *SWT 5 ms 4.785714286 MHz Offset 4.1 dB Marker 1 [T1] 1.75 dBm Marker 2 [T2] -1.39 dBm Marker 3 [T3] 1.75020000 GHz Marker 4 [T4] -1.42 dBm Marker 5 [T5] 1.75050000 GHz Marker 6 [T6] 1.74 dBm Marker 7 [T7] 1.754680714 MHz Center 1.7526 GHz 1 MHz/ Span 10 MHz Date: 20.JUN.2023 18:20:38</p>	<p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.67 dB *VBW 300 kHz *SWT 5 ms 4.757142857 MHz Offset 4.1 dB Marker 1 [T1] 0.67 dBm Marker 2 [T2] -1.89 dBm Marker 3 [T3] 1.75021286 GHz Marker 4 [T4] -1.00 dBm Marker 5 [T5] 1.75050000 GHz Marker 6 [T6] 1.55 dBm Marker 7 [T7] 1.754680714 MHz Center 1.7526 GHz 1 MHz/ Span 10 MHz Date: 20.JUN.2023 18:23:13</p>

Occupied Bandwidth

Channel


HSUPA

Lowest

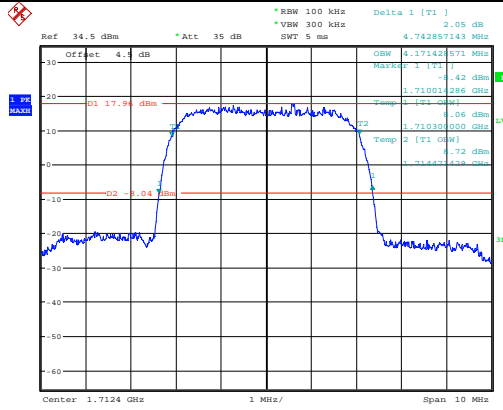


Date: 20 JUN.2023 18:10:51

Middle

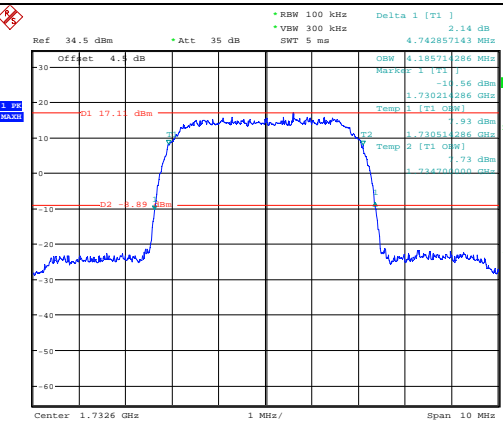

Date: 20 JUN.2023 18:17:41

Highest

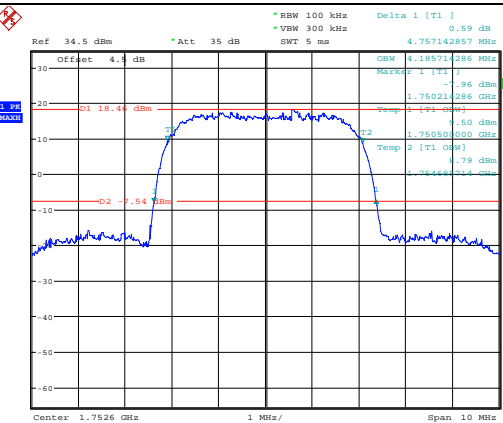

Date: 20 JUN.2023 18:26:00

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	<p>Ref 34.5 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -41.19 dBm VSW 300 kHz SWT 100 ms 631.40000000 MHz</p> <p>Offset 4.1 dB</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:50:44</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz Marker 1 [T1] -33.98 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Offset 4.1 dB</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 16:38:20</p>
Middle	<p>Ref 34.5 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -40.53 dBm VSW 300 kHz SWT 100 ms 999.071428571 MHz</p> <p>Offset 4.1 dB</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:51:23</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz Marker 1 [T1] -33.43 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Offset 4.1 dB</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 16:54:01</p>
Highest	<p>Ref 34.5 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -40.25 dBm VSW 300 kHz SWT 100 ms 139.471428571 MHz</p> <p>Offset 4.1 dB</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:51:46</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz Marker 1 [T1] -34.00 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Offset 4.1 dB</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 20.JUN.2023 16:53:25</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
R99		
HSUPA		
HSDPA		

4.5 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	826.4	836.6	846.6

Test Data:**FCC §2.1046; § 22.913 (a)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.24	23.19	22.97	19.49	38.45
HSDPA Subtest 1	22.46	22.31	22.37	18.71	38.45
HSDPA Subtest 2	22.13	22.27	22.32	18.57	38.45
HSDPA Subtest 3	22.39	22.31	22.43	18.68	38.45
HSDPA Subtest 4	22.28	22.19	22.53	18.78	38.45
HSUPA Subtest 1	22.37	22.29	22.23	18.62	38.45
HSUPA Subtest 2	22.55	22.48	22.31	18.8	38.45
HSUPA Subtest 3	22.43	22.36	22.29	18.68	38.45
HSUPA Subtest 4	21.27	21.15	21.28	17.53	38.45
HSUPA Subtest 5	22.05	21.89	22.04	18.3	38.45

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.01	3.08	3.08	13
HSDPA	4.1	4.29	4.1	13
HSUPA	4.01	4.49	3.94	13

Result:**Pass****FCC §2.1049, §22.917, §22.905: Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.171	4.171	4.186	4.729	4.729	4.743
HSDPA	4.186	4.171	4.186	4.729	4.729	4.743
HSUPA	4.157	4.171	4.171	4.729	4.729	4.729


Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal**Result: Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

FCC §2.1051, §22.917(a): Out of band emission, Band Edge**Result: Pass, please refer to the test plots of Out of band emission, Band Edge.****FCC §2.1055, §22.355: Frequency Stability**

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	44	0.053	2.5
	-20	3.8	13	0.016	2.5
	-10	3.8	4	0.005	2.5
	0	3.8	8	0.010	2.5
	10	3.8	3	0.004	2.5
	20	3.8	30	0.036	2.5
	30	3.8	8	0.010	2.5
	40	3.8	1	0.001	2.5
Frequency Stability vs. Voltage	50	3.8	6	0.007	2.5
	20	3.65	1	0.001	2.5
	20	4.35	3	0.004	2.5
Result:				Pass	

Test Plots (Note: The 4.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

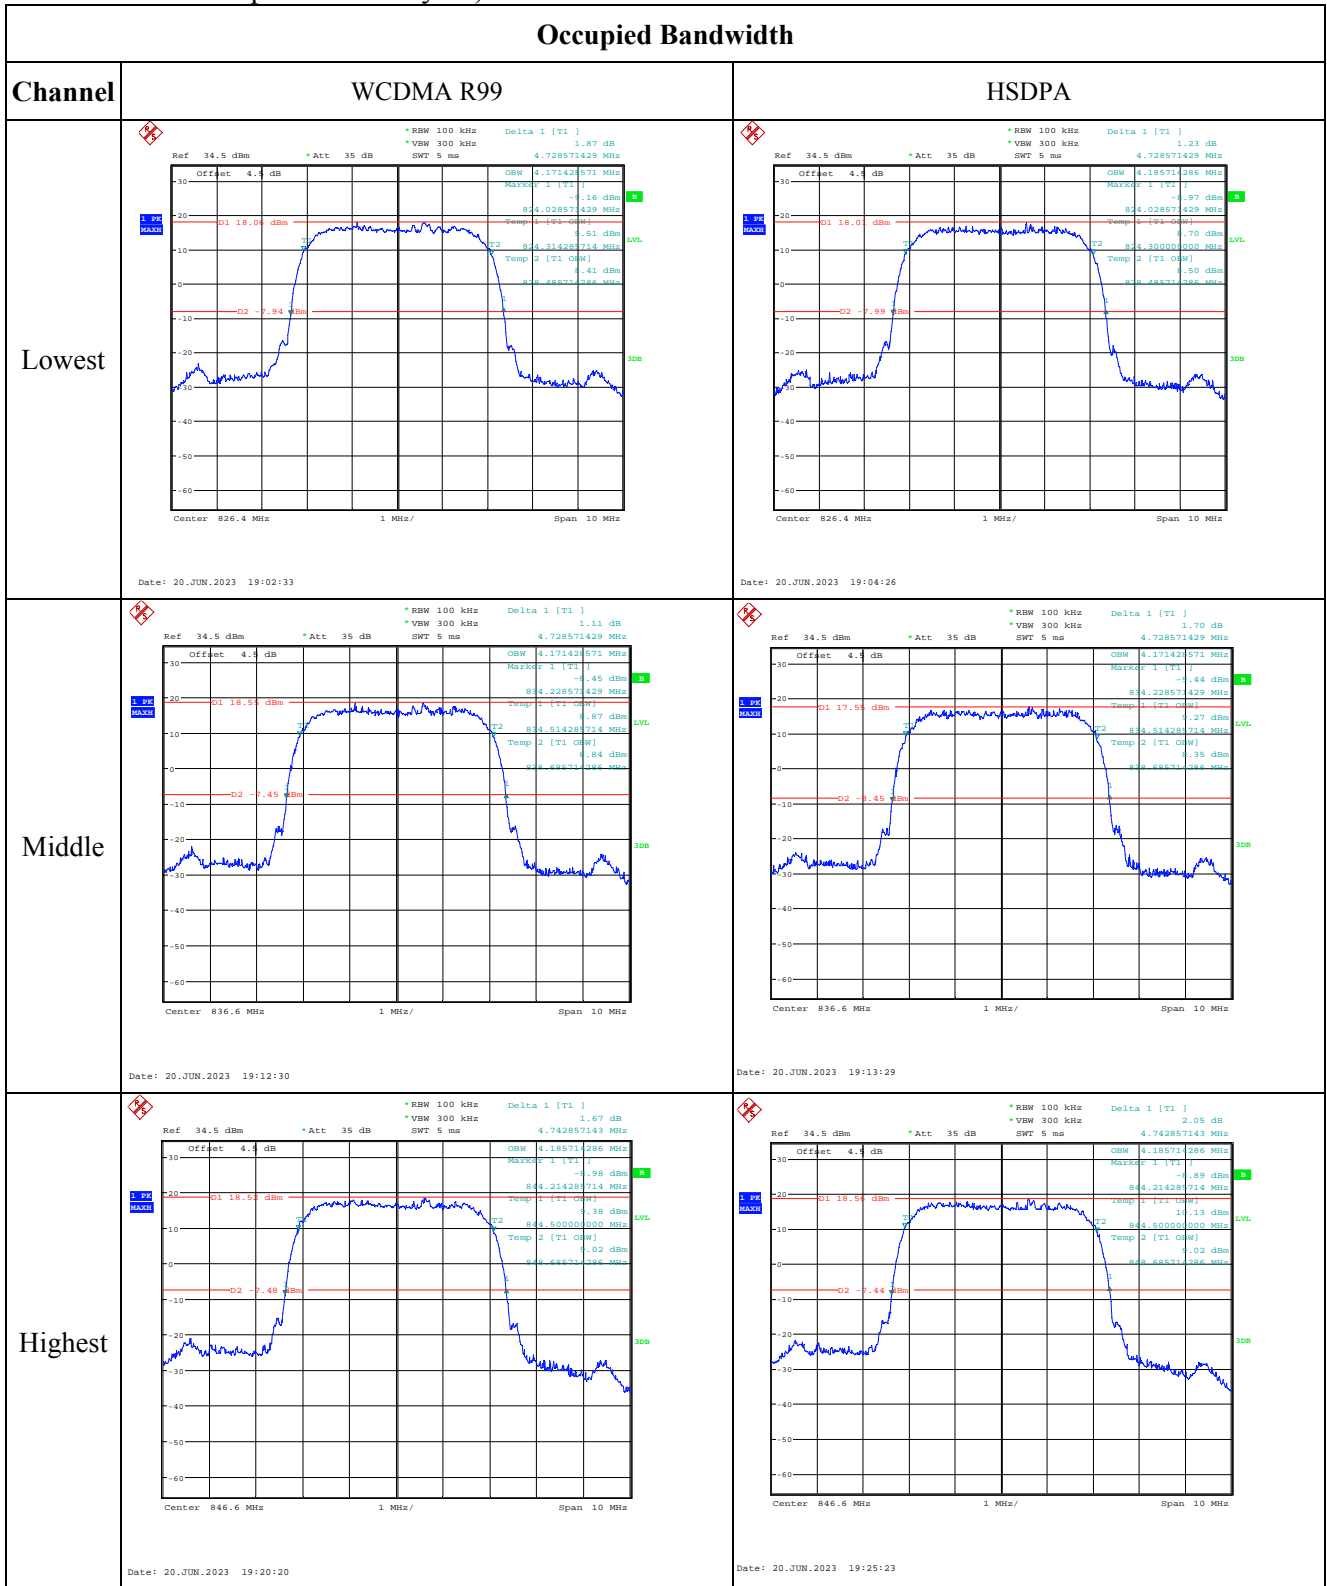


Occupied Bandwidth

Channel


HSUPA

Lowest

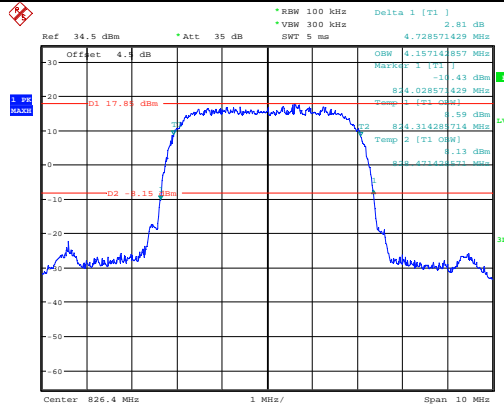


Date: 20 JUN.2023 19:08:24

Middle

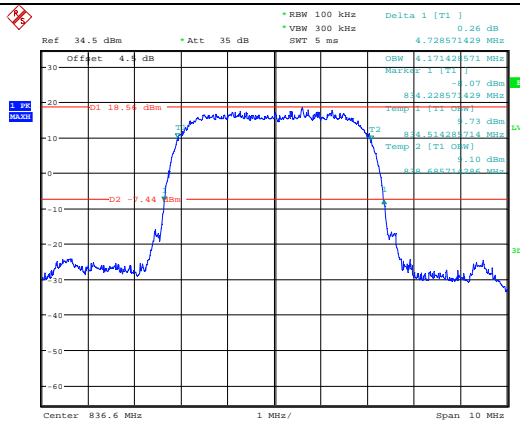

Date: 20 JUN.2023 19:15:25

Highest

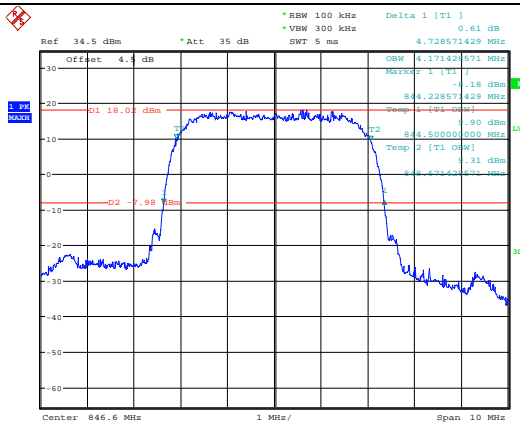

Date: 20 JUN.2023 19:27:22

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	<p>Ref 34.5 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -40.20 dBm VSW 300 kHz SWT 100 ms 639.714285714 MHz</p> <p>Offset 4.1 dB D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:46:54</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz Marker 1 [T1] -33.90 dBm VSW 3 MHz SWT 55 ms 3.160000000 GHz</p> <p>Offset 4.1 dB D1 -13 dBm</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 20.JUN.2023 19:47:11</p>
Middle	<p>Ref 34.5 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -40.74 dBm VSW 300 kHz SWT 100 ms 268.342857143 MHz</p> <p>Offset 4.1 dB D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:44:51</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz Marker 1 [T1] -32.04 dBm VSW 3 MHz SWT 55 ms 3.142000000 GHz</p> <p>Offset 4.1 dB D1 -13 dBm</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 20.JUN.2023 19:45:10</p>
Highest	<p>Ref 34.5 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -40.16 dBm VSW 300 kHz SWT 100 ms 922.400000000 MHz</p> <p>Offset 4.1 dB D1 -13 dBm</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 20.JUN.2023 19:40:21</p>	<p>Ref 34.5 dBm Att 35 dB RBW 1 MHz Marker 1 [T1] -32.42 dBm VSW 3 MHz SWT 55 ms 3.160000000 GHz</p> <p>Offset 4.1 dB D1 -13 dBm</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 20.JUN.2023 19:40:52</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
R99		
HSUPA		
HSDPA		

4.6 Antenna Port Test Data and Results for LTE Band 2

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

Test Data:

FCC§2.1046; § 24.232						
RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	22.13	20.48	20.33	20.93	33
	RB1#3	21.98	20.67	20.49		
	RB1#5	21.67	20.46	20.3		
	RB3#0	21.7	20.62	20.46		
	RB3#3	21.72	20.66	20.38		
	RB6#0	20.64	19.53	19.35		
1.4MHz 16QAM	RB1#0	20.71	19.47	19.27	19.75	33
	RB1#3	20.95	19.74	19.51		
	RB1#5	20.7	19.55	19.29		
	RB3#0	20.69	19.72	19.6		
	RB3#3	20.64	19.71	19.61		
	RB6#0	19.69	18.51	18.41		
3MHz QPSK	RB1#0	22.1	22.03	20.78	20.9	33
	RB1#8	22.1	21.62	20.75		
	RB1#14	22.07	21.51	20.78		
	RB6#0	21.02	20.74	19.69		
	RB6#9	21.06	20.83	19.73		
3MHz 16QAM	RB1#0	21.18	21.15	19.91	19.98	33
	RB1#8	21.09	21.13	19.93		
	RB1#14	21.04	21.09	19.95		
	RB6#0	20.01	19.55	18.75		
	RB6#9	20	19.65	18.83		
5MHz QPSK	RB1#0	21.59	21.19	21.16	20.53	33
	RB1#13	21.73	21.31	21.29		
	RB1#24	21.52	21.15	21.12		
	RB15#0	20.61	20.23	20.31		
	RB15#10	20.6	20.21	20.24		
	RB25#0	20.56	20.2	20.23		
5MHz 16QAM	RB1#0	20.41	20.57	20.24	19.41	33
	RB1#13	20.53	20.61	20.3		
	RB1#24	20.41	20.48	20.24		
	RB15#0	19.66	19.3	19.38		
	RB15#10	19.67	19.26	19.34		
	RB25#0	19.66	19.25	19.31		
10MHz QPSK	RB1#0	21.63	21.17	20.94	20.81	33
	RB1#25	22.01	21.28	21.11		
	RB1#49	21.59	21.08	20.93		

	RB25#0	20.82	20.1	20.06		
	RB25#25	20.84	20.19	19.98		
	RB50#0	21.01	20.1	20.03		
10MHz 16QAM	RB1#0	21.26	20.27	19.99	20.3	33
	RB1#25	21.5	20.43	20.09		
	RB1#49	21.22	20.2	19.95		
	RB25#0	19.91	19.16	19.21		
	RB25#25	20	19.23	19.14		
	RB50#0	20.13	19.15	19.11		
		RB1#0	22.19	21.28		
15MHz QPSK	RB1#38	22.18	20.81	20.72		
	RB1#74	22.01	20.71	20.61		
	RB36#0	21.27	19.97	19.8		
	RB36#39	21.16	20.03	19.75		
	RB75#0	21.21	19.81	19.75		
15MHz 16QAM	RB1#0	21.49	20.49	19.9	20.29	33
	RB1#38	21.37	20.47	19.91		
	RB1#74	21.32	20.29	19.82		
	RB36#0	20.23	18.83	18.85		
	RB36#39	20.09	18.89	18.81		
	RB75#0	20.17	18.86	18.87		
20MHz QPSK	RB1#0	21.58	20.56	20.64	20.54	33
	RB1#50	21.74	20.79	20.97		
	RB1#99	21.3	20.34	20.51		
	RB50#0	20.68	19.66	20		
	RB50#50	20.44	19.58	19.89		
	RB100#0	20.61	19.55	19.98		
20MHz 16QAM	RB1#0	20.78	19.76	20.22	19.81	33
	RB1#50	21.01	19.98	20.56		
	RB1#99	20.6	19.51	20.15		
	RB50#0	19.7	18.74	19.13		
	RB50#50	19.46	18.62	18.94		
	RB100#0	19.63	18.64	19.01		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	10.19	8.97	9.36	13
	RB100#0	6.41	6.44	6.47	13
20MHz 16QAM	RB1#0	9.74	9.74	9.26	13
	RB100#0	7.24	7.24	7.24	13
				Result:	Pass

FCC §2.1049, §24.238: Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.098	1.104	1.296	1.296	1.32
1.4MHz 16QAM	1.104	1.104	1.092	1.296	1.326	1.296
3MHz QPSK	2.687	2.687	2.687	2.892	2.88	2.868
3MHz 16QAM	2.687	2.687	2.676	2.868	2.892	2.892
5MHz QPSK	4.52	4.52	4.52	4.94	4.94	4.9
5MHz 16QAM	4.5	4.52	4.52	4.92	4.96	4.96
10MHz QPSK	8.96	8.96	8.96	9.64	9.52	9.64
10MHz 16QAM	8.96	8.96	8.96	9.56	9.56	9.56
15MHz QPSK	13.5	13.5	13.5	14.7	14.88	14.88
15MHz 16QAM	13.5	13.5	13.5	14.58	14.7	14.64
20MHz QPSK	18	17.92	17.92	19.28	19.36	19.28
20MHz 16QAM	18	18	17.92	19.2	19.36	19.52

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.949	1850.000	1908.966	1910.000
	-20	3.8	1850.942	1850.000	1908.976	1910.000
	-10	3.8	1850.944	1850.000	1908.971	1910.000
	0	3.8	1850.933	1850.000	1908.981	1910.000
	10	3.8	1850.942	1850.000	1908.973	1910.000
	20	3.8	1850.960	1850.000	1908.960	1910.000
	30	3.8	1850.959	1850.000	1908.977	1910.000
	40	3.8	1850.937	1850.000	1908.976	1910.000
Frequency Stability vs. Voltage	20	3.65	1850.943	1850.000	1908.987	1910.000
	20	4.35	1850.932	1850.000	1908.963	1910.000
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.936	1850.000	1908.968	1910.000
	-20	3.8	1850.932	1850.000	1908.984	1910.000
	-10	3.8	1850.932	1850.000	1908.980	1910.000
	0	3.8	1850.942	1850.000	1908.965	1910.000
	10	3.8	1850.957	1850.000	1908.974	1910.000
	20	3.8	1850.960	1850.000	1908.960	1910.000
	30	3.8	1850.941	1850.000	1908.988	1910.000
	40	3.8	1850.931	1850.000	1908.965	1910.000
	50	3.8	1850.942	1850.000	1908.977	1910.000
Frequency Stability vs. Voltage	20	3.65	1850.955	1850.000	1908.978	1910.000
	20	4.35	1850.950	1850.000	1908.984	1910.000
					Result:	Pass

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.57 dB VBW 100 kHz SWT 15 ms OBSW 1.296000000 MHz Marker 1 [T1] 1.850000000 MHz -15.14 dBm Temp 1 [T1 OBSW] 1.850050000 GHz Temp 2 [T1 OBSW] 1.850140000 GHz Temp 3 [T1 OBSW] 1.851250000 GHz Center 1.8507 GHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 19:11:38 </p>	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.45 dB VBW 100 kHz SWT 15 ms OBSW 1.296000000 MHz Marker 1 [T1] 1.850040000 GHz -11.71 dBm Temp 1 [T1 OBSW] 1.850040000 GHz Temp 2 [T1 OBSW] 1.850140000 GHz Temp 3 [T1 OBSW] 1.851250000 GHz Center 1.8507 GHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 19:11:54 </p>
Middle	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.86 dB VBW 100 kHz SWT 15 ms OBSW 1.296000000 MHz Marker 1 [T1] 1.879350000 GHz -11.56 dBm Temp 1 [T1 OBSW] 1.879350000 GHz Temp 2 [T1 OBSW] 1.879440000 GHz Temp 3 [T1 OBSW] 1.880540000 GHz Center 1.88 GHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 19:12:10 </p>	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.68 dB VBW 100 kHz SWT 15 ms OBSW 1.326000000 MHz Marker 1 [T1] 1.879330000 GHz -11.24 dBm Temp 1 [T1 OBSW] 1.879330000 GHz Temp 2 [T1 OBSW] 1.879440000 GHz Temp 3 [T1 OBSW] 1.880550000 GHz Center 1.88 GHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 19:12:25 </p>
Highest	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.72 dB VBW 100 kHz SWT 15 ms OBSW 1.320000000 MHz Marker 1 [T1] 1.908840000 GHz -11.29 dBm Temp 1 [T1 OBSW] 1.908840000 GHz Temp 2 [T1 OBSW] 1.908740000 GHz Temp 3 [T1 OBSW] 1.909850000 GHz Center 1.9093 GHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 19:12:44 </p>	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.16 dB VBW 100 kHz SWT 15 ms OBSW 1.296000000 MHz Marker 1 [T1] 1.908650000 GHz -11.44 dBm Temp 1 [T1 OBSW] 1.908650000 GHz Temp 2 [T1 OBSW] 1.908750000 GHz Temp 3 [T1 OBSW] 1.909840000 GHz Center 1.9093 GHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 19:13:02 </p>

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 0.99 dB *VSW 100 kHz *SWT 30 ms 2.892000000 MHz</p> <p>OSW 2.888000000 MHz Marker 1 [T1] -11.02 dBm 1.850040000 GHz Temp 1 [T1 OSW] 1.850150000 GHz Temp 2 [T1 OSW] 1.852840000 GHz</p> <p>D1 12.1 dBm D2 -13.9 dBm</p> <p>Center 1.8515 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 21.JUN.2023 19:39:43</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 0.28 dB *VSW 100 kHz *SWT 30 ms 2.668000000 MHz</p> <p>OSW 2.668000000 MHz Marker 1 [T1] -11.16 dBm 1.850060000 GHz Temp 1 [T1 OSW] 1.850150000 GHz Temp 2 [T1 OSW] 1.852840000 GHz</p> <p>D1 12.3 dBm D2 -13.6 dBm</p> <p>Center 1.8515 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 21.JUN.2023 19:39:59</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.13 dB *VSW 100 kHz *SWT 30 ms 2.890000000 MHz</p> <p>OSW 2.888000000 MHz Marker 1 [T1] -11.84 dBm 1.878560000 GHz Temp 1 [T1 OSW] 1.878650000 GHz Temp 2 [T1 OSW] 1.881340000 GHz</p> <p>D1 12.5 dBm D2 -13.4 dBm</p> <p>Center 1.88 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 21.JUN.2023 19:40:15</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 0.93 dB *VSW 100 kHz *SWT 30 ms 2.892000000 MHz</p> <p>OSW 2.668000000 MHz Marker 1 [T1] -11.73 dBm 1.878560000 GHz Temp 1 [T1 OSW] 1.878650000 GHz Temp 2 [T1 OSW] 1.881340000 GHz</p> <p>D1 10.7 dBm D2 -15.2 dBm</p> <p>Center 1.88 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 21.JUN.2023 19:40:30</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 1.07 dB *VSW 100 kHz *SWT 30 ms 2.869000000 MHz</p> <p>OSW 2.668000000 MHz Marker 1 [T1] -11.03 dBm 1.907060000 GHz Temp 1 [T1 OSW] 1.907150000 GHz Temp 2 [T1 OSW] 1.909840000 GHz</p> <p>D1 11.6 dBm D2 -14.3 dBm</p> <p>Center 1.9085 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 21.JUN.2023 19:40:49</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 0.59 dB *VSW 100 kHz *SWT 30 ms 2.892000000 MHz</p> <p>OSW 2.672000000 MHz Marker 1 [T1] -11.30 dBm 1.907040000 GHz Temp 1 [T1 OSW] 1.907150000 GHz Temp 2 [T1 OSW] 1.909830000 GHz</p> <p>D1 10.8 dBm D2 -15.1 dBm</p> <p>Center 1.9085 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 21.JUN.2023 19:41:04</p>

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm Offset 14.5 dB Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.43 dB *VBW 300 kHz *VMW 300 kHz *SWT 5 ms 4.940000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -11.76 dBm D1 15.01 dBm Temp 1 [T1 OSW] 1.850020000 GHz Temp 2 [T1 OSW] 1.850240000 GHz Temp 3 [T1 OSW] 1.854760000 GHz Center 1.8525 GHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 19:54:17</p>	<p>Ref 30 dBm Offset 14.5 dB Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.75 dB *VBW 300 kHz *VMW 300 kHz *SWT 5 ms 4.920000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -11.73 dBm D1 14.74 dBm Temp 1 [T1 OSW] 1.850020000 GHz Temp 2 [T1 OSW] 1.850240000 GHz Temp 3 [T1 OSW] 1.854760000 GHz Center 1.8525 GHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 19:54:32</p>
Middle	<p>Ref 30 dBm Offset 14.5 dB Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.48 dB *VBW 300 kHz *VMW 300 kHz *SWT 5 ms 4.940000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -11.19 dBm D1 13.54 dBm Temp 1 [T1 OSW] 1.877520000 GHz Temp 2 [T1 OSW] 1.882260000 GHz Center 1.88 GHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 19:54:48</p>	<p>Ref 30 dBm Offset 14.5 dB Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.35 dB *VBW 300 kHz *VMW 300 kHz *SWT 5 ms 4.960000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -11.70 dBm D1 12.7 dBm Temp 1 [T1 OSW] 1.877520000 GHz Temp 2 [T1 OSW] 1.882260000 GHz Center 1.88 GHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 19:55:05</p>
Highest	<p>Ref 30 dBm Offset 14.5 dB Att 25 dB *RBW 100 kHz Delta 1 [T1] 3.11 dB *VBW 300 kHz *VMW 300 kHz *SWT 5 ms 4.900000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -11.27 dBm D1 14.69 dBm Temp 1 [T1 OSW] 1.905040000 GHz Temp 2 [T1 OSW] 1.905240000 GHz Temp 3 [T1 OSW] 1.909760000 GHz Center 1.9075 GHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 19:55:24</p>	<p>Ref 30 dBm Offset 14.5 dB Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.81 dB *VBW 300 kHz *VMW 300 kHz *SWT 5 ms 4.960000000 MHz OSW 4.520000000 MHz Marker 1 [T1] -11.65 dBm D1 13.1 dBm Temp 1 [T1 OSW] 1.905020000 GHz Temp 2 [T1 OSW] 1.905240000 GHz Temp 3 [T1 OSW] 1.909760000 GHz Center 1.9075 GHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 19:55:41</p>

Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.57 dB *VBW 300 kHz 9.64000000 MHz 30 Offset 14.5 dB Marker 1 [T1] 0.57 dB -12.44 dBm 1.85032000 GHz 1.85052000 GHz 1.85948000 GHz Center 1.855 GHz 2 MHz/ Span 20 MHz</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -1.41 dB *VBW 300 kHz 9.56000000 MHz 30 Offset 14.5 dB Marker 1 [T1] -1.41 dB -12.2 dBm 1.85034000 GHz 1.85052000 GHz 1.85948000 GHz Center 1.855 GHz 2 MHz/ Span 20 MHz</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -1.29 dB *VBW 300 kHz 9.52000000 MHz 30 Offset 14.5 dB Marker 1 [T1] -1.29 dB -11.8 dBm 1.87524000 GHz 1.87552000 GHz 1.88448000 GHz Center 1.88 GHz 2 MHz/ Span 20 MHz</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -1.34 dB *VBW 300 kHz 9.56000000 MHz 30 Offset 14.5 dB Marker 1 [T1] -1.34 dB -10.7 dBm 1.87524000 GHz 1.87552000 GHz 1.88448000 GHz Center 1.88 GHz 2 MHz/ Span 20 MHz</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -1.38 dB *VBW 300 kHz 9.64000000 MHz 30 Offset 14.5 dB Marker 1 [T1] -1.38 dB -11.3 dBm 1.90020000 GHz 1.90052000 GHz 1.90948000 GHz Center 1.905 GHz 2 MHz/ Span 20 MHz</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.52 dB *VBW 300 kHz 9.56000000 MHz 30 Offset 14.5 dB Marker 1 [T1] 0.52 dB -11.2 dBm 1.90024000 GHz 1.90052000 GHz 1.90948000 GHz Center 1.905 GHz 2 MHz/ Span 20 MHz</p>

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Occupied Bandwidth


Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

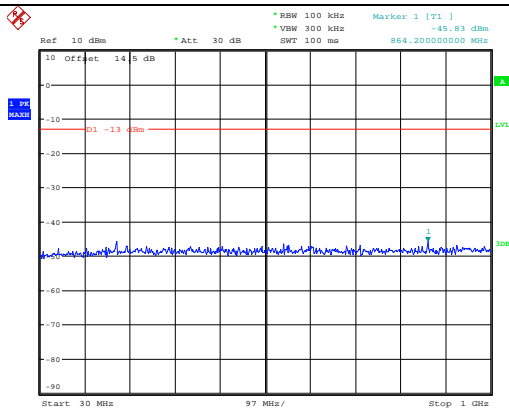


Date: 22.JUN.2023 00:51:38

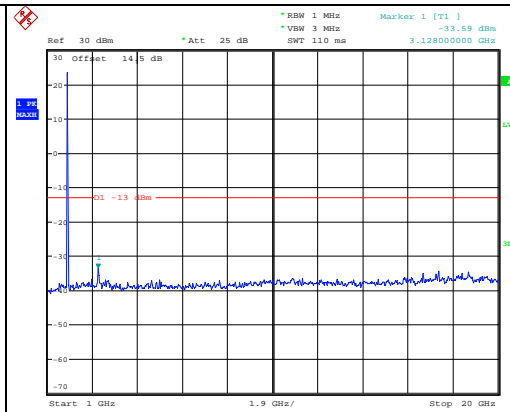


Date: 22.JUN.2023 00:51:49

Middle

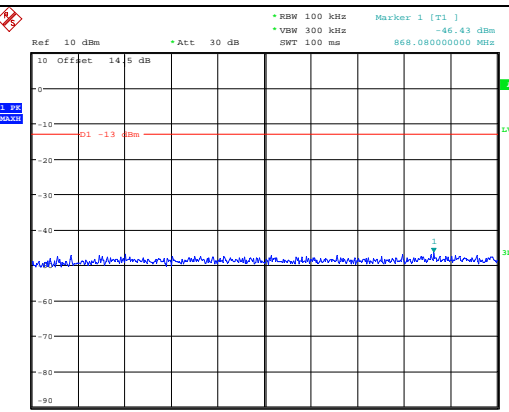


Date: 22.JUN.2023 00:52:06

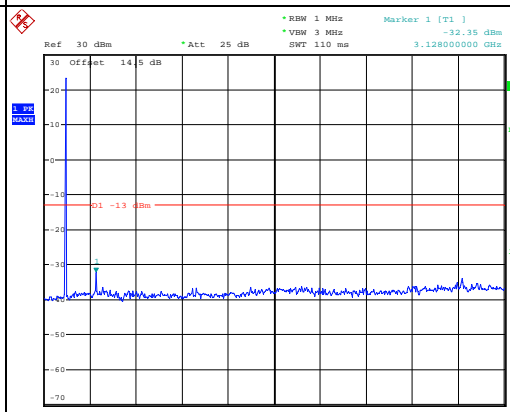


Date: 22.JUN.2023 00:52:17

Highest

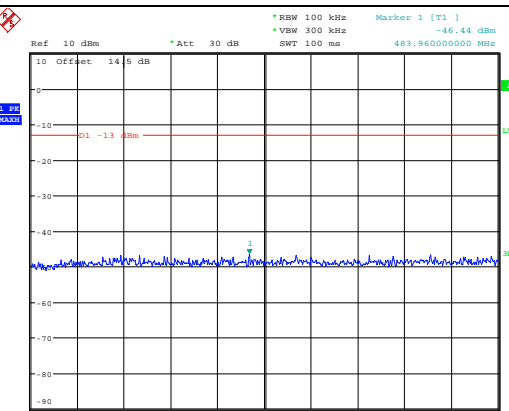

Date: 22.JUN.2023 00:52:31

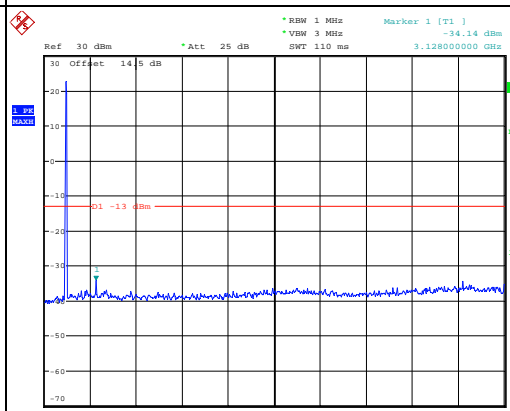

Date: 22.JUN.2023 00:52:42

Spurious Emissions at Antenna Terminal

Channel	3MHz Bandwidth QPSK	
Lowest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.23 dBm VSW 300 kHz SWT 100 ms 235.64000000 MHz</p> <p>Date: 22.JUN.2023 00:54:19</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -32.55 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 22.JUN.2023 00:54:30</p>
Middle	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.11 dBm VSW 300 kHz SWT 100 ms 932.100000000 MHz</p> <p>Date: 22.JUN.2023 00:54:44</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -32.35 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 22.JUN.2023 00:54:55</p>
Highest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.18 dBm VSW 300 kHz SWT 100 ms 881.660000000 MHz</p> <p>Date: 22.JUN.2023 00:55:09</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -32.15 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 22.JUN.2023 00:55:20</p>

Spurious Emissions at Antenna Terminal

Channel	5MHz Bandwidth QPSK	
Lowest	<p>Date: 24.JUN.2023 09:30:27</p>	<p>Date: 24.JUN.2023 09:30:39</p>
Middle	<p>Date: 24.JUN.2023 09:30:53</p>	<p>Date: 24.JUN.2023 09:31:04</p>
Highest	<p>Date: 24.JUN.2023 09:31:21</p>	<p>Date: 24.JUN.2023 09:31:32</p>

Spurious Emissions at Antenna Terminal

Channel	10MHz Bandwidth QPSK	
Lowest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.51 dBm VSW 300 kHz SWT 100 ms 949.56800000 MHz</p> <p>Date: 24.JUN.2023 09:44:02</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -34.99 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 09:44:13</p>
Middle	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.82 dBm VSW 300 kHz SWT 100 ms 382.08000000 MHz</p> <p>Date: 24.JUN.2023 09:44:27</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -33.16 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 09:44:38</p>
Highest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -45.95 dBm VSW 300 kHz SWT 100 ms 932.10000000 MHz</p> <p>Date: 24.JUN.2023 09:44:55</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -34.97 dBm VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 09:45:06</p>

Spurious Emissions at Antenna Terminal

Channel	15MHz Bandwidth QPSK	
Lowest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.91 dBm *VSW 300 kHz *SWT 100 ms 889.420000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 09:45:44</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -34.73 dBm *VSW 3 MHz *SWT 110 ms 3.128000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 09:45:55</p>
Middle	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.72 dBm *VSW 300 kHz *SWT 100 ms 260.860000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 09:46:09</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -34.14 dBm *VSW 3 MHz *SWT 110 ms 3.128000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 09:46:20</p>
Highest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.81 dBm *VSW 300 kHz *SWT 100 ms 967.020000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 09:46:34</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -33.93 dBm *VSW 3 MHz *SWT 110 ms 3.128000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 09:46:45</p>

Spurious Emissions at Antenna Terminal

Channel	20MHz Bandwidth QPSK	
Lowest		
Middle		
Highest		

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 1.4MHz	<p>Date: 21.JUN.2023 23:07:01</p>	<p>Date: 21.JUN.2023 23:07:17</p>
QPSK 3MHz	<p>Date: 21.JUN.2023 23:08:06</p>	<p>Date: 21.JUN.2023 23:08:22</p>
QPSK 5MHz	<p>Date: 21.JUN.2023 23:09:17</p>	<p>Date: 21.JUN.2023 23:09:34</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 10MHz	<p>Date: 21.JUN.2023 23:10:30</p>	<p>Date: 21.JUN.2023 23:10:48</p>
QPSK 15MHz	<p>Date: 21.JUN.2023 23:22:18</p>	<p>Date: 21.JUN.2023 23:22:34</p>
QPSK 20MHz	<p>Date: 21.JUN.2023 23:23:43</p>	<p>Date: 21.JUN.2023 23:23:58</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 1.4MHz		
16QAM 3MHz		
16QAM 5MHz		

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 10MHz	<p>Date: 21.JUN.2023 23:10:39</p>	<p>Date: 21.JUN.2023 23:10:56</p>
16QAM 15MHz	<p>Date: 21.JUN.2023 23:22:26</p>	<p>Date: 21.JUN.2023 23:22:41</p>
16QAM 20MHz	<p>Date: 21.JUN.2023 23:23:50</p>	<p>Date: 21.JUN.2023 23:24:05</p>

4.7 Antenna Port Test Data and Results for LTE Band 4

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1732.5	1754.3
3MHz	1711.5	1732.5	1753.5
5MHz	1712.5	1732.5	1752.5
10MHz	1715	1732.5	1750
15MHz	1717.5	1732.5	1747.5
20MHz	1720	1732.5	1745

Test Data:

FCC§2.1046; § 27.50(d)(4)						
RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	21.94	21.76	22.26	21.26	30
	RB1#3	22.11	21.9	22.46		
	RB1#5	21.92	21.74	22.28		
	RB3#0	21.89	21.88	22.3		
	RB3#3	21.94	21.87	22.28		
	RB6#0	21.01	20.79	21.29		
1.4MHz 16QAM	RB1#0	21.02	20.9	21.2	20.22	30
	RB1#3	21.26	21.11	21.39		
	RB1#5	21.03	20.94	21.21		
	RB3#0	20.93	21	21.41		
	RB3#3	20.94	20.99	21.42		
	RB6#0	20.01	19.89	20.31		
3MHz QPSK	RB1#0	22.65	22.42	22.79	21.59	30
	RB1#8	22.6	22.41	22.75		
	RB1#14	22.56	22.34	22.74		
	RB6#0	21.65	21.38	21.72		
	RB6#9	21.63	21.42	21.67		
	RB15#0	21.66	21.51	21.7		
3MHz 16QAM	RB1#0	22.14	21.69	21.75	20.95	30
	RB1#8	22.15	21.63	21.67		
	RB1#14	22.12	21.66	21.66		
	RB6#0	20.69	20.5	20.66		
	RB6#9	20.63	20.59	20.6		
	RB15#0	20.72	20.56	20.72		
5MHz QPSK	RB1#0	22.68	21.72	22.13	21.56	30
	RB1#13	22.76	21.89	22.29		
	RB1#24	22.61	21.77	22.15		
	RB15#0	21.77	20.88	21.2		
	RB15#10	21.7	20.94	21.16		
	RB25#0	21.73	20.94	21.18		
5MHz 16QAM	RB1#0	21.96	20.89	20.96	20.87	30
	RB1#13	22.07	21.01	21.09		
	RB1#24	21.92	20.92	20.94		
	RB15#0	20.74	19.98	20.18		
	RB15#10	20.7	20.08	20.18		
	RB25#0	20.72	19.99	20.15		
10MHz QPSK	RB1#0	22.72	21.97	21.86	21.57	30
	RB1#25	22.77	21.98	22.08		
	RB1#49	22.59	21.72	21.89		

	RB25#0	21.76	20.96	20.81		
	RB25#25	21.67	21.08	20.81		
	RB50#0	21.66	21.04	20.82		
10MHz 16QAM	RB1#0	22.18	21.13	20.82	21.15	30
	RB1#25	22.35	21.26	20.97		
	RB1#49	22.19	21.06	20.82		
	RB25#0	20.73	20.04	19.86		
	RB25#25	20.7	20.18	19.92		
	RB50#0	20.71	20.09	19.91		
15MHz QPSK	RB1#0	22.66	21.59	22.29	21.46	30
	RB1#38	22.52	21.63	22.44		
	RB1#74	22.18	21.5	22.32		
	RB36#0	21.5	20.59	21.42		
	RB36#39	21.23	20.72	21.5		
	RB75#0	21.48	20.69	21.47		
15MHz 16QAM	RB1#0	21.62	21.25	21.46	20.71	30
	RB1#38	21.91	21.36	21.51		
	RB1#74	21.91	21.1	21.42		
	RB36#0	20.56	19.67	20.4		
	RB36#39	20.49	19.83	20.49		
	RB75#0	20.58	19.81	20.49		
20MHz QPSK	RB1#0	22.34	22.05	22.11	21.46	30
	RB1#50	22.44	22.48	22.66		
	RB1#99	22.18	22.14	22.27		
	RB50#0	21.71	21.36	21.37		
	RB50#50	21.51	21.43	21.61		
	RB100#0	21.67	21.32	21.53		
20MHz 16QAM	RB1#0	21.65	21.29	21.76	21.01	30
	RB1#50	21.97	21.51	22.21		
	RB1#99	21.5	21.19	21.74		
	RB50#0	20.6	20.32	20.35		
	RB50#50	20.44	20.45	20.55		
	RB100#0	20.58	20.4	20.46		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	9.9	10.58	10.19	13
	RB100#0	6.44	6.57	6.54	13
20MHz 16QAM	RB1#0	10.45	11.12	10.32	13
	RB100#0	7.24	7.34	7.12	13
				Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.098	1.11	1.104	1.308	1.314	1.314
1.4MHz 16QAM	1.104	1.104	1.11	1.29	1.308	1.32
3MHz QPSK	2.687	2.7	2.687	2.892	2.88	2.88
3MHz 16QAM	2.687	2.7	2.687	2.892	2.892	2.88
5MHz QPSK	4.5	4.54	4.5	4.92	5.1	4.94
5MHz 16QAM	4.5	4.54	4.52	4.9	5.04	4.96
10MHz QPSK	9	9	8.96	9.64	9.72	9.6
10MHz 16QAM	8.96	9	8.96	9.56	9.6	9.56
15MHz QPSK	13.56	13.56	13.5	14.88	18.42	15
15MHz 16QAM	13.5	13.56	13.5	14.76	19.08	14.76
20MHz QPSK	18	18.08	18	19.28	24.08	19.44
20MHz 16QAM	18.08	18.08	17.92	19.28	25.92	19.44

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.953	1710.00	1754.048	1755
	-20	3.8	1710.947	1710.00	1754.042	1755
	-10	3.8	1710.935	1710.00	1754.061	1755
	0	3.8	1710.955	1710.00	1754.058	1755
	10	3.8	1710.944	1710.00	1754.064	1755
	20	3.8	1710.960	1710.00	1754.040	1755
	30	3.8	1710.941	1710.00	1754.048	1755
	40	3.8	1710.939	1710.00	1754.059	1755
	50	3.8	1710.941	1710.00	1754.050	1755
Frequency Stability vs. Voltage	20	3.65	1710.946	1710.00	1754.062	1755
	20	4.35	1710.940	1710.00	1754.049	1755
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.959	1710.00	1754.043	1755
	-20	3.8	1710.931	1710.00	1754.061	1755
	-10	3.8	1710.959	1710.00	1754.041	1755
	0	3.8	1710.955	1710.00	1754.040	1755
	10	3.8	1710.936	1710.00	1754.054	1755
	20	3.8	1710.960	1710.00	1754.040	1755
	30	3.8	1710.945	1710.00	1754.049	1755
	40	3.8	1710.951	1710.00	1754.052	1755
	50	3.8	1710.939	1710.00	1754.064	1755
Frequency Stability vs. Voltage	20	3.65	1710.934	1710.00	1754.064	1755
	20	4.35	1710.935	1710.00	1754.059	1755
					Result:	Pass

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	<p> *RBW 30 kHz Delta 1 [T1] 0.59 dB *VBW 100 kHz *Att 25 dB *SWT 15 ms Ref 30 dBm Center 1.7107 GHz Span 3 MHz Date: 21.JUN.2023 20:09:30 </p>	<p> *RBW 30 kHz Delta 1 [T1] -0.04 dB *VBW 100 kHz *Att 25 dB *SWT 15 ms Ref 30 dBm Center 1.7107 GHz Span 3 MHz Date: 21.JUN.2023 20:09:47 </p>
Middle	<p> *RBW 30 kHz Delta 1 [T1] 0.73 dB *VBW 100 kHz *Att 25 dB *SWT 15 ms Ref 30 dBm Center 1.7325 GHz Span 3 MHz Date: 21.JUN.2023 20:10:06 </p>	<p> *RBW 30 kHz Delta 1 [T1] 0.13 dB *VBW 100 kHz *Att 25 dB *SWT 15 ms Ref 30 dBm Center 1.7325 GHz Span 3 MHz Date: 21.JUN.2023 20:10:24 </p>
Highest	<p> *RBW 30 kHz Delta 1 [T1] -0.16 dB *VBW 100 kHz *Att 25 dB *SWT 15 ms Ref 30 dBm Center 1.7543 GHz Span 3 MHz Date: 21.JUN.2023 20:10:43 </p>	<p> *RBW 30 kHz Delta 1 [T1] 0.45 dB *VBW 100 kHz *Att 25 dB *SWT 15 ms Ref 30 dBm Center 1.7543 GHz Span 3 MHz Date: 21.JUN.2023 20:11:10 </p>

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	<p>Date: 21.JUN.2023 20:24:04</p>	<p>Date: 21.JUN.2023 20:24:21</p>
Middle	<p>Date: 21.JUN.2023 20:24:43</p>	<p>Date: 21.JUN.2023 20:25:04</p>
Highest	<p>Date: 21.JUN.2023 20:25:23</p>	<p>Date: 21.JUN.2023 20:25:40</p>

Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Occupied Bandwidth


Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] *VSW 1 MHz *OSW 16.08000000 MHz SWT 2.5 ms 0.59 dB 19.280000000 MHz Marker 1 [T1] OSW 16.08000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] Temp 2 [T1 OSW] Center 1.72 GHz 4 MHz/ Span 40 MHz Date: 21.JUN.2023 20:39:33</p>	<p>Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] *VSW 1 MHz *OSW 16.08000000 MHz SWT 2.5 ms 1.66 dB 19.280000000 MHz Marker 1 [T1] OSW 16.08000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] Temp 2 [T1 OSW] Center 1.72 GHz 4 MHz/ Span 40 MHz Date: 21.JUN.2023 20:39:51</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] *VSW 1 MHz *OSW 16.08000000 MHz SWT 2.5 ms 1.67 dB 24.080000000 MHz Marker 1 [T1] OSW 16.08000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] Temp 2 [T1 OSW] Center 1.7325 GHz 4 MHz/ Span 40 MHz Date: 21.JUN.2023 20:40:10</p>	<p>Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] *VSW 1 MHz *OSW 16.08000000 MHz SWT 2.5 ms 1.67 dB 25.920000000 MHz Marker 1 [T1] OSW 16.08000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] Temp 2 [T1 OSW] Center 1.7325 GHz 4 MHz/ Span 40 MHz Date: 21.JUN.2023 20:40:31</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] *VSW 1 MHz *OSW 16.08000000 MHz SWT 2.5 ms 3.14 dB 19.440000000 MHz Marker 1 [T1] OSW 16.08000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] Temp 2 [T1 OSW] Center 1.745 GHz 4 MHz/ Span 40 MHz Date: 21.JUN.2023 20:40:52</p>	<p>Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] *VSW 1 MHz *OSW 16.08000000 MHz SWT 2.5 ms 0.85 dB 19.440000000 MHz Marker 1 [T1] OSW 16.08000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] Temp 2 [T1 OSW] Center 1.745 GHz 4 MHz/ Span 40 MHz Date: 21.JUN.2023 20:41:13</p>

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

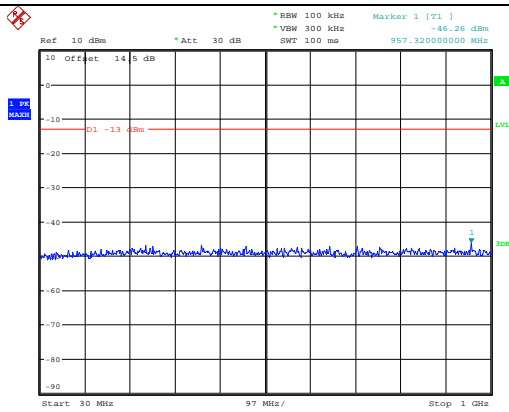


Date: 24.JUN.2023 09:58:48

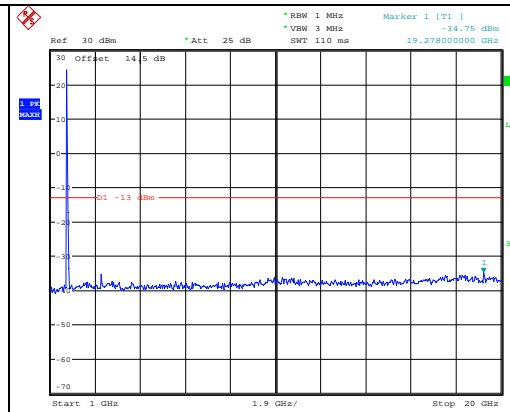


Date: 24.JUN.2023 09:59:00

Middle

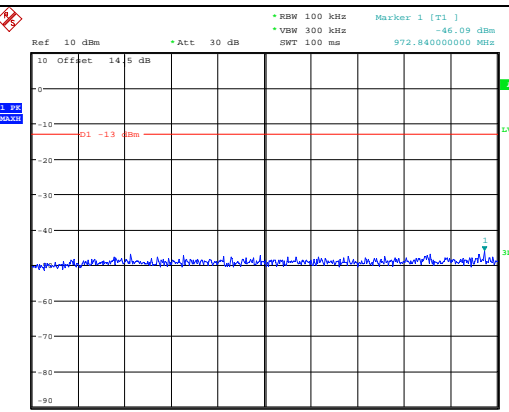


Date: 24.JUN.2023 09:59:13

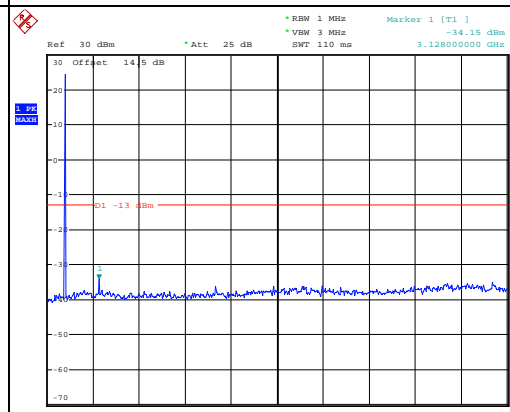


Date: 24.JUN.2023 09:59:25

Highest

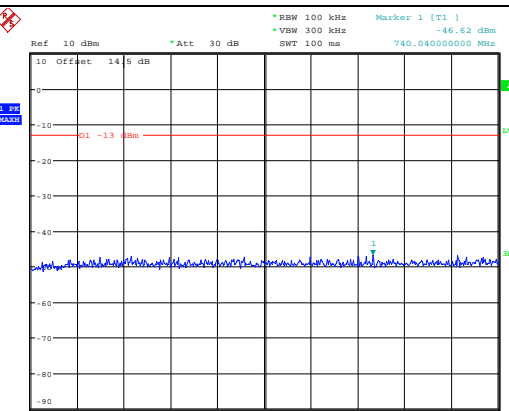

Date: 24.JUN.2023 09:59:38

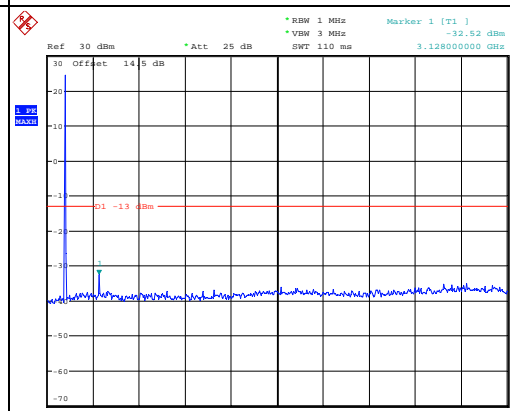

Date: 24.JUN.2023 09:59:50

Spurious Emissions at Antenna Terminal

Channel	3MHz Bandwidth QPSK	
Lowest	<p>Ref 10 dBm Att 30 dB *RBW 100 kHz Marker 1 [T1] -47.30 dBm *VMW 300 kHz -47.30 dBm *SWT 100 ms 355.92000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:00:29</p>	<p>Ref 30 dBm Att 25 dB *RBW 1 MHz Marker 1 [T1] -22.25 dBm *VMW 3 MHz -22.25 dBm *SWT 110 ms 1.760000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 10:00:40</p>
Middle	<p>Ref 10 dBm Att 30 dB *RBW 100 kHz Marker 1 [T1] -46.86 dBm *VMW 300 kHz -46.86 dBm *SWT 100 ms 895.24000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:00:54</p>	<p>Ref 30 dBm Att 25 dB *RBW 1 MHz Marker 1 [T1] -34.45 dBm *VMW 3 MHz -34.45 dBm *SWT 110 ms 3.128000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 10:01:05</p>
Highest	<p>Ref 10 dBm Att 30 dB *RBW 100 kHz Marker 1 [T1] -46.57 dBm *VMW 300 kHz -46.57 dBm *SWT 100 ms 1.000000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:01:19</p>	<p>Ref 30 dBm Att 25 dB *RBW 1 MHz Marker 1 [T1] -34.45 dBm *VMW 3 MHz -34.45 dBm *SWT 110 ms 3.128000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 10:01:30</p>

Spurious Emissions at Antenna Terminal

Channel	5MHz Bandwidth QPSK	
Lowest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.71 dBm *VSW 300 kHz SWT 100 ms 908.820000000 MHz</p> <p>Date: 24.JUN.2023 10:02:09</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -33.50 dBm *VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 10:02:20</p>
Middle	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.39 dBm *VSW 300 kHz SWT 100 ms 796.300000000 MHz</p> <p>Date: 24.JUN.2023 10:02:37</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -34.11 dBm *VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 10:02:49</p>
Highest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz Marker 1 [T1] -46.42 dBm *VSW 300 kHz SWT 100 ms 941.800000000 MHz</p> <p>Date: 24.JUN.2023 10:03:05</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz Marker 1 [T1] -32.95 dBm *VSW 3 MHz SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 10:03:17</p>

Spurious Emissions at Antenna Terminal

Channel	10MHz Bandwidth QPSK	
Lowest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 100 ms Marker 1 [T1] -46.21 dBm 326.82000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:04:04</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz VSW 3 MHz SWT 110 ms Marker 1 [T1] -34.43 dBm 3.128000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 10:04:15</p>
Middle	<p>Ref 10 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 100 ms Marker 1 [T1] -46.27 dBm 588.720000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:04:32</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz VSW 3 MHz SWT 110 ms Marker 1 [T1] -33.51 dBm 3.128000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 10:04:43</p>
Highest	<p>Ref 10 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 100 ms Marker 1 [T1] -46.26 dBm 588.580000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:05:00</p>	<p>Ref 30 dBm Att 25 dB RBW 1 MHz VSW 3 MHz SWT 110 ms Marker 1 [T1] -34.28 dBm 3.128000000 GHz</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 24.JUN.2023 10:05:11</p>

Spurious Emissions at Antenna Terminal

Channel	15MHz Bandwidth QPSK	
Lowest	<p>Ref 10 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] *VMW 300 kHz -47.34 dBm SWT 100 ms 664.38000000 MHz</p> <p>Date: 24.JUN.2023 10:05:58</p>	<p>Ref 30 dBm *Att 25 dB *RBW 1 MHz Marker 1 [T1] *VMW 3 MHz -34.25 dBm SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 10:06:09</p>
Middle	<p>Ref 10 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] *VMW 300 kHz -46.77 dBm SWT 100 ms 414.120000000 MHz</p> <p>Date: 24.JUN.2023 10:06:23</p>	<p>Ref 30 dBm *Att 25 dB *RBW 1 MHz Marker 1 [T1] *VMW 3 MHz -34.68 dBm SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 10:06:34</p>
Highest	<p>Ref 10 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] *VMW 300 kHz -46.97 dBm SWT 100 ms 501.420000000 MHz</p> <p>Date: 24.JUN.2023 10:06:51</p>	<p>Ref 30 dBm *Att 25 dB *RBW 1 MHz Marker 1 [T1] *VMW 3 MHz -34.56 dBm SWT 110 ms 3.128000000 GHz</p> <p>Date: 24.JUN.2023 10:07:02</p>

Spurious Emissions at Antenna Terminal

Channel	20MHz Bandwidth QPSK	
Lowest		
Middle		
Highest		

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 1.4MHz		
QPSK 3MHz		
QPSK 5MHz		

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 10MHz	<p>Ref 30 dBm Att 25 dB RBW 100 kHz Marker 1 [T1] -30.68 dBm VSW 1 MHz SWT 35 ms 1.709960000 GHz</p> <p>Center: 1.71 GHz 2 MHz/ Span 20 MHz</p> <p>Date: 21.JUN.2023 23:39:17</p>	<p>Ref 30 dBm Att 25 dB RBW 100 kHz Marker 1 [T1] -31.67 dBm VSW 1 MHz SWT 35 ms 1.755040000 GHz</p> <p>Center: 1.755 GHz 2 MHz/ Span 20 MHz</p> <p>Date: 21.JUN.2023 23:39:35</p>
QPSK 15MHz	<p>Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -23.34 dBm VSW 1 MHz SWT 35 ms 1.709520000 GHz</p> <p>Center: 1.71 GHz 3 MHz/ Span 30 MHz</p> <p>Date: 21.JUN.2023 23:40:15</p>	<p>Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -25.85 dBm VSW 1 MHz SWT 35 ms 1.755000000 GHz</p> <p>Center: 1.755 GHz 3 MHz/ Span 30 MHz</p> <p>Date: 21.JUN.2023 23:40:30</p>
QPSK 20MHz	<p>Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -25.34 dBm VSW 1 MHz SWT 35 ms 1.709920000 GHz</p> <p>Center: 1.71 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 21.JUN.2023 23:41:10</p>	<p>Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -27.83 dBm VSW 1 MHz SWT 35 ms 1.755000000 GHz</p> <p>Center: 1.755 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 21.JUN.2023 23:41:25</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 1.4MHz	<p>Date: 21.JUN.2023 23:24:26</p>	<p>Date: 21.JUN.2023 23:24:41</p>
16QAM 3MHz	<p>Date: 21.JUN.2023 23:25:22</p>	<p>Date: 21.JUN.2023 23:25:37</p>
16QAM 5MHz	<p>Date: 21.JUN.2023 23:26:21</p>	<p>Date: 21.JUN.2023 23:26:37</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 10MHz		
16QAM 15MHz		
16QAM 20MHz		

4.8 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:

FCC§2.1046; § 22.913 (a)						
RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	24.03	23.05	23.23	20.38	38.45
	RB1#3	24.13	23.28	23.06		
	RB1#5	23.98	23.02	22.93		
	RB3#0	23.71	23.18	23.1		
	RB3#3	23.69	23.21	23.1		
	RB6#0	22.64	22.13	21.99		
1.4MHz 16QAM	RB1#0	22.75	22.16	22.01	19.16	38.45
	RB1#3	22.91	22.58	22.19		
	RB1#5	22.76	22.37	22		
	RB3#0	22.71	22.45	22.28		
	RB3#3	22.7	22.41	22.3		
	RB6#0	21.71	21.54	21.05		
3MHz QPSK	RB1#0	24.18	23.48	23.96	20.43	38.45
	RB1#8	24.14	23.35	23.69		
	RB1#14	24.12	23.15	23.44		
	RB6#0	23.08	22.37	22.84		
	RB6#9	23.11	22.36	22.51		
	RB15#0	23.18	22.47	22.96		
3MHz 16QAM	RB1#0	23.27	22.95	22.64	19.52	38.45
	RB1#8	23.19	22.88	22.63		
	RB1#14	23.18	22.79	22.63		
	RB6#0	22.05	21.51	21.79		
	RB6#9	22.06	21.45	21.83		
	RB15#0	22.22	21.54	21.89		
5MHz QPSK	RB1#0	24.13	23.58	23.3	20.42	38.45
	RB1#13	24.17	23.66	23.38		
	RB1#24	24.06	23.48	23.24		
	RB15#0	23.14	22.69	22.48		
	RB15#10	23.16	22.63	22.32		
	RB25#0	23.15	22.62	22.35		
5MHz 16QAM	RB1#0	23.4	22.68	22.24	19.75	38.45
	RB1#13	23.5	22.77	22.28		
	RB1#24	23.36	22.6	22.08		
	RB15#0	22.15	21.73	21.53		
	RB15#10	22.17	21.68	21.38		
	RB25#0	22.18	21.67	21.46		
10MHz QPSK	RB1#0	24.18	24.19	23.39	20.54	38.45
	RB1#25	24.28	24.29	23.49		
	RB1#49	24.17	24.03	23.31		

	RB25#0	23.22	23.31	22.45		
	RB25#25	23.23	23.21	22.27		
	RB50#0	23.28	23.26	22.38		
10MHz 16QAM	RB1#0	23.24	23.82	22.59	20.25	38.45
	RB1#25	23.38	24	22.69		
	RB1#49	23.19	23.7	22.3		
	RB25#0	22.37	22.39	21.54		
	RB25#25	22.38	22.3	21.33		
	RB50#0	22.33	22.31	21.43		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	6.03	5.03	6.25	13
	RB50#0	5.71	5.8	5.93	13
10MHz 16QAM	RB1#0	7.12	5.77	7.31	13
	RB50#0	6.6	6.7	6.7	13

Result:**Pass****FCC §2.1049, §22.905:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.11	1.098	1.092	1.314	1.296	1.302
1.4MHz 16QAM	1.092	1.098	1.11	1.29	1.284	1.308
3MHz QPSK	2.687	2.676	2.687	2.868	2.88	2.892
3MHz 16QAM	2.687	2.687	2.687	2.892	2.88	2.88
5MHz QPSK	4.52	4.52	4.52	4.96	4.92	4.92
5MHz 16QAM	4.5	4.52	4.52	4.92	4.92	4.96
10MHz QPSK	9	8.96	8.96	9.64	9.64	9.6
10MHz 16QAM	8.96	8.96	8.96	9.56	9.6	9.56

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal**Result:****Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

FCC §2.1051, §22.917(a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	34	0.041	2.5
	-20	3.8	2	0.002	2.5
	-10	3.8	1	0.001	2.5
	0	3.8	16	0.019	2.5
	10	3.8	5	0.006	2.5
	20	3.8	0	0.000	2.5
	30	3.8	14	0.017	2.5
	40	3.8	42	0.050	2.5
Frequency Stability vs. Voltage	20	3.65	24	0.029	2.5
	20	4.35	16	0.019	2.5
Result:					Pass

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature(°C)	Voltage(V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	27	0.032	2.5
	-20	3.8	13	0.016	2.5
	-10	3.8	39	0.047	2.5
	0	3.8	11	0.013	2.5
	10	3.8	5	0.006	2.5
	20	3.8	15	0.018	2.5
	30	3.8	8	0.010	2.5
	40	3.8	8	0.010	2.5
Frequency Stability vs. Voltage	20	3.65	19	0.023	2.5
	20	4.35	4	0.005	2.5
Result:					Pass

Test Plots(Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	<p style="font-size: small;">Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.14 dB *VBW 100 kHz *SWT 15 ms 1.314000000 MHz 30 Offset 14.5 dB D1 15.74 dBm 824.046000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] 824.148000000 MHz Temp 2 [T1 OSW] 825.258000000 MHz Center 824.7 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 20:41:40</p>	<p style="font-size: small;">Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.18 dB *VBW 100 kHz *SWT 15 ms 1.290000000 MHz 30 Offset 14.5 dB D1 15.07 dBm 824.058000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] 824.154000000 MHz Temp 2 [T1 OSW] 825.252000000 MHz Center 824.7 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 20:41:58</p>
Middle	<p style="font-size: small;">Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.17 dB *VBW 100 kHz *SWT 15 ms 1.098000000 MHz 30 Offset 14.5 dB D1 16.88 dBm 835.854000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] 836.948000000 MHz Temp 2 [T1 OSW] 837.046000000 MHz Center 836.5 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 20:42:14</p>	<p style="font-size: small;">Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.42 dB *VBW 100 kHz *SWT 15 ms 1.080000000 MHz 30 Offset 14.5 dB D1 16.37 dBm 835.858000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] 836.954000000 MHz Temp 2 [T1 OSW] 837.052000000 MHz Center 836.5 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 20:42:31</p>
Highest	<p style="font-size: small;">Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.77 dB *VBW 100 kHz *SWT 15 ms 1.302000000 MHz 30 Offset 14.5 dB D1 16.64 dBm 847.646000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] 847.754000000 MHz Temp 2 [T1 OSW] 848.846000000 MHz Center 848.3 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 20:42:50</p>	<p style="font-size: small;">Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.79 dB *VBW 100 kHz *SWT 15 ms 1.310000000 MHz 30 Offset 14.5 dB D1 16.87 dBm 847.646000000 MHz Marker 1 [T1] Temp 1 [T1 OSW] 847.742000000 MHz Temp 2 [T1 OSW] 848.852000000 MHz Center 848.3 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 20:43:08</p>

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 1.21 dB *VSW 100 kHz *SWT 30 ms 2.868000000 MHz OSW 2.868000000 MHz Marker 1 [T1] -11.53 dBm 824.060000000 MHz Temp 1 [T1 OSW] 824.156000000 MHz Temp 2 [T1 OSW] 826.844000000 MHz D1 14.91 dBm D2 -11.03 dBm Center 825.5 MHz 600 kHz/ Span 6 MHz Date: 21.JUN.2023 20:51:53</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 0.57 dB *VSW 100 kHz *SWT 30 ms 2.892000000 MHz OSW 2.892000000 MHz Marker 1 [T1] -11.61 dBm 824.060000000 MHz Temp 1 [T1 OSW] 824.156000000 MHz Temp 2 [T1 OSW] 826.844000000 MHz D1 12.27 dBm D2 -13.73 dBm Center 825.5 MHz 600 kHz/ Span 6 MHz Date: 21.JUN.2023 20:52:08</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.40 dB *VSW 100 kHz *SWT 30 ms 2.890000000 MHz OSW 2.870000000 MHz Marker 1 [T1] -11.88 dBm 825.060000000 MHz Temp 1 [T1 OSW] 826.168000000 MHz Temp 2 [T1 OSW] 827.844000000 MHz D1 13.63 dBm D2 -12.37 dBm Center 836.5 MHz 600 kHz/ Span 6 MHz Date: 21.JUN.2023 20:52:24</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 1.38 dB *VSW 100 kHz *SWT 30 ms 2.880000000 MHz OSW 2.880000000 MHz Marker 1 [T1] -11.68 dBm 825.060000000 MHz Temp 1 [T1 OSW] 826.156000000 MHz Temp 2 [T1 OSW] 827.844000000 MHz D1 12.63 dBm D2 -13.37 dBm Center 836.5 MHz 600 kHz/ Span 6 MHz Date: 21.JUN.2023 20:52:38</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.28 dB *VSW 100 kHz *SWT 30 ms 2.892000000 MHz OSW 2.888000000 MHz Marker 1 [T1] -11.41 dBm 826.048000000 MHz Temp 1 [T1 OSW] 826.156000000 MHz Temp 2 [T1 OSW] 826.844000000 MHz D1 13.28 dBm D2 -12.73 dBm Center 847.5 MHz 600 kHz/ Span 6 MHz Date: 21.JUN.2023 20:52:53</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -1.78 dB *VSW 100 kHz *SWT 30 ms 2.890000000 MHz OSW 2.890000000 MHz Marker 1 [T1] -11.68 dBm 826.060000000 MHz Temp 1 [T1 OSW] 826.156000000 MHz Temp 2 [T1 OSW] 826.844000000 MHz D1 13.33 dBm D2 -12.63 dBm Center 847.5 MHz 600 kHz/ Span 6 MHz Date: 21.JUN.2023 20:53:11</p>

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.76 dB *VSW 300 kHz SWT 5 ms 4.920000000 MHz OBSW 4.520000000 MHz Marker 1 [T1] -1.36 dBm 84.200000000 MHz 84.240000000 MHz Temp 1 [T1 OSW] -1.36 dBm Temp 2 [T1 OSW] -1.36 dBm Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 20:53:53</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.00 dB *VSW 300 kHz SWT 5 ms 4.920000000 MHz OBSW 4.520000000 MHz Marker 1 [T1] -1.47 dBm 84.200000000 MHz 84.240000000 MHz Temp 1 [T1 OSW] -1.47 dBm Temp 2 [T1 OSW] -1.47 dBm Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 20:54:11</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.36 dB *VSW 300 kHz SWT 5 ms 4.920000000 MHz OBSW 4.520000000 MHz Marker 1 [T1] -1.17 dBm 84.200000000 MHz 84.240000000 MHz Temp 1 [T1 OSW] -1.17 dBm Temp 2 [T1 OSW] -1.17 dBm Center 836.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 20:54:29</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 2.24 dB *VSW 300 kHz SWT 5 ms 4.920000000 MHz OBSW 4.520000000 MHz Marker 1 [T1] -1.73 dBm 84.200000000 MHz 84.240000000 MHz Temp 1 [T1 OSW] -1.73 dBm Temp 2 [T1 OSW] -1.73 dBm Center 836.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 20:54:47</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.82 dB *VSW 300 kHz SWT 5 ms 4.920000000 MHz OBSW 4.520000000 MHz Marker 1 [T1] -1.48 dBm 84.200000000 MHz 84.240000000 MHz Temp 1 [T1 OSW] -1.48 dBm Temp 2 [T1 OSW] -1.48 dBm Center 846.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 20:55:05</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 2.17 dB *VSW 300 kHz SWT 5 ms 4.960000000 MHz OBSW 4.520000000 MHz Marker 1 [T1] -1.45 dBm 84.200000000 MHz 84.240000000 MHz Temp 1 [T1 OSW] -1.45 dBm Temp 2 [T1 OSW] -1.45 dBm Center 846.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 20:55:20</p>

Occupied Bandwidth


Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	<p>Date: 21.JUN.2023 21:06:10</p>	<p>Date: 21.JUN.2023 21:06:28</p>
Middle	<p>Date: 21.JUN.2023 21:06:47</p>	<p>Date: 21.JUN.2023 21:07:04</p>
Highest	<p>Date: 21.JUN.2023 21:07:23</p>	<p>Date: 21.JUN.2023 21:07:40</p>

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

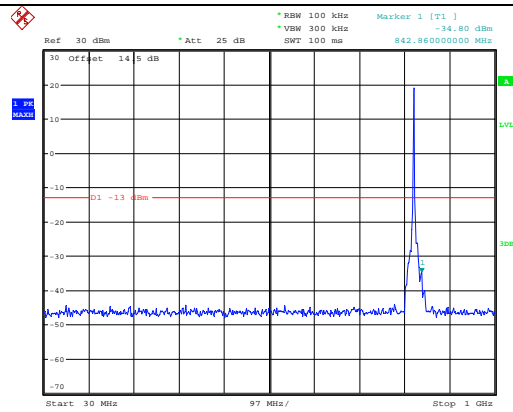


Date: 24.JUN.2023 10:09:07

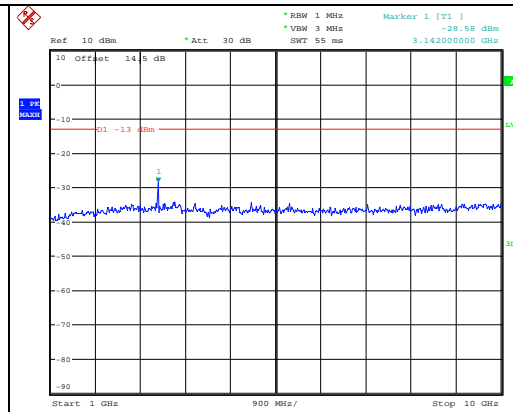


Date: 24.JUN.2023 10:09:18

Middle

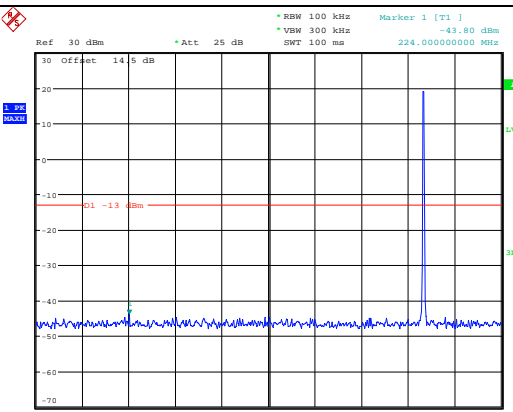


Date: 24.JUN.2023 10:09:32

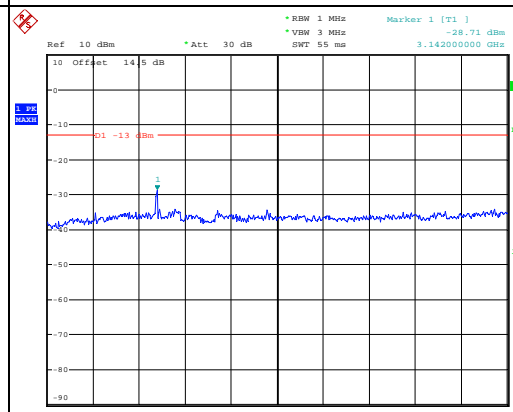


Date: 24.JUN.2023 10:09:43

Highest

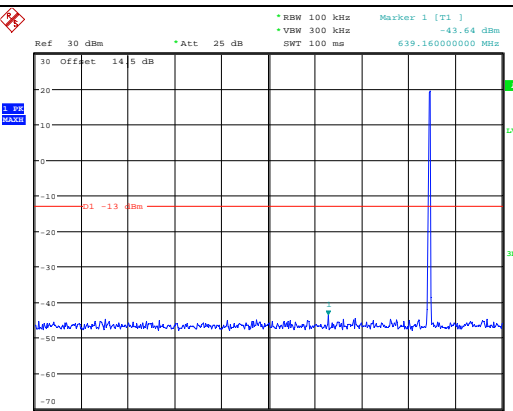

Date: 24.JUN.2023 10:09:56

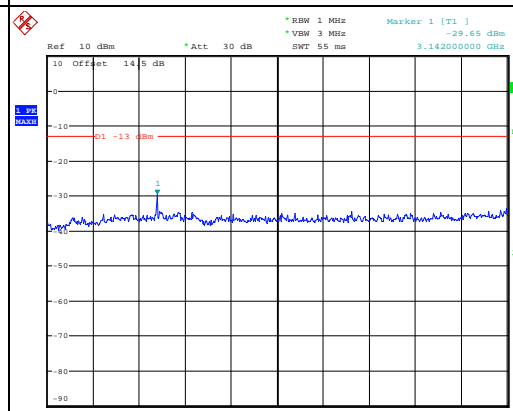


Date: 24.JUN.2023 10:10:08

Spurious Emissions at Antenna Terminal


Channel

3MHz Bandwidth QPSK

Lowest

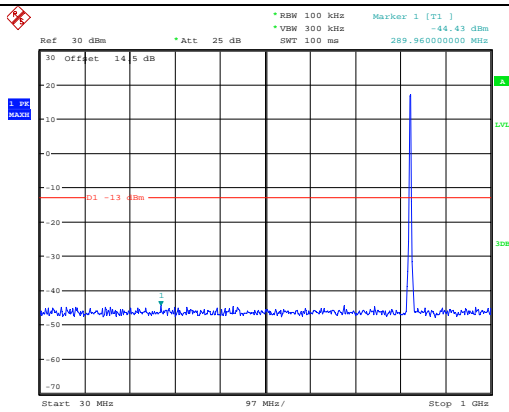


Date: 24.JUN.2023 10:10:58

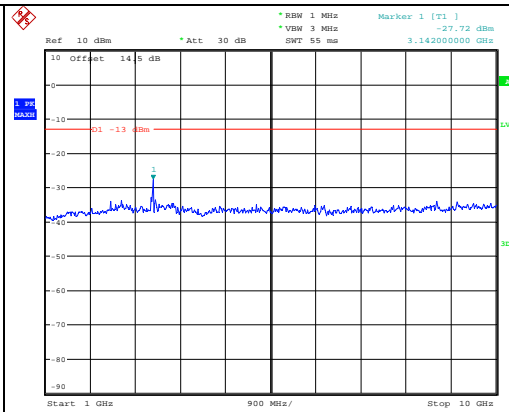


Date: 24.JUN.2023 10:11:09

Middle

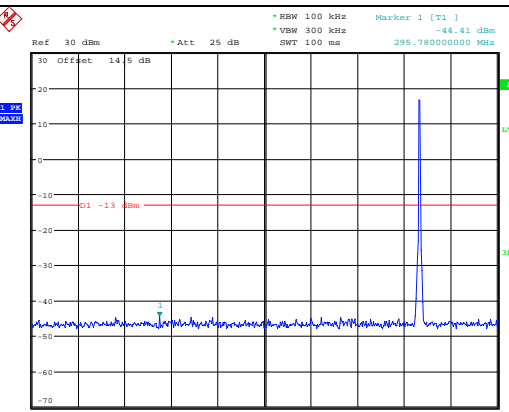


Date: 24.JUN.2023 10:11:23

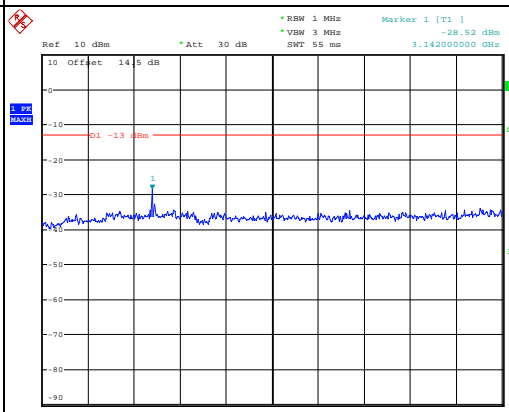


Date: 24.JUN.2023 10:11:34

Highest

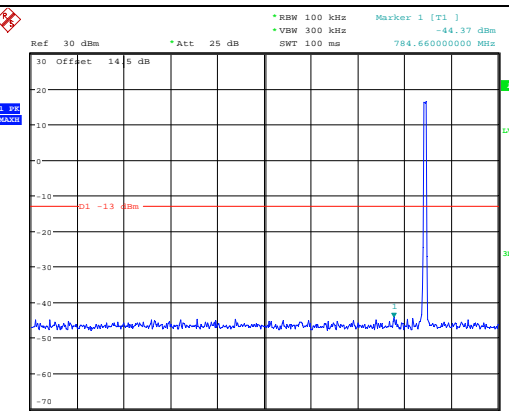

Date: 24.JUN.2023 10:11:47

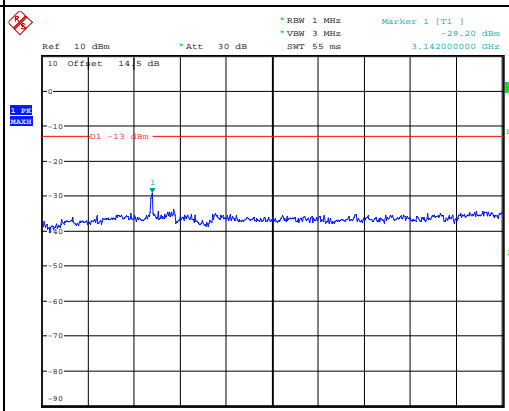


Date: 24.JUN.2023 10:11:59

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

Lowest

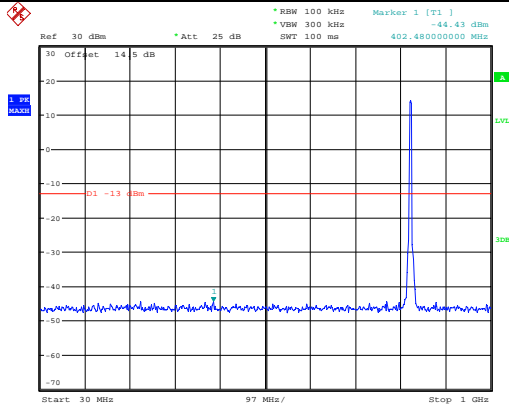


Date: 24.JUN.2023 10:12:49

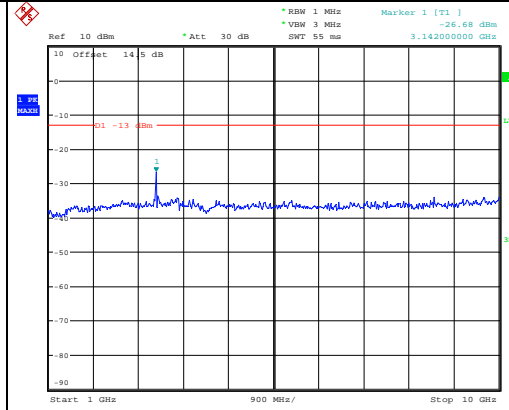


Date: 24.JUN.2023 10:13:00

Middle

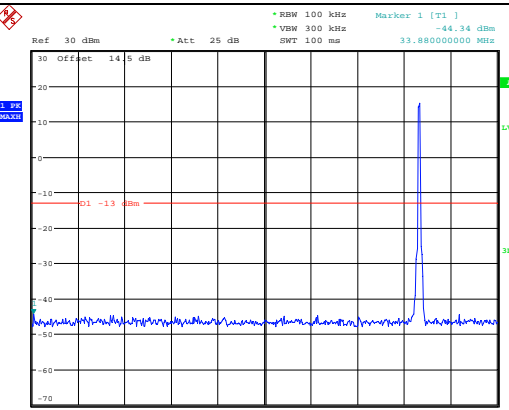


Date: 24.JUN.2023 10:13:14

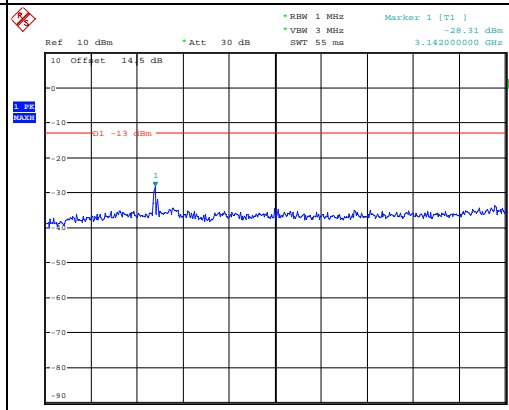


Date: 24.JUN.2023 10:13:25

Highest

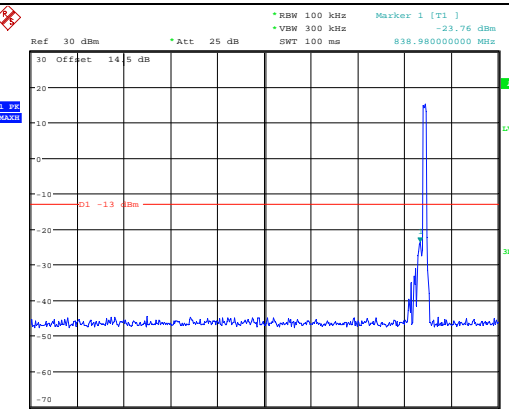

Date: 24.JUN.2023 10:13:42

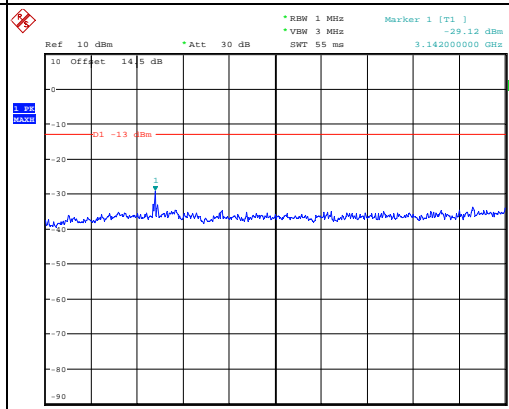

Date: 24.JUN.2023 10:13:53


Spurious Emissions at Antenna Terminal

Channel	10MHz Bandwidth QPSK	
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -43.90 dBm 961.20000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:14:51</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -28.95 dBm 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:15:02</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -44.57 dBm 728.40000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:15:16</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -28.50 dBm 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:15:27</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -44.80 dBm 313.24000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:15:41</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -27.69 dBm 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:15:52</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 1.4MHz		
QPSK 3MHz		
QPSK 5MHz		


Out of band emission, Band Edge

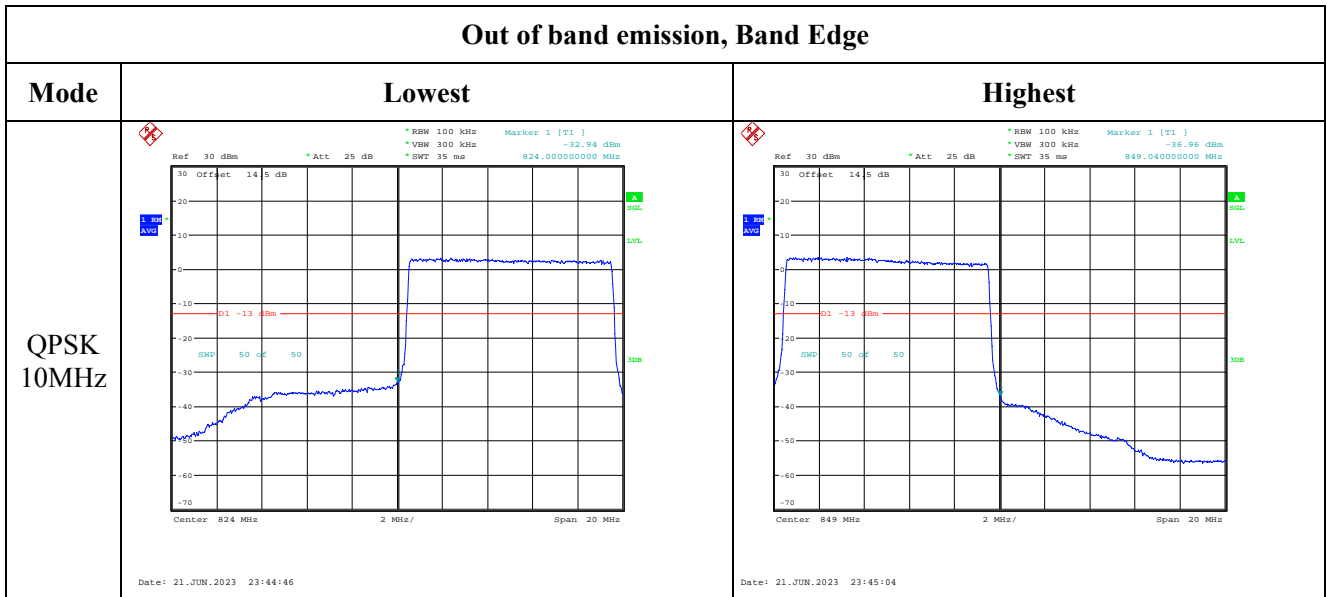

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 1.4MHz	<p>Date: 21.JUN.2023 23:41:52</p>	<p>Date: 21.JUN.2023 23:42:08</p>
16QAM 3MHz	<p>Date: 21.JUN.2023 23:42:48</p>	<p>Date: 21.JUN.2023 23:43:04</p>
16QAM 5MHz	<p>Date: 21.JUN.2023 23:43:49</p>	<p>Date: 21.JUN.2023 23:44:06</p>

Out of band emission, Band Edge

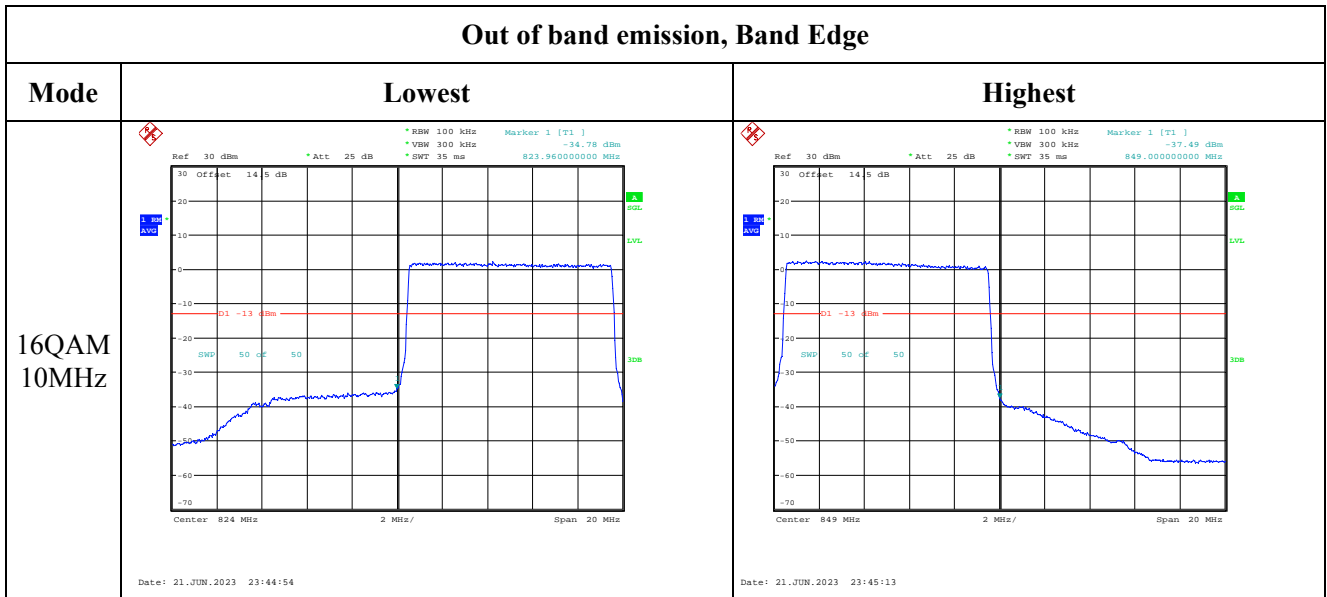

4.9 Antenna Port Test Data and Results for LTE Band 12

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	699.7	707.5	715.3
3MHz	700.5	707.5	714.5
5MHz	701.5	707.5	713.5
10MHz	704	707.5	711

Test Data:

FCC§2.1046; § 27.50(c) (10)						
RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	24.4	24.4	24.34	20.28	34.77
	RB1#3	24.51	24.53	24.51		
	RB1#5	24.38	24.44	24.23		
	RB3#0	24.42	24.43	24.43		
	RB3#3	24.28	24.39	24.37		
	RB6#0	23.4	23.42	23.48		
1.4MHz 16QAM	RB1#0	23.48	23.46	23.38	19.53	34.77
	RB1#3	23.66	23.57	23.61		
	RB1#5	23.56	23.31	23.41		
	RB3#0	23.44	23.58	23.73		
	RB3#3	23.5	23.78	23.71		
	RB6#0	22.51	22.42	22.55		
3MHz QPSK	RB1#0	24.45	24.5	24.41	20.25	34.77
	RB1#8	24.43	24.46	24.41		
	RB1#14	24.42	24.46	24.38		
	RB6#0	23.4	23.42	23.44		
	RB6#9	23.43	23.45	23.43		
	RB15#0	23.47	23.49	23.48		
3MHz 16QAM	RB1#0	24.12	23.69	23.6	19.87	34.77
	RB1#8	24.1	23.64	23.51		
	RB1#14	24.11	23.66	23.48		
	RB6#0	22.54	22.48	22.42		
	RB6#9	22.59	22.56	22.34		
	RB15#0	22.56	22.5	22.58		
5MHz QPSK	RB1#0	24.48	24.48	24.28	20.26	34.77
	RB1#13	24.51	24.48	24.39		
	RB1#24	24.45	24.45	24.22		
	RB15#0	23.43	23.59	23.44		
	RB15#10	23.54	23.55	23.28		
	RB25#0	23.49	23.57	23.36		
5MHz 16QAM	RB1#0	23.81	23.55	23.26	19.6	34.77
	RB1#13	23.85	23.62	23.31		
	RB1#24	23.77	23.56	23.23		
	RB15#0	22.46	22.68	22.51		
	RB15#10	22.54	22.61	22.37		
	RB25#0	22.5	22.6	22.42		
10MHz QPSK	RB1#0	24.42	24.49	24.44	20.36	34.77
	RB1#25	24.57	24.57	24.61		
	RB1#49	24.46	24.48	24.42		

	RB25#0	23.53	23.72	23.5		
	RB25#25	23.51	23.72	23.5		
	RB50#0	23.51	23.68	23.59		
10MHz 16QAM	RB1#0	24.11	23.64	23.56	19.99	34.77
	RB1#25	24.24	23.76	23.62		
	RB1#49	24.2	23.68	23.49		
	RB25#0	22.62	22.76	22.68		
	RB25#25	22.62	22.82	22.65		
	RB50#0	22.54	22.77	22.63		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	6.38	5.8	6.44	13
	RB50#0	5.71	5.99	5.99	13
10MHz 16QAM	RB1#0	7.5	6.31	5.9	13
	RB50#0	6.7	6.86	6.83	13

Result:**Pass****FCC §2.1049, §27.53: Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.11	1.098	1.314	1.302	1.302
1.4MHz 16QAM	1.092	1.104	1.104	1.29	1.29	1.302
3MHz QPSK	2.687	2.687	2.687	2.88	2.892	2.88
3MHz 16QAM	2.687	2.676	2.676	2.892	2.88	2.88
5MHz QPSK	4.54	4.54	4.52	5.14	5.2	5.12
5MHz 16QAM	4.54	4.54	4.52	5.16	5.2	5.12
10MHz QPSK	8.96	9	8.96	9.68	9.88	9.96
10MHz 16QAM	8.96	9	8.96	9.96	9.96	9.96

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal**Result: Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

FCC §2.1051, §27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	699.510	699.00	715.504	716.00
	-20	3.8	699.508	699.00	715.502	716.00
	-10	3.8	699.519	699.00	715.489	716.00
	0	3.8	699.501	699.00	715.488	716.00
	10	3.8	699.495	699.00	715.489	716.00
	20	3.8	699.520	699.00	715.480	716.00
	30	3.8	699.516	699.00	715.497	716.00
	40	3.8	699.513	699.00	715.492	716.00
Frequency Stability vs. Voltage	20	3.65	699.501	699.00	715.503	716.00
	20	4.35	699.496	699.00	715.508	716.00
					Result:	Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature(°C)	Voltage(V _{DC})	Lower Edge(MHz)		Upper Edge(MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	699.514	699.00	715.506	716.00
	-20	3.8	699.513	699.00	715.481	716.00
	-10	3.8	699.513	699.00	715.488	716.00
	0	3.8	699.493	699.00	715.490	716.00
	10	3.8	699.501	699.00	715.500	716.00
	20	3.8	699.520	699.00	715.480	716.00
	30	3.8	699.509	699.00	715.495	716.00
	40	3.8	699.503	699.00	715.486	716.00
Frequency Stability vs. Voltage	20	3.65	699.492	699.00	715.503	716.00
	20	4.35	699.495	699.00	715.495	716.00
					Result:	Pass

Test Plots(Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	<p style="font-size: small;"> *RBW 30 kHz Delta 1 [T1] 1.64 dB *VBW 100 kHz *Att 25 dB SWT 15 ms Ref 30 dBm 30 Offset 14.5 dB D1 15.27 dBm OSW 1.314000000 MHz Marker 1 [T1] 15.13 dBm Temp 1 [T1 OSW] 659.046000000 MHz Temp 2 [T1 OSW] 659.148000000 MHz Temp 3 [T1 OSW] 700.252000000 MHz Center 699.7 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 21:08:01 </p>	<p style="font-size: small;"> *RBW 30 kHz Delta 1 [T1] -0.33 dB *VBW 100 kHz *Att 25 dB SWT 15 ms Ref 30 dBm 30 Offset 14.5 dB D1 14.4 dBm OSW 1.290000000 MHz Marker 1 [T1] 13.86 dBm Temp 1 [T1 OSW] 659.058000000 MHz Temp 2 [T1 OSW] 659.154000000 MHz Temp 3 [T1 OSW] 700.246000000 MHz Center 699.7 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 21:08:19 </p>
Middle	<p style="font-size: small;"> *RBW 30 kHz Delta 1 [T1] -0.57 dB *VBW 100 kHz *Att 25 dB SWT 15 ms Ref 30 dBm 30 Offset 14.5 dB D1 16.0 dBm OSW 1.110000000 MHz Marker 1 [T1] 15.00 dBm Temp 1 [T1 OSW] 706.844000000 MHz Temp 2 [T1 OSW] 706.942000000 MHz Temp 3 [T1 OSW] 708.052000000 MHz Center 707.5 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 21:08:37 </p>	<p style="font-size: small;"> *RBW 30 kHz Delta 1 [T1] -0.48 dB *VBW 100 kHz *Att 25 dB SWT 15 ms Ref 30 dBm 30 Offset 14.5 dB D1 15.3 dBm OSW 1.104000000 MHz Marker 1 [T1] 14.58 dBm Temp 1 [T1 OSW] 706.852000000 MHz Temp 2 [T1 OSW] 706.948000000 MHz Temp 3 [T1 OSW] 708.052000000 MHz Center 707.5 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 21:08:52 </p>
Highest	<p style="font-size: small;"> *RBW 30 kHz Delta 1 [T1] 0.22 dB *VBW 100 kHz *Att 25 dB SWT 15 ms Ref 30 dBm 30 Offset 14.5 dB D1 15.28 dBm OSW 1.098000000 MHz Marker 1 [T1] 14.43 dBm Temp 1 [T1 OSW] 704.646000000 MHz Temp 2 [T1 OSW] 704.748000000 MHz Temp 3 [T1 OSW] 705.846000000 MHz Center 715.3 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 21:09:07 </p>	<p style="font-size: small;"> *RBW 30 kHz Delta 1 [T1] 0.92 dB *VBW 100 kHz *Att 25 dB SWT 15 ms Ref 30 dBm 30 Offset 14.5 dB D1 15.58 dBm OSW 1.104000000 MHz Marker 1 [T1] 14.88 dBm Temp 1 [T1 OSW] 704.640000000 MHz Temp 2 [T1 OSW] 704.742000000 MHz Temp 3 [T1 OSW] 705.846000000 MHz Center 715.3 MHz 300 kHz/ Span 3 MHz Date: 21.JUN.2023 21:09:28 </p>

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.84 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWF 5 ms SWF 5 ms SWF 5 ms Center 701.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 21:40:21</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -2.22 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWF 5 ms SWF 5 ms SWF 5 ms Center 701.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 21:40:40</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.07 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWF 5 ms SWF 5 ms SWF 5 ms Center 707.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 21:41:00</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.21 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWF 5 ms SWF 5 ms SWF 5 ms Center 707.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 21:41:15</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.12 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWF 5 ms SWF 5 ms SWF 5 ms Center 713.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 21:41:31</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.04 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWF 5 ms SWF 5 ms SWF 5 ms Center 713.5 MHz 1 MHz/ Span 10 MHz Date: 21.JUN.2023 21:41:49</p>

Occupied Bandwidth


Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.21 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWT 10 ms 9.960000000 MHz OSW 9.960000000 MHz Marker 1 [T1] -11.10 dBm 659.120000000 MHz Temp 1 [T1 OSW] 659.520000000 MHz Temp 2 [T1 OSW] 708.480000000 MHz</p> <p>Center 704 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:08:07</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.18 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWT 10 ms 9.960000000 MHz OSW 9.960000000 MHz Marker 1 [T1] -11.14 dBm 658.960000000 MHz Temp 1 [T1 OSW] 659.520000000 MHz Temp 2 [T1 OSW] 708.480000000 MHz</p> <p>Center 704 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:08:31</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 3.86 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWT 10 ms 9.980000000 MHz OSW 9.980000000 MHz Marker 1 [T1] -11.81 dBm 702.540000000 MHz Temp 1 [T1 OSW] 702.980000000 MHz Temp 2 [T1 OSW] 704.980000000 MHz</p> <p>Center 707.5 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:08:50</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -3.18 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWT 10 ms 9.960000000 MHz OSW 9.960000000 MHz Marker 1 [T1] -11.54 dBm 702.500000000 MHz Temp 1 [T1 OSW] 702.980000000 MHz Temp 2 [T1 OSW] 704.980000000 MHz</p> <p>Center 707.5 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:09:07</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.84 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWT 10 ms 9.960000000 MHz OSW 9.960000000 MHz Marker 1 [T1] -11.17 dBm 705.960000000 MHz Temp 1 [T1 OSW] 706.520000000 MHz Temp 2 [T1 OSW] 708.480000000 MHz</p> <p>Center 711 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:09:26</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 2.08 dB *VSW 300 kHz *VSW 300 kHz *VSW 300 kHz SWT 10 ms 9.960000000 MHz OSW 9.960000000 MHz Marker 1 [T1] -11.56 dBm 705.960000000 MHz Temp 1 [T1 OSW] 706.520000000 MHz Temp 2 [T1 OSW] 708.480000000 MHz</p> <p>Center 711 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:09:44</p>

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

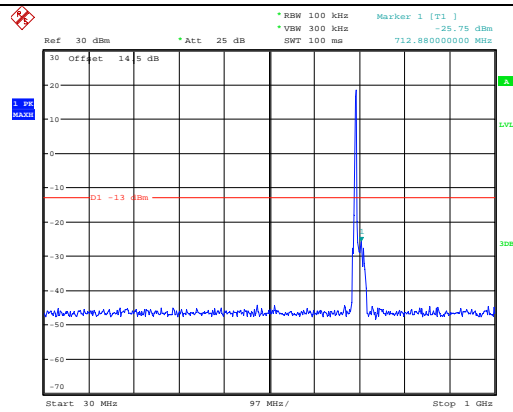


Date: 24.JUN.2023 10:16:11

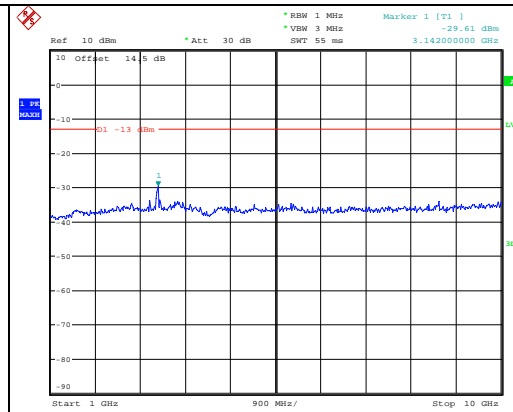


Date: 24.JUN.2023 10:16:25

Middle

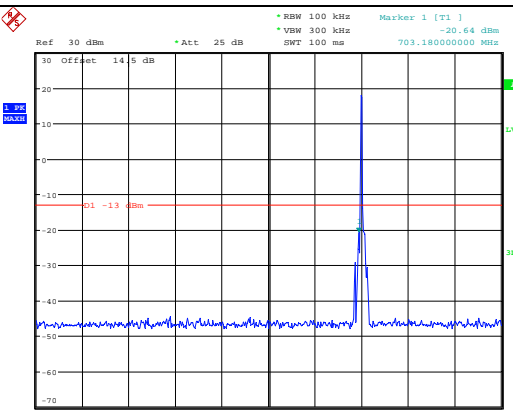


Date: 24.JUN.2023 10:16:39

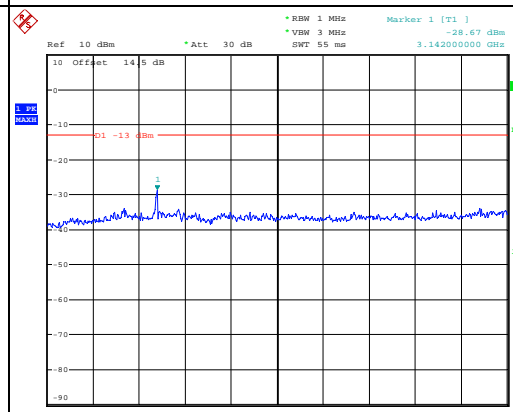


Date: 24.JUN.2023 10:16:50

Highest

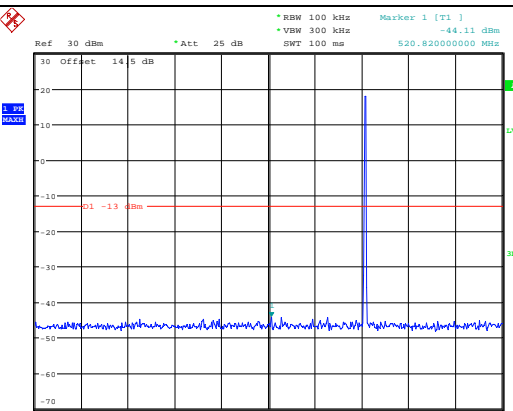

Date: 24.JUN.2023 10:17:04

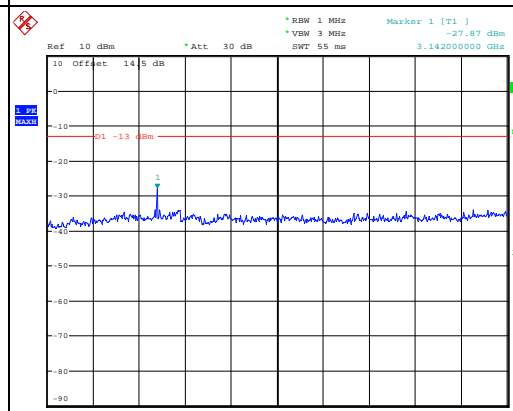



Date: 24.JUN.2023 10:17:15

Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

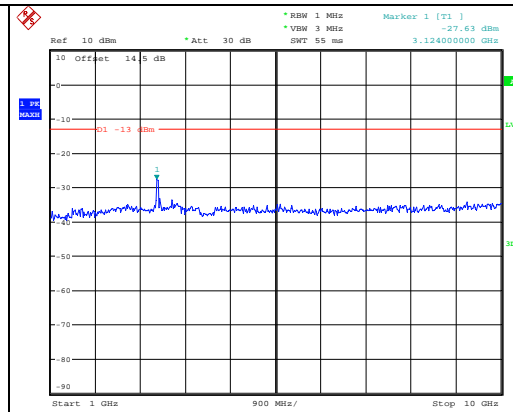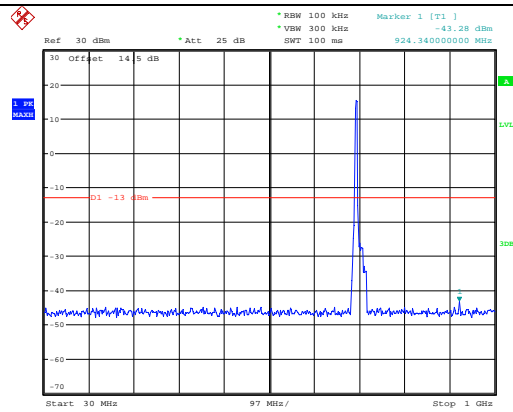

Middle

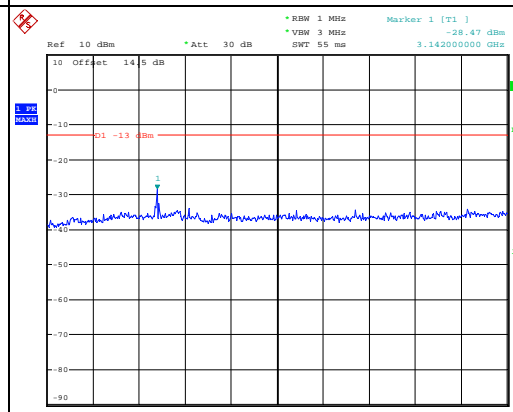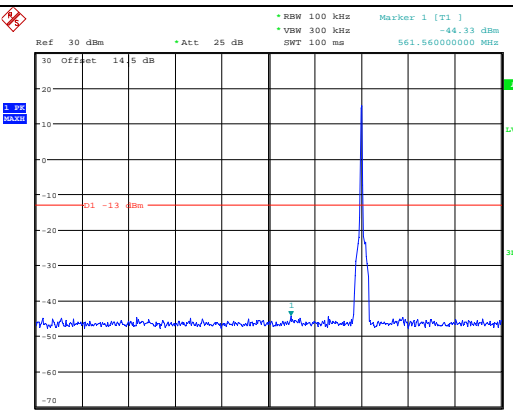

Highest

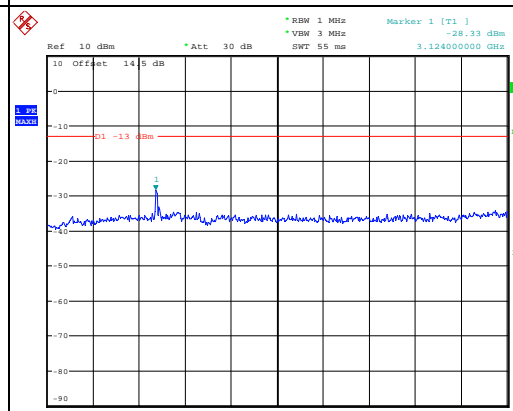
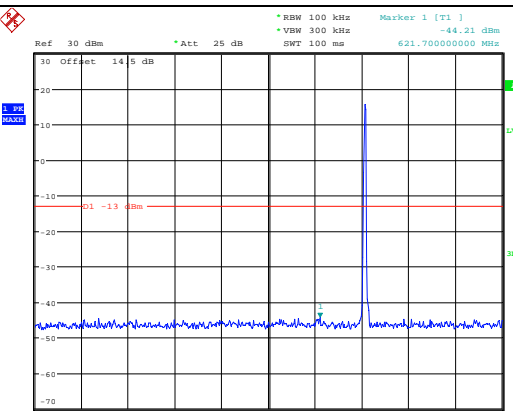


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

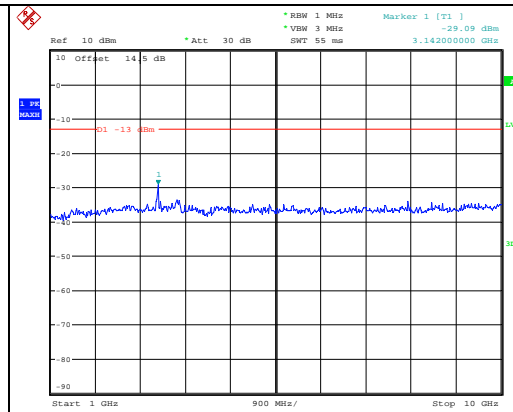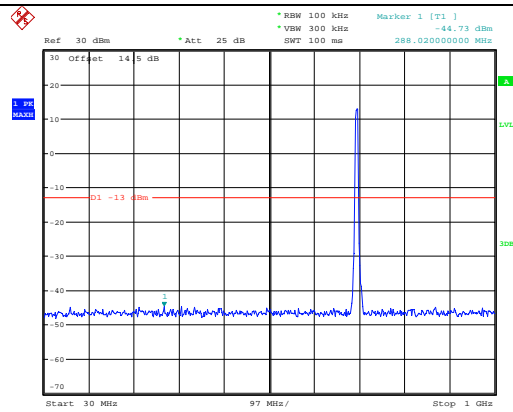

Middle

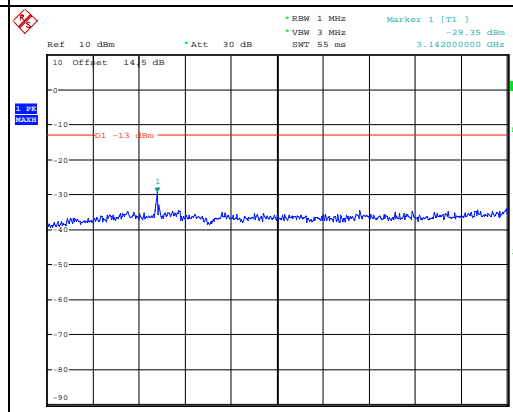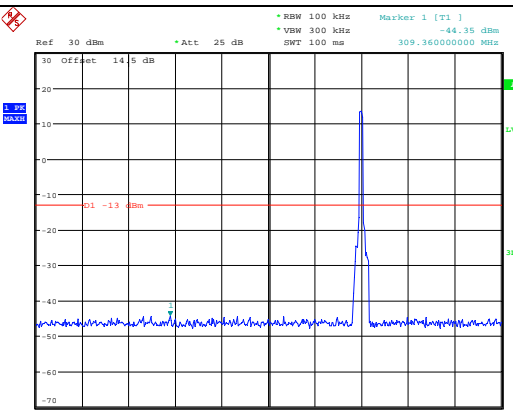

Highest

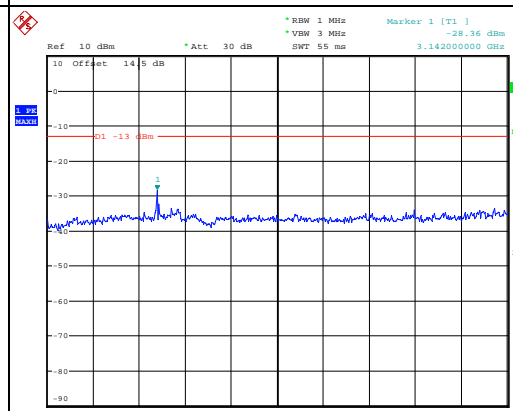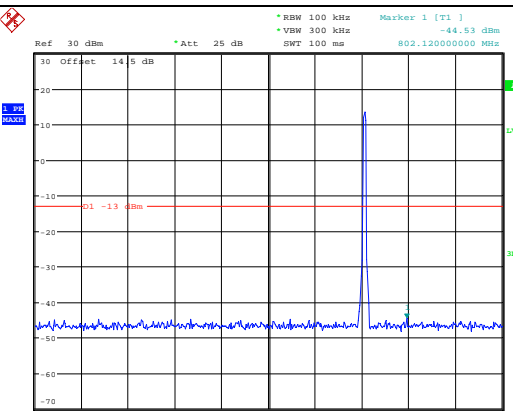


Spurious Emissions at Antenna Terminal

Channel	10MHz Bandwidth QPSK	
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -44.06 dBm 862.268000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:21:37</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -28.31 dBm 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:21:48</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -43.81 dBm 322.940000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:22:05</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -29.14 dBm 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:22:16</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -32.38 dBm 693.480000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:22:30</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -28.55 dBm 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:22:41</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 1.4MHz	<p>Ref 30 dBm Att 25 dB RBW 30 kHz Marker 1 [T1] -29.45 dBm VSM 100 kHz SWT 35 ms 699.000000000 MHz</p> <p>30 Offset 14.5 dB</p> <p>D1 -13 dBm</p> <p>SWP 50 OF 50</p> <p>Center 699 MHz 300 kHz/ Span 3 MHz</p> <p>Date: 21.JUN.2023 23:45:26</p>	<p>Ref 30 dBm Att 25 dB RBW 30 kHz Marker 1 [T1] -32.85 dBm VSM 100 kHz SWT 35 ms 716.000000000 MHz</p> <p>30 Offset 14.5 dB</p> <p>D1 -13 dBm</p> <p>SWP 50 OF 50</p> <p>Center 716 MHz 300 kHz/ Span 3 MHz</p> <p>Date: 21.JUN.2023 23:45:42</p>
QPSK 3MHz	<p>Ref 30 dBm Att 25 dB RBW 30 kHz Marker 1 [T1] -34.42 dBm VSM 100 kHz SWT 35 ms 699.000000000 MHz</p> <p>30 Offset 14.5 dB</p> <p>D1 -13 dBm</p> <p>SWP 50 OF 50</p> <p>Center 699 MHz 600 kHz/ Span 6 MHz</p> <p>Date: 21.JUN.2023 23:51:43</p>	<p>Ref 30 dBm Att 25 dB RBW 30 kHz Marker 1 [T1] -37.05 dBm VSM 100 kHz SWT 35 ms 716.000000000 MHz</p> <p>30 Offset 14.5 dB</p> <p>D1 -13 dBm</p> <p>SWP 50 OF 50</p> <p>Center 716 MHz 600 kHz/ Span 6 MHz</p> <p>Date: 21.JUN.2023 23:51:59</p>
QPSK 5MHz	<p>Ref 30 dBm Att 25 dB RBW 100 kHz Marker 1 [T1] -26.78 dBm VSM 500 kHz SWT 35 ms 699.000000000 MHz</p> <p>30 Offset 14.5 dB</p> <p>D1 -13 dBm</p> <p>SWP 50 OF 50</p> <p>Center 699 MHz 1 MHz/ Span 10 MHz</p> <p>Date: 21.JUN.2023 23:53:09</p>	<p>Ref 30 dBm Att 25 dB RBW 100 kHz Marker 1 [T1] -26.05 dBm VSM 500 kHz SWT 35 ms 716.000000000 MHz</p> <p>30 Offset 14.5 dB</p> <p>D1 -13 dBm</p> <p>SWP 50 OF 50</p> <p>Center 716 MHz 1 MHz/ Span 10 MHz</p> <p>Date: 21.JUN.2023 23:53:26</p>


Out of band emission, Band Edge

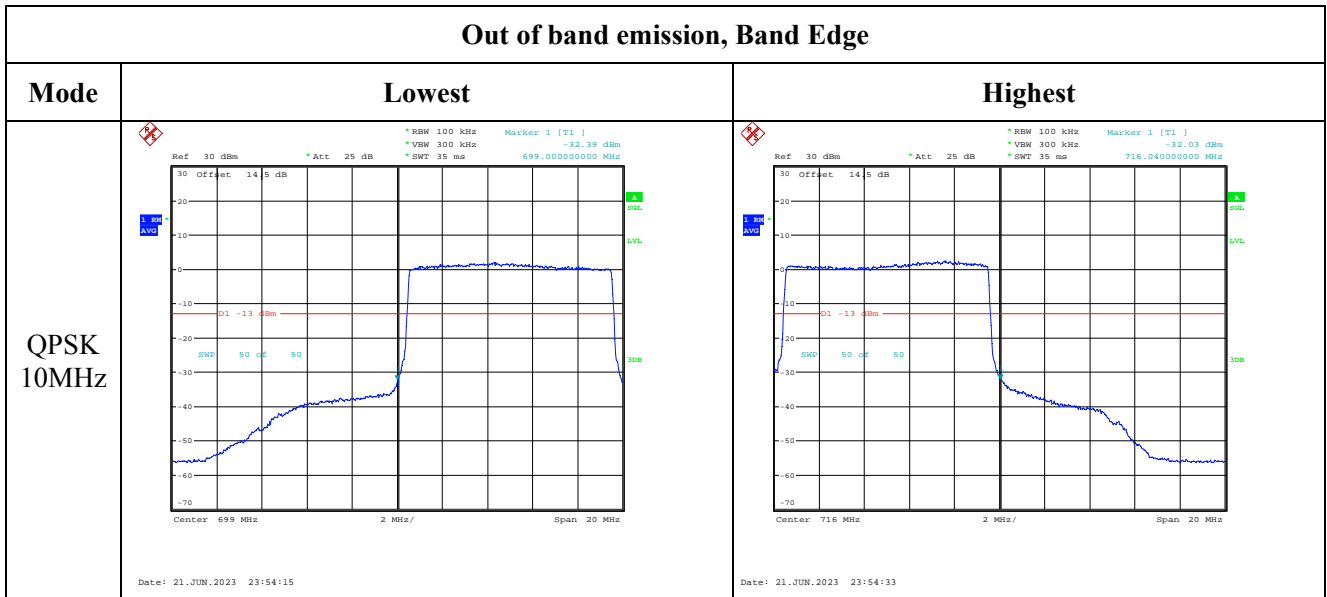

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 1.4MHz	<p>Date: 21.JUN.2023 23:45:34</p>	<p>Date: 21.JUN.2023 23:45:49</p>
16QAM 3MHz	<p>Date: 21.JUN.2023 23:51:51</p>	<p>Date: 21.JUN.2023 23:52:06</p>
16QAM 5MHz	<p>Date: 21.JUN.2023 23:53:18</p>	<p>Date: 21.JUN.2023 23:53:33</p>

Out of band emission, Band Edge

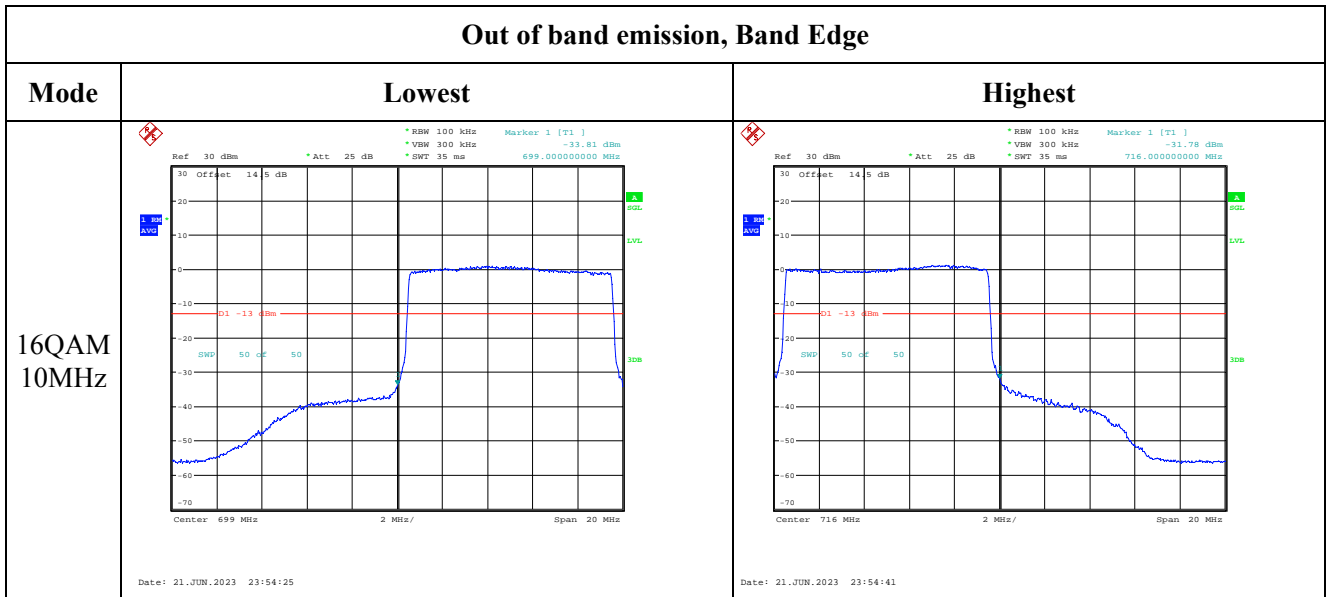

4.10 Antenna Port Test Data and Results for LTE Band 17

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/6/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	706.5	710	713.5
10MHz	709	710	711

Test Data:

FCC§2.1046;§ 27.50(c) (10)						
RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	24.15	24.44	24.21	20.32	34.77
	RB1#13	24.27	24.57	24.29		
	RB1#24	24.2	24.4	24.14		
	RB15#0	23.3	23.55	23.35		
	RB15#10	23.25	23.69	23.21		
	RB25#0	23.27	23.6	23.25		
5MHz 16QAM	RB1#0	23.51	23.61	23.21	19.42	34.77
	RB1#13	23.6	23.67	23.22		
	RB1#24	23.47	23.53	23.14		
	RB15#0	22.37	22.65	22.45		
	RB15#10	22.25	22.74	22.31		
	RB25#0	22.34	22.69	22.39		
10MHz QPSK	RB1#0	24.47	24.43	24.12	20.42	34.77
	RB1#25	24.67	24.48	24.27		
	RB1#49	24.45	24.09	23.92		
	RB25#0	23.67	23.24	23.08		
	RB25#25	23.72	23.39	23.2		
	RB50#0	23.72	23.45	23.2		
10MHz 16QAM	RB1#0	23.54	23.7	23.18	19.63	34.77
	RB1#25	23.79	23.88	23.32		
	RB1#49	23.55	23.62	23.13		
	RB25#0	22.83	22.21	22.16		
	RB25#25	22.86	22.66	22.31		
	RB50#0	22.78	22.45	22.37		
Note: ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd) Gr(dBd)=Gr(dBi)-2.15						
					Result:	Pass

Peak-to-average Ratio(PAR)						
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)	
		Lowest Channel	Middle Channel	Highest Channel		
10MHz QPSK	RB1#0	6.22	5.99	6.44	13	
	RB50#0	6.03	5.99	5.96	13	
10MHz 16QAM	RB1#0	7.18	6.44	7.56	13	
	RB50#0	6.92	6.79	6.86	13	
					Result:	Pass

FCC §2.1049, §27.53: Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.54	4.54	4.54	6.8	5.28	5.16
5MHz 16QAM	4.58	4.54	4.52	5.72	5.26	5.1
10MHz QPSK	9.04	9	8.96	10.16	10.56	9.8
10MHz 16QAM	9	9	9	9.88	10.08	9.88

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, §27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	704.479	704.00	715.490	716.00
	-20	3.8	704.463	704.00	715.503	716.00
	-10	3.8	704.464	704.00	715.488	716.00
	0	3.8	704.462	704.00	715.508	716.00
	10	3.8	704.473	704.00	715.506	716.00
	20	3.8	704.480	704.00	715.480	716.00
	30	3.8	704.480	704.00	715.496	716.00
	40	3.8	704.451	704.00	715.508	716.00
Frequency Stability vs. Voltage	20	3.65	704.478	704.00	715.488	716.00
	20	4.35	704.461	704.00	715.492	716.00
					Result:	Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	704.499	704.00	715.490	716.00
	-20	3.8	704.517	704.00	715.488	716.00
	-10	3.8	704.516	704.00	715.493	716.00
	0	3.8	704.516	704.00	715.494	716.00
	10	3.8	704.509	704.00	715.499	716.00
	20	3.8	704.520	704.00	715.480	716.00
	30	3.8	704.502	704.00	715.499	716.00
	40	3.8	704.499	704.00	715.495	716.00
	50	3.8	704.513	704.00	715.492	716.00
Frequency Stability vs. Voltage	20	3.65	704.502	704.00	715.499	716.00
	20	4.35	704.507	704.00	715.503	716.00
					Result:	Pass

Test Plots(Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	<p style="text-align: center;">Date: 21.JUN.2023 22:10:16</p>	<p style="text-align: center;">Date: 21.JUN.2023 22:10:53</p>
Middle	<p style="text-align: center;">Date: 21.JUN.2023 22:11:11</p>	<p style="text-align: center;">Date: 21.JUN.2023 22:11:29</p>
Highest	<p style="text-align: center;">Date: 21.JUN.2023 22:11:44</p>	<p style="text-align: center;">Date: 21.JUN.2023 22:12:02</p>

Occupied Bandwidth


Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.40 dB *VSW 300 kHz SWT 10 ms 10.160000000 MHz OSW 9.940000000 MHz Marker 1 [T1] -11.53 dBm Temp 1 [T1 OSW] 704.920000000 MHz Temp 2 [T1 OSW] 704.480000000 MHz Temp 3 [T1 OSW] 703.520000000 MHz Center 709 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:12:58</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.31 dB *VSW 300 kHz SWT 10 ms 9.880000000 MHz OSW 9.000000000 MHz Marker 1 [T1] -11.62 dBm Temp 1 [T1 OSW] 704.040000000 MHz Temp 2 [T1 OSW] 704.520000000 MHz Temp 3 [T1 OSW] 703.520000000 MHz Center 709 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:13:16</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -3.16 dB *VSW 300 kHz SWT 10 ms 10.560000000 MHz OSW 8.960000000 MHz Marker 1 [T1] -11.13 dBm Temp 1 [T1 OSW] 704.560000000 MHz Temp 2 [T1 OSW] 705.520000000 MHz Temp 3 [T1 OSW] 704.480000000 MHz Center 710 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:13:35</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -3.91 dB *VSW 300 kHz SWT 10 ms 10.080000000 MHz OSW 9.000000000 MHz Marker 1 [T1] -11.91 dBm Temp 1 [T1 OSW] 705.040000000 MHz Temp 2 [T1 OSW] 705.520000000 MHz Temp 3 [T1 OSW] 704.520000000 MHz Center 710 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:13:52</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.11 dB *VSW 300 kHz SWT 10 ms 9.800000000 MHz OSW 8.960000000 MHz Marker 1 [T1] -11.88 dBm Temp 1 [T1 OSW] 705.120000000 MHz Temp 2 [T1 OSW] 705.520000000 MHz Temp 3 [T1 OSW] 705.480000000 MHz Center 711 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:14:11</p>	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.95 dB *VSW 300 kHz SWT 10 ms 9.880000000 MHz OSW 8.960000000 MHz Marker 1 [T1] -11.61 dBm Temp 1 [T1 OSW] 705.080000000 MHz Temp 2 [T1 OSW] 705.520000000 MHz Temp 3 [T1 OSW] 705.480000000 MHz Center 711 MHz 2 MHz/ Span 20 MHz Date: 21.JUN.2023 22:14:28</p>

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

Lowest

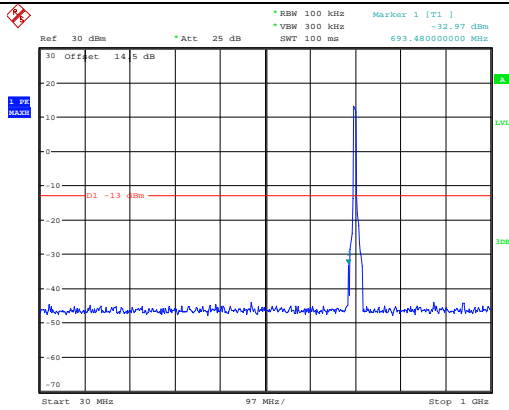


Date: 24.JUN.2023 10:23:03

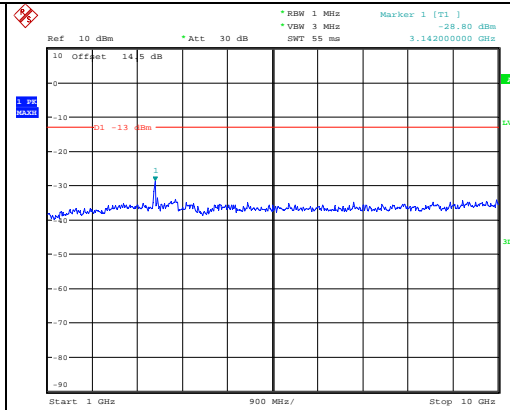


Date: 24.JUN.2023 10:23:14

Middle

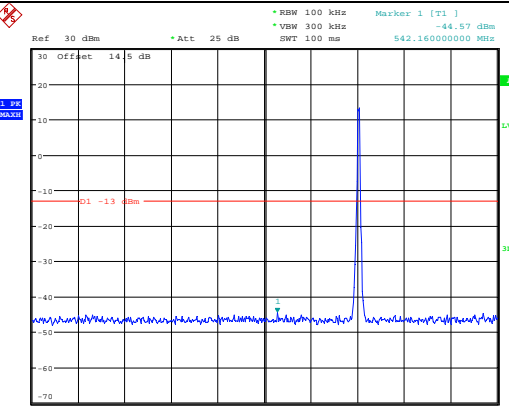


Date: 24.JUN.2023 10:23:28

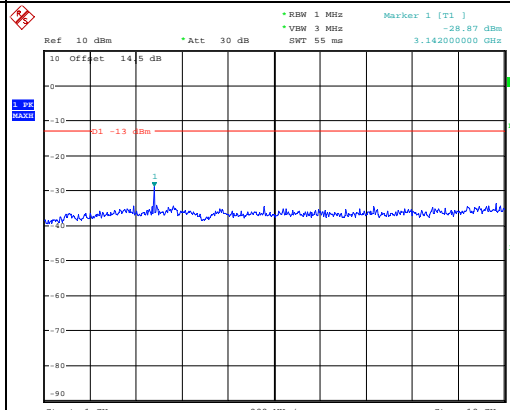


Date: 24.JUN.2023 10:23:39

Highest

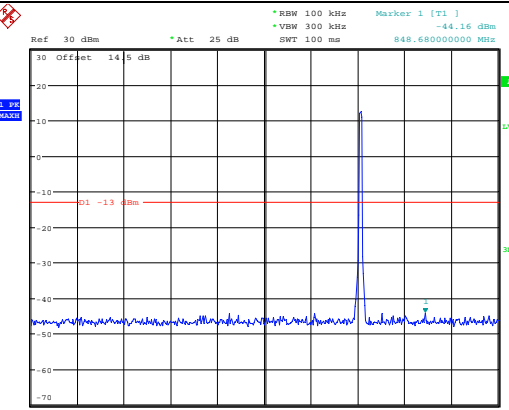

Date: 24.JUN.2023 10:23:53

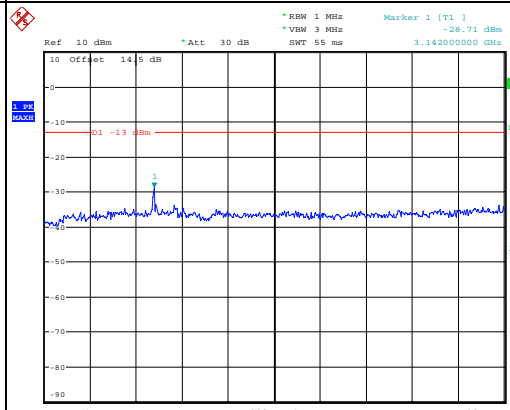

Date: 24.JUN.2023 10:24:04

Spurious Emissions at Antenna Terminal

Channel	10MHz Bandwidth QPSK	
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -29.48 dBm *VSW 300 kHz *SWT 100 ms 697.36800000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:24:46</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -27.86 dBm *VSW 3 MHz *SWT 55 ms 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:24:57</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -35.08 dBm *VSW 300 kHz *SWT 100 ms 695.42000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:25:14</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -29.04 dBm *VSW 3 MHz *SWT 55 ms 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:25:25</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -35.08 dBm *VSW 300 kHz *SWT 100 ms 695.42000000 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 24.JUN.2023 10:25:42</p>	<p>Ref 10 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -28.64 dBm *VSW 3 MHz *SWT 55 ms 3.142000000 GHz</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>Date: 24.JUN.2023 10:25:53</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 5MHz		
QPSK 10MHz		

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 5MHz	<p>Ref 30 dBm * Act 25 dB * RBW 100 kHz * VBW 300 kHz * SWT 35 ms * Marker 1 [T1] -24.91 dBm 704.00000000 MHz</p> <p>Center 704 MHz 1 MHz/ Span 10 MHz</p> <p>Date: 21.JUN.2023 23:55:04</p>	<p>Ref 30 dBm * Act 25 dB * RBW 100 kHz * VBW 300 kHz * SWT 35 ms * Marker 1 [T1] -26.91 dBm 716.00000000 MHz</p> <p>Center 716 MHz 1 MHz/ Span 10 MHz</p> <p>Date: 21.JUN.2023 23:55:19</p>
16QAM 10MHz	<p>Ref 30 dBm * Act 25 dB * RBW 100 kHz * VBW 300 kHz * SWT 35 ms * Marker 1 [T1] -30.37 dBm 704.00000000 MHz</p> <p>Center 704 MHz 2 MHz/ Span 20 MHz</p> <p>Date: 21.JUN.2023 23:56:17</p>	<p>Ref 30 dBm * Act 25 dB * RBW 100 kHz * VBW 300 kHz * SWT 35 ms * Marker 1 [T1] -32.36 dBm 716.00000000 MHz</p> <p>Center 716 MHz 2 MHz/ Span 20 MHz</p> <p>Date: 21.JUN.2023 23:56:34</p>

4.11 Antenna Port Test Data and Results for LTE Band 25

Serial Number:	26YR-1	Test Date:	2023/6/20-2023/7/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su/ Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-26.3	Relative Humidity: (%)	52-64	ATM Pressure: (kPa)	99.7-100.8
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07-15	2023-07-14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023-03-31	2024-03-30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1882.5	1914.3
3MHz	1851.5	1882.5	1913.5
5MHz	1852.5	1882.5	1912.5
10MHz	1855	1882.5	1910
15MHz	1857.5	1882.5	1907.5
20MHz	1860	1882.5	1905

Test Data:**FCC§2.1046;§ 24.232****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	21.37	21.14	21.04	20.35	33
	RB1#3	21.55	21.21	21.16		
	RB1#5	21.46	21.03	21.01		
	RB3#0	21.47	21.15	21.07		
	RB3#3	21.41	21.18	21.11		
	RB6#0	20.57	20.08	20.06		
1.4MHz 16QAM	RB1#0	20.51	20.05	20.02	19.49	33
	RB1#3	20.69	20.23	20.19		
	RB1#5	20.64	20.09	20.03		
	RB3#0	20.4	20.28	20.26		
	RB3#3	20.67	20.24	20.31		
	RB6#0	19.82	19.05	19.14		
3MHz QPSK	RB1#0	21.58	21.63	20.48	20.6	33
	RB1#8	21.8	21.29	20.44		
	RB1#14	21.63	21.18	20.47		
	RB6#0	20.87	20.37	19.43		
	RB6#9	20.83	20.3	19.42		
	RB15#0	20.95	20.57	19.47		
3MHz 16QAM	RB1#0	20.72	20.95	19.59	19.75	33
	RB1#8	20.76	20.85	19.59		
	RB1#14	20.8	20.78	19.61		
	RB6#0	19.88	19.45	18.5		
	RB6#9	19.86	19.62	18.5		
	RB15#0	20.05	19.56	18.46		
5MHz QPSK	RB1#0	21.91	21.43	20.2	20.83	33
	RB1#13	22.03	21.26	20.23		
	RB1#24	21.91	21.12	20.17		
	RB15#0	20.92	20.18	19.28		
	RB15#10	20.93	20.29	19.2		
	RB25#0	20.86	20.19	19.21		
5MHz 16QAM	RB1#0	20.77	20.5	19.25	19.57	33
	RB1#13	20.72	20.61	19.34		
	RB1#24	20.71	20.46	19.25		
	RB15#0	20	19.21	18.37		
	RB15#10	19.98	19.3	18.25		
	RB25#0	19.97	19.3	18.28		
10MHz QPSK	RB1#0	21.99	21.31	20.39	20.97	33
	RB1#25	22.17	21.51	20.53		
	RB1#49	21.9	21.25	20.33		

	RB25#0	20.91	20.19	19.38		
	RB25#25	20.88	20.48	19.35		
	RB50#0	20.9	20.08	19.4		
10MHz 16QAM	RB1#0	21.07	19.83	20.03	20.09	33
	RB1#25	21.29	19.96	20.12		
	RB1#49	21.01	19.82	19.92		
	RB25#0	19.95	18.97	18.5		
	RB25#25	19.88	19.09	18.47		
	RB50#0	19.95	19.08	18.41		
15MHz QPSK	RB1#0	21.91	21.25	21.16	20.76	33
	RB1#38	21.96	21.21	21.12		
	RB1#74	21.77	21.07	21.03		
	RB36#0	21.05	20.18	20.17		
	RB36#39	20.93	20.18	20.13		
	RB75#0	20.96	20.2	20.15		
15MHz 16QAM	RB1#0	21.44	20.36	20.63	20.26	33
	RB1#38	21.46	20.36	20.58		
	RB1#74	21.24	20.18	20.4		
	RB36#0	20.02	19.26	19.21		
	RB36#39	19.84	19.32	19.13		
	RB75#0	19.98	19.36	19.18		
20MHz QPSK	RB1#0	21.85	21.49	20.99	20.89	33
	RB1#50	22.09	21.99	21.29		
	RB1#99	21.67	21.09	20.88		
	RB50#0	21.06	20.27	20.34		
	RB50#50	20.79	20.84	20.18		
	RB100#0	20.94	20.62	20.24		
20MHz 16QAM	RB1#0	21.07	20.52	20.61	20.17	33
	RB1#50	21.37	20.76	20.88		
	RB1#99	20.93	20.31	20.43		
	RB50#0	20.05	19.36	19.39		
	RB50#50	19.8	19.64	19.26		
	RB100#0	19.94	19.57	19.28		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	9.71	9.84	10.64	13
	RB100#0	6.35	6.38	6.28	13
20MHz 16QAM	RB1#0	9.71	9.52	9.87	13
	RB100#0	7.18	7.18	7.12	13
				Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.092	1.092	1.290	1.284	1.302
1.4MHz 16QAM	1.098	1.098	1.110	1.314	1.308	1.290
3MHz QPSK	2.687	2.676	2.687	2.880	2.868	2.880
3MHz 16QAM	2.687	2.676	2.687	2.880	2.880	2.868
5MHz QPSK	4.560	4.520	4.520	5.140	5.160	5.160
5MHz 16QAM	4.520	4.540	4.540	5.200	5.120	5.240
10MHz QPSK	9.000	9.000	8.960	9.680	9.880	9.920
10MHz 16QAM	8.960	9.000	8.960	9.800	9.760	9.920
15MHz QPSK	13.500	13.560	13.560	15.000	15.060	15.060
15MHz 16QAM	13.560	13.500	13.620	15.120	14.940	15.060
20MHz QPSK	18.000	17.920	17.920	19.680	19.440	19.680
20MHz 16QAM	18.000	18.000	18.000	19.600	19.520	19.600

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §24.235: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.987	1850.000	1913.995	1915.000
	-20	3.8	1850.945	1850.000	1913.994	1915.000
	-10	3.8	1850.921	1850.000	1913.989	1915.000
	0	3.8	1850.936	1850.000	1913.976	1915.000
	10	3.8	1850.943	1850.000	1913.984	1915.000
	20	3.8	1850.960	1850.000	1913.928	1915.000
	30	3.8	1850.937	1850.000	1913.946	1915.000
	40	3.8	1850.964	1850.000	1913.966	1915.000
	50	3.8	1850.937	1850.000	1913.937	1915.000
Frequency Stability vs. Voltage	20	3.65	1850.933	1850.000	1913.997	1915.000
	20	4.35	1850.966	1850.000	1913.968	1915.000
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.946	1850.000	1914.060	1915.000
	-20	3.8	1850.983	1850.000	1914.016	1915.000
	-10	3.8	1850.964	1850.000	1914.020	1915.000
	0	3.8	1850.994	1850.000	1914.090	1915.000
	10	3.8	1850.994	1850.000	1914.070	1915.000
	20	3.8	1850.960	1850.000	1914.040	1915.000
	30	3.8	1850.967	1850.000	1914.056	1915.000
	40	3.8	1850.954	1850.000	1914.038	1915.000
	50	3.8	1850.945	1850.000	1914.054	1915.000
Frequency Stability vs. Voltage	20	3.65	1850.956	1850.000	1914.021	1915.000
	20	4.35	1850.954	1850.000	1914.025	1915.000
					Result:	Pass

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.20 dB VBW 100 kHz SWT 15 ms 1.850000000 MHz OSW 1.104000000 MHz Marker 1 [T1] -1.46 dBm D1 16.04 dBm Temp 1 [T1 OSW] 1.850050000 GHz D2 13.94 dBm Temp 2 [T1 OSW] 1.850140000 GHz 1.851250000 GHz </p> <p style="font-size: x-small;">Center 1.8507 GHz 300 kHz/ Span 3 MHz</p> <p style="font-size: x-small;">Date: 8.JUL.2023 13:08:55</p>	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.02 dB VBW 100 kHz SWT 15 ms 1.808000000 MHz OSW 1.098000000 MHz Marker 1 [T1] -1.73 dBm D1 15.24 dBm Temp 1 [T1 OSW] 1.850040000 GHz D2 10.72 dBm Temp 2 [T1 OSW] 1.850140000 GHz 1.851240000 GHz </p> <p style="font-size: x-small;">Center 1.8507 GHz 300 kHz/ Span 3 MHz</p> <p style="font-size: x-small;">Date: 8.JUL.2023 13:09:16</p>
Middle	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.04 dB VBW 100 kHz SWT 15 ms 1.290000000 MHz OSW 1.092000000 MHz Marker 1 [T1] -1.43 dBm D1 14.74 dBm Temp 1 [T1 OSW] 1.881850000 GHz D2 11.24 dBm Temp 2 [T1 OSW] 1.881950000 GHz 1.883040000 GHz </p> <p style="font-size: x-small;">Center 1.8825 GHz 300 kHz/ Span 3 MHz</p> <p style="font-size: x-small;">Date: 8.JUL.2023 13:09:36</p>	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.37 dB VBW 100 kHz SWT 15 ms 1.314000000 MHz OSW 1.110000000 MHz Marker 1 [T1] -1.66 dBm D1 14.54 dBm Temp 1 [T1 OSW] 1.881840000 GHz D2 11.41 dBm Temp 2 [T1 OSW] 1.881940000 GHz 1.883050000 GHz </p> <p style="font-size: x-small;">Center 1.8825 GHz 300 kHz/ Span 3 MHz</p> <p style="font-size: x-small;">Date: 8.JUL.2023 13:09:56</p>
Highest	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] 1.15 dB VBW 100 kHz SWT 15 ms 1.302000000 MHz OSW 1.092000000 MHz Marker 1 [T1] -1.60 dBm D1 14.94 dBm Temp 1 [T1 OSW] 1.913640000 GHz D2 11.02 dBm Temp 2 [T1 OSW] 1.913750000 GHz 1.914840000 GHz </p> <p style="font-size: x-small;">Center 1.9143 GHz 300 kHz/ Span 3 MHz</p> <p style="font-size: x-small;">Date: 8.JUL.2023 13:10:17</p>	<p style="font-size: small;"> Ref 30 dBm Att 25 dB RBW 30 kHz Delta 1 [T1] -0.71 dB VBW 100 kHz SWT 15 ms 1.290000000 MHz OSW 1.092000000 MHz Marker 1 [T1] -1.86 dBm D1 13.54 dBm Temp 1 [T1 OSW] 1.913650000 GHz D2 12.45 dBm Temp 2 [T1 OSW] 1.913750000 GHz 1.914840000 GHz </p> <p style="font-size: x-small;">Center 1.9143 GHz 300 kHz/ Span 3 MHz</p> <p style="font-size: x-small;">Date: 8.JUL.2023 13:10:37</p>

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -1.15 dB *VBW 100 kHz SWT 30 ms 2.88000000 MHz OBS 2.88000000 MHz Marker 1 [T1] -1.15 dBm 1.85006000 GHz Temp 1 [T1 OSW] -1.15 dBm 1.85015000 GHz Temp 2 [T1 OSW] -1.15 dBm 1.85284000 GHz Center 1.8515 GHz 600 kHz/ Span 6 MHz Date: 8.JUL.2023 13:11:26</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -1.35 dB *VBW 100 kHz SWT 30 ms 2.88000000 MHz OBS 2.88000000 MHz Marker 1 [T1] -1.35 dBm 1.85006000 GHz Temp 1 [T1 OSW] -1.35 dBm 1.85015000 GHz Temp 2 [T1 OSW] -1.35 dBm 1.85284000 GHz Center 1.8515 GHz 600 kHz/ Span 6 MHz Date: 8.JUL.2023 13:11:43</p>
Middle	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -1.04 dB *VBW 100 kHz SWT 30 ms 2.88000000 MHz OBS 2.88000000 MHz Marker 1 [T1] -1.04 dBm 1.88106000 GHz Temp 1 [T1 OSW] -1.04 dBm 1.88115000 GHz Temp 2 [T1 OSW] -1.04 dBm 1.88384000 GHz Center 1.8825 GHz 600 kHz/ Span 6 MHz Date: 8.JUL.2023 13:12:00</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -1.46 dB *VBW 100 kHz SWT 30 ms 2.88000000 MHz OBS 2.88000000 MHz Marker 1 [T1] -1.46 dBm 1.88106000 GHz Temp 1 [T1 OSW] -1.46 dBm 1.88115000 GHz Temp 2 [T1 OSW] -1.46 dBm 1.88384000 GHz Center 1.8825 GHz 600 kHz/ Span 6 MHz Date: 8.JUL.2023 13:12:20</p>
Highest	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.46 dB *VBW 100 kHz SWT 30 ms 2.88000000 MHz OBS 2.87600000 MHz Marker 1 [T1] -0.46 dBm 1.91207000 GHz Temp 1 [T1 OSW] -0.46 dBm 1.91216000 GHz Temp 2 [T1 OSW] -0.46 dBm 1.91484000 GHz Center 1.9135 GHz 600 kHz/ Span 6 MHz Date: 8.JUL.2023 13:12:41</p>	<p>Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.44 dB *VBW 100 kHz SWT 30 ms 2.86000000 MHz OBS 2.87600000 MHz Marker 1 [T1] -0.44 dBm 1.91207000 GHz Temp 1 [T1 OSW] -0.44 dBm 1.91216000 GHz Temp 2 [T1 OSW] -0.44 dBm 1.91484000 GHz Center 1.9135 GHz 600 kHz/ Span 6 MHz Date: 8.JUL.2023 13:13:00</p>