



Report No.: TW2103125E File reference No.: 2021-04-02

Applicant: Shenzhen Neewer Technology Co., Ltd

Product: PRISM LED LIGHT

Model No.: NL140, RGB140

Trademark: NEEWER

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: April 02, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2103125E Page 2 of 91

Date: 2021-04-02



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 91

Report No.: TW2103125E

Date: 2021-04-02



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	26
8.0	Maximum Output Power	38
9.0	Carrier Frequency Separation.	41
10.0	Number of Hopping Channel	45
11.0	Time of Occupancy (Dwell Time)	49
12.0	Out of Band Measurement.	62
13.0	Antenna Requirement.	79
14.0	FCC ID Label.	80
15.0	Photo of Test Setup and EUT View.	81

Report No.: TW2103125E

Date: 2021-04-02



Page 4 of 91

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Neewer Technology Co., Ltd

Address: ROOM 1901-1903, Block A, LU SHAN BUILDING NO.3023 CHUNFENGRD LUO HU

DISTRICT, SHENZHEN, GUANGDONG, 518001, CHINA

Telephone: -Fax: --

1.3 Description of EUT

Product: PRISM LED LIGHT

Manufacturer: Shenzhen Neewer Technology Co., Ltd

Address: ROOM 1901-1903, Block A, LU SHAN BUILDING NO.3023 CHUNFENGRD

LUO HU DISTRICT, SHENZHEN, GUANGDONG, 518001, CHINA

Brand Name: NEEWER
Model Number: NL140
Additional Model Number: RGB140

Type of Modulation GFSK, Л/4-DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channels for Bluetooth

Antenna: PCB antenna used. The gain of the antenna is 2.0dBi. (get from the antenna

specification provided the applicant)

Input Voltage: DC12V-15V, 50W

Power Supply: Model: NW-120500D2;

Input: 100-240V~50/60Hz, 1.6A Max; Output: 12V, 5A,60W

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 91 Report No.: TW2103125E

Date: 2021-04-02



Submitted Sample: 2 Samples

1.5 **Test Duration**

2021-03-11 to 2021-04-02

Test Uncertainty 1.6

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Report No.: TW2103125E Page 6 of 91

Date: 2021-04-02



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2020-06-23	2021-06-22
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2020-06-23	2021-06-22
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2020-07-06	2021-07-05
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2021-01-16	2022-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 7 of 91 Report No.: TW2103125E

Date: 2021-04-02



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 91


Report No.: TW2103125E

Date: 2021-04-02



5. **Power Line Conducted Emission Test**

5.1 Schematics of the test

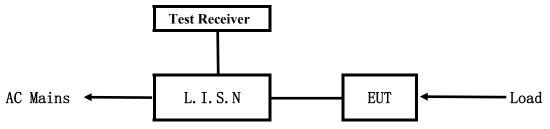


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

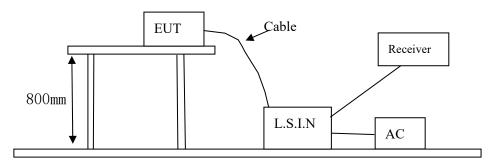

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: TW2103125E

Date: 2021-04-02



Page 9 of 91

A. EUT

Device	Manufacturer	Model	FCC ID
PRISM LED LIGHT	Shenzhen Neewer Technology	NL140, RGB140	2ANIV-NL140
I KISWI LED LIGITI	Co., Ltd	NL140, KGD140	ZAMIV-NLI40

В. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.10-2013.

- Α Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class B Lim	its (dB μ V)
(MHz)	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	56.0	46.0
5.00 ~ 30.00	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2021-04-02



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

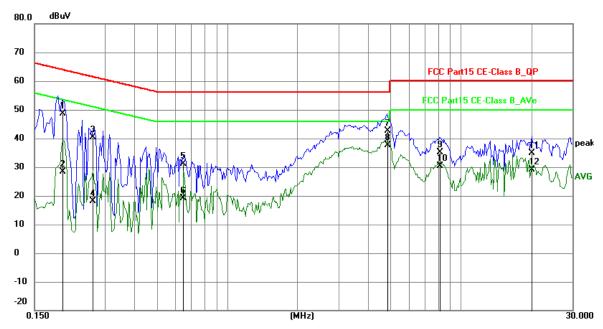

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1968	38.87	9.75	48.62	63.74	-15.12	QP	Р
2	0.1968	18.75	9.75	28.50	53.74	-25.24	AVG	Р
3	0.2672	30.58	9.75	40.33	61.20	-20.87	QP	Р
4	0.2672	8.29	9.75	18.04	51.20	-33.16	AVG	Р
5	0.6492	21.33	9.78	31.11	56.00	-24.89	QP	Р
6	0.6492	9.31	9.78	19.09	46.00	-26.91	AVG	Р
7	4.8252	32.72	9.92	42.64	56.00	-13.36	QP	Р
8	4.8252	27.63	9.92	37.55	46.00	-8.45	AVG	Р
9	8.1402	25.15	10.07	35.22	60.00	-24.78	QP	Р
10	8.1402	20.28	10.07	30.35	50.00	-19.65	AVG	Р
11	20.1560	24.12	10.69	34.81	60.00	-25.19	QP	Р
12	20.1560	18.32	10.69	29.01	50.00	-20.99	AVG	Р

Date: 2021-04-02



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

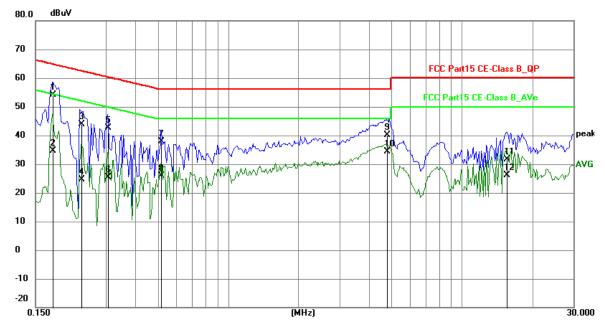

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1773	44.25	9.77	54.02	64.61	-10.59	QP	Р
2	0.1773	24.90	9.77	34.67	54.61	-19.94	AVG	Р
3	0.2358	34.22	9.75	43.97	62.24	-18.27	QP	Р
4	0.2358	14.85	9.75	24.60	52.24	-27.64	AVG	Р
5	0.3060	32.81	9.76	42.57	60.08	-17.51	QP	Р
6	0.3060	15.67	9.76	25.43	50.08	-24.65	AVG	Р
7	0.5166	28.04	9.77	37.81	56.00	-18.19	QP	Р
8	0.5166	16.15	9.77	25.92	46.00	-20.08	AVG	Р
9	4.7745	30.09	9.92	40.01	56.00	-15.99	QP	Р
10	4.7745	24.56	9.92	34.48	46.00	-11.52	AVG	Р
11	15.5502	21.24	10.41	31.65	60.00	-28.35	QP	Р
12	15.5502	15.82	10.41	26.23	50.00	-23.77	AVG	Р

Report No.: TW2103125E Page 12 of 91

Date: 2021-04-02




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

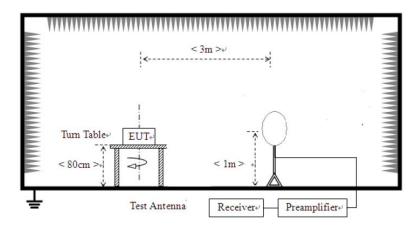


Report No.: TW2103125E


Date: 2021-04-02



For radiated emissions from 30MHz to1GHz

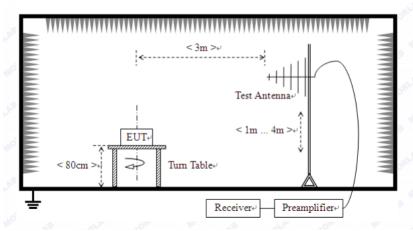

For radiated emissions above 1GHz

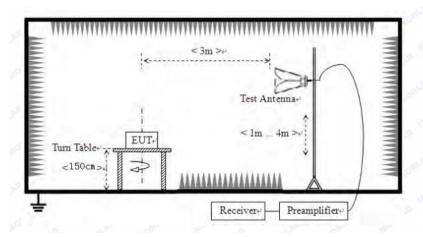

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Page 14 of 91 Report No.: TW2103125E

Date: 2021-04-02



Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. $\Pi/4$ -DQPSK was the worst case because it has highest output power

Report No.: TW2103125E

Date: 2021-04-02



Page 15 of 91

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting


Results: Pass Report No.: TW2103125E Page 16 of 91

Date: 2021-04-02



Test Figure:

H

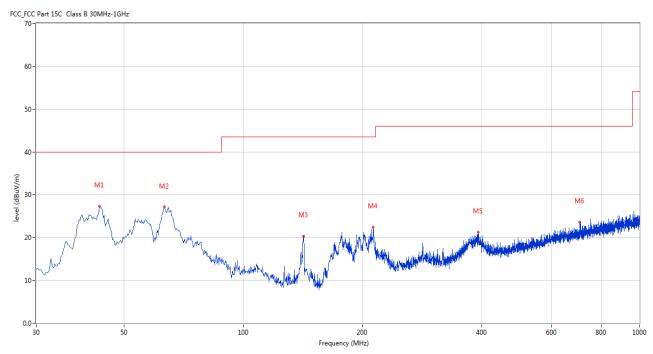

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	43.334	27.29	-11.49	40.0	-12.71	Peak	18.00	100	Horizontal	Pass
2	63.214	27.10	-13.32	40.0	-12.90	Peak	20.00	100	Horizontal	Pass
3	142.007	20.31	-17.30	43.5	-23.19	Peak	33.00	100	Horizontal	Pass
4	212.557	22.43	-13.67	43.5	-21.07	Peak	120.00	100	Horizontal	Pass
5	391.720	21.28	-8.89	46.0	-24.72	Peak	162.00	100	Horizontal	Pass
6	706.406	23.66	-4.06	46.0	-22.34	Peak	162.00	100	Horizontal	Pass


Report No.: TW2103125E Page 17 of 91

Date: 2021-04-02



Test Figure:



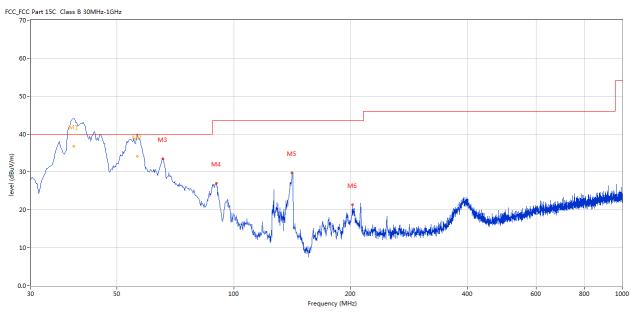

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	38.671	43.44	-12.66	40.0	3.44	Peak	156.00	101	Vertical	N/A
1*	38.671	36.81	-12.66	40.0	-3.19	QP	156.00	101	Vertical	Pass
2	56.414	39.00	-12.15	40.0	-1.00	Peak	322.00	105	Vertical	Pass
2*	56.414	34.12	-12.15	40.0	-5.88	QP	322.00	105	Vertical	Pass
3	65.639	33.46	-13.79	40.0	-6.54	Peak	293.00	100	Vertical	Pass
4	90.125	27.05	-15.13	43.5	-16.45	Peak	248.00	100	Vertical	Pass
5	141.280	29.85	-17.27	43.5	-13.65	Peak	285.00	100	Vertical	Pass
6	201.890	21.36	-13.41	43.5	-22.14	Peak	139.00	100	Vertical	Pass

Page 18 of 91 Report No.: TW2103125E

Date: 2021-04-02



Operation Mode: Transmitting under Low Channel (2402MHz)

	8	,	
Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	4(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882	-	Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak) 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 19 of 91 Report No.: TW2103125E

Date: 2021-04-02



Operation Mode: Transmitting under High Channel (2480MHz)

	8 8	, ,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Page 20 of 91


Report No.: TW2103125E

Date: 2021-04-02



Please refer to the following test plots for details:

Low Channel: Vertical

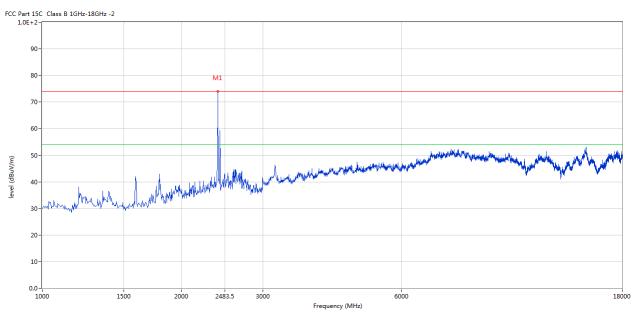


Report No.: TW2103125E Page 21 of 91

Date: 2021-04-02



Low Channel: Horizontal

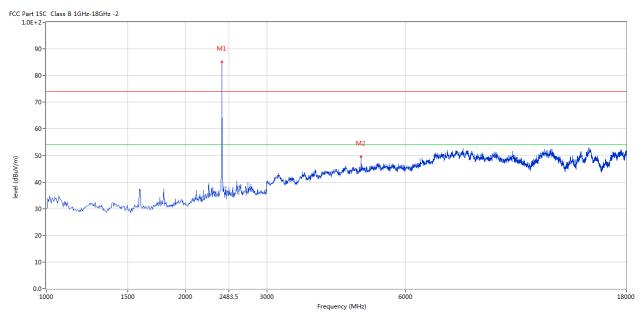


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4803.750	49.61	3.13	74.0	-24.39	Peak	266.00	100	Horizontal	Pass

Report No.: TW2103125E Page 22 of 91

Date: 2021-04-02



Middle Channel: Horizontal

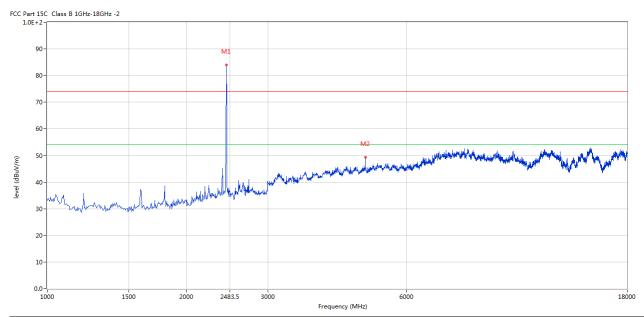


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4884.500	49.34	3.20	74.0	-24.66	Peak	171.00	100	Horizontal	Pass

Report No.: TW2103125E Page 23 of 91

Date: 2021-04-02



Middle Channel: Vertical

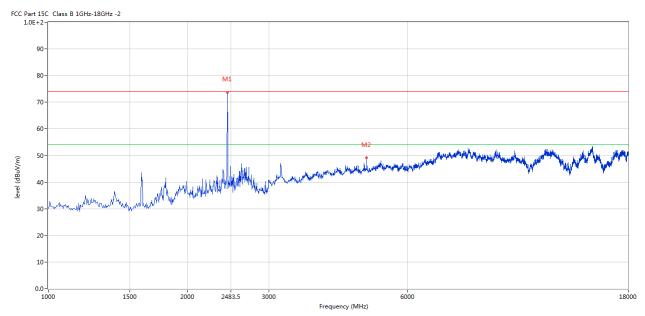


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4884.500	49.09	3.20	74.0	-24.91	Peak	34.00	100	Vertical	Pass

Report No.: TW2103125E Page 24 of 91

Date: 2021-04-02



High Channel: Horizontal

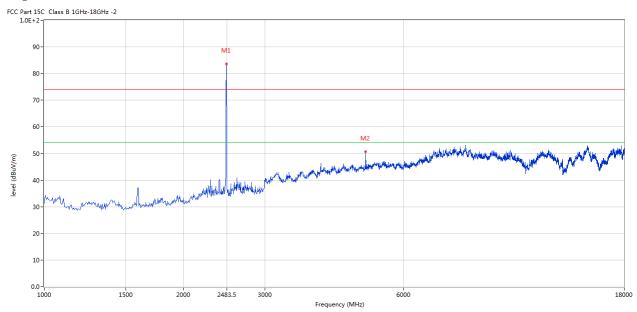

١	No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
2	2	4961.000	50.67	3.36	74.0	-23.33	Peak	359.00	100	Horizontal	Pass


Page 25 of 91

Report No.: TW2103125E

Date: 2021-04-02



High Channel: Vertical

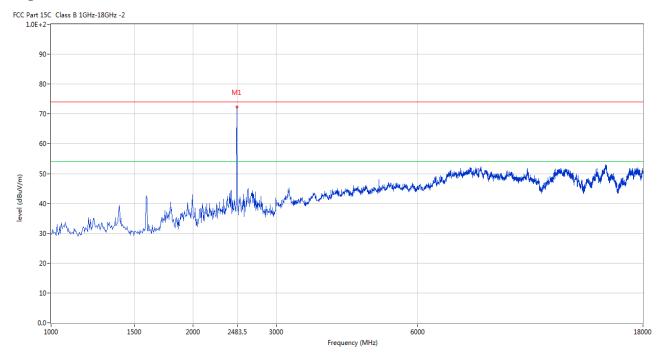

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz, it is only the floor noise.
- 5. The peak value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: TW2103125E

Date: 2021-04-02



Page 26 of 91

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

EUT	PRIS	SM LED LIGHTs	Model	NL140
Mode	Ke	ep Transmitting	Test Voltage	DC12V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail
Low	2402	782		Pass
Middle	2441	782		Pass
High	2480	746		Pass


Page 27 of 91 Report No.: TW2103125E

Date: 2021-04-02



Test Figure:

1. Condition: Low Channel

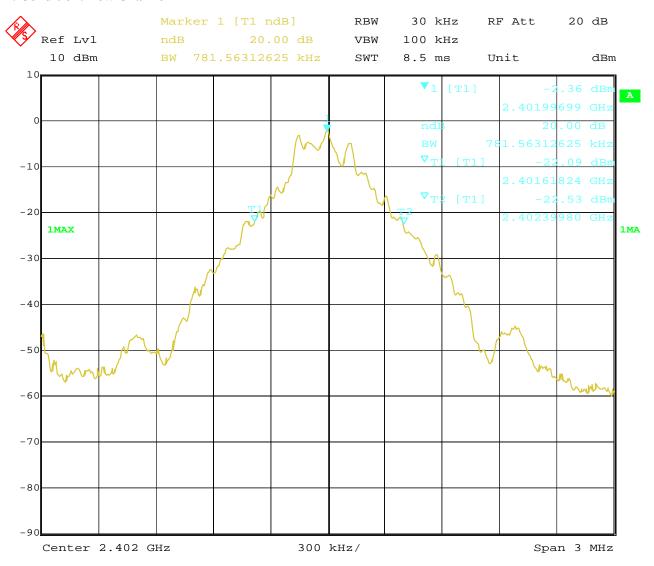


Date: 1.APR.2021 20:02:00

Page 28 of 91 Report No.: TW2103125E

Date: 2021-04-02



2. Condition: Middle Channel

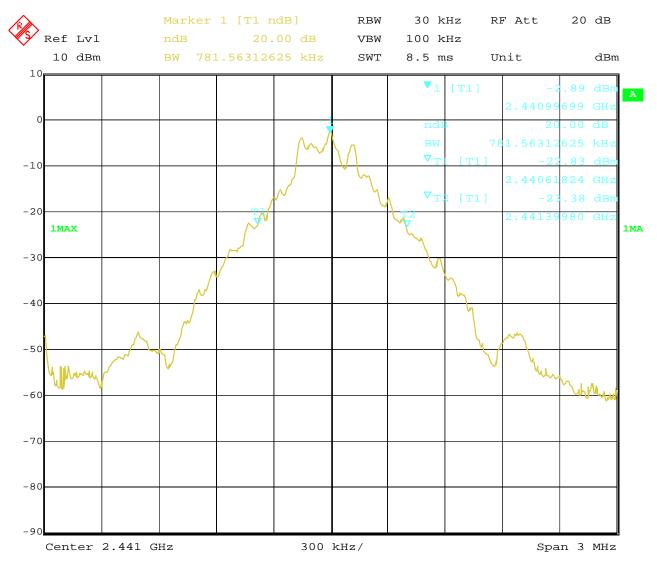


1.APR.2021 Date: 20:02:46

Page 29 of 91 Report No.: TW2103125E

Date: 2021-04-02



3. High Channel

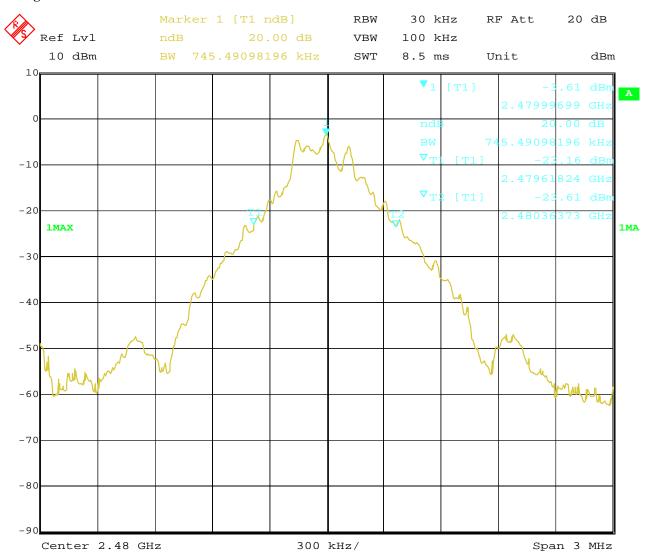

1.APR.2021 Date: 20:03:15 Report No.: TW2103125E Page 30 of 91

Date: 2021-04-02



Test Result

Type of Modulation: JI/4-DQPSK

EUT	PRI	SM LED LIGHTs	Model	NL140
Mode	K	eep Transmitting	Test Voltage	DC12V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1214		Pass
Middle	2441	1214		Pass
High	2480	1214		Pass


Page 31 of 91 Report No.: TW2103125E

Date: 2021-04-02



Test Figure:

1. Condition: Low Channel

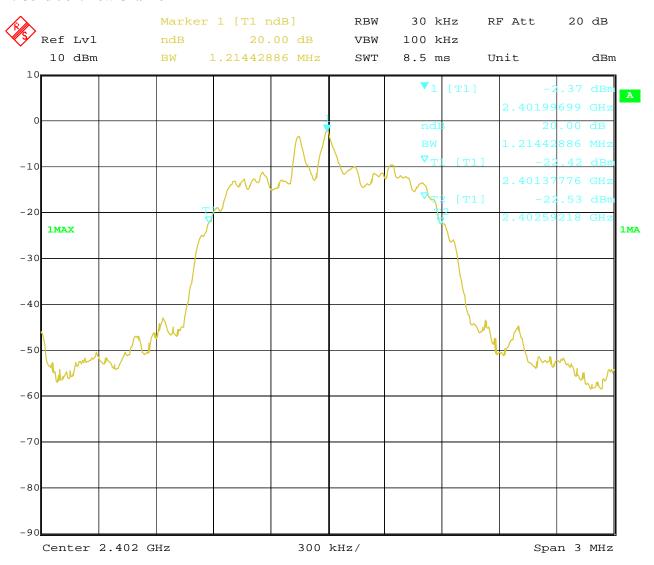


Date: 1.APR.2021 20:06:47

Page 32 of 91 Report No.: TW2103125E

Date: 2021-04-02



2. Condition: Middle Channel

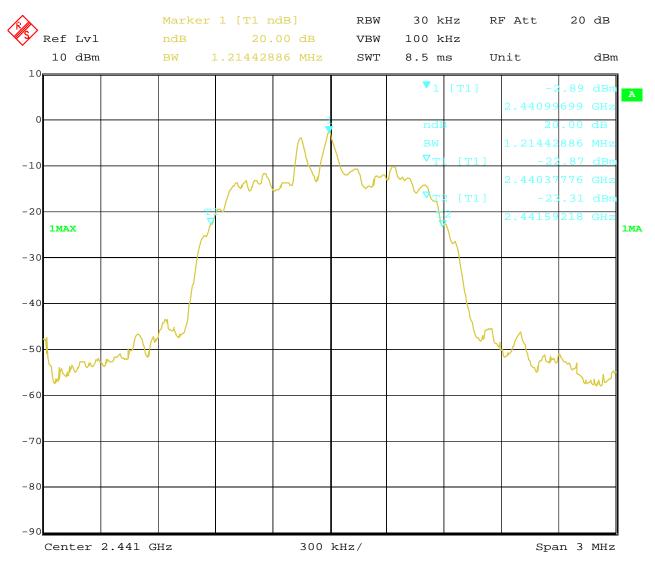


1.APR.2021 20:05:43 Date:

Page 33 of 91 Report No.: TW2103125E

Date: 2021-04-02



3. High Channel

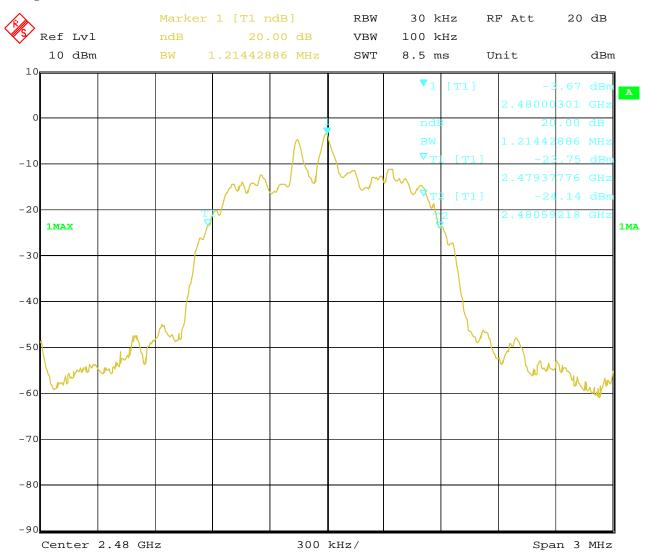

1.APR.2021 20:03:48 Date:

Report No.: TW2103125E Page 34 of 91

Date: 2021-04-02



Test Result

Type of Modulation: 8DPSK

EUT	PRI	SM LED LIGHTs	Model	NL140
Mode	Ke	eep Transmitting	Test Voltage	DC12V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1214		Pass
Middle	2441	1202		Pass
High	2480	1214		Pass


Page 35 of 91 Report No.: TW2103125E

Date: 2021-04-02



Test Figure:

1. Condition: Low Channel

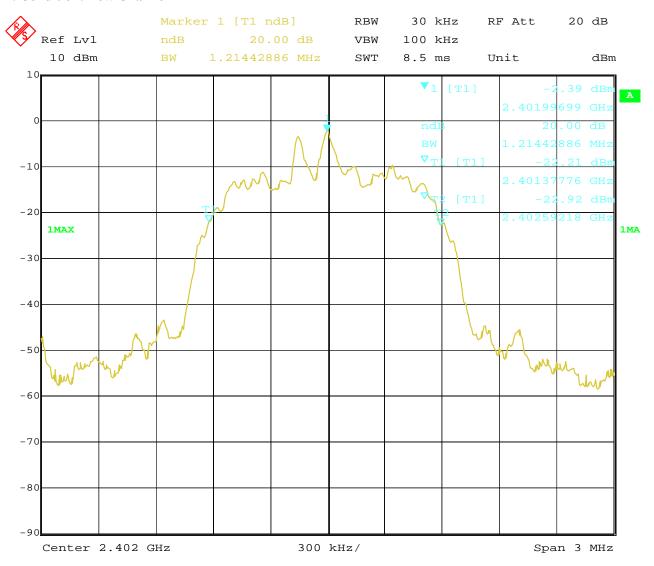


Date: 1.APR.2021 20:08:38

Page 36 of 91 Report No.: TW2103125E

Date: 2021-04-02



2. Condition: Middle Channel

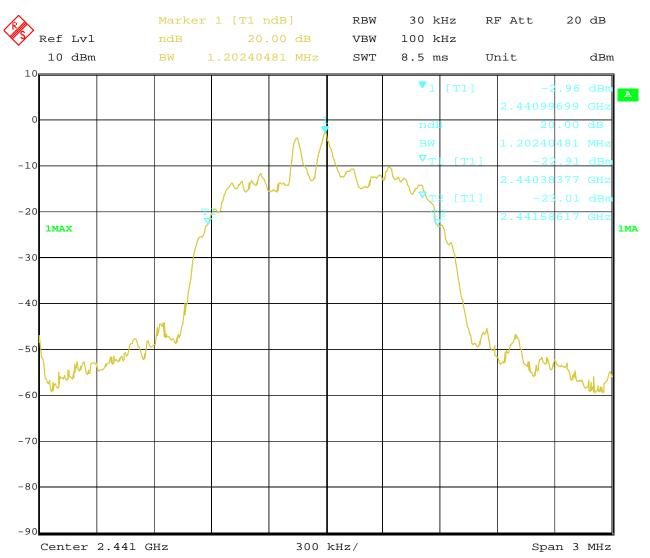


1.APR.2021 Date: 20:07:55

Page 37 of 91 Report No.: TW2103125E

Date: 2021-04-02



3. High Channel

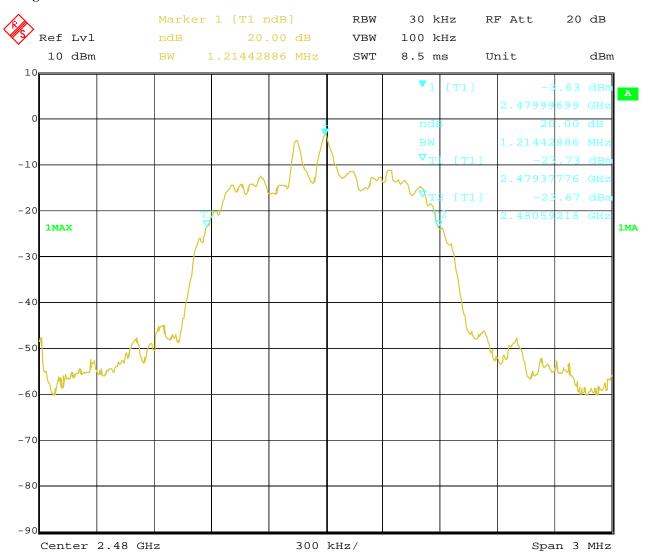

1.APR.2021 Date: 20:07:24 Report No.: TW2103125E

Date: 2021-04-02



Page 38 of 91

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; RBW =3MHz, VBW=10MHz; Sweep = 5ms; Detector function =PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 39 of 91 Report No.: TW2103125E

Date: 2021-04-02



8.4Test Results

Type of Modulation: GFSK

EUT	PR	PRISM LED LIGHTs		Model	NL140
Mode	K	eep Transmitting	Test Voltage		DC12V
Temperature	е	24 deg. C, Hur		idity	56% RH
Channel	Channel Frequency (MHz) Max. Power Output (dBm))	Peak Power Limit	Pass/ Fail
		PK		(dBm)	
Low	2402	-1.37		30	Pass
Middle	2441	-1.85		30	Pass
High	2480	-2.61		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Type of Modulation: Л/4-DQPSK

EUT	PRIS	PRISM LED LIGHTs		Model	NL140
Mode	Ke	ep Transmitting	Test Voltage		DC12V
Temperature	e 24 deg. C, I		Humidity		56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-0.38		30	Pass
Middle	2441	-0.87		30	Pass
High	2480	-1.61		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2103125E Page 40 of 91

Date: 2021-04-02



Type of Modulation: 8DPSK

EUT	PRIS	PRISM LED LIGHTs		Model	NL140
Mode	Ke	Keep Transmitting		t Voltage	DC12V
Temperature	e	24 deg. C,		umidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
-0.80	2402	-0.51		30	Pass
-0.03	2441	-0.88		30	Pass
High	2480	-1.65		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Report No.: TW2103125E

Date: 2021-04-02



Page 41 of 91

Jule: 2021 01 02

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 42 of 91 Report No.: TW2103125E

Date: 2021-04-02




9.4Test Result

Type of Modulation: GFSK

EUT	PRISM LED LI	Model		NL140	
Mode	Hopping O	Test Voltage		DC12V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

Test Plots

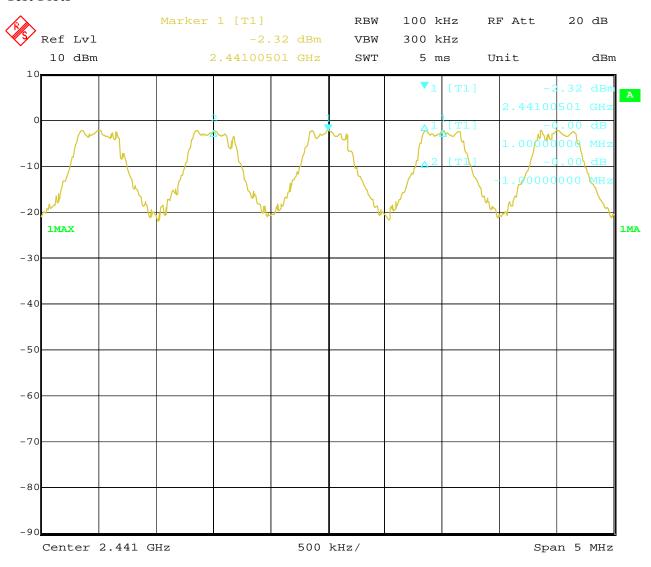

1.APR.2021 20:51:17 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 43 of 91 Report No.: TW2103125E


Date: 2021-04-02



Type of Modulation: $\sqrt{1/4}$ -DQPSK

EUT	PRISM LED LI	Model		NL140	
Mode	Hopping O	Test Voltage		DC12V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation		Limit		Pass/ Fail	
	1.000MHz	≥ 25 kHz or 2	/3 of 20 dB bandy	vidth	Pass

Test Plots

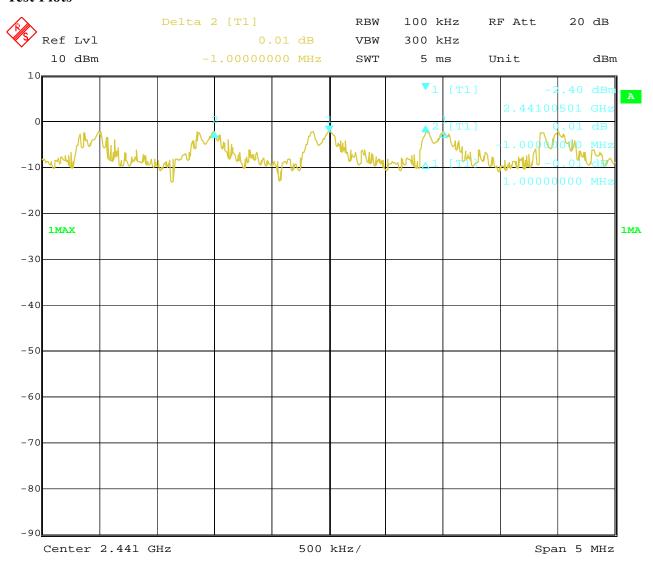

1.APR.2021 20:28:42 Date:

Page 44 of 91 Report No.: TW2103125E


Date: 2021-04-02



Type of Modulation: 8DPSK

EUT	PRISM LED LI	Model		NL140	
Mode	Hopping O	Test Voltage		DC12V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation			Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	/3 of 20 dB bands	width	Pass

Test Plots

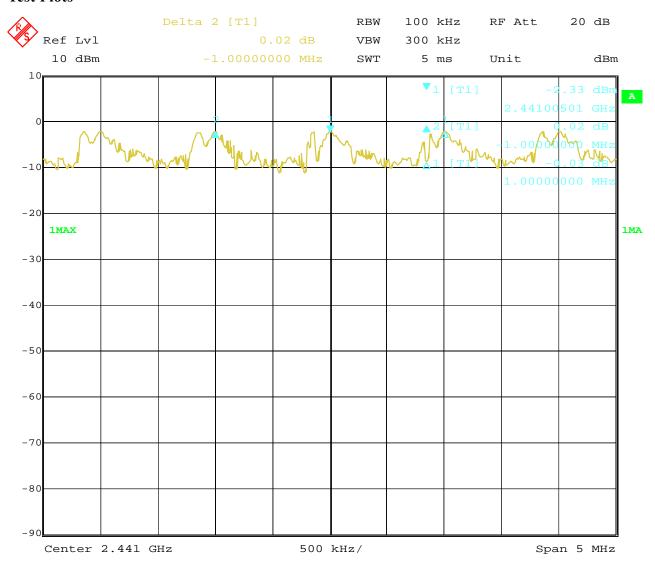

1.APR.2021 20:38:37 Date:

Report No.: TW2103125E

Date: 2021-04-02



Page 45 of 91

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 46 of 91

Report No.: TW2103125E

Date: 2021-04-02




10.4Test Result

Type of Modulation: GFSK

EUT	PRISM LED LIGHTs		Model	NL140		
Mode	Hopping On		Test Voltage	DC12V		
Temperature	2	24 deg. C,	Humidity	56% RH		
Operating Frequency		Number of hopp	oing channels	Limit	Pass/ Fail	
2402-2480MHz		79		≥ 15	Pass	

Test Plot

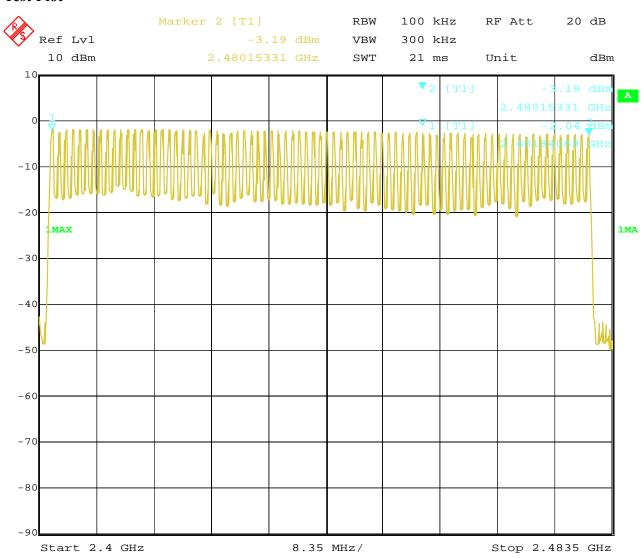

Date: 1.APR.2021 20:00:31

Page 47 of 91 Report No.: TW2103125E


Date: 2021-04-02



Type of Modulation: $\sqrt{1/4}$ -DQPSK

EUT	PRISM LED LIGHTs		M	Iodel		NL140
Mode	Hopping On		Test '	Voltage		DC12V
Temperature		24 deg. C,		Humidity		56% RH
Operating Frequency		Number of hopping channels		Lir	nit	Pass/ Fail
2402-2480MHz		79		>	15	Pass

Test Plot

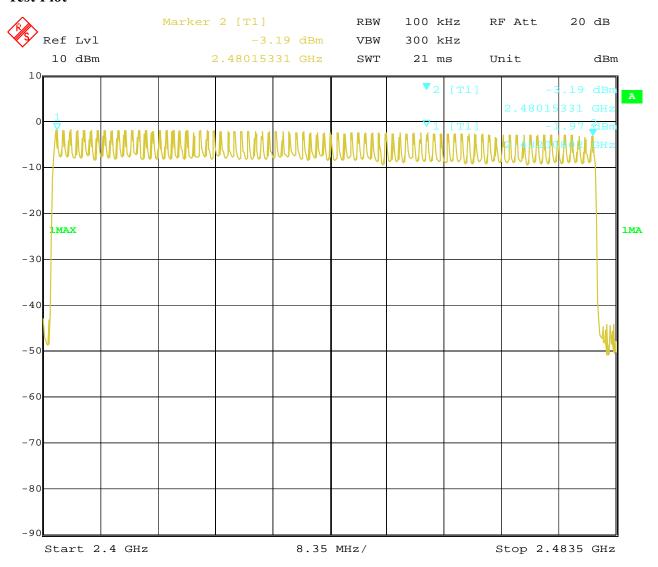

1.APR.2021 19:57:54 Date:

Page 48 of 91 Report No.: TW2103125E


Date: 2021-04-02



Type of Modulation: 8DPSK

EUT	PRISM LED LIGHTs		Мо	odel		NL140	
Mode	Hopping On		Test Vo	ltage		DC12V	
Temperature	2	24 deg. C,		ity		56% RH	
Operating Frequency		Number of hopp channels	oing	Liı	nit	Pass/ Fail	
2402-2480MHz		79		<u> </u>	15	Pass	

Test Plot

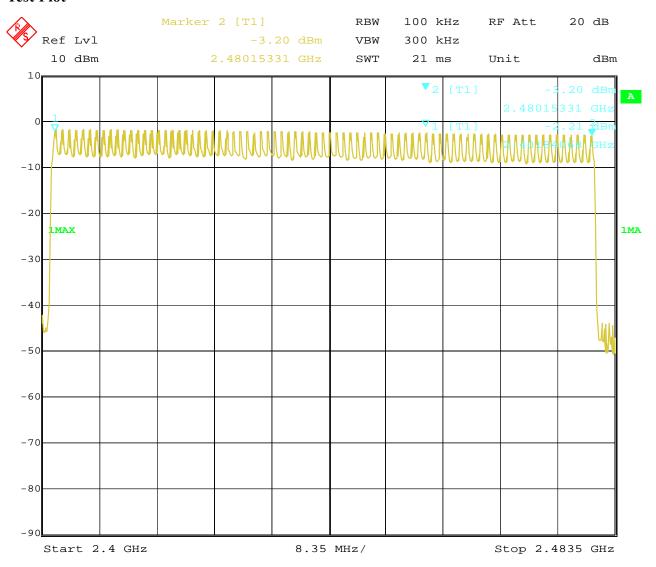

1.APR.2021 19:54:27 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2103125E

Date: 2021-04-02



Page 49 of 91

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: TW2103125E Page 50 of 91

Date: 2021-04-02



11.4 Test Result

Type of Modulation: GFSK

EUT	Bluetooth Rem	Bluetooth Remote Control Unit		DS	R-0828		
Mode	Keep Tra	Keep Transmitting		D	C12V		
Temperature	24 d	leg. C, Humidity		24 deg. C,		56	5% RH
Channel	Reading	Hoping	Hoping Rate		Limit		
			DH5				
Middle	2.966ms	266.66	7 hop/s	0.316s	0.4s		
			DH3				
Middle	1.743ms	400 l	400 hop/s		0.4s		
DH1							
Middle	0.481ms	800 l	nop/s	0.154s	0.4s		

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 51 of 91


Report No.: TW2103125E

Date: 2021-04-02



Test Plots:

DH5

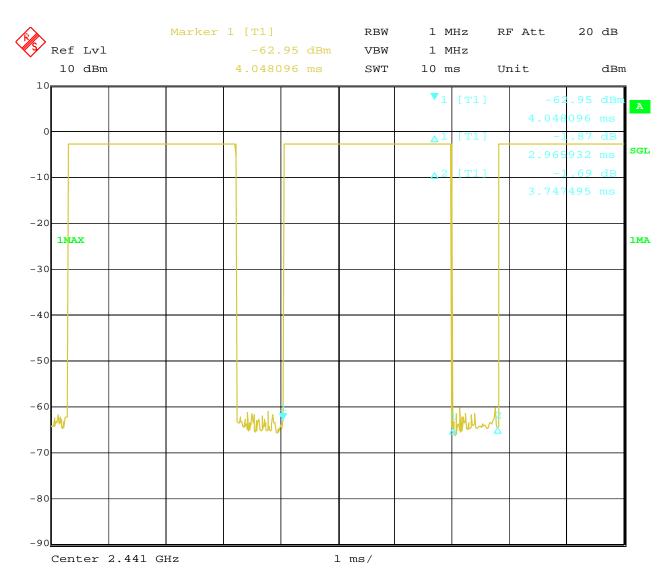


1.APR.2021 20:17:26 Date:

Page 52 of 91 Report No.: TW2103125E

Date: 2021-04-02



DH3

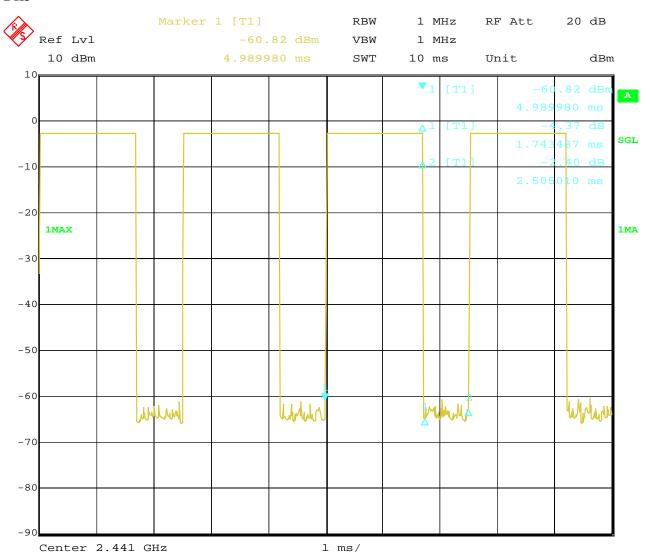


1.APR.2021 Date: 20:16:44

Page 53 of 91 Report No.: TW2103125E

Date: 2021-04-02



DH1

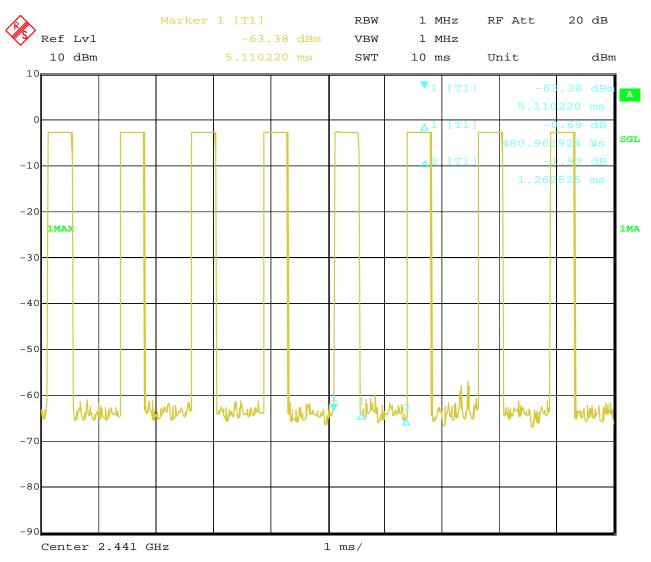

1.APR.2021 Date: 20:16:07 Report No.: TW2103125E

Date: 2021-04-02



Page 54 of 91

Test Result

Type of Modulation: $\sqrt{J}/4DQPSK$

EUT	Bluetooth Rem	Bluetooth Remote Control Unit		D	SR-0828
Mode	Keep Tra	Keep Transmitting		DC12V	
Temperatur	e 24 d	eg. C,	Humidity	4	56% RH
Channel	Reading	Hoping	Hoping Rate		Limit
			2DH5		
Middle	2.986ms	266.66	7 hop/s	0.319s	0.4s
			2DH3		
Middle	1.723ms	400 l	400 hop/s		0.4s
2DH1					
Middle	0.481ms	800 1	nop/s	0.154s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.


Page 55 of 91 Report No.: TW2103125E

Date: 2021-04-02



Test Plots:

2DH5

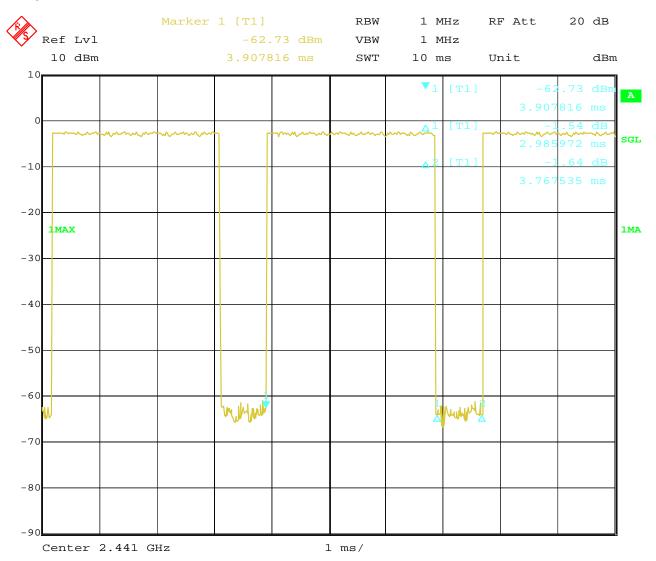


Date: 1.APR.2021 20:12:52

Page 56 of 91 Report No.: TW2103125E

Date: 2021-04-02



2DH3

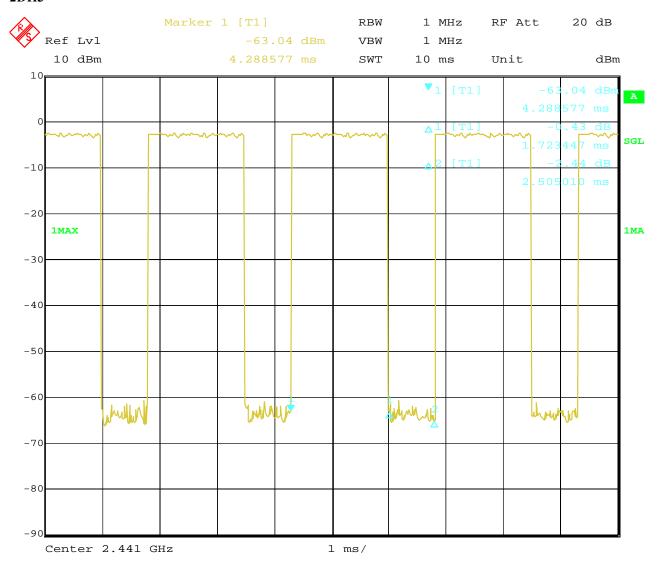


1.APR.2021 Date: 20:13:36

Page 57 of 91 Report No.: TW2103125E

Date: 2021-04-02



2DH1

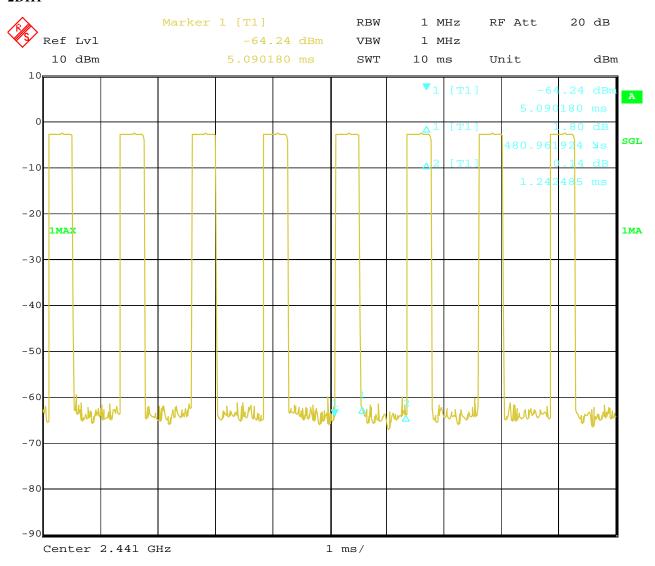

1.APR.2021 Date: 20:15:27 Report No.: TW2103125E Page 58 of 91

Date: 2021-04-02



Type of Modulation: 8DPSK

EUT	Bluetooth Remote Control Unit		Model	DS	R-0828
Mode	Keep Transmitting		Input Voltage	D	C12V
Temperature	24 d	24 deg. C, Humidity		56	5% RH
Channel	Reading	Hoping	Hoping Rate		Limit
			3DH5		
Middle	2.986ms	266.66	7 hop/s	0.319s	0.4s
			3DH3		
Middle	1.723ms	400 l	400 hop/s		0.4s
3DH1					
Middle	0.481ms	800 l	nop/s	0.154s	0.4s

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 59 of 91


Report No.: TW2103125E

Date: 2021-04-02



Test Plots:

3DH5

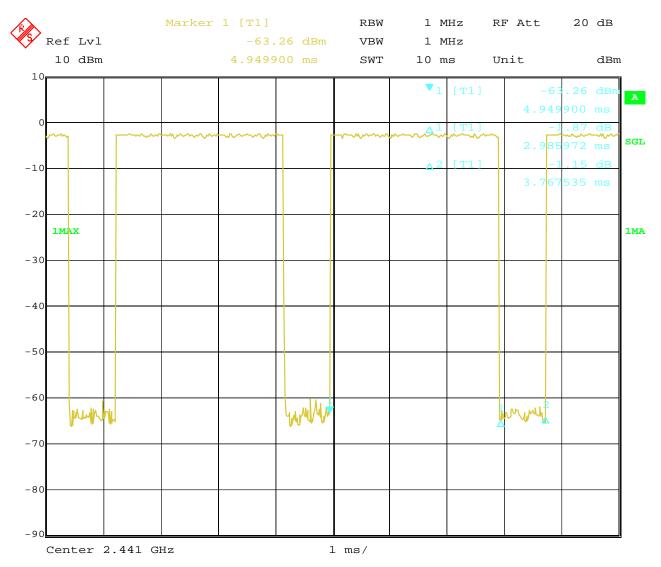


1.APR.2021 20:12:04 Date:

Report No.: TW2103125E Page 60 of 91

Date: 2021-04-02



3DH3

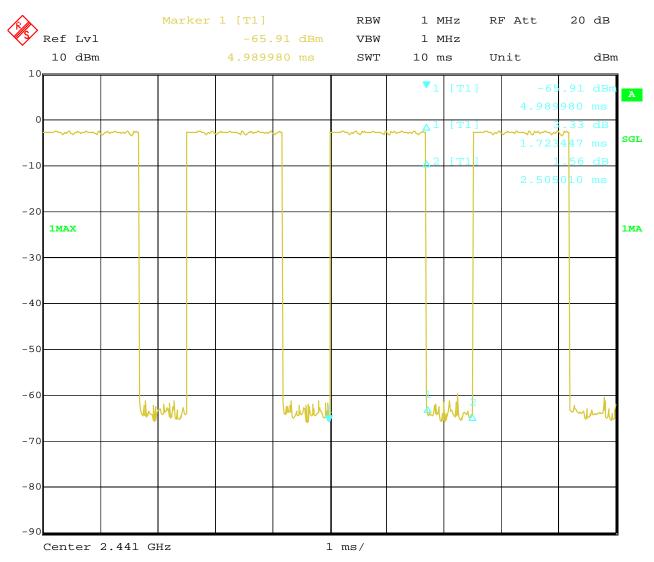


1.APR.2021 Date: 20:11:11

Page 61 of 91 Report No.: TW2103125E

Date: 2021-04-02



3DH1

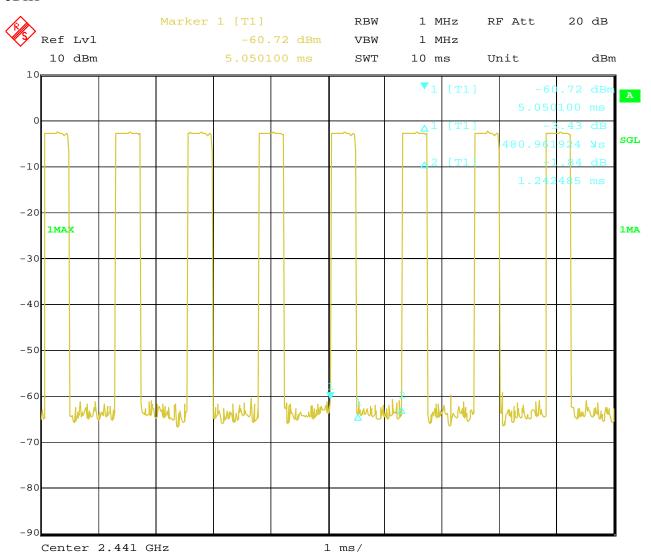

1.APR.2021 Date: 20:10:17 Report No.: TW2103125E


Date: 2021-04-02



Page 62 of 91

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 63 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	PRISM LED LIGHT	Test Mode:	Low Channel
Mode	Keeping Transmitting	Test Voltage	DC12V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

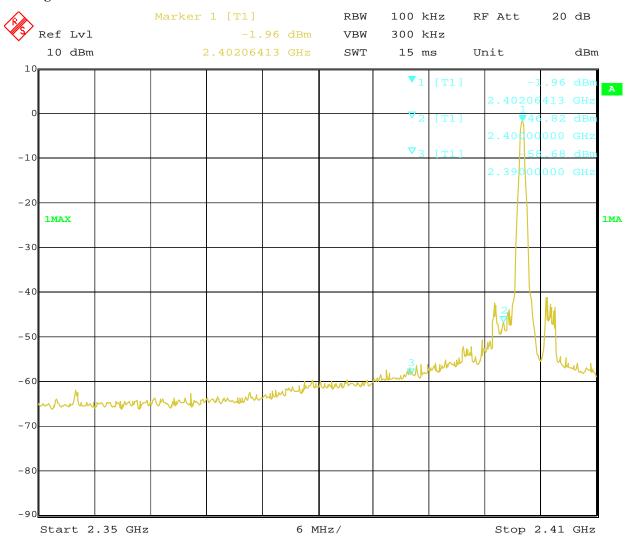

Date: 1.APR.2021 19:28:54

Page 64 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: GFSK

12.4 Band Edge Test Result

Product:	PRISM LED LIGHT	Test Mode:	High Channel
Mode	Keeping Transmitting	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

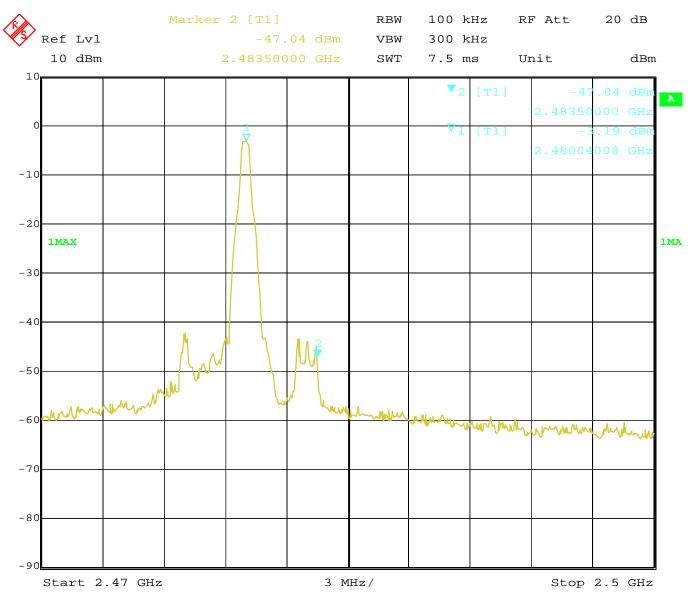

1.APR.2021 19:30:43 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 65 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: GFSK

Band Edge Test Result

Product:	PRISM LED LIGHT	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

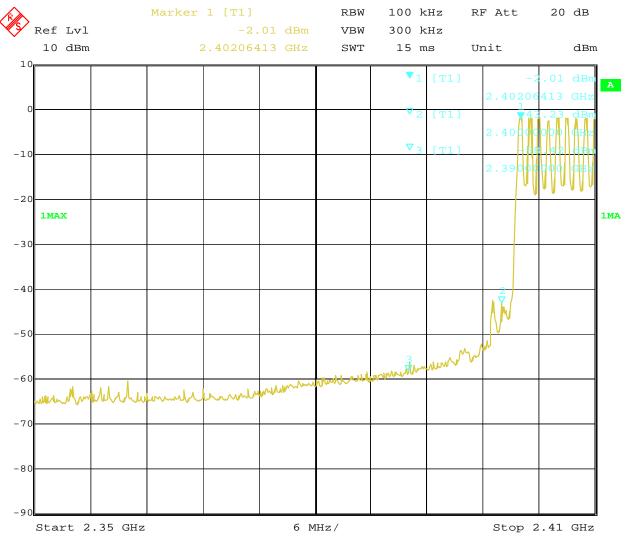

Date: 1.APR.2021 19:27:37

Page 66 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: GFSK

Band Edge Test Result

Product:	PRISM LED LIGHT	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

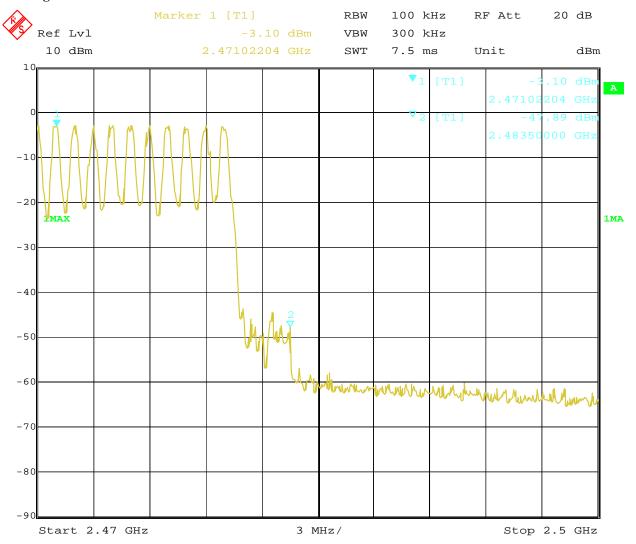

Date: 1.APR.2021 19:32:29

Page 67 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: $\pi/4$ -DQPSK

Out of Band Test Result 12.4

Product:	PRISM LED LIGHT	Test Mode:	Low Channel
Mode	Keeping Transmitting	Test Voltage	DC12V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

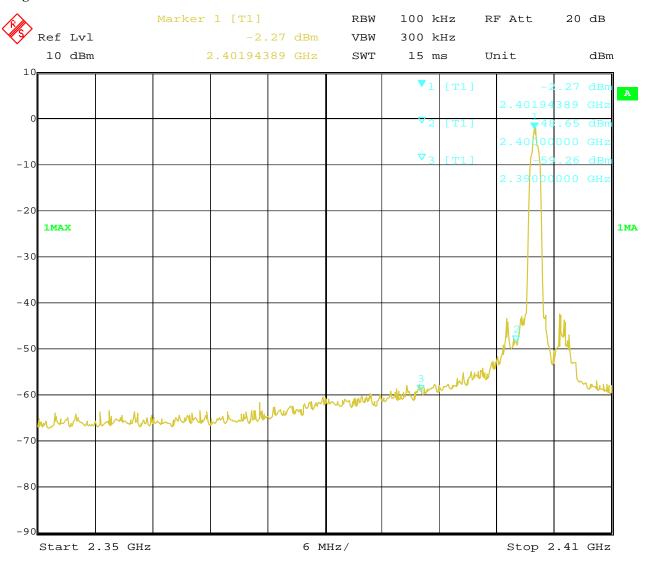

Date: 2.APR.2021 14:56:22

Page 68 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: $\pi/4$ -DQPSK

Band Edge Test Result 12.4

Product:	PRISM LED LIGHT	Test Mode:	High Channel
Mode	Keeping Transmitting	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

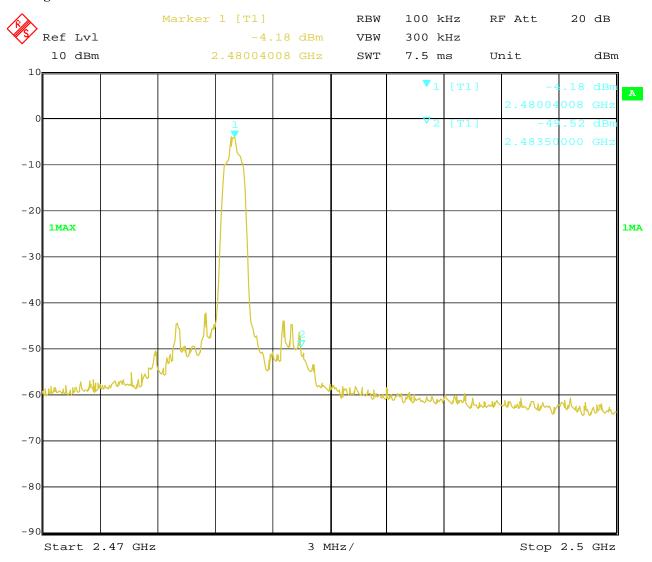

Date: 2.APR.2021 15:02:46

Page 69 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: $\pi/4$ -DQPSK

Out of Band Test Result

Product:	PRISM LED LIGHT	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

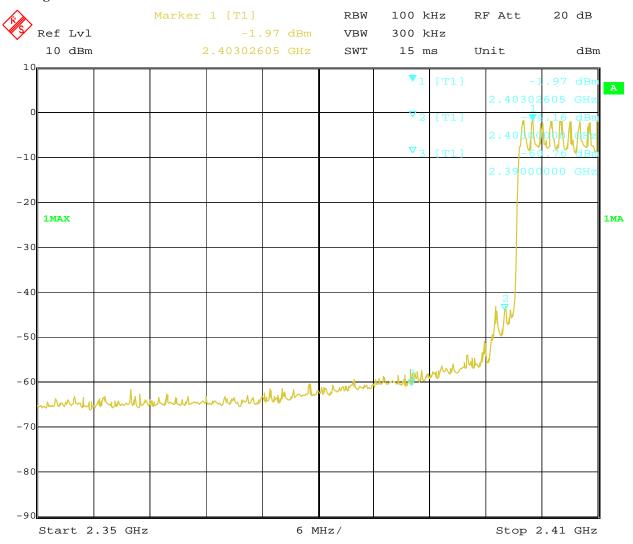

Date: 1.APR.2021 19:41:22

Page 70 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: $\pi/4$ -DQPSK

Out of Band Test Result

Product:	PRISM LED LIGHT	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

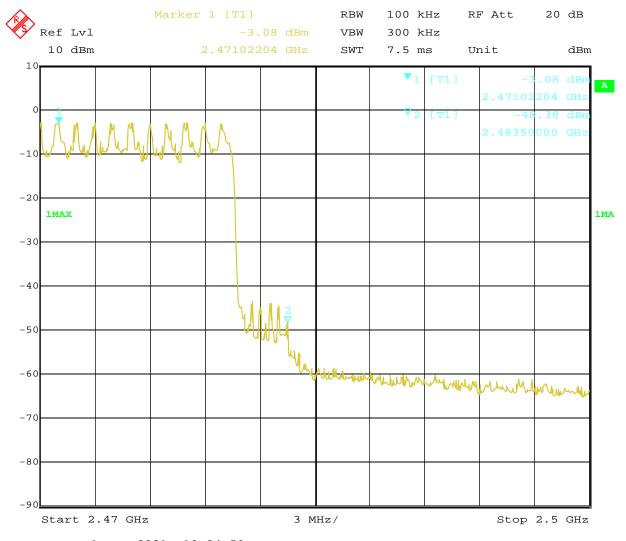

Date: 1.APR.2021 19:34:59

Page 71 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	PRISM LED LIGHT	Test Mode:	Low Channel
Mode	Keeping Transmitting	Test Voltage	DC12V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

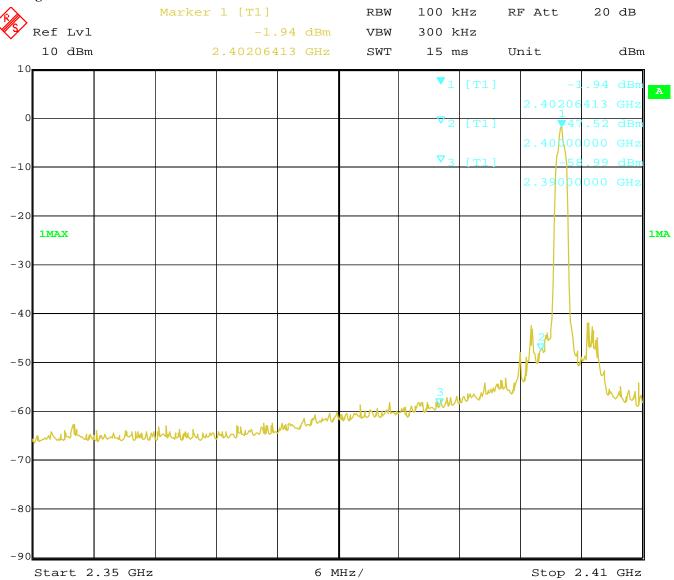

Date: 1.APR.2021 19:44:04 Report No.: TW2103125E

Date: 2021-04-02




Page 72 of 91

Type of Modulation: 8DPSK

Band Edge Test Result 12.4

Product:	PRISM LED LIGHT	Test Mode:	High Channel
Mode	Keeping Transmitting	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

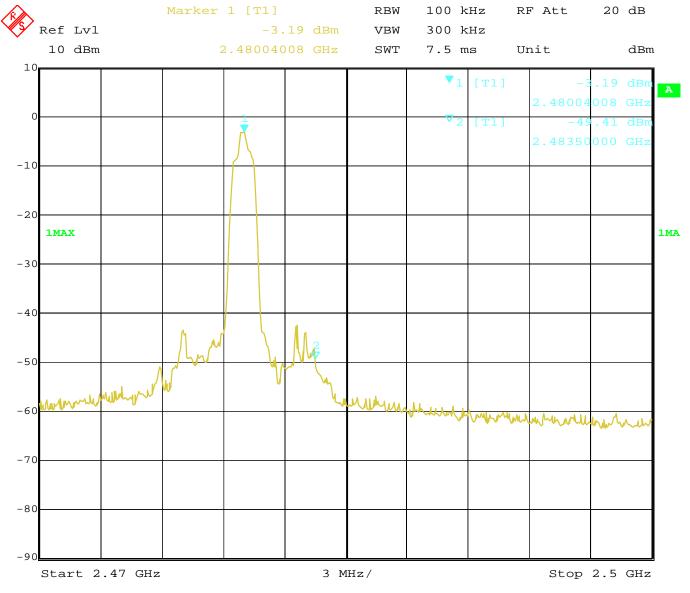

1.APR.2021 19:44:56 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 73 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	PRISM LED LIGHT	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

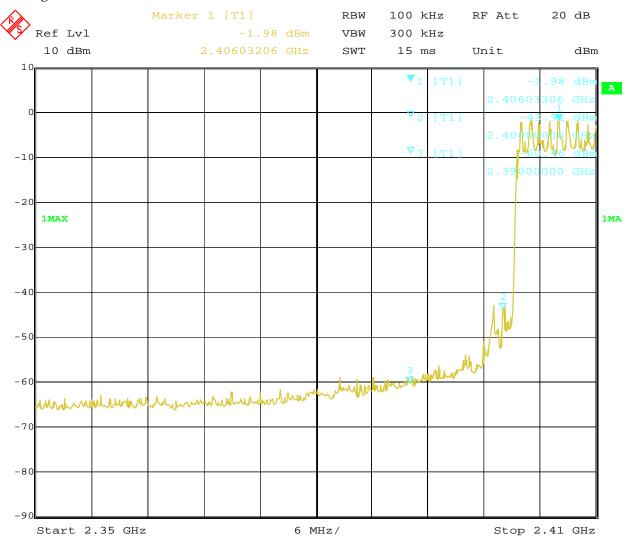

Date: 1.APR.2021 19:43:20

Page 74 of 91 Report No.: TW2103125E

Date: 2021-04-02




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	PRISM LED LIGHT	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

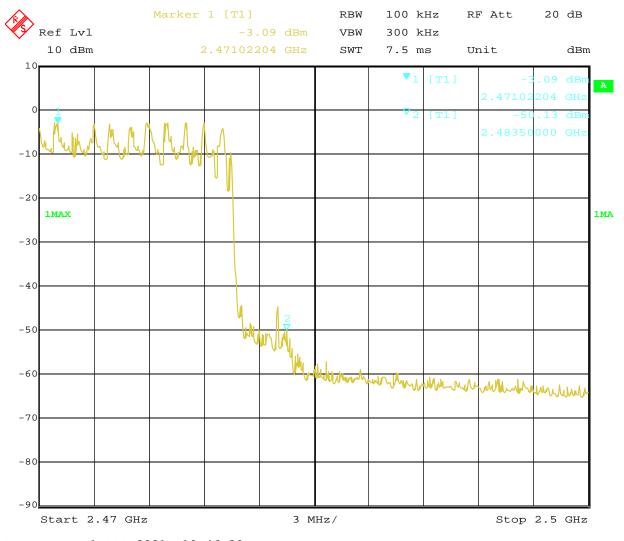


Date: 1.APR.2021 19:46:30

Page 75 of 91 Report No.: TW2103125E

Date: 2021-04-02



12.4 Restrict Band Measurement

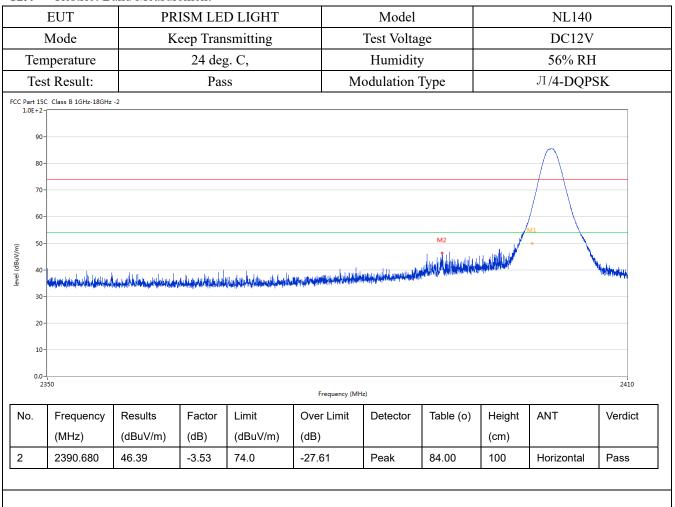

Report No.: TW2103125E Page 76 of 91

Date: 2021-04-02



12.4 Restrict Band Measurement

	EUT	PR	ISM LEI	D LIGHT		Model			NL140		
	Mode	K	eep Tran	smitting	Te	st Voltage			DC12V		
To	emperature		24 deg	g. C,	F	Iumidity		56% RH			
T	est Result:		Pas	SS	Mod	ulation Typ	ne e	Л	/4-DQPSK	-	
FCC Part 1.0E	: 15C Class B 1GHz-18GHz +2-	-2									
	90-										
	80-										
	70-								/ \		
	70-										
							M2	Mj			
	60-	hide administration	Lark Larker Miller	o dansa a sam	ر مان در مان در مان القوارات ا	المعادلة الم	M2			ilato los iv	
level (dBuV/m)	50-	hadiran da kada kada ka		Nadadidira profesiologica	daglah di dinerakan di	handa karantari karantari	M2	AND BURNEY		Maller parties	
level (dBuV/m)	60 - 50 - 40 - 30 -	halle sand de california de la cale	and handle from the first	Nakadidirakentukatekateka	daydalida day ciyabanad	ininal release and pelale	M2				
level (dBuV/m)	60 - 50 - 40 - 40 - 30 - 20 -	hadin asan katalah sabah sabah sabah	ngid kapakitan Mara	Nadadidirentendende de desidade		harad phropologic padab	M2			Make Make	
level (dBuV/m)	60- 50- 40- 30- 20-	hadding mad a family by and adming to	he at he publication to the publication of the publ	Napolista (marija se postaba		harran property and production	M2				
level (dBuV/m)	60 - 50 - 40 - 40 - 30 - 20 -	hadin a sunduk k kulluk kulluk ka kulluk ka kulluk ka kulluk kulluk ka kulluk ka kulluk ka kulluk ka kulluk ka	ng the hand before	Nadadidirentende aberbeitak	Frequency (MH		M2			2410	
level (dBuV/m)	60	Results	Factor	Limit	Frequency (MH	z) Detector	M2 Table (o)	Height	ANT	2410 Verdict	
level (dBuV/m)	60- 50- 40- 30- 20- 10- 0.0- 2350	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	· ·	1		Height (cm)	ANT		

Page 77 of 91 Report No.: TW2103125E

Date: 2021-04-02



12.4 Restrict Band Measurement

EUT	PRISM L	ED LIGHT	Mode	1		NL140)
Mode	Keep Tra	ansmitting	Test Volt	age		DC12V	7
Temperature	24 d	leg. C,	Humidi	ty		56% RI	Н
Test Result:	P	ass	Modulation	Туре		Л/ 4-DQP	PSK
CC Part 15C Class B 1GHz-18GH:	:-2						
90-							
80-							
70-							
60-							
50-	a talah a sa kakaman a sa s						
	ALLE BERTHER ALLES AND ALL		Marine when the state of the st	Marie Andrews agencia agencia and a second and a second agency and a second agency agency agency agency agency	ighad saghturnag hand glade kay belang	A recently help below the parethylate	ogali, des dels sales, e ha
50-	Market Ma		Marine Wheel Control of the State of	drak adappak direktap adapak berlijak di di	ofest in the constitution of the latter	h. Marandrip de John West by grading lin	ngakutu digi piningaba
(RBV/m) 50 - 40 - 40 - 40 - 40 - 40 - 40 - 40 -	Mark Mark Mark Mark Mark Mark Mark Mark		Market with a description of the state of	the transport of the state of t	industrial desiration of the second	k reason by the head of production in	ngakurin digi pakan abu
(@J/Ngp)) a 40 - 40 - 40 - 40 - 40 - 40 - 40 - 40	Mark Mark Mark Mark Mark Mark Mark Mark		Market with a delar part of the parties of	drak adapped assistant and page	in halo, majorida di h	h. Marana kapa da kapa	ngakuta diki pakan atu
30- 20- 10-	Mark Mark Mark Mark Mark Mark Mark Mark	248		And the second s	idadaghirangjandadaddag	d. Alesta ang kalabah di kalabah kalab	
(E) (NBB) 40 - 40 - 40 - 40 - 40 - 40 - 40 - 40	ALLE BERTHER BERTHANDER	248		Andrew Server and Aller Andrew Server Andrew	ishahagiangahabbala	d season had a sea	2500
40	Results Facto		3.5	Table (o)	Height	ANT	
30- 20- 20- 2470			3.5 Frequency (MHz) Ver Limit Detector				2500

Report No.: TW2103125E Page 78 of 91

Date: 2021-04-02



12.4 Restrict Band Measurement

EUT	PR	ISM LED	LIGHT	Mode	1		NL140	
Mode	K	eep Transı	mitting	Test Vol	age		DC12V	
Temperature		24 deg.	C,	Humid	ity		56% RH	I
Test Result:		Pass		Modulation	туре		Л/4-DQP	SK
C Part 15C Class B 1GHz-18Gi 1.0E+2- 90- 80-	Iz -2							
40-41-41-41-41-41-41-41-41-41-41-41-41-41-			2483	3.5 Frequency (MHz)			igaya Almahasiyyee Alban da, aada	2500
30- 20-	Results	Factor			Table (o)	Height	ANT	2500 Verdict
30- 20- 10- 2470	Results (dBuV/m)	Factor (dB)	Limit	Frequency (MHz)	Table (o)	Height (cm)	ANT	

Note: For Restricted band test, only the worst case was reported. And $\pi/4$ -DQPSK modulation was the worst case.

Report No.: TW2103125E

Date: 2021-04-02



Page 79 of 91

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB antenna used. The gain of the antennas is 2.0dBi. (get from the antenna specification provided the applicant)

Report No.: TW2103125E Page 80 of 91

Date: 2021-04-02



FCC ID Label 14.0


FCC ID: 2ANIV-NL140

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

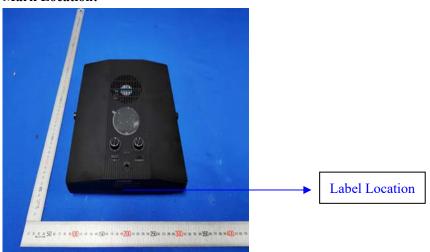

Page 81 of 91


Report No.: TW2103125E

Date: 2021-04-02



15.0 **Photo of testing**

Conducted Emission Test Setup:

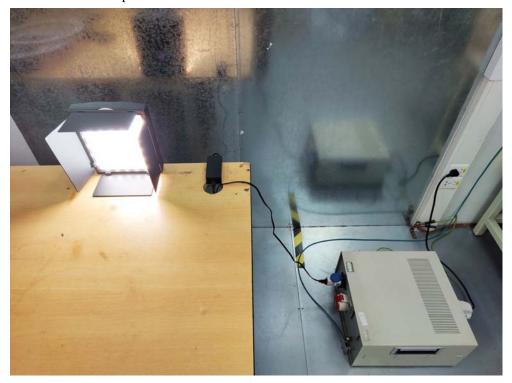


Page 82 of 91


Report No.: TW2103125E

Date: 2021-04-02



Radiated Emission Test Setup:

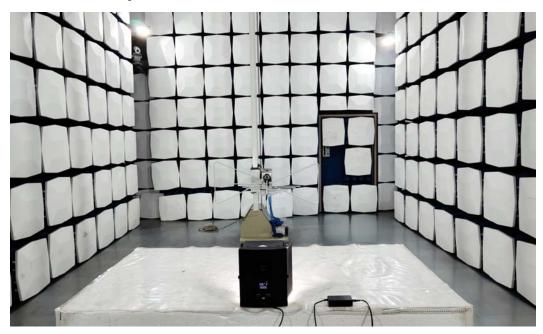

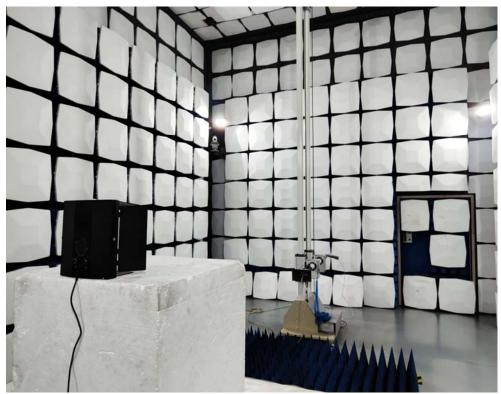

Page 83 of 91


Report No.: TW2103125E

Date: 2021-04-02



Photographs - EUT



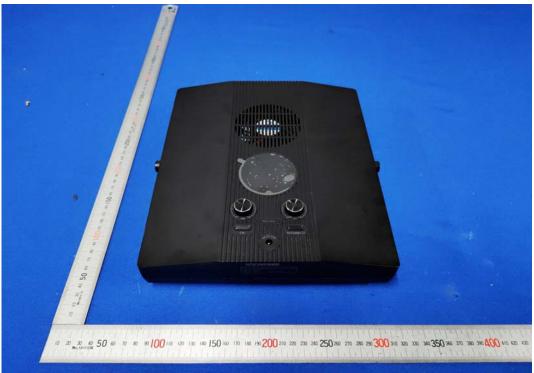

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 84 of 91

Report No.: TW2103125E

Date: 2021-04-02



Photographs - EUT



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 85 of 91

Report No.: TW2103125E

Date: 2021-04-02





Report No.: TW2103125E Page 86 of 91

Date: 2021-04-02






Page 87 of 91

Report No.: TW2103125E

Date: 2021-04-02



Photographs - EUT

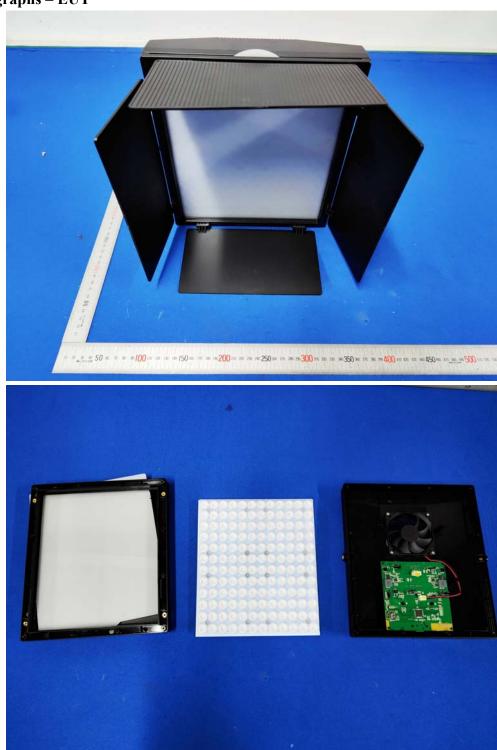

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 88 of 91

Report No.: TW2103125E

Date: 2021-04-02



Photographs - EUT



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to


Page 89 of 91

Report No.: TW2103125E

Date: 2021-04-02



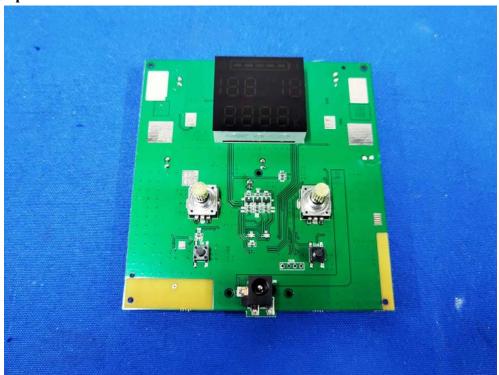

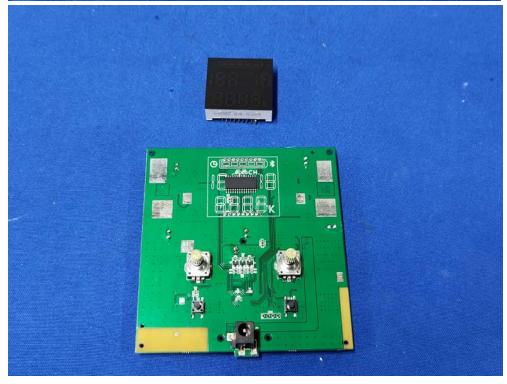


Page 90 of 91

Report No.: TW2103125E

Date: 2021-04-02





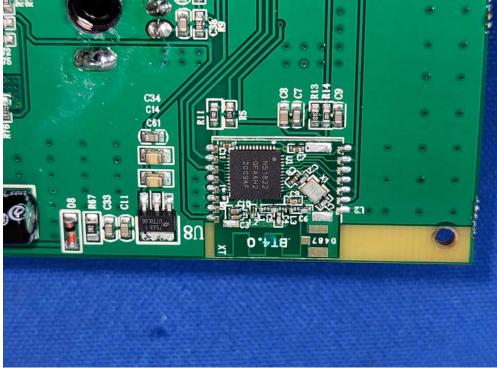


Page 91 of 91

Report No.: TW2103125E

Date: 2021-04-02



Photographs - EUT

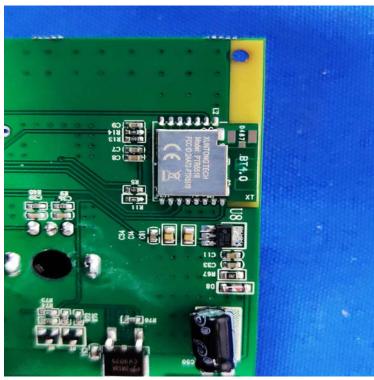



-End of Report-

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to