



America

## **Certification Test Report**

**FCC ID: 2ANIZ-PUR555000**

**IC: 23116-PUR555000**

**FCC Rule Part: 15.247**

**ISED Canada's Radio Standards Specification: RSS-247**

**TÜV SÜD Report Number: RD72130074.200**

Manufacturer: Purillume, Inc.

Model: PUR-01-0100 and PUR-02-0100

Test Begin Date: August 4, 2017

Test End Date: October 31, 2017

Report Issue Date: November 01, 2017



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Prepared by:**

**Jean Tezil**  
EMC Engineer  
TÜV SÜD America, Inc.

**Reviewed by:**

**Randle Sherian**  
Wireless Engineer  
TÜV SÜD America, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 23 pages**

# TABLE OF CONTENTS

<b>1</b>	<b>GENERAL</b>	<b>3</b>
1.1	PURPOSE	3
1.2	PRODUCT DESCRIPTION	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	4
<b>2</b>	<b>TEST FACILITIES</b>	<b>5</b>
2.1	LOCATION	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	6
2.3.1	<i>Semi-Anechoic Chamber Test Site</i>	6
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	7
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES</b>	<b>8</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT</b>	<b>9</b>
<b>5</b>	<b>SUPPORT EQUIPMENT</b>	<b>10</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM</b>	<b>10</b>
<b>7</b>	<b>SUMMARY OF TESTS</b>	<b>11</b>
7.1	ANTENNA REQUIREMENT – FCC: 15.203	11
7.2	POWER LINE CONDUCTED EMISSIONS – FCC: 15.207; ISED CANADA: RSS-GEN 8.8	11
7.2.1	<i>Measurement Procedure</i>	11
7.2.2	<i>Measurement Results</i>	11
7.3	6dB / 99% BANDWIDTH – FCC: 15.247(A)(2); ISED CANADA: RSS-247 5.2(A)	13
7.3.1	<i>Measurement Procedure</i>	13
7.3.2	<i>Measurement Results</i>	13
7.4	FUNDAMENTAL EMISSION OUTPUT POWER – FCC: 15.247(B)(3); ISED CANADA: RSS-247 5.4(D)	15
7.4.1	<i>Maximum peak conducted output power - Measurement Procedure</i>	15
7.4.2	<i>Measurement Results</i>	15
7.5	EMISSION LEVELS – FCC: 15.247(D), 15.205, 15.209; ISED CANADA RSS-247 5.5, RSS-GEN	8.9/8.10
7.5.1	<i>Emissions into Non-Restricted Frequency Bands</i>	16
7.5.1.1	<i>Measurement Procedure</i>	16
7.5.1.2	<i>Measurement Results</i>	16
7.6	EMISSIONS INTO RESTRICTED FREQUENCY BANDS	18
7.6.1.1	<i>Measurement Procedure</i>	18
7.6.1.2	<i>Duty Cycle Correction</i>	18
7.6.1.3	<i>Measurement Results</i>	19
7.6.1.4	<i>Sample Calculation</i>	20
7.7	POWER SPECTRAL DENSITY – FCC: 15.247(E); ISED CANADA: RSS-247 5.2(B)	21
7.7.1	<i>Measurement Procedure</i>	21
7.7.2	<i>Measurement Results</i>	21
<b>8</b>	<b>MEASUREMENT UNCERTAINTY</b>	<b>23</b>
<b>9</b>	<b>CONCLUSION</b>	<b>23</b>

## **1 GENERAL**

### **1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-247 Certification.

### **1.2 Product Description**

Purillume, Inc's LED Table Lamp has two main variants the PUR-01-0000 and the PUR-02-0000. Of these variants, each has the Orchid body style, PUR-01-0100 and PUR-02-0100. All the lamps variants described below are able to be controlled via Bluetooth operating at 2.4GHz. The PUR-01-0100 is the Master lamp, it has a touchscreen for interface. It can have three different finishes on its external body: Birch (PUR-01-0111), Cherry (PUR-01-0112), and Espresso (PUR-01-0113). The PUR-02-0100 is the Satellite lamp, it uses manual knobs and switches for interface. It can also have three different finishes on its external body Birch(PUR-02-0111), Cherry (PUR-02-0112), and Espresso (PUR-02-0113).

Technical Information:

<b>Detail</b>	<b>Description</b>
Frequency Range	2402-2480
Number of Channels	40
Modulation Format	GFSK
Data Rates	2Mbps
Number of Inputs/Outputs	1T/1R
Operating Voltage	120V-60Hz
Antenna Type / Gain	Whip: A24-HABUF-P5i / 2.1dBi
	Module: TE 1513472-5 / 3dBi

Manufacturer Information:

Purillume, Inc.  
612 Ivyshaw Road  
Cary, NC 27519

EUT Serial Numbers: RE: TUV #10 , CE: TUV #7

Test Sample Condition: The test samples were provided in good working order with no visible defects.

### **1.3 Test Methodology and Considerations**

The BTLE transceiver was configured using a terminal application menu which allows basic control of the transceiver, with instructions provided by the client. The interface allows power level and channel control required to support the evaluation. The highest power settings available was used along the entire test suite. The EUT was programmed to generate a continuously modulated signal on each channel investigated. This evaluation was performed using uniquely the 2Mbps data rate as a design choice by the client.

For radiated emissions and AC power line conducted emissions, the model variants mentioned in the product description section and with external body removed were evaluated with both antenna types that can be used with the product. The emissions was slightly higher with the external body removed. Therefore, all testing for radiated emissions and AC power line conducted emissions was performed with the external body skin removed. The current report presents the results for the worst-case variant in both antenna configurations. The EUT was placed in the orientation of normal use.

For RF conducted measurements, a u/fl to SMA short RF cable was used to tap into a connector on the RF board which provides connection to the Front-end of the transceiver.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America Inc.  
2320 Presidential Drive, Suite 101  
Durham, NC 27703  
Phone: (919) 381-4235

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

TÜV SÜD America Inc. is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

FCC Registered Test Site Number: 637011  
ISED Canada Test Site Registration Number: 20446

## 2.3 Radiated Emissions Test Site Description


### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

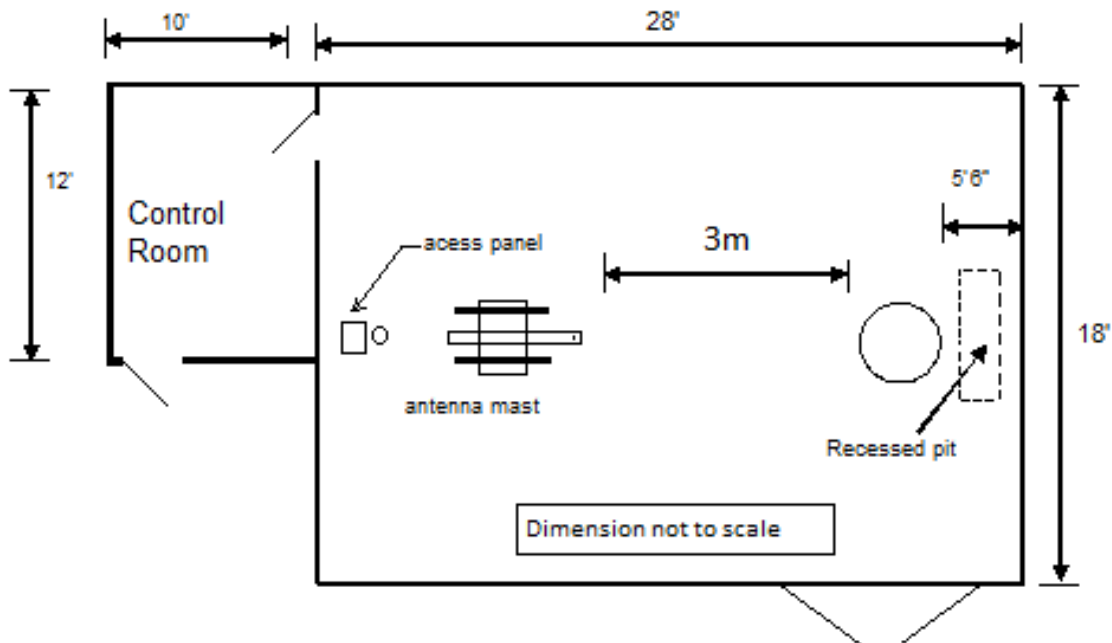


**Figure 2.3-1: Semi-Anechoic Chamber Test Site**

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.4-1:

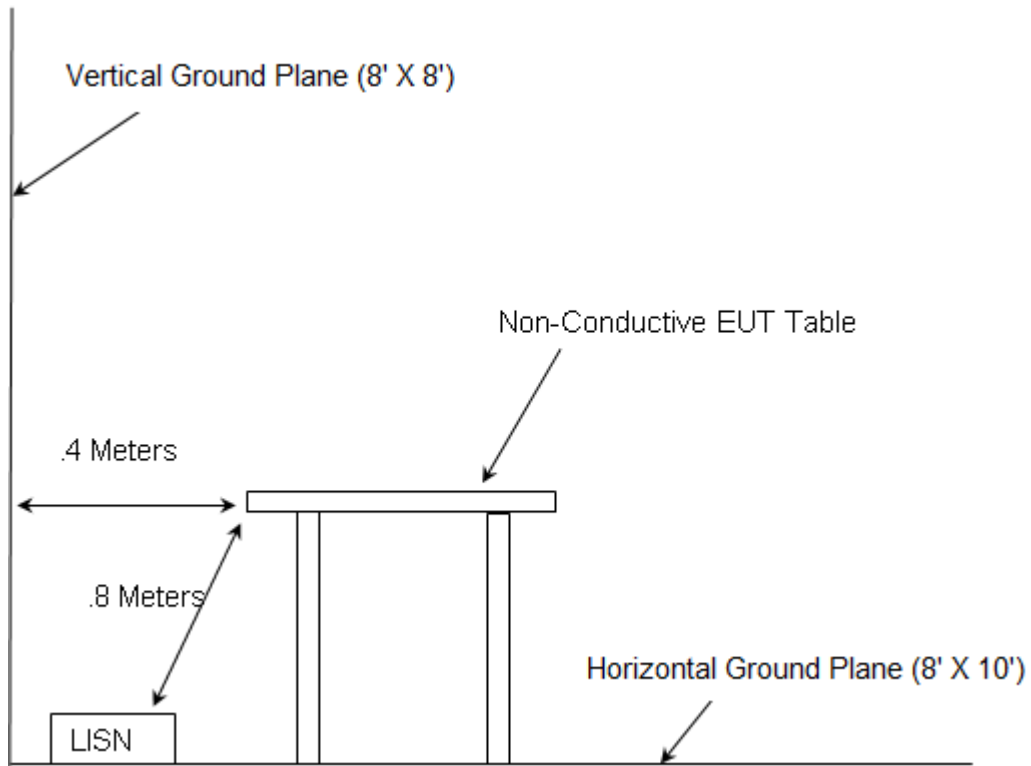

**Figure 2.4-1: AC Mains Conducted EMI Site**

### **3 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2017
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2017
- ❖ FCC KDB 558074 D01 DTS Meas Guidance v04 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, April 5, 2017
- ❖ ISED Canada Radio Standards Specification: RSS-247, Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 2, February 2017
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014



#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

Asset ID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
277	EMCO	93146	Antennas	9904-5199	9/12/2016	9/12/2018
626	EMCO	3110B	Antennas	9411-1945	3/21/2017	3/21/2019
3002	Rohde & Schwarz	ESU40	Receiver	100346	7/24/2017	7/24/2018
3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	1/11/2017	1/11/2018
3007	Rohde & Schwarz	TS-PR26	Amplifiers	100051	1/11/2017	1/11/2018
3011	Rohde & Schwarz	ENV216	LISN	3011	1/12/2017	1/12/2018
3012	Rohde & Schwarz	EMC32-EB	Software	100731	NCR	NCR
3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antennas	2013120203	1/26/2016	1/26/2018
3027	Micro-Tronics	BRM50702	Filter	175	1/13/2017	1/13/2018
3028	Micro-Tronics	HPM50111	Filter	122	1/13/2017	1/13/2018
3033	Hasco, Inc.	HLL142-S1-S1-36	Cables	1435	1/11/2017	1/11/2018
3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	1/3/2017	1/3/2018
3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	1/3/2017	1/3/2018
3045	Aeroflex Inmet	18N10W-20	Attenuator	1437	1/3/2017	1/3/2018
3049	Aeroflex Inmet	26AH-20	Attenuator	1443	1/11/2017	1/11/2018
3055	Rohde & Schwarz	3005	Cables	3055	1/3/2017	1/3/2018
3057	Advanced Technical Materials	42-441-6/BR	Antennas	R110602	NCR	NCR
3059	Mountain View Cable	A	Cables	3059	1/11/2017	1/11/2018
3085	Rohde & Schwarz	FSW43	Spectrum Analyzer	103997	6/9/2017	6/9/2018

NCR = No Calibration Required

DMAS MT-25 RF absorber material was used on the floor for all final measurements above 1 GHz.

Asset 3002: Firmware Version: ESU40 is 4.73 SP4

Asset 3012: Software Version: EMC32-B is 9.15

Asset 3085: Instrument Firmware 2.41 SP1

## 5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Purillume Inc	PUR-01-0000	TUV SUD 10
2	120V AC lamp	General Electric	60W	N/A

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Power Cable	1.85m	None	1 to AC
B	AC power Cable	2 m	None	2 to 1

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

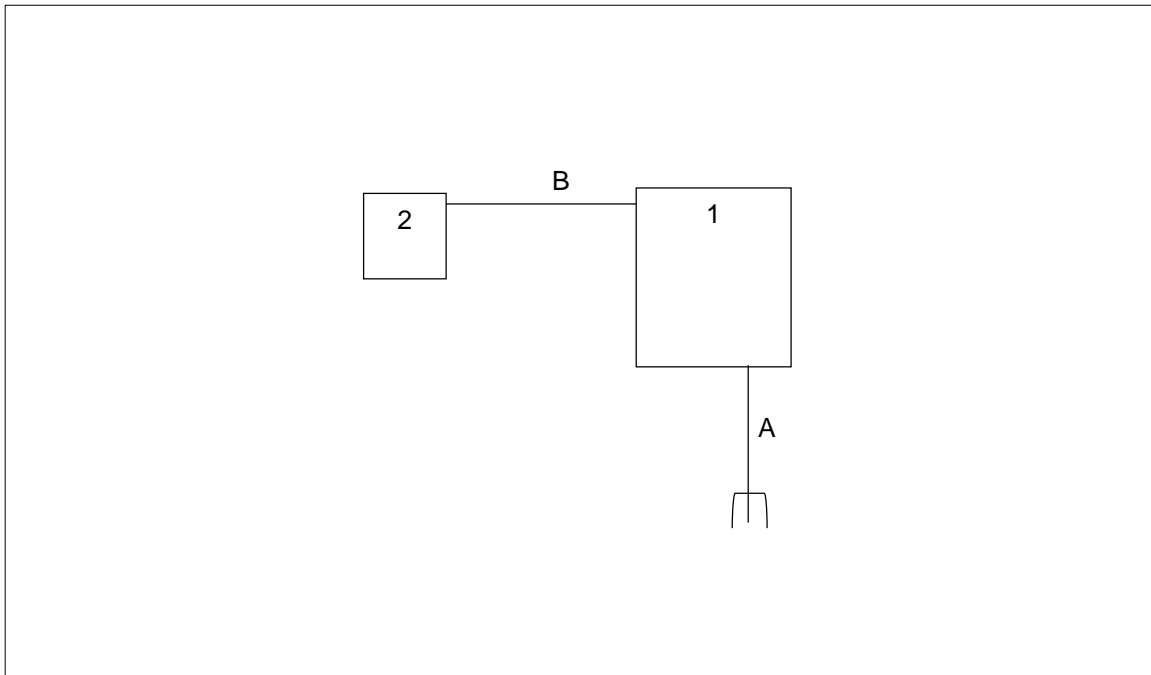


Figure 6-1: EUT Test Setup

**7 SUMMARY OF TESTS**

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

**7.1 Antenna Requirement – FCC: 15.203**

The antenna is integral to the device and cannot be removed or replaced by the end user. Therefore, the antenna requirement stated in section 15.203 is met.

**7.2 Power Line Conducted Emissions – FCC: 15.207; ISED Canada: RSS-Gen 8.8**

**7.2.1 Measurement Procedure**

ANSI C63.10-2013 section 6 was the guiding document for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer’s resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

**Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss**

**Margin = Applicable Limit - Corrected Reading**

**7.2.2 Measurement Results**

Performed by: Jean Tezil

**Table 7.2.2-1: Conducted EMI Results – Line 1**

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154000	50.76	---	65.76	15.00	5000.0	9.000	L1	OFF	9.7
0.154000	---	38.64	55.76	17.12	5000.0	9.000	L1	OFF	9.7
0.158000	53.94	---	65.53	11.59	5000.0	9.000	L1	OFF	9.7
0.158000	---	41.83	55.53	13.70	5000.0	9.000	L1	OFF	9.7
0.164000	---	44.54	55.19	10.65	5000.0	9.000	L1	OFF	9.7
0.164000	54.80	---	65.20	10.40	5000.0	9.000	L1	OFF	9.7
0.232000	---	16.92	52.15	35.23	5000.0	9.000	L1	OFF	9.7
0.232000	30.35	---	62.19	31.84	5000.0	9.000	L1	OFF	9.7
0.400000	---	7.02	47.71	40.69	5000.0	9.000	L1	OFF	9.7
0.400000	12.73	---	57.73	45.00	5000.0	9.000	L1	OFF	9.7
0.840000	---	1.39	46.00	44.61	5000.0	9.000	L1	OFF	9.7
0.840000	6.99	---	56.00	49.01	5000.0	9.000	L1	OFF	9.7
3.460000	---	-1.96	46.00	47.96	5000.0	9.000	L1	OFF	9.8
3.460000	4.01	---	56.00	51.99	5000.0	9.000	L1	OFF	9.8
12.598000	---	17.10	50.00	32.90	5000.0	9.000	L1	OFF	10.0
12.598000	25.69	---	60.00	34.31	5000.0	9.000	L1	OFF	10.0
29.974000	---	19.31	50.00	30.69	5000.0	9.000	L1	OFF	10.2
29.974000	25.99	---	60.00	34.01	5000.0	9.000	L1	OFF	10.2

Table 7.2.2-2: Conducted EMI Results – Line 2

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154000	52.69	---	65.76	13.07	5000.0	9.000	N	OFF	9.6
0.154000	---	40.00	55.76	15.76	5000.0	9.000	N	OFF	9.6
0.158000	54.73	---	65.53	10.80	5000.0	9.000	N	OFF	9.6
0.158000	---	42.38	55.53	13.15	5000.0	9.000	N	OFF	9.6
0.168000	---	43.98	54.97	10.99	5000.0	9.000	N	OFF	9.6
0.168000	54.08	---	64.99	10.91	5000.0	9.000	N	OFF	9.6
0.396000	---	8.64	47.79	39.15	5000.0	9.000	N	OFF	9.7
0.396000	13.33	---	57.81	44.48	5000.0	9.000	N	OFF	9.7
0.688000	---	3.75	46.00	42.25	5000.0	9.000	N	OFF	9.7
0.688000	9.52	---	56.00	46.48	5000.0	9.000	N	OFF	9.7
4.344000	---	-2.76	46.00	48.76	5000.0	9.000	N	OFF	9.8
4.344000	3.06	---	56.00	52.94	5000.0	9.000	N	OFF	9.8
12.470000	---	12.13	50.00	37.87	5000.0	9.000	N	OFF	10.0
12.470000	21.33	---	60.00	38.67	5000.0	9.000	N	OFF	10.0
29.962000	26.44	---	60.00	33.56	5000.0	9.000	N	OFF	10.2
29.962000	---	19.76	50.00	30.24	5000.0	9.000	N	OFF	10.2
29.990000	26.77	---	60.00	33.23	5000.0	9.000	N	OFF	10.2
29.990000	---	20.27	50.00	29.73	5000.0	9.000	N	OFF	10.2

7.3 6dB / 99% Bandwidth – FCC: 15.247(a)(2); ISED Canada: RSS-247 5.2(a)

7.3.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v04. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 3 times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth.

7.3.2 Measurement Results

Performed by: Jean Tezil

Table 7.3.2-1: 6dB / 99% Bandwidth

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
2402	1.358	2.120
2440	1.397	2.098
2480	1.485	2.108

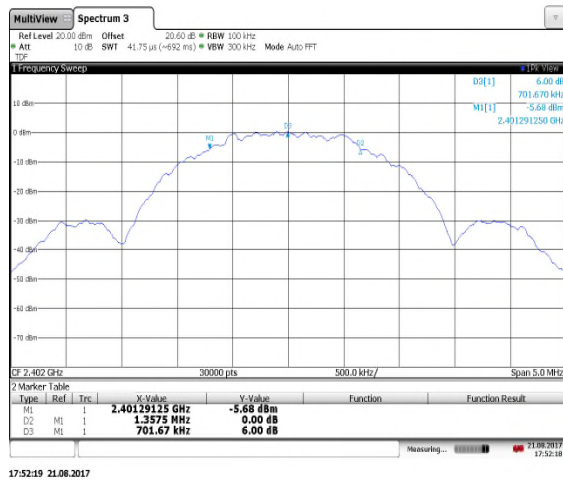


Figure 7.3.2-1: 6dB Bandwidth Low Channel



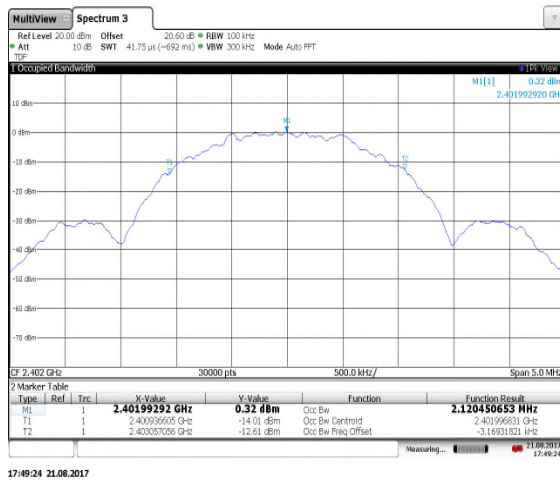


Figure 7.3.2-2: 99% Bandwidth Low Channel

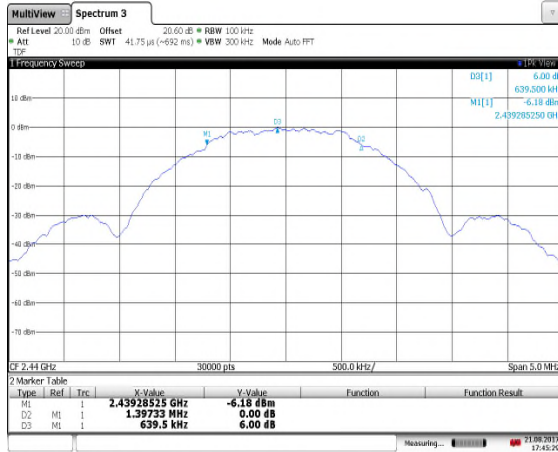


17:45:29 21.08.2017

Figure 7.3.2-3: 6dB Bandwidth Mid Channel

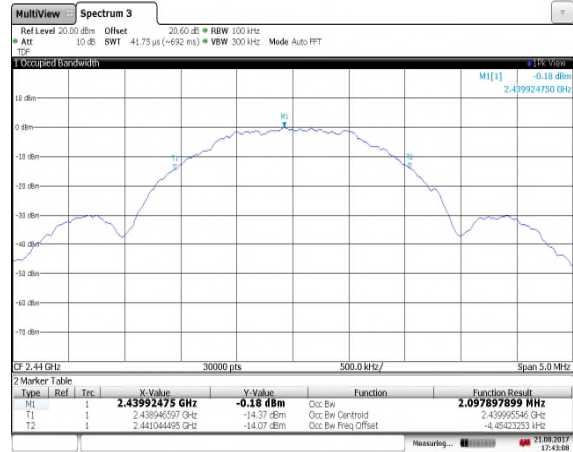


17:43:08 21.08.2017

Figure 7.3.2-4: 99% Bandwidth Mid Channel

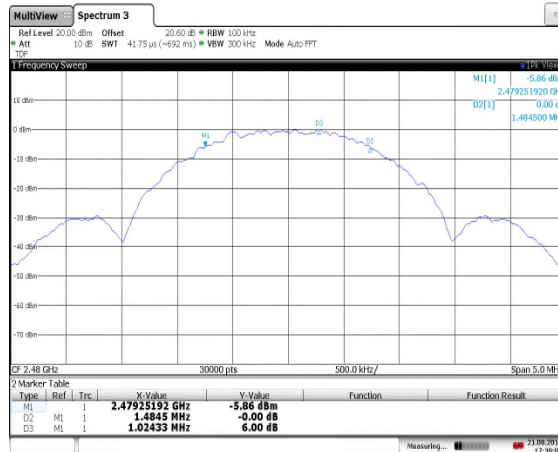

17:39:01 21.08.2017

Figure 7.3.2-5: 6dB Bandwidth High Channel

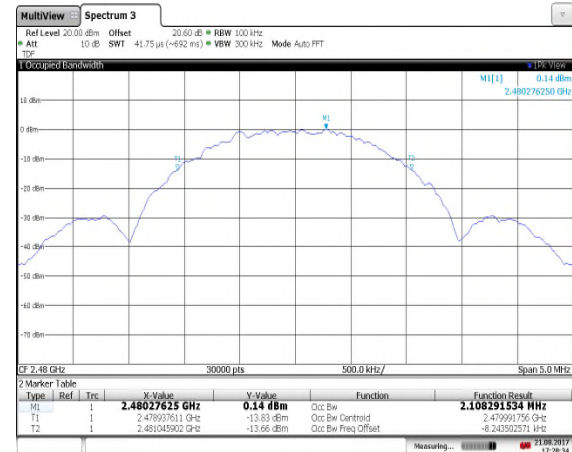

17:28:34 21.08.2017

Figure 7.3.2-6: 99% Bandwidth High Channel

**7.4 Fundamental Emission Output Power – FCC: 15.247(b)(3); ISED Canada: RSS-247 5.4(d)**

**7.4.1 Maximum peak conducted output power - Measurement Procedure**

The maximum peak conducted output power was measured in accordance with FCC KDB 558074 D01 DTS Measurement Guidance v04 utilizing the PKPM1 Peak power meter method. The RF output of the equipment under test was directly connected to the input of the peak power meter applying suitable attenuation.

**7.4.2 Measurement Results**

Performed by: Jean Tezil

**Table 7.4.2-1: Maximum Peak Conducted Output Power**

<b>Frequency (MHz)</b>	<b>Output Power (dBm)</b>
2402	4.53
2440	4.68
2480	4.72

7.5 Emission Levels – FCC: 15.247(d), 15.205, 15.209; ISED Canada RSS-247 5.5, RSS-Gen 8.9/8.10

7.5.1 Emissions into Non-Restricted Frequency Bands

7.5.1.1 Measurement Procedure

The unwanted emissions into non-restricted bands were measured conducted in accordance with FCC KDB 558074 D01 DTS Measurement Guidance v04. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 300 kHz. The trace was set to max hold with a peak detector active. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit. The spectrum span was then adjusted for the measurement of spurious emissions from 30 MHz to 25GHz, 10 times the highest fundamental frequency.

Band-edge compliance was determined using the conducted marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dBc below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

7.5.1.2 Measurement Results

Performed by: Jean Tezil

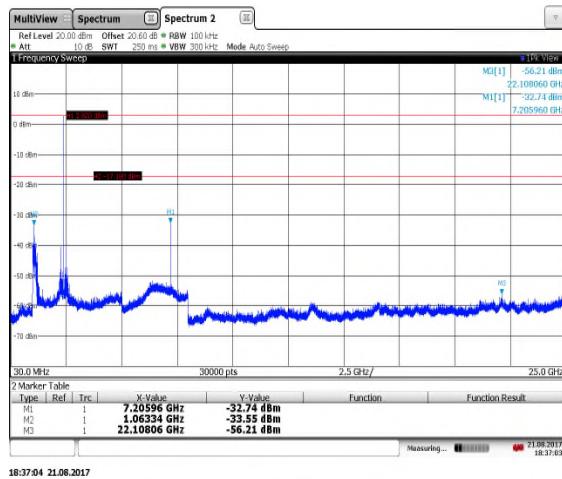


Figure 7.5.1.2-1: 30 MHz – 25 GHz – LCH

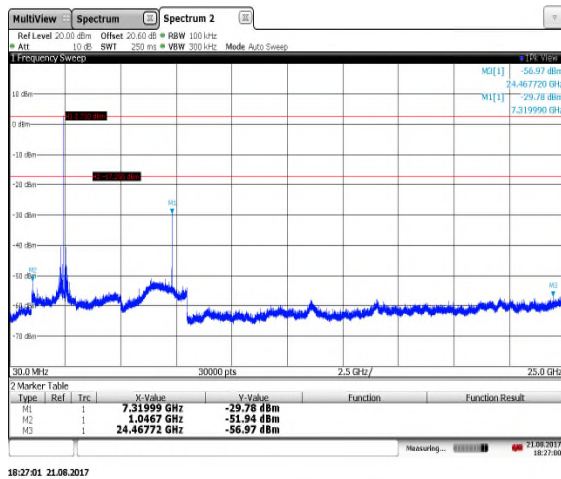


Figure 7.5.1.2-2: 30 MHz – 25 GHz – MCH



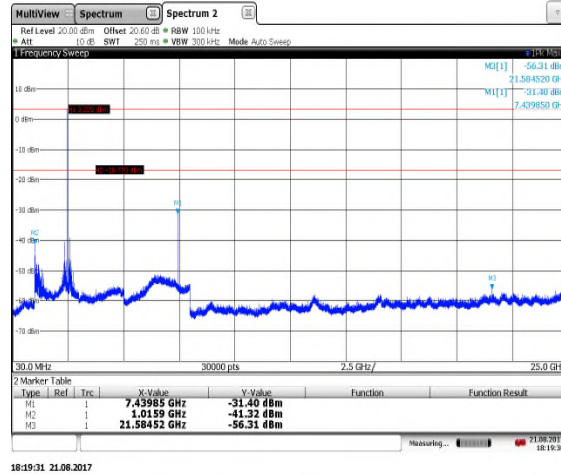


Figure 7.5.1.2-3: 30 MHz – 25 GHz – HCH

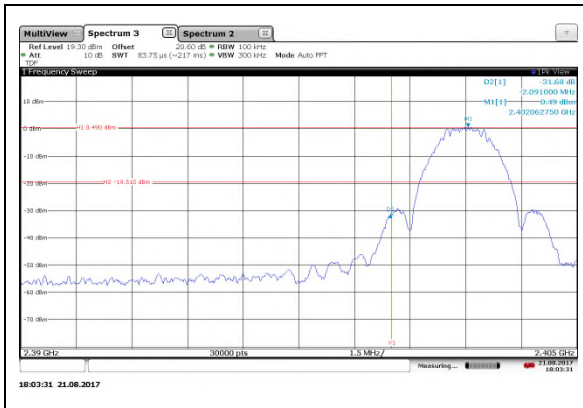


Figure 7.5.1.2-4: Lower Band-edge - LCH

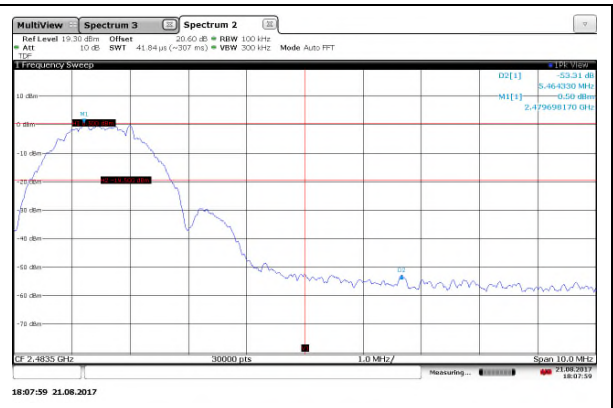


Figure 7.5.1.2-5: Upper Band-edge – HCH

## **7.6 Emissions into Restricted Frequency Bands**

### **7.6.1.1 Measurement Procedure**

The unwanted emissions into restricted bands were measured radiated over the frequency range of 30MHz to 25GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a RBW of 120 kHz and a VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively. Additionally, a pre-scan was performed from 9 kHz or the lowest frequency generated to 30 MHz.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

### **7.6.1.2 Duty Cycle Correction**

For average radiated measurements, using a 22.88% duty cycle, the measured level was reduced by a factor 12.81 dB. The duty cycle correction factor is determined using the formula:  $20\log(22.88/100) = -12.9$  dB.

A detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying the application for certification.

7.6.1.3 Measurement Results

Performed by: Charles Callis

Table 7.6.1.3-1: Radiated Spurious Emissions Tabulated Data – Whip Antenna

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Low Channel = 2402 MHz</b>										
2335.9	51.30	40.60	H	-3.84	47.46	23.95	74.0	54.0	26.5	30.1
2336	55.00	48.90	V	-3.84	51.16	32.25	74.0	54.0	22.8	21.8
4804	42.10	30.60	H	3.68	45.78	21.47	74.0	54.0	28.2	32.5
4804	46.60	35.00	V	3.68	50.28	25.87	74.0	54.0	23.7	28.1
<b>Middle Channel = 2440 MHz</b>										
127.4		30.5	V	12.30	-----	42.80	-----	43.5	-----	0.7
4880	41.40	28.80	H	3.67	45.07	19.66	74.0	54.0	28.9	34.3
4880	42.40	29.90	V	3.67	46.07	20.76	74.0	54.0	27.9	33.2
7320	51.60	42.90	H	7.87	59.47	37.95	74.0	54.0	14.5	16.0
7320	58.70	50.70	V	7.87	66.57	45.75	74.0	54.0	7.4	8.2
<b>High Channel = 2480 MHz</b>										
2483.5	58.5	37.9	H	-3.46	55.04	21.63	74.0	54.0	19.0	32.4
2483.6	65.9	44	V	-3.46	62.44	27.73	74.0	54.0	11.6	26.3
4960	39.80	27.00	H	3.65	43.45	17.84	74.0	54.0	30.6	36.2
4960	41.90	26.70	V	3.65	45.55	17.54	74.0	54.0	28.5	36.5
7440	52.90	44.50	H	8.48	61.38	40.17	74.0	54.0	12.6	13.8
7440	60.10	52.20	V	8.48	68.58	47.87	74.0	54.0	5.4	6.1

Table 7.6.1.3-2: Radiated Spurious Emissions Tabulated Data – Module Antenna

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Low Channel = 2402 MHz</b>										
2337.9	50.50	39.50	H	-3.84	46.66	22.85	74.0	54.0	27.3	31.1
2338.1	50.90	41.60	V	-3.84	47.06	24.95	74.0	54.0	26.9	29.0
4804	42.50	27.50	H	3.68	46.18	18.37	74.0	54.0	27.8	35.6
4804	44.50	28.20	V	3.68	48.18	19.07	74.0	54.0	25.8	34.9
<b>Middle Channel = 2440 MHz</b>										
4880	43.20	31.40	V	3.67	46.87	22.26	74.0	54.0	27.1	31.7
7320	54.50	46.00	H	7.87	62.37	41.05	74.0	54.0	11.6	12.9
7320	52.80	44.30	V	7.87	60.67	39.35	74.0	54.0	13.3	14.6
<b>Middle Channel = 2480 MHz</b>										
2486.9	50.1	34.4	H	-3.45	46.65	18.14	74.0	54.0	27.3	35.9
2484.2	54.6	36.5	V	-3.46	51.14	20.23	74.0	54.0	22.9	33.8
4960	40.50	27.70	H	3.65	44.15	18.54	74.0	54.0	29.9	35.5
4960	42.80	31.20	V	3.65	46.45	22.04	74.0	54.0	27.6	32.0
7440	54.10	45.90	H	8.48	62.58	41.57	74.0	54.0	11.4	12.4
7440	53.00	44.50	V	8.48	61.48	40.17	74.0	54.0	12.5	13.8

Note: Duty Cycle correction factor used: 22.88%

**7.6.1.4 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

$CF_T$	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
$R_U$	=	Uncorrected Reading
$R_C$	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

**Example Calculation: Peak**

Corrected Level:  $51.3 - 3.84 = 47.46$  dBuV/m

Margin:  $74\text{dBuV/m} - 47.46\text{dBuV/m} = 26.5\text{dB}$

**Example Calculation: Average**

Corrected Level:  $40.6 - 3.84 - 12.81 = 23.95$ dBuV

Margin:  $54\text{dBuV} - 23.95\text{dBuV} = 30.1\text{dB}$

7.7 Power Spectral Density – FCC: 15.247(e); ISED Canada: RSS-247 5.2(b)

7.7.1 Measurement Procedure

The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v04 utilizing the PKPSD (peak PSD) method. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 3 kHz. The Video Bandwidth (VBW) was set to 10 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active.

7.7.2 Measurement Results

Performed by: Jean Tezil

Table 7.7.2-1: Peak Power Spectral Density

Frequency (MHz)	PSD Level (dBm)
2402	-12.9
2440	-12.0
2480	-12.0

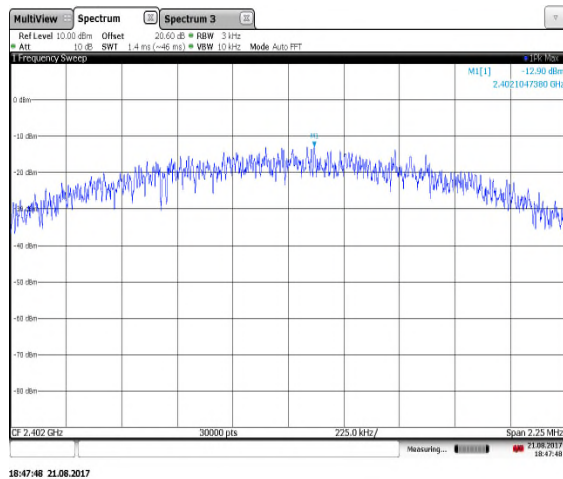


Figure 7.7.2-1: PSD Plot –LCH

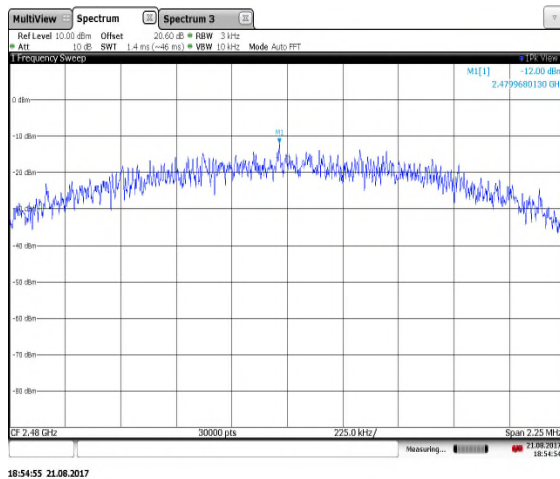


Figure 7.7.2-2: PSD Plot – MCH

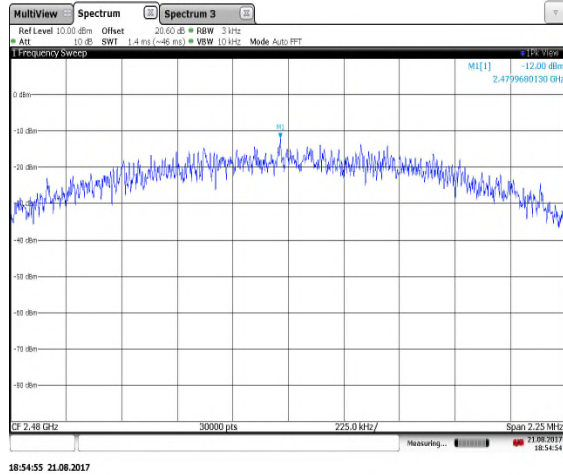


Figure 7.7.2-3: PSD Plot – HCH

## **8 MEASUREMENT UNCERTAINTY**

The expanded laboratory measurement uncertainty figures ( $U_{\text{Lab}}$ ) provided below correspond to an expansion factor (coverage factor)  $k = 1.96$  which provide confidence levels of 95%.

<b>Parameter</b>	<b><math>U_{\text{lab}}</math></b>
<b>Occupied Channel Bandwidth</b>	<b><math>\pm 0.004\%</math></b>
<b>RF Conducted Output Power</b>	<b><math>\pm 0.689 \text{ dB}</math></b>
<b>Power Spectral Density</b>	<b><math>\pm 0.5 \text{ dB}</math></b>
<b>Antenna Port Conducted Emissions</b>	<b><math>\pm 2.717 \text{ dB}</math></b>
<b>Radiated Emissions</b>	<b><math>\pm 5.877 \text{ dB}</math></b>
<b>Temperature</b>	<b><math>\pm 0.860 \text{ }^\circ\text{C}</math></b>
<b>Radio Frequency</b>	<b><math>\pm 2.832 \times 10^{-8}</math></b>
<b>AC Power Line Conducted Emissions</b>	<b><math>\pm 2.85</math></b>

## **9 CONCLUSION**

In the opinion of TÜV SÜD America Inc. the PUR-01-0100 and PUR-02-0100, manufactured by Purillume, Inc. meets the requirements of FCC Part 15 subpart C and ISED Canada Radio Standards Specification: RSS-247 for the tests documented herein.

**END REPORT**