



RF TEST REPORT FOR FCC

RZBG(W)20220421002-1

Applicant : TianJin HuaLai Technology Co.,Ltd.
Address : No.10 JinPing Road, Ya An Street, Nankai District Tianjin, China.
Product Name : Ailofy Bulb Color
Type/Model : AIBC-A
FCC ID : 2ANJH-AIBC-A
TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 Sub-part C 15.247:Radio Frequency Device:Sub-part C;Intentional radiators.

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Date of issue: Aug. 9, 22

Prepared by

Reviewed by:

Issued by:

Hao Wei (Project engineer)

Haohui Qiu (Reviewer)

Bing Cai (General Manager)

Hao Wei

Haohui Qiu

Bing Cai





Content

SUMMARY	1
CONTENT	2
1. GENERAL INFORMATION OF EUT	3
1.1 Applicant information	3
1.2 Manufacture information.....	3
1.3 General description for equipment under test(EUT)	3
1.4 Technical information of equipment under test (EUT)	4
1.5 The mode of the EUT operation	6
1.6 Additional instructions	7
2. DESCRIPTION OF TEST FACILITY	8
3. SUMMARY OF TEST RESULT	9
3.1 Test standard.....	9
3.2 Verdict	9
4. GENERAL TEST CONFIGURATION	10
4.1 Test environments.....	10
4.2 Test Equipment	10
4.3 Measurement uncertainty	11
4.4 Description of test setup	11
4.5 Measurement results explanation example.....	13
4.5.1 For conducted test items:	13
4.5.2 For radiated band edges and spurious emission test:.....	13
5. TEST ITEMS	14
5.1 Antenna Requirements	14
5.2 Output Power	15
5.3 6dB Bandwidth	16
5.4 Conducted Spurious Emission	17
5.5 Band Edge (Authorized-band band-edge)	19
5.6 Conducted Emission	21
5.7 Radiated Spurious Emission	22
5.8 Band Edge(Restricted-band band-edge)	26
5.9 Power Spectral density(PSD)	27
ANNEX A TEST RESULT	28
A.1 MAXIMUM CONDUCTED OUTPUT POWER	28
A.2 DTS BANDWIDTH AND OCCUPIED CHANNEL BANDWIDTH	29
A.3 CONDUCTED SPURIOUS EMISSION	42
A.4 BAND EDGE (AUTHORIZE BAND-EDGE)	61
A.5 AC POWER LINE CONDUCTED EMISSION	66
A.6 RADIATED EMISSION	68
A.7 BAND EDGE (RESTRICTED BAND-EDGE)	75
A.8 POWER SPECTRAL DENSITY	84
ANNEX B TEST SETUP PHOTOGRAPH	91
ANNEX C EUT INTERNAL PHOTOGRAPH	91
ANNEX D EUT EXTERNAL PHOTOGRAPH	91
ANNEX E REVISION HISTORY	92



1. GENERAL INFORMATION OF EUT

1.1 Applicant information

Applicant	TianJin HuaLai Technology Co.,Ltd.
Address	No.10 JinPing Road, Ya An Street, Nankai District Tianjin, China.
Contact person	Mengli Li
Phone number	15102259016

1.2 Manufacture information

Manufacture	TianJin HuaLai Technology Co.,Ltd.
Address	No.10 JinPing Road, Ya An Street, Nankai District Tianjin, China.

1.3 General description for equipment under test(EUT)

EUT name	Ailofy Bulb Color
Trade name	Ailofy
Under test mode name	AIBC-A
Series model name	N/A
Description of different model name	N/A
Hardware version	0.0.0.0
Software version	4.13.0.0
Network and Wireless connectivity	IEEE 802.11b/g/n (HT20/HT40)



1.4 Technical information of equipment under test (EUT)

Operate Freq. range	Frequency range (MHz)	Modulation	Channel bandwidth (MHz)	Date rate (Mbps)
IEEE 802.11b	2412-2462	DSSS/CCK	20	Up to 11
IEEE 802.11g	2412-2462	OFDM	20	Up to 54
IEEE 802.11n(20MHz)	2412-2462	OFDM	20	Up to 72.2
IEEE 802.11n(40MHz)	2422-2452	OFDM	40	Up to 150
Test channel	Low(2412 for 20MHz bandwidth,2422 for 40MHz bandwidth) Middle(2437 for 20MHz bandwidth,2437 for 40MHz bandwidth) High(2462 for 20MHz bandwidth,2452 for 40MHz bandwidth)			
Maximum RF Output Power(dBm)	IEEE 802.11b:23.54 IEEE 802.11g:24.23 IEEE 802.11n(20MHz):23.28 IEEE 802.11n(40MHz):22.41			
FCC ID	2ANJH-AIBC-A			
Equipment type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location			
About the Product	This wifi is used for data transmission			
Antenna Type	Monopole Rod Antenna			
Antenna Gain	1.33 dBi			

Note:The antenna gain was declared by the manufacture.

The requirement for the following technical information of the EUT was tested in this report:

Support channel:

Note: the bold fonts channels are test low, middle and high channels.

Channel	Frequency	Channel	Frequency
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		



Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n-20MHz)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11n-40MHz)	BPSK	13.5
	QPSK	27/40.5
	16QAM	54/81/108
	64QAM	121.5/135

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

802.11b: 1Mbps

802.11g: 6Mbps

802.11n20 and 802. 11n20 (SISO): MCS0

802.11n40 and 802. 11n40 (SISO): MCS0



1.5 The mode of the EUT operation

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
6dB Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Duty cycle	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/11	3/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9



1.6 Additional instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

EUT Software Settings:

Power level setup in software			
Test Software Version	EspRFTTestTool_v2.8		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	L540
Mode	Channel	Soft Set of power level	
802.11 b	All	N/A	
802.11 g	All	N/A	
802.11 n20	All	N/A	
802.11 n40	All	N/A	

NOTE: The power setting value is the default value

Sample received date : 2022.05.20
Date of test : 2022-05-20 ~ 2022.06.12



2. DESCRIPTION OF TEST FACILITY

☒ Company Name	Hangzhou TDT Technologies Co., Ltd.
Address	Room 101, Building 3, No. 12, Binwen Road, Xixing Street, Binjiang district, Hangzhou, Zhejiang, China
Telephone	+86571-88317620
Telefax	+86571-88316350
Test Location	Hangzhou TDT Technologies Co., Ltd.
Address	Room 101, Building 3, No. 12, Binwen Road, Xixing Street, Binjiang district, Hangzhou, Zhejiang, China
Telephone	+86571-88317620
Telefax	+86571-88316350
A2LA Certification number	4037.01
CNAS Certification number	CNAS L7728
VCCI Site registration number	C-14683, G-10832, R-14200, T-12223
FCC Site registration number	645845
Designation number	CN1197

Announce:

- 1 The test report reference to the report template version v1.0
- 2 The test report is invalid if not marked with the signatures of the persons responsible For preparing and approving the test report.
- 3 The test report is invalid if there is any evidence and/or falsification.
- 4 The result documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein
- 5 Content of the test report, in part or in full, cannot be used for publicity and/or promotional purpose without prior written approval from the laboratory
- 6 This document may not be altered or revised in any way unless done so by TDT Technologies Co., Ltd and all revisions are duly noted in the revisions section.
This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; The laboratory be responsible for all the information provided in the report, except when
- 7 information is provided by the customer. it shall not be reproduced except in full, without the written approval of Hangzhou TDT Technologies Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.



3. SUMMARY OF TEST RESULT

3.1 Test standard

No.	Identify	Document title
1	47 CFR Part 15 Sub-part C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203; 15.247(b)	N/A	Pass ^{Note 1}
2	Output Power	15.247(b)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247(a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	ANNEX A.3	Pass
5	Band Edge(Authorized- band band-edge)	15.209; 15.247(d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247(d)	ANNEX A.6	Pass
8	Band Edge(Restricted- band band-edge)	15.209; 15.247(d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	N/A	N/A ^{Note 2}

Note 1: Please refer to section 5.1.

Note 2: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.



4. GENERAL TEST CONFIGURATION

4.1 Test environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 56%	
Atmospheric Pressure	100.0 kPa – 100.2kPa	
Temperature	NT (Normal Temperature)	+20°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	120V

4.2 Test Equipment

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period	Use
Spectrum Analyzer	R&S	FSV40	101015	Jul.01, 2021	1 year	✓
Analog signal generator	Agilent	N5183A	MY50141794	Oct.27, 2021	1 year	×
LOOP Antenna	Com-power	1900/1/0	10160053	Jul.04,2021	1 year	✓
Automatic control unit	Tonscend	JS0806-2	T1326593	Oct.27, 2021	1 year	✓
EMI Test receiver	R&S	ESR26	101617	Oct.27, 2021	1 year	✓
PRE-AMPLIFIER (1-18GHz)	Connphy	CLN-1G18G-4060-S	718005	Aug.07, 2021	1 year	✓
PRE-AMPLIFIER (18-40GHz)	CERNEX	CBL18404035	24496/24495	Aug.07, 2021	1 year	✓
Bi-conical and log-periodic Antenna (30MHz-1GHz)	SCHWARZBECK	VULB 9168	796	Oct.27, 2021	1 year	✓
HORN Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA 9120D	1935	Oct.27, 2021	1 year	✓
Coaxial RF Cable	Hubersuhner	SUCOFLEX 104EA+SUCOFLEX 100	NA	Aug.07, 2021	1 year	✓
	SCHWARZBECK	SA360-2.92M2.92M-11M-3#	NA	Aug.07, 2021	1 year	✓
Coaxial RF Cable	Hubersuhner	SUCOFLEX 104EA+SUCOFLEX 100	02-1L	Oct.27, 2021	1 year	✓
	Gore	3545-2.92J2.92J-8M-2#	02-2H	Aug.07, 2021	1 year	✓
Coaxial cable	R&S	SPARE	1#	Oct.27, 2021	1 year	✓
High-pass Filter	Dongsheng	ZHPF-M3-18G-SS	186101682	Jul.10, 2020	2 year	✓



4.3 Measurement uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 2\text{MHz}$
RF output power, conducted	$\pm 1.24\text{dB}$
Power Spectral Density, conducted	$\pm 1.88\text{ dB}$
Unwanted Emissions, conducted (30MHz-1GHz)	$\pm 0.746\text{ dB}$
Unwanted Emissions, conducted (above 1GHz)	$\pm 1.328\text{ dB}$
All emissions, radiated	$\pm 1.328\text{ dB}$
Temperature	$\pm 1\text{ }^\circ\text{C}$
Humidity	$\pm 4\%$


4.4 Description of test setup

4.4.1 For conducted Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10dBm and the cable 0.5dBm used, then the final result of EUT: Conducted value (dBm) = 10dBm + 0.5dB = 10.5dBm


4.4.2 For AC Power Supply port Test

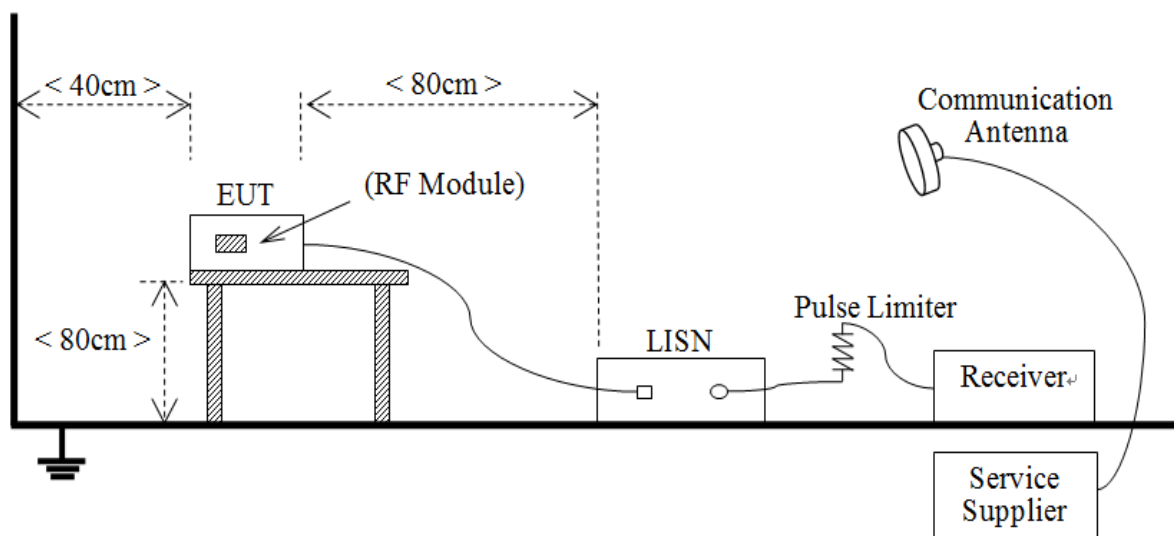

(Diagram 1)




4.4.3 For Radiated Test (Below 30 MHz)

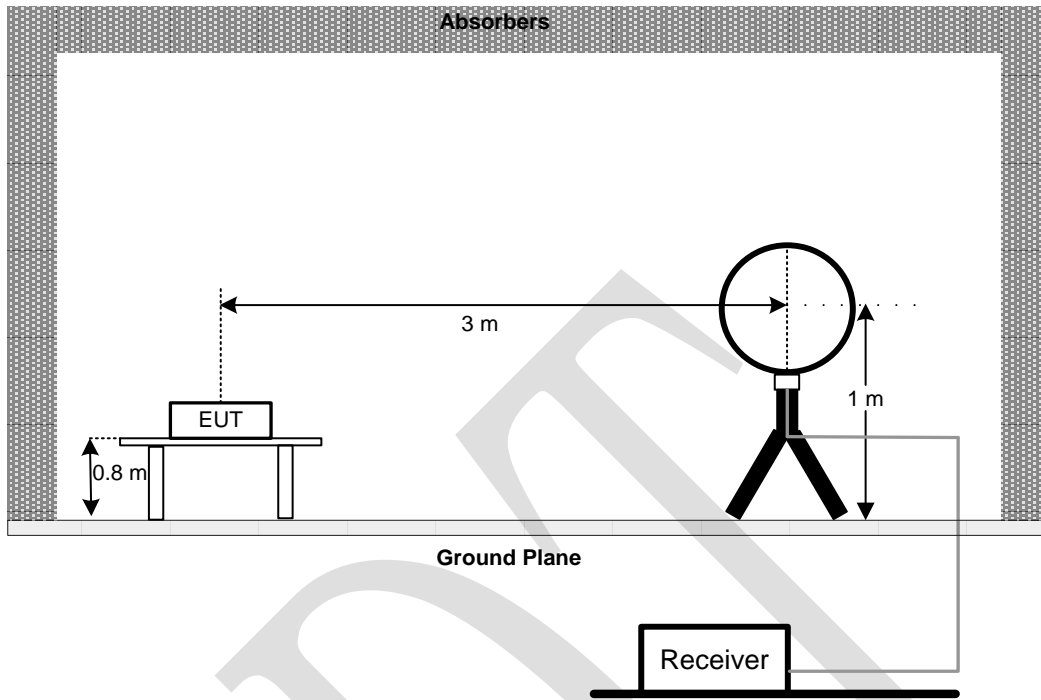

(Diagram 2)


4.4.4 For Radiated Test(30MHz-1GHz)

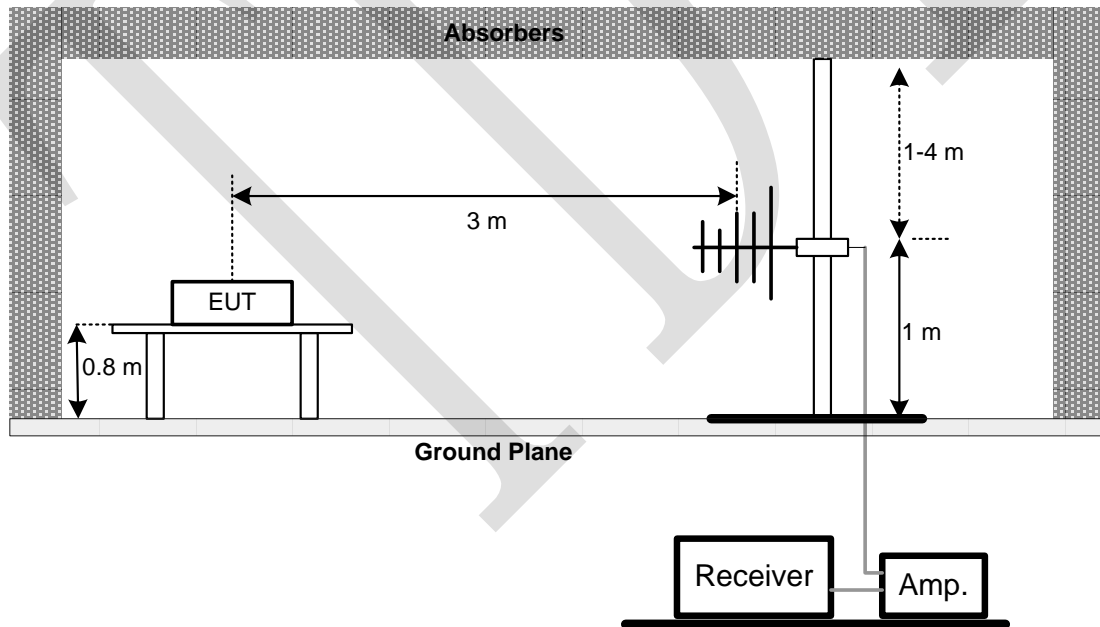

(Diagram 3)



4.4.5 For Radiated Test (Above 1 GHz)

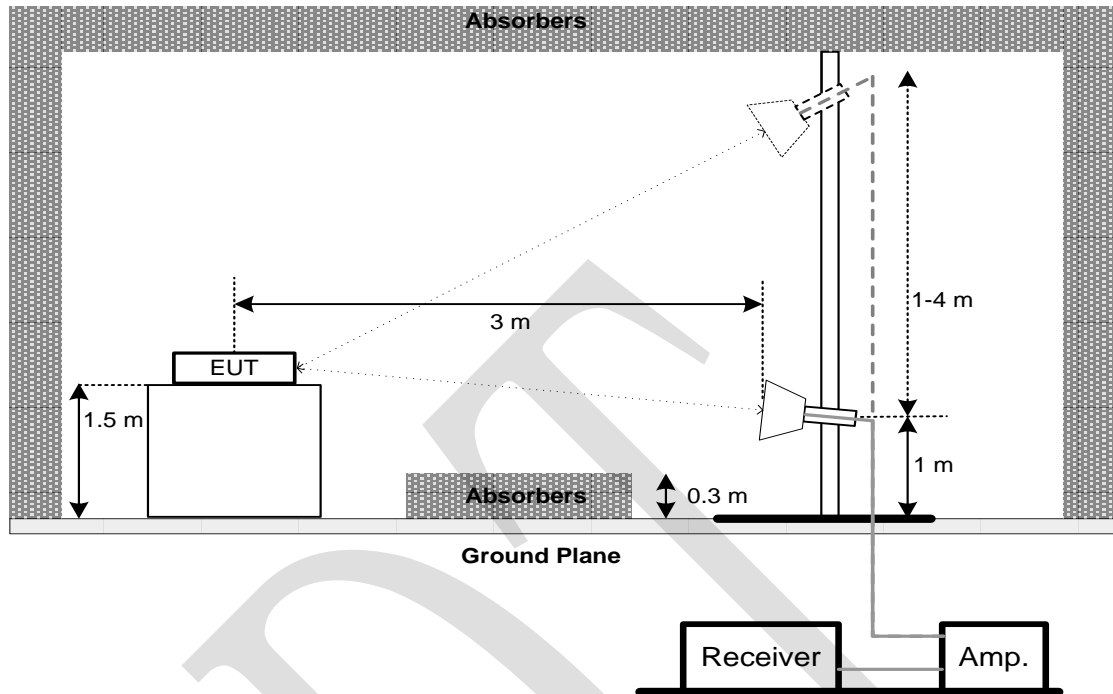

(Diagram 4)

4.5 Measurement results explanation example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in $\text{dB}\mu\text{V}/\text{m}$,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi)
+ the appropriate maximum ground reflection factor (dB)



5. TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antennas of the product are permanently attached. There are no provisions for connection to an external antenna.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

Antenna Gain

The antenna peak gain of EUT is 2dBi less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.



5.2 Output Power

Limit


FCC § 15.247(b); RSS-247, 5.4 (4)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

Test Procedure

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum conducted output power was performed in accordance with method 11.9.1.3 (for peak power) or 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

Test Setup

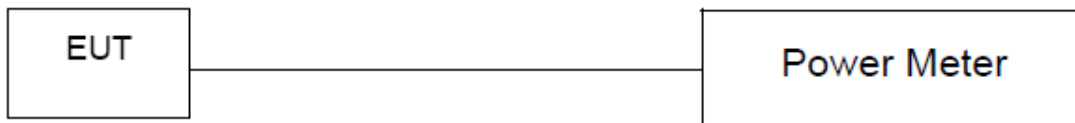

Test Result

Please refer to ANNEX A.1.



5.3 6dB Bandwidth

Limit

FCC §15.247(a); RSS-GEN, 6.6

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Result

Please refer to ANNEX A.2.



5.4 Conducted Spurious Emission

Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.



Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

Test Result

Please refer to ANNEX A.3



5.5 Band Edge (Authorized-band band-edge)

Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B

Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)



Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (f_{emission}) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by f_{emission} ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

Test Result

Please refer to ANNEX A.4.



5.6 Conducted Emission

Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5	56	46
5 - 30	60	50

Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below. Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Test Result

Please refer to ANNEX A.5.



5.7 Radiated Spurious Emission

Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.



General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies \leq 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies $>$ 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW \geq 3 x RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
$>$ 1000 MHz	1 MHz



If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in



frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Test Result

Please refer to ANNEX A.6.



5.8 Band Edge(Restricted-band band-edge)

Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B

Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector..

Test Result

Please refer to ANNEX A.7.



5.9 Power Spectral density(PSD)

Limit

FCC §15.247(d); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Result

Please refer to ANNEX A.8.



Annex A TEST RESULT

A.1 Maximum conducted output power

Test Result:

Duty cycle:

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	12.00	12.00	100.00
		2437	27.00	27.00	100.00
		2462	12.00	12.00	100.00
11G	Ant1	2412	5.48	5.50	99.64
		2437	5.49	5.52	99.46
		2462	5.49	5.51	99.64
11N20SISO	Ant1	2412	5.08	5.11	99.41
		2437	5.08	5.10	99.61
		2462	5.08	5.10	99.61
11N40SISO	Ant1	2422	2.47	2.49	99.20
		2437	2.47	2.49	99.20
		2452	2.47	2.50	98.80

Maximum conducted output power (peak)

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	23.54	<=30	PASS
		2437	22.41	<=30	PASS
		2462	22.32	<=30	PASS
11G	Ant1	2412	24.23	<=30	PASS
		2437	22.72	<=30	PASS
		2462	22.28	<=30	PASS
11N20SISO	Ant1	2412	23.28	<=30	PASS
		2437	21.83	<=30	PASS
		2462	21.61	<=30	PASS
11N40SISO	Ant1	2422	22.41	<=30	PASS
		2437	21.10	<=30	PASS
		2452	21.01	<=30	PASS



A.2 DTS Bandwidth and Occupied Channel Bandwidth

Test Result:


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.920	2407.280	2416.200	0.5	PASS
		2437	9.520	2432.440	2441.960	0.5	PASS
		2462	10.040	2456.960	2467.000	0.5	PASS
11G	Ant1	2412	16.440	2403.760	2420.200	0.5	PASS
		2437	16.400	2428.760	2445.160	0.5	PASS
		2462	16.360	2453.800	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.640	2403.160	2420.800	0.5	PASS
		2437	17.600	2428.200	2445.800	0.5	PASS
		2462	17.640	2453.160	2470.800	0.5	PASS
11N40SISO	Ant1	2422	31.520	2405.760	2437.280	0.5	PASS
		2437	31.920	2420.680	2452.600	0.5	PASS
		2452	32.160	2436.080	2468.240	0.5	PASS

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.150	2405.386	2418.536	---	PASS
		2437	13.047	2430.445	2443.492	---	PASS
		2462	13.034	2455.452	2468.486	---	PASS
11G	Ant1	2412	17.634	2403.142	2420.776	---	PASS
		2437	17.609	2428.243	2445.852	---	PASS
		2462	17.406	2453.342	2470.748	---	PASS
11N20SISO	Ant1	2412	18.373	2402.751	2421.124	---	PASS
		2437	18.388	2427.803	2446.191	---	PASS
		2462	18.361	2452.821	2471.182	---	PASS
11N40SISO	Ant1	2422	34.742	2404.615	2439.357	---	PASS
		2437	34.663	2419.694	2454.357	---	PASS
		2452	34.682	2434.694	2469.376	---	PASS




Test Graphs(DTS Bandwidth):



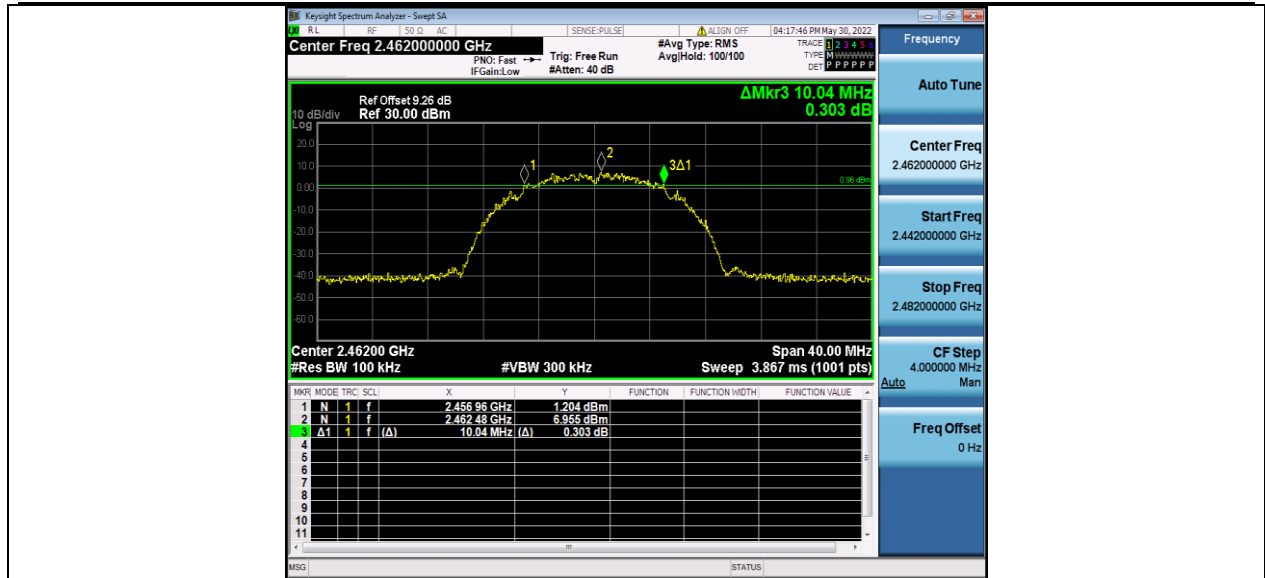


11G_Ant1_2412

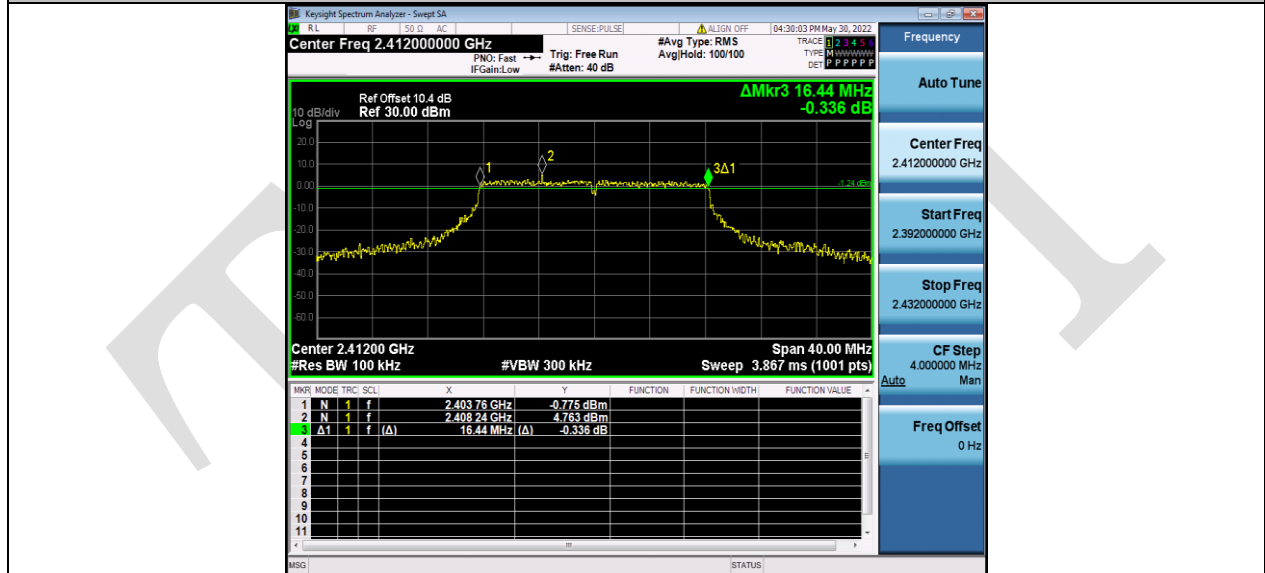


11G_Ant1_2437




11G_Ant1_2462

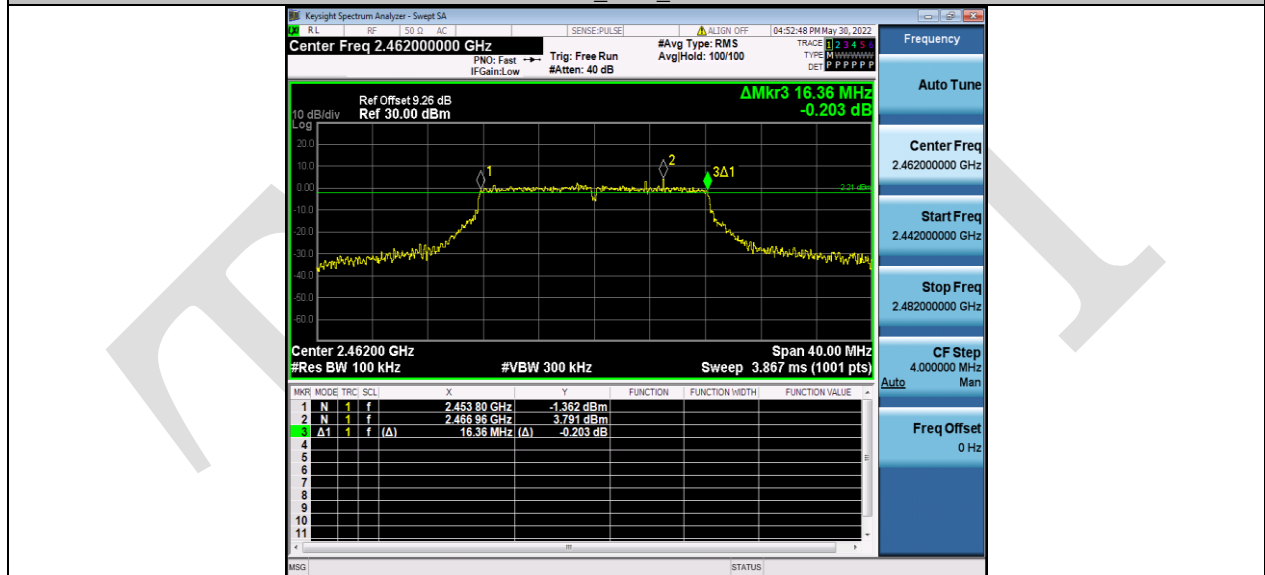


11N20SISO_Ant1_2412

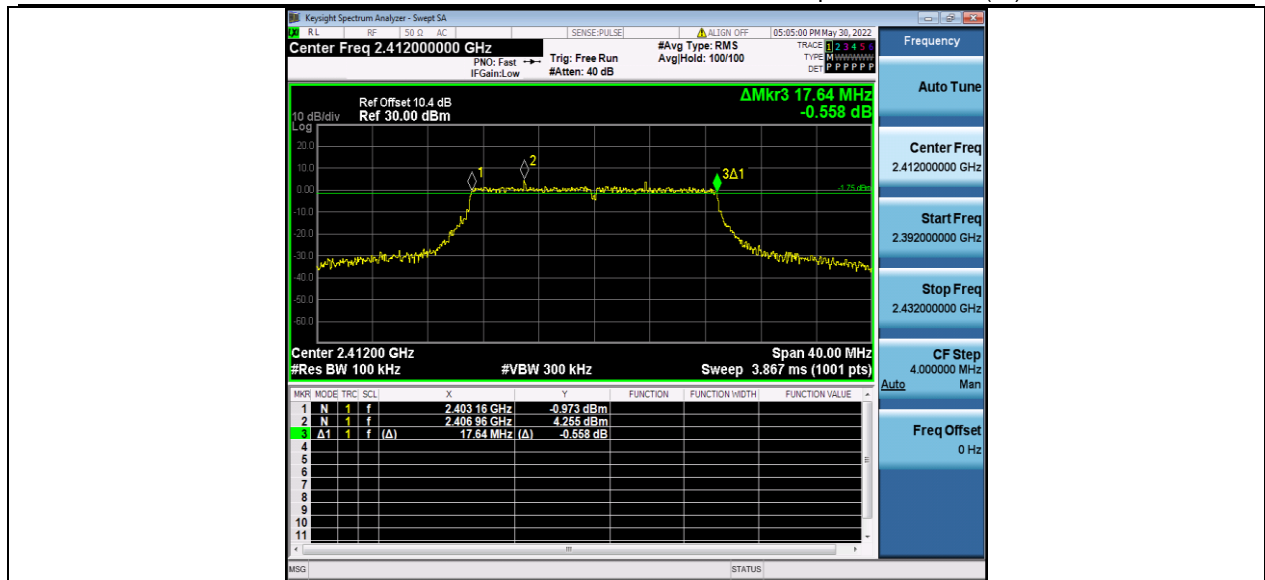


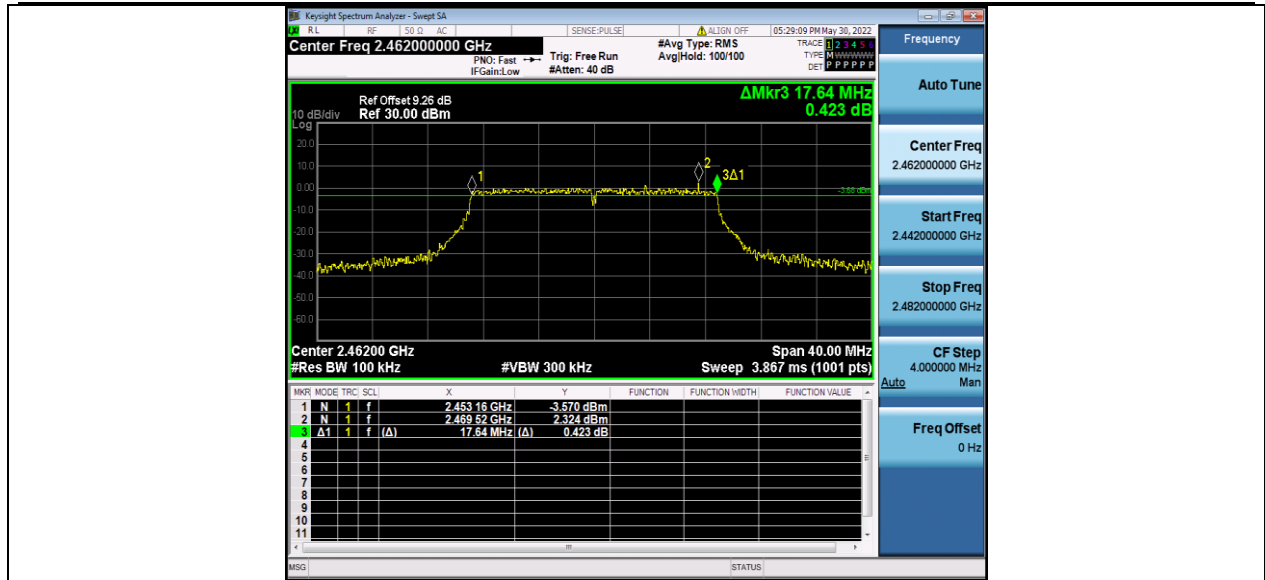


11N40SISO_Ant1_2422

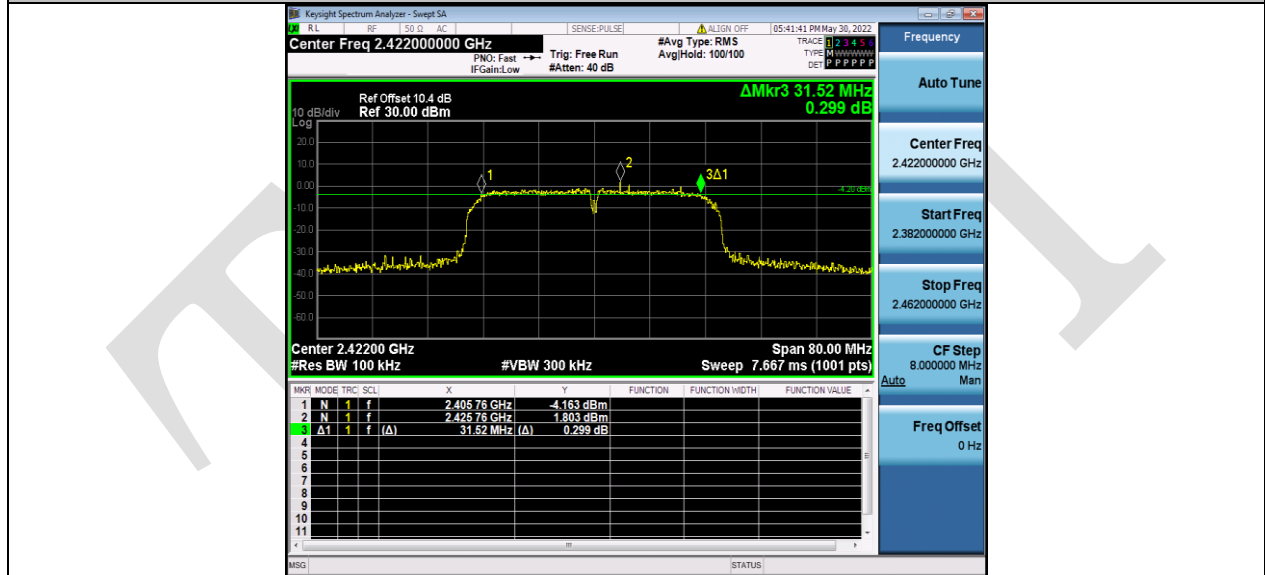

11N40SISO_Ant1_2437

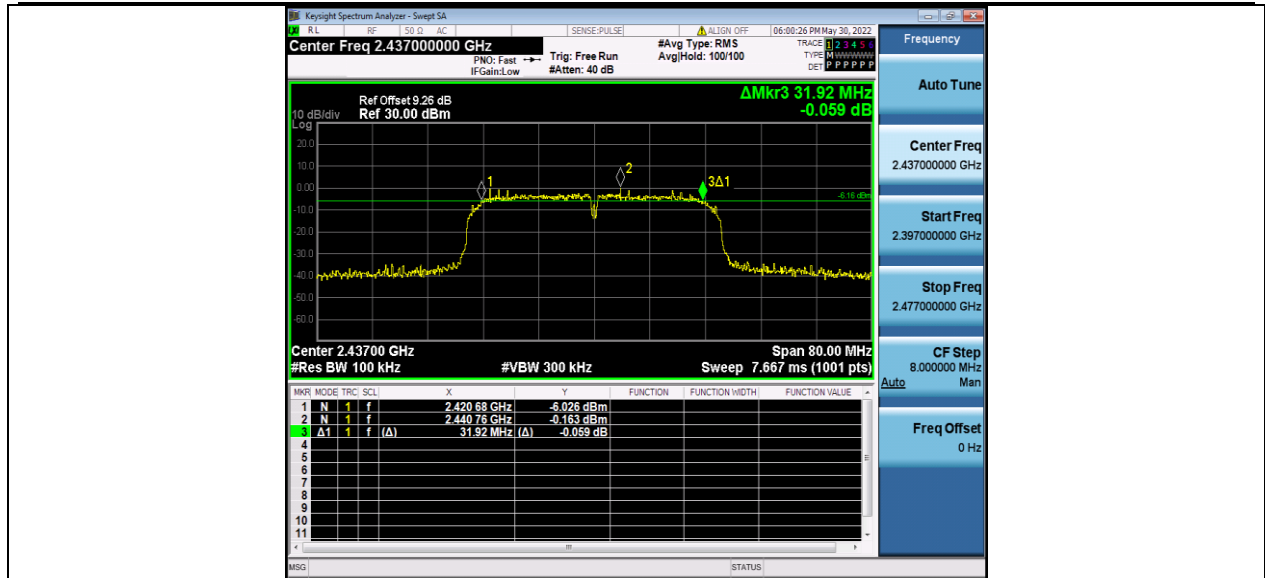


11N40SISO_Ant1_2452

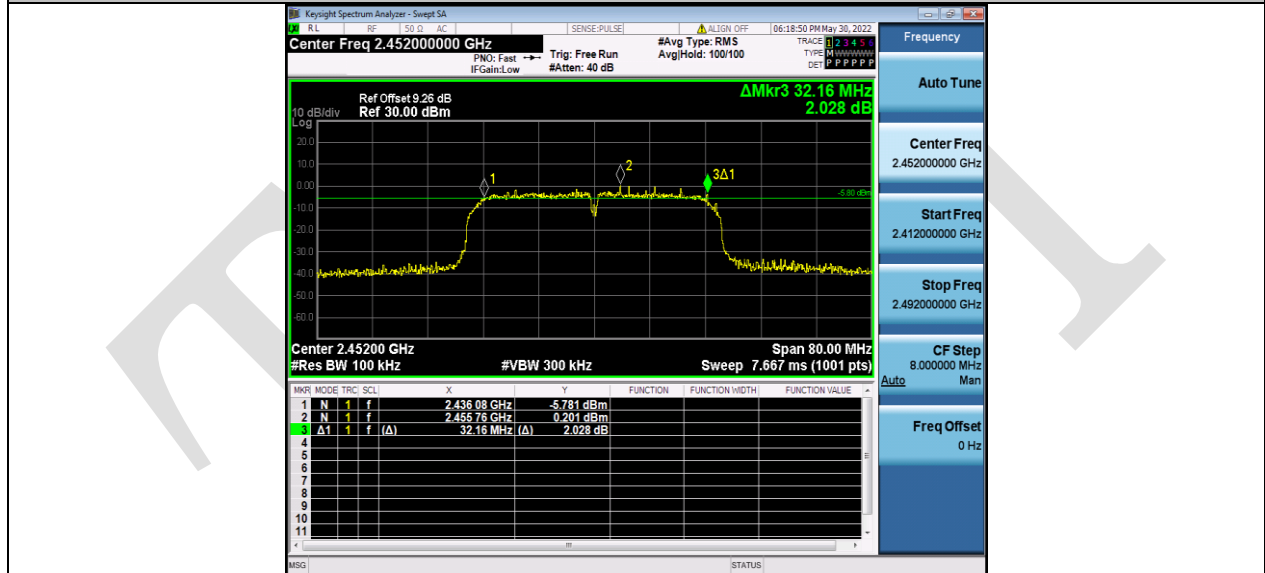




Test Graphs(OCB):





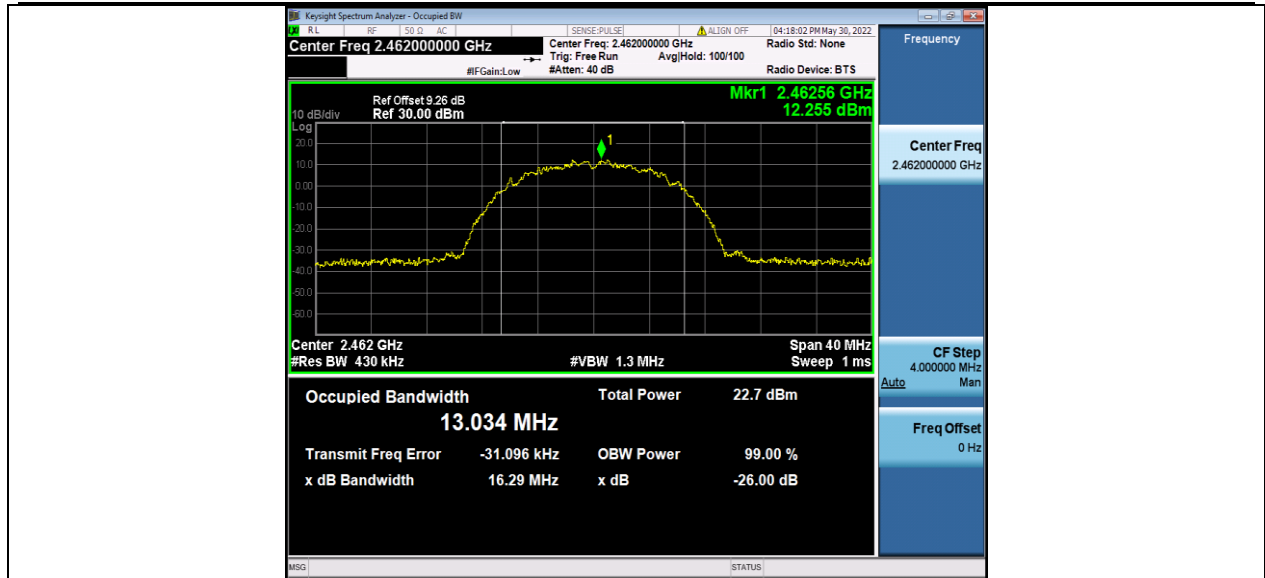


11G_Ant1_2412

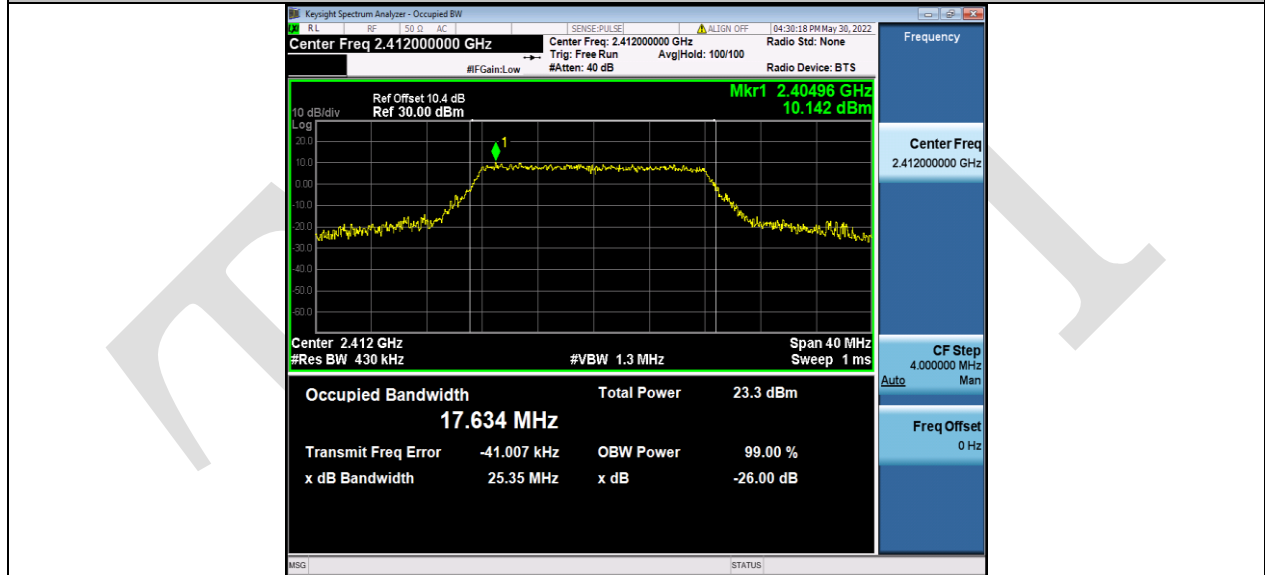


11G_Ant1_2437

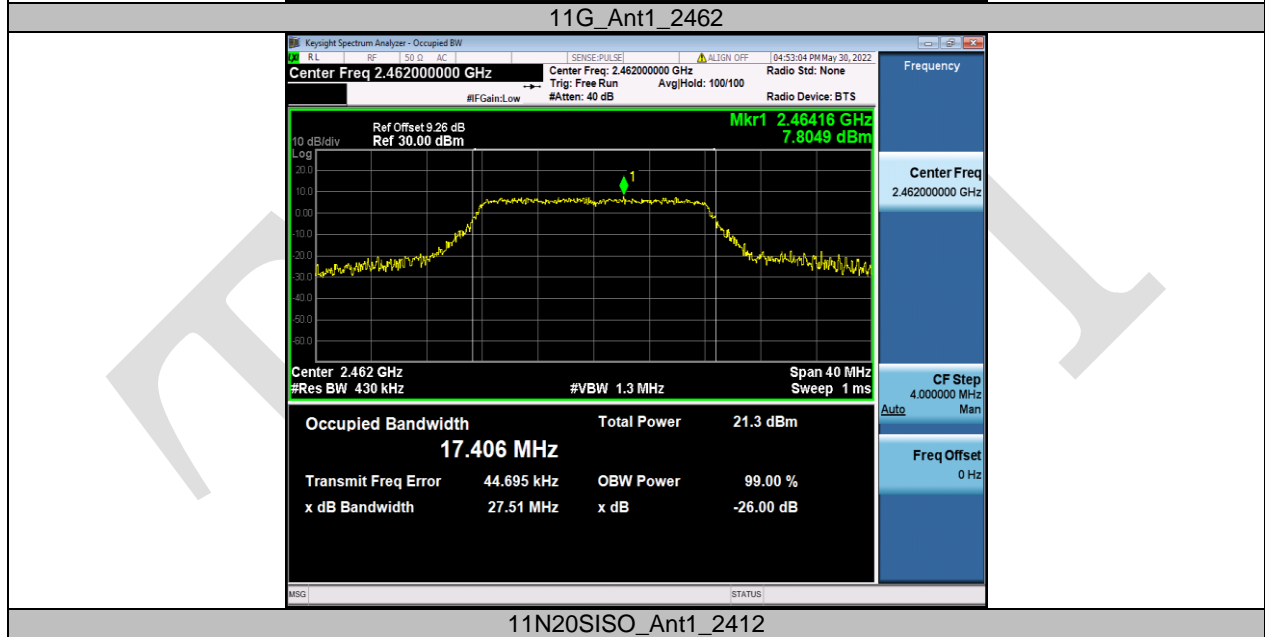

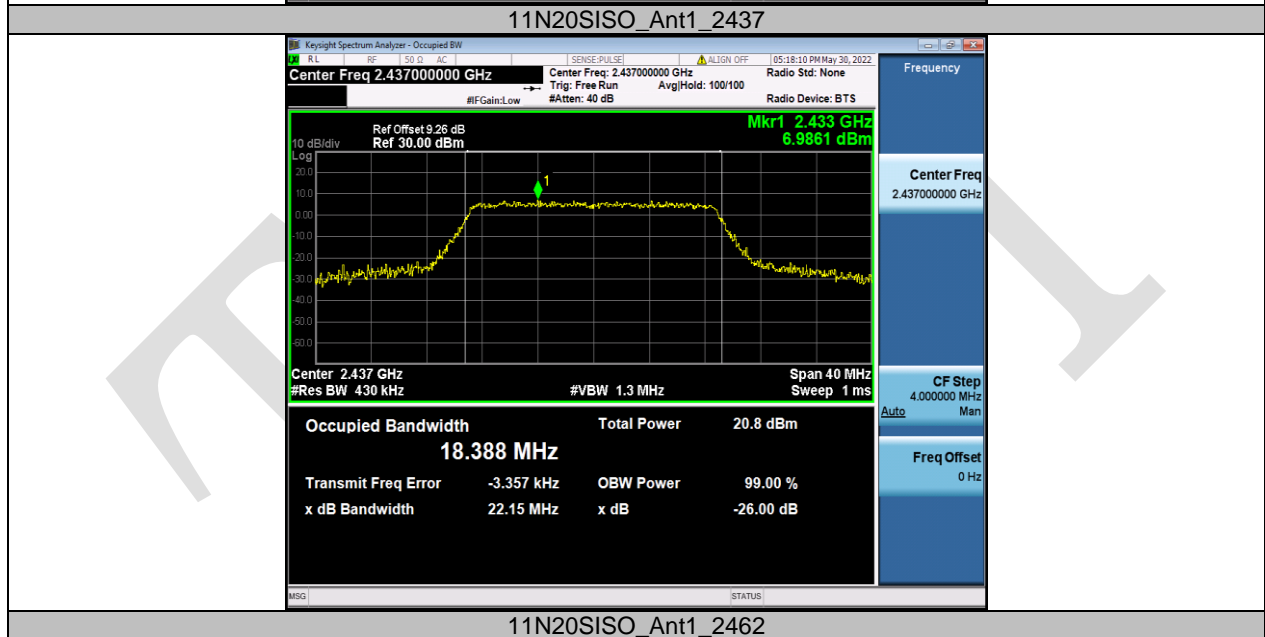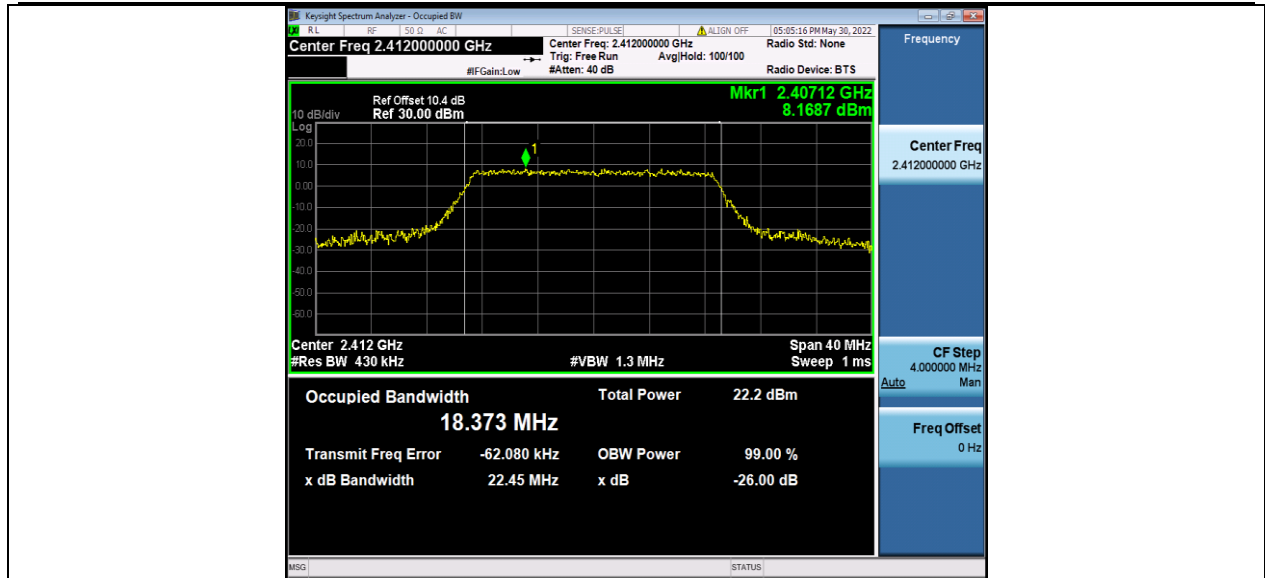





11N40SISO_Ant1_2422

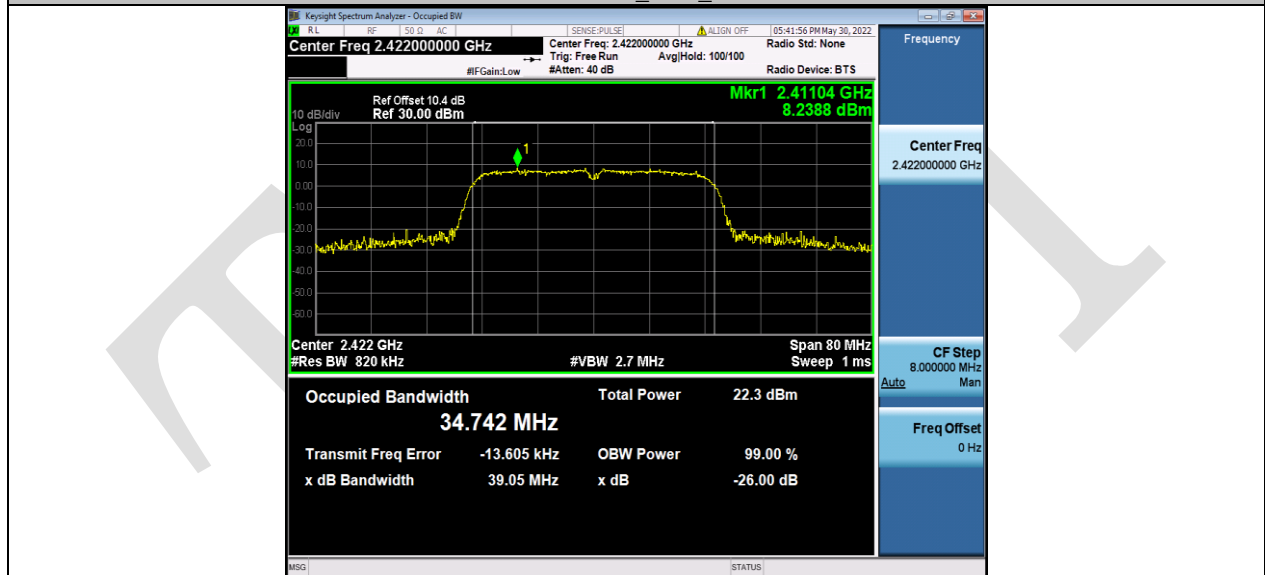

11N40SISO_Ant1_2437

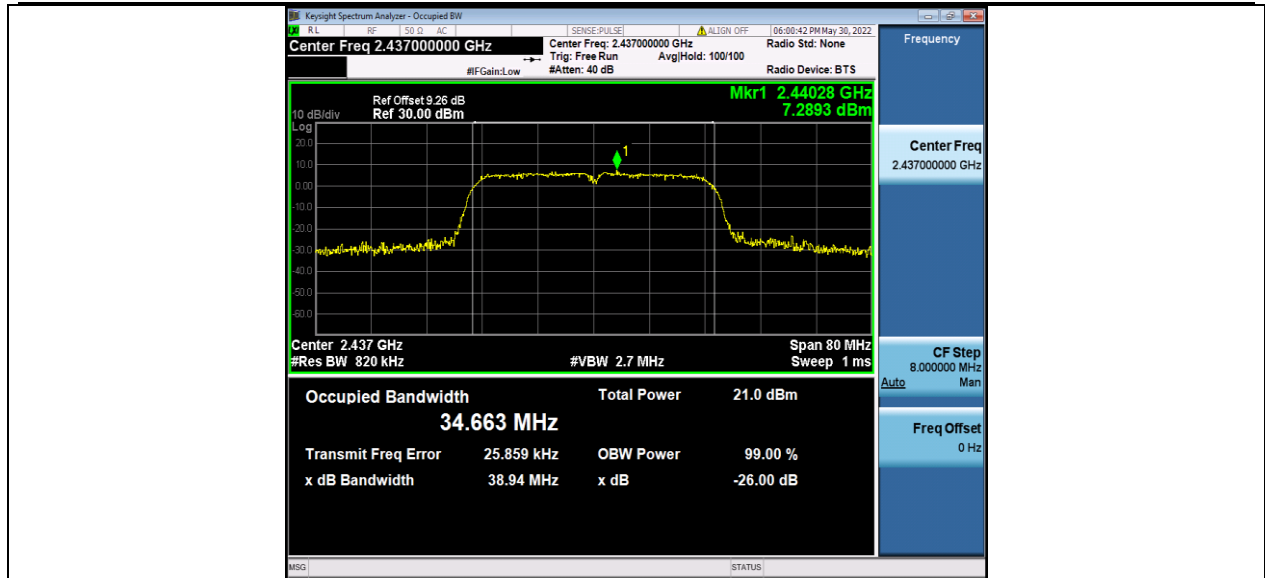

11N40SISO_Ant1_2452

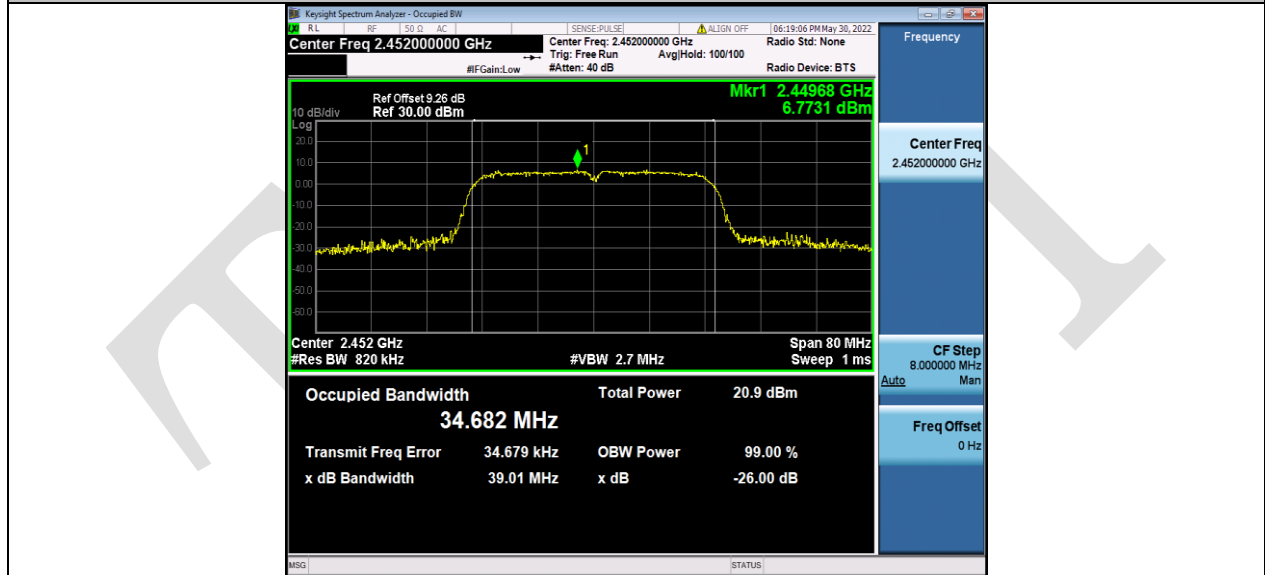




A.3 Conducted Spurious Emission


Test Result

TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	8.36	8.36	---	PASS
			30~1000	8.36	-61.11	≤-11.64	PASS
			1000~26500	8.36	-42.17	≤-11.64	PASS
		2437	Reference	7.64	7.64	---	PASS
			30~1000	7.64	-61.13	≤-12.36	PASS
			1000~26500	7.64	-43.35	≤-12.36	PASS
		2462	Reference	5.98	5.98	---	PASS
			30~1000	5.98	-61.08	≤-14.02	PASS
			1000~26500	5.98	-42.67	≤-14.02	PASS
11G	Ant1	2412	Reference	3.47	3.47	---	PASS
			30~1000	3.47	-59.97	≤-16.53	PASS
			1000~26500	3.47	-42.53	≤-16.53	PASS
		2437	Reference	1.21	1.21	---	PASS
			30~1000	1.21	-61.97	≤-18.79	PASS
			1000~26500	1.21	-42.95	≤-18.79	PASS
		2462	Reference	0.56	0.56	---	PASS
			30~1000	0.56	-62.06	≤-19.44	PASS
			1000~26500	0.56	-43.89	≤-19.44	PASS
11N20SISO	Ant1	2412	Reference	1.53	1.53	---	PASS
			30~1000	1.53	-60.28	≤-18.47	PASS
			1000~26500	1.53	-42.19	≤-18.47	PASS
		2437	Reference	2.37	2.37	---	PASS
			30~1000	2.37	-61.75	≤-17.63	PASS
			1000~26500	2.37	-43.56	≤-17.63	PASS
		2462	Reference	2.90	2.90	---	PASS
			30~1000	2.90	-62.45	≤-17.1	PASS
			1000~26500	2.90	-43.96	≤-17.1	PASS
11N40SISO	Ant1	2422	Reference	0.42	0.42	---	PASS
			30~1000	0.42	-47.63	≤-19.58	PASS
			1000~26500	0.42	-42.18	≤-19.58	PASS
		2437	Reference	-3.09	-3.09	---	PASS
			30~1000	-3.09	-52.36	≤-23.09	PASS
			1000~26500	-3.09	-44.14	≤-23.09	PASS
		2452	Reference	-3.30	-3.30	---	PASS
			30~1000	-3.30	-52.18	≤-23.3	PASS
			1000~26500	-3.30	-43.72	≤-23.3	PASS




Test Graphs

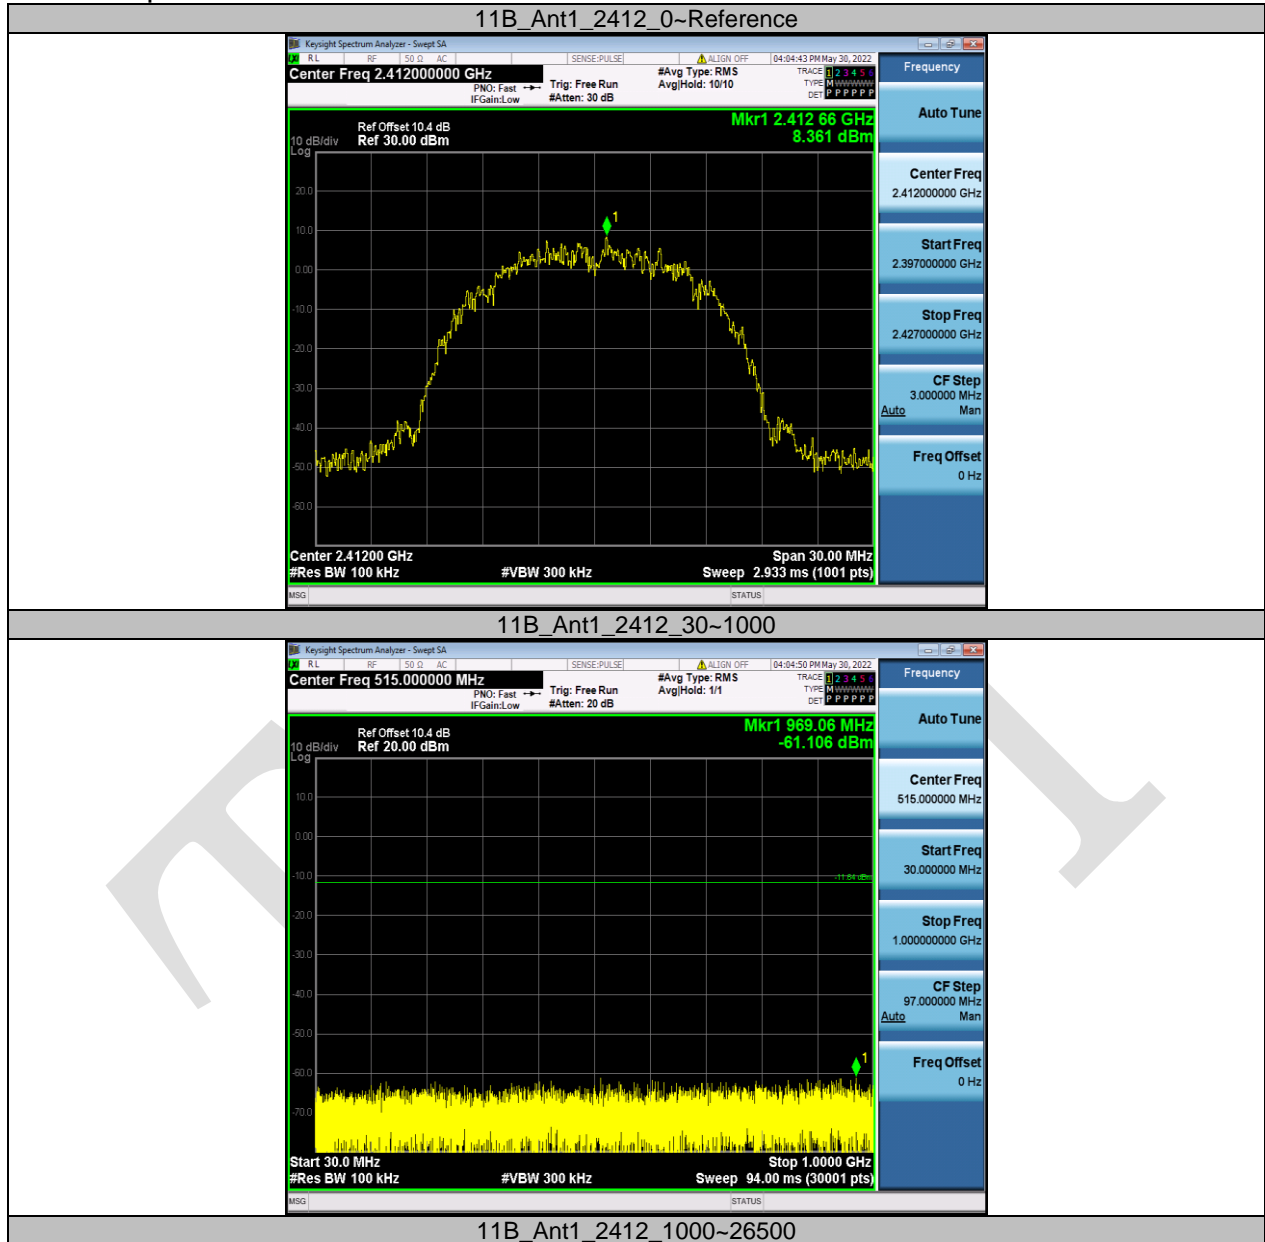


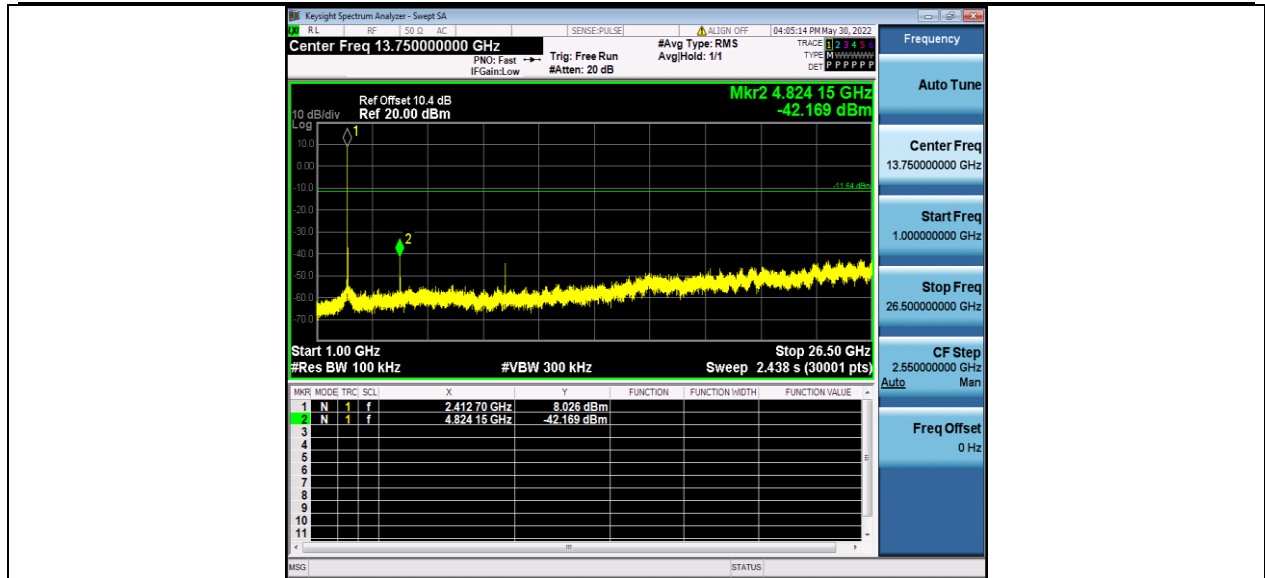


11B_Ant1_2437_0~Reference

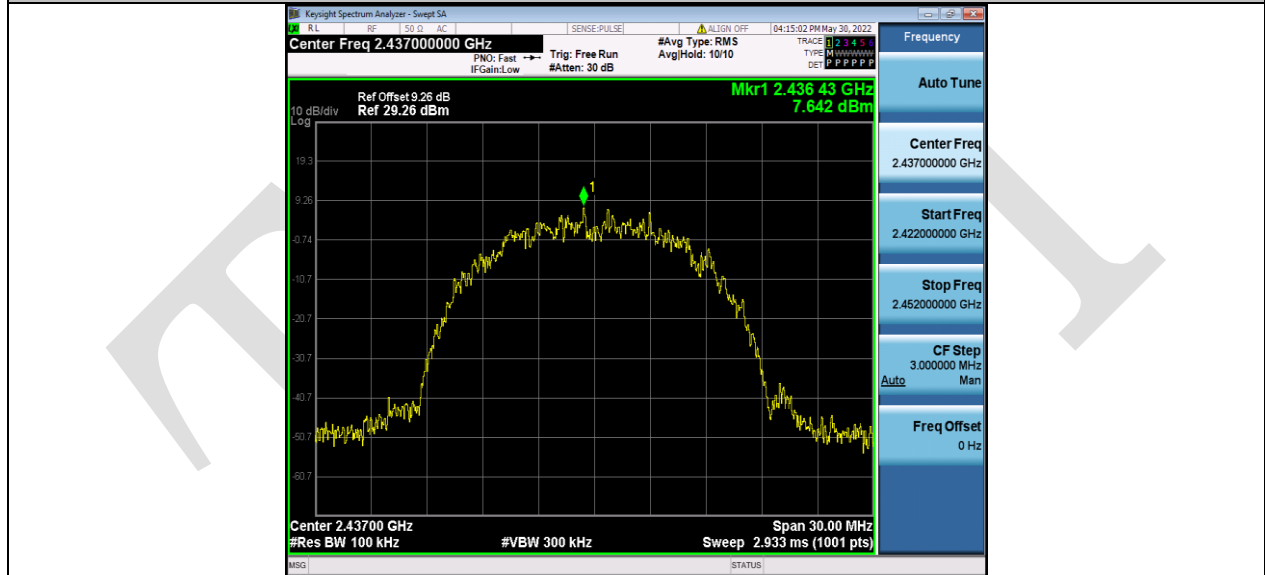


11B_Ant1_2437_30~1000

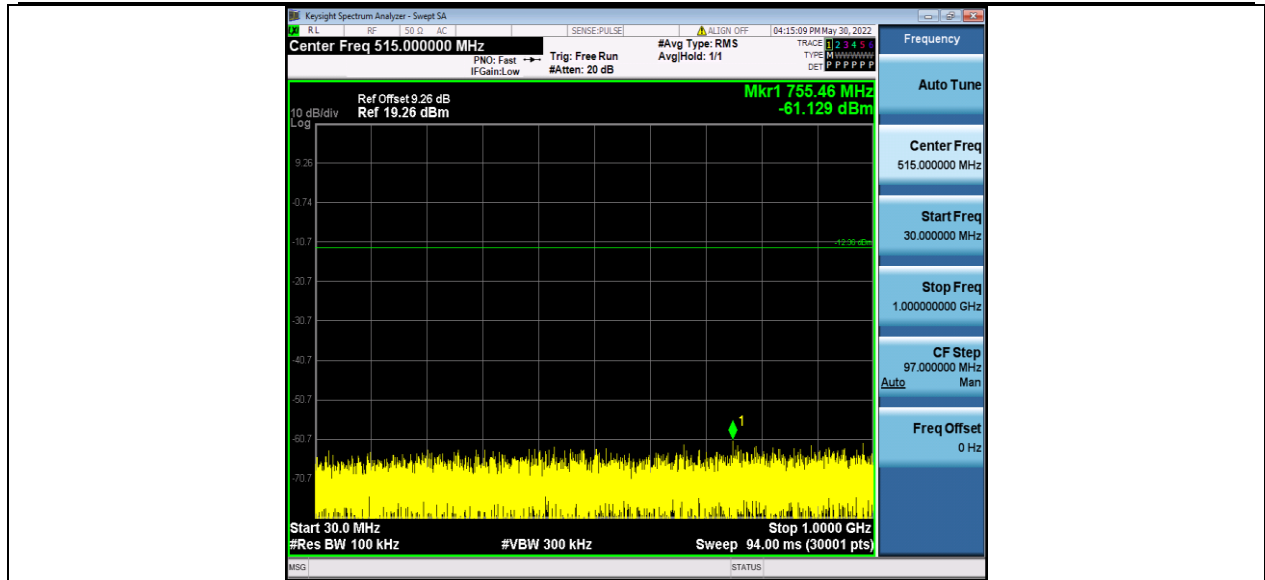


11B_Ant1_2437_1000-26500

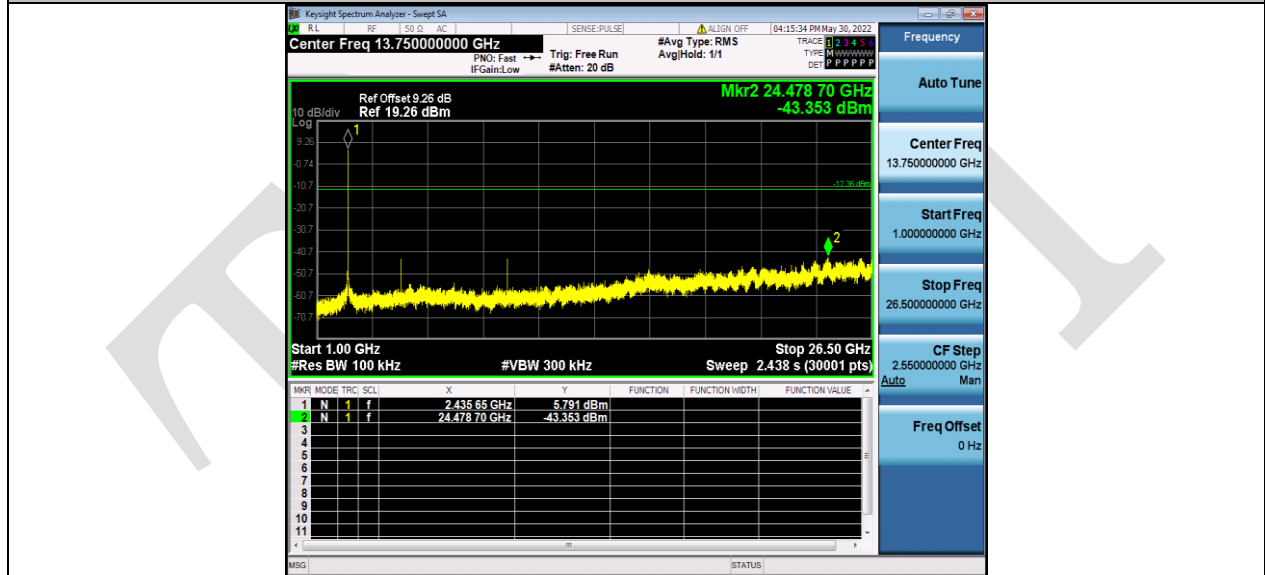

11B_Ant1_2462_0~Reference


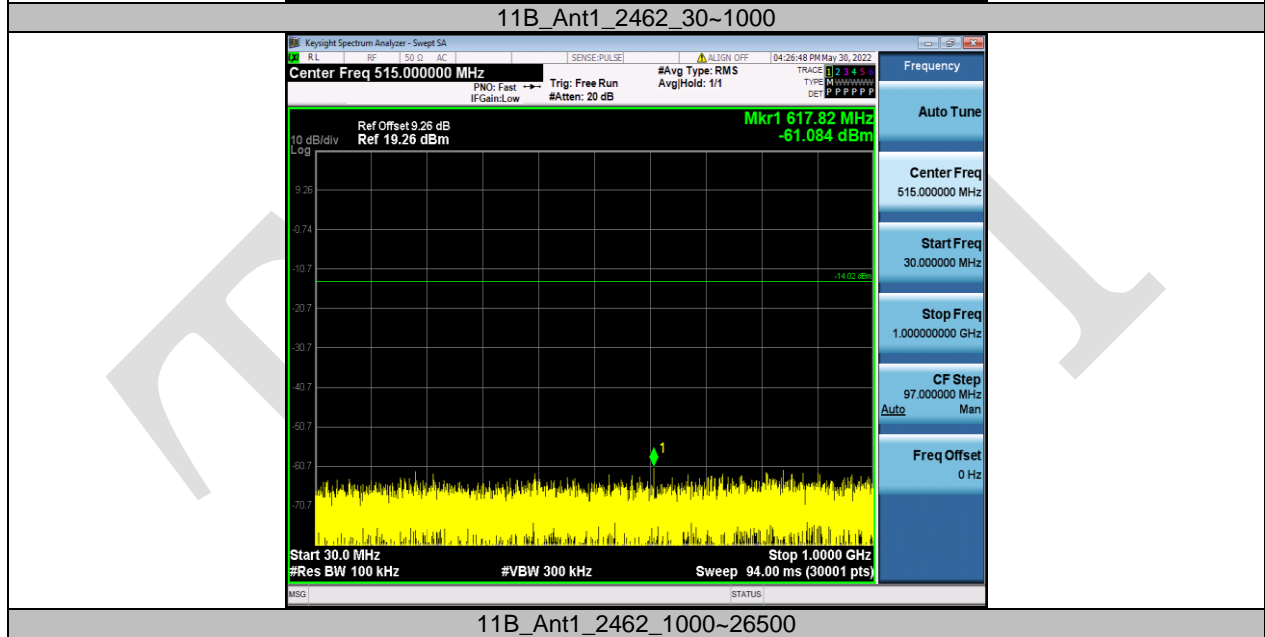


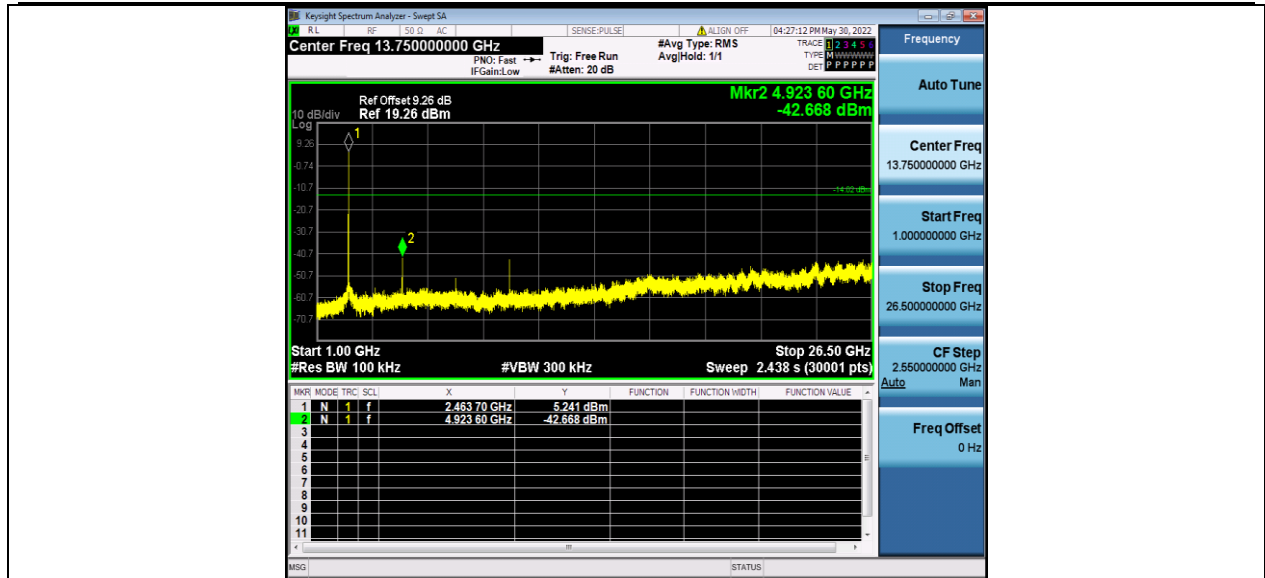

11G_Ant1_2412_0~Reference




11G_Ant1_2412_30~1000

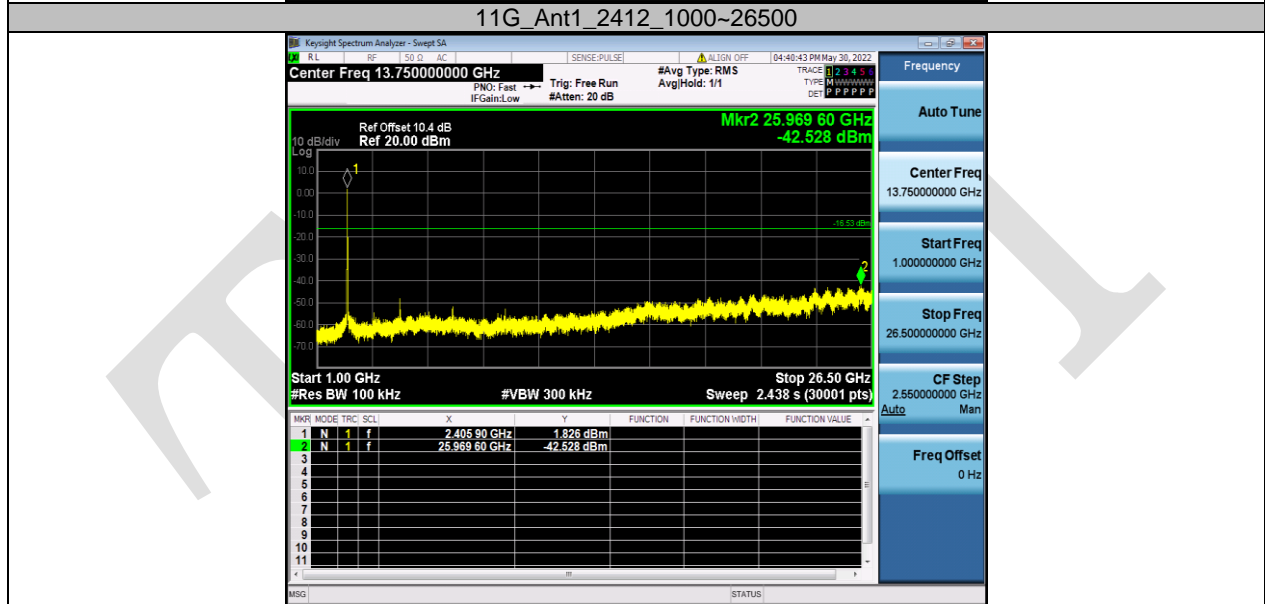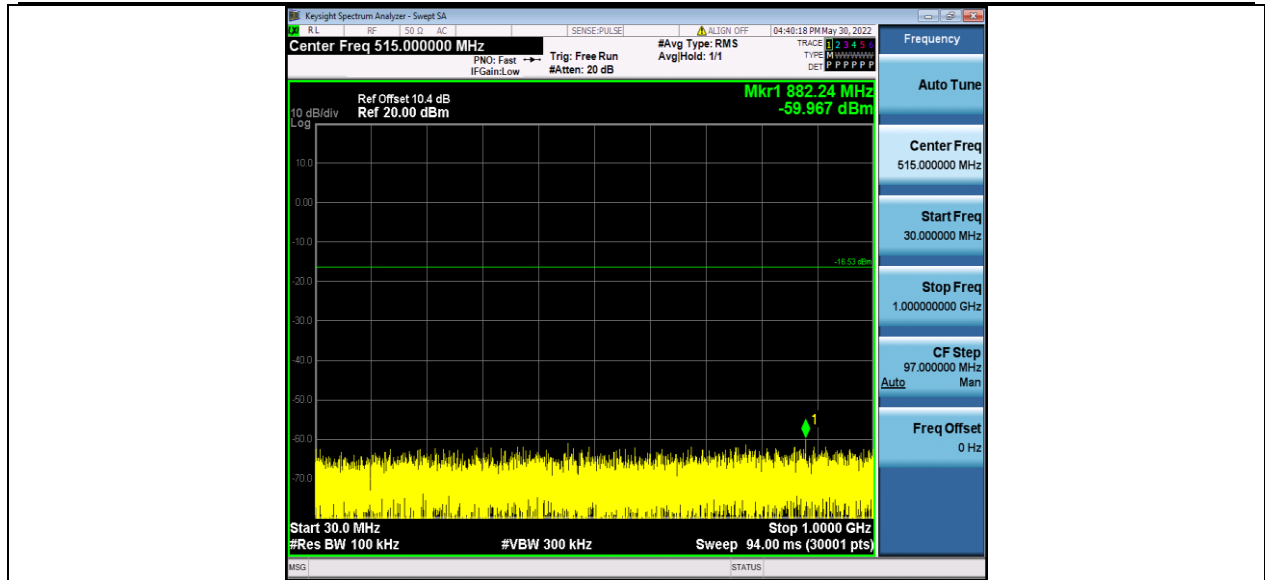



11G_Ant1_2437_30~1000

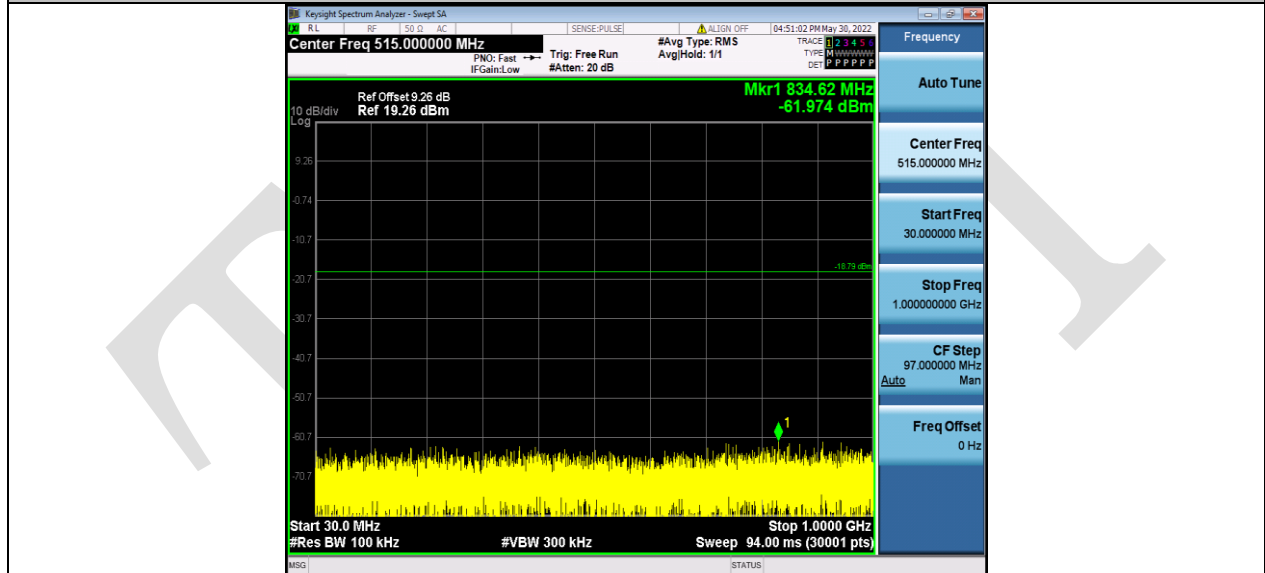

11G_Ant1_2437_1000~26500