



LTE QPSK MODULATION. BW = 10 MHz

Lowest Channel 99% Occupied Bandwidth

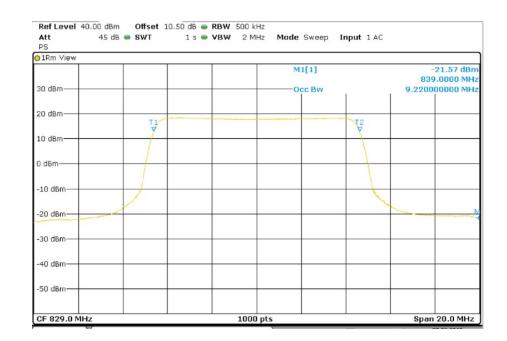

Lowest Channel -26dBc Bandwidth kHz

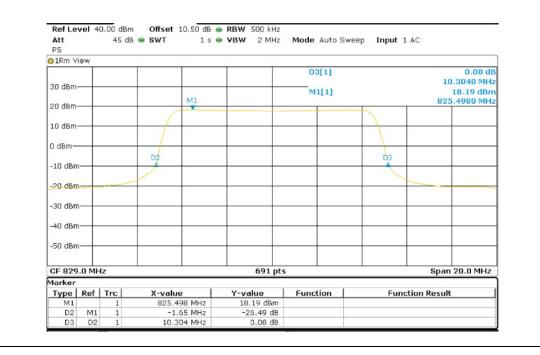











LTE 16 QAM MODULATION. BW = 10 MHz









TEST RESULTS (Cont): Highest Channel 99% Occupied Bandwidth Ref Level 40.00 dBm Offset 10.50 dB - RBW 500 kHz Att 45 dB 🔵 SWT 1 s 👄 VBW 2 MHz Mode Sweep Input 1 AC PS ⊙1Rm View M1[1] 20.08 dBm 840.8900 MHz 30 dBm Occ Bw 5.24000000 MHz M1 20 dBm T1 T2 10 dBm· 0 dBm -10 dBm -20 dBm--30 dBm -40 dBm--50 dBm Span 20.0 MHz CF 844.0 MHz 1000 pts Highest Channel 26dBc Bandwidth kHz Ref Level 40.00 dBm Offset 10.50 dB . RBW 500 kHz 45 dB 👄 SWT 1 s 👄 VBW 2 MHz Att Mode Auto Sweep Input 1 AC PS 01Rm View D3[1] 0.15 dB 6.1580 MHz 30 dBm 20.20 dBm 840.9900 MHz M1[1] M1 ▼ 20 dBm-10 dBm-0 dBm-D2 03 -10 dBm -20 dBm--30 dBm--40 dBm· -50 dBm-CF 844.0 MHz 691 pts Span 20.0 MHz Marker Type Ref Trc X-value Y-value Function Function Result 840.99 MHz -2.142 MHz 20.20 dBm -26.21 dB M1 M1 D2 D3

D2

6.158 MHz

0.15 dB




LTE QPSK MODULATION. BW = 15 MHz

Lowest Channel 99% Occupied Bandwidth



Lowest Channel 26dBc Bandwidth kHz

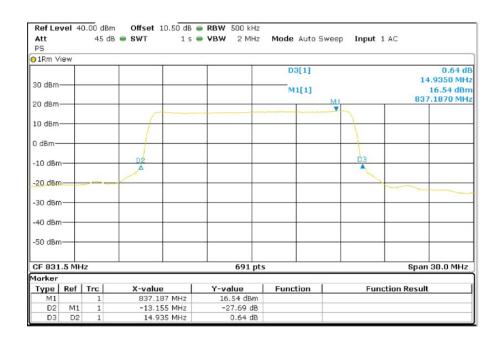












LTE 16QAM MODULATION. BW = 15 MHz

Lowest Channel 99% Occupied Bandwidth




Lowest Channel 26dBc Bandwidth kHz

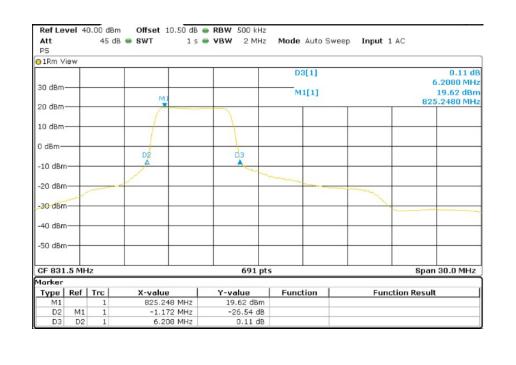







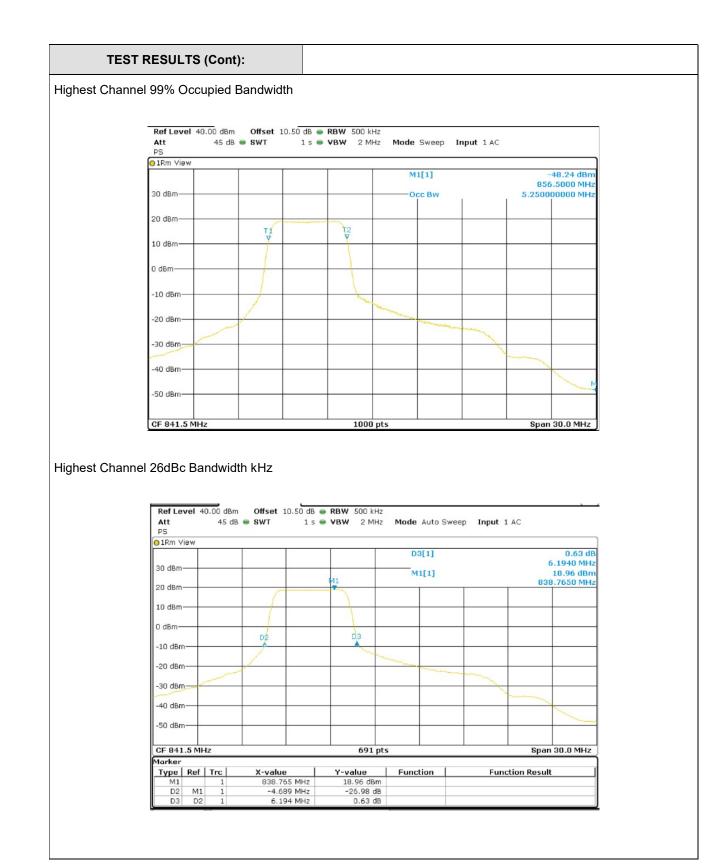



TEST A.5: SPURIOUS EMISSIONS AT ANTENNA TERMINALS Product standard: FCC Part 22 / IC RSS-132 LIMITS: Test standard: FCC §2.1051 and § 22.917/ RSS-132 Clause 5.5 LIMITS According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts. At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes: Po (dBm) - [43 + 10 log (Po in watts)] = -13 dBm **TEST SETUP** The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter. The spectrum was investigated from 9 kHz to 18 GHz for LTE Band 26. The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer. For LTE mode the configuration of Resource Blocks and modulation which is the worst case for conducted power was used. Spectrum Analyser Power EUT Attenuator devider Signalling Unit Power supply




| TESTED SAMPLES: | S/01 | | | | |
|--|--|--|--|--|--|
| TESTED CONDITIONS MODES: | TC#01 | | | | |
| TEST RESULTS: | PASS | | | | |
| Frequency range 9 kHz – 18 GHz | | | | | |
| LTE QPSK MODULATION. BW = 1.4 MHz | | | | | |
| Lowest Channel No spurious signal was found at less than 20d | B respect to the limit in the frequency range. | | | | |
| Middle Channel No spurious signal was found at less than 20dB | 3 respect to the limit in the frequency range. | | | | |
| Highest Channel No spurious signal was found at less than 20dE | 3 respect to the limit in the frequency range. | | | | |
| LTE QPSK MODULATION. BW = 3 MHz | | | | | |
| Lowest Channel No spurious signal was found at less than 20dB | 3 respect to the limit in the frequency range. | | | | |
| Middle Channel No spurious signal was found at less than 20dB | 3 respect to the limit in the frequency range. | | | | |
| Highest Channel No spurious signal was found at less than 20dB | Highest Channel No spurious signal was found at less than 20dB respect to the limit in the frequency range. | | | | |
| LTE QPSK MODULATION. BW = 5 MHz | | | | | |
| Lowest Channel No spurious signal was found at less than 20dB | 3 respect to the limit in the frequency range. | | | | |
| Middle Channel No spurious signal was found at less than 20dE | 3 respect to the limit in the frequency range. | | | | |
| Highest Channel No spurious signal was found at less than 20dB | B respect to the limit in the frequency range. | | | | |
| LTE QPSK MODULATION. BW = 10 MHz | | | | | |
| Lowest Channel No spurious signal was found at less than 20dB respect to the limit in the frequency range. | | | | | |
| Middle Channel No spurious signal was found at less than 20dE | 3 respect to the limit in the frequency range. | | | | |
| Highest Channel No spurious signal was found at less than 20dB respect to the limit in the frequency range. | | | | | |
| LTE QPSK MODULATION. BW = 15 MHz | | | | | |
| Lowest Channel No spurious signal was found at less than 20dB | 3 respect to the limit in the frequency range. | | | | |
| Middle Channel No spurious signal was found at less than 20dE | 3 respect to the limit in the frequency range. | | | | |
| Highest Channel No spurious signal was found at less than 20dB | 3 respect to the limit in the frequency range. | | | | |




TEST RESULTS (Cont): LTE QPSK MODULATION. BW = 1.4MHz Lowest Channel Ref Level 39.50 dBm Offset 11.00 dB 🖷 RBW 1 MHz Att 45 dB 🔵 SWT 5 s 👄 VBW 3 MHz Mode Auto Sweep 01Rm View 30 dBm· 20 dBm 10 d8m-0 dBm -10 cBm D1 -13.000 dBm--20 cBm--30 dBm-40 dBm -50 dBm-Stop 18.0 GHz Start 9.0 kHz 32001 pts Middle Channel Ref Level 39.50 dBm Offset 11.00 dB 🖷 RBW 1 MHz 45 dB 🖷 SWT Att 5 s 👄 VBW 3 MHz Mode Auto Sweep 1Rm Max 30 dBm 20 dB 10 dBr 0 dBr -10 dBm 01 -13.000 dBm--20 dBm -30 dBm--40 dBm -50 dBm Start 9.0 kHz 32001 pts Stop 18.0 GHz



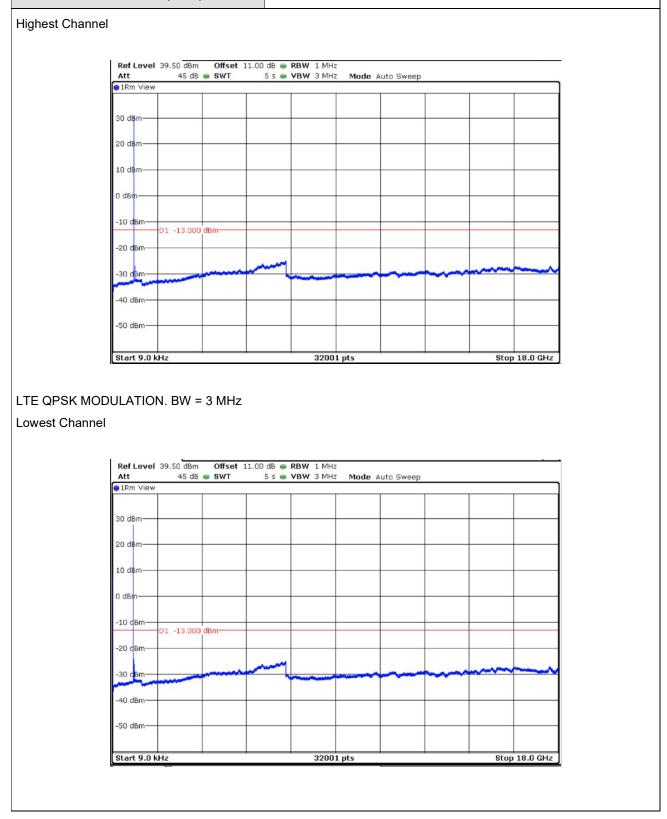



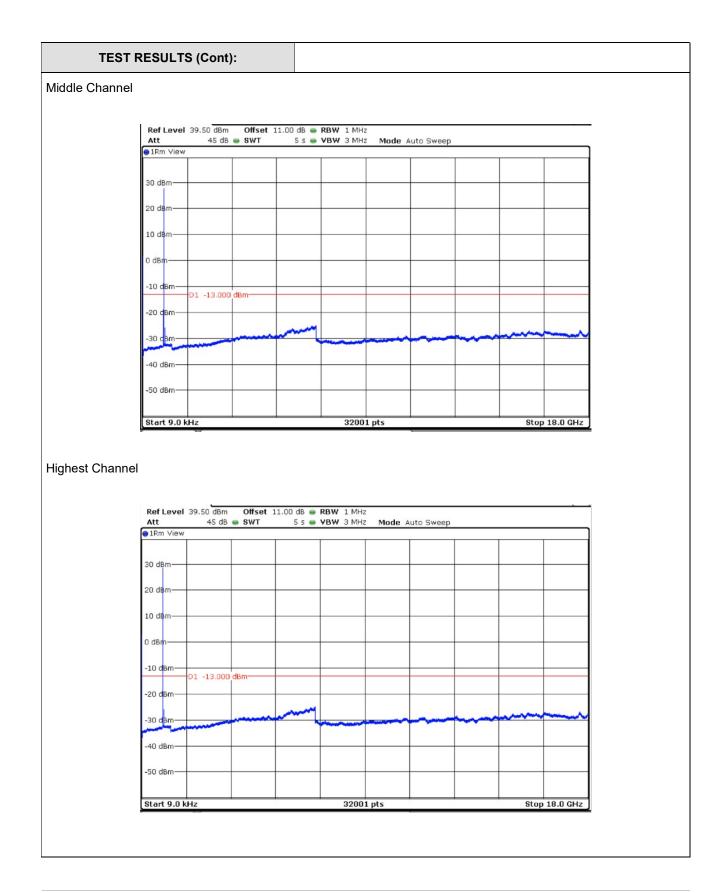




Stop 18.0 GHz

TEST RESULTS (Cont): LTE QPSK MODULATION. BW = 5 MHz Lowest Channel Ref Level 40.50 dBm Offset 12.00 dB - RBW 1 MHz 45 dB 👄 SWT Mode Auto Sweep Att 5 s 👄 VBW 3 MHz • 1Rm View 30 dBm-20 d**B**I 10 den 0 dBm -10 cBm-D1 -13.000 dBm--20 c Bm -30 c<mark>Bm</mark> -40 dBm--50 dBm-Start 9.0 kHz 32001 pts


Middle Channel

| Att | 45 dB | SWT | 5 s 👄 | VBW 3 MHz | Mode A | uto Sweep | | |
|--------------|------------|-----|-------|-----------|--------|-----------|------|------------|
| ●1Rm View | | | | | | | | |
| | | | | | | | | |
| 30 dBm | | | | | | | | |
| 20 d8m | | | | | | | | |
| 10 d8m | | | | | | | | |
| 0 dBm | | | | | | | | |
| -10 dBm |)1 -13.000 | dBm | | | | | | |
| -20 cBm | | | 2020 | | | | | |
| -30 cBm | | | m | | - | | | |
| -40 dBm | | | | | | | | |
| -50 dBm | | | | | | | | |
| Start 9.0 kH | Iz | | | 32001 | pts | | Stop | 0 18.0 GHz |



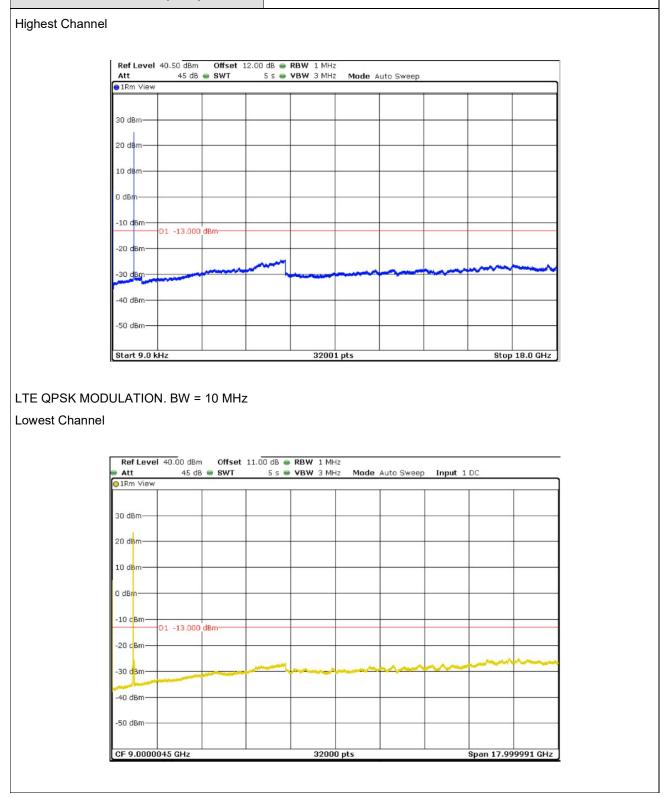





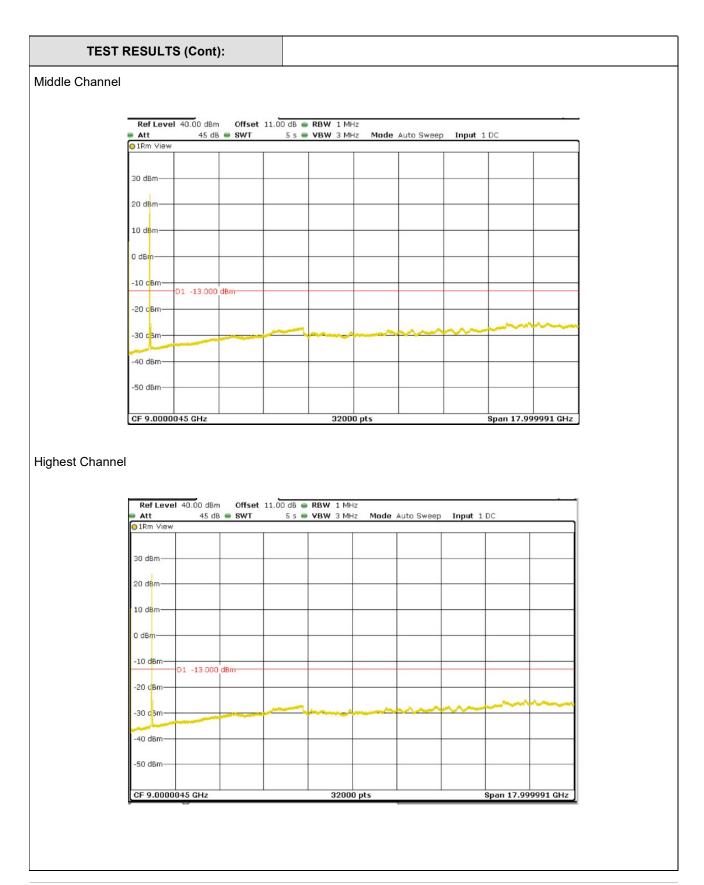








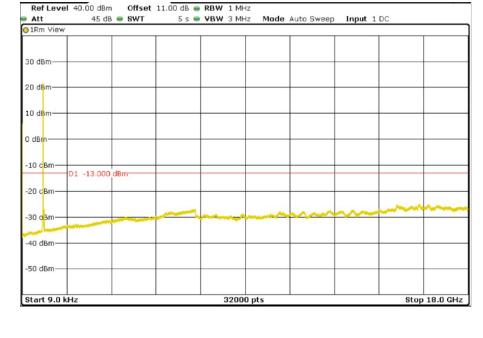

Middle Channel

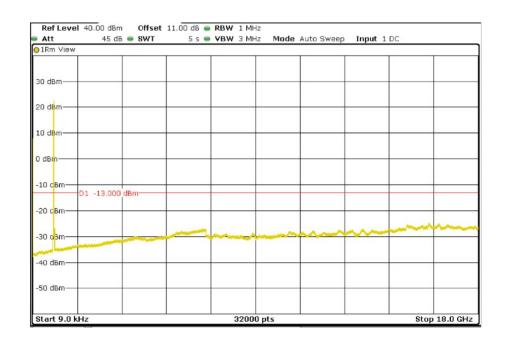



| Att 45 of 1Rm View | ib 🖷 SWT | 5 s 🖷 | VBW 3 M | 12 Mode | Auto Sweep | input 1 | 00 | |
|--------------------|----------|-------|---------|---------|------------|---------|----|--|
| 0 dBm | | | | | | | | |
| 0 d8m | | | | | | | | |
| 0 d8m | | | | | | | | |
| 10 dBm | 0 dBm | | | | | | | |
| :0 cBm | | | | | | | | |
| 0 dBm | | | | | | | | |
| 0 dBm | | | | | | | | |



TEST A.6: SPURIOUS EMISSIONS AT ANTENNA TERMINALS AT BLOCK EDGES

| | Product standard: | FCC Part 22 / IC RSS-132 |
|---------|-------------------|--|
| LIMITS: | Test standard: | FCC §2.1051 and 22.917/ RSS- Clause 5.5. |

<u>LIMITS</u>

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) – [43 + 10 log (Po in watts)] = -13 dBm


TEST SETUP

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter.

The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer.

For LTE mode the configuration of modulation which is the worst case for conducted power was used.


As indicated in FCC part 22, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block or band, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

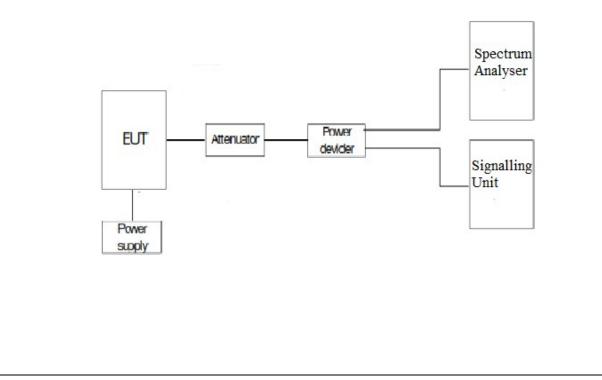



| TESTED SAMPLES: | | | | S/01 | | | |
|--|-------------|------------|---------|-------------|-------------|-----------|--|
| TESTED CONDITION | S MODES: | | TC#01 | | | | |
| TEST RESULTS: | | | | | PASS | | |
| | 1 | | | | 1 | | |
| LTE QPSK MODULATION | RB=1. | RB=1. | | RB=1. | RB=1. | RB=1. | |
| | Offset=0. | Offs | et =0. | Offset =0. | Offset =0. | Offset =0 | |
| | BW=1.4 MHz | BW = | 3 MHz | BW = 5 MHz | BW = 10 MHz | BW = 15 M | |
| Maximum measured level at lowest Block Edge at antenna port (dBm) | -21.02 | - | 18 | -20.73 | -16.48 | -18.74 | |
| LTE QPSK | RB= All | БР | = All. | RB= All. | RB= All. | RB= All. | |
| MODULATION: | | | – AII. | RD- All. | KD- All. | RD- All. | |
| | Offset=0. | Offs | et =0. | Offset =0. | Offset =0. | Offset =0 | |
| | BW=1.4 MHz | BW = | 3 MHz | BW = 5 MHz | BW = 10 MHz | BW = 15 M | |
| Maximum measured level at lowest Block Edge at antenna port (dBm) | -17.2 | -1 | 7.39 | -16.1 | -19.4 | -16.72 | |
| | / | | | / | / | / | |
| LTE QPSK MODULATION: | RB= 1. | RB= 1. | | RB= 1. | RB= 1. | RB= 1. | |
| | Offset=Max. | Offse | et=Max. | Offset=Max. | Offset=Max. | Offset=Ma | |
| | BW=1.4 MHz | BW = | 3 MHz | BW = 5 MHz | BW = 10 MHz | BW = 15 M | |
| Maximum measured level at highest Block Edge at antenna port (dBm) | -19.68 | -1 | 4.37 | -18.1 | -17.11 | -17.57 | |
| | | | | | | | |
| LTE QPSK MODULATION: | RB= All. | RB= All. | | RB= All. | RB= All. | RB= All. | |
| | Offset=0. | Offset =0. | | Offset =0. | Offset =0. | Offset =0 | |
| | BW=1.4 MHz | BW = | 3 MHz | BW = 5 MHz | BW = 10 MHz | BW = 15 M | |
| Maximum measured level at highest Block Edge at antenna port (dBm) | -18.02 | -1 | 5.74 | -16.22 | -19.87 | -19.9 | |



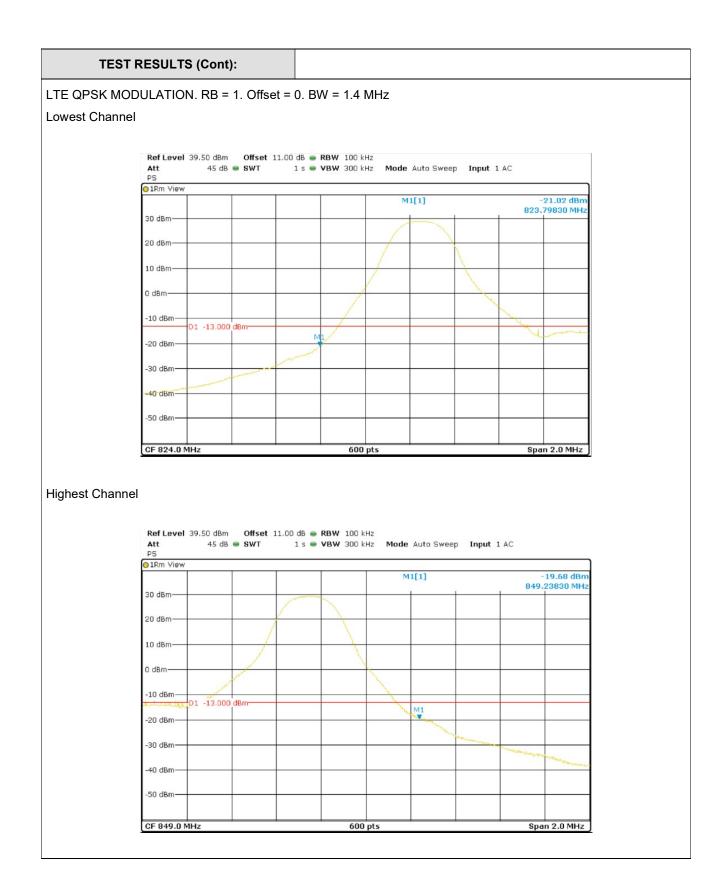



LTE QPSK MODULATION. RB = 6. Offset = 0. BW = 1.4 MHz

Lowest Channel











Lowest Channel

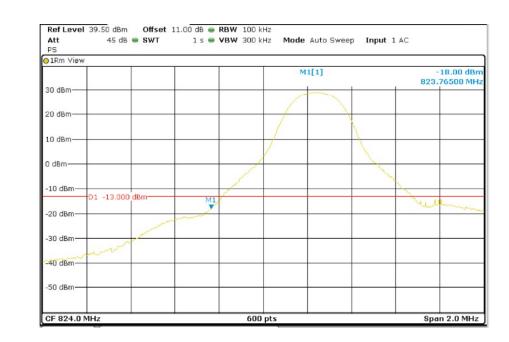








Lowest Channel

Ref Level 39.50 dBm Offset 11.00 dB - RBW 100 kHz 45 dB 👄 SWT 1 s 🖷 VBW 300 kHz Mode Auto Sweep Input 1 AC Att PS 01Rm View -17.39 dBm 823.85500 MHz M1[1] 30 dBm-20 dBm-10 dBm-0 dBm--10 dBm-D1 -13.000 dBm-11 -20 dBm--30 dBm--40 dBm--50 dBm-Span 2.0 MHz CF 824.0 MHz 600 pts





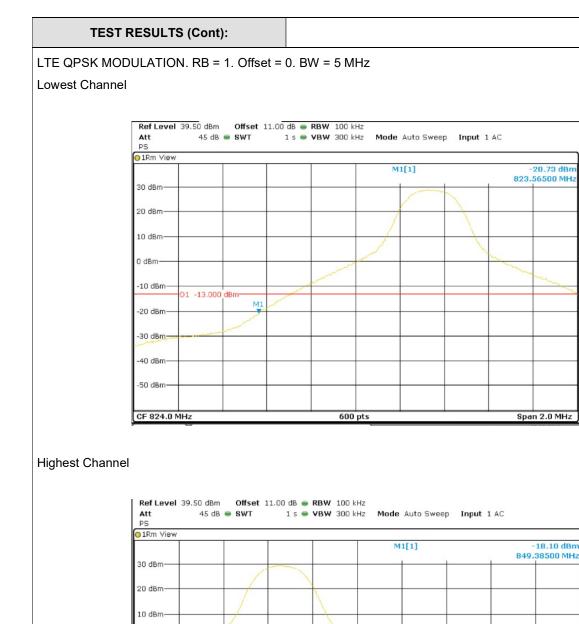

-20 dBm -30 dBm -40 dBm -50 dBm


CF 849.0 MHz

D1 -13.000 dBm-


600 pts


Span 2.0 MHz






Lowest Channel

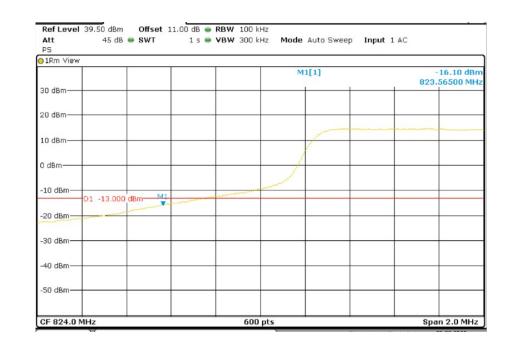


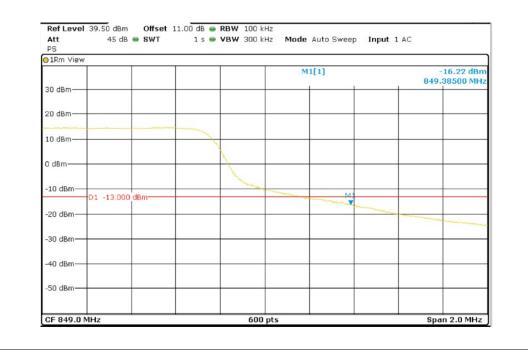



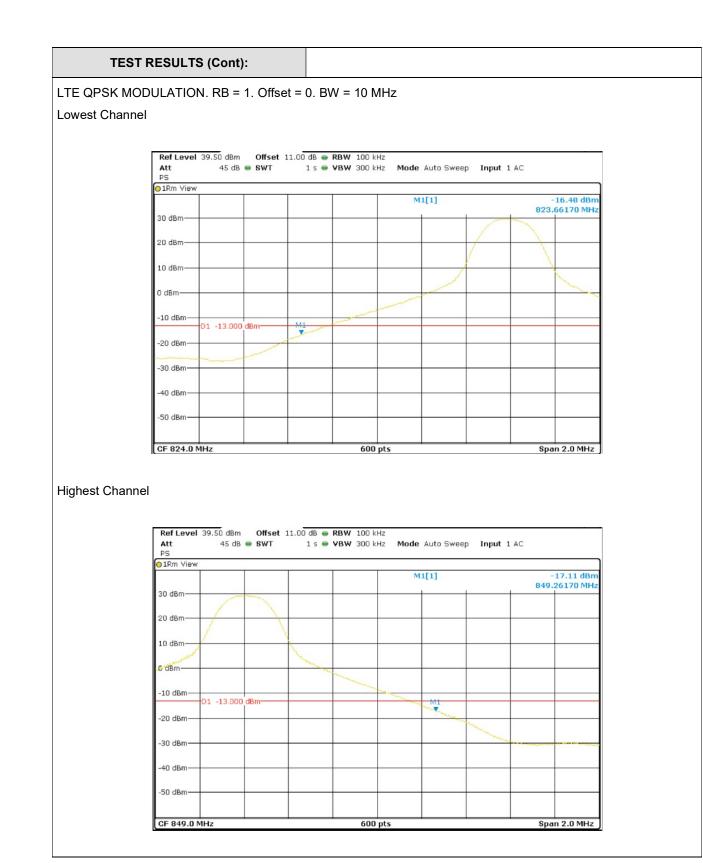






Lowest Channel

Ref Level 39.50 dBm Offset 11.00 dB - RBW 100 kHz Att PS 45 dB 👄 SWT 1 s 👄 VBW 300 kHz Mode Auto Sweep Input 1 AC 01Rm View -19.40 dBm 823.66170 MHz M1[1] 30 dBm-20 dBm-10 dBm 0 dBm--10 dBm-D1 -13.000 dBm-M1 -20 dBm--30 dBm--40 dBm-50 dBm Span 2.0 MHz CF 824.0 MHz 600 pts

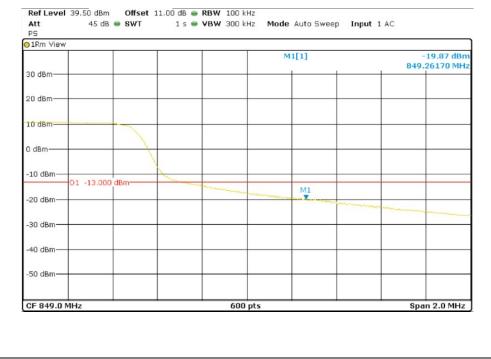












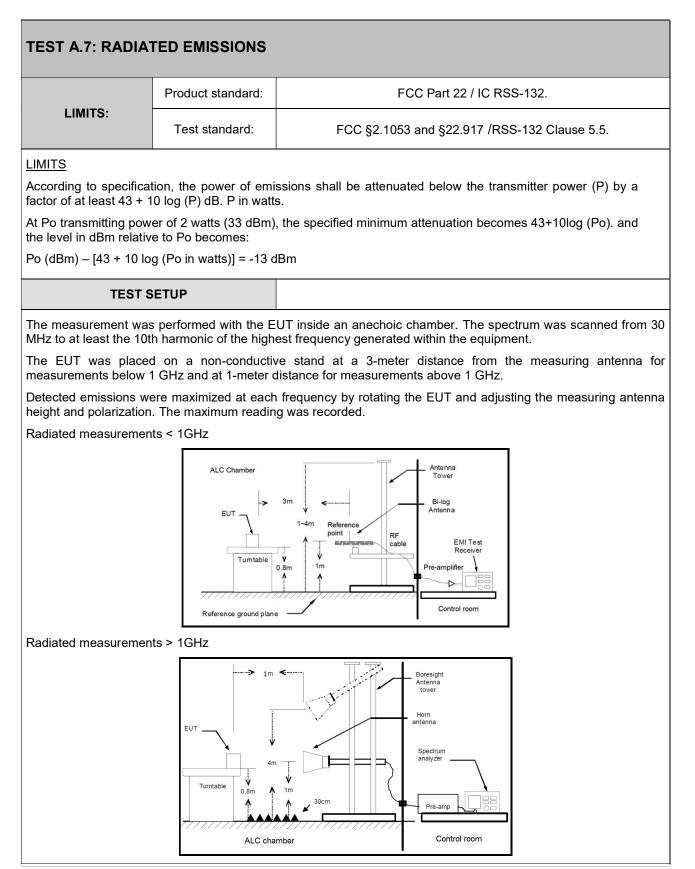



| TESTED SAMPLES: | S/01 |
|--------------------------|-------|
| TESTED CONDITIONS MODES: | TC#01 |
| TEST RESULTS: | PASS |
| | |

RESULTS

A preliminary scan determined the QPSK 1.4 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.

No spurious signal was found at less than 20dB respect to the limit in all the frequency ranges.


LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 1.4 MHz

TEST RESULTS (Cont):


Low Channel

FREQUENCY RANGE: 30-1000 MHz

| Frequency (MHz) | PK+_CLRWR (dBm) | PK+_MAXH (dBm) | Comment |
|--------------------|--------------------|-------------------|-------------|
| 65.049333 | -74.94 | -65.17 | |
| 94.666667 | -73.58 | -64.27 | |
| 156.197000 | -69.33 | -59.30 | |
| 824.624000 | 22.37 | 27.49 | Fundamental |
| 869.761333 | -26.65 | -18.47 | |

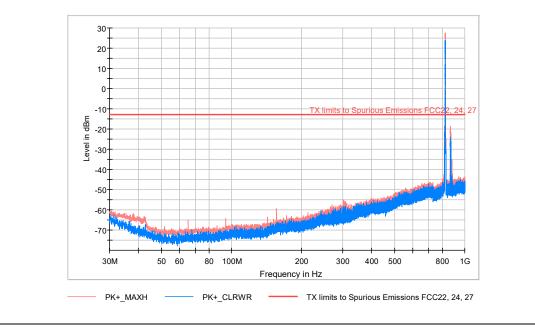



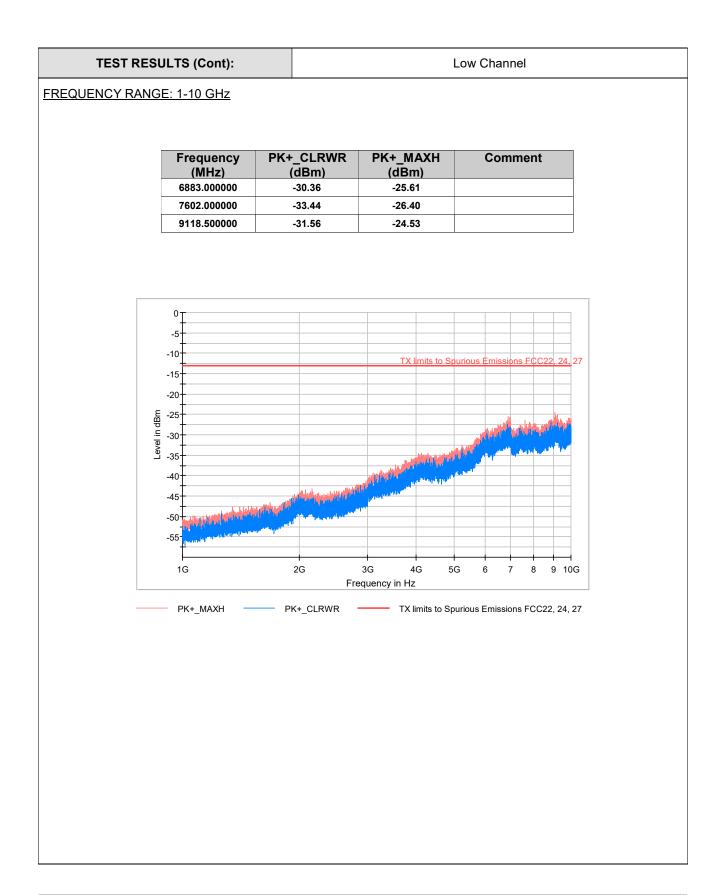




Middle Channel


FREQUENCY RANGE: 30-1000 MHz

| Frequency (MHz) | PK+_CLRWR (dBm) | PK+_MAXH (dBm) | Comment |
|--------------------|--------------------|-------------------|-------------|
| 57.192333 | -73.60 | -59.27 | |
| 72.356667 | -75.44 | -58.47 | |
| 95.281000 | -70.73 | -60.18 | |
| 161.661333 | -70.12 | -58.71 | |
| 836.749000 | -14.47 | -9.56 | Fundamental |

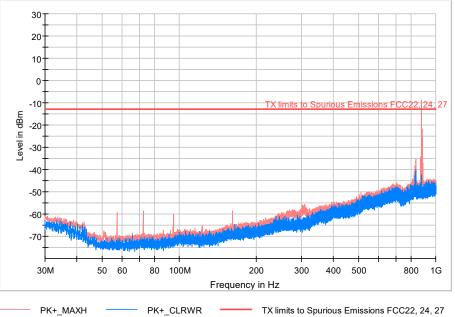

TX limits to Spurious Emissions FCC22, 24, 27



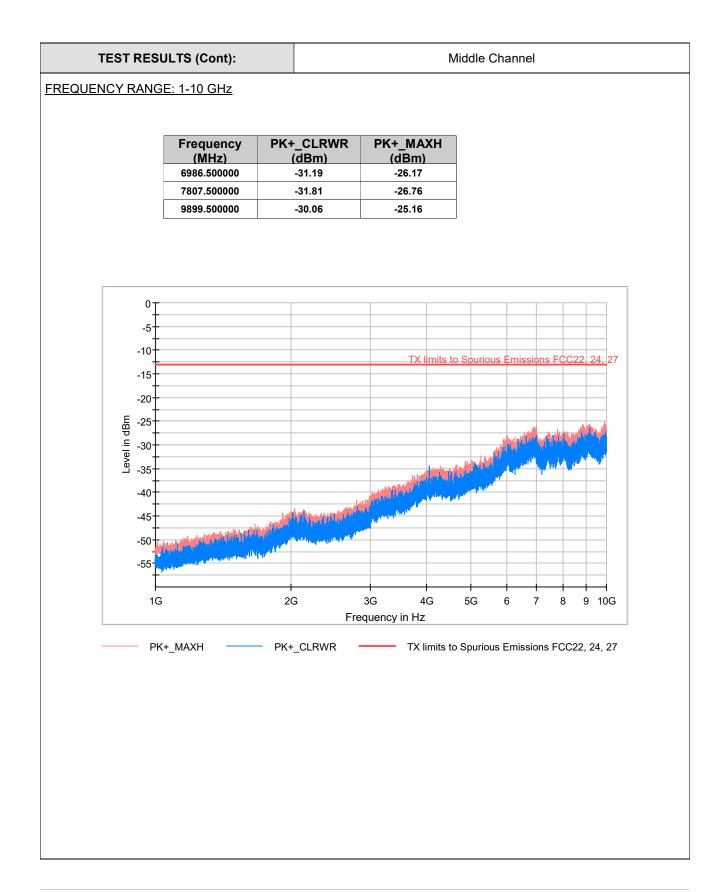



| TEST RESULTS(Cont.): | High Channel |
|----------------------|--------------|
| | |

FREQUENCY RANGE: 30-1000 MHz

| Frequency (MHz) | PK+_CLRWR (dBm) | PK+_MAXH (dBm) | Comment |
|--------------------|--------------------|-------------------|-------------|
| 49.658667 | -73.03 | -58.94 | |
| 50.725667 | -74.35 | -55.24 | |
| 61.234000 | -72.70 | -58.50 | |
| 94.666667 | -71.42 | -63.41 | |
| 345.670333 | -60.46 | -55.32 | |
| 848.809333 | -14.74 | -11.20 | Fundamental |

