

APPLICATION CERTIFICATION FCC Part 15C

On Behalf of

Shenzhen Dragon Brothers Digital Lock Co., Ltd

Bluetooth Lock

Model No.: GS40, YS50, GS60, GG10, US20, XB30, XG70

FCC ID: 2ANKIGS40

Prepared for : Shenzhen Dragon Brothers Digital Lock Co., Ltd
Address : Floor 5, D Building, The second Science & technology Zone,
Dakan, Xili Lake, Nanshan Area Shenzhen, China

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry
Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20171838
Date of Test : September 16-September 19, 2017
Date of Report : September 20, 2017

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	6
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. POWER LINE CONDUCTED MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	12
5.3. Configuration of EUT on Measurement	12
5.4. Operating Condition of EUT	12
5.5. Test Procedure	12
5.6. Data Sample.....	13
5.7. Power Line Conducted Emission Measurement Results	13
6. 6DB BANDWIDTH MEASUREMENT	14
6.1. Block Diagram of Test Setup.....	14
6.2. The Requirement For Section 15.247(a)(2).....	14
6.3. EUT Configuration on Measurement	14
6.4. Operating Condition of EUT	14
6.5. Test Procedure	14
6.6. Test Result	15
7. MAXIMUM PEAK OUTPUT POWER	17
7.1. Block Diagram of Test Setup.....	17
7.2. The Requirement For Section 15.247(b)(3).....	17
7.3. EUT Configuration on Measurement	17
7.4. Operating Condition of EUT	17
7.5. Test Procedure	17
7.6. Test Result	18
8. POWER SPECTRAL DENSITY MEASUREMENT	20
8.1. Block Diagram of Test Setup.....	20
8.2. The Requirement For Section 15.247(e).....	20
8.3. EUT Configuration on Measurement	20
8.4. Operating Condition of EUT	20
8.5. Test Procedure	21
8.6. Test Result	22
9. BAND EDGE COMPLIANCE TEST	24
9.1. Block Diagram of Test Setup.....	24
9.2. The Requirement For Section 15.247(d)	24
9.3. EUT Configuration on Measurement	24

9.4.	Operating Condition of EUT	24
9.5.	Test Procedure	25
9.6.	Test Result	25
10.	RADIATED SPURIOUS EMISSION TEST	31
10.1.	Block Diagram of Test Setup.....	31
10.2.	The Limit For Section 15.247(d)	32
10.3.	Restricted bands of operation	33
10.4.	Configuration of EUT on Measurement	33
10.5.	Operating Condition of EUT	34
10.6.	Test Procedure	34
10.7.	Data Sample.....	35
10.8.	The Field Strength of Radiation Emission Measurement Results	35
11.	ANTENNA REQUIREMENT.....	48
11.1.	The Requirement	48
11.2.	Antenna Construction	48

Test Report Certification

Applicant : Shenzhen Dragon Brothers Digital Lock Co., Ltd

Manufacturer : Shenzhen Dragon Brothers Digital Lock Co., Ltd

EUT Description : Bluetooth Lock

Model No. : GS40, YS50, GS60, GG10, US20, XB30, XG70

(Note: We hereby state that these models are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement. So we prepare the GS40 for test.)

Trade Name : OKLOK

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2016
ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of Apr 05, 2017 KDB558074 D01 DTS Meas Guidance v04 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test :

September 16-September 19, 2017

Date of Report:

September 20, 2017

Prepared by :

(Sean Yang, Engineer)

Approved & Authorized Signer :

(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Bluetooth Lock
Model Number	:	GS40, YS50, GS60, GG10, US20, XB30, XG70 (Note: We hereby state that these models are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement. So we prepare the GS40 for test.)
Bluetooth version	:	BT V4.0 LE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	2dBi
Antenna type	:	ceramic chip antenna
Power Supply	:	DC 3.6V (Powered by CR14250/CR2 battery)
Modulation mode	:	GFSK
Applicant	:	Shenzhen Dragon Brothers Digital Lock Co., Ltd
Address	:	Floor 5, D Building, The second Science & technology Zone, Dakan, Xili Lake, Nanshan Area Shenzhen, China
Manufacturer	:	Shenzhen Dragon Brothers Digital Lock Co., Ltd
Address	:	Floor 5, D Building, The second Science & technology Zone, Dakan, Xili Lake, Nanshan Area Shenzhen, China

1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3.Special Accessory and Auxiliary Equipment

PC : Manufacturer: LENOVO
M/N: 4290-RT8
S/N: R9-FW93G 11/08

1.4.Description of Test Facility

EMC Lab : Recognition of accreditation by Federal Communications Commission (FCC)
The Designation Number is CN1189
The Registration Number is 708358

Listed by Innovation, Science and Economic Development Canada (ISED)
The Registration Number is 5077A-2

Accredited by China National Accreditation Service for Conformity Assessment (CNAS)
The Registration Number is CNAS L3193

Accredited by American Association for Laboratory Accreditation (A2LA)
The Certificate Number is 4297.01

Name of Firm : Shenzhen Accurate Technology Co., Ltd.
Site Location : 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

1.5.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty
(Above 1GHz) = 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 07, 2017	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 07, 2017	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 07, 2017	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 07, 2017	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 13, 2017	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 07, 2017	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 07, 2017	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 07, 2017	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 07, 2017	1 Year

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

3.2.Configuration and peripherals

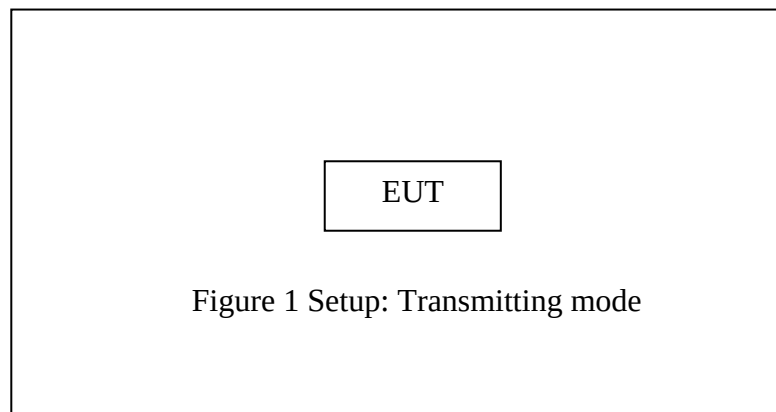

4. TEST PROCEDURES AND RESULTS


FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	N/A
Section 15.203	Antenna Requirement	Compliant

Remark: "N/A" means "Not applicable".

5. POWER LINE CONDUCTED MEASUREMENT


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators

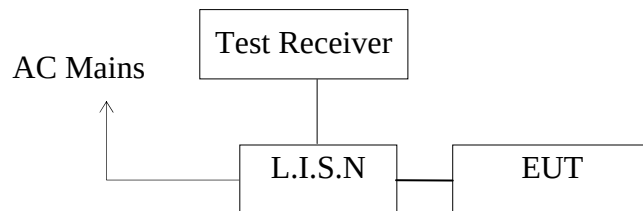

(EUT: Bluetooth Lock)

5.1.2. Test System Setup

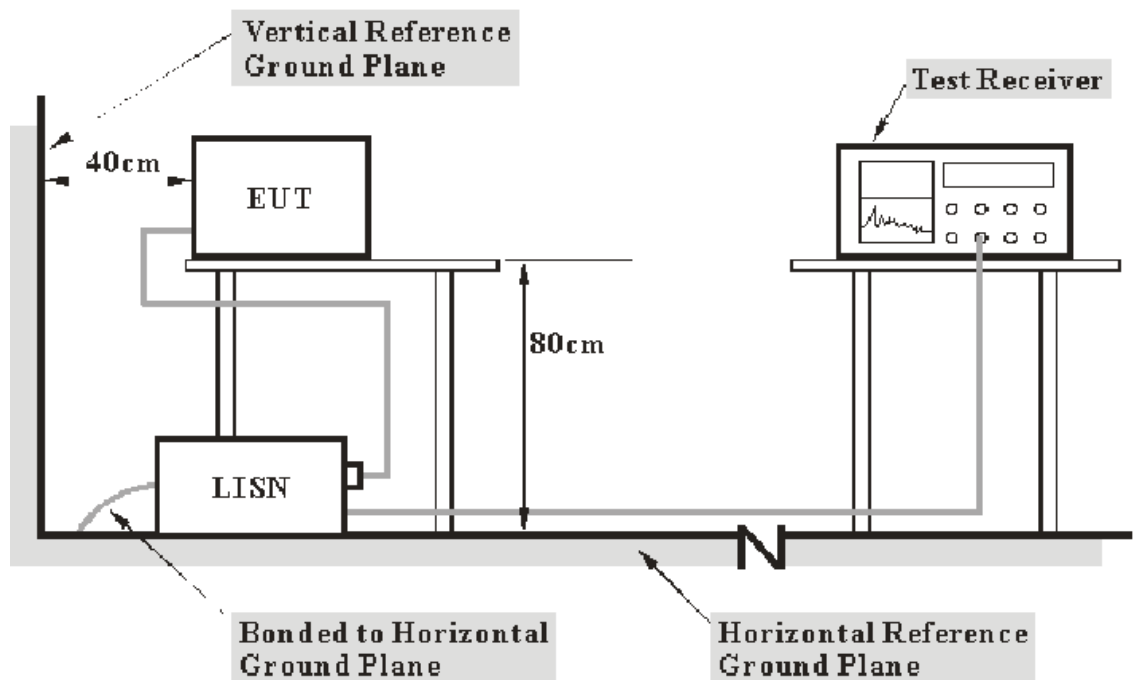

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

5.2.Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0
NOTE1: The lower limit shall apply at the transition frequencies.		
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

5.3.Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4.Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in test mode and measure it.

5.5.Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dBμV)	Average Level (dBμV)	QuasiPeak Limit (dBμV)	Average Limit (dBμV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	11.1	41.8	32.0	56.0	46.0	14.2	14.0	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dBμV) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dBμV) = Limit stated in standard

Margin = Limit (dBμV) - Level (dBμV)

Calculation Formula:

Margin = Limit (dBμV) - Level (dBμV)

5.7.Power Line Conducted Emission Measurement Results

N/A.

Note: The EUT is powered by batteries, There is no connection to AC mains. Therefore, the test is not applicable and skipped.

6. 6DB BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup



(EUT: Bluetooth Lock)

6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


6.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

6.6. Test Result

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.708	0.5	PASS
19	2440	0.702	0.5	PASS
39	2480	0.714	0.5	PASS


The spectrum analyzer plots are attached as below.

channel 0

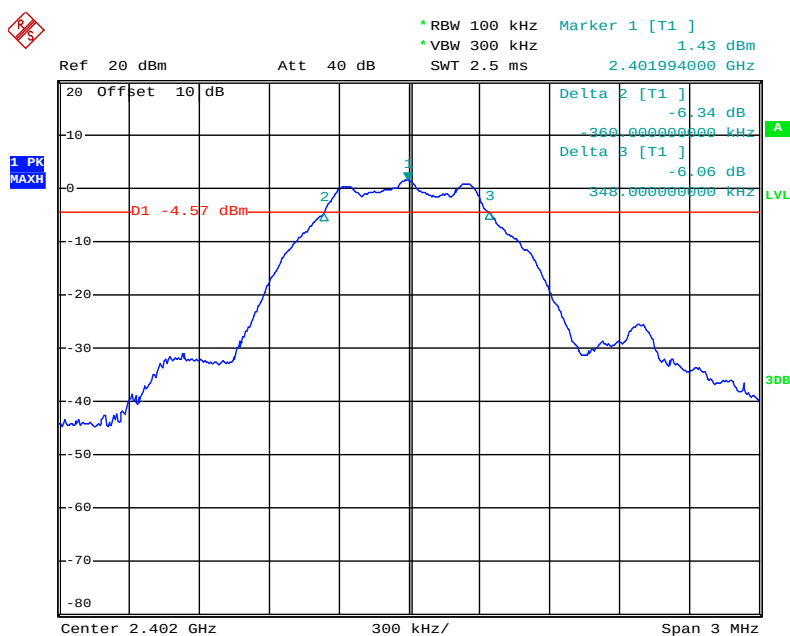


Date: 19.SEP.2017 16:14:39

channel 19

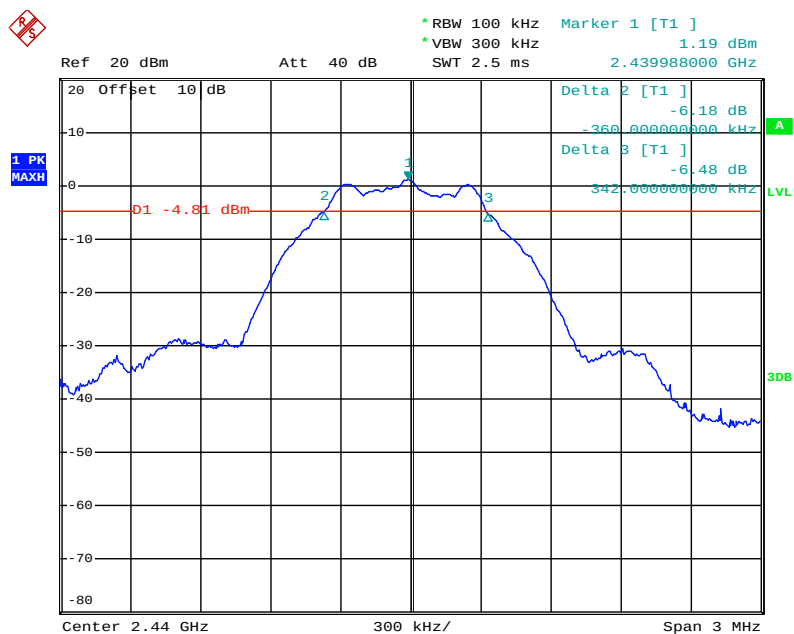

Date: 19.SEP.2017 16:18:25

channel 39

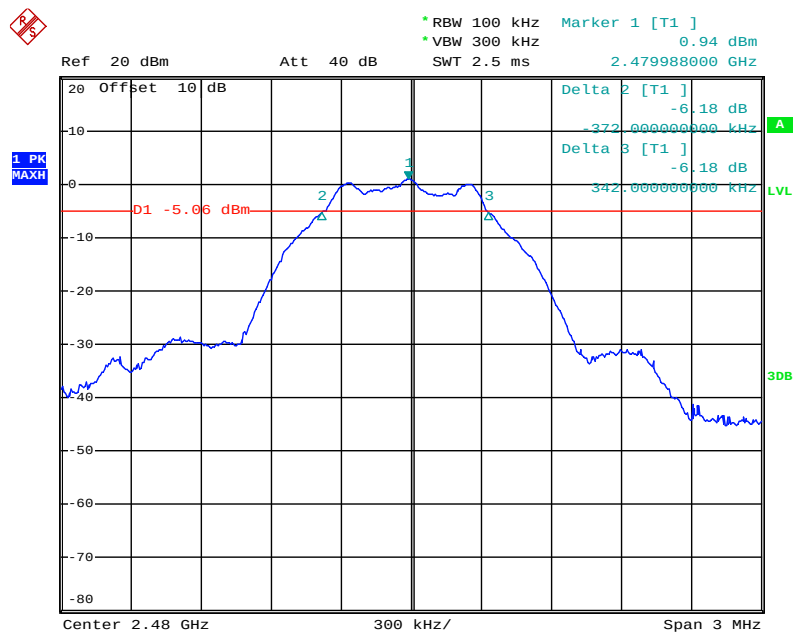

Date: 19.SEP.2017 16:21:35

7. MAXIMUM PEAK OUTPUT POWER

7.1. Block Diagram of Test Setup



(EUT: Bluetooth Lock)

7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3MHz.


7.5.3. Measurement the maximum peak output power.

7.6.Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	1.86	30	PASS
19	2440	1.95	30	PASS
39	2480	1.91	30	PASS


The spectrum analyzer plots are attached as below.

channel 0

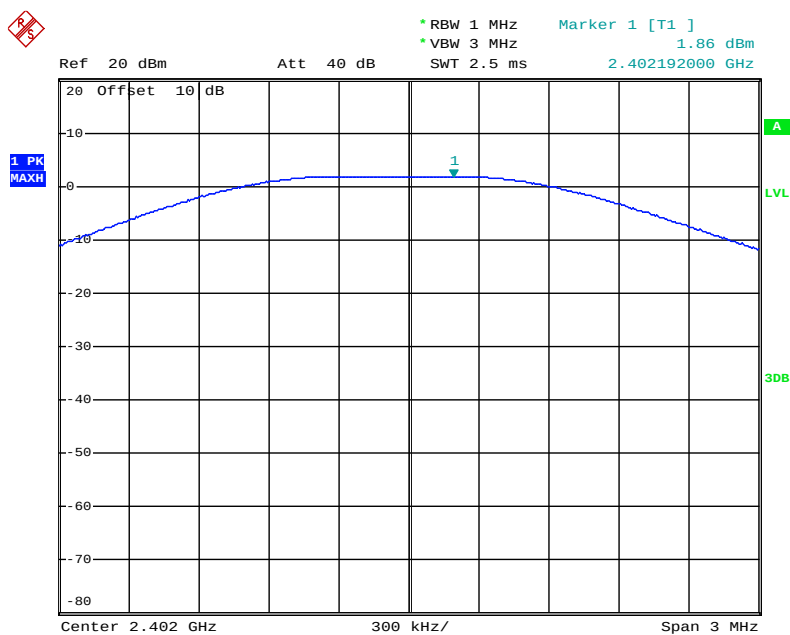


Date: 19.SEP.2017 09:34:50

channel 19

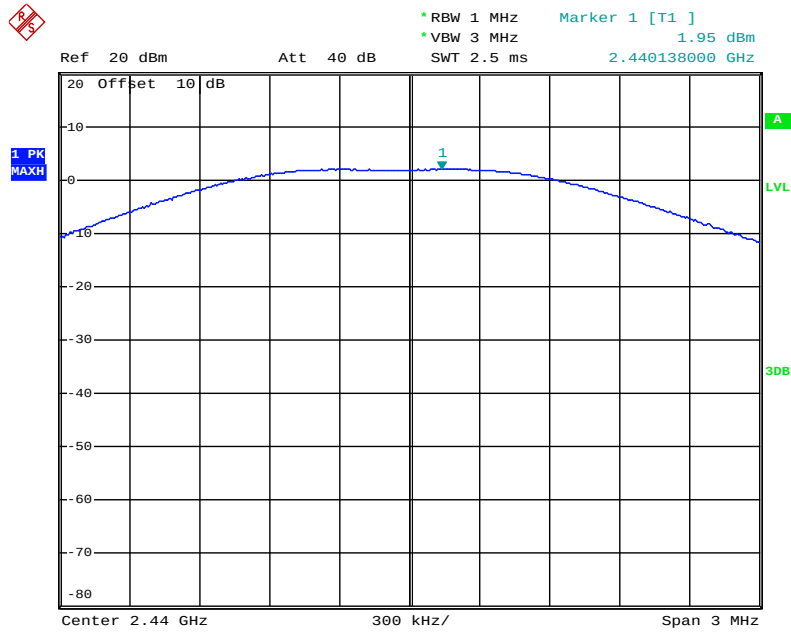

Date: 19.SEP.2017 09:35:29

channel 39

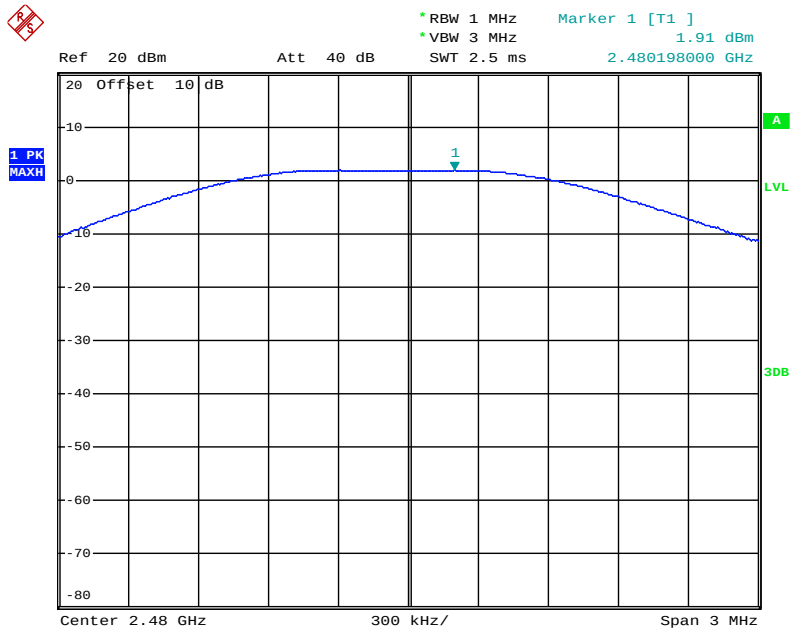

Date: 19.SEP.2017 09:36:52

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Block Diagram of Test Setup



(EUT: Bluetooth Lock)

8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Measurement Procedure PKPSD:

8.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.


8.5.4. Measurement the maximum power spectral density.

8.6. Test Result

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-9.13	8	PASS
19	2440	-9.17	8	PASS
39	2480	-9.48	8	PASS


The spectrum analyzer plots are attached as below.

channel 0

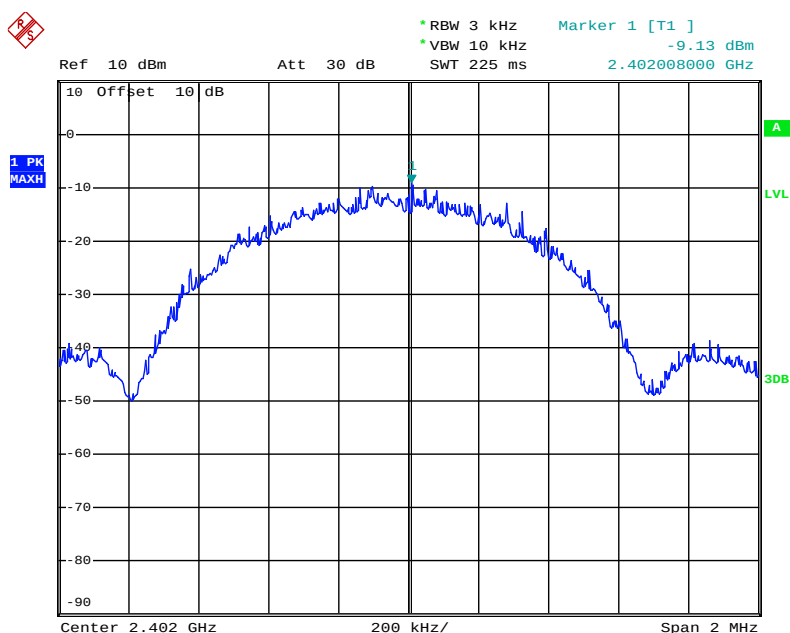


Date: 19.SEP.2017 09:41:50

channel 19

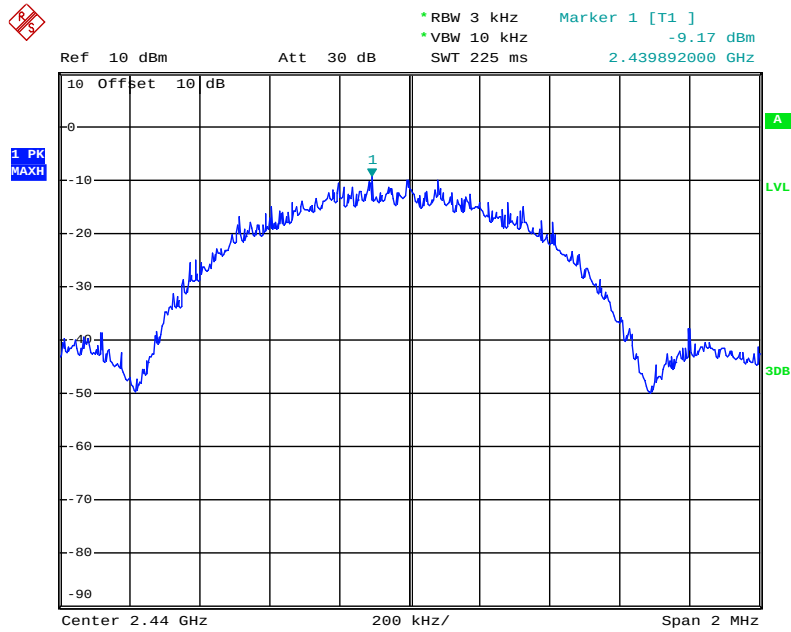

Date: 19.SEP.2017 09:43:25

channel 39

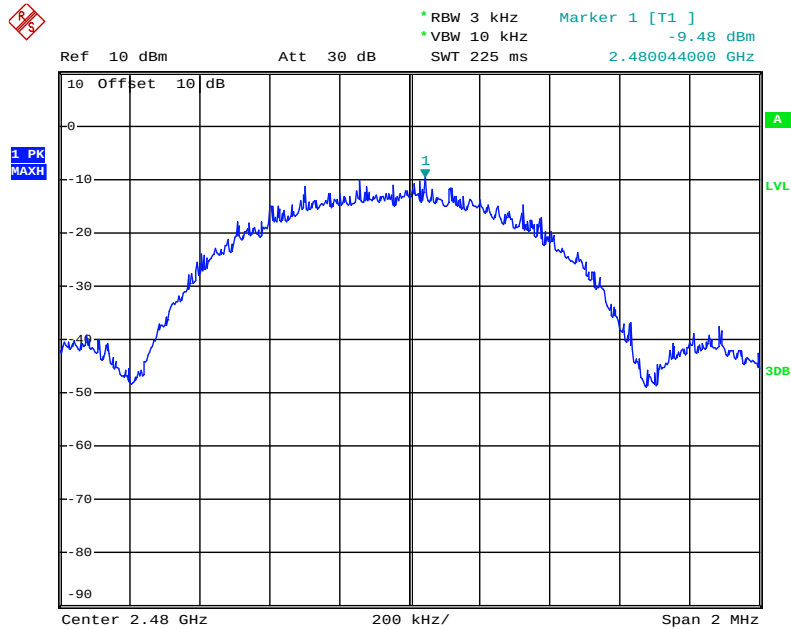

Date: 19.SEP.2017 09:39:29

9. BAND EDGE COMPLIANCE TEST

9.1. Block Diagram of Test Setup



(EUT: Bluetooth Lock)

9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

9.5. Test Procedure

Conducted Band Edge:

9.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

9.5.3. Radiate Band Edge:

9.5.4. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

9.5.5. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.6. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.7. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.8. RBW=1MHz, VBW=1MHz

9.5.9. The band edges was measured and recorded.


9.6. Test Result

Pass.

Conducted Band Edge Result


Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2.402GHz	41.44	20
39	2.480GHz	42.69	20

channel 0

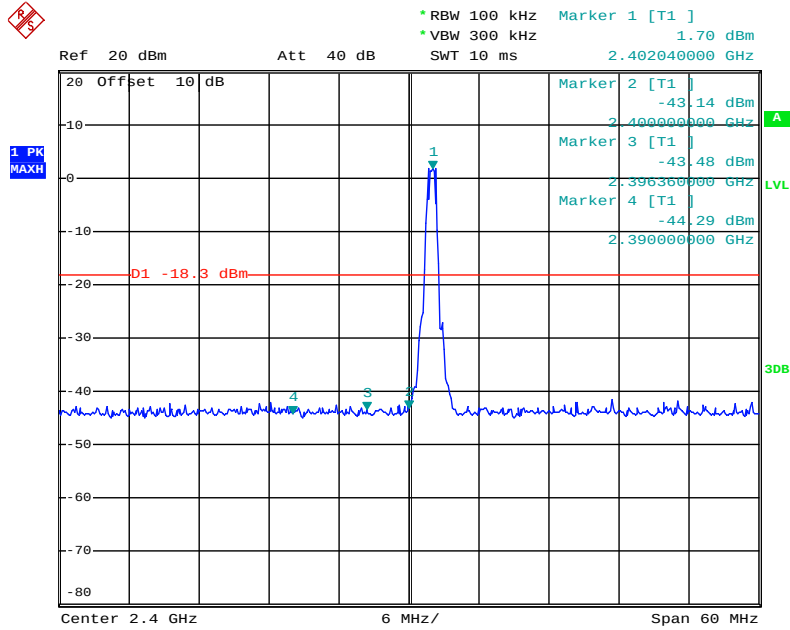

Date: 19.SEP.2017 09:51:45

channel 39

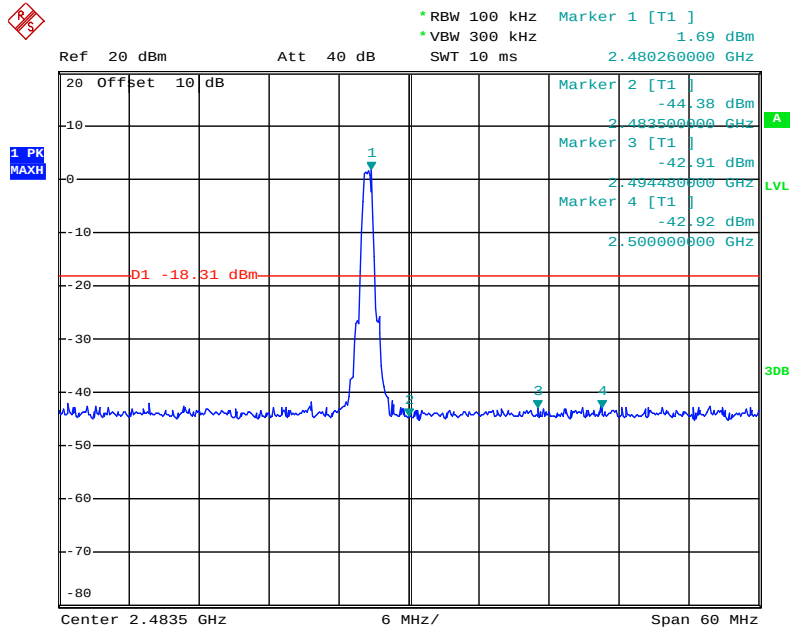

Date: 19.SEP.2017 09:48:25

Radiated Band Edge Result



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #253

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2402MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Horizontal

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/39/49

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

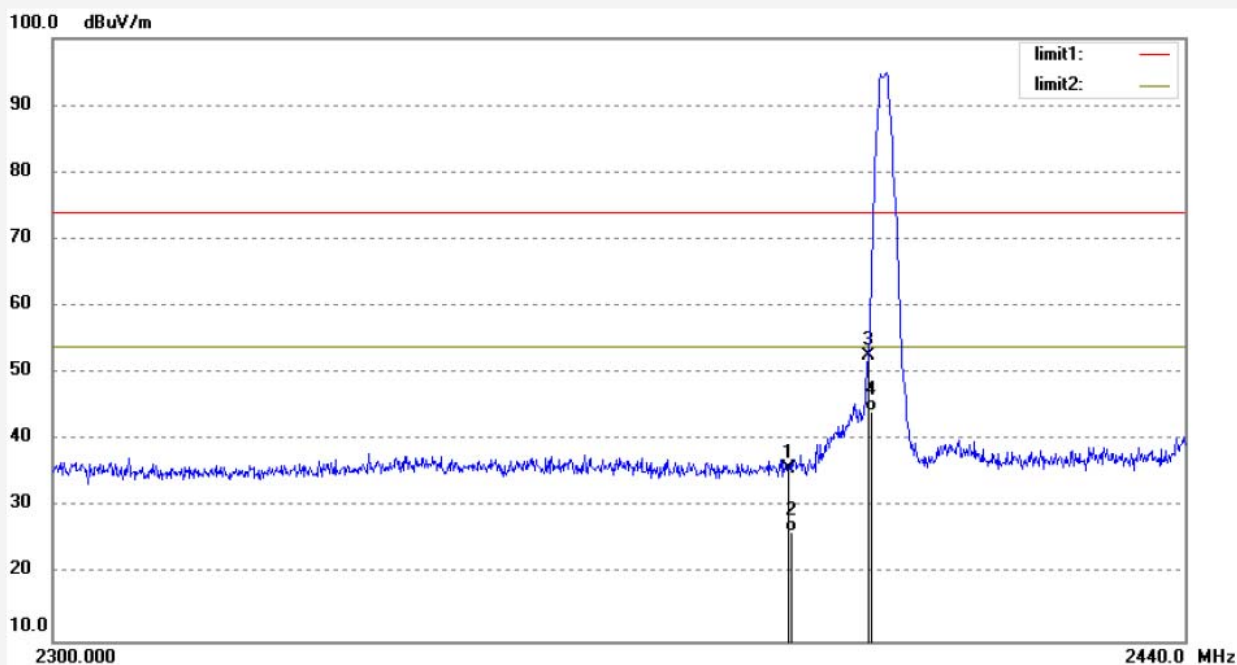

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	39.79	-3.96	35.83	74.00	-38.17	peak			
2	2390.000	30.23	-3.96	26.27	54.00	-27.73	AVG	200	211	
3	2400.000	56.52	-3.91	52.61	74.00	-21.39	peak			
4	2400.000	48.21	-3.91	44.30	54.00	-9.70	AVG	200	221	

Job No.: YJZH1 #252

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2402MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Vertical

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/35/40

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

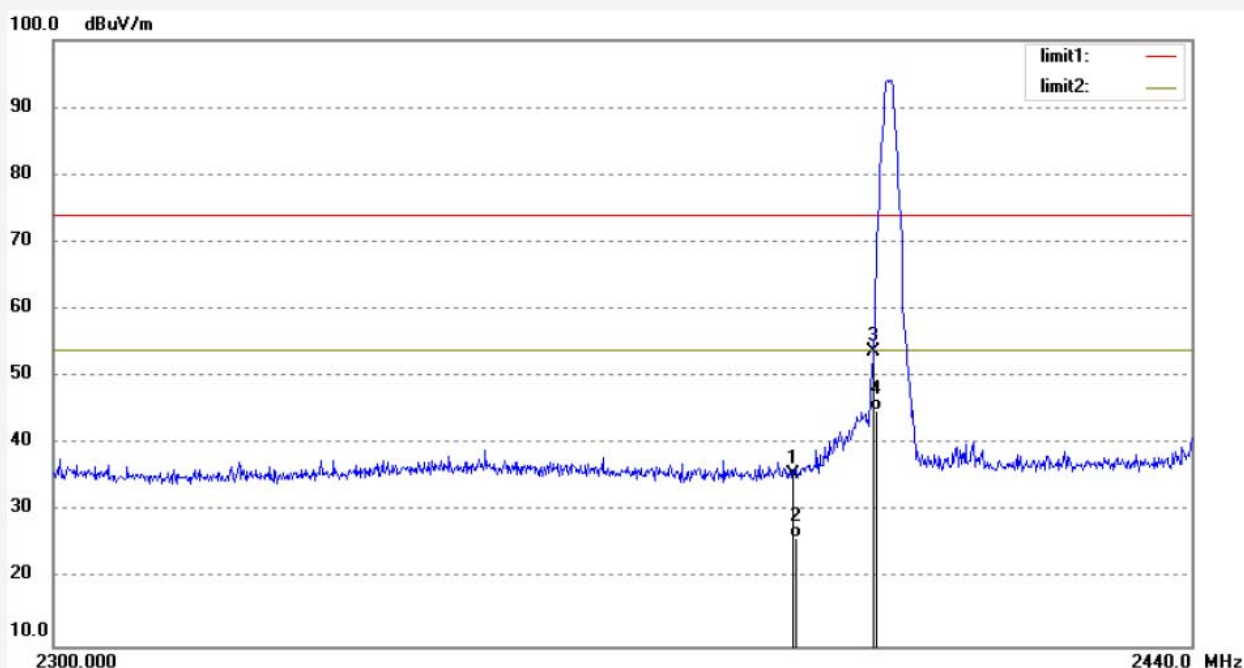

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	39.55	-3.96	35.59	74.00	-38.41	peak			
2	2390.000	30.15	-3.96	26.19	54.00	-27.81	AVG	100	226	
3	2400.000	57.65	-3.91	53.74	74.00	-20.26	peak			
4	2400.000	48.96	-3.91	45.05	54.00	-8.95	AVG	100	234	

Job No.: YJZH1 #254

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2480MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Horizontal

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/42/24

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

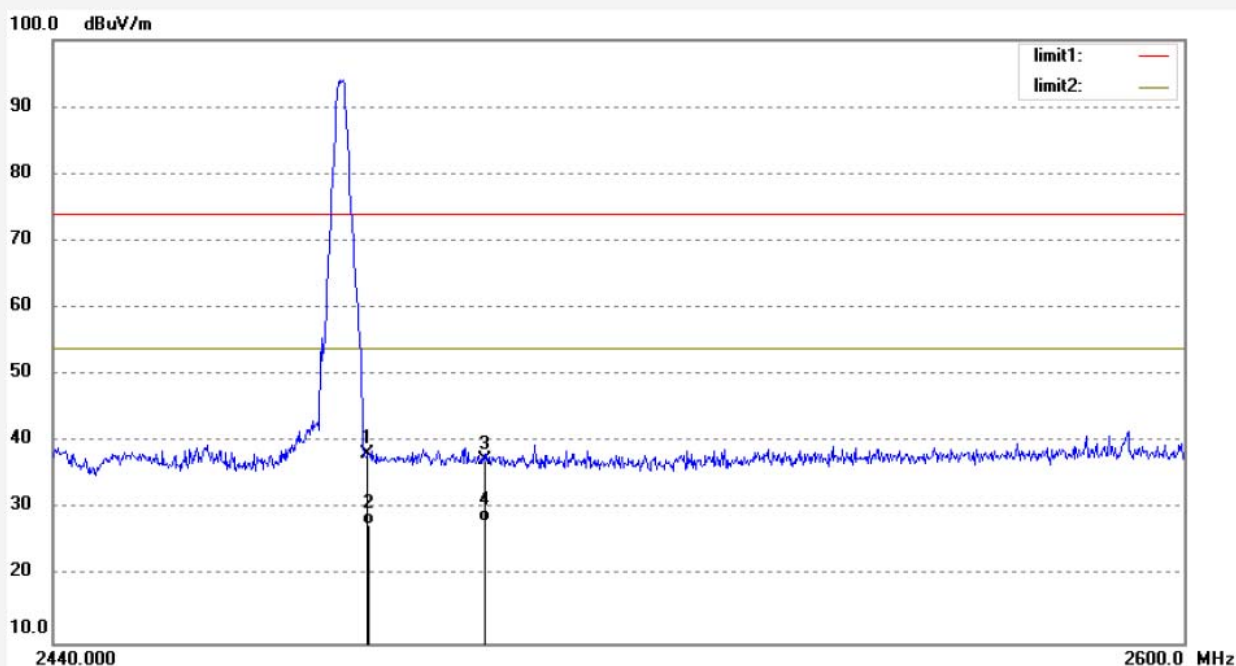

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	41.68	-3.50	38.18	74.00	-35.82	peak			
2	2483.500	31.26	-3.50	27.76	54.00	-26.24	AVG	200	207	
3	2500.000	40.77	-3.42	37.35	74.00	-36.65	peak			
4	2500.000	31.52	-3.42	28.10	54.00	-25.90	AVG	200	284	

Job No.: YJZH1 #255

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2480MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Vertical

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/44/43

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

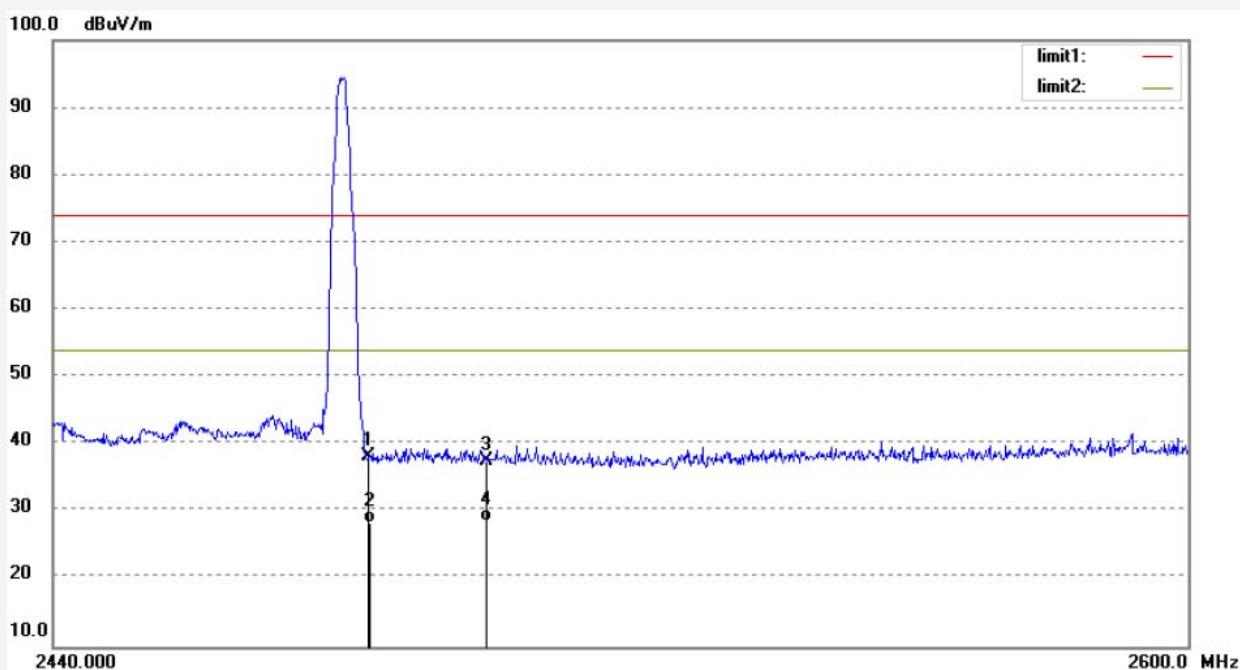

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	41.68	-3.50	38.18	74.00	-35.82	peak			
2	2483.500	31.88	-3.50	28.38	54.00	-25.62	AVG	100	202	
3	2500.000	41.08	-3.42	37.66	74.00	-36.34	peak			
4	2500.000	32.02	-3.42	28.60	54.00	-25.40	AVG	100	267	

Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

10.RADIATED SPURIOUS EMISSION TEST

10.1.Block Diagram of Test Setup

10.1.1.Block diagram of connection between the EUT and peripherals

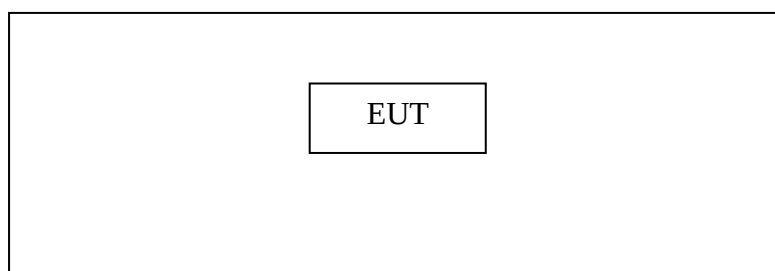


Setup: Transmitting mode


(EUT: Bluetooth Lock)

10.1.2.Semi-Anechoic Chamber Test Setup Diagram


(A)Radiated Emission Test Set-Up, Frequency below 30MHz

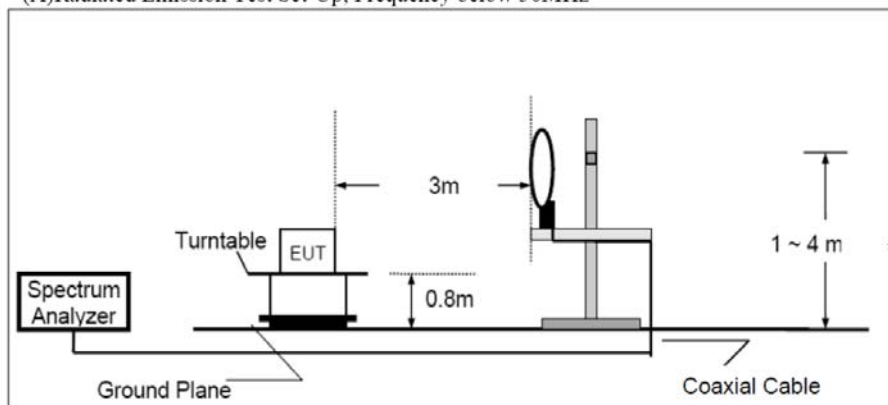

(B)Radiated Emission Test Set-Up, Frequency 30MHz-1GHz

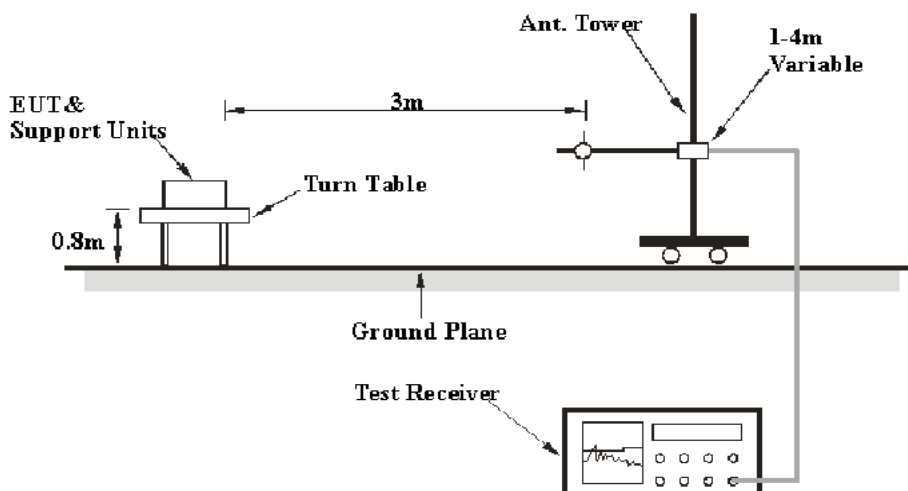

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

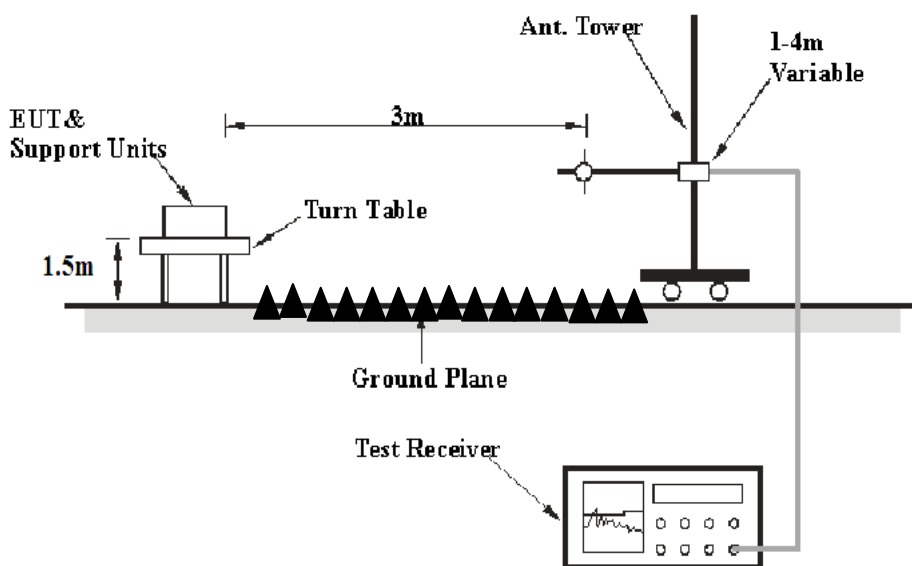

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3. Restricted bands of operation

10.3.1. FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4. Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5. Operating Condition of EUT

10.5.1. Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground(Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 26.5GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading.

10.7.Data Sample

Frequency (MHz)	Reading (dB μ v)	Factor (dB/m)	Result (dB μ v/m)	Limit (dB μ v/m)	Margin (dB)	Remark
31.9586	28.66	-15.19	13.47	40.0	-26.53	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB μ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB μ v/m) = Reading(dB μ v) + Factor(dB/m)

Limit (dB μ v/m) = Limit stated in standard

Margin (dB) = Result(dB μ v/m) - Limit (dB μ v/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB μ V/m)–Limit(dB μ V/m)

Result(dB μ V/m)= Reading(dB μ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

10.8.The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The radiation emissions from 9kHz-30MHz and 18-26.5GHz are not reported, because the test values lower than the limits of 20dB.

Below 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #256

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2402MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Horizontal

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/48/52

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

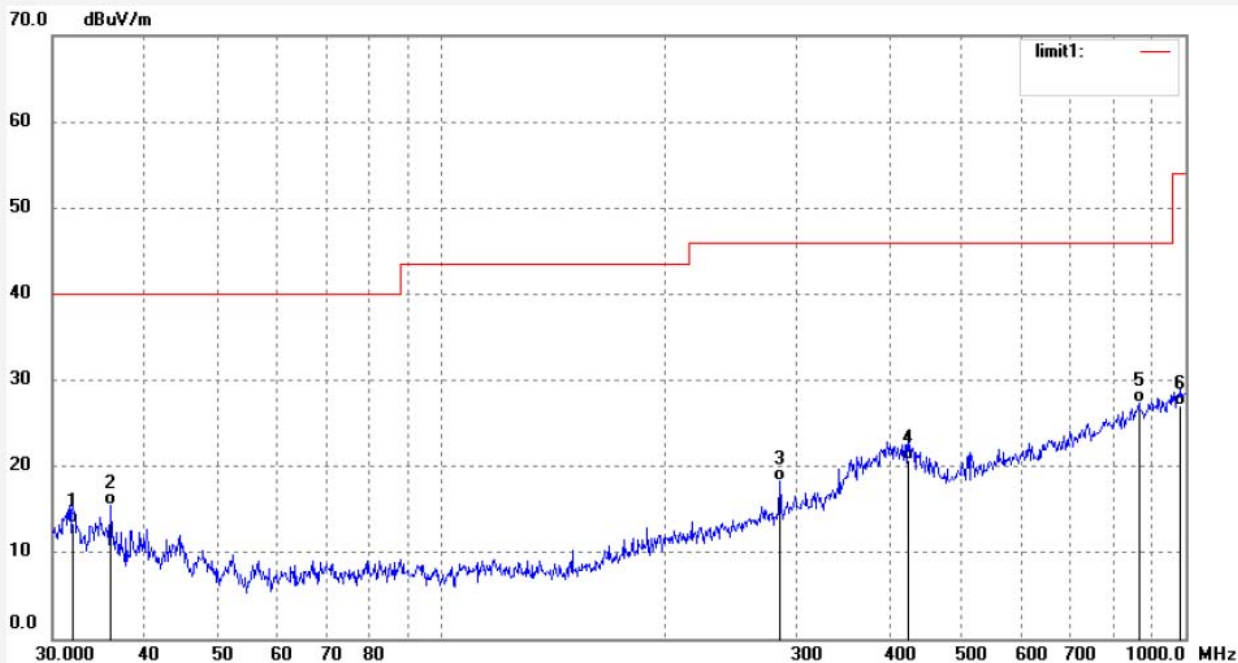

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.9586	28.66	-15.19	13.47	40.00	-26.53	QP	200	222	
2	35.8875	31.76	-16.33	15.43	40.00	-24.57	QP	200	215	
3	285.2611	34.62	-16.37	18.25	46.00	-27.75	QP	200	214	
4	424.2999	33.41	-12.60	20.81	46.00	-25.19	QP	200	212	
5	865.8383	30.34	-2.93	27.41	46.00	-18.59	QP	200	220	
6	982.5855	27.69	-0.65	27.04	54.00	-26.96	QP	200	225	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #257

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2402MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Vertical

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/52/10

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

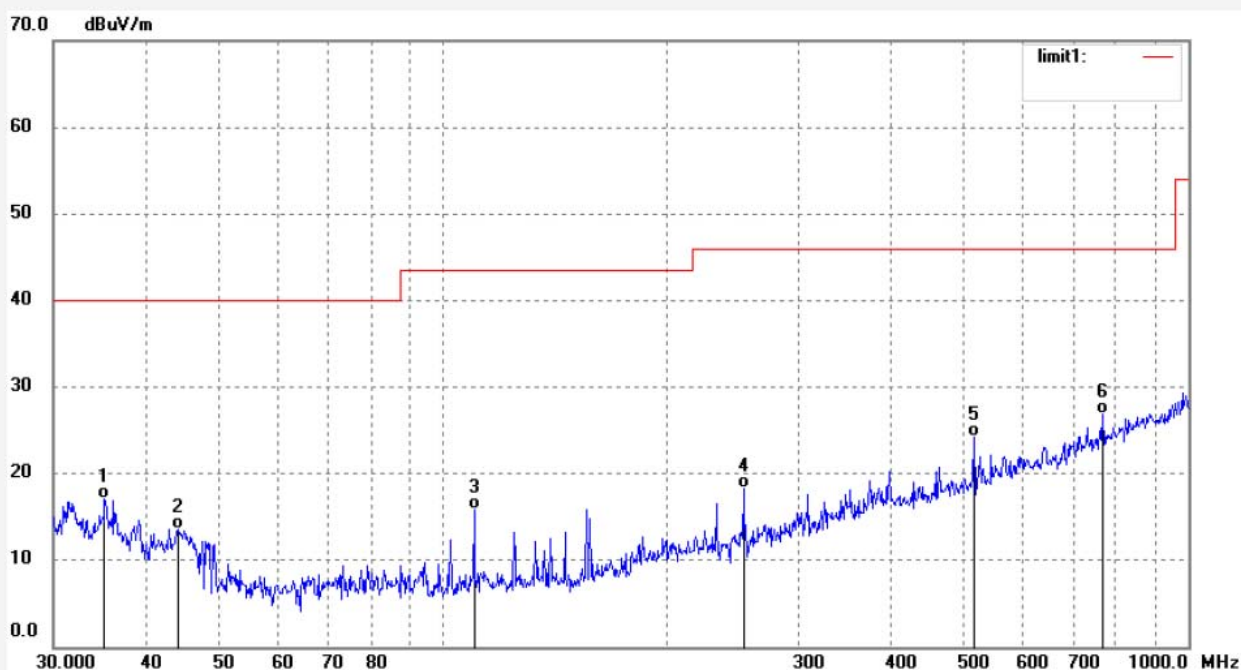

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.1388	33.04	-16.01	17.03	40.00	-22.97	QP	100	221	
2	44.1544	32.32	-18.79	13.53	40.00	-26.47	QP	100	215	
3	110.0818	37.57	-21.81	15.76	43.50	-27.74	QP	100	214	
4	253.1399	36.28	-17.96	18.32	46.00	-27.68	QP	100	210	
5	516.5651	34.67	-10.50	24.17	46.00	-21.83	QP	100	202	
6	768.3431	31.59	-4.77	26.82	46.00	-19.18	QP	100	205	

Job No.: YJZH1 #259

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2440MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Horizontal

Power Source: DC 3.6V


Date: 17/09/16/

Time: 10/00/12

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

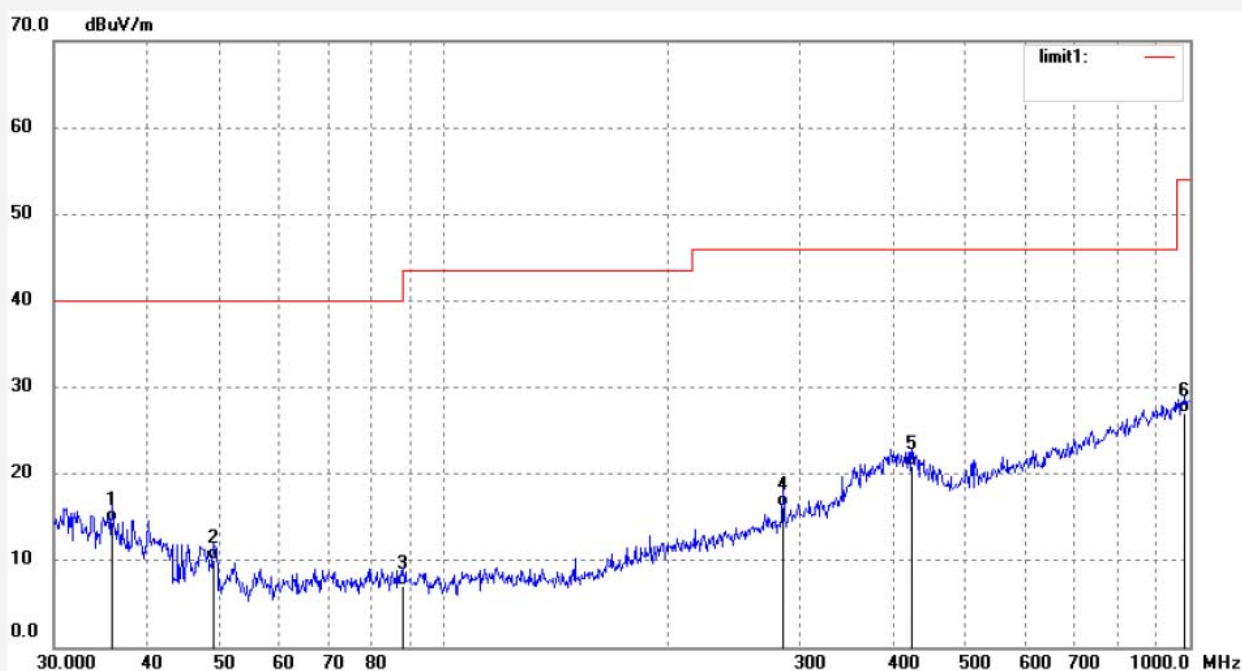

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.8875	30.76	-16.33	14.43	40.00	-25.57	QP	200	215	
2	49.0626	30.49	-20.45	10.04	40.00	-29.96	QP	200	223	
3	88.2228	29.11	-21.94	7.17	43.50	-36.33	QP	200	215	
4	285.2610	32.62	-16.37	16.25	46.00	-29.75	QP	200	202	
5	424.2998	33.43	-12.60	20.83	46.00	-25.17	QP	200	213	
6	982.5855	27.69	-0.65	27.04	54.00	-26.96	QP	200	211	

Job No.: YJZH1 #258

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2440MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Vertical

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/57/23

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

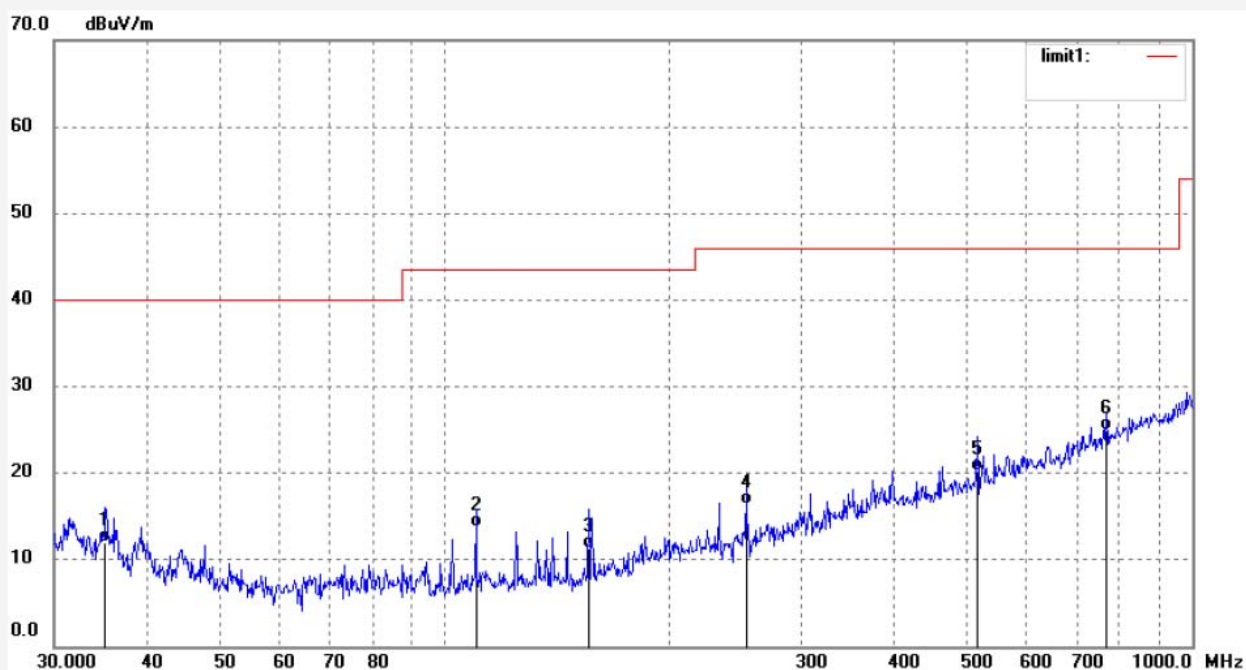

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.1389	28.01	-16.01	12.00	40.00	-28.00	QP	100	210	
2	110.0818	35.57	-21.81	13.76	43.50	-29.74	QP	100	223	
3	155.8771	33.14	-21.82	11.32	43.50	-32.18	QP	100	208	
4	253.1401	34.28	-17.96	16.32	46.00	-29.68	QP	100	221	
5	516.5651	30.67	-10.50	20.17	46.00	-25.83	QP	100	213	
6	768.3431	29.69	-4.77	24.92	46.00	-21.08	QP	100	211	

Job No.: YJZH1 #260

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2480MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Horizontal

Power Source: DC 3.6V


Date: 17/09/16/

Time: 10/05/32

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

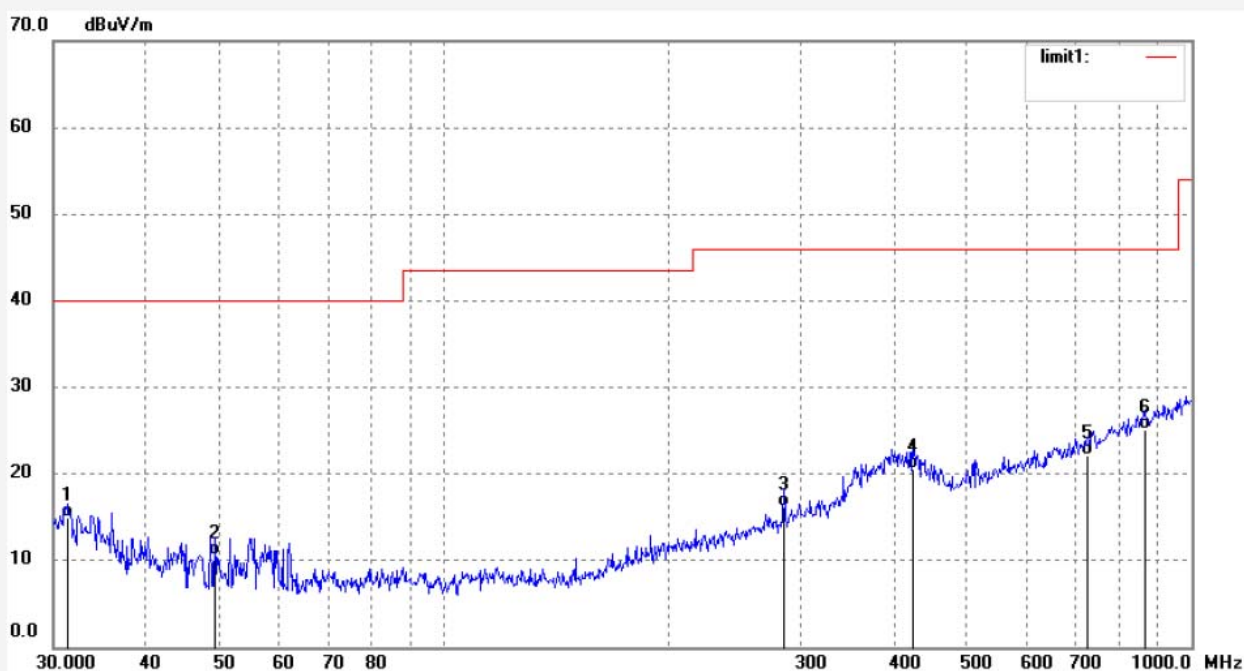



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #261

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2480MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Vertical

Power Source: DC 3.6V


Date: 17/09/16/

Time: 10/11/02

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

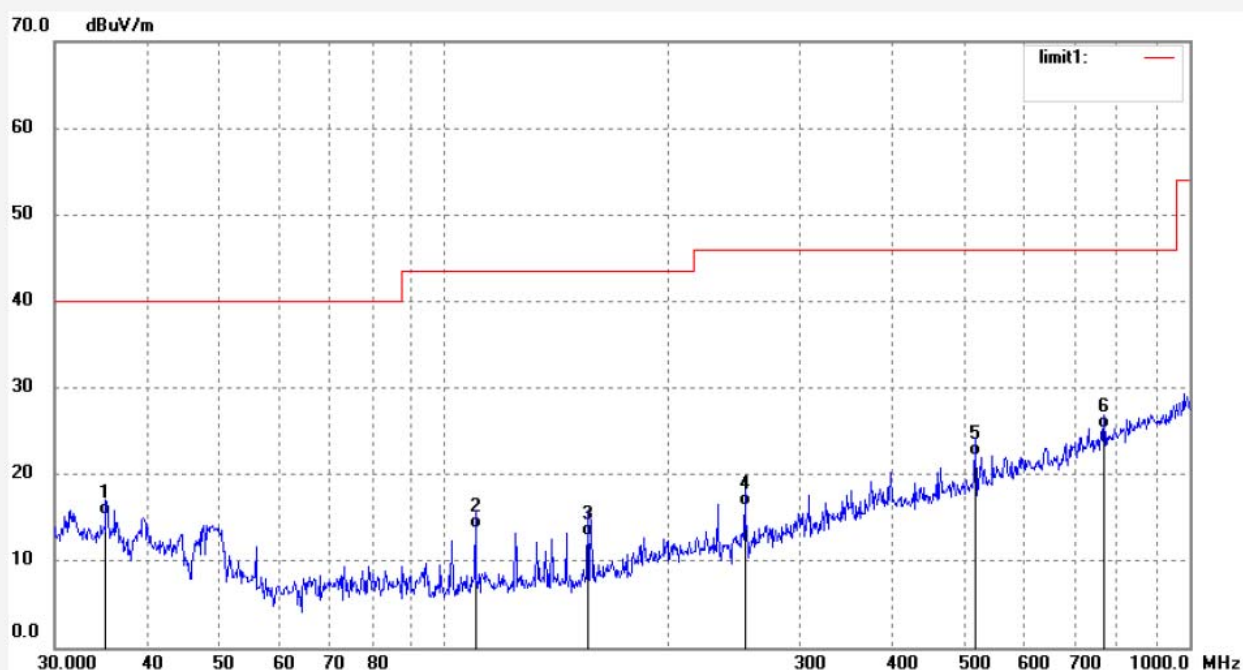

Above 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #244

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2402MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Horizontal

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/16/35

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

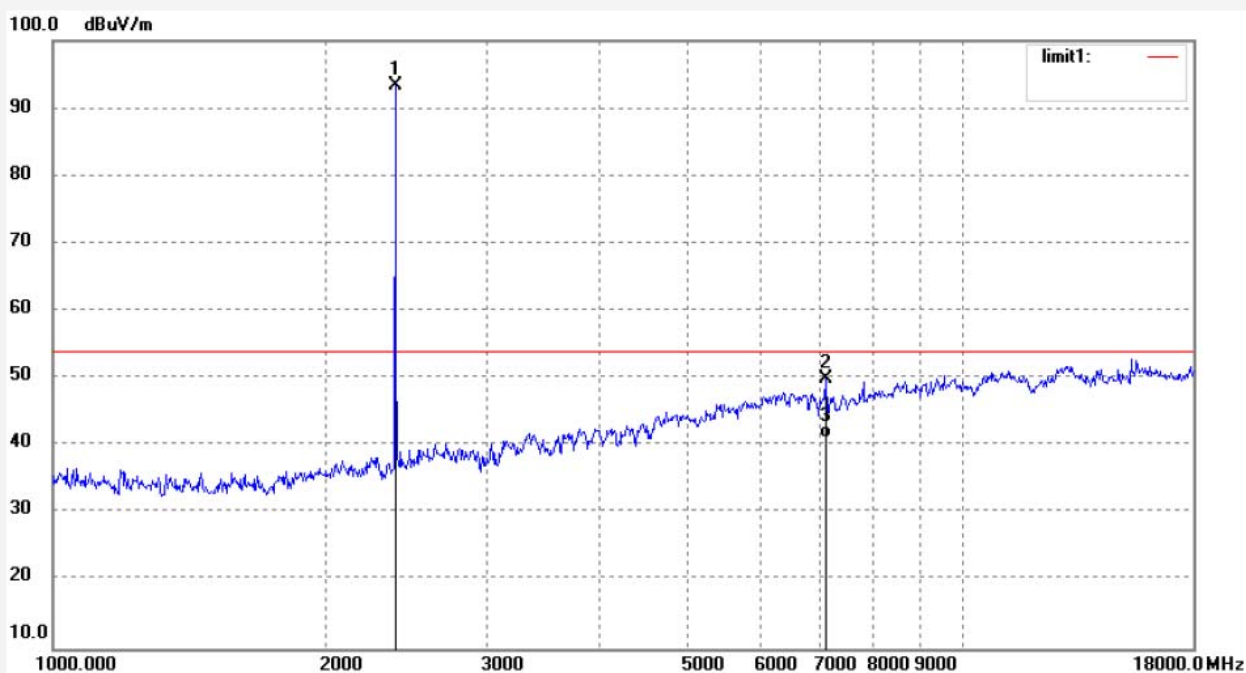

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.019	97.34	-4.01	93.33			peak			
2	7091.754	41.09	8.81	49.90	74.00	-24.10	peak			
3	7091.754	32.35	8.81	41.16	54.00	-12.84	AVG	200	212	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #245

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2402MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Vertical

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/18/33

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

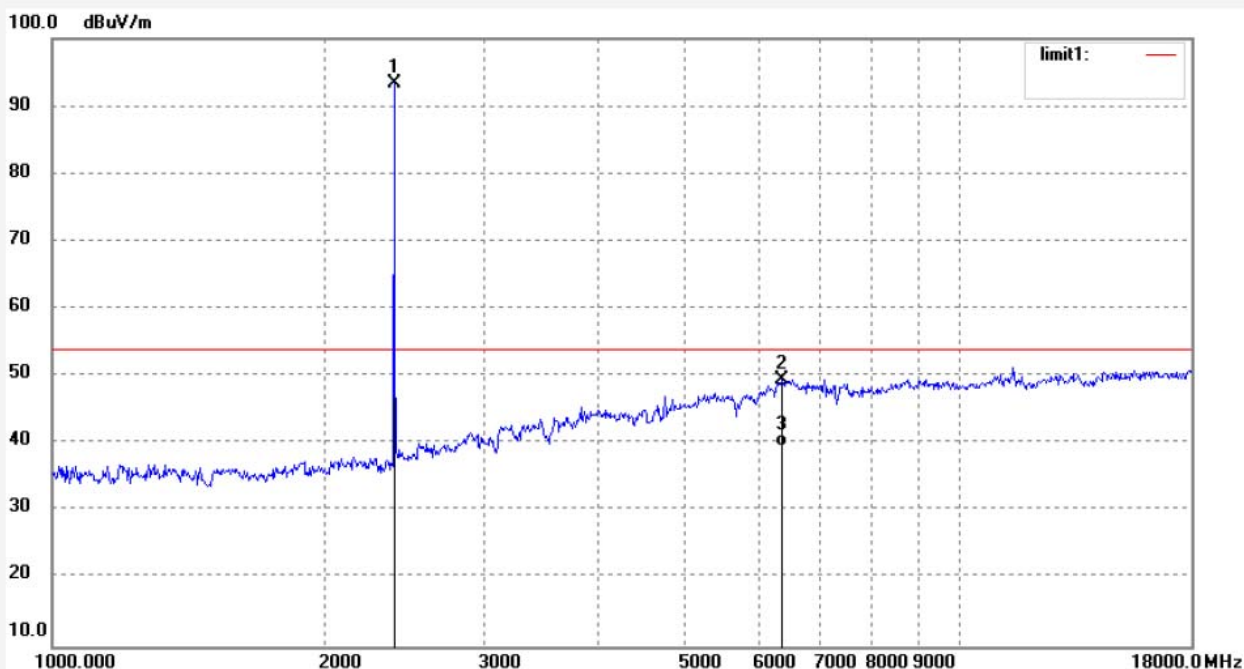

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.019	97.34	-4.01	93.33			peak			
2	6367.679	42.40	7.12	49.52	74.00	-24.48	peak			
3	6367.679	32.53	7.12	39.65	54.00	-14.35	AVG	100	223	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #247

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2440MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Horizontal

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/23/39

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

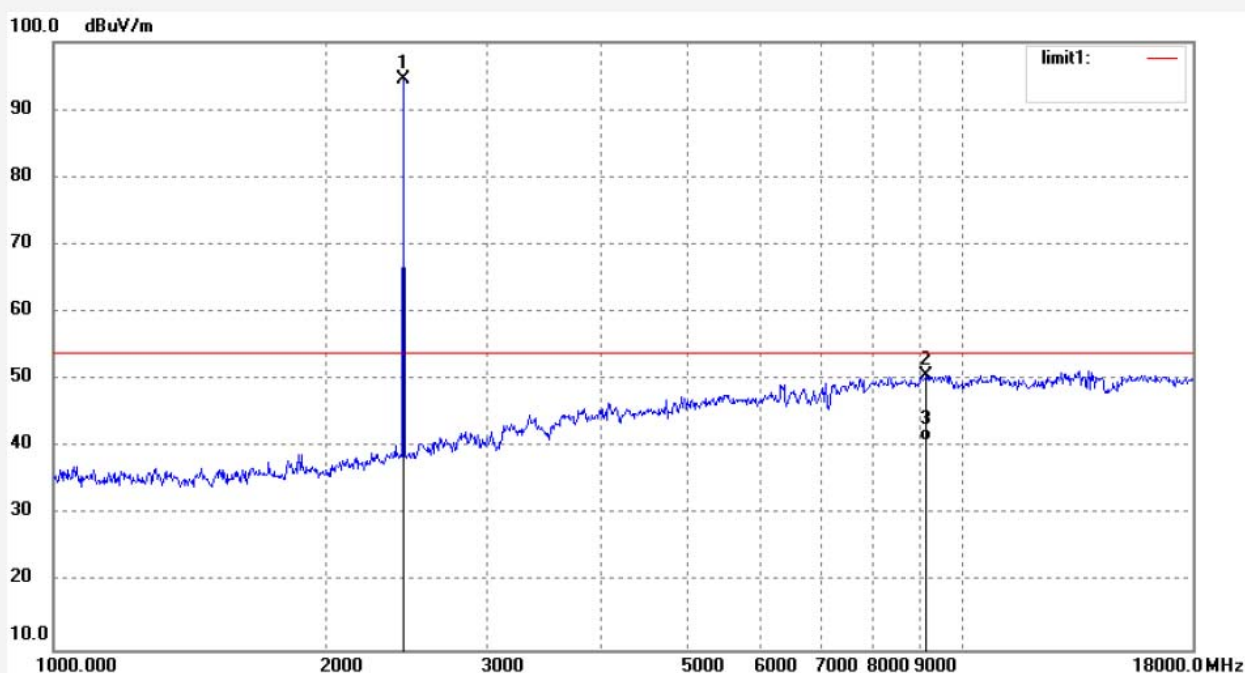

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.124	98.15	-3.77	94.38			peak			
2	9162.128	39.87	10.72	50.59	74.00	-23.41	peak			
3	9162.128	30.21	10.72	40.93	54.00	-13.07	AVG	200	215	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #246

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2440MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Vertical

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/20/44

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

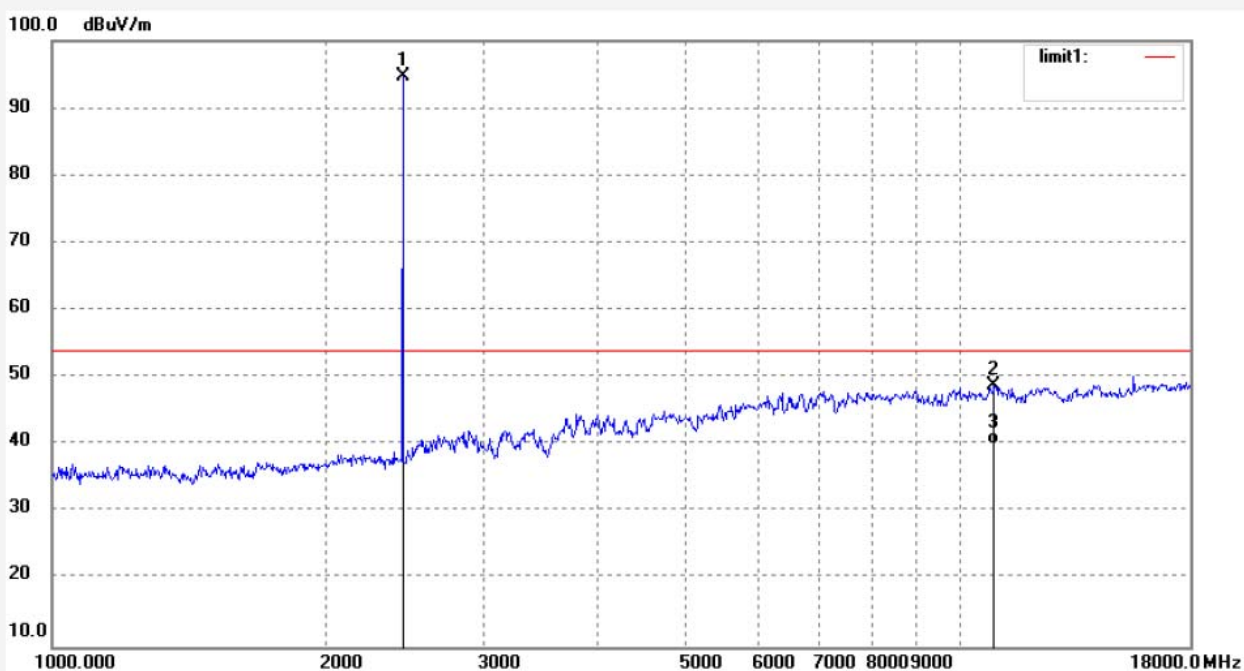

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.107	98.55	-3.73	94.82			peak			
2	10942.278	36.36	12.42	48.78	74.00	-25.22	peak			
3	10942.278	27.56	12.42	39.98	54.00	-14.02	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: YJZH1 #249

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2480MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Horizontal

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/27/53

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

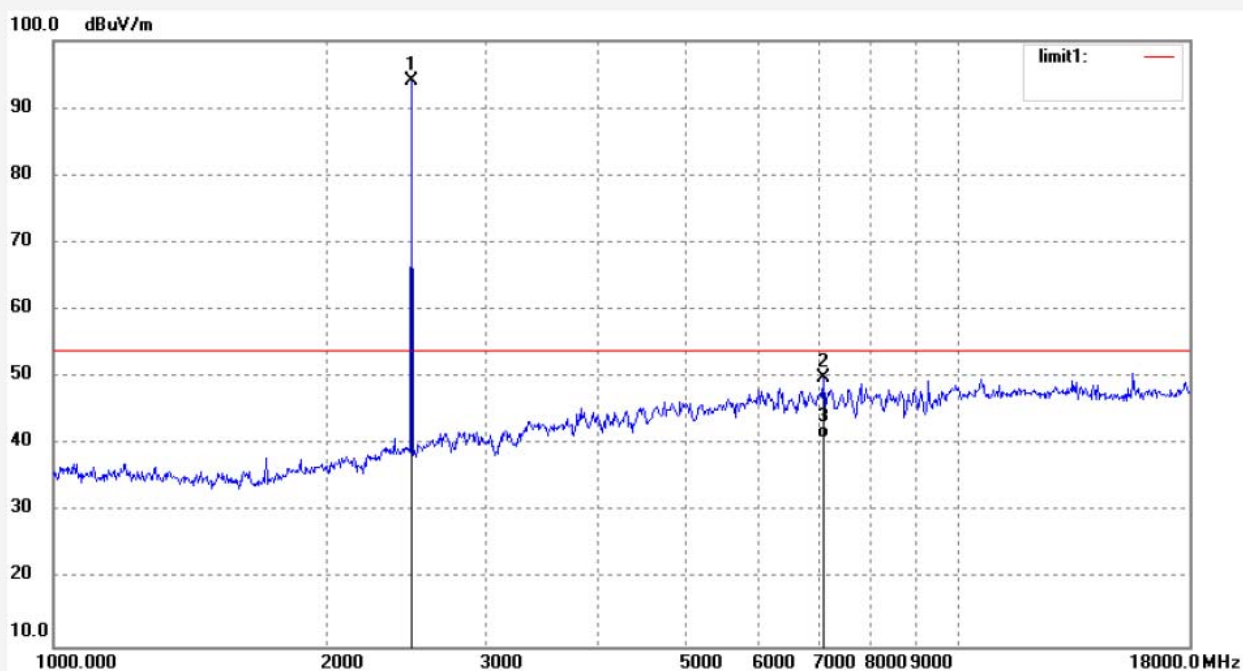

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.067	97.53	-3.48	94.05			peak			
2	7091.754	41.09	8.81	49.90	74.00	-24.10	peak			
3	7091.754	32.15	8.81	40.96	54.00	-13.04	AVG	200	216	

Job No.: YJZH1 #250

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth Lock

Mode: TX 2480MHz

Model: GS40

Manufacturer: Shenzhen Dragon Brothers Digital Lock Co., Ltd

Polarization: Vertical

Power Source: DC 3.6V


Date: 17/09/16/

Time: 9/31/41

Engineer Signature: YJZH

Distance: 3m

Note: Report NO.:ATE20171838

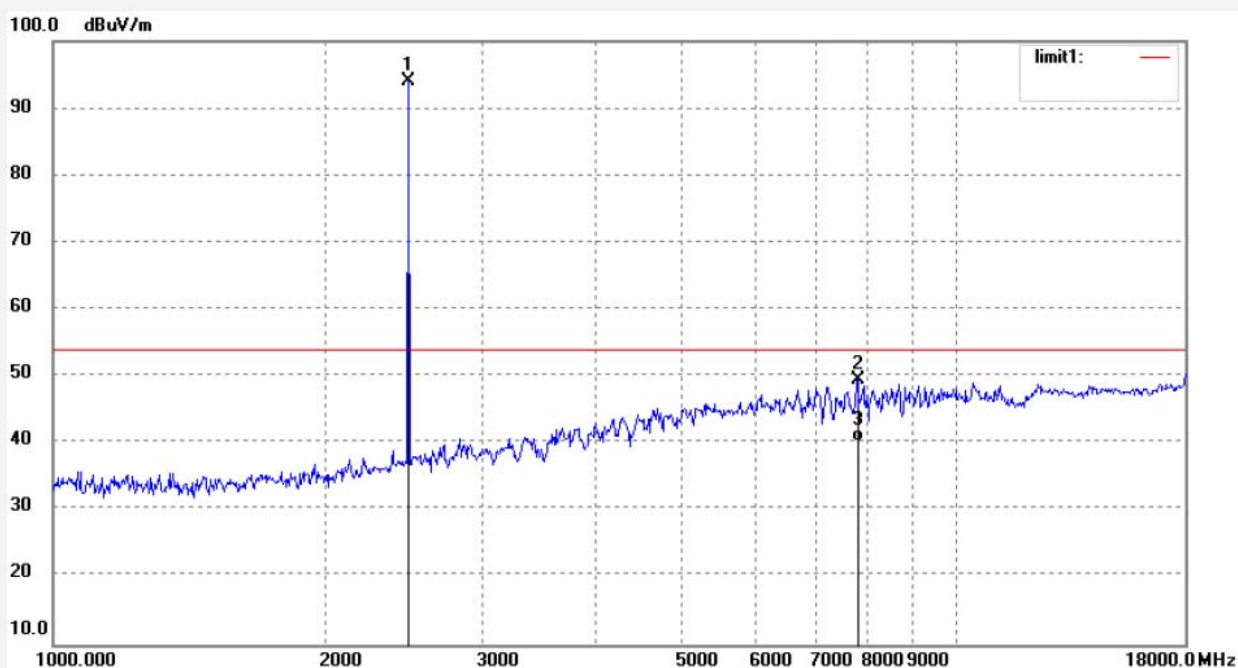

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.038	97.66	-3.52	94.14			peak			
2	7806.739	39.40	10.11	49.51	74.00	-24.49	peak			
3	7806.739	30.25	10.11	40.36	54.00	-13.64	AVG	100	225	


11.ANTENNA REQUIREMENT

11.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 2 dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

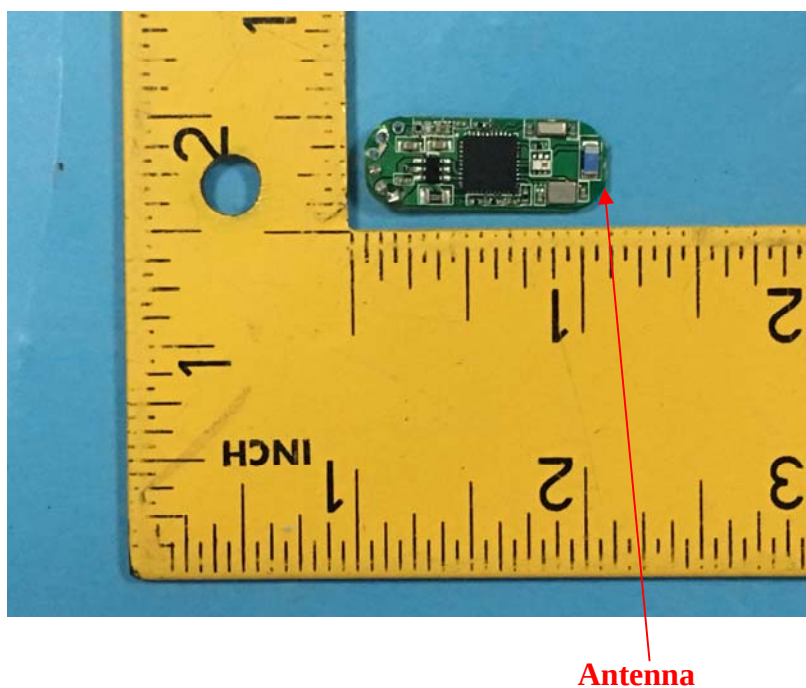

***** End of Test Report *****