

RF Exposure Test Report

Report No.: MFBEBB-WTW-P23070689 R1

FCC ID: 2ANKPC3D9192

Test Model: C3-D9192

Received Date: 2023/7/31

Test Date: 2023/10/18~2023/11/21

Issued Date: 2023/11/22

Applicant: Magic Control Technology Corporation

Address: 10F, No.123, Zhongcheng Rd., Tucheng Dist. New Taipei City 236,
Taiwan.R.O.C

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /
Designation Number:** 198487 / TW2021



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 General Information	5
2.1 General Description of EUT	5
3 RF Exposure	6
3.1 Description of Support Units	6
3.1.1 Configuration of System Under Test	6
3.2 Test Setup	7
3.3 Test Instruments	7
3.4 Limits for Maximum Permissible Exposure (MPE)	8
3.5 Test Point Description	9
4 Measurement Result	10
5 Photographs of the Test Configuration	17

Release Control Record

Issue No.	Description	Date Issued
MFBEBB-WTW-P23070689	Original release	2023/11/9
MFBEBB-WTW-P23070689 R1	Add tested data ➤ Charging mode with Load for Z-axis (Below) test data ➤ Charging with iPhone test data	2023/11/22

1 Certificate of Conformity

Product: USB-C® Dock Dual 4K HDMI™

Brand: MCT

Test Model: C3-D9192

Sample Status: PVT Sample

Applicant: Magic Control Technology Corporation

Test Date: 2023/10/18~2023/11/21

Standards: FCC Part 2 (Section 2.1091)

References Test Guidance: KDB 680106 D01 Wireless Power Transfer v04

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Jessica Cheng

Date: 2023/11/22

Jessica Cheng / Senior Specialist

Approved by :

Jeremy Lin

Date: 2023/11/22

Jeremy Lin / Project Engineer

2 General Information

2.1 General Description of EUT

Product	USB-C® Dock Dual 4K HDMI™
Brand	MCT
Test Model	C3-D9192
Sample Status	PVT Sample
Power Supply Rating	28Vdc, 5A MAX
Modulation Type	FSK
Operating Frequency	127.8kHz ~ 148kHz
Antenna Type	Coil antenna
Field Strength	-5.1dBuV/m (@300m) (AV)
Dimensions	23.9cm ²
Accessory Device	N/A
Data Cable Supplied	Shielded type C cable (0.65m) attached on EUT
Maximum Power Output from the Charging Coil	15W

Note:

1. The manufacturer provided the following support unit for the test:

Product	Brand	Model	Remark
AC Adapter	APPLE	A2452	AC Input : 100-240V~50/60Hz 2.0A DC Output : 28V, 5.0A / 20.5V, 5A / 15V, 5A / 9V, 3.0A / 5.2V, 3.0A, 140W

2. Due to radiated measurements are made and the antenna gain is already accounted for this device, so provide an antenna datasheet and/or antenna measurement report is not required. The antenna dimensions and pictures (include antenna wire length if have) are stated in EUT photo exhibit.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 RF Exposure

3.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	APPLE	A2452	N/A	N/A	Supplied by applicant
B	Load	Kamera	YBZ	N/A	N/A	Supplied by applicant
C	iPhone	APPLE	A2643	N/A	BCG-E4035A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Type C cable	1	1.2	Y	0	Supplied by applicant


3.1.1 Configuration of System Under Test

Charging Mode:

Charging mode with Load (147.2kHz)




Charging mode with iPhone (127.8kHz)




Standby Mode:

Standby mode (127.8kHz)



3.2 Test Setup

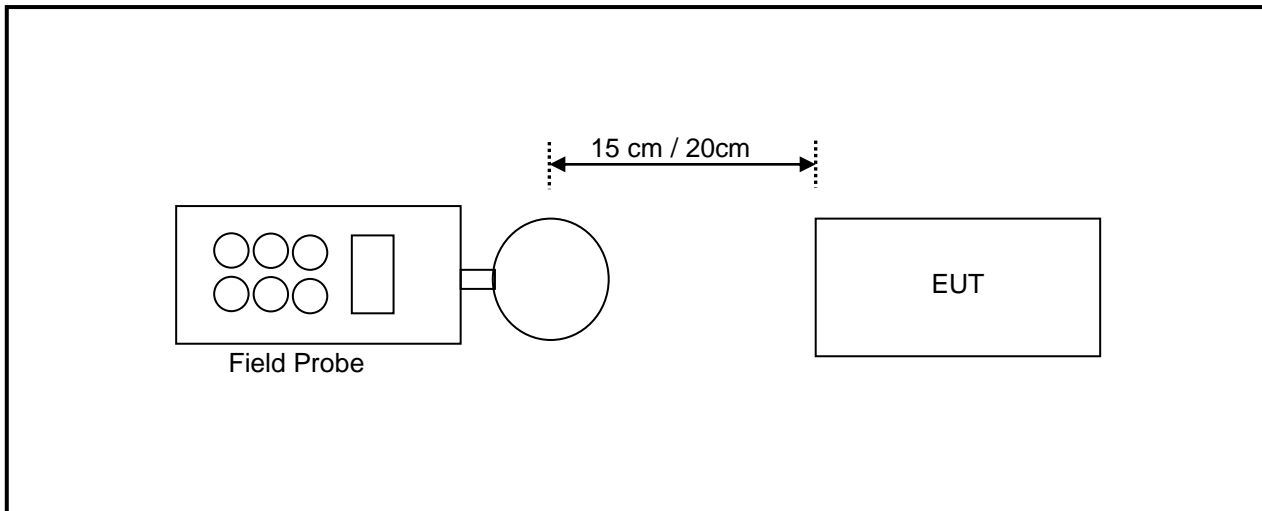

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device.

3.3 Test Instruments

Description	Brand	Model No.	Calibrated Date	Calibrated Until
Electric Field Meter	EMC Master	SMP2 dual	2023/3/2	2024/3/1
EM Field Probe Wavecontrol	WP400	20WP100708	2023/3/2	2024/3/1

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in Linkou RF Chamber
 3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

3.4 Limits for Maximum Permissible Exposure (MPE)

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.


680106 D01 Wireless Power Transfer v04 as reproduced below:

3.2 Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz

The RF exposure limits, as set forth in § 1.1310, do not cover the frequency range below 100 kHz for Specific Absorption Rate (SAR) and below 300 kHz for Maximum Permitted Exposure (MPE). In addition, present limitations of RF exposure evaluation systems prevent an accurate evaluation of SAR below 4 MHz. For these reasons, a specific MPE-based RF Exposure compliance procedure for devices operating in the aforementioned low-frequency ranges has been set in place. Accordingly, for § 2.1091-Mobile devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic field, respectively.

3.5 Test Point Description

The aggregate H-fields strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

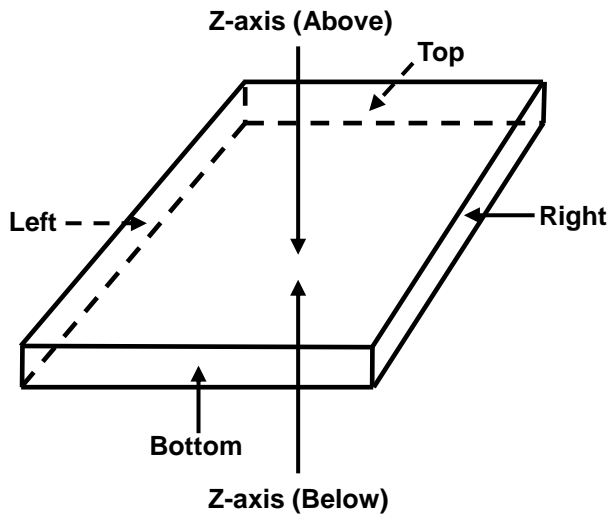

4 Measurement Result

Charging Mode

Charging mode with Load (147.2kHz)_10% Load

E-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	1.7200	1.2100	1.3400	1.4700	3.0500	2.9600
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-612.2800	-612.7900	-612.6600	-612.5300	-610.9500	-611.0400
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-305.2800	-305.7900	-305.6600	-305.5300	-303.9500	-304.0400

E-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	1.7500	0.9900	1.1800	1.0700	1.8300	1.7400
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-612.2500	-613.0100	-612.8200	-612.9300	-612.1700	-612.2600
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-305.2500	-306.0100	-305.8200	-305.9300	-305.1700	-305.2600

H-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0500	0.0200	0.0500	0.0300	0.1900	0.1800
Max H-field (A/m)	0.0400	0.0160	0.0400	0.0240	0.1520	0.1440
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5900	-1.6140	-1.5900	-1.6060	-1.4780	-1.4860
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7750	-0.7990	-0.7750	-0.7910	-0.6630	-0.6710

H-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0200	0.0100	0.0000	0.0100	0.1400	0.1300
Max H-field (A/m)	0.0160	0.0080	0.0000	0.0080	0.1120	0.1040
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6140	-1.6220	-1.6300	-1.6220	-1.5180	-1.5260
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7990	-0.8070	-0.8150	-0.8070	-0.7030	-0.7110

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device, with the 15/20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above) , Z-axis (Below) the highest emission level was recorded.

Charging mode with Load (147.2kHz)_50% Load

E-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	1.8900	1.1800	1.2000	1.6500	3.3100	3.2200
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-612.1100	-612.8200	-612.8000	-612.3500	-610.6900	-610.7800
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-305.1100	-305.8200	-305.8000	-305.3500	-303.6900	-303.7800

E-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	1.6700	1.0500	1.1600	1.2800	1.6700	1.5800
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-612.3300	-612.9500	-612.8400	-612.7200	-612.3300	-612.4200
50 % Limit (V/m)	307	307	307	307	307.0000	307
50 % Margin (V/m)	-305.3300	-305.9500	-305.8400	-305.7200	-305.3300	-305.4200

H-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0400	0.0400	0.0500	0.0300	0.2100	0.2000
Max H-field (A/m)	0.0320	0.0320	0.0400	0.0240	0.1680	0.1600
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5980	-1.5980	-1.5900	-1.6060	-1.4620	-1.4700
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7830	-0.7830	-0.7750	-0.7910	-0.6470	-0.6550

H-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0200	0.0400	0.0000	0.0300	0.1300	0.1200
Max H-field (A/m)	0.0160	0.0320	0.0000	0.0240	0.1040	0.0960
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6140	-1.5980	-1.6300	-1.6060	-1.5260	-1.5340
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7990	-0.7830	-0.8150	-0.7910	-0.7110	-0.7190

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device, with the 15/20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above), Z-axis (Below) the highest emission level was recorded.

Charging mode with Load (147.2kHz)_Max Load

E-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	1.4000	1.4800	1.4000	1.6700	4.2100	4.1200
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-612.6000	-612.5200	-612.6000	-612.3300	-609.7900	-609.8800
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-305.6000	-305.5200	-305.6000	-305.3300	-302.7900	-302.8800

E-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	1.1100	1.2100	1.2300	1.2600	2.1300	2.0400
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-612.8900	-612.7900	-612.7700	-612.7400	-611.8700	-611.9600
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-305.8900	-305.7900	-305.7700	-305.7400	-304.8700	-304.9600

H-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0700	0.0600	0.0800	0.0700	0.2700	0.2600
Max H-field (A/m)	0.0560	0.0480	0.0640	0.0560	0.2160	0.2080
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5740	-1.5820	-1.5660	-1.5740	-1.4140	-1.4220
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7590	-0.7670	-0.7510	-0.7590	-0.5990	-0.6070

H-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0200	0.0400	0.0500	0.0400	0.1500	0.1400
Max H-field (A/m)	0.0160	0.0320	0.0400	0.0320	0.1200	0.1120
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6140	-1.5980	-1.5900	-1.5980	-1.5100	-1.5180
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7990	-0.7830	-0.7750	-0.7830	-0.6950	-0.7030

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device, with the 15/20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above), Z-axis (Below) the highest emission level was recorded.

Charging with iPhone (Battery 10%) (127.8kHz)

E-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	2.5200	2.6100	2.5600	2.5700	4.3700	3.8900
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-611.4800	-611.3900	-611.4400	-611.4300	-609.6300	-610.1100
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-304.4800	-304.3900	-304.4400	-304.4300	-302.6300	-303.1100

E-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	2.4800	2.5700	2.5200	2.5300	4.3300	3.8500
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-611.5200	-611.4300	-611.4800	-611.4700	-609.6700	-610.1500
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-304.5200	-304.4300	-304.4800	-304.4700	-302.6700	-303.1500

H-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0500	0.0400	0.0400	0.0300	0.1100	0.1000
Max H-field (A/m)	0.0400	0.0320	0.0320	0.0240	0.0880	0.0800
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5900	-1.5980	-1.5980	-1.6060	-1.5420	-1.5500
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7750	-0.7830	-0.7830	-0.7910	-0.7270	-0.7350

H-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0400	0.0300	0.0300	0.0300	0.1000	0.0900
Max H-field (A/m)	0.0320	0.0240	0.0240	0.0240	0.0800	0.0720
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5980	-1.6060	-1.6060	-1.6060	-1.5500	-1.5580
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7830	-0.7910	-0.7910	-0.7910	-0.7350	-0.7430

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device, with the 15/20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above), Z-axis (Below) the highest emission level was recorded.

Charging with iPhone (Battery 50%) (127.8kHz)

E-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	2.5000	2.5800	2.5300	2.5400	4.3300	3.8600
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-611.5000	-611.4200	-611.4700	-611.4600	-609.6700	-610.1400
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-304.5000	-304.4200	-304.4700	-304.4600	-302.6700	-303.1400

E-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	2.4600	2.5400	2.4900	2.5000	4.2900	3.8200
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-611.5400	-611.4600	-611.5100	-611.5000	-609.7100	-610.1800
50 % Limit (V/m)	307	307	307	307	307.0000	307
50 % Margin (V/m)	-304.5400	-304.4600	-304.5100	-304.5000	-302.7100	-303.1800

H-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0400	0.0300	0.0300	0.0200	0.1000	0.0900
Max H-field (A/m)	0.0320	0.0240	0.0240	0.0160	0.0800	0.0720
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5980	-1.6060	-1.6060	-1.6140	-1.5500	-1.5580
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7830	-0.7910	-0.7910	-0.7990	-0.7350	-0.7430

H-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0300	0.0200	0.0200	0.0200	0.0900	0.0800
Max H-field (A/m)	0.0240	0.0160	0.0160	0.0160	0.0720	0.0640
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6060	-1.6140	-1.6140	-1.6140	-1.5580	-1.5660
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7910	-0.7990	-0.7990	-0.7990	-0.7430	-0.7510

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device, with the 15/20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above), Z-axis (Below) the highest emission level was recorded.

Charging with iPhone (Battery 90%) (127.8kHz)

E-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	2.4500	2.5300	2.4800	2.4900	4.2800	3.8100
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-611.5500	-611.4700	-611.5200	-611.5100	-609.7200	-610.1900
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-304.5500	-304.4700	-304.5200	-304.5100	-302.7200	-303.1900

E-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	2.4100	2.4900	2.4400	2.4500	4.2400	3.7700
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-611.5900	-611.5100	-611.5600	-611.5500	-609.7600	-610.2300
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-304.5900	-304.5100	-304.5600	-304.5500	-302.7600	-303.2300

H-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0300	0.0200	0.0200	0.0100	0.0900	0.0800
Max H-field (A/m)	0.0240	0.0160	0.0160	0.0080	0.0720	0.0640
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6060	-1.6140	-1.6140	-1.6220	-1.5580	-1.5660
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7910	-0.7990	-0.7990	-0.8070	-0.7430	-0.7510

H-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0200	0.0100	0.0100	0.0100	0.0800	0.0700
Max H-field (A/m)	0.0160	0.0080	0.0080	0.0080	0.0640	0.0560
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6140	-1.6220	-1.6220	-1.6220	-1.5660	-1.5740
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7990	-0.8070	-0.8070	-0.8070	-0.7510	-0.7590

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device, with the 15/20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above), Z-axis (Below) the highest emission level was recorded.

Standby Mode
Standby mode (127.8kHz)

E-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	1.2000	1.2200	1.1900	1.2400	1.2500	1.1800
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-612.8000	-612.7800	-612.8100	-612.7600	-612.7500	-612.8200
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-305.8000	-305.7800	-305.8100	-305.7600	-305.7500	-305.8200

E-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	1.1300	1.1500	1.1200	1.1500	1.2000	1.0600
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-612.8700	-612.8500	-612.8800	-612.8500	-612.8000	-612.9400
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-305.8700	-305.8500	-305.8800	-305.8500	-305.8000	-305.9400

H-Field Measurement						
Distance	15cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0300	0.0400	0.0400	0.0300	0.1300	0.0800
Max H-field (A/m)	0.0240	0.0320	0.0320	0.0240	0.1040	0.0640
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6060	-1.5980	-1.5980	-1.6060	-1.5260	-1.5660
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7910	-0.7830	-0.7830	-0.7910	-0.7110	-0.7510

H-Field Measurement						
Distance	20cm					
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0200	0.0300	0.0200	0.0200	0.0500	0.0100
Max H-field (A/m)	0.0160	0.0240	0.0160	0.0160	0.0400	0.0080
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6140	-1.6060	-1.6140	-1.6140	-1.5900	-1.6220
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7990	-0.7910	-0.7990	-0.7990	-0.7750	-0.8070

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device, with the 15/20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above), Z-axis (Below) the highest emission level was recorded.

5 Photographs of the Test Configuration

Please refer to the attached file (Test Setup Photo).

--- END ---