



Test Report No.: RF180621N040



TEST REPORT

Applicant	SHENZHEN MAIKESEN TECHNOLOGY CO., LTD
Address	F4-F5, Yinzhuling Park, No. 7, Xiangyin Rd, Nanlian Community, Longgang Dist.,

Manufacturer or Supplier	SHENZHEN MAIKESEN TECHNOLOGY CO., LTD
Address	F4-F5, Yinzhuling Park, No. 7, Xiangyin Rd, Nanlian Community, Longgang Dist.,
Product	Wireless Speaker
Brand Name	KODAK
Customer Model	DKBS-8000 Splash
Factory Model	YM-P9
Additional Model & Factory Model Difference	YM-L1, YM-M20
Additional Model & Customer Model Difference	DKBS-M20, DKBS-222 Pellet
Date of tests	March 20 to July 05, 2018

the tests have been carried out according to the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Evans He Project Engineer/ EMC Department	Approved by David Huang Supervisor / EMC Department
<i>Evans He</i>	<i>David Huang</i>
	Date: July 06, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS.....	6
2 MEASUREMENT UNCERTAINTY	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 TEST TYPES AND RESULTS	12
4.1. CONDUCTED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP.....	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS.....	15
4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT	17
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	17
4.2.2 TEST INSTRUMENTS.....	18
4.2.3 TEST PROCEDURES	19
4.2.4 DEVIATION FROM TEST STANDARD.....	20
4.2.5 TEST SETUP	20
4.2.6 EUT OPERATING CONDITIONS	21
4.2.7 TEST RESULTS	22
4.3 NUMBER OF HOPPING FREQUENCY USED	26
4.3.1 LIMIT OF HOPPING FREQUENCY USED	26
4.3.2 TEST SETUP	26
4.3.3 TEST INSTRUMENTS.....	26
4.3.4 TEST PROCEDURES	28
4.3.5 DEVIATION FROM TEST STANDARD.....	28



4.3.6 TEST RESULTS 28

4.4 DWELL TIME ON EACH CHANNEL..... 30

4.4.1 LIMIT OF DWELL TIME USED 30

4.4.2 TEST SETUP..... 30

4.4.3 TEST INSTRUMENTS..... 30

4.4.4 TEST PROCEDURES 30

4.4.5 DEVIATION FROM TEST STANDARD..... 31

4.4.6 TEST RESULTS 31

4.5 CHANNEL BANDWIDTH 34

4.5.1 LIMITS OF CHANNEL BANDWIDTH..... 34

4.5.2 TEST SETUP..... 34

4.5.3 TEST INSTRUMENTS..... 34

4.5.4 TEST PROCEDURE..... 34

4.5.5 DEVIATION FROM TEST STANDARD..... 34

4.5.6 EUT OPERATING CONDITION..... 34

4.5.7 TEST RESULTS 35

4.6 HOPPING CHANNEL SEPARATION..... 39

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION..... 39

4.6.2 TEST SETUP..... 39

4.6.3 TEST INSTRUMENTS..... 39

4.6.4 TEST PROCEDURES 39

4.6.5 DEVIATION FROM TEST STANDARD..... 39

4.6.6 TEST RESULTS 40

4.7 CONDUCTED OUTPUT POWER..... 44

4.7.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT 44

4.7.2 TEST SETUP..... 44

4.7.3 TEST INSTRUMENTS..... 44

4.7.4 TEST PROCEDURES 44

4.7.5 DEVIATION FROM TEST STANDARD..... 44

4.7.6 EUT OPERATING CONDITION 44

4.7.7 TEST RESULTS 45

4.8 OUT OF BAND EMISSION MEASUREMENT 46

4.8.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT 46

4.8.2 TEST INSTRUMENTS..... 46

4.8.3 TEST PROCEDURE..... 46

4.8.4 DEVIATION FROM TEST STANDARD..... 46

4.8.5 EUT OPERATING CONDITION..... 46



**BUREAU
VERITAS**

Test Report No.: RF180621N040

4.8.6 TEST RESULTS	46
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	51
6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING	
CHANGES TO THE EUT BY THE LAB.....	52



Test Report No.: RF180621N040

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180621N040	Original release	July 06,2018



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.247(d)& 15.209	Transmitter Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	3.11dB
Radiated emissions	9KHz ~ 30MHz	3.11dB
	30MHz ~ 1GMHz	5.12dB
	1GHz ~ 18GHz	5.34dB
	18GHz ~ 40GHz	5.34dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Speaker
CUSTOMER MODEL NO.	DKBS-8000 Splash
FACTORY MODEL NO.	YM-P9
ADDITIONAL CUSTOMER MODEL	DKBS-M20, DKBS-222 Pellet
ADDITIONAL FACTORY MODEL	YM-L1, YM-M20
FCC ID	2ANKR-YM-P9
POWER SUPPLY	DC 5V from adapter DC 3.7V from battery
MODULATION TECHNOLOGY	FHSS
MODULATION TYPE	GFSK, $\pi/4$ DQPSK
OPERATING FREQUENCY	2402MHz~2480MHz
NUMBER OF CHANNEL	79
PEAK OUTPUT POWER	0.661mW (Max. Measured)
ANTENNA TYPE	PIFA Antenna, -0.68dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	AC Cable: Unshielded, Non-detachable, 50cm

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 180621N040) for detailed product photo.
4. Additional models (see about table) are identical with the test model DKBS-8000 Splash (YM-P9) except the color of the appearance and model name for trading purpose.



3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X axis for radiated emission.

Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	Powered By AC 120V

Where RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	39	FHSS	GFSK	DH5

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	π/4 DQPSK	2DH5



POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	Hopping	FHSS	GFSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	26deg. C, 50%RH	DC 5V and AC 3.7V	Evans He
RE≥1G	26deg. C, 50%RH	DC 5V and AC 3.7V	Evans He
PLC	25deg. C, 55%RH	DC 5V and AC 3.7V	Evans He
APCM	20deg. C, 55%RH	DC 5V and AC 3.7V	Evans He



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. Section 15.247
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Adapter	TECNO	A8-501000	N/A	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1, 2	DC Line: Unshielded, Detachable 50cm



4 TEST TYPES AND RESULTS

4.1. CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Instrument	Model	Serial #	Cal Date	Cal Due
EMI test receiver	ESCS30	8471241027	Jan. 05, 18	Jan. 04, 19
Line Impedance Stabilization Network	LI-125A	191106	Dec. 08, 17	Dec. 07, 18
Line Impedance Stabilization Network	LI-125A	191107	Dec. 08, 17	Dec. 07, 18
Test Software	EZ-EMC	ver.lcp-03A1	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 843
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

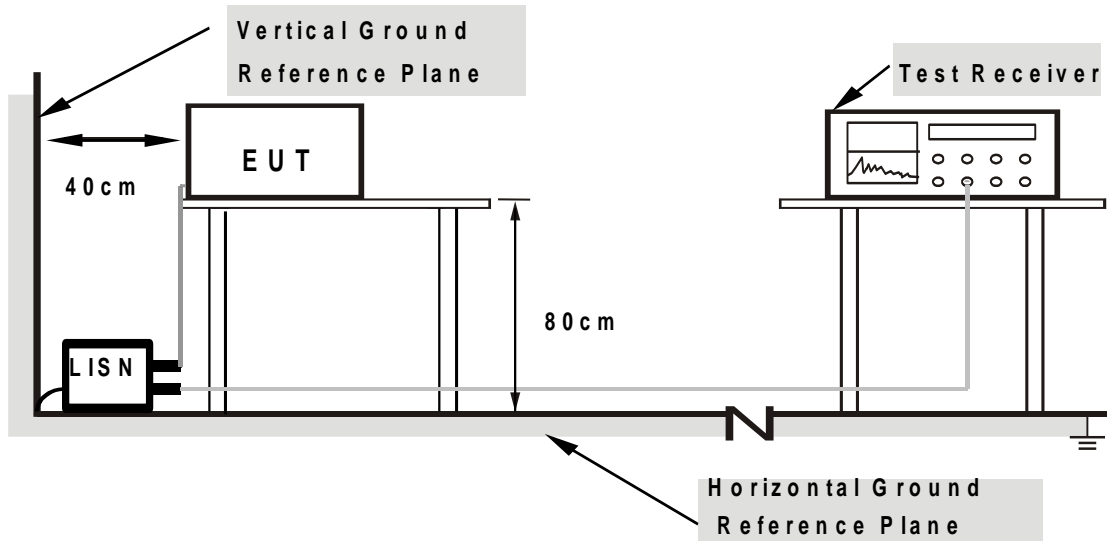

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: GFSK CH39

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1968	30.84	QP	10.03	40.87	63.74	-22.87
2	L1	0.1968	22.14	AVG	10.03	32.17	53.74	-21.57
3	L1	0.5166	39.01	QP	10.03	49.04	56.00	-6.96
4	L1	0.5166	34.48	AVG	10.03	44.51	46.00	-1.49
5	L1	1.5501	38.46	QP	10.04	48.50	56.00	-7.50
6	L1	1.5501	34.13	AVG	10.04	44.17	46.00	-1.83
7	L1	2.5914	31.23	QP	10.05	41.28	56.00	-14.72
8	L1	2.5914	26.22	AVG	10.05	36.27	46.00	-9.73
9	L1	3.6201	37.77	QP	10.06	47.83	56.00	-8.17
10	L1	3.6201	33.56	AVG	10.06	43.62	46.00	-2.38
11	L1	6.7206	31.75	QP	10.10	41.85	60.00	-18.15
12	L1	6.7206	26.67	AVG	10.10	36.77	50.00	-13.23

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Reading Value (dBuV) + Correction Factor (dB/m).
 6. Emission Level = Correction Factor + Reading Value.

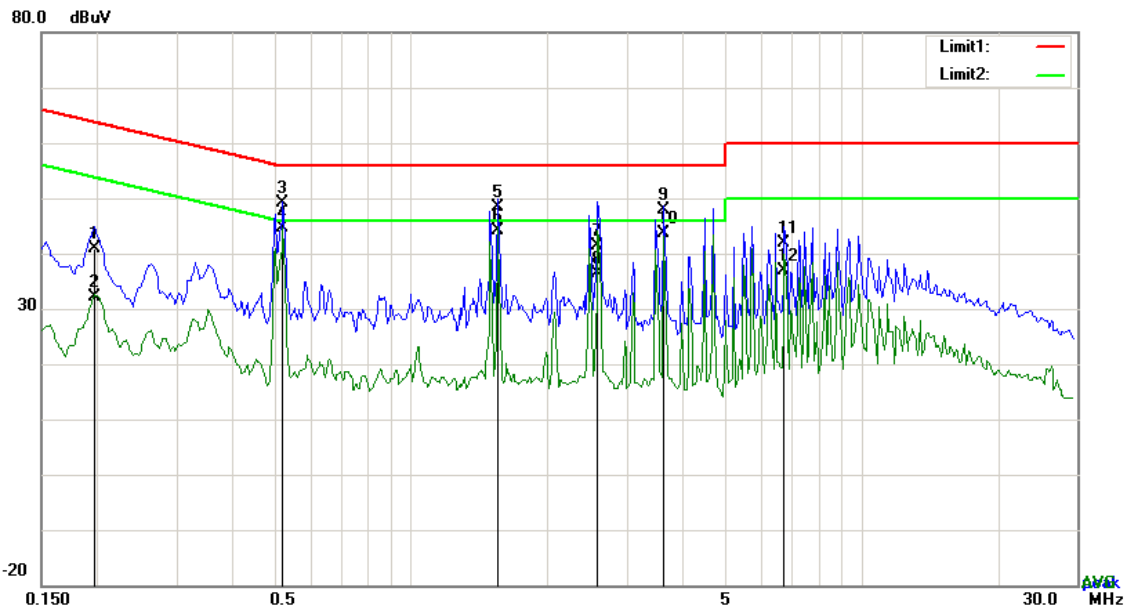




PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1968	34.10	QP	10.02	44.12	63.74	-19.62
2	N	0.1968	19.86	AVG	10.02	29.88	53.74	-23.86
3	N	0.5127	31.19	QP	10.02	41.21	56.00	-14.79
4	N	0.5127	24.73	AVG	10.02	34.75	46.00	-11.25
5	N	1.5423	29.60	QP	10.04	39.64	56.00	-16.36
6	N	1.5423	23.34	AVG	10.04	33.38	46.00	-12.62
7	N	2.5680	32.90	QP	10.05	42.95	56.00	-13.05
8	N	2.5680	23.23	AVG	10.05	33.28	46.00	-12.72
9	N	4.6263	29.49	QP	10.07	39.56	56.00	-16.44
10	N	4.6263	20.87	AVG	10.07	30.94	46.00	-15.06
11	N	8.3898	31.37	QP	10.12	41.49	60.00	-18.51
12	N	8.3898	23.75	AVG	10.12	33.87	50.00	-16.13

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Reading Value (dBuV) + Correction Factor (dB/m).
 6. Emission Level = Correction Factor + Reading Value.

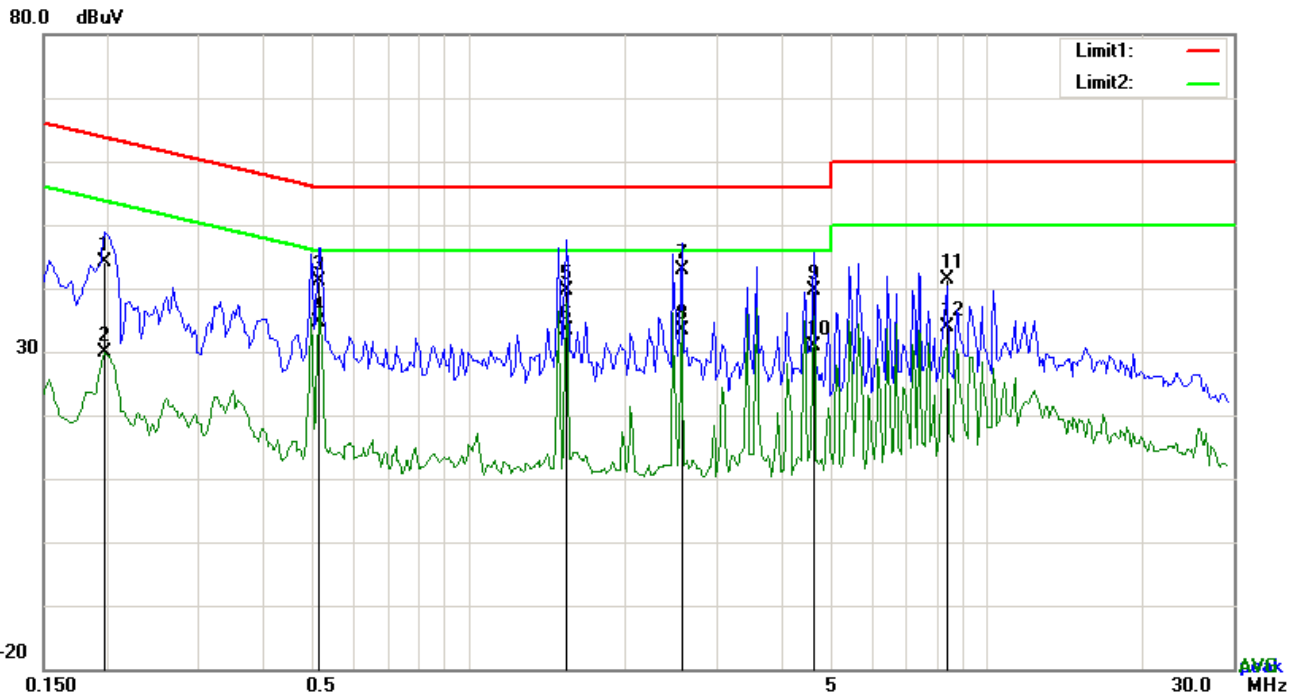



4.2. RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Instrument	Model	Serial #	Cal Date	Cal Due
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	Feb 11, 18	Feb. 10, 19
EMI test receiver	ESL6	1300.5001K06-100262-eQ	Jan, 05, 18	Jan. 04, 19
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	Jan, 05, 18	Jan. 04, 19
Bilog Antenna (30MHz~6GHz)	JB6	A110712	Feb 08, 18	Feb. 07, 19
Bilog Antenna (30MHz~2GHz)	JB1	A112017	Jan 26, 18	Jan. 25, 19
A-INFOMW Horn Antenna (1~18GHz)	AH-118	71259	Jan 26, 18	Jan. 25, 19
Pre-Amplifier (100MHz-26.5GHz)	EMC 012645	980077	May 18, 18	May 17, 19
Pre-Amplifier (18GHz-40GHz)	EMC 184045	980102	Nov. 08,17	Nov. 07,18
EMCO Horn Antenna (1~18GHz)	AH-118	71283	Feb 02, 18	Feb. 01, 19
OPT 010 AMPLIFIER (0.1~1300MHz)	8447E	2727A02430	Dec. 09, 17	Dec. 08, 18
Horn Antenna	BBHA 9170	BBHA9170147	Mar. 14, 18	Mar. 13, 19
Microwave Preamplifier (0.5 ~ 18GHz)	PAM-118	443008	Dec. 09, 17	Dec. 08, 18
Large Loop Antenna	RF300	Rf300	Dec. 09, 17	Dec. 08, 18
Universal Radio Communication Tester	CMU200	121393	Feb 11, 18	Feb. 10, 19
Positioning Controller	UC3000	MF780208282	Dec. 09, 17	Dec. 08, 18
Test Software	EZ-EMC	ver.lcp-03A1	N/A	N/A

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 535293.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. Bluetooth duty factor correction is not correct as it is based on 79 channels, worst case would be with AFH enabled and device using the minimum of 20 channels. Channel hop rate = 800 hops/second (AFH Mode), Adjusted channel hop rate for DH5 mode = 133.33 hops/second, Time per channel hop = $1 / 133.33$ hops/second = 7.5 ms, Time to cycle through all channels = 7.5×20 channels = 150 ms, Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1$ time(s), Worst case dwell time = 7.5 ms, Duty cycle connection factor = $20\log_{10}(7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$. Average value = peak reading + $20\log(\text{duty cycle})$.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

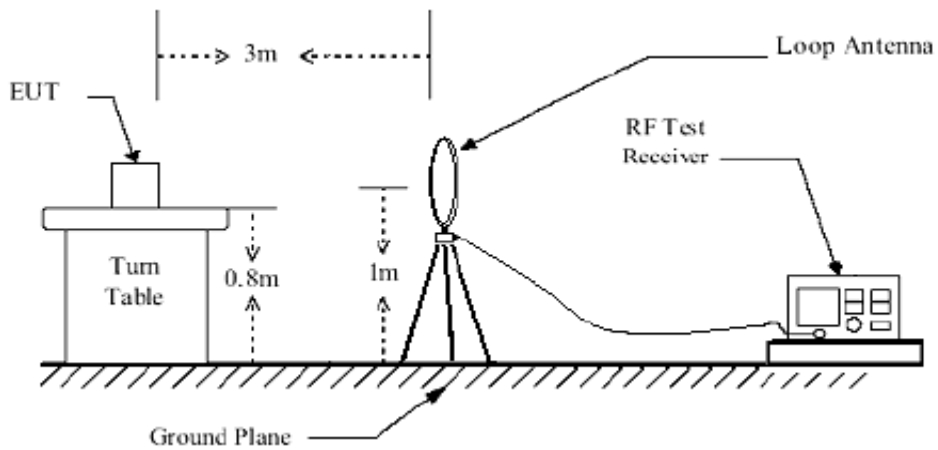


Below 1GHz test setup

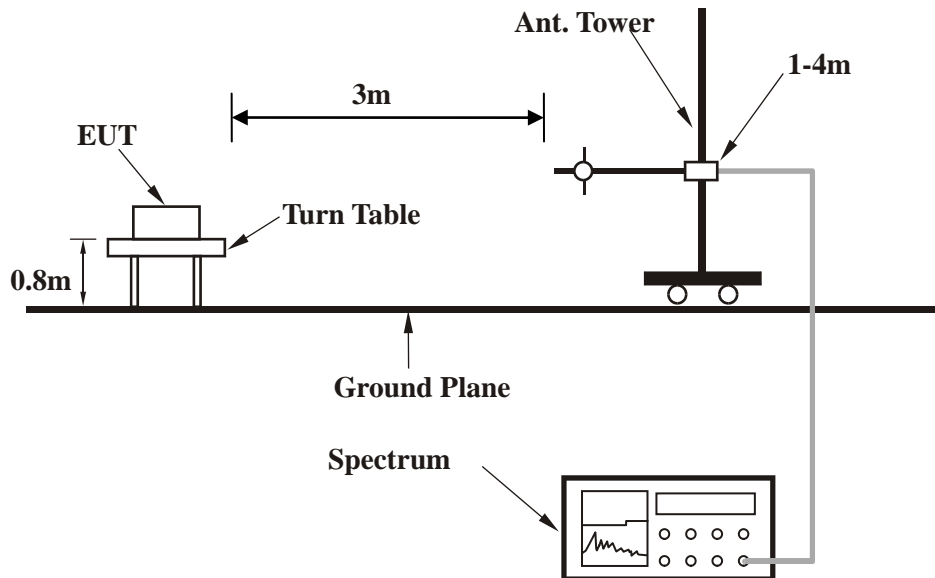

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

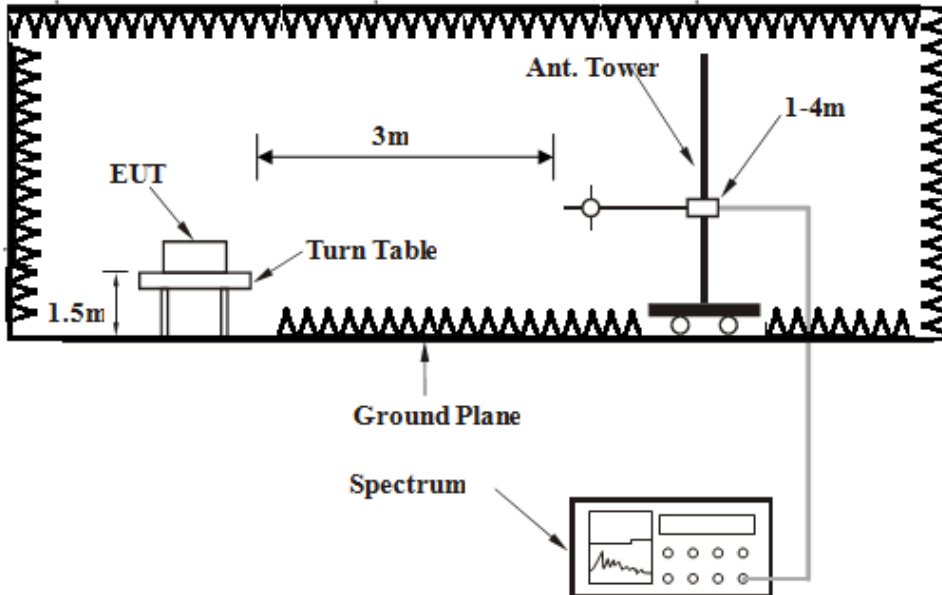

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


GFSK DH5

CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & test distance: HORIZONTAL at 3 m											
No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	209.3129	38.62	peak	11.97	22.36	1.57	29.80	43.50	-13.70	100	76
2	319.9370	47.23	QP	14.02	22.23	1.89	40.91	46.00	-5.09	100	348
3	400.4319	48.08	QP	15.71	22.01	2.01	43.79	46.00	-2.21	100	111
4	440.1963	45.57	QP	16.50	21.93	2.11	42.25	46.00	-3.75	100	13
5	45.6948	35.24	peak	10.29	22.30	0.76	23.99	40.00	-16.01	100	299
6	95.4270	31.67	peak	9.30	22.32	1.00	19.65	43.50	-23.85	100	64

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Ant Factor (dB/m) + Cab Factor (dB) - PA Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Result level – Limit value

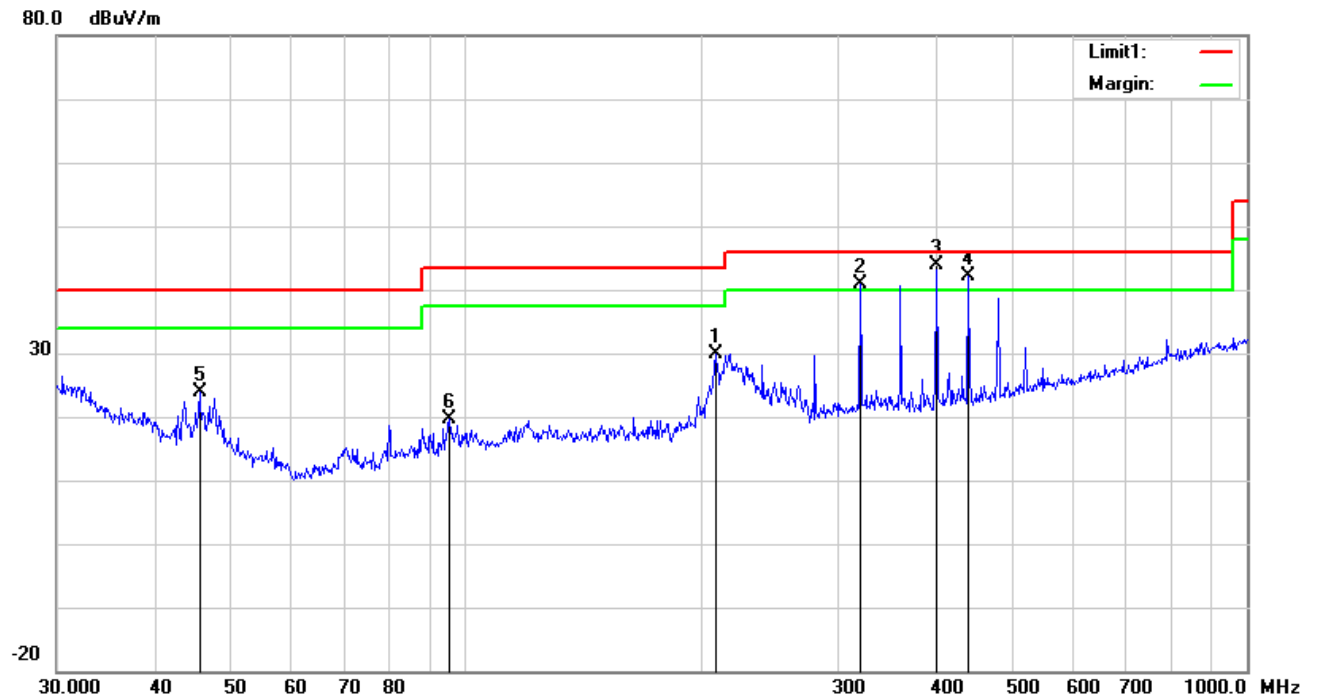




CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	48.6719	46.87	QP	8.98	22.36	0.79	34.28	40.00	-5.72	100	305
2	79.8003	48.14	QP	7.60	22.42	1.05	34.37	40.00	-5.63	100	252
3	239.9873	36.37	peak	11.54	22.31	1.67	27.27	46.00	-18.73	100	251
4	319.9370	35.70	peak	14.02	22.23	1.89	29.38	46.00	-16.62	100	326
5	400.4319	40.47	peak	15.71	22.01	2.01	36.18	46.00	-9.82	100	351
6	480.5276	38.25	peak	17.31	21.85	2.31	36.02	46.00	-9.98	100	293

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Ant Factor (dB/m) + Cab Factor (dB) - PA Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Result level – Limit value

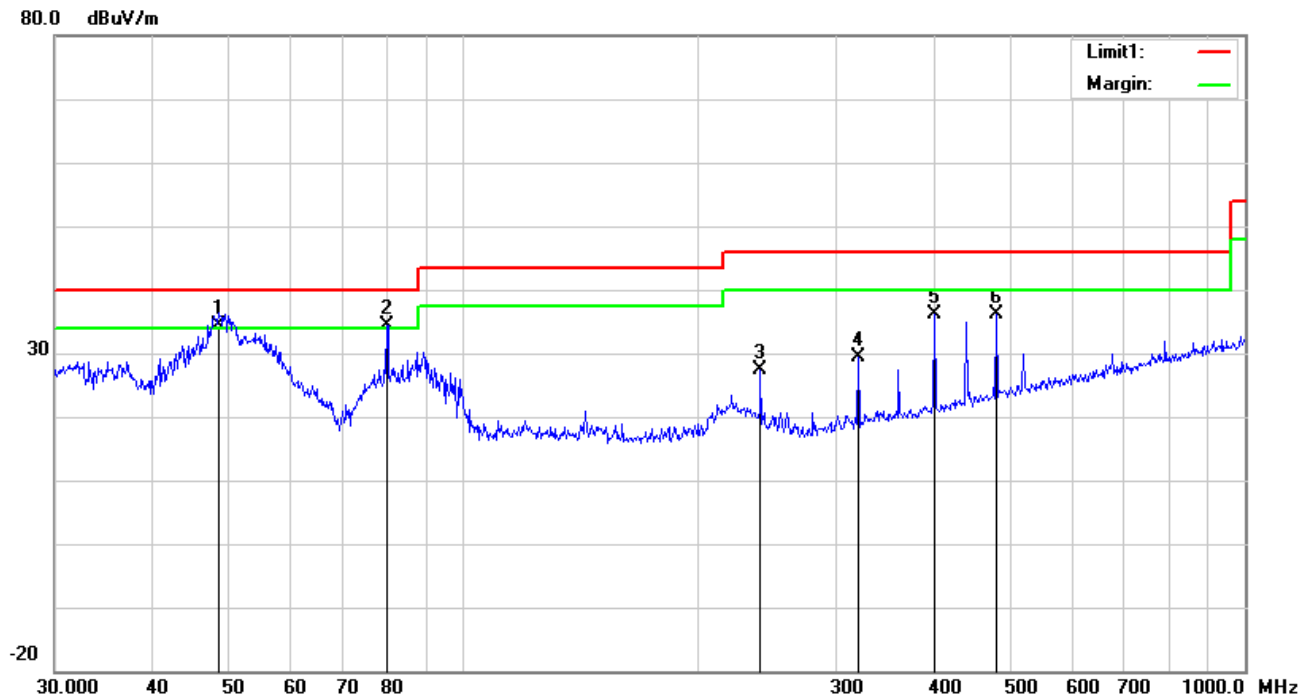



ABOVE 1GHz DATA

BT

CHANNEL	Low Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	48.18	AV	V	33.39	7.22	48.46	40.33	54	-13.67
4804	46.34	AV	H	33.39	7.22	48.46	38.49	54	-15.51
4804	70.12	PK	V	33.39	7.22	48.46	62.27	74	-11.73
4804	66.37	PK	H	33.39	7.22	48.46	58.52	74	-15.48
13103	26.82	AV	V	41.53	12.88	47.58	33.65	54	-20.35
13103	23.79	AV	H	41.53	12.88	47.58	30.62	54	-23.38
13103	45.35	PK	V	41.53	12.88	47.58	52.18	74	-21.82
13103	44.84	PK	H	41.53	12.88	47.58	51.67	74	-22.33

CHANNEL	Middle Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4882	45.5	AV	V	33.62	7.53	48.36	38.29	54	-15.71
4882	43.58	AV	H	33.62	7.53	48.36	36.37	54	-17.63
4882	66.45	PK	V	33.62	7.53	48.36	59.24	74	-14.76
4882	64.87	PK	H	33.62	7.53	48.36	57.66	74	-16.34
13772	28.45	AV	V	41.5	12.54	47.74	34.75	54	-19.25
13772	24.99	AV	H	41.5	12.54	47.74	31.29	54	-22.71
13772	45.32	PK	V	41.5	12.54	47.74	51.62	74	-22.38
13772	46.34	PK	H	41.5	12.54	47.74	52.64	74	-21.36



CHANNEL	High Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4960	42.26	AV	V	33.89	7.86	48.31	35.7	54	-18.3
4960	48.05	AV	H	33.89	7.86	48.31	41.49	54	-12.51
4960	71.07	PK	V	33.89	7.86	48.31	64.51	74	-9.49
4960	63.37	PK	H	33.89	7.86	48.31	56.81	74	-17.19
17924	21.48	AV	V	41.82	17.62	45.43	35.49	54	-18.51
17924	21.78	AV	H	41.82	17.62	45.43	35.79	54	-18.21
17924	40.38	PK	V	41.82	17.62	45.43	54.39	74	-19.61
17924	43.77	PK	H	41.82	17.62	45.43	57.78	74	-16.22

REMARKS:

1. Field strength value(AV) (dBuV/m) = Field strength value(PK) (dBuV/m) + Average Factor (dB).
2. Margin value = Field strength value – Limit value..
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. . " * ": Fundamental frequency.




4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST SETUP

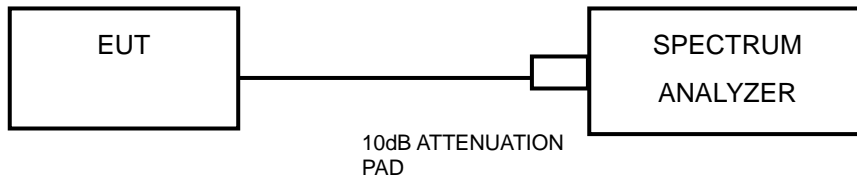

4.3.3 TEST INSTRUMENTS

Instrument	Model	Serial #	Cal Date	Cal Due
Power Sensor	Dare RPR3006C/P/W	N/A	Jan. 05, 18	Jan. 04, 19
Power Sensor	Dare RPR3006C/P/W	N/A	Jan. 05, 18	Jan. 04, 19
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	Feb. 11, 18	Feb. 10, 19
EMI test receiver	ESL6	1300.5001K06-100262-eQ	Jan. 05, 18	Jan. 04, 19
Power Splitter	1#	1#	Dec. 09, 17	Dec. 08, 18
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	Jan. 05, 18	Jan. 04, 19
DC Power Supply	E3640A	MY40004013	Jan. 05, 18	Jan. 04, 19
Bilog Antenna (30MHz~6GHz)	JB6	A110712	Feb. 08, 18	Feb. 07, 19
Bilog Antenna (30MHz~2GHz)	JB1	A112017	Jan. 26, 18	Jan. 25, 19
A-INFOMW Horn Antenna (1~18GHz)	AH-118	71259	Jan. 26, 18	Jan. 25, 19
Pre-Amplifier (100MHz-26.5GHz)	EMC 012645	980077	May 19, 17	May 18, 18
Pre-Amplifier (18GHz-40GHz)	EMC 184045	980102	Nov. 08, 17	Nov. 07, 18
EMCO Horn Antenna (1~18GHz)	AH-118	71283	Feb. 02, 18	Feb. 01, 19



**BUREAU
VERITAS**

Test Report No.: RF180621N040

OPT 010 AMPLIFIER (0.1~1300MHz)	8447E	2727A02430	Dec. 09, 17	Dec. 08, 18
Horn Antenna	BBHA 9170	BBHA9170147	Mar. 15, 17	Mar. 14, 18
Microwave Preamplifier (0.5 ~ 18GHz)	PAM-118	443008	Dec. 09, 17	Dec. 08, 18
Attenuator	MINI	N/A	Dec. 09, 17	Dec. 08, 18
Test Software	EZ-EMC	ver.lcp-03A1	N/A	N/A

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 TEST RESULTS


There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.




BUREAU VERITAS

Test Report No.: RF180621N040

GFSK

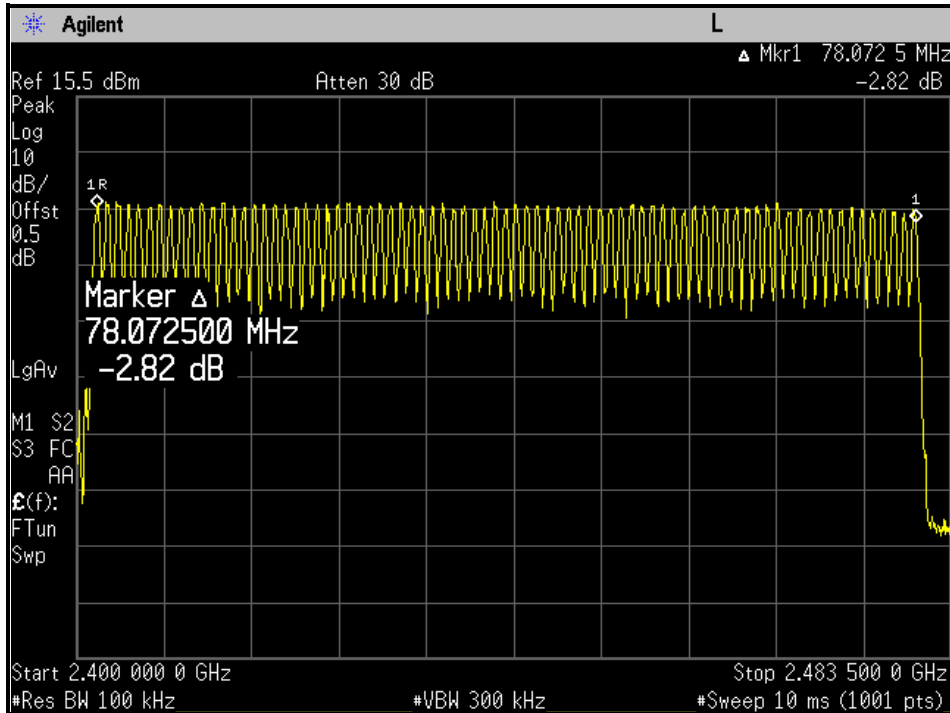

$\pi/4$ DQPSK

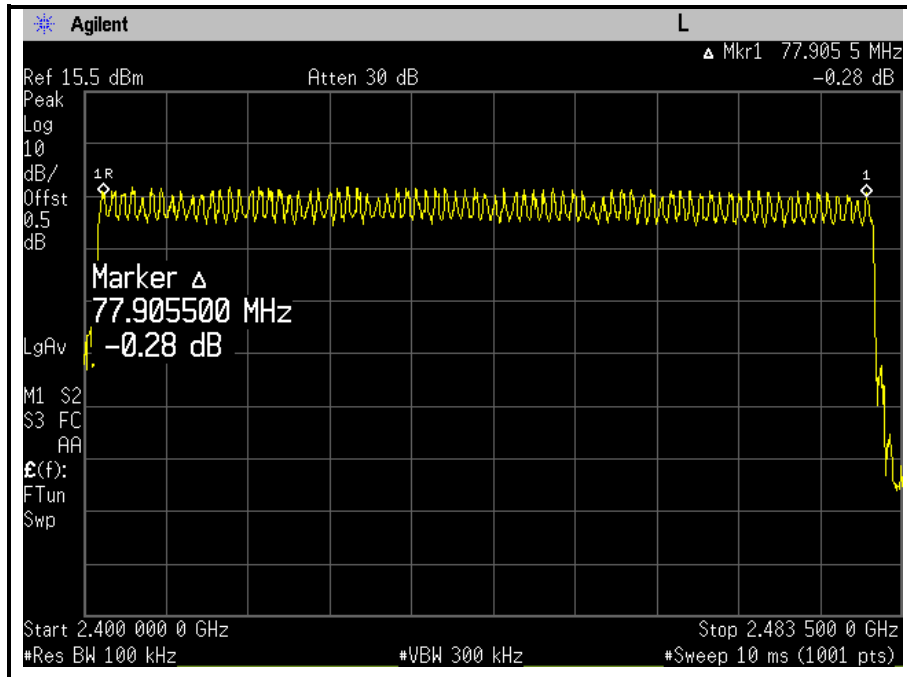




4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST SETUP

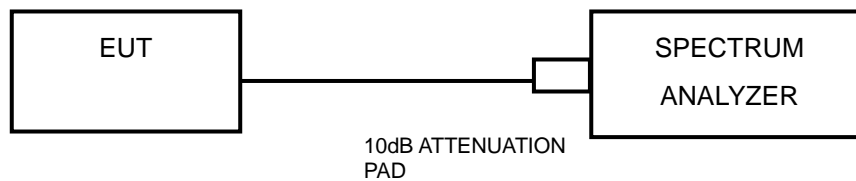

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 TEST RESULTS

GFSK


Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
DH1	79	31.6	4	12	94.8	0.5897	55.90356	400	PASS
DH3	79	31.6	4	8	63.2	1.84	116.288	400	PASS
DH5	79	31.6	4	10	79	2.873	226.967	400	PASS

$\pi/4$ DQPSK


Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
DH1	79	31.6	4	10	79	0.562	44.398	400	PASS
DH3	79	31.6	4	15	118.5	1.831	216.9735	400	PASS
DH5	79	31.6	4	13	102.7	2.874	295.1598	400	PASS

NOTE: Test plots of the transmitting time slot are shown on next page.

GFSK

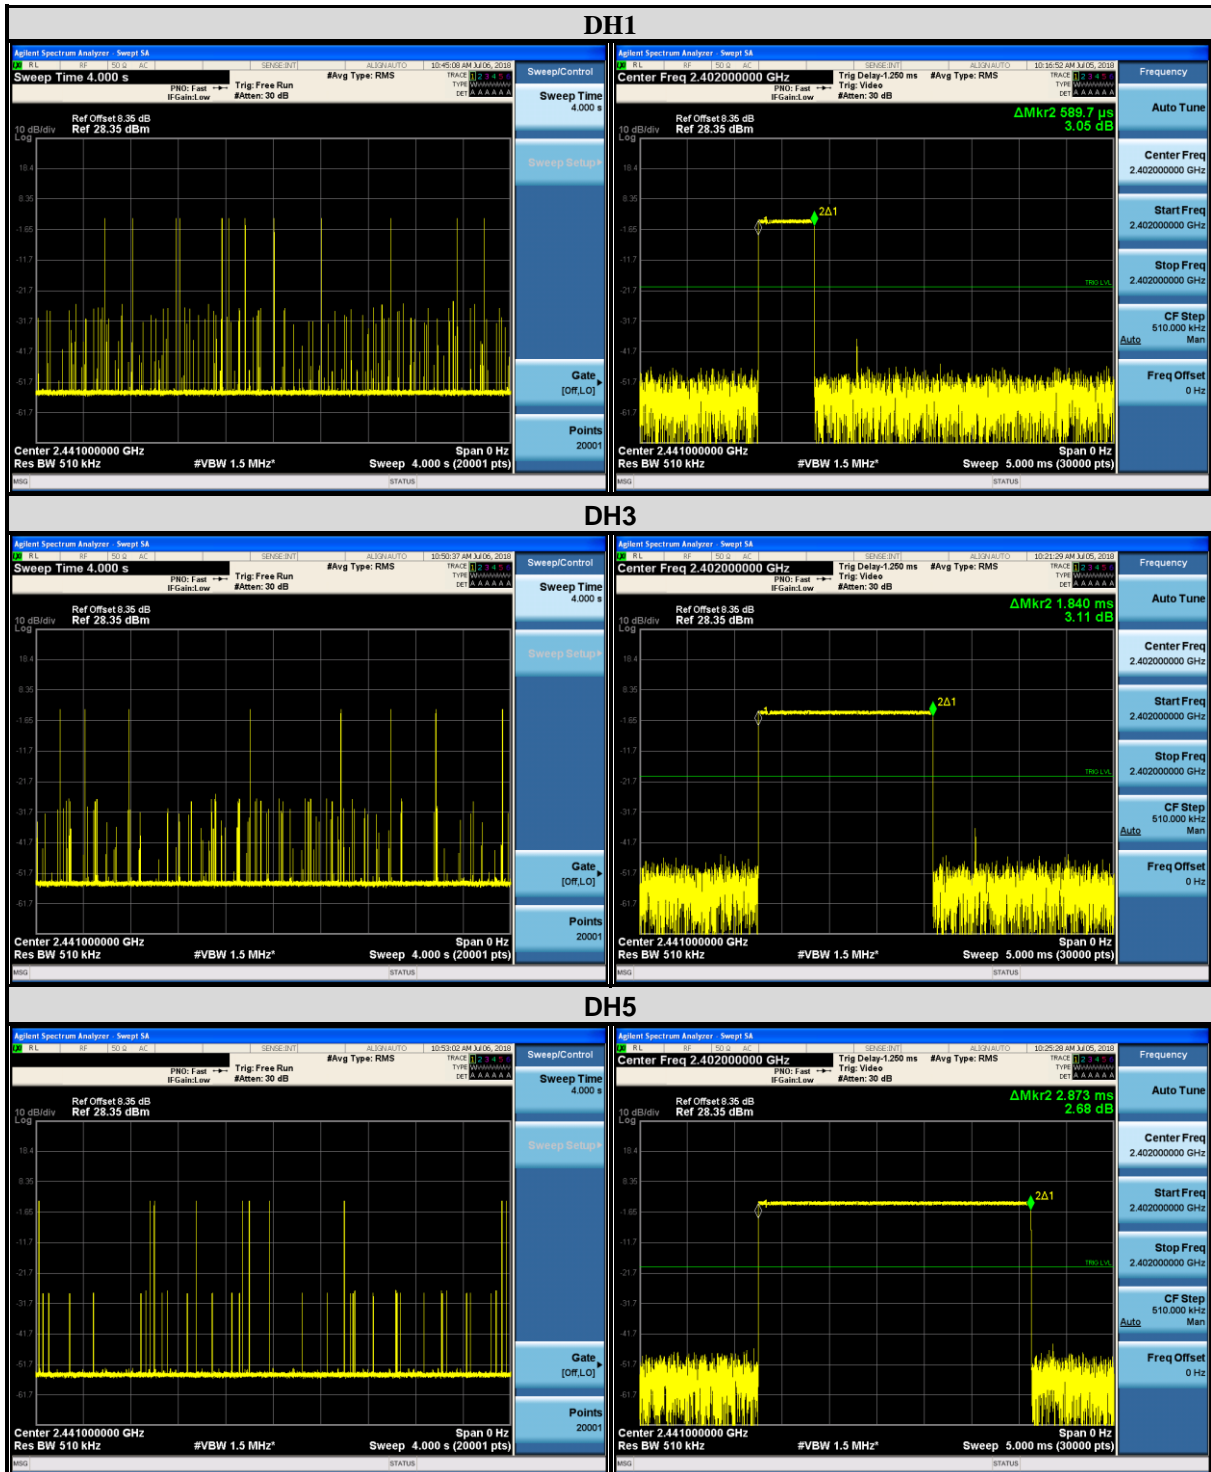

$\pi/4$ DQPSK

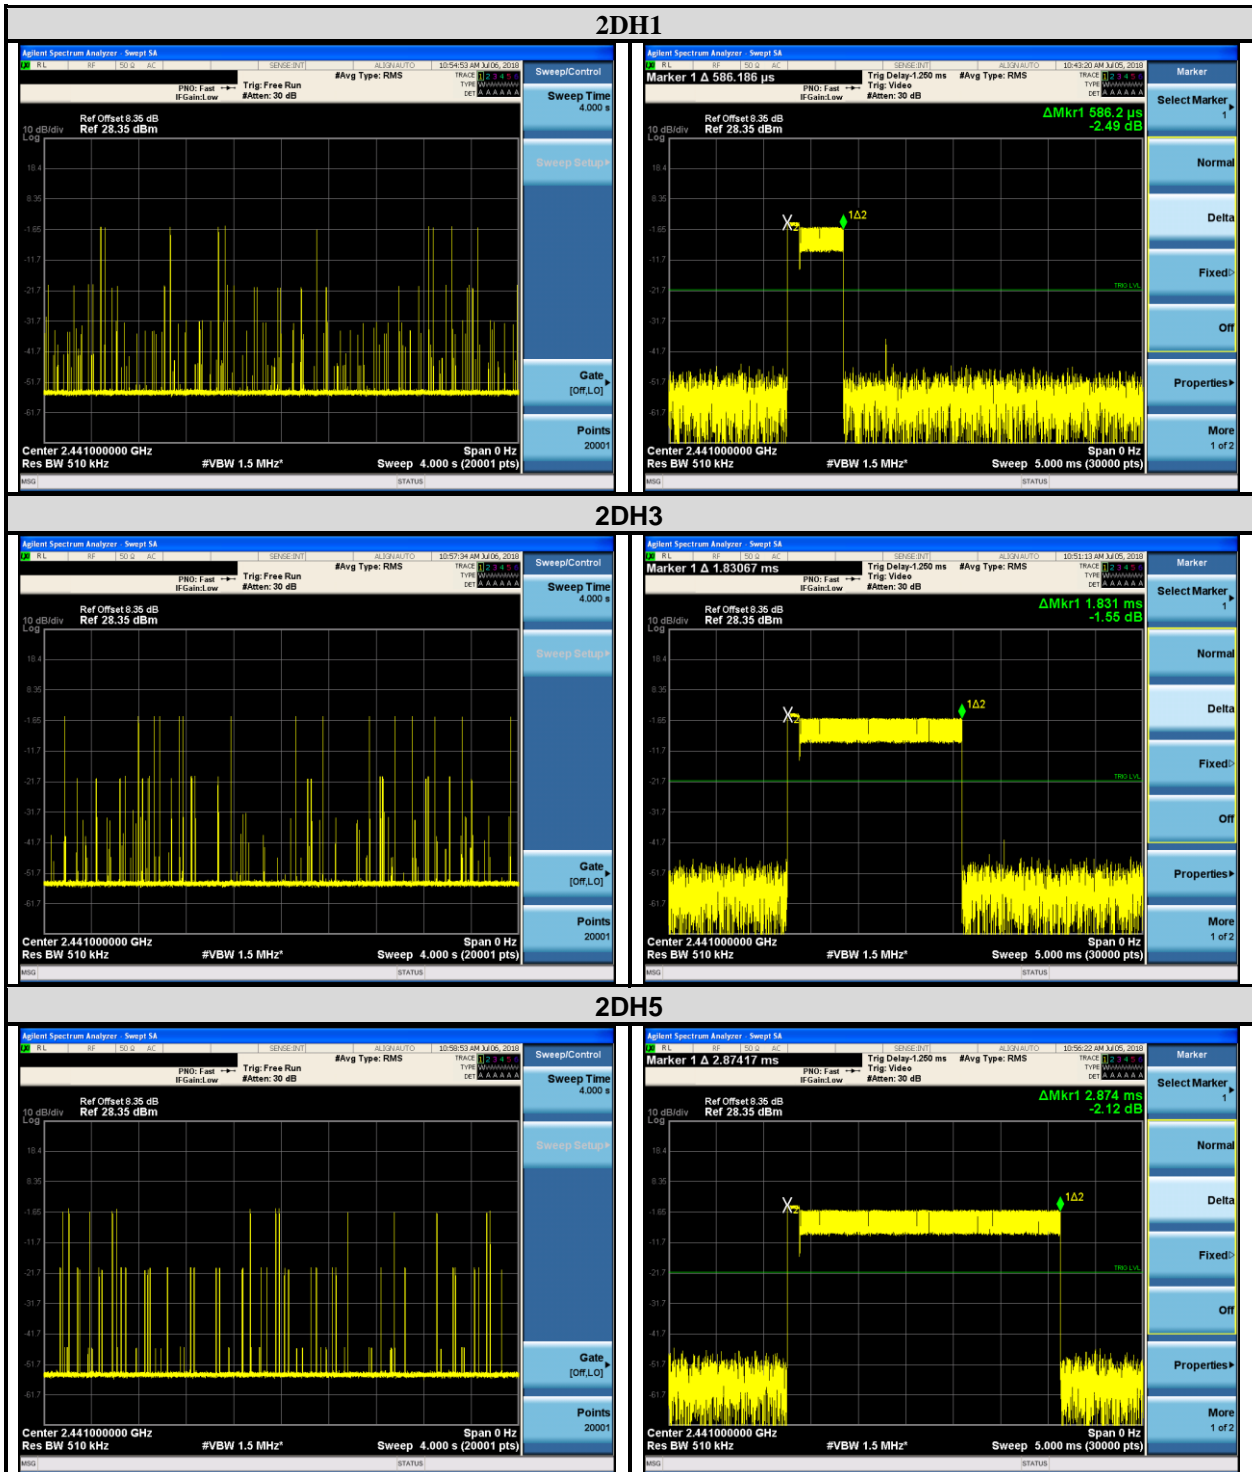




4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST SETUP

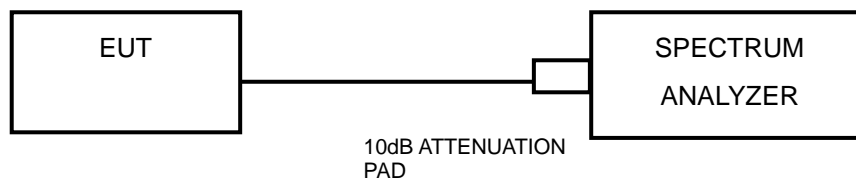

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS


GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.947
39	2441	0.942
78	2480	0.941


CH 0

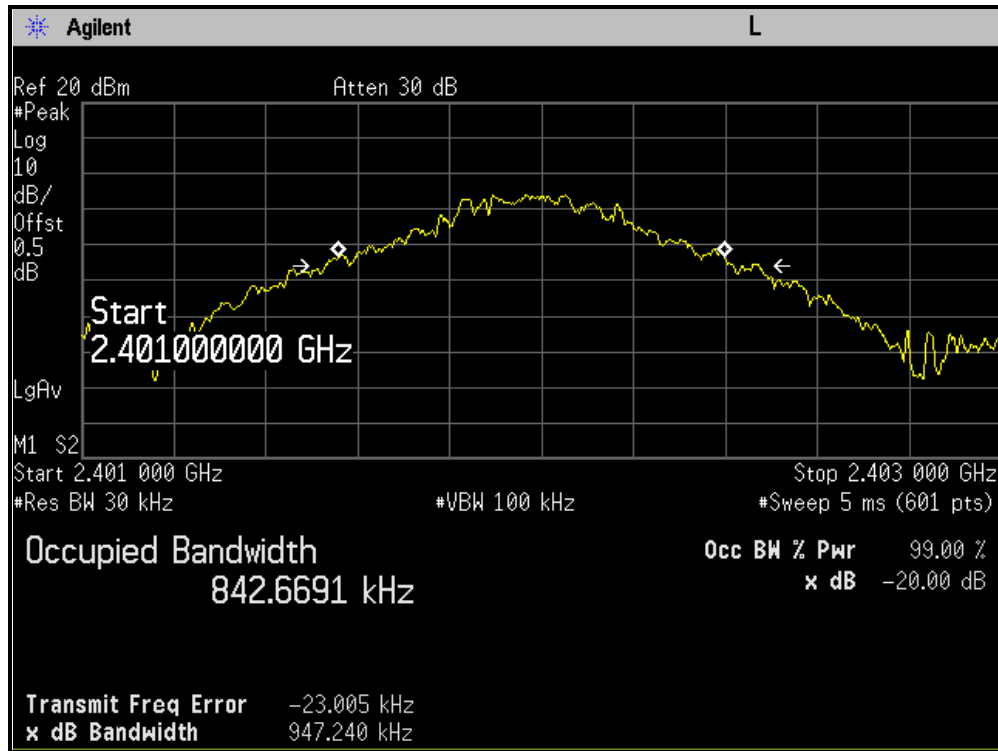

CH 39

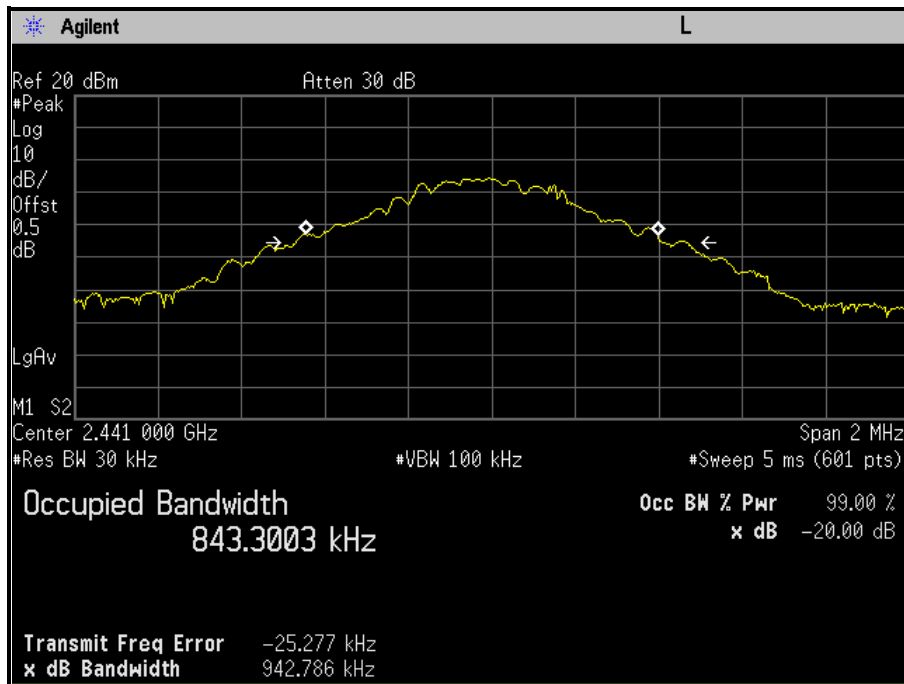

CH 78

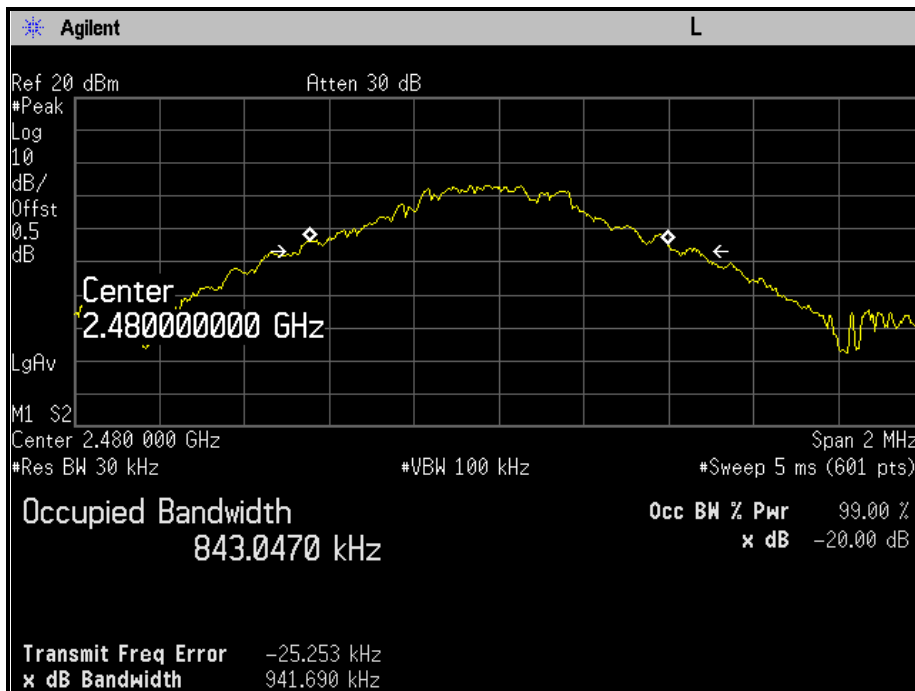





$\pi/4$ DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.30
39	2441	1.32
78	2480	1.28


CH 0

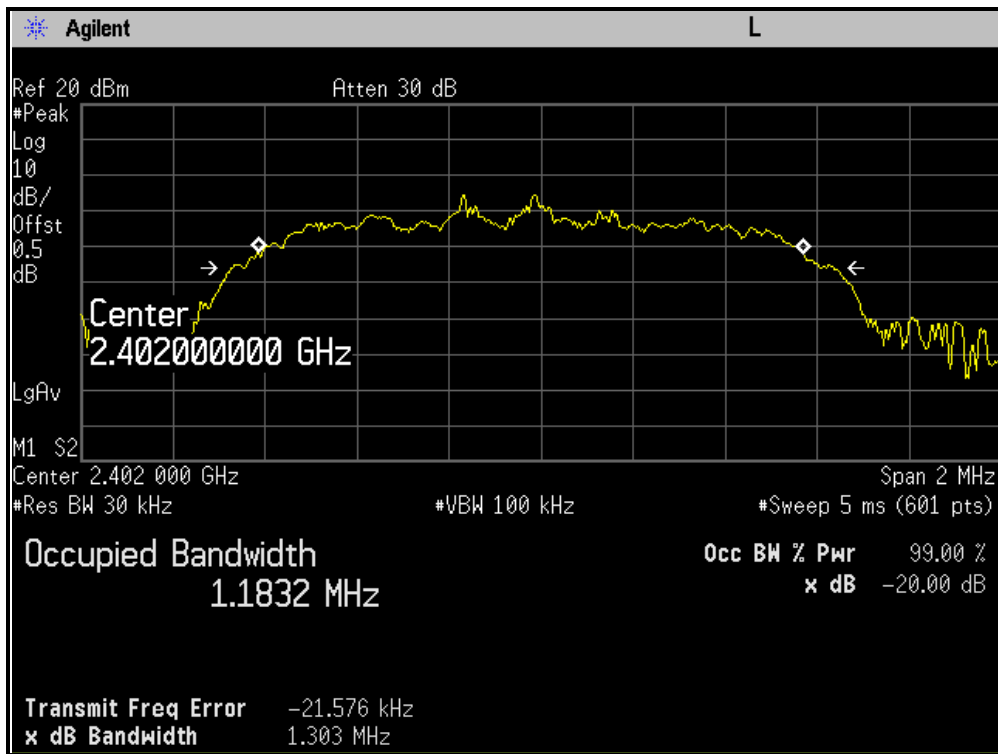

CH 39

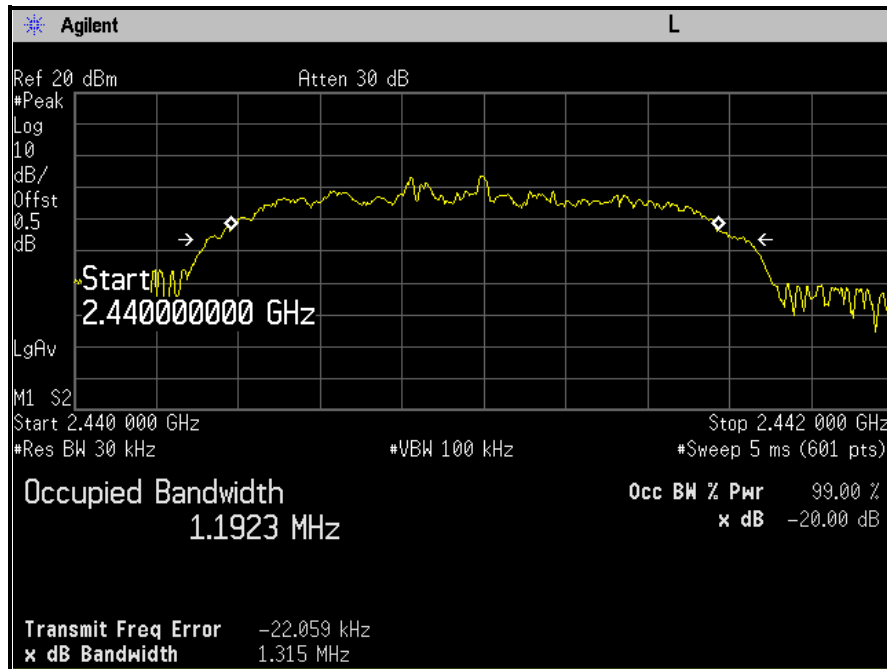

CH 78

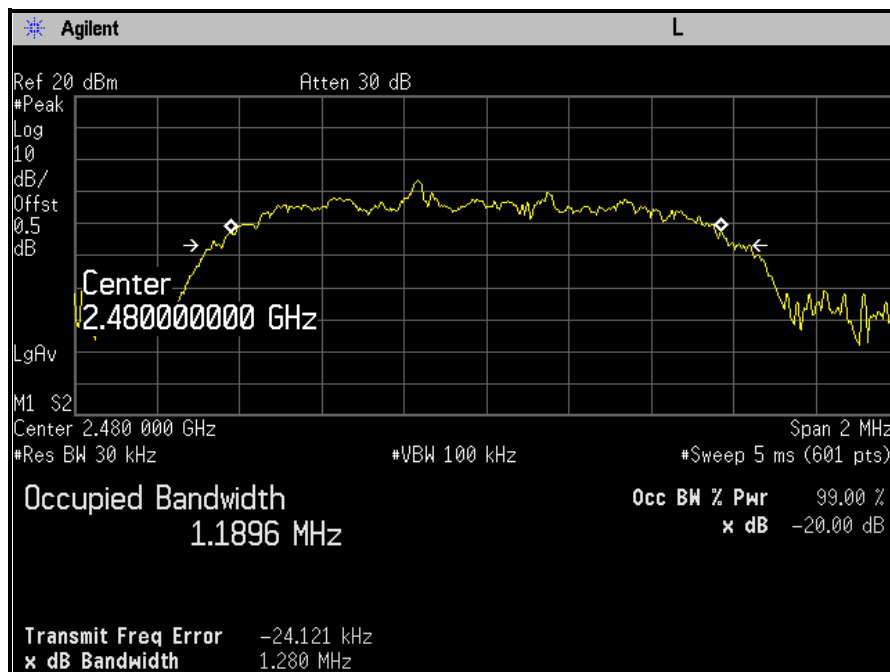




4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST SETUP

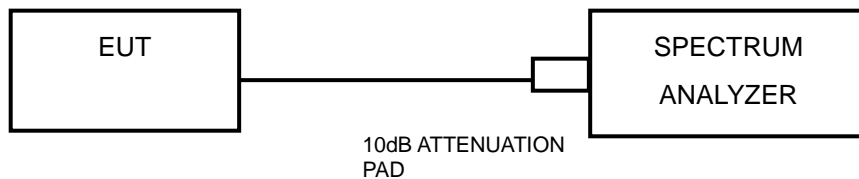

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.




4.6.6 TEST RESULTS

GFSK


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.005	0.947	0.947	PASS
39	2441	1.005	0.942	0.942	PASS
78	2480	1.005	0.941	0.941	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.


CH 0

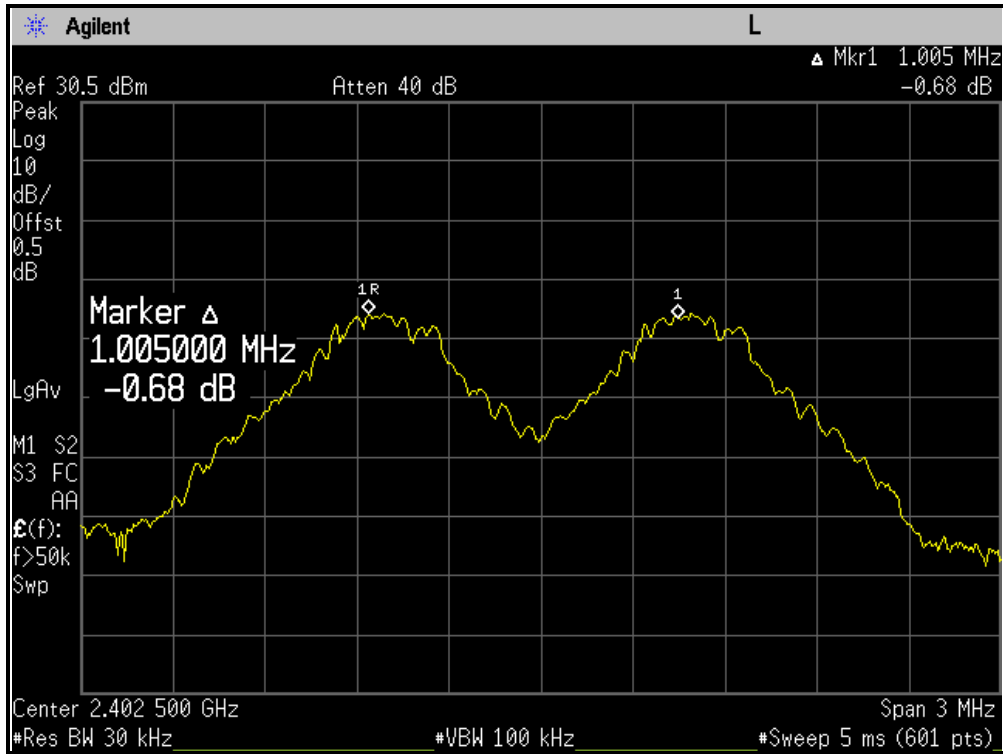

CH 39

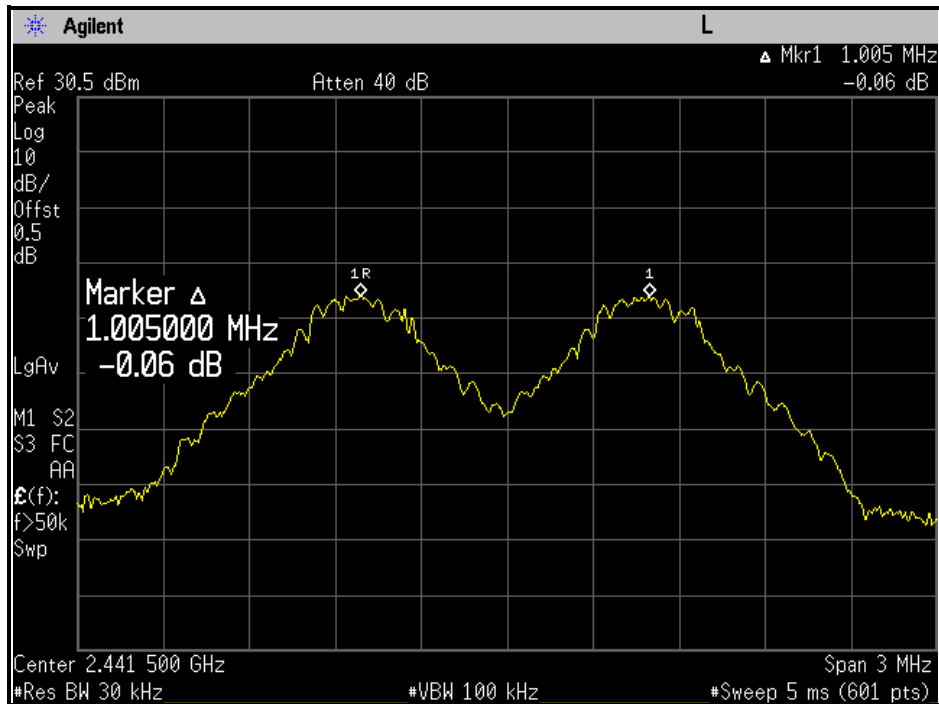

CH 78

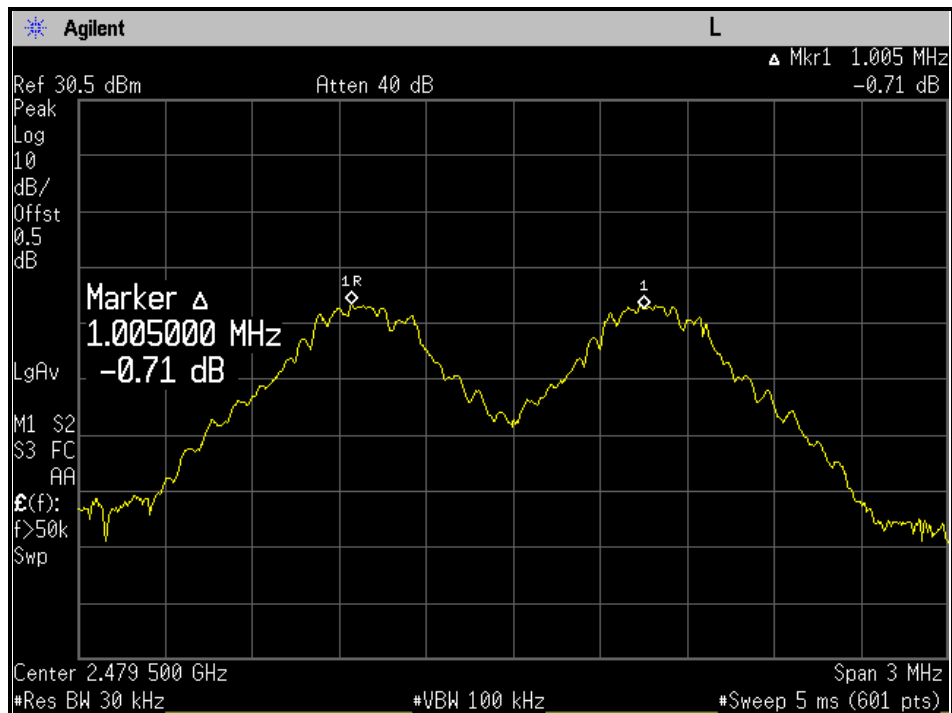


8DPSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.005	1.30	0.867	PASS
39	2441	1.005	1.32	0.880	PASS
78	2480	1.005	1.28	0.853	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.

CH 0

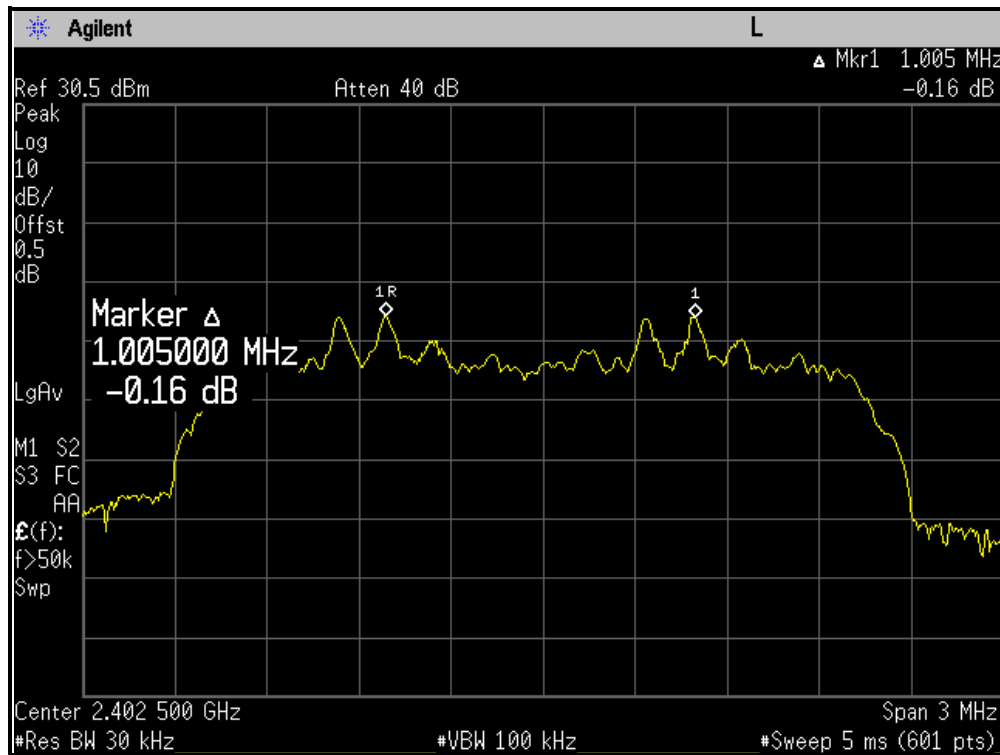





BUREAU VERITAS

Test Report No.: RF180621N040

CH 39

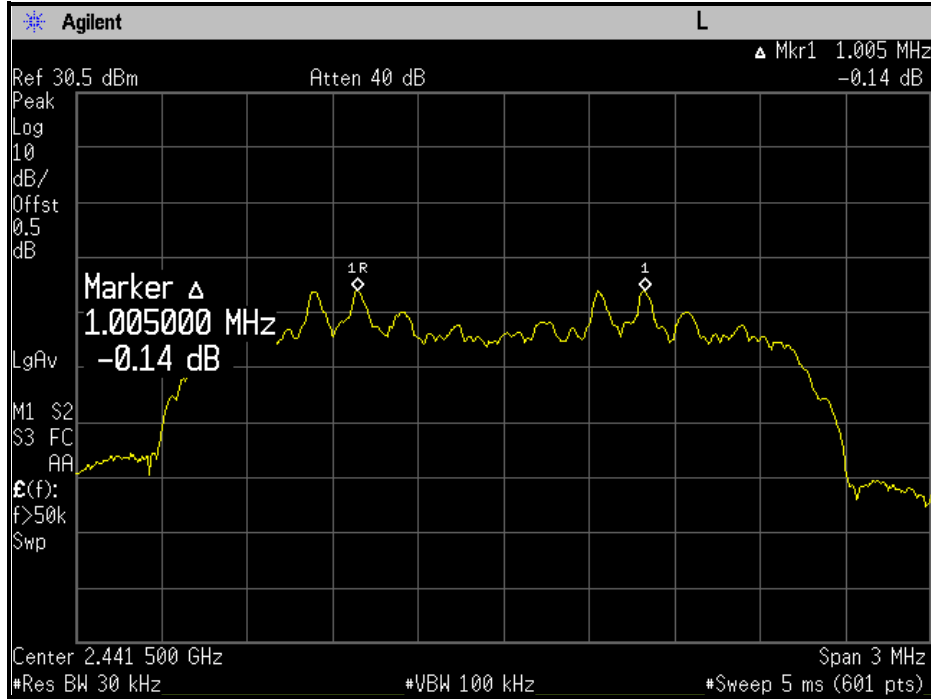

CH 78

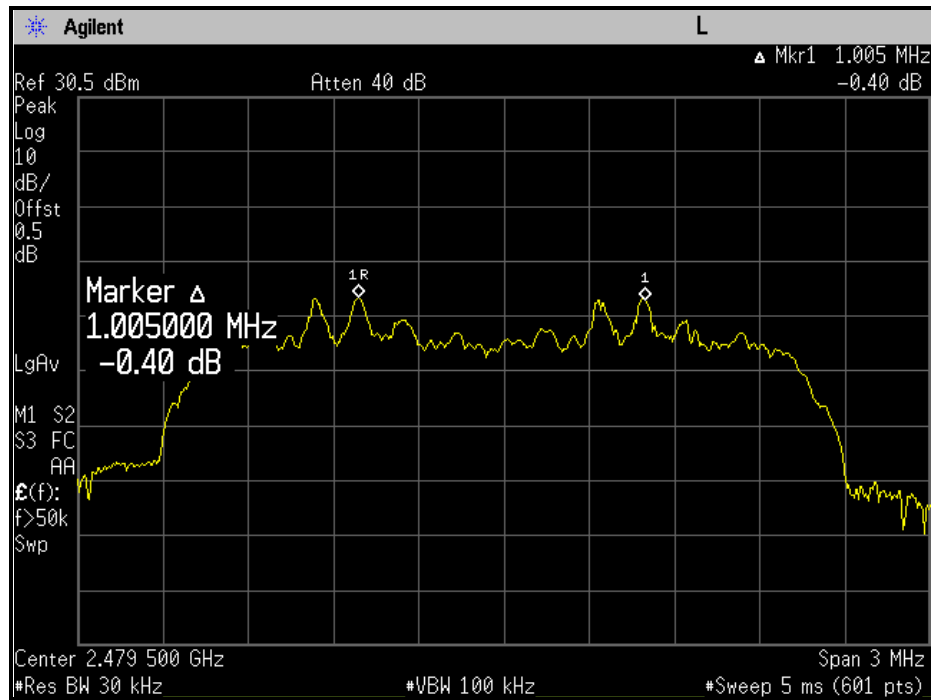




4.7 CONDUCTED OUTPUT POWER

4.7.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

4.7.2 TEST SETUP

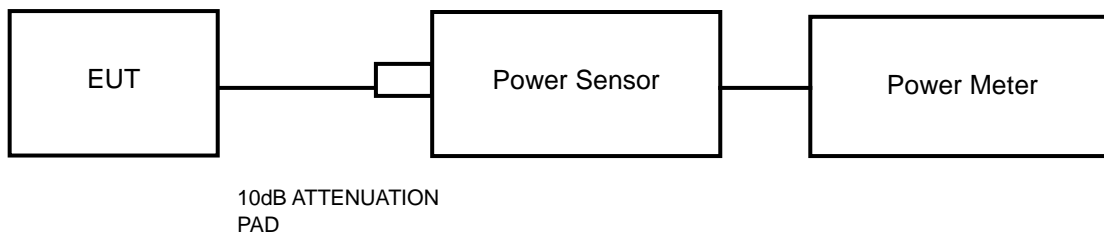

4.7.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.7.5 DEVIATION FROM TEST STANDARD

No deviation.

4.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.7.7 TEST RESULTS

MAXIMUM PEAK OUTPUT POWER

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	-2.86	0.518	1000	PASS
39	2441	-2.97	0.505	1000	PASS
78	2480	-3.65	0.432	1000	PASS

$\pi/4$ DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	-1.80	0.661	125	PASS
39	2441	-1.91	0.644	125	PASS
78	2480	-2.56	0.555	125	PASS

AVERAGE OUTPUT POWER(FOR REFERENCE)

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	-4.8	0.331
39	2441	-4.1	0.389
78	2480	-3.2	0.479

$\pi/4$ DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	-6.8	0.209
39	2441	-6.5	0.223
78	2480	-5.8	0.263



4.8 OUT OF BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.



BUREAU VERITAS

Test Report No.: RF180621N040

GFSK

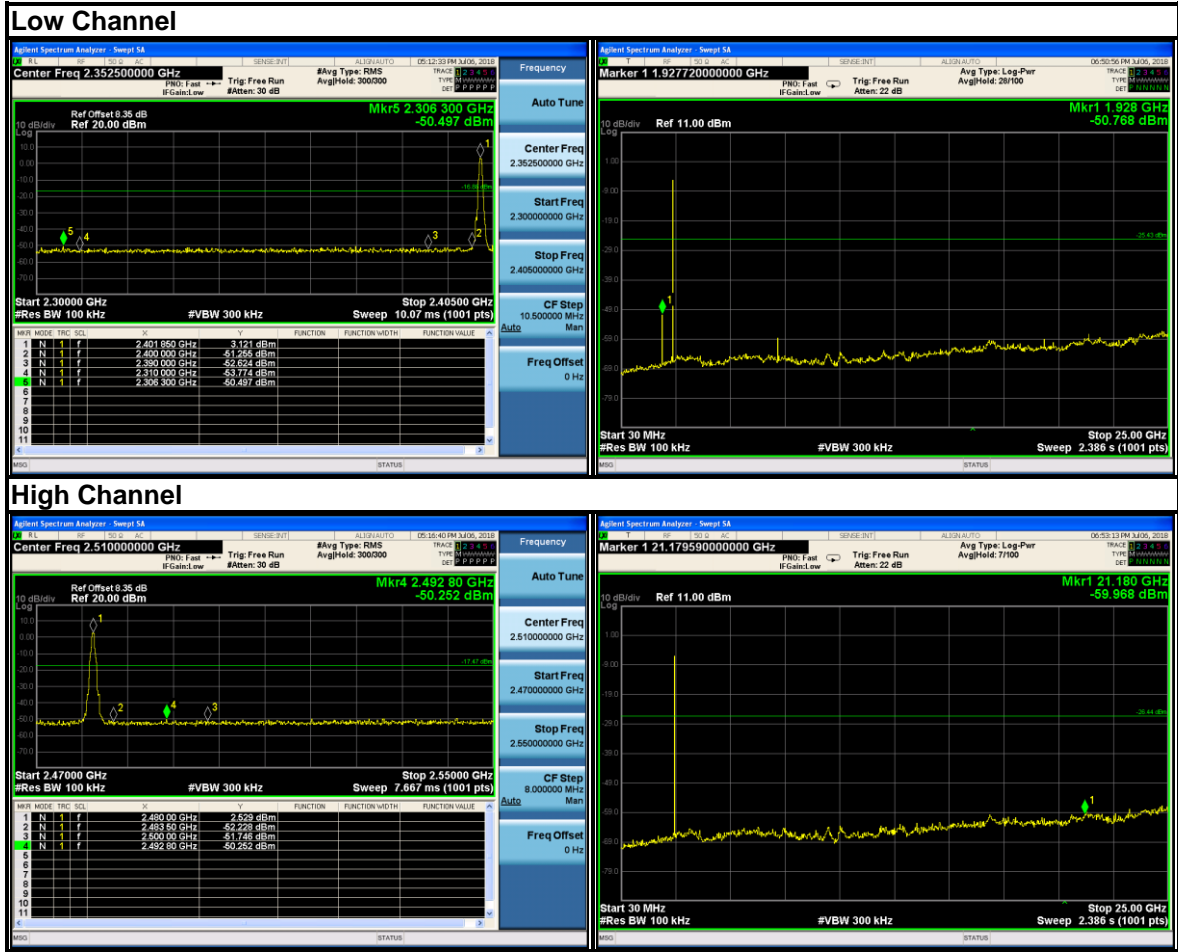

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF180621N040

T/4 DQPSK

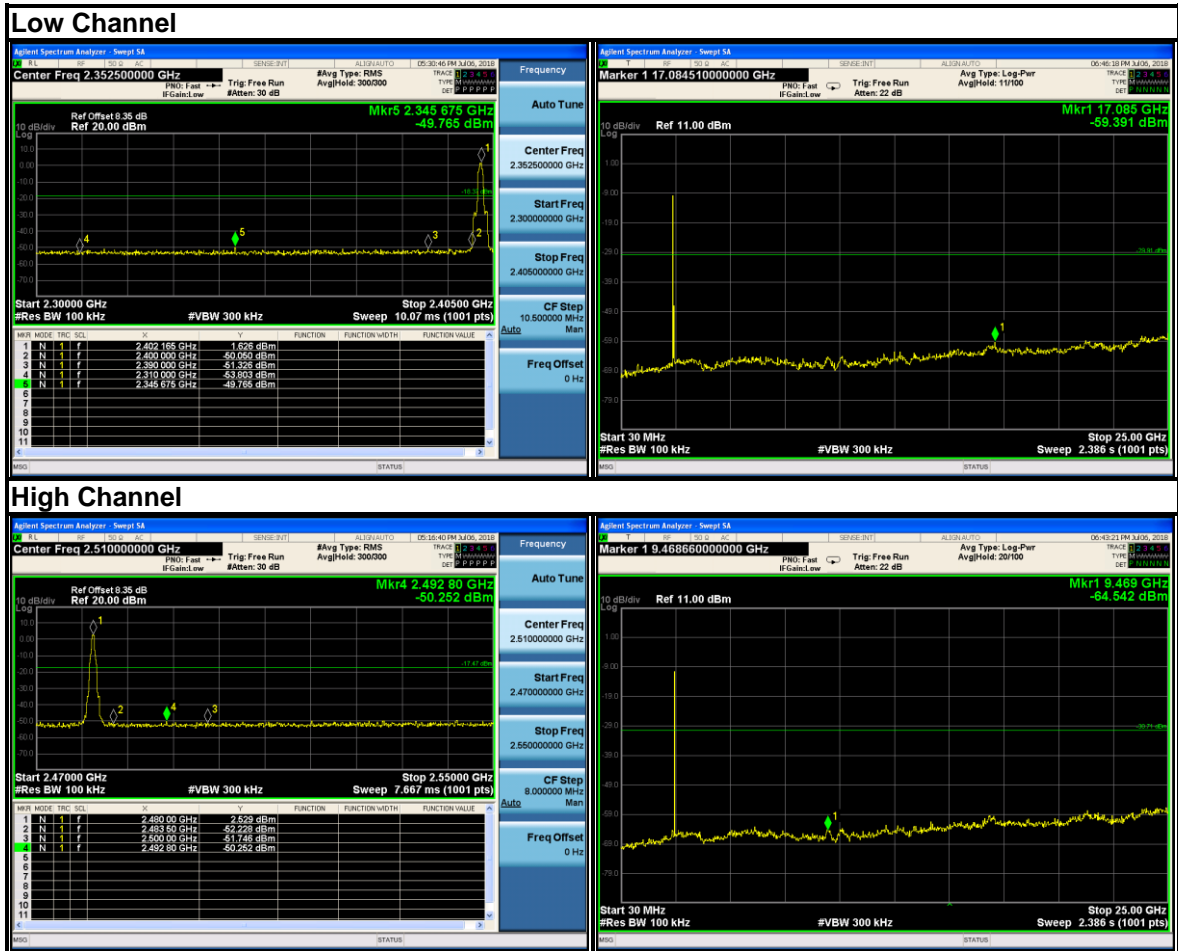

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF180621N040

GFSK

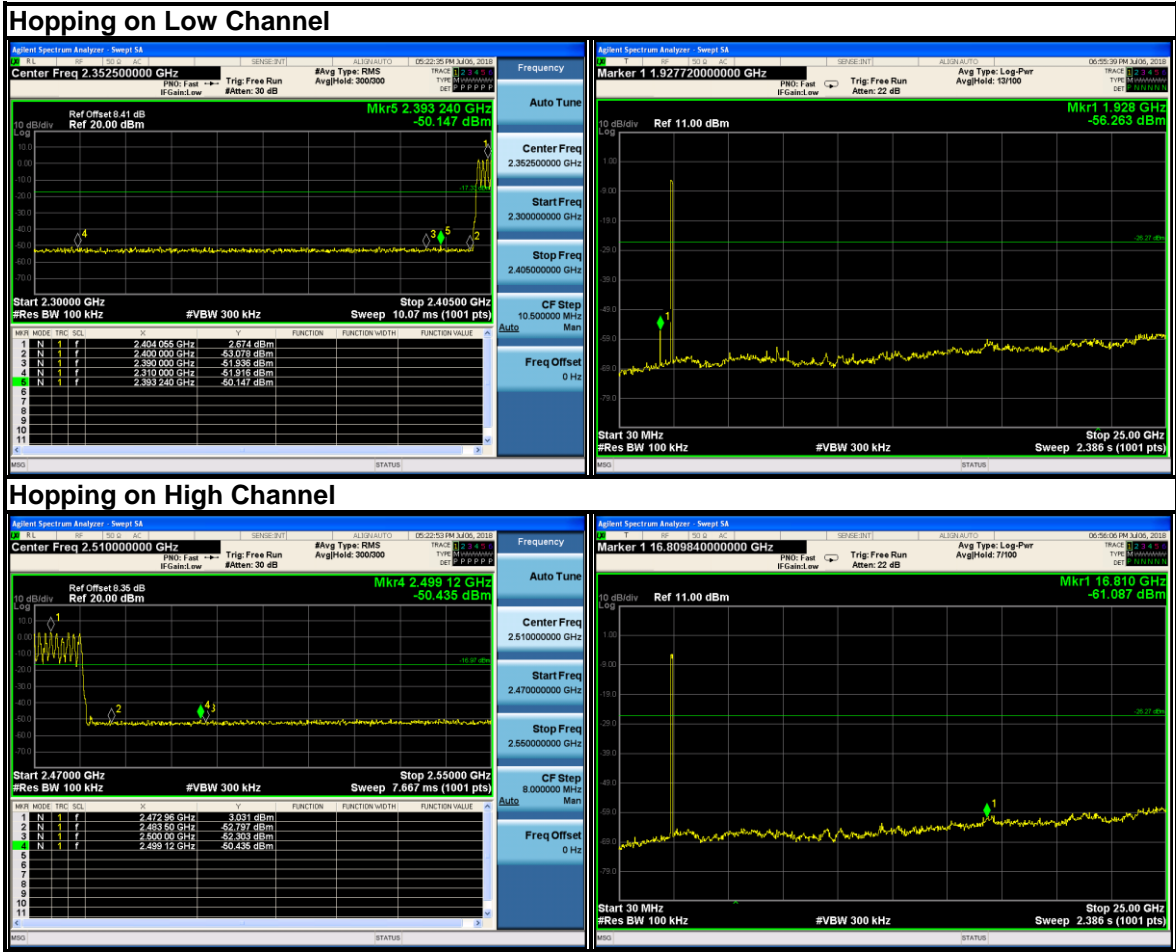

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF180621N040

T/4 DQPSK

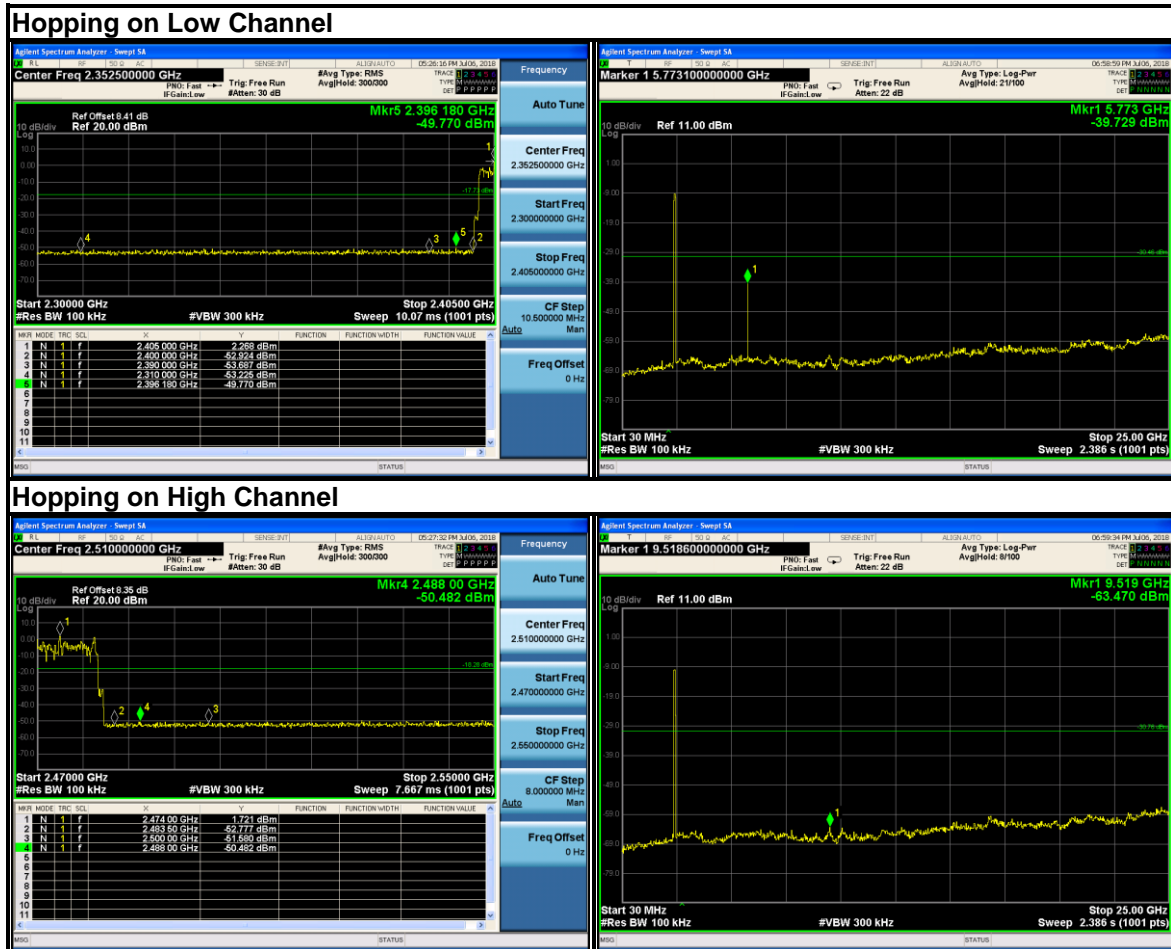

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF180621N040

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF180621N040

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---