

# **FCC Test Report**

Report No.: AGC01035180606FE05

FCC ID : 2ANKUSV-PRI

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION** : BODY-WORN CAMERA

**BRAND NAME** : Safety Vision

**MODEL NAME** : SV-PRIMAELITE64

**CLIENT** : Safety Vision LLC

**DATE OF ISSUE** : Aug. 13, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15.247

**REPORT VERSION**: V1.0

# Attestation of Global Compliance (Shenzhen) Co., Ltd

#### CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 69

### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	TO W	Aug. 13, 2018	Valid	Initial Release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



### **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. IEEE 802.11N MODULATION SCHEME	
2.4. RELATED SUBMITTAL(S) / GRANT (S)	7
2.5. TEST METHODOLOGY	7
2.6. SPECIAL ACCESSORIES	
2.7. EQUIPMENT MODIFICATIONS	7
3. MEASUREMENT UNCERTAINTY	S S S S S S S S S S S S S S S S S S S
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	The Third of the Party of the P
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	CC 3
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	
7. OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	10
7.1. MEASUREMENT PROCEDURE	
7.3. LIMITS AND MEASUREMENT RESULT	
7.3. LIMITS AND MEASUREMENT RESULT	13
8. 6 DB BANDWIDTH	14
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUPEMENT DESUITS	15

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.





9. CONDUCTED SPURIOUS EMISSION	21
9.1. MEASUREMENT PROCEDURE	21
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	21
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	
10.1 MEASUREMENT PROCEDURE	36
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3 MEASUREMENT EQUIPMENT USED	36
10.4 LIMITS AND MEASUREMENT RESULT	36
11. RADIATED EMISSION	
11.1. MEASUREMENT PROCEDURE	43
11.2. TEST SETUP	44
11.3. LIMITS AND MEASUREMENT RESULT	45
11.4. TEST RESULT	45
12. BAND EDGE EMISSION	51
12.1. MEASUREMENT PROCEDURE	51
12.2. TEST SET-UP	
12.3. TEST RESULT	52
13. FCC LINE CONDUCTED EMISSION TEST	64
13.1. LIMITS OF LINE CONDUCTED EMISSION TEST	64
13.2. BLOCK DIAGRAM OF TEST SETUP	
13.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST	
13.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Page 5 of 69

### 1. VERIFICATION OF CONFORMITY

403	
Applicant	Safety Vision LLC
Address	6100 West Sam Houston Parkway North   Houston, Texas 77041-5113, USA
Manufacturer	Safety Vision LLC
Address	6100 West Sam Houston Parkway North   Houston, Texas 77041-5113, USA
Product Designation	BODY-WORN CAMERA
Brand Name	Safety Vision
Test Model	SV-PRIMAELITE64
Date of test	Jul. 02, 2018 to Jul. 09, 2018
Deviation	None
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF
3631	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested By	Max Zhang	
C Manufacture of Columbia	Max Zhang(Zhang Yi)	Aug. 13, 2018
Reviewed By	Bore xie	
addition of Corban Comm	Bart Xie(Xie Xiaobin)	Aug. 13, 2018
Approved By	Forrest ce	
© A John Commun	Forrest Lei(Lei Yonggang) Authorized Officer	Aug. 13, 2018

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 6 of 69

#### 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is designed as "BODY-WORN CAMERA". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz~2.462GHz
Output Power(Average)	IEEE 802.11b:14.03dBm; IEEE 802.11g:12.91dBm; IEEE 802.11n(20):12.84dBm
Modulation	DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM)
Number of channels	11
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Fixed Antenna
Antenna Gain	3dBi
Power Supply	DC 3.7V by battery or DC 5V by charging box with adapter

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
S SE MIND CONTROL OF SECOND	20° 100°	2412 MHZ
AGC PROPERTY.	2	2417 MHZ
	3 5 5 6	2422 MHZ
S SE	CO A TOTAL COLOR	2427 MHZ
CC MANAGEMENT	5	2432 MHZ
2400~2483.5MHZ	<b>1</b> 6	2437 MHZ
The Thomas of the State of the	7 O March Comment of the Comment of	2442 MHZ
Godal Comment @ Michael or of Congression of Congre	80	2447 MHZ
100	9	2452 MHZ
illi.	10	2457 MHZ
The Completion Of the American	11 60	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 7 of 69

#### 2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NCBPS NDB		NBPSC	NDBPS		rate(I	ata Mbps) nsGl
d					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1 玩	52	108	26	54	6.5	13.5
1	Cont liance	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1 8	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	(1)	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4 %	208	432	156	324	39.0	81.0
5	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI	Guard interval	

#### 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ANKUSV-PRI** filing to comply with the FCC Part 15 requirements.

### 2.5. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

### 2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 8 of 69

#### 3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (GC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a titp://www.agc.gatt.com.



Page 9 of 69

#### 4. DESCRIPTION OF TEST MODES

NO.		TEST MODE DESCRIPTION	N	
K 1 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	( ) ( ) ( ) ( ) ( ) ( ) ( ) ( ) ( ) ( )	Low channel TX	*GO *	100
2	The state of Copy of	Middle channel TX		10000000000000000000000000000000000000
3	Pin.	High channel TX	The Hamplanes	® # John of Children Com
4	报 测 报 测	Normal operating	Figure 1 Clops	10 × CC

#### Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

#### Note:

- The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 10 of 69

### 5. SYSTEM TEST CONFIGURATION

### **5.1. CONFIGURATION OF EUT SYSTEM**

Radiated Emission Configure :

EUT

Conducted Emission Configure:

	極	
EUT	tion of Grown Com	AE

### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	BODY-WORN CAMERA	SV-PRIMAELITE64	2ANKUSV-PRI	EUT
2	Adapter	FJ-SW1260502000UN	DC5V/2A	AE
3	Charging box	SV-PRIMAELITECH	N/A	AE

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 11 of 69

### 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP LAB CODE	600153-0
Designation Number	CN5028
FCC Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	M ESPI	101206	Jun.12, 2018	Jun.11, 2019
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

			38971 207		(V) A8886
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.12, 2018	Jun.11, 2019
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Power sensor	Aglient	U2021XA	MY54110007	Sep.21, 2017	Sep.20, 2018
2.4GHz Fliter	Micro-tronics	087	N/A	Jun.12, 2018	Jun.11, 2019
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Active loop antenna (9K-30MHz)	A.H.	SAS-562B	N/A	Mar.01, 2018	Feb.28, 2019
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.12, 2018	Jun.11, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 12 of 69

#### 7. OUTPUT POWER


#### 7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

**Note**: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) AVERAGE POWER SETUP



The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 13 of 69

### 7.3. LIMITS AND MEASUREMENT RESULT

TEST ITEM	OUTPUT POWER	200	100°	Co
TEST MODE	802.11b with data rate 1		·mi	The filling

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	14.03	30	Pass
2.437	13.96	30	Pass
2.462	13.64	30	Pass

TEST ITEM	OUTPUT POWER	® Masallor of Globa	® Attestation of Co.	100
TEST MODE	802.11g with data rate 6	GO 70		:10

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	12.76	30	Pass
2.437	12.91	30	Pass
2.462	12.59	30	Pass

TEST ITEM	OUTPUT POWER	- Till	The Manual Companies
TEST MODE	802.11n 20 with data rate 6.5	The Compliance	© Alle dallon of Colomb

Frequency (GHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	12.06	30	Pass
2.437	12.71	30	Pass
2.462	12.84	30	Pass

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 14 of 69


#### 8. 6 DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

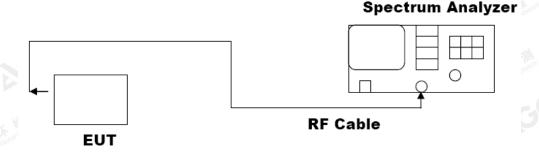

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 15 of 69

### 8.3. LIMITS AND MEASUREMENT RESULTS

TEST ITEM	6DB BANDWIDTH	(8) Attestation of Give	® Milestation of Globs	(S) Attestation of Attestation of
TEST MODE	802.11b with data rate 11	0 1	30	O min

	LIMITS AND MEAS	UREMENT RESULT	
Applicable Limits	Applicable Limits  Test Data (MHz)  Criteria		
-CC	Low Channel	8.001	PASS
>500KHZ	Middle Channel	8.007	PASS
	High Channel	8.028	PASS

TEST ITEM	6DB BANDWIDTH	® Affectation of Co	CG The street	NO.
TEST MODE	802.11g with data rate 54			AND STATE OF THE PARTY OF THE P

LIMITS AND MEASUREMENT RESULT				
Assorbs at the Livetic	Applicable Limits			
Applicable Limits	Test Data (MHz)		Criteria	
S	Low Channel	15.92	PASS	
>500KHZ	Middle Channel	15.74	PASS	
© ## philos of Global CV	High Channel	15.40	PASS	

TEST ITEM	6DB BANDWIDTH	J. Codes	100	NO
TEST MODE	802.11n 20 with data rate 65			玉

LIMITS AND MEASUREMENT RESULT					
Applicable Limite	Applicable Limits				
Applicable Limits	Test Dat	a (MHz)	Criteria		
	Low Channel	17.27	PASS		
>500KHZ	Middle Channel	17.14	PASS		
3 abar Comm	High Channel	15.72	PASS		

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KeC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gent.com.



# 802.11b TEST RESULT TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

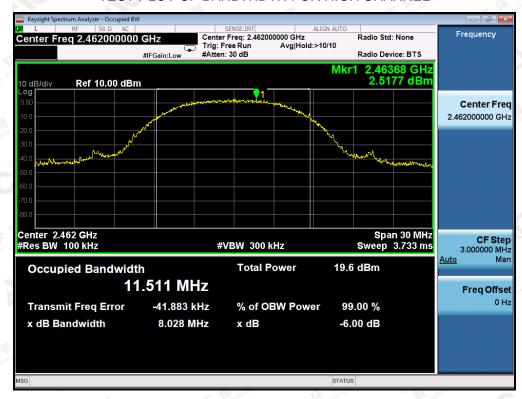

802.11g TEST RESULT
TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



# 802.11n (20) TEST RESULT TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a step www.agc.goalt.com.



Page 21 of 69

#### 9. CONDUCTED SPURIOUS EMISSION

### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.


#### 9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT				
Amplicable Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -30dBc than the limit Specified on the BOTTOM Channel	PASS		
power that is produce by the intentional radiator shall be at least 30 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.  In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -30dBc than the limit Specified on the TOP Channel	PASS		

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



# TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11b FOR MODULATION IN LOW CHANNEL

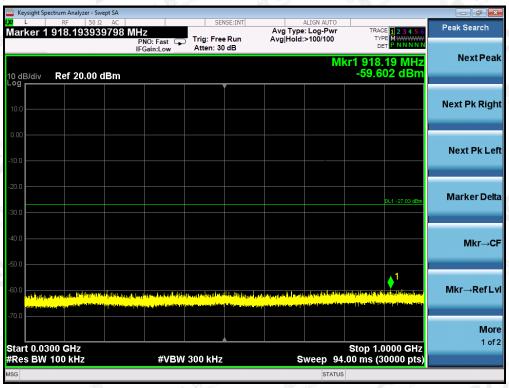

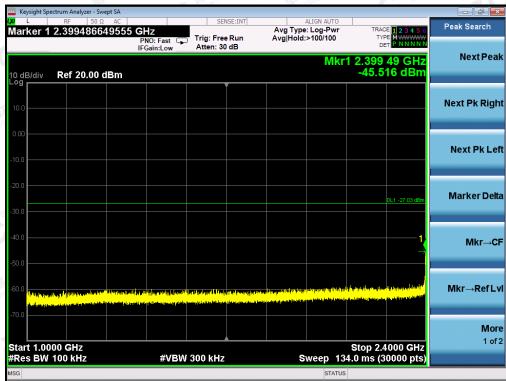

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.






# TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11b FOR MODULATION IN MIDDLE CHANNEL



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



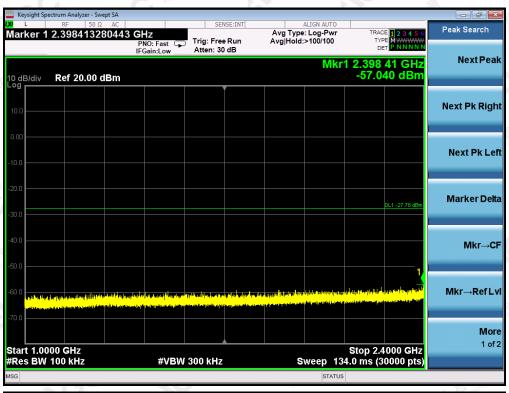





The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



## TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11b FOR MODULATION IN HIGH CHANNEL

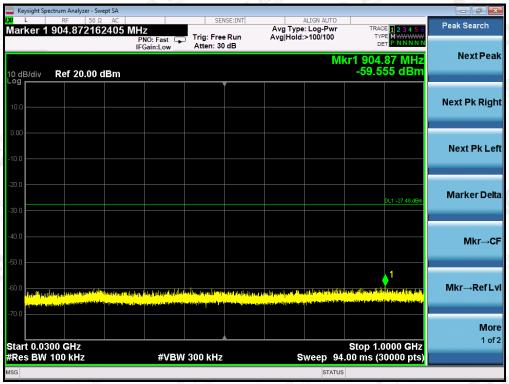

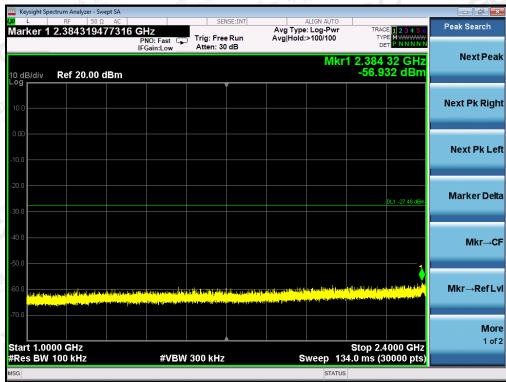

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.






# TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11g FOR MODULATION IN LOW CHANNEL



The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



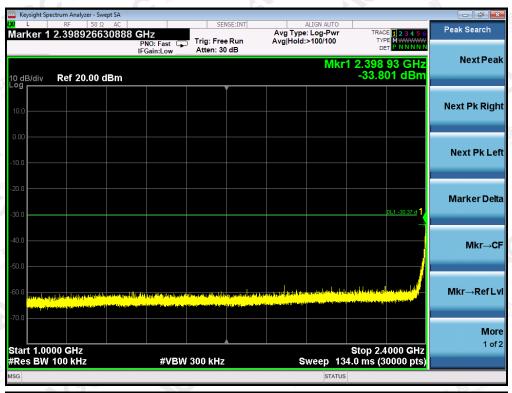




The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



# TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11g FOR MODULATION IN MIDDLE CHANNEL

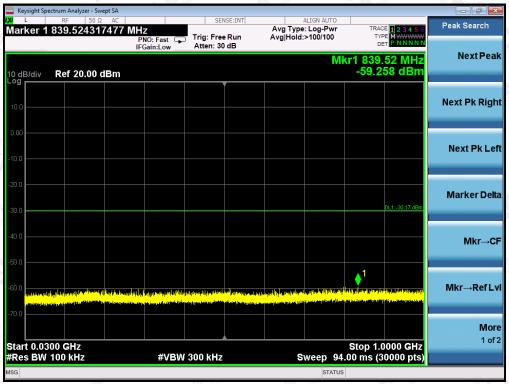



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.





# TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11q FOR MODULATION IN HIGH CHANNEL



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.









The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



# TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11n20 FOR MODULATION IN LOW CHANNEL

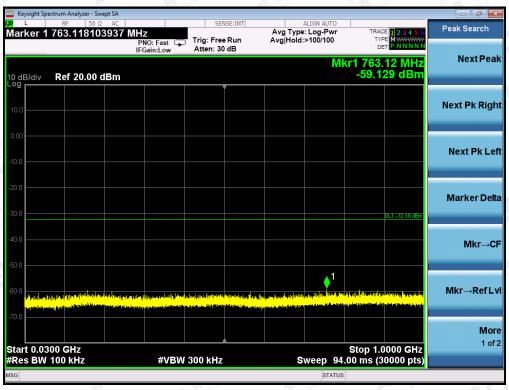

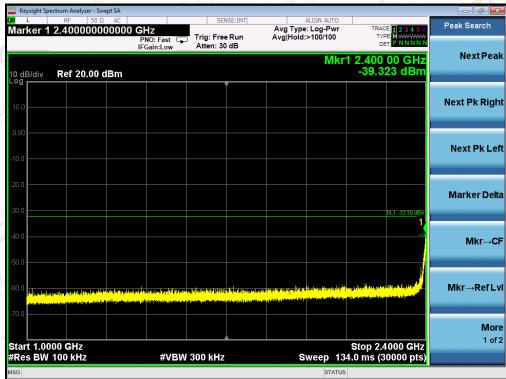


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.






# TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n20 FOR MODULATION IN MIDDLE CHANNEL

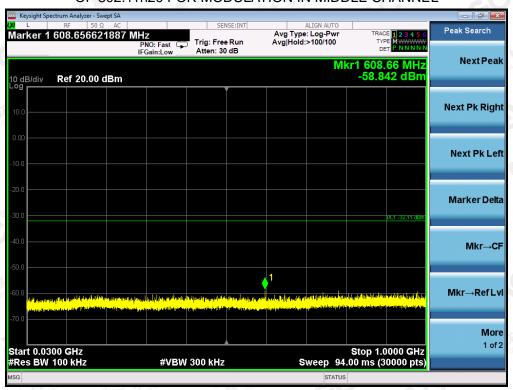

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



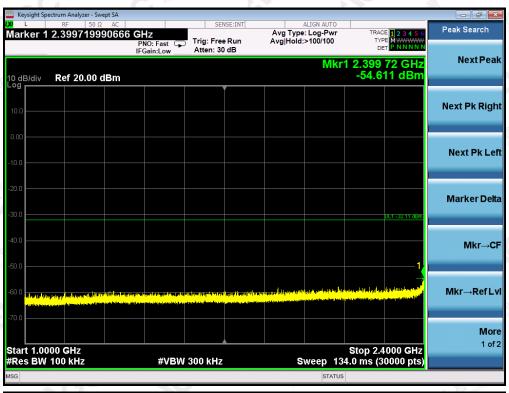





The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




## TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n20 FOR MODULATION IN HIGH CHANNEL

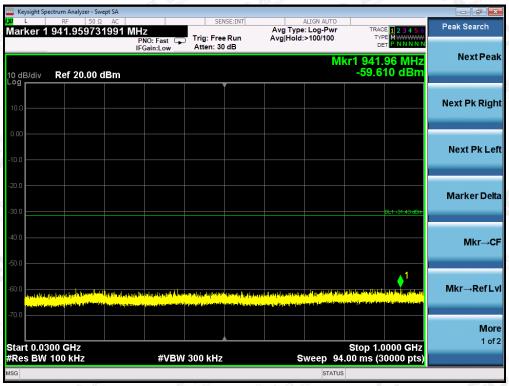

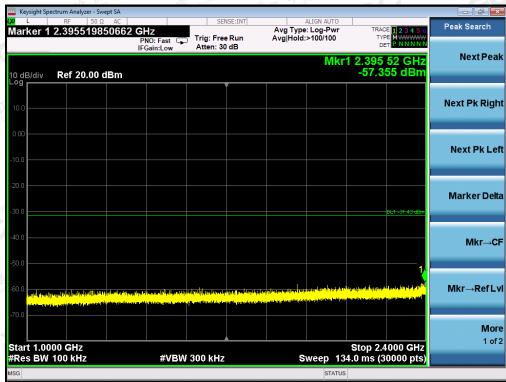

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



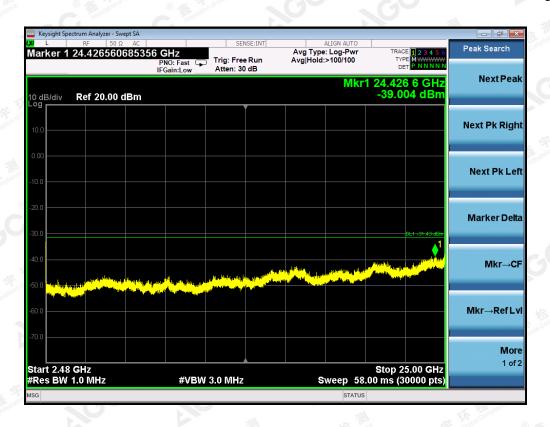

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a tittp://www.agc.com.



Page 36 of 69

#### 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

#### **10.1 MEASUREMENT PROCEDURE**

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of AVGPSD-1 in the ANSI C63.10 (2013) item 11.10 was used in this testing.

### 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

### 10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

#### **10.4 LIMITS AND MEASUREMENT RESULT**

TEST ITEM	POWER SPECTRAL DENSITY	The Jonathanes	The Compliance ®
TEST MODE	802.11b with data rate 1	© Medicinion of Citizen	Ades propos

Channel No.	Power density (dBm/20kHz)	Limit (dBm/3kHz)	Result
Low Channel	-3.432	8	Pass
Middle Channel	-3.277	8	Pass
High Channel	-2.680	8	Pass

TEST ITEM	POWER SPECTRAL DENSITY		
TEST MODE	802.11g with data rate 6	The Till	® # The of Codes Company

Channel No.	Power density (dBm/20kHz)	Limit (dBm/3kHz)	Result
Low Channel	-6.531	The state of the s	Pass
Middle Channel	-6.539	8	Pass
High Channel	-5.695	8	Pass

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



	rage 37 or	03
III	A Comment of the Comm	

TEST ITEM	POWER SPECTRAL DENSITY	II Wandland	The state of the s
TEST MODE	802.11n 20 with data rate 6.5	(a) Milestation of Cas	

Channel No.	Power density (dBm/20kHz)	Limit (dBm/3kHz)	Result	
Low Channel	-6.896	® # 500 8	Pass	
Middle Channel	-6.437	8	Pass	
High Channel	-5.267	8	Pass	



# 802.11b TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL




#### TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL






#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

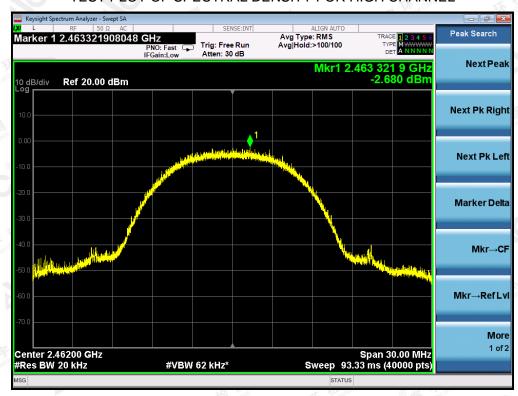


802.11g TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

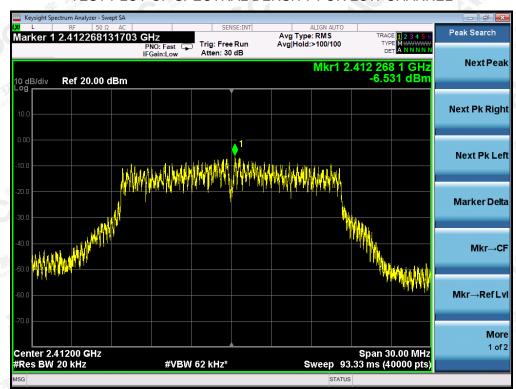




## TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

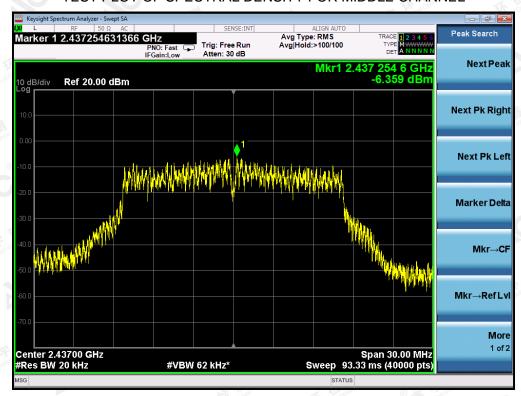


#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

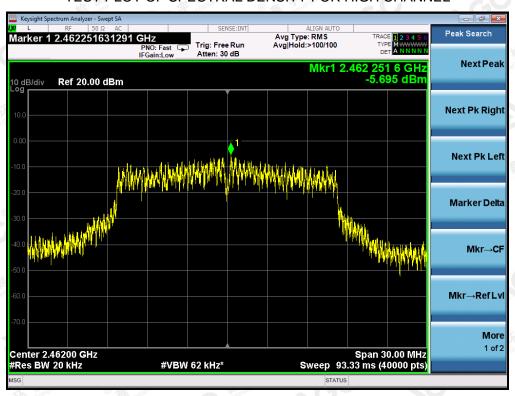


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a transfer



# 802.11n 20 TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

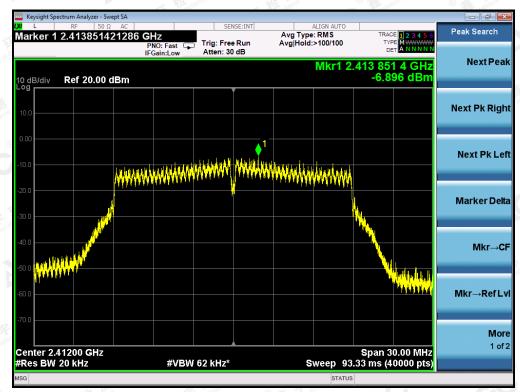


#### TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

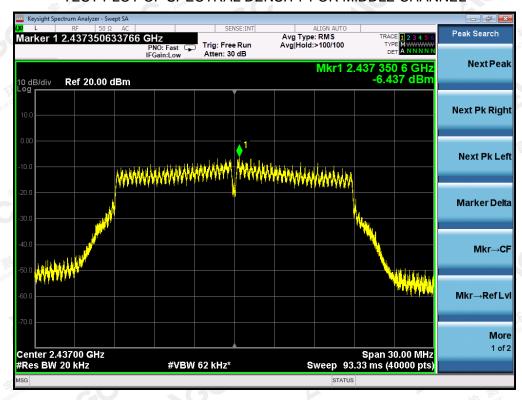





## TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

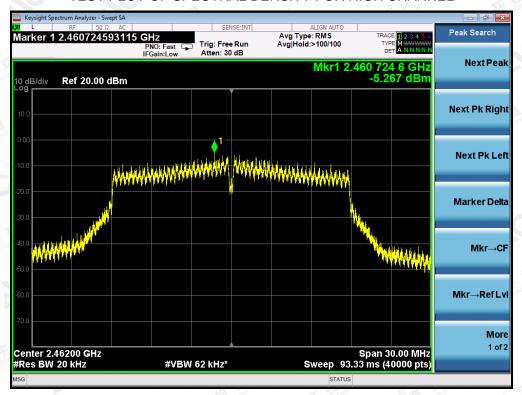

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 43 of 69

## 11. RADIATED EMISSION


#### 11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




#### 11.2. TEST SETUP


## Radiated Emission Test-Setup Frequency Below 30MHz

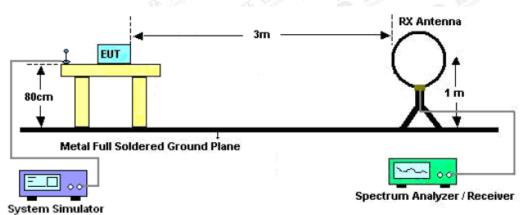

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

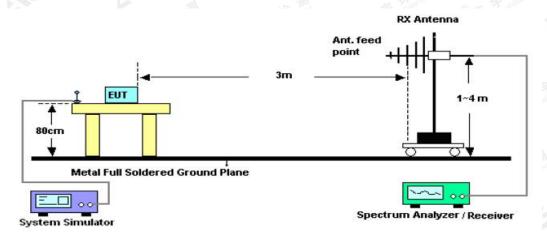

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

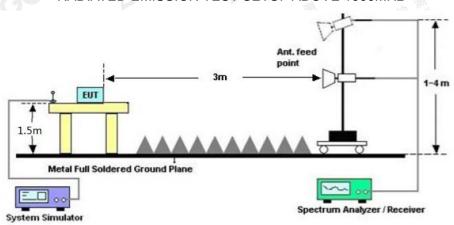



Page 45 of 69

# 11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

· /		
Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	The state of the s
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

## 11.4. TEST RESULT

#### **RADIATED EMISSION BELOW 30MHZ**


No emission found between lowest internal used/generated frequencies to 30MHz.



Page 46 of 69

# **RADIATED EMISSION BELOW 1GHZ**

EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

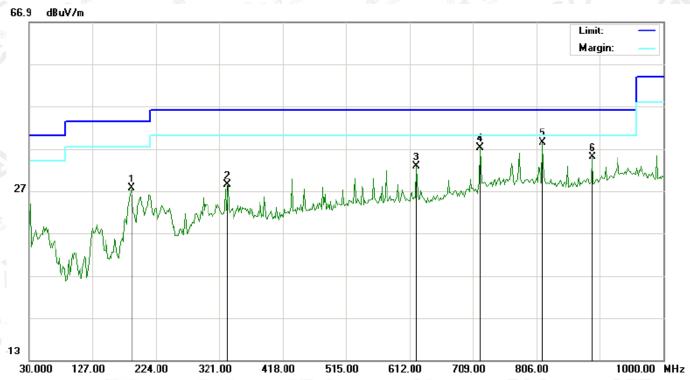


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment						
	-	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			dB	dB				cm	degree	
1		186.8165	16.13	11.39	27.52	43.50	-15.98	peak									
2		333.9331	10.71	17.67	28.38	46.00	-17.62	peak									
3		623.3165	9.09	23.79	32.88	46.00	-13.12	peak									
4		720.3165	11.40	25.79	37.19	46.00	-8.81	peak									
5	*	815.7000	11.16	27.32	38.48	46.00	-7.52	peak									
6		891.6833	6.52	28.39	34.91	46.00	-11.09	peak									

**RESULT: PASS** 

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

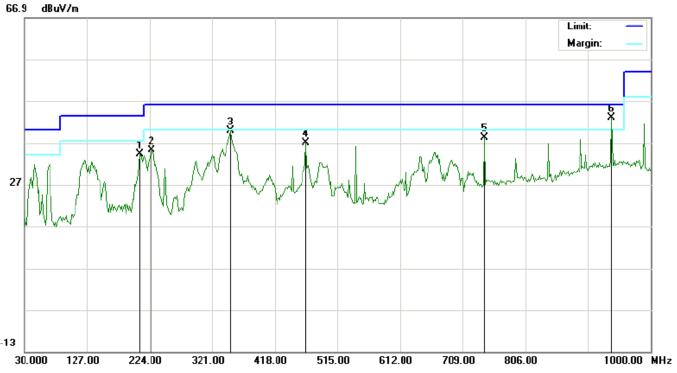

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		209.4499	24.20	9.93	34.13	43.50	-9.37	peak			
2		227.2333	23.53	11.67	35.20	46.00	-10.80	peak			
3		350.1000	20.98	18.74	39.72	46.00	-6.28	peak			
4		466.5000	16.17	20.77	36.94	46.00	-9.06	peak			
5		742.9500	11.77	26.43	38.20	46.00	-7.80	peak			
6	*	940.1833	13.25	29.73	42.98	46.00	-3.02	peak			

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Page 48 of 69

## **RADIATED EMISSION ABOVE 1GHZ**

EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.115	42.69	3.72	46.41	74	-27.59	peak
4824.089	₫ 38.75	3.72	42.47	54	-11.53	AVG
7236.039	41.84	8.15	49.99	74	-24.01	peak
7236.041	37.26	8.15	45.41	54	-8.59	AVG
Altestano	B Testalion -	Allesto				lim
					LE FILL	KEL Junco
emark:			LITT:	荻	Complian	E Modal Com
actor = Ante	enna Factor + C	able Loss –	Pre-amplifier.	(8) The state of Glow	(E) #35 STORE	iono
	639	11/2	24 III 4 COV	THE SECOND STATE OF THE SE	110	

the most	(S) Sign of the state of the st		
EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.047	44.06	3.72	47.78	74	-26.22	peak
4824.058	38.14	3.72	41.86	54	-12.14	AVG
7236.063	42.06	8.15	50.21	74	-23.79	peak
7236.042	36.11	8.15	44.26	54	-9.74	AVG
3 Janes	For Global ®	A silon of Gio	Allesto			
Cou.,	lestatu.	Alle				
Remark:				1111	2632	ouce s
actor = Anto	enna Factor + C	Cable Loss –	Pre-amplifier.	The Compilance	Thomas Comp.	Altesti
		-11111	. Pa 17 o	1000	0 - 3 40	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Report No.: AGC01110180556FE05 Page 49 of 69

Comp.,	SV-PRIMAELITE64
	55.40/

	EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
4	Temperature	25°C	Relative Humidity	55.4%
not	Pressure	960hPa	Test Voltage	Normal Voltage
7	Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Horizontal

Meter Reading (dBµV)	Factor (dB)	Emission Level	Limits	Margin	
(dBµV)	(dB)				
	(GD)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
45.21	3.75	48.96	74	-25.04	peak
39.57	3.75	43.32	54	-10.68	AVG
40.15	8.16	48.31	74	-25.69	peak
36.99	8.16	45.15	54	-8.85	AVG
The station of the st	Allesta				lim
					Will There
		litt:	私	Complian	3 Nobal Conn
na Factor + Ca	ble Loss – I	Pre-amplifier.	® # Jon of Glow	® State state	ond
	39.57 40.15 36.99	39.57 3.75 40.15 8.16 36.99 8.16	39.57 3.75 43.32 40.15 8.16 48.31	39.57     3.75     43.32     54       40.15     8.16     48.31     74       36.99     8.16     45.15     54	39.57     3.75     43.32     54     -10.68       40.15     8.16     48.31     74     -25.69       36.99     8.16     45.15     54     -8.85

EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Vertical

U 2354 1011						
Frequency	Meter Reading	Factor	<b>Emission Level</b>	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.061	46.26	3.75	50.01 🔬	74	-23.99	peak
4874.056	42.61	3.75	46.36	54	-7.64	AVG
7311.119	40.88	8.16	49.04	74	-24.96	peak
7311.119	35.66	8.16	43.82	54	-10.18	AVG
				The Manager of the Control of the Co	The dome	(C) ###
emark:		- <u>III</u> I	Age June	Global C	8 The sign of Given	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Page 50 of 69

3/1 //0"			line little
EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Horizontal

Illian	- all	20.	21 100	55	102	
Frequency	Meter Reading	Factor	<b>Emission Level</b>	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.050	45.91	3.81	49.72	74	-24.28	peak
4924.048	42.57	3.81	46.38	54	-7.62	AVG
7386.113	44.23	8.19	52.42	74	-21.58	peak
7386.059	38.63	8.19	46.82	54	-7.18	AVG
小小	Company The Wall	2 3	N Collin	station	Attes	
	® # Jion of Glob					
Remark:	Alles				line	III)
actor = Ante	enna Factor + Ca	ble Loss – F	Pre-amplifier.	1	KI pliance	EK Compilan

EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
43.96	3.81	47.77	74	-26.23	peak
40.24	3.81	44.05	54	-9.95	AVG
42.01	8.19	50.2	74	-23.8	peak
34.52	8.19	42.71	54	-11.29	AVG
Tompliance	T FV " Compile	® # Jon of Glov	® ###	onoi	
Global ®		Alleste			
a G					
na Factor + Ca	able Loss	Pre-amplifier	lin:		- Alini
1	34.52	34.52 8.19	34.52 8.19 42.71	34.52 8.19 42.71 54	

# **RESULT: PASS**

#### Note:

Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report. Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Page 51 of 69

## 12. BAND EDGE EMISSION

### 12.1. MEASUREMENT PROCEDURE

Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

#### 12.2. TEST SET-UP

same as 11.2

#### Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB( $\mu$ V) to represent the Amplitude. Use the F dB( $\mu$ V/m) to represent the Field Strength. So A=F.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



## 12.3. TEST RESULT

EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

PK



AV



### **RESULT: PASS**





11 NO			
EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical



## AV



**RESULT: PASS** 



- 11 NO			
EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal



## ΑV



**RESULT: PASS** 



3/3 10			l al
EUT	BODY-WORN CAMERA	Model Name SV-PRIMAELITE	
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical



## AV



**RESULT: PASS** 



ZV. 700			
EUT	BODY-WORN CAMERA	Model Name SV-PRIMAELITE	
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Horizontal



## AV



**RESULT: PASS** 



EUT	BODY-WORN CAMERA	Model Name SV-PRIMAELITE	
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Vertical



## AV



**RESULT: PASS** 





EUT	BODY-WORN CAMERA	Model Name SV-PRIMAELITE	
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Horizontal



## ΑV



**RESULT: PASS** 



7/ 10°			A second
EUT	BODY-WORN CAMERA	Model Name SV-PRIMAELITE	
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Vertical



## ΑV



**RESULT: PASS** 





EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Horizontal



## ΑV



**RESULT: PASS** 



			line little
EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Vertical



## ΑV



**RESULT: PASS** 





EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Horizontal



## AV



**RESULT: PASS** 



EUT	BODY-WORN CAMERA	Model Name	SV-PRIMAELITE64
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Vertical



## AV



**RESULT: PASS** 



# 13. FCC LINE CONDUCTED EMISSION TEST


## 13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage			
Frequency	Q.P.( dBuV)	Average( dBuV)		
150kHz-500kHz	66-56	56-46		
500kHz-5MHz	56	46		
5MHz-30MHz	60	50		

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

## 13.2. BLOCK DIAGRAM OF TEST SETUP

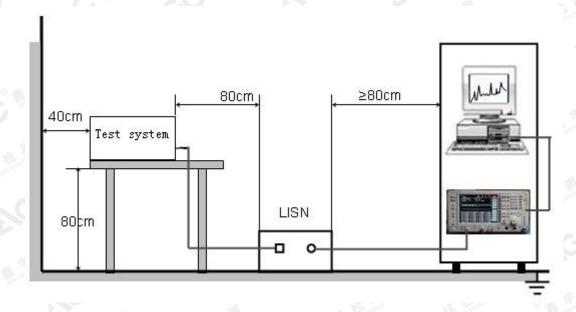



Report No.: AGC01110180556FE05 Page 65 of 69

#### 13.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST


- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.10.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- (4) The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



## 13.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

## LINE CONDUCTED EMISSION TEST-L1

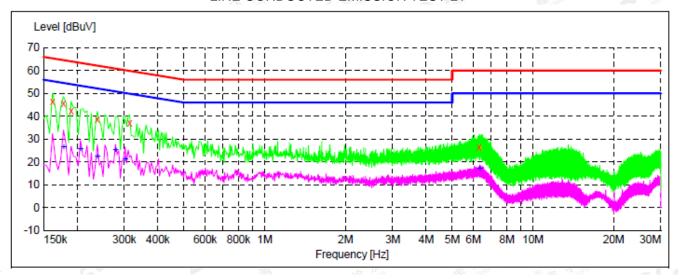

#### MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.162000	46.60	11.4	65	18.8	QP	L1	FLO
0.178000	45.50	11.4	65	19.1	QP	L1	FLO
0.190000	42.30	11.4	64	21.7	QP	L1	FLO
0.238000	38.80	11.3	62	23.4	QP	L1	FLO
0.314000	37.20	11.3	60	22.7	QP	L1	FLO
6.310000	26.30	11.3	60	33.7	QP	L1	FLO


#### MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.178000	26.30	11.4	55	28.3	ΔV	L1	FLO
0.206000	25.50	11.4	53	27.9		L1	FLO
0.206000	23.30	11.7	55	21.5	AV	шт	PLIO
0.238000	22.20	11.3	52	30.0	AV	L1	FLO
0.278000	25.20	11.3	51	25.7	AV	L1	FLO
0.302000	21.10	11.3	50	29.1	AV	L1	FLO
6.338000	17.10	11.2	50	32.9	AV	L1	FLO

RESULT: PASS



## LINE CONDUCTED EMISSION TEST-N

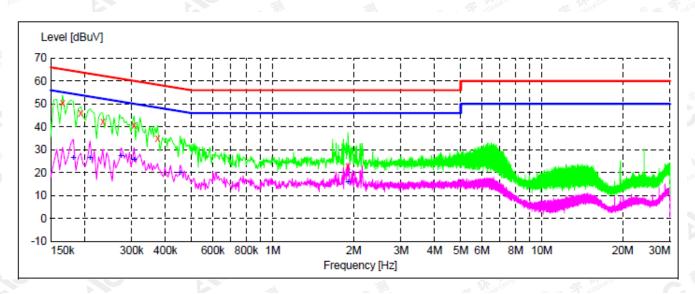

#### MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.166000	50.70	11.4	65	14.5	QP	N	FLO
0.194000	46.10	11.4	64	17.8	QP	N	FLO
0.234000	42.20	11.3	62	20.1	QP	N	FLO
0.306000	40.60	11.3	60	19.5	QP	N	FLO
0.374000	35.00	11.3	58	23.4	QP	N	FLO
1.906000	22.80	11.3	56	33.2	QP	N	FLO

#### MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	e PE
0.182000	26.60	11.4	54	27.8	AV	N	FLO
0.210000	26.30	11.4	53	26.9	AV	N	FLO
0.274000	27.20	11.3	51	23.8	AV	N	FLO
0.306000	25.60	11.3	50	24.5	AV	N	FLO
0.454000	19.90	11.4	47	26.9	AV	N	FLO
1.906000	15.70	11.3	46	30.3	AV	N	FLO


**RESULT: PASS** 

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.



## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

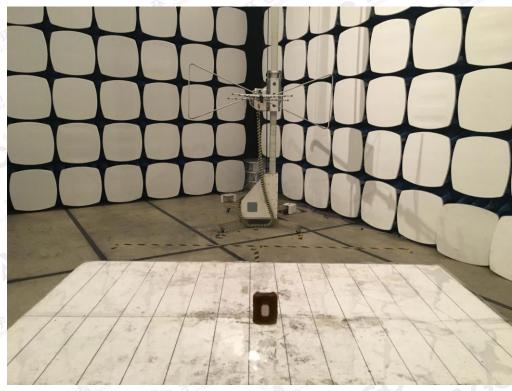

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ



The results spowd this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gent.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China





## FCC CONDUCTED EMISSION TEST SETUP



----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CE), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China