

# TEST REPORT



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (1) / (49) Pages

## 1. Client

- Name : OLIVE AND DOVE CO.,LTD.
- Address : 22, Wiryeseoil-ro, Sujeong-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
- Date of Receipt : 2022-02-22

## 2. Manufacturer

- Name : OLIVE AND DOVE CO.,LTD.
- Address : 22, Wiryeseoil-ro, Sujeong-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

**3. Use of Report :** For FCC Conformance

**4. Test Sample / Model:** DoorCam 3 / DC3U-2201



**5. Date of Test :** 2022-03-04 to 2022-03-14

**6. Test Standard(method) used :** FCC 47 CFR part 15 subpart C 15.247

**7. Testing Environment:** Temp.: (24 ± 1) °C, Humidity: (48 ± 3) % R.H.

**8. Test Results :** Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by  Ji-Hye, Kim: (Signature)	Technical Manager  Won-Jae, Hwang: (Signature)
-------------	--	---

2022-03-14

Republic of KOREA **CTK Co., Ltd.**



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (2) / (49) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2022-03-14	Issued (CTK-2022-00723)	all

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (3) / (49) Pages

## **CONTENTS**

1. General Product Description .....	4
1.1 Client Information .....	4
1.2 Product Information.....	4
1.3 Peripheral Devices .....	4
2. Facility and Accreditations.....	5
2.1 Test Facility.....	5
2.2 Laboratory Accreditations and Listings .....	5
2.3 Calibration Details of Equipment Used for Measurement .....	5
3. Test Specifications .....	6
3.1 Standards.....	6
3.2 Mode of operation during the test.....	7
3.3 Device Modifications .....	7
3.4 Maximum Measurement Uncertainty .....	7
3.5 Test Software.....	8
4. Technical Characteristic Test.....	9
4.1 6dB Bandwidth.....	9
4.2 OUTPUT POWER .....	13
4.3 Transmitter Power Spectral Density.....	17
4.4 Conducted Spurious emission .....	21
4.5 Radiated Emission .....	26
4.6 AC Conducted Emissions .....	46
APPENDIX A – Test Equipment Used For Tests .....	49



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (4) / (49) Pages

## 1. General Product Description

### 1.1 Client Information

<b>Company</b>	OLIVE AND DOVE CO.,LTD.
<b>Contact Point</b>	22, Wiryeseoil-ro, Sujeong-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
<b>Contact Person</b>	Name : Jang Ik Jae E-mail : ijjang@olivendove.com Tel : +82-31-715-0717 Fax : -

### 1.2 Product Information

<b>FCC ID</b>	2ANMR-DC3U-2201
<b>Product Description</b>	DoorCam 3
<b>Model name</b>	DC3U-2201
<b>Variant Model name</b>	-
<b>Operating Frequency</b>	2 412 MHz – 2 462 MHz (20MHz_BW) 2 422 MHz – 2 452 MHz (40MHz_BW)
<b>RF Output Power</b>	802.11b : 14.75 dBm (29.85 mW) 802.11g : 15.78 dBm (37.84 mW) 802.11n_HT20 : 15.50 dBm (35.48 mW) 802.11n_HT40 : 13.37 dBm (21.73 mW)
<b>Antenna Specification</b>	Antenna type : Dipole Antenna Peak Gain : 2.84 dBi
<b>Number of channels</b>	11 (802.11b/g/n_HT20) 7 (802.11n_HT40)
<b>Type of Modulation</b>	802.11b : DSSS 802.11g/n : OFDM
<b>Data Rate</b>	802.11b : 11 / 5.5 / 2 / 1 Mbps 802.11g : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n: up to 150 Mbps
<b>Power Source</b>	DC 4.5 V(Alkaline battery), DC 5 V(USB)
<b>Hardware Rev</b>	1.00.00
<b>Software Rev</b>	1.00.00
<b>RF Power setting in Test SW</b>	802.11b : 21(Hex Value) 802.11g : 21(Hex Value) 802.11n_HT20 : 21(Hex Value) 802.11n_HT40 : 1D(Hex Value)

### 1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253QPR
AC/DC Adapter	HP	HSTNN-LA40	-
AC/DC Adapter	HAEM VINA CO., Ltd.	HM-1005EMT	DW1KB03JE/B-E



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (5) / (49) Pages

## 2. Facility and Accreditations

### 2.1 Test Facility

The radiated measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea.

The conducted measurement facility is located at 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea.

### 2.2 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A-2
KOREA	NRRA	KR0025

### 2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (6) / (49) Pages

### 3. Test Specifications

#### 3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(b)	Maximum Output Power	C	
15.247(d)	Conducted Spurious emission	C	
15.247(d)	Unwanted Emission(Conducted)	C	
15.247(e)	Transmitter Power Spectral Density	C	
15.209	Radiated Emissions	C	Radiated
15.207	AC Conducted Emissions	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.			
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247			
<i>Note 4:</i> The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013			



### 3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit.

All modulation modes were tests. The results are only attached worst cases. This EUT is supported the DC 4.5 V(Alkaline battery) and DC 5 V(USB). We have done all test mode. Worst case is DC 4.5 V. Therefore, it shows the worst data of DC 4.5V. (Only AC conduction test is DC 5V data.)

#### Test Frequency & Bandwidth

Bandwidth	Lowest channel	Middle channel	Highest channel
20 MHz	2 412 MHz	2 437 MHz	2 462 MHz
40 MHz	2 422 MHz	2 437 MHz	2 452 MHz

#### Test mode & Worst case

Test mode	Modulation	Data rate (Worst case)	Duty Cycle	Duty Cycle Factor
802.11b	DSSS	1 Mbps	78.9 %	1.03 dB
802.11g	OFDM	6 Mbps	93.8 %	0.28 dB
802.11n_HT20	OFDM	MCS 0	86.7 %	0.62 dB
802.11n_HT40	OFDM	MCS 0	69.3 %	1.59 dB

### 3.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable

### 3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter. Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L.: Approx. 95 %, $k = 2$ )
Power Spectral Density	1.5 dB (C.L.: Approx. 95 %, $k = 2$ )
Occupied Bandwidth	0.1 MHz (C.L.: Approx. 95 %, $k = 2$ )
Unwanted Emission(conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f \leq 1$ GHz)	4.66 dB (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f > 1$ GHz)	4.76 dB (C.L.: Approx. 95 %, $k = 2$ )
Line Conducted Emission	1.96 dB (C.L.: Approx. 95 %, $k = 2$ )



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (8) / (49) Pages

### 3.5 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	TOYO EMI software EP5RE Ver. 6.0.1.0
Line Conducted Test	ESCI7, ESCI3 : EMC32 Ver. 8.50.0 ESR7 : EMC32 Ver. 8.53.0





**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (9) / (49) Pages

## 4. Technical Characteristic Test

### 4.1 6dB Bandwidth

#### Test Procedures

KDB 558074 - Section 8.2  
ANSI C63.10-2013 - Section 11.8.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Test Procedures

ANSI C63.10-2013 - Section 6.9

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

#### Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Trace mode = Max hold
- e) Sweep = auto couple
- f) Allow trace to fully stabilize
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### **Minimum Standard :**

---

6 dB Bandwidth > 500kHz

---



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501




Report No.:  
 CTK-2022-00723  
 Page (10) / (49) Pages

**Test Data :**




Mode	6 dB Bandwidth and 99 % Bandwidth (MHz)					
	802.11b		802.11g		802.11n_HT20	
Frequency	6 dB	99 %	6 dB	99 %	6 dB	99 %
2 412 MHz	9.13	14.28	15.15	16.34	15.15	17.50
2 437 MHz	9.13	14.35	15.17	16.34	15.15	17.51
2 462 MHz	9.11	14.21	15.15	16.31	15.15	17.49

Mode	6 dB Bandwidth and 99 % Bandwidth (MHz)	
	802.11n_HT40	
Frequency	6 dB	99 %
2 422 MHz	35.10	35.63
2 437 MHz	35.14	35.76
2 452 MHz	35.14	35.76




See next pages for actual measured spectrum plots.

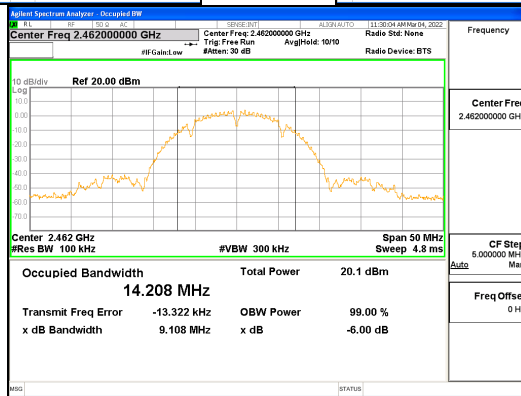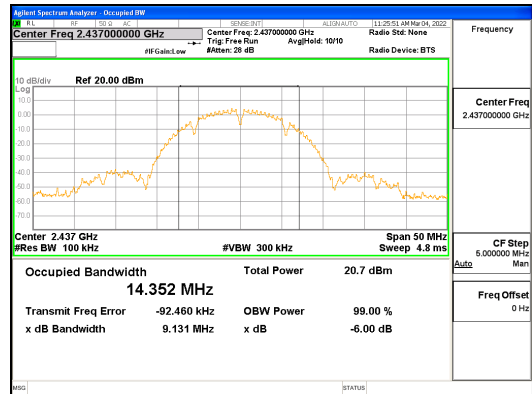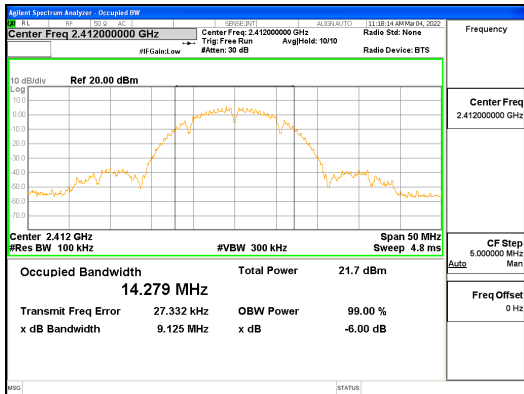




**802.11b**

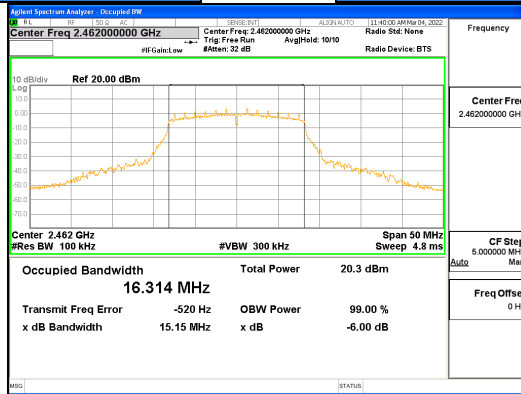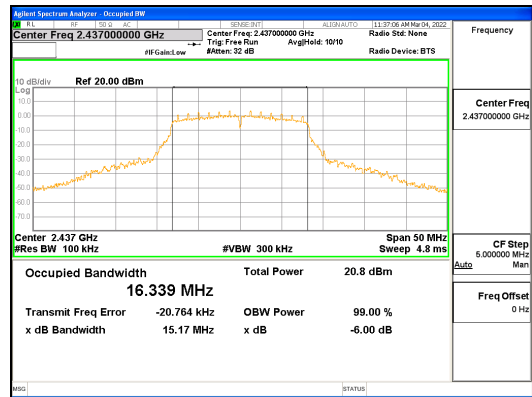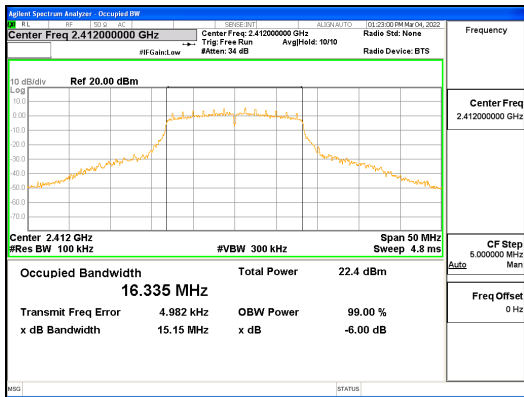

**802.11g**

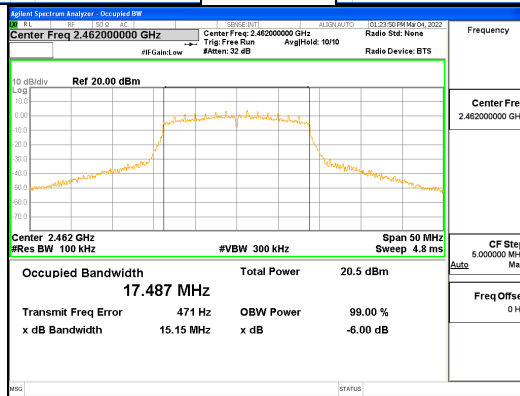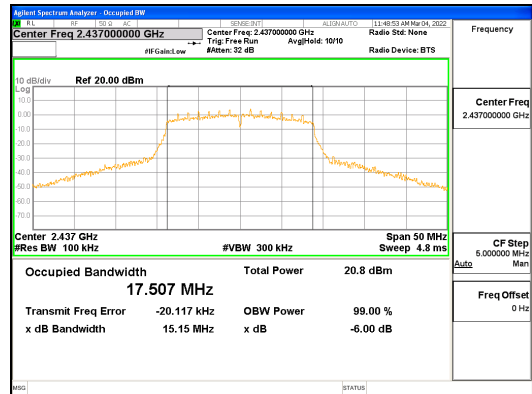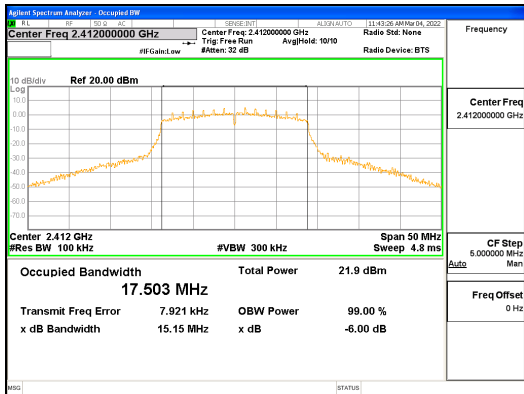

**802.11n\_HT20**

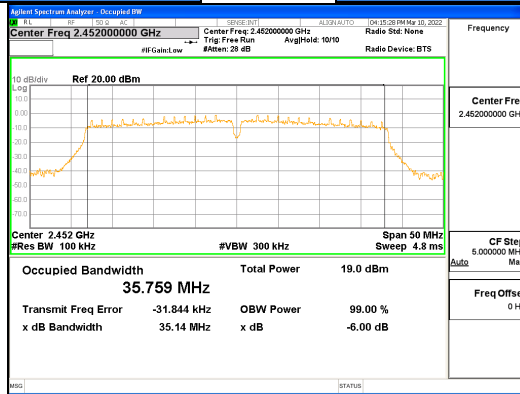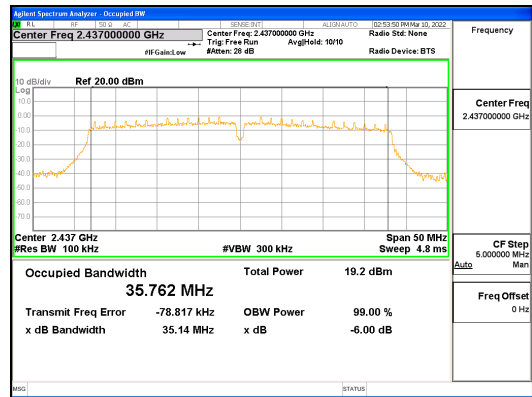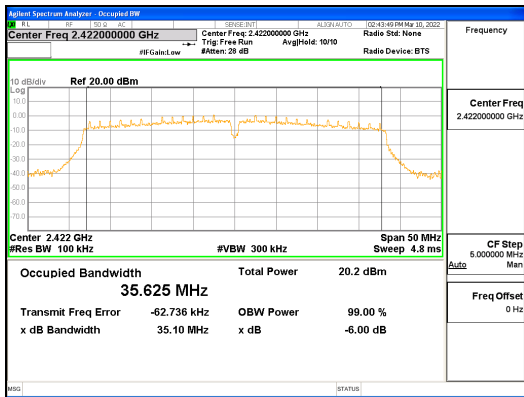


**802.11n\_HT40**

## 4.2 OUTPUT POWER

### Test Procedures

KDB 558074 - Section 8.3.2.2 (Average Power)  
ANSI C63.10-2013 - Section 11.9.2.2

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

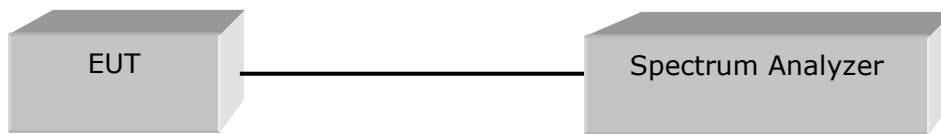

### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) span  $\geq 1.5 \times \text{OBW}$
- b) RBW = 1 MHz
- c) VBW  $\geq 3 \times \text{RBW}$
- d) Sweep time = auto
- e) Detector = RMS
- f) average at least 100
- g) Duty cycle factor =  $10\log(1/x)$

Test mode	Duty Cycle Factor (dB)
802.11b	1.03
802.11g	0.28
802.11n_HT20	0.62
802.11n_HT40	1.59

### Limit

Operating Mode	Mode	ANT Gain (dBi)	Limit (dBm)
SISO	802.11b/g/n	2.84	30



**Test Data :**




Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11b	2 412	13.72	1.03	14.75	30.00	15.25
	2 437	13.02	1.03	14.05	30.00	15.95
	2 462	12.24	1.03	13.27	30.00	16.73
802.11g	2 412	15.50	0.28	15.78	30.00	14.22
	2 437	13.85	0.28	14.13	30.00	15.87
	2 462	13.52	0.28	13.80	30.00	16.20
802.11n _HT20	2 412	14.88	0.62	15.50	30.00	14.50
	2 437	13.79	0.62	14.41	30.00	15.59
	2 462	13.58	0.62	14.20	30.00	15.80
802.11n _HT40	2 422	11.78	1.59	13.37	30.00	16.63
	2 437	10.84	1.59	12.43	30.00	17.57
	2 452	10.71	1.59	12.30	30.00	17.70

See next pages for actual measured spectrum plots.






**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (15) / (49) Pages

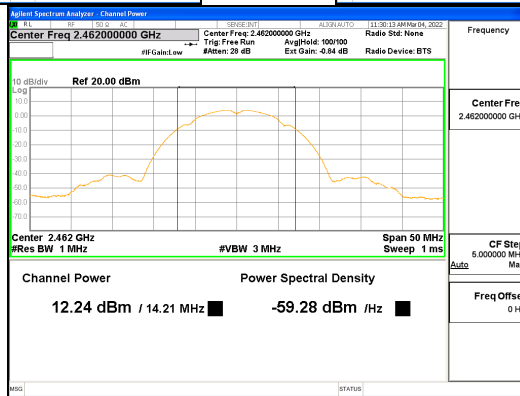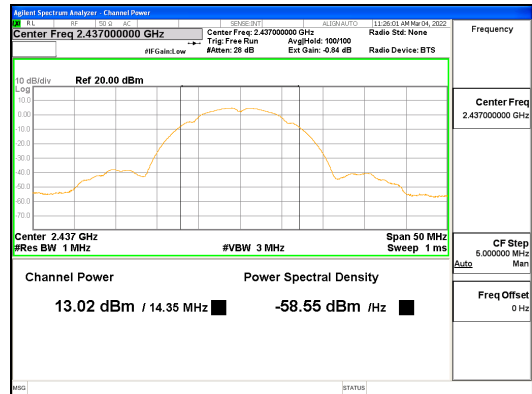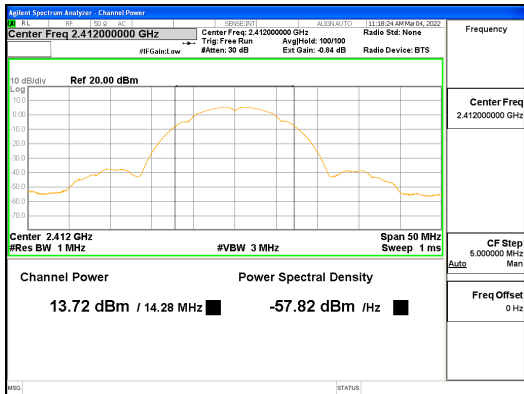

**802.11b**

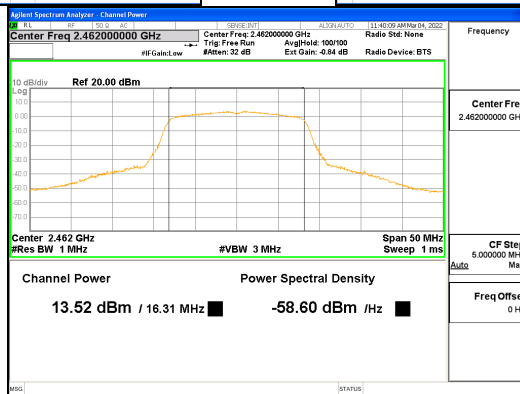
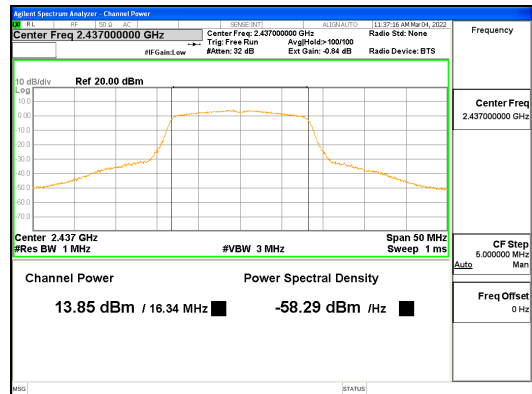
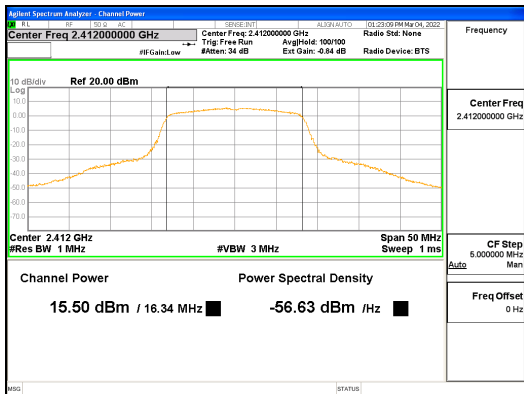


**802.11g**






**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (16) / (49) Pages

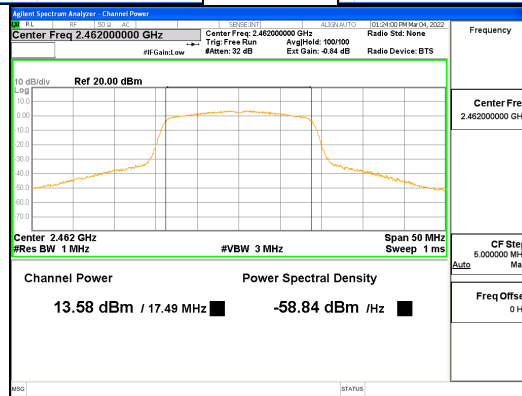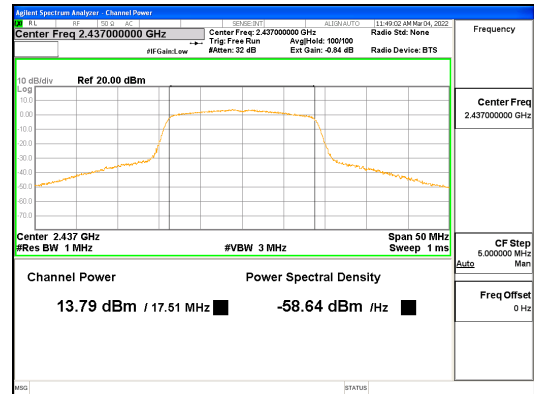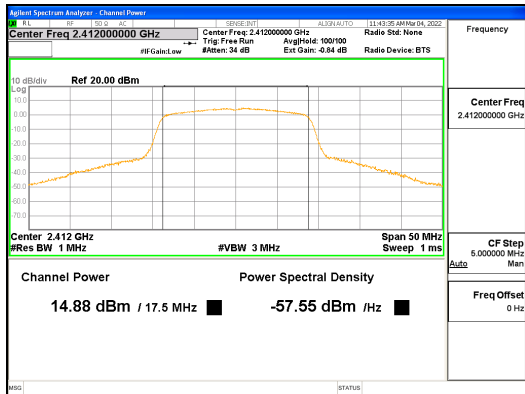

802.11n\_HT20

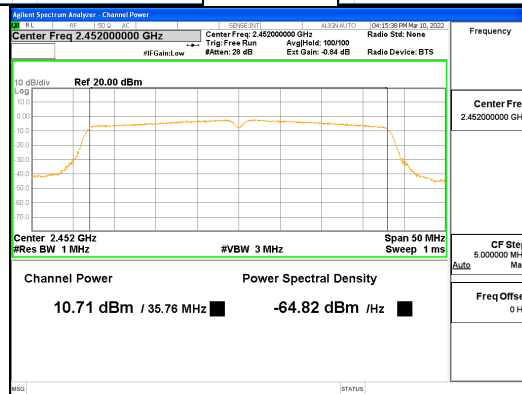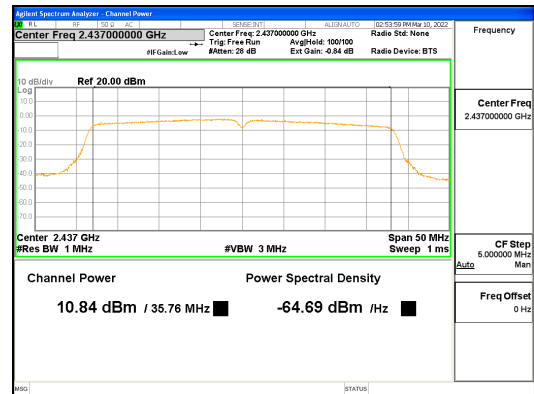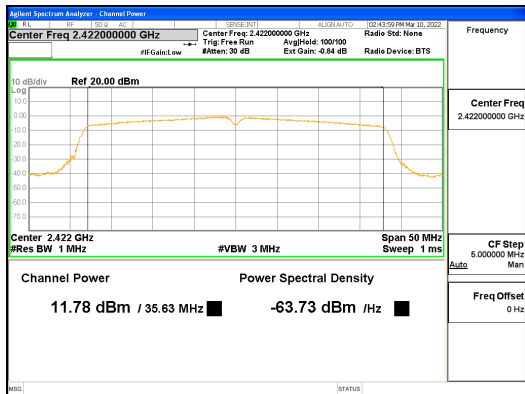

802.11n\_HT40





## 4.3 Transmitter Power Spectral Density

### Test Procedures

KDB 558074 - Section 8.4  
ANSI C63.10-2013 - Section 11.10.2

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a)  $RBW : 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$
- b)  $VBW \geq 3 \times RBW$
- c)  $span \geq 1.5 \times \text{DTS bandwidth}$
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode = max hold
- g) Allow trace to fully stabilize
- h) Use the peak marker function to determine the maximum amplitude level within the RBW.

### Limit

Operating Mode	Mode	ANT Gain (dBi)	Limit (dBm)
SISO	802.11b/g/n	2.84	8



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (18) / (49) Pages

## Test Data




Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Limit (dBm)	Margin(dB)
802.11b	2 412	-7.95	8.00	15.95
	2 437	-9.91	8.00	17.91
	2 462	-10.49	8.00	18.49
802.11g	2 412	-10.61	8.00	18.61
	2 437	-12.35	8.00	20.35
	2 462	-12.12	8.00	20.12
802.11n_HT20	2 412	-10.78	8.00	18.78
	2 437	-12.06	8.00	20.06
	2 462	-11.55	8.00	19.55
802.11n_HT40	2 422	-14.26	8.00	22.26
	2 437	-16.07	8.00	24.07
	2 452	-16.48	8.00	24.48

See next pages for actual measured spectrum plots.






**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (19) / (49) Pages

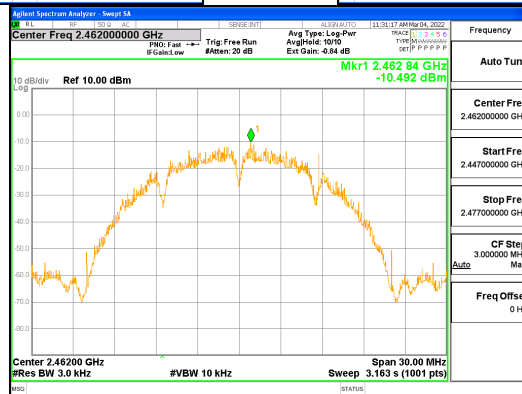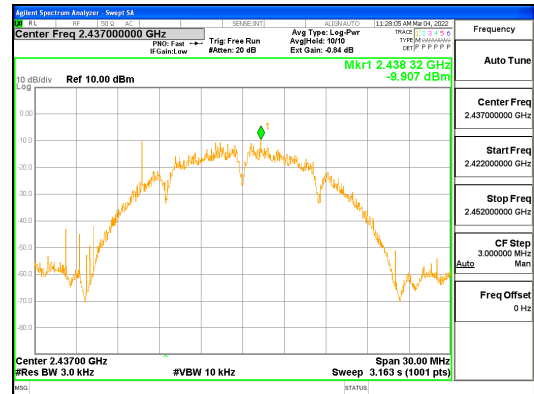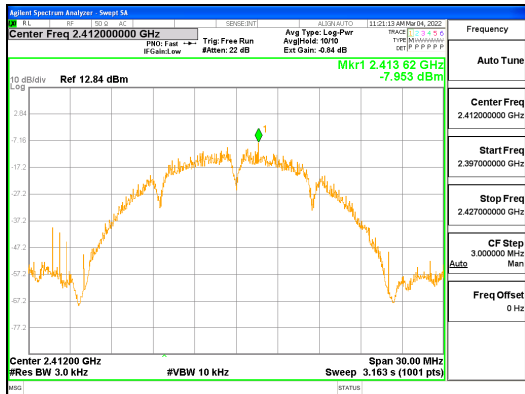

802.11b

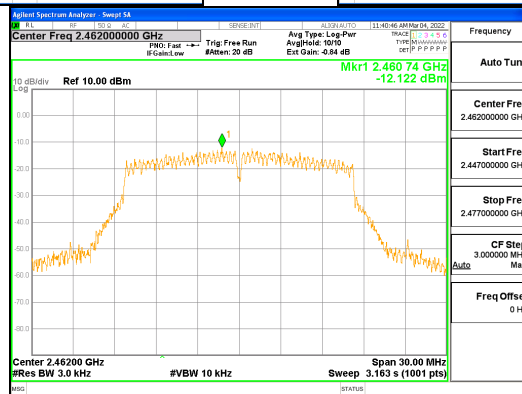
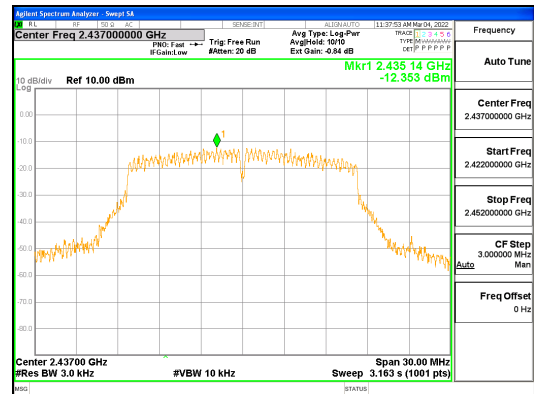
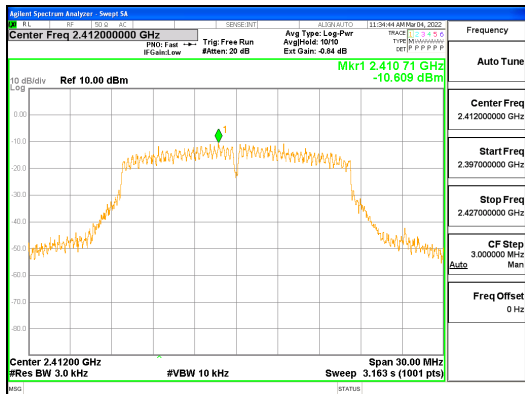


802.11g






**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (20) / (49) Pages

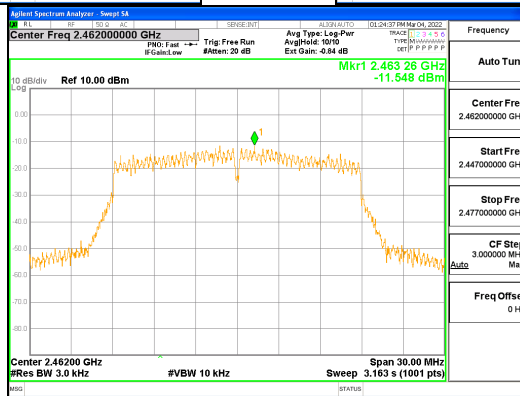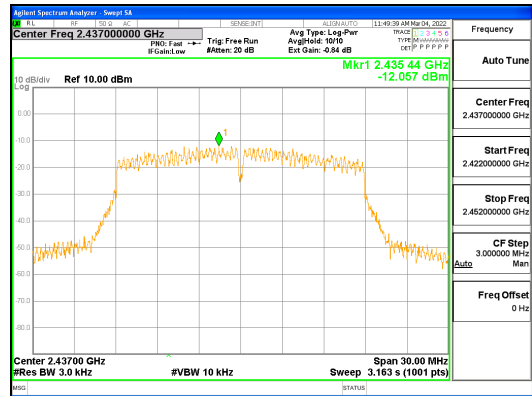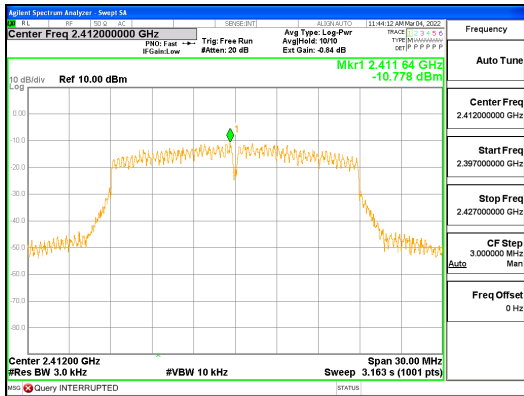

**802.11n\_HT20**

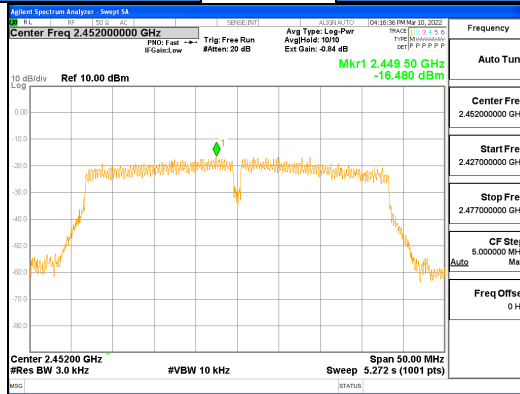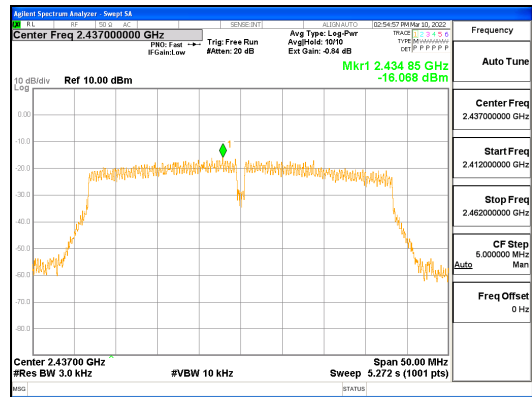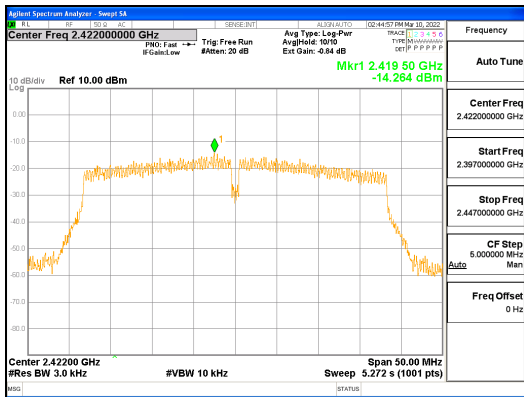

**802.11n\_HT40**



## 4.4 Conducted Spurious emission

### Test Procedures

KDB 558074 - Section 8.5  
ANSI C63.10-2013 - Section 11.11.3

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.  
After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Sweep time = auto couple
- e) Trace mode= max hold
- f) Allow trace to fully stabilize
- g) Use the peak marker function to determine the maximum amplitude level.

### **Limit :**

---

Emission level < 30 dBc

---

### **Test Data: Complies**






- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 30dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (22) / (49) Pages

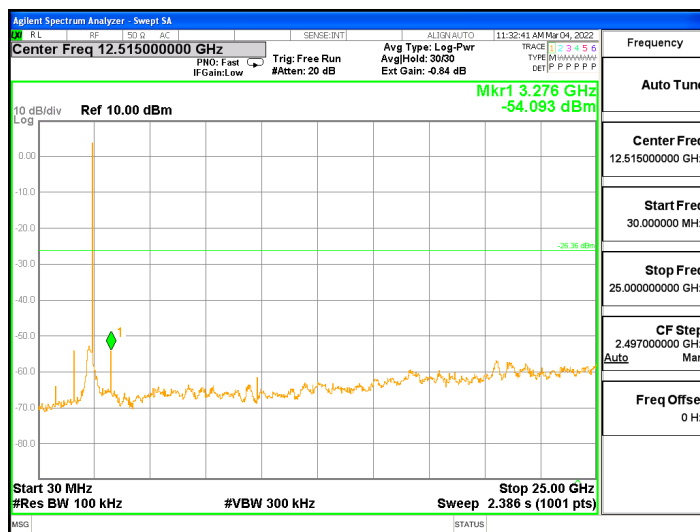
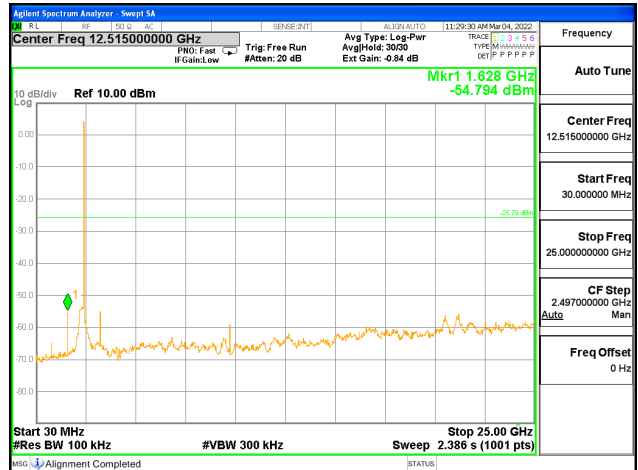
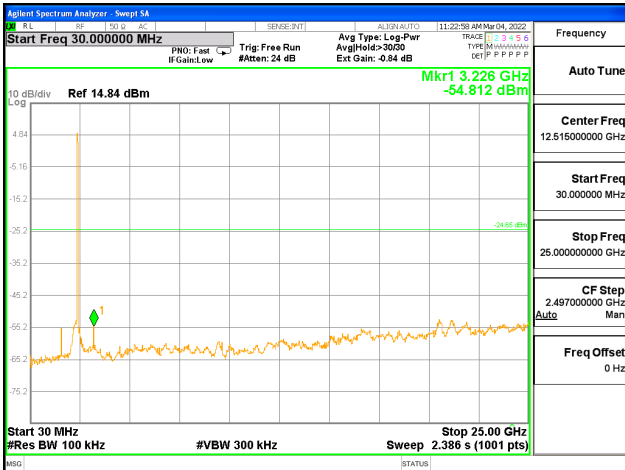
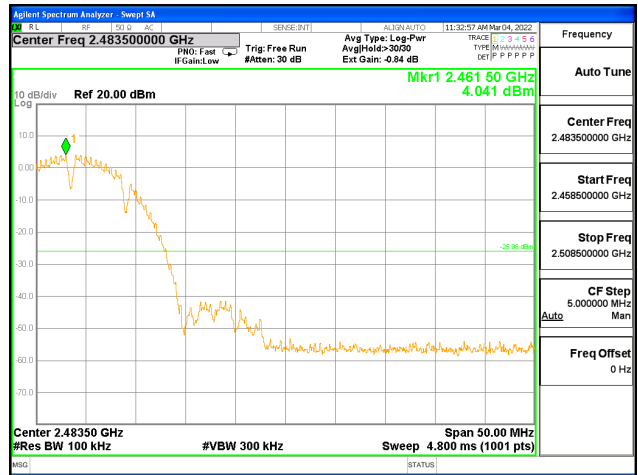
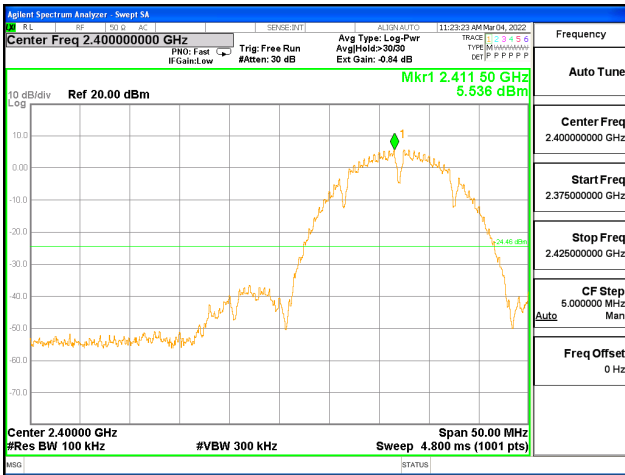


802.11b



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (23) / (49) Pages

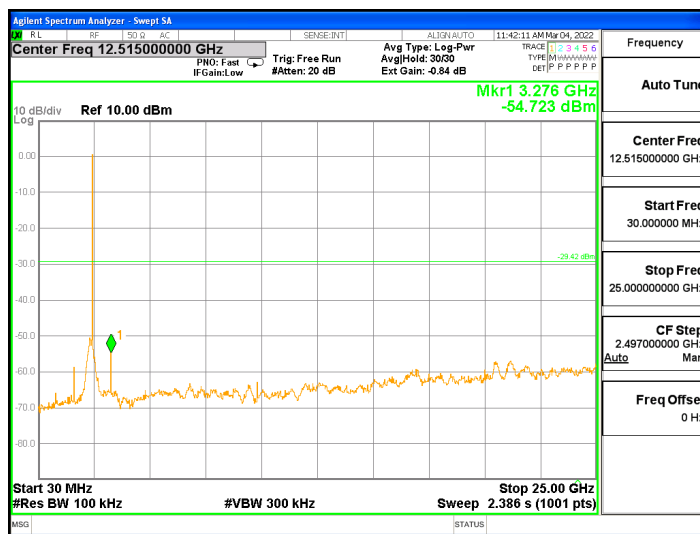
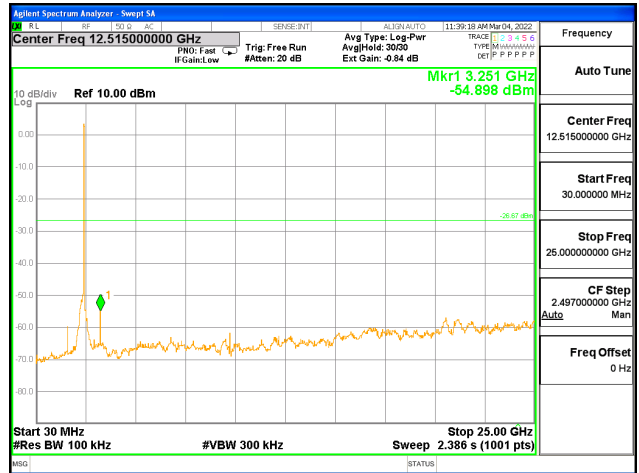
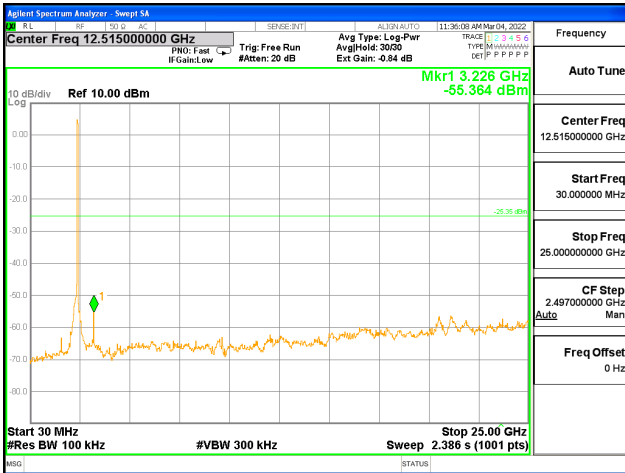
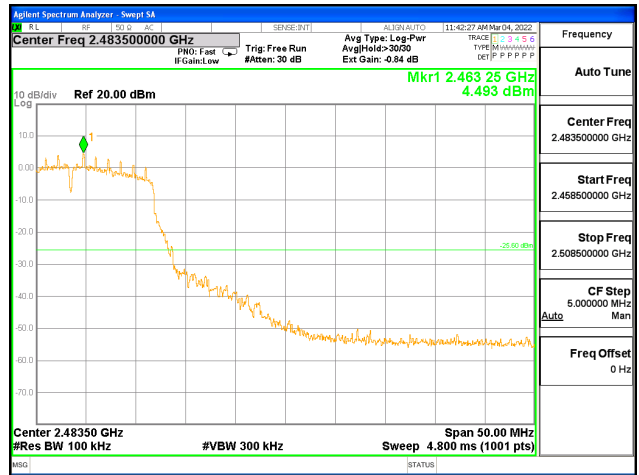
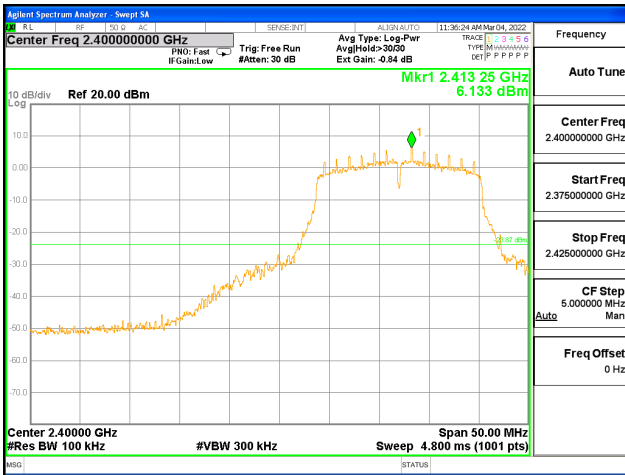


**802.11g**



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (24) / (49) Pages

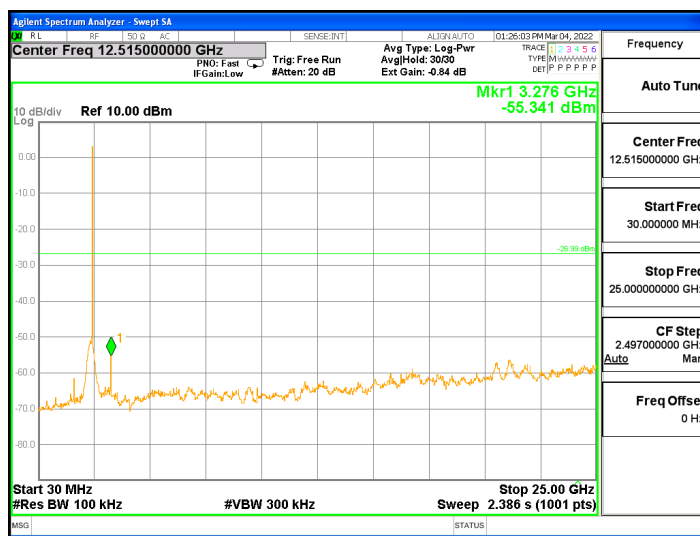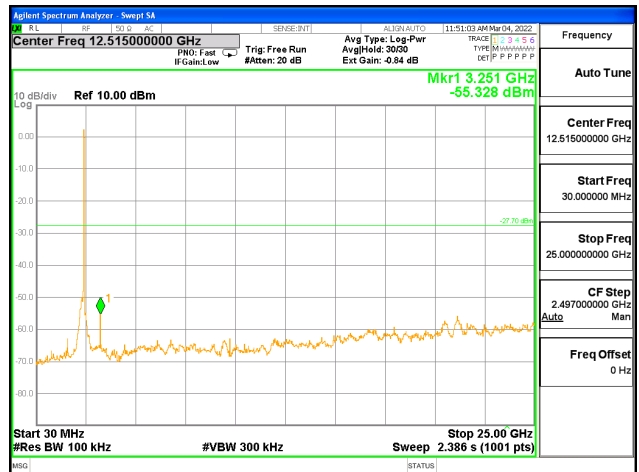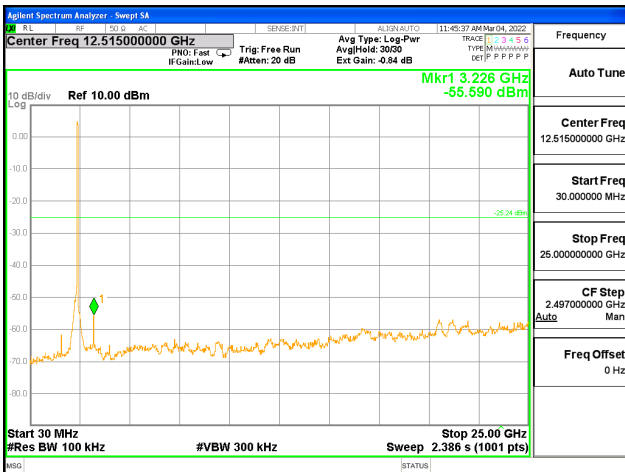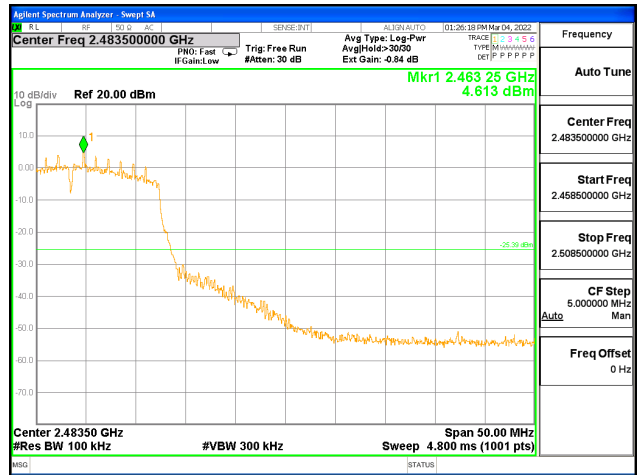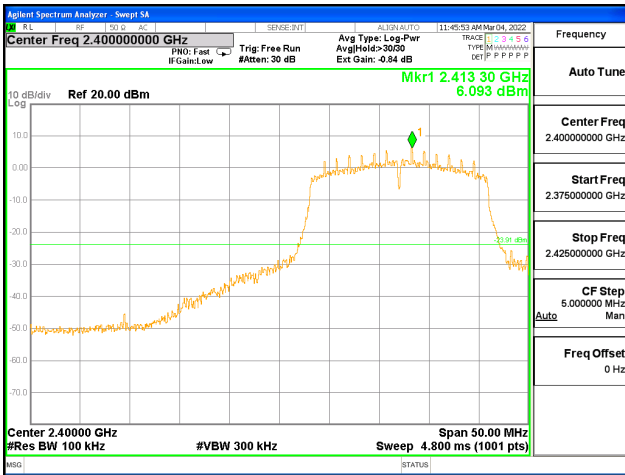






802.11n\_HT20





**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (25) / (49) Pages

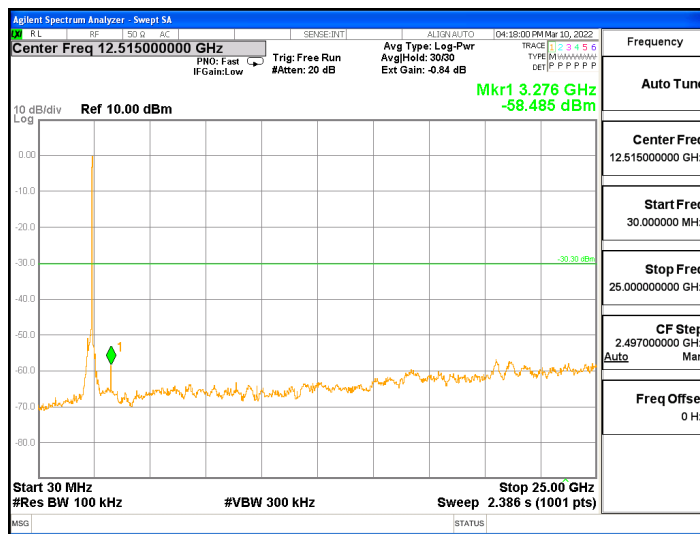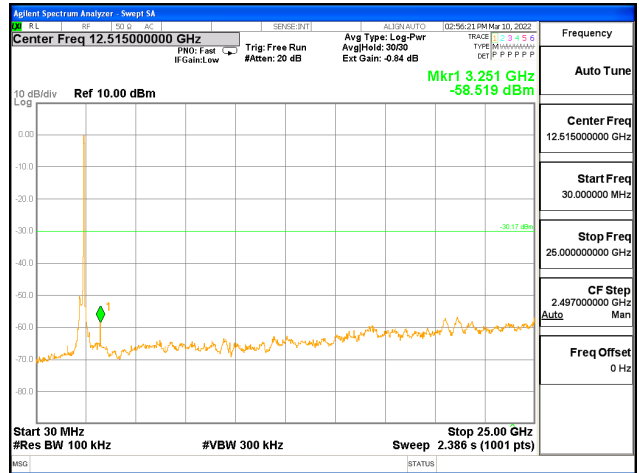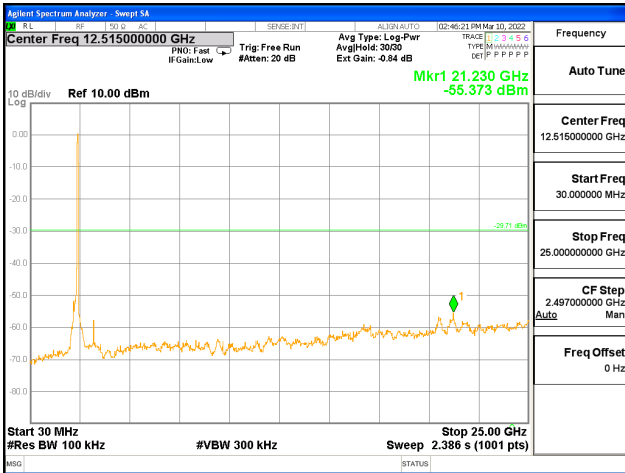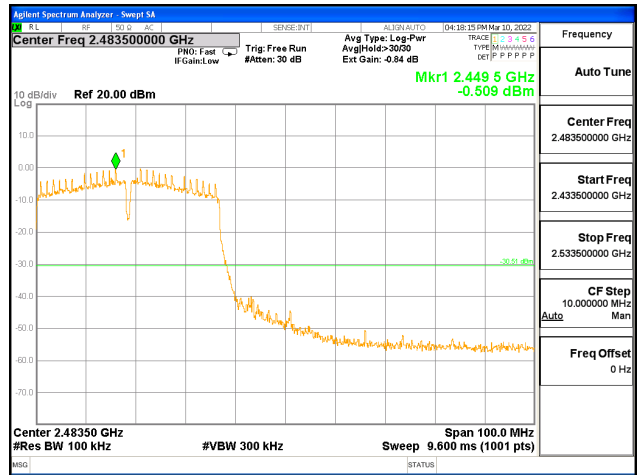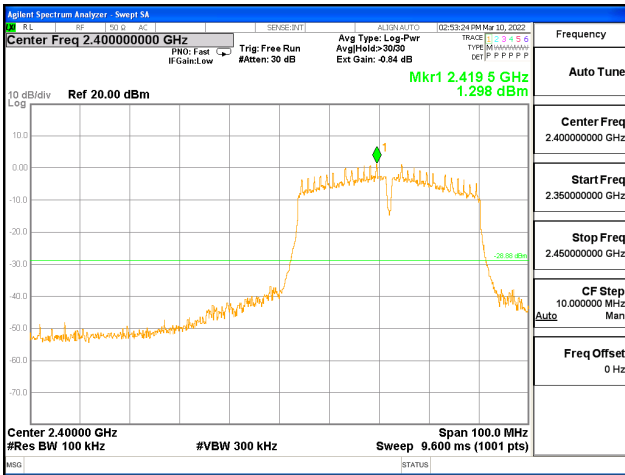

**802.11n\_HT40**

## 4.5 Radiated Emission

### Test Location

- 10 m SAC (test distance :  10 m,  3 m)  
 3 m SAC (test distance : 3 m)

### Test Procedures

KDB 558074 - Section 8.5, 8.6  
ANSI C63.10-2013 - Section 11.11, 11.12

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

### Test Settings:

Frequency Range = 9 kHz ~ 1 GHz

- a) RBW = 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz  
b) VBW  $\geq$  RBW  
c) Detector = CISPR Quasi-peak  
d) Sweep time = auto couple

- Peak

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz  
b) VBW  $\geq 3 \times$  RBW  
c) Detector = Peak  
d) Sweep time = auto  
e) Trace mode = max hold

- Average (duty cycle  $\geq 98\%$ )

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz  
b) VBW  $\geq 3 \times$  RBW  
c) Detector = RMS  
d) Sweep time = auto  
e) Averaging type = power (i.e., RMS)  
f) Trace mode = average (at least 100 traces)



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (27) / (49) Pages

- Average (duty cycle < 98%, duty cycle variations are less than ±2%)

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

a) RBW = 1 MHz

b) VBW ≥ 3 x RBW

c) Detector = RMS

d) Sweep time = auto

e) Averaging type = power (i.e., RMS)

f) Trace mode = average (at least 100 traces)

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

If power averaging (RMS) mode, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.

Test mode	Duty Cycle Factor (dB)
802.11b	1.03
802.11g	0.28
802.11n_HT20	0.62
802.11n_HT40	1.59

**Limit :**

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
<sup>1</sup> 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	<sup>2</sup> Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

**Test Setup:**


- 1) For field strength of emissions from 9 kHz to 30 MHz

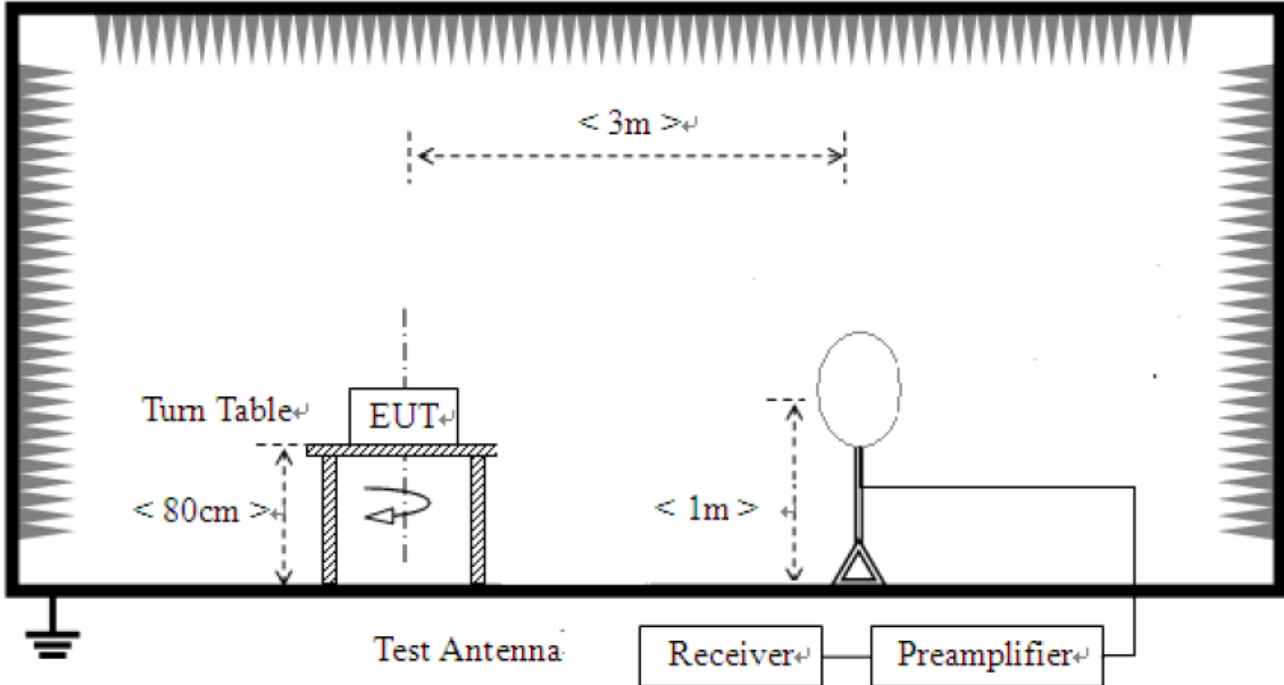

- 2) For field strength of emissions from 30 MHz to 1 GHz

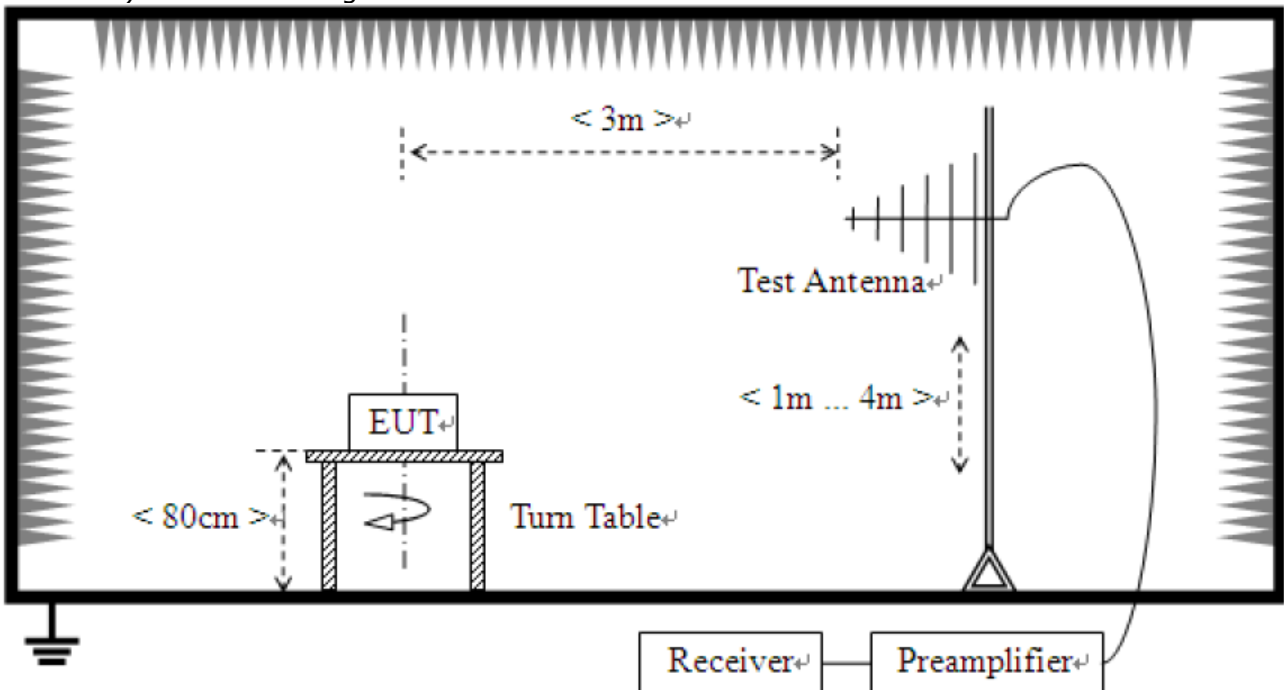

3) For field strength of emissions above 1 GHz

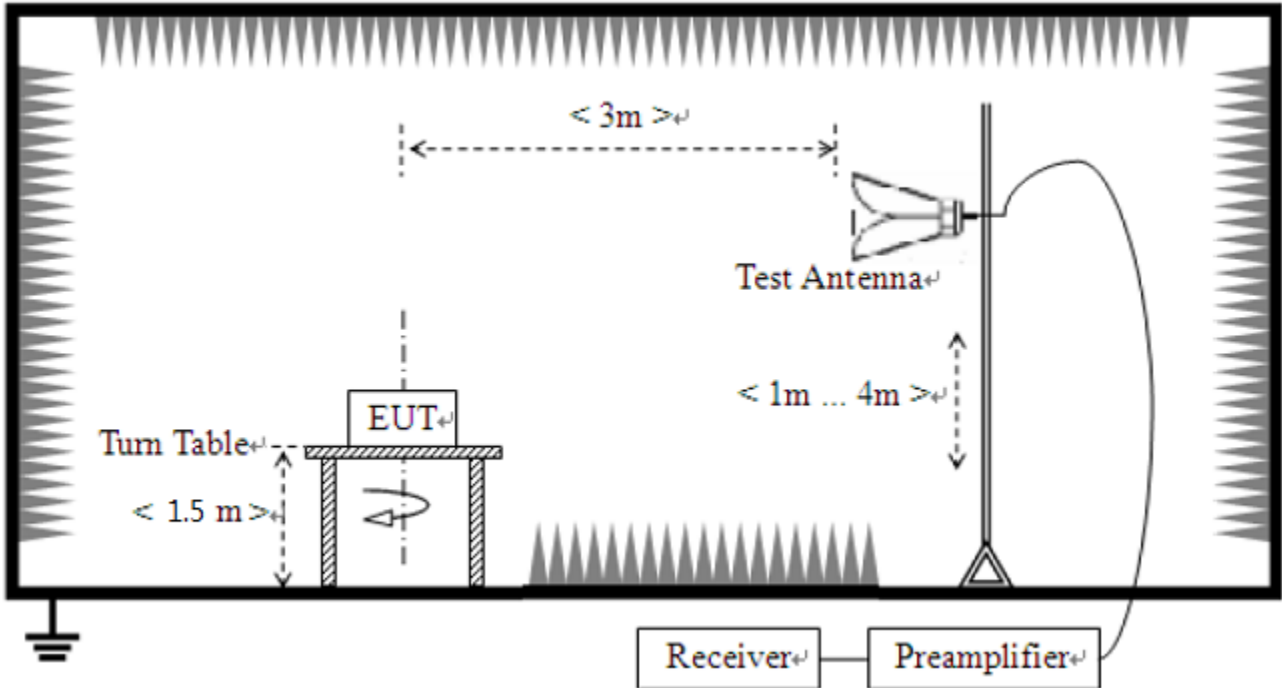

## Test results


### 1) 9 kHz to 30 MHz

#### Test mode : Transmitter (Worst Case)

The requirements are:

Complies

#### Test Data

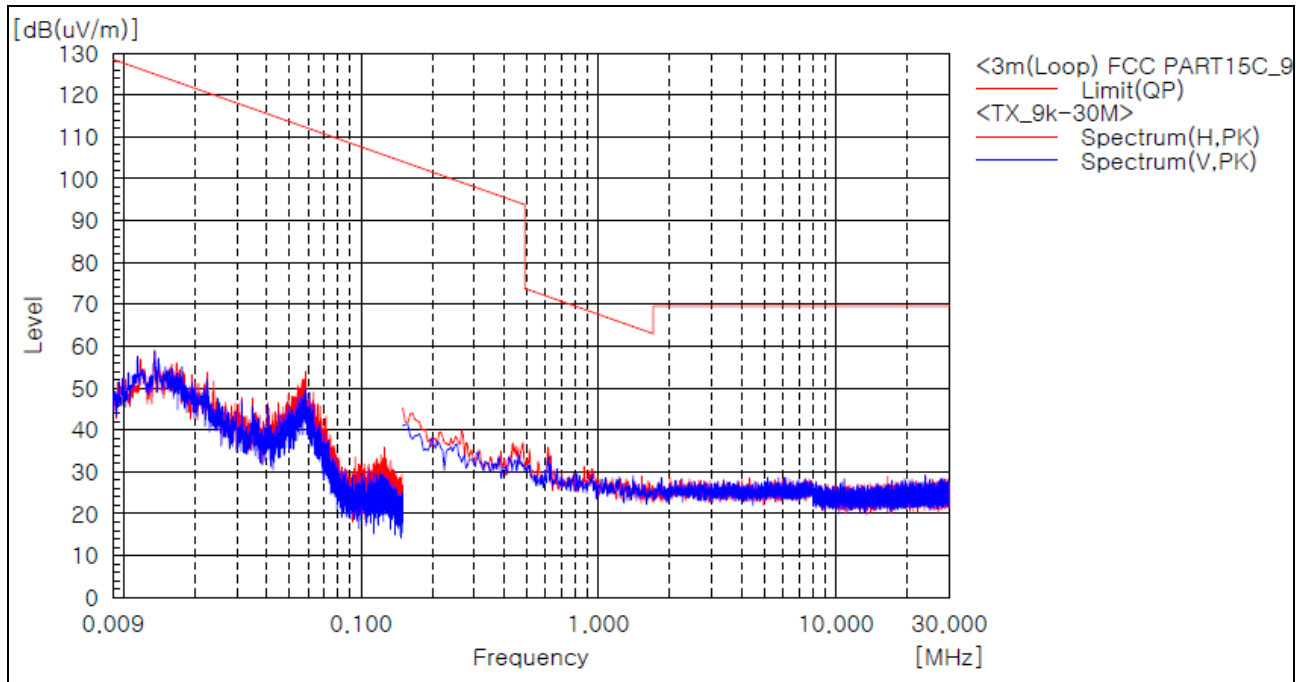

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

#### Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. This data is the Peak(PK) value.


## 2) 30 MHz to 1 GHz

**Test mode : Transmitter, 802.11b (Worst Case)**

The requirements are:

Complies

### Test Data

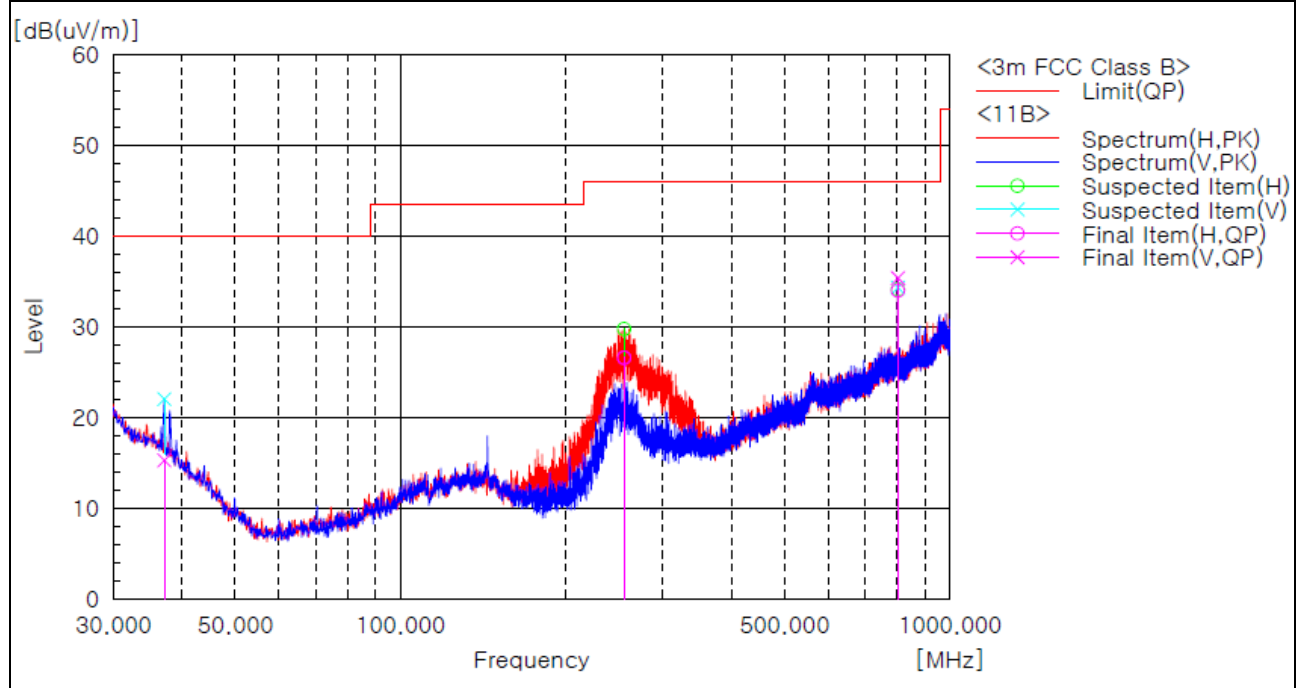

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	37.154	V	24.6	-9.3	15.3	40.0	24.7	101.0	168.0
2	255.283	H	35.6	-9.0	26.6	46.0	19.4	101.0	103.0
3	803.997	H	30.4	3.6	34.0	46.0	12.0	101.0	117.0
4	803.998	V	31.8	3.6	35.4	46.0	10.6	101.0	85.0

### Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain




**Test mode : Transmitter, 802.11g (Worst Case)**

The requirements are:

Complies

**Test Data**

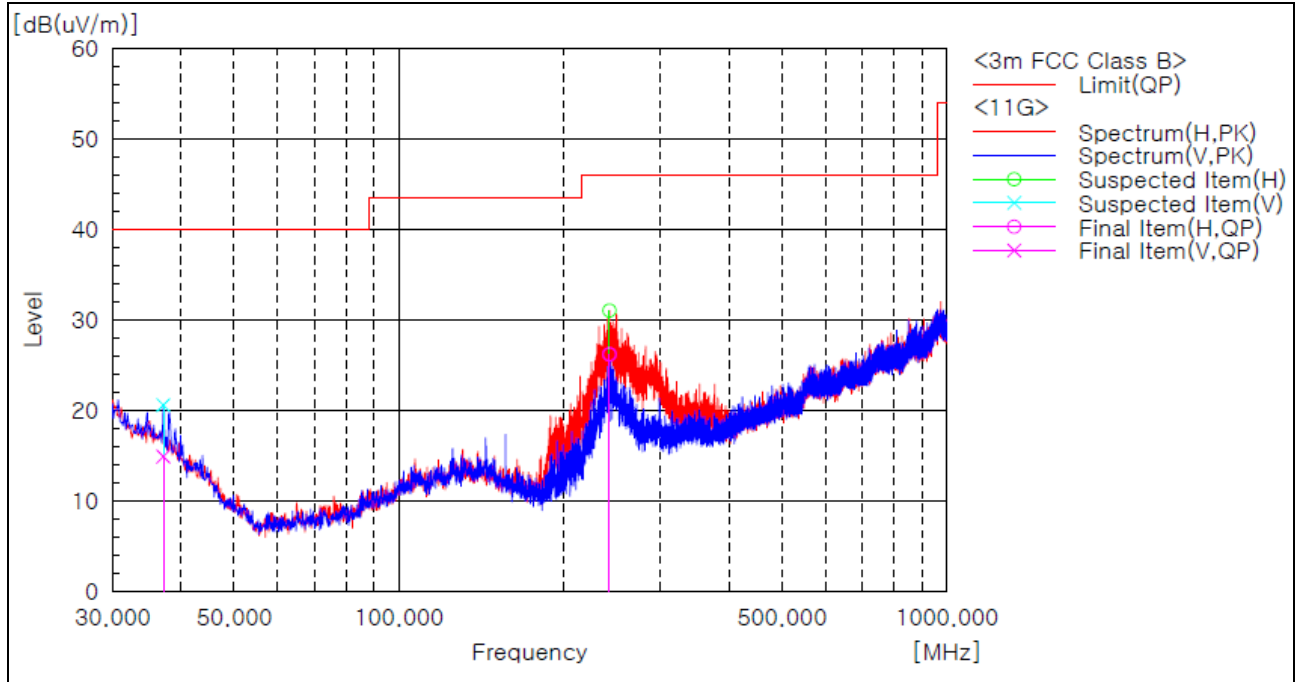

**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	37.154	V	24.2	-9.3	14.9	40.0	25.1	293.0	71.0
2	242.188	H	36.9	-10.7	26.2	46.0	19.8	101.0	316.0

**Remark :**


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

**Test mode : Transmitter, 802.11n\_HT20 (Worst Case)**

The requirements are:

Complies

**Test Data**

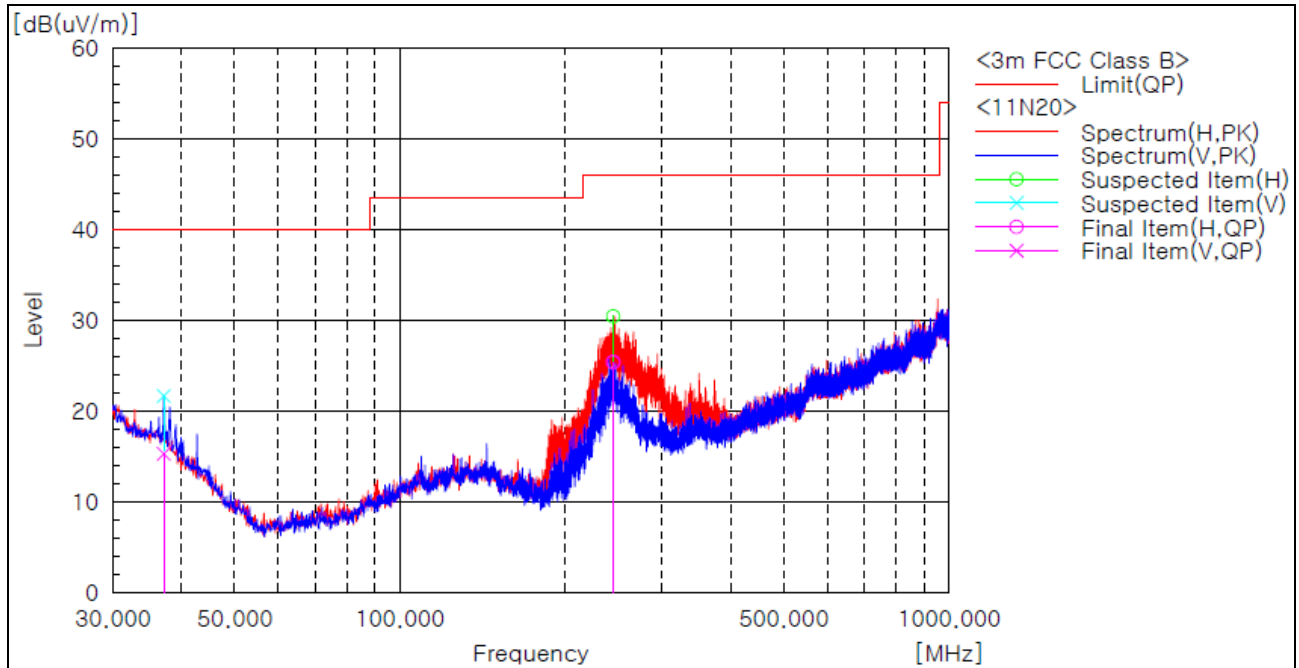

**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	37.154	V	24.6	-9.3	15.3	40.0	24.7	193.0	306.0
2	244.613	H	35.7	-10.3	25.4	46.0	20.6	101.0	323.0

**Remark :**


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

**Test mode : Transmitter, 802.11n\_HT40 (Worst Case)**

The requirements are:

Complies

**Test Data**

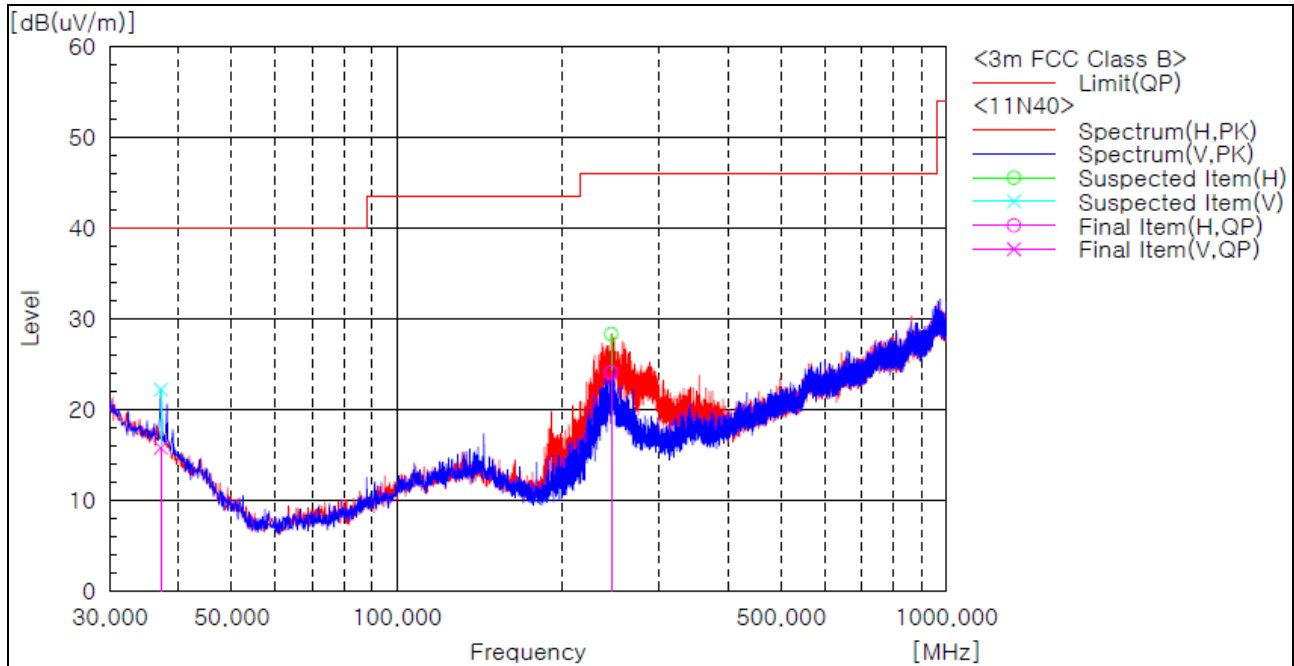

**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	37.154	V	25.1	-9.3	15.8	40.0	24.2	192.0	266.0
2	245.461	H	34.2	-10.1	24.1	46.0	21.9	101.0	312.0

**Remark :**



1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

### 3) above 1 GHz

The requirements are:

Complies


#### Test Data

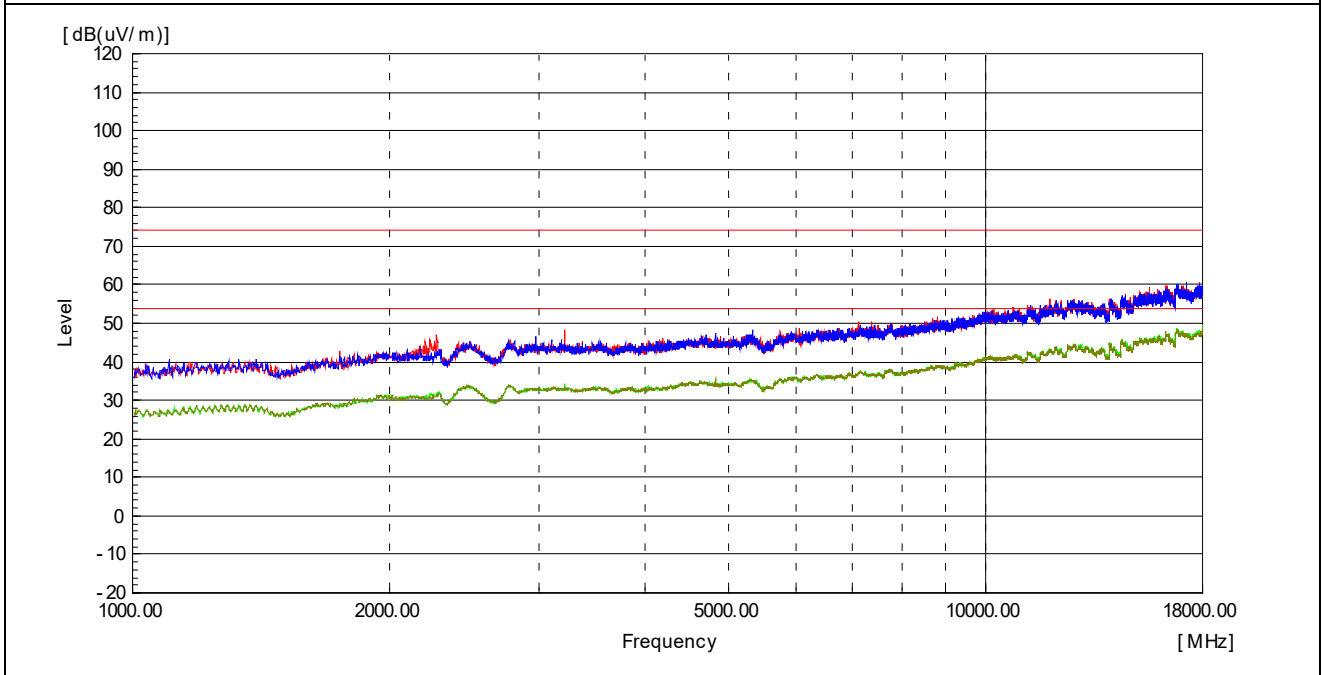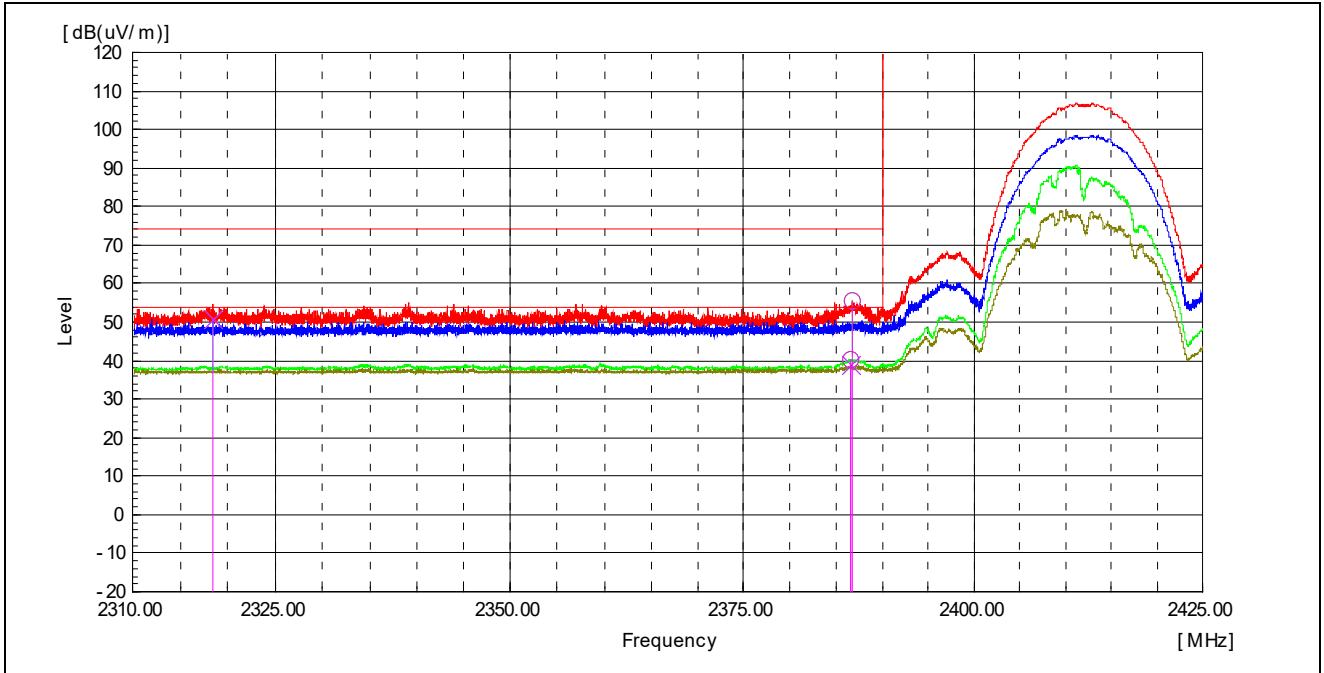



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2022-00723  
Page (37) / (49) Pages

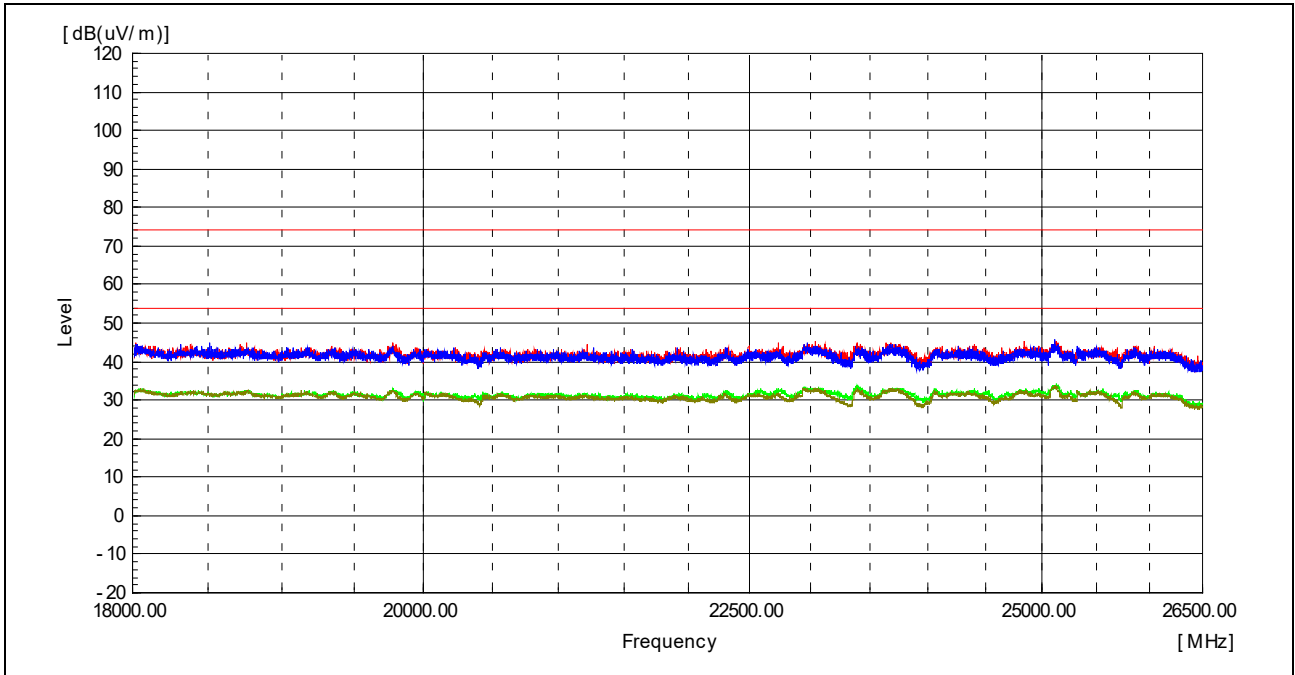

**Test mode : Transmitter, 802.11b**

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 386.75	H	58.20	-----	-2.50	-----	55.70	-----	74.00	-----	18.30	-----
2 386.63	H	-----	42.70	-2.50	1.03	-----	41.23	-----	54.00	-----	12.77
2 318.44	V	53.60	-----	-2.70	-----	50.90	-----	74.00	-----	23.10	-----
2 386.49	V	-----	41.30	-2.50	1.03	-----	39.83	-----	54.00	-----	14.17
3 216.00	H	50.80	-----	-0.80	-----	50.00	-----	74.00	-----	24.00	-----
3 215.96	H	-----	37.10	-0.80	1.03	-----	37.33	-----	54.00	-----	16.67
3 215.93	V	47.00	-----	-0.80	-----	46.20	-----	74.00	-----	27.80	-----
3 216.12	V	-----	36.10	-0.80	1.03	-----	36.33	-----	54.00	-----	17.67
4 824.18	H	47.40	-----	1.70	-----	49.10	-----	74.00	-----	24.90	-----
4 824.09	H	-----	35.60	1.70	1.03	-----	38.33	-----	54.00	-----	15.67
4 823.95	V	48.10	-----	1.70	-----	49.80	-----	74.00	-----	24.20	-----
4 824.00	V	-----	37.00	1.70	1.03	-----	39.73	-----	54.00	-----	14.27
7 237.53	H	47.10	-----	4.30	-----	51.40	-----	74.00	-----	22.60	-----
7 236.98	H	-----	34.50	4.30	1.03	-----	39.83	-----	54.00	-----	14.17
7 235.93	V	46.80	-----	4.30	-----	51.10	-----	74.00	-----	22.90	-----
7 234.16	V	-----	34.10	4.30	1.03	-----	39.43	-----	54.00	-----	14.57

Middle channel (2 437 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
3 249.26	H	53.70	-----	-0.60	-----	53.10	-----	74.00	-----	20.90	-----
3 249.35	H	-----	40.00	-0.60	1.03	-----	40.43	-----	54.00	-----	13.57
3 249.29	V	48.20	-----	-0.60	-----	47.60	-----	74.00	-----	26.40	-----
3 249.32	V	-----	36.40	-0.60	1.03	-----	36.83	-----	54.00	-----	17.17
4 874.23	H	47.30	-----	1.70	-----	49.00	-----	74.00	-----	25.00	-----
4 873.92	H	-----	34.80	1.70	1.03	-----	37.53	-----	54.00	-----	16.47
4 873.88	V	47.90	-----	1.70	-----	49.60	-----	74.00	-----	24.40	-----
4 874.06	V	-----	35.50	1.70	1.03	-----	38.23	-----	54.00	-----	15.77
7 314.08	H	47.20	-----	4.10	-----	51.30	-----	74.00	-----	22.70	-----
7 312.24	H	-----	34.50	4.10	1.03	-----	39.63	-----	54.00	-----	14.37
7 309.54	V	46.70	-----	4.10	-----	50.80	-----	74.00	-----	23.20	-----
7 312.93	V	-----	34.40	4.10	1.03	-----	39.53	-----	54.00	-----	14.47



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (39) / (49) Pages

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
3 282.54	H	53.90	-----	-0.80	-----	53.10	-----	74.00	-----	20.90	-----
3 282.57	H	-----	38.60	-0.80	1.03	-----	38.83	-----	54.00	-----	15.17
3 282.59	V	48.30	-----	-0.80	-----	47.50	-----	74.00	-----	26.50	-----
3 282.70	V	-----	36.20	-0.80	1.03	-----	36.43	-----	54.00	-----	17.57
4 924.00	H	46.50	-----	1.50	-----	48.00	-----	74.00	-----	26.00	-----
4 924.17	H	-----	34.00	1.50	1.03	-----	36.53	-----	54.00	-----	17.47
4 924.18	V	47.50	-----	1.50	-----	49.00	-----	74.00	-----	25.00	-----
4 924.14	V	-----	34.30	1.50	1.03	-----	36.83	-----	54.00	-----	17.17
7 387.37	H	47.20	-----	4.40	-----	51.60	-----	74.00	-----	22.40	-----
7 387.27	H	-----	34.40	4.40	1.03	-----	39.83	-----	54.00	-----	14.17
7 387.07	V	46.60	-----	4.40	-----	51.00	-----	74.00	-----	23.00	-----
7 387.08	V	-----	34.80	4.40	1.03	-----	40.23	-----	54.00	-----	13.77

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (40) / (49) Pages

**Test mode : Transmitter, 802.11g**

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 389.22	H	68.10	-----	-2.50	-----	65.60	-----	74.00	-----	8.40	-----
2 390.00	H	-----	48.70	-2.50	0.28	-----	46.48	-----	54.00	-----	7.52
2 389.67	V	60.00	-----	-2.50	-----	57.50	-----	74.00	-----	16.50	-----
2 388.46	V	-----	46.80	-2.50	0.28	-----	44.58	-----	54.00	-----	9.42
3 216.12	H	52.10	-----	-0.80	-----	51.30	-----	74.00	-----	22.70	-----
3 215.99	H	-----	38.30	-0.80	0.28	-----	37.78	-----	54.00	-----	16.22
3 215.97	V	47.40	-----	-0.80	-----	46.60	-----	74.00	-----	27.40	-----
3 216.09	V	-----	36.80	-0.80	0.28	-----	36.28	-----	54.00	-----	17.72

Middle channel (2 437 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
3 249.26	H	54.60	-----	-0.60	-----	54.00	-----	74.00	-----	20.00	-----
3 249.35	H	-----	39.70	-0.60	0.28	-----	39.38	-----	54.00	-----	14.62
3 249.32	V	48.10	-----	-0.60	-----	47.50	-----	74.00	-----	26.50	-----
3 249.39	V	-----	36.60	-0.60	0.28	-----	36.28	-----	54.00	-----	17.72





**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (41) / (49) Pages

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 484.20	H	68.10	-----	-2.10	-----	66.00	-----	74.00	-----	8.00	-----
2 483.54	H	-----	47.70	-2.10	0.28	-----	45.88	-----	54.00	-----	8.12
2 483.66	V	60.00	-----	-2.10	-----	57.90	-----	74.00	-----	16.10	-----
2 484.05	V	-----	46.70	-2.10	0.28	-----	44.88	-----	54.00	-----	9.12
3 282.58	H	55.50	-----	-0.80	-----	54.70	-----	74.00	-----	19.30	-----
3 282.72	H	-----	39.80	-0.80	0.28	-----	39.28	-----	54.00	-----	14.72
3 283.03	V	48.10	-----	-0.80	-----	47.30	-----	74.00	-----	26.70	-----
3 282.68	V	-----	36.30	-0.80	0.28	-----	35.78	-----	54.00	-----	18.22

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (42) / (49) Pages

**Test mode : Transmitter, 802.11n\_HT20**

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 389.98	H	70.80	-----	-2.50	-----	68.30	-----	74.00	-----	5.70	-----
2 390.00	H	-----	49.30	-2.50	0.62	-----	47.42	-----	54.00	-----	6.58
2 389.94	V	63.80	-----	-2.50	-----	61.30	-----	74.00	-----	12.70	-----
2 389.88	V	-----	47.60	-2.50	0.62	-----	45.72	-----	54.00	-----	8.28
3 215.94	H	51.90	-----	-0.80	-----	51.10	-----	74.00	-----	22.90	-----
3 216.01	H	-----	37.90	-0.80	0.62	-----	37.72	-----	54.00	-----	16.28
3 216.10	V	47.20	-----	-0.80	-----	46.40	-----	74.00	-----	27.60	-----
3 216.05	V	-----	37.20	-0.80	0.62	-----	37.02	-----	54.00	-----	16.98

Middle channel (2 437 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
3 249.57	H	54.70	-----	-0.60	-----	54.10	-----	74.00	-----	19.90	-----
3 249.42	H	-----	39.80	-0.60	0.62	-----	39.82	-----	54.00	-----	14.18
3 249.25	V	48.70	-----	-0.60	-----	48.10	-----	74.00	-----	25.90	-----
3 249.37	V	-----	36.20	-0.60	0.62	-----	36.22	-----	54.00	-----	17.78



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (43) / (49) Pages

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 483.52	H	70.20	-----	-2.10	-----	68.10	-----	74.00	-----	5.90	-----
2 483.58	H	-----	48.20	-2.10	0.62	-----	46.72	-----	54.00	-----	7.28
2 483.57	V	60.80	-----	-2.10	-----	58.70	-----	74.00	-----	15.30	-----
2 483.56	V	-----	46.90	-2.10	0.62	-----	45.42	-----	54.00	-----	8.58
3 282.52	H	54.60	-----	-0.80	-----	53.80	-----	74.00	-----	20.20	-----
3 282.72	H	-----	39.20	-0.80	0.62	-----	39.02	-----	54.00	-----	14.98
3 282.58	V	48.00	-----	-0.80	-----	47.20	-----	74.00	-----	26.80	-----
3 282.70	V	-----	35.90	-0.80	0.62	-----	35.72	-----	54.00	-----	18.28

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (44) / (49) Pages

**Test mode : Transmitter, 802.11n\_HT40**

Lowest channel (2 422 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 387.44	H	73.70	-----	-2.50	-----	71.20	-----	74.00	-----	2.80	-----
2 390.00	H	-----	49.00	-2.50	1.59	-----	48.09	-----	54.00	-----	5.91
2 389.72	V	64.90	-----	-2.50	-----	62.40	-----	74.00	-----	11.60	-----
2 389.74	V	-----	47.50	-2.50	1.59	-----	46.59	-----	54.00	-----	7.41
3 229.32	H	50.30	-----	-0.70	-----	49.60	-----	74.00	-----	24.40	-----
3 229.30	H	-----	36.20	-0.70	1.59	-----	37.09	-----	54.00	-----	16.91
3 229.73	V	46.70	-----	-0.70	-----	46.00	-----	74.00	-----	28.00	-----
3 229.38	V	-----	35.30	-0.70	1.59	-----	36.19	-----	54.00	-----	17.81

Middle channel (2 437 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
3 249.38	H	51.80	-----	-0.60	-----	51.20	-----	74.00	-----	22.80	-----
3 249.41	H	-----	37.10	-0.60	1.59	-----	38.09	-----	54.00	-----	15.91
3 249.33	V	47.70	-----	-0.60	-----	47.10	-----	74.00	-----	26.90	-----
3 249.23	V	-----	35.00	-0.60	1.59	-----	35.99	-----	54.00	-----	18.01



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (45) / (49) Pages

Highest channel (2 452 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 484.37	H	72.00	-----	-2.10	-----	69.90	-----	74.00	-----	4.10	-----
2 483.61	H	-----	47.50	-2.10	1.59	-----	46.99	-----	54.00	-----	7.01
2 484.39	V	61.70	-----	-2.10	-----	59.60	-----	74.00	-----	14.40	-----
2 484.44	V	-----	46.60	-2.10	1.59	-----	46.09	-----	54.00	-----	7.91
3 269.48	H	50.90	-----	-0.70	-----	50.20	-----	74.00	-----	23.80	-----
3 269.30	H	-----	36.60	-0.70	1.59	-----	37.49	-----	54.00	-----	16.51
3 269.43	V	47.30	-----	-0.70	-----	46.60	-----	74.00	-----	27.40	-----
3 268.97	V	-----	34.70	-0.70	1.59	-----	35.59	-----	54.00	-----	18.41

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



## 4.6 AC Conducted Emissions

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

ANSI C63.10-2013 - Section 6.2

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* The level decreases linearly with the logarithm of the frequency.

\*\* A linear average detector is required.

### Test Results


The requirements are:

Complies

## Test Data

### [LINE]

(with EC)3CE\_Class B\_L1

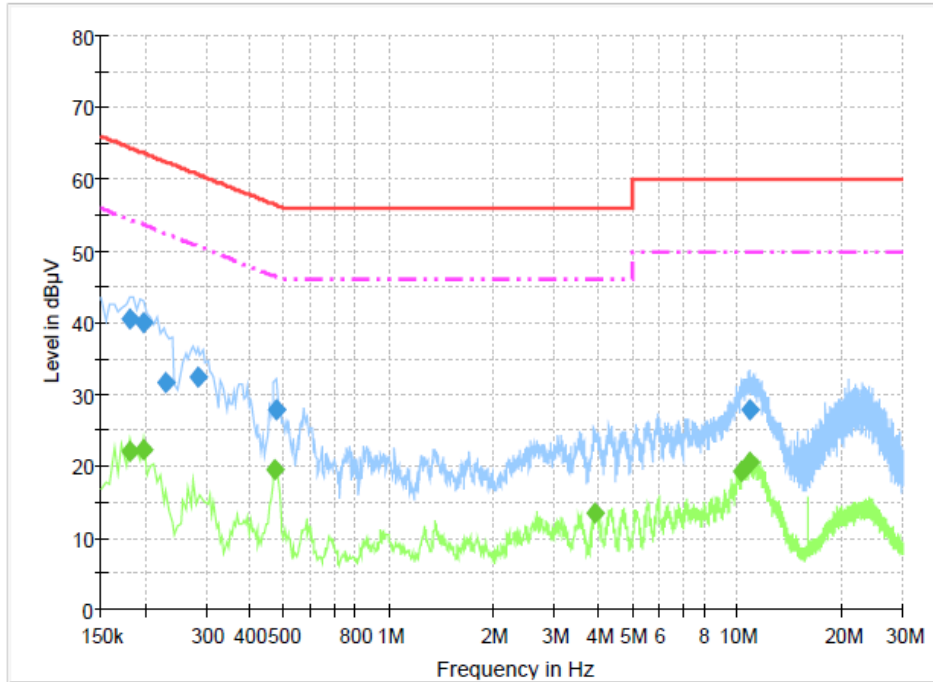

### Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	40.5	1000.0	9.000	On	L1	10.0	23.9	64.4
0.199500	40.1	1000.0	9.000	On	L1	10.0	23.6	63.6
0.231000	31.6	1000.0	9.000	On	L1	9.8	30.8	62.4
0.285000	32.3	1000.0	9.000	On	L1	9.8	28.3	60.7
0.478500	27.9	1000.0	9.000	On	L1	10.0	28.5	56.4
10.842000	27.9	1000.0	9.000	On	L1	10.3	32.1	60.0

### Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	22.1	1000.0	9.000	On	L1	10.0	32.3	54.4
0.199500	22.3	1000.0	9.000	On	L1	10.0	31.3	53.6
0.474000	19.4	1000.0	9.000	On	L1	10.0	27.1	46.4
3.898500	13.4	1000.0	9.000	On	L1	10.0	32.6	46.0
10.351500	19.2	1000.0	9.000	On	L1	10.2	30.8	50.0
10.855500	20.6	1000.0	9.000	On	L1	10.3	29.4	50.0

**[NEUTRAL]**

(with EC)3CE\_Class B\_N

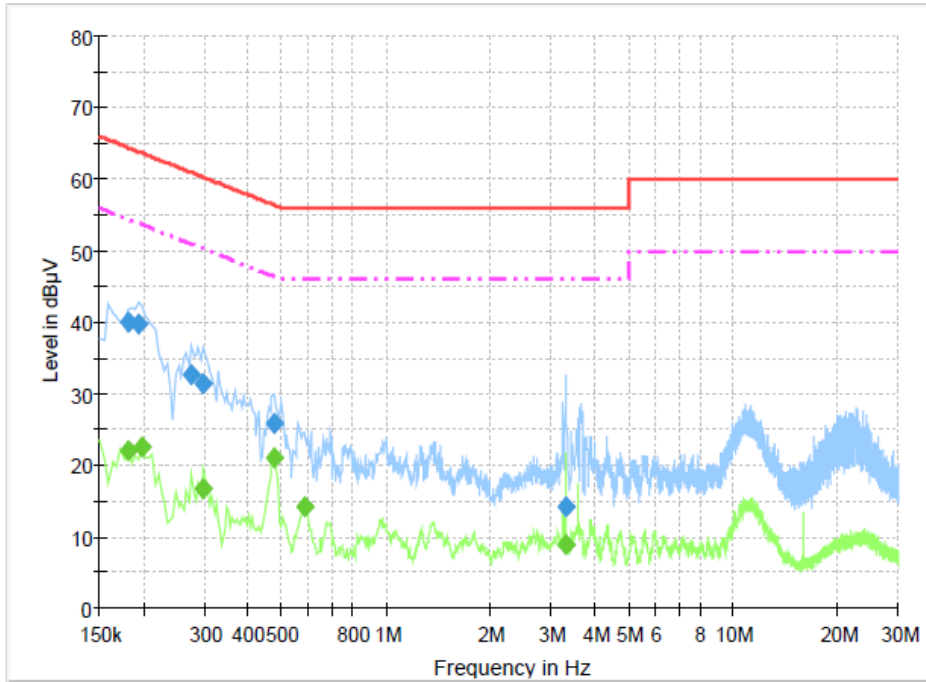

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	39.9	1000.0	9.000	On	N	9.9	24.5	64.4
0.195000	39.8	1000.0	9.000	On	N	9.9	24.0	63.8
0.276000	32.5	1000.0	9.000	On	N	9.8	28.4	60.9
0.298500	31.5	1000.0	9.000	On	N	9.9	28.8	60.3
0.478500	25.8	1000.0	9.000	On	N	10.1	30.6	56.4
3.309000	14.2	1000.0	9.000	On	N	9.9	41.8	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	22.1	1000.0	9.000	On	N	9.9	32.3	54.4
0.199500	22.5	1000.0	9.000	On	N	9.9	31.1	53.6
0.298500	16.8	1000.0	9.000	On	N	9.9	33.5	50.3
0.478500	21.0	1000.0	9.000	On	N	10.1	25.3	46.4
0.582000	14.1	1000.0	9.000	On	N	10.1	31.9	46.0
3.309000	9.0	1000.0	9.000	On	N	9.9	37.0	46.0





**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2022-00723  
 Page (49) / (49) Pages

## APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY50510240	2021-07-19	2022-07-19
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2021-04-12	2022-04-12
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2021-10-20	2022-10-20
4	BILOG ANTENNA	TESEQ	CBL6111D	58490	2021-03-03	2023-03-03
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2020-05-20	2022-05-20
6	ATTENUATOR	PASTERNAK	PE7047-6	NONE	2022-02-22	2023-02-22
7	6dB Attenuator	BIRD	5W 6dB	1744	2021-11-18	2022-11-18
8	AMPLIFIER	SONOMA	310	291721	2022-01-21	2023-01-21
9	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2022-01-11	2023-01-11
10	Preamplifier	Agilent	8449B	3008A01504	2021-12-17	2022-12-17
11	Double Ridged Guide Antenna	ETS-Lindgren	3117	00154525	2021-10-21	2022-10-21
12	Horn Antenna	SCHWARZBECK	BBHA9170	00967	2021-05-25	2022-05-25
13	Low Noise Amplifier	TESTEK	TK-PA1840H	200115-L	2021-05-21	2022-05-21
14	Band Reject Filter	Micro Tronics	BRM50702	363	2021-03-30	2022-03-30
15	LISN	Rohde & Schwarz	ENV216	101236	2021-10-20	2022-10-20
16	EMI Test Receiver	Rohde & Schwarz	ESC17	100816	2021-10-20	2022-10-20

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S151	2022-03-04
2	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2021-10-20
3	RF Cable (9kHz-30MHz Radiated)	HUBER+SUHNER	NA	NA	2021-02-20
4	RF Cable (9kHz-1GHz Below Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2021-02-20
5	RF Cable (30MHz-1GHz Below Radiated)	HUBER+SUHNER	SUCOFLEX 104	N/A	2021-02-20
6	RF Cable (1GHz-18GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2374/2	2021-02-20
7	RF Cable (1GHz-40GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2021-02-20
8	RF Cable (18GHz-40GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	803010/2	2021-10-27