




EGPRS 1900 band edge-left side

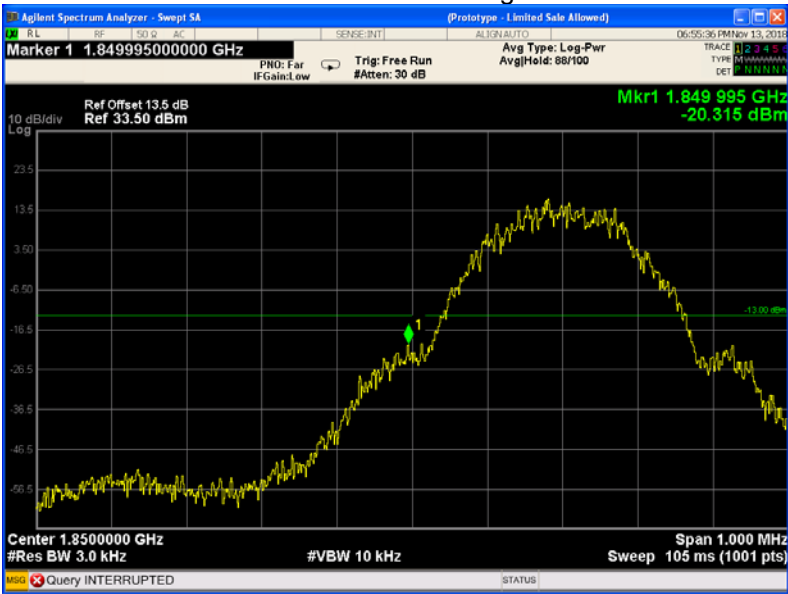


EGPRS 1900 band edge-right side

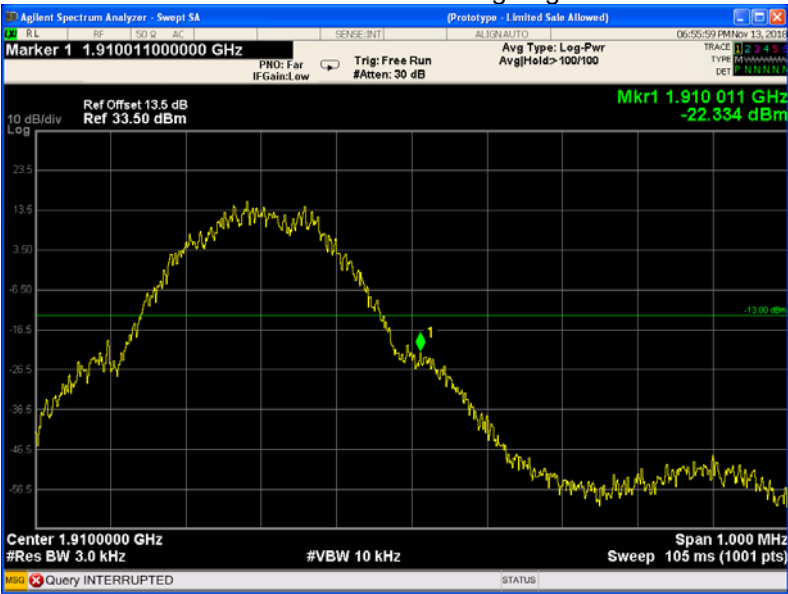


WCDMA band II band edge-left side

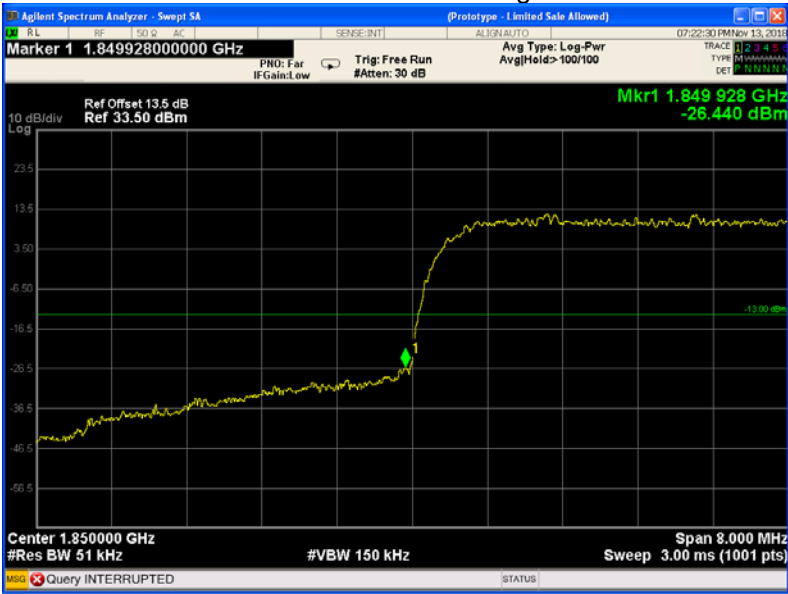


WCDMA band II band edge-right side

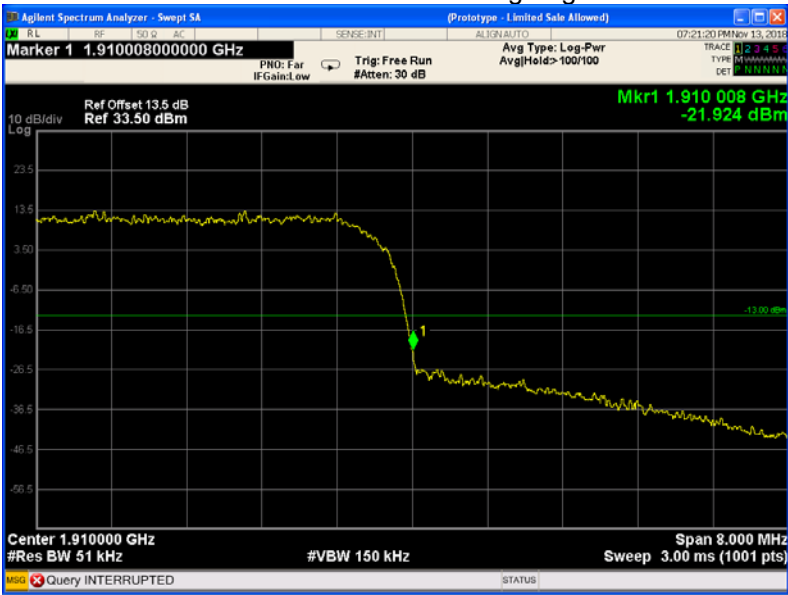


WCDMA band II band edge-left side (HSDPA)

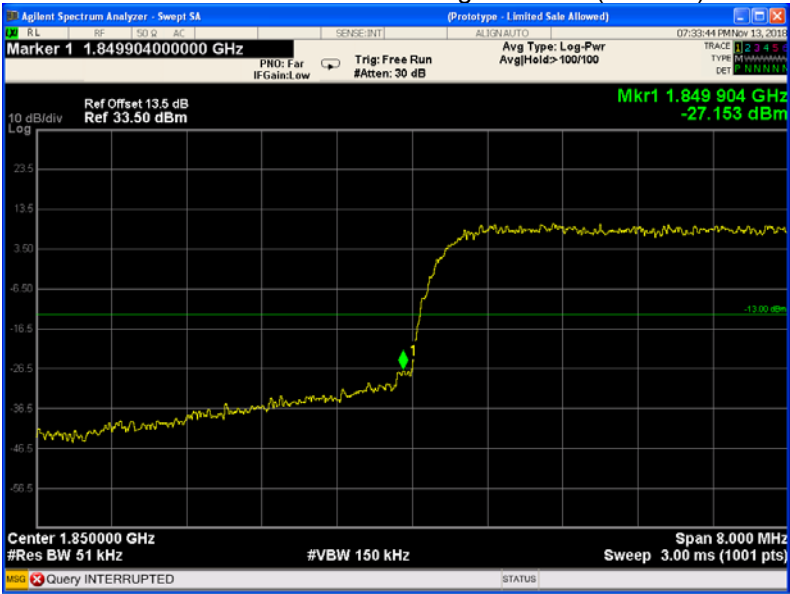


WCDMA band II band edge-right side (HSDPA)

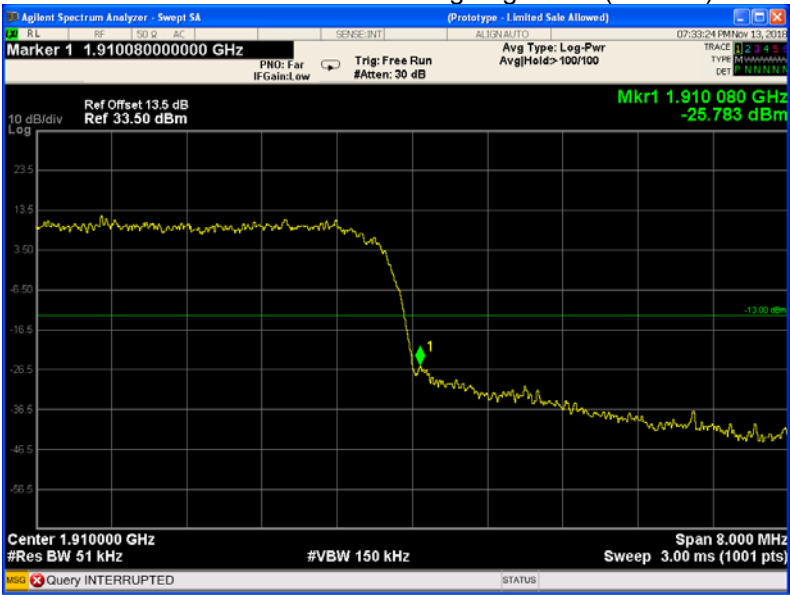

WCDMA band II band edge-left side (HSUPA)

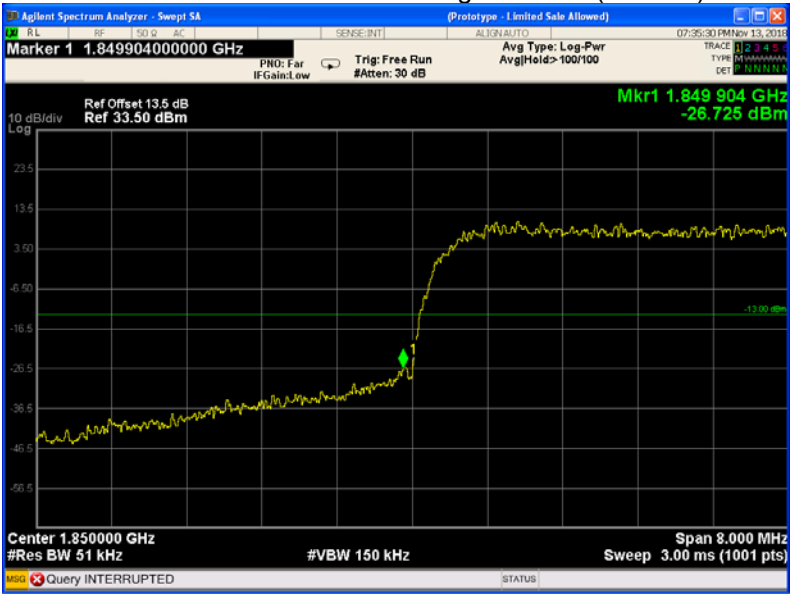


WCDMA band II band edge-right side (HSUPA)

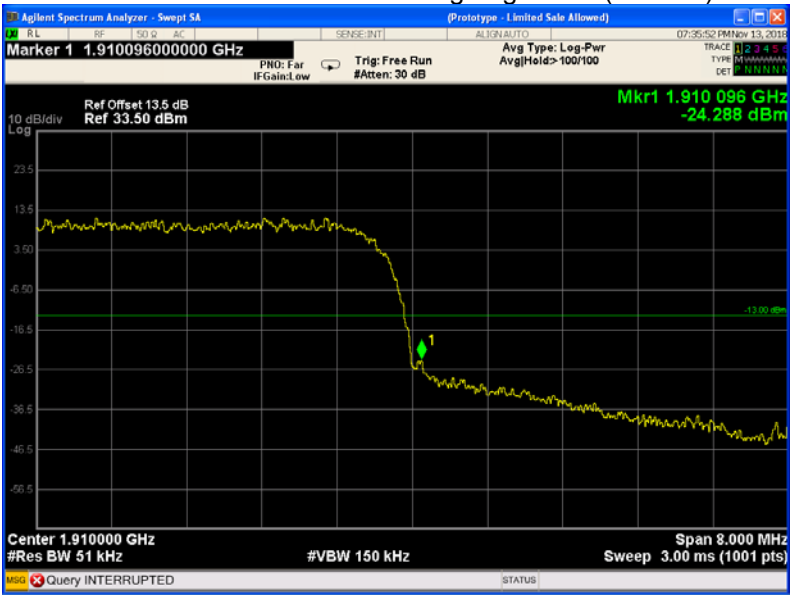


Part 27


WCDMA band IV band edge-left side

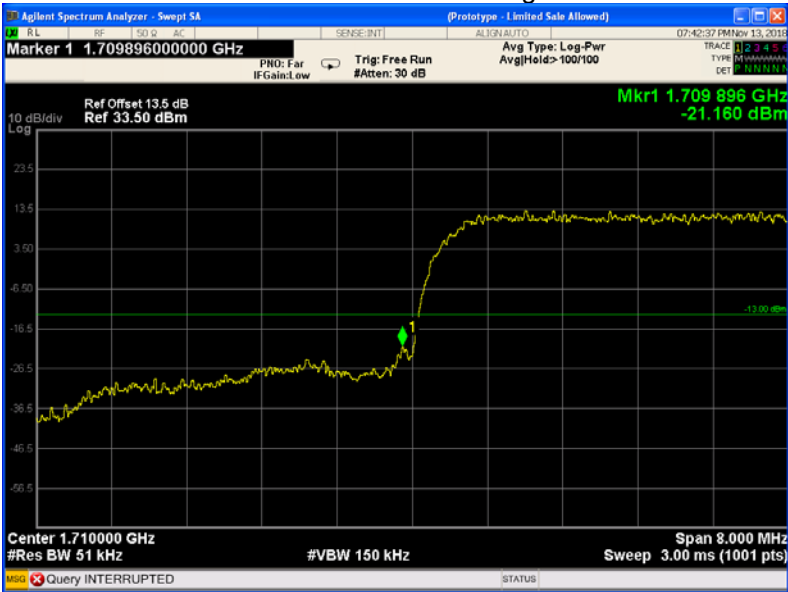


WCDMA band IV band edge-right side

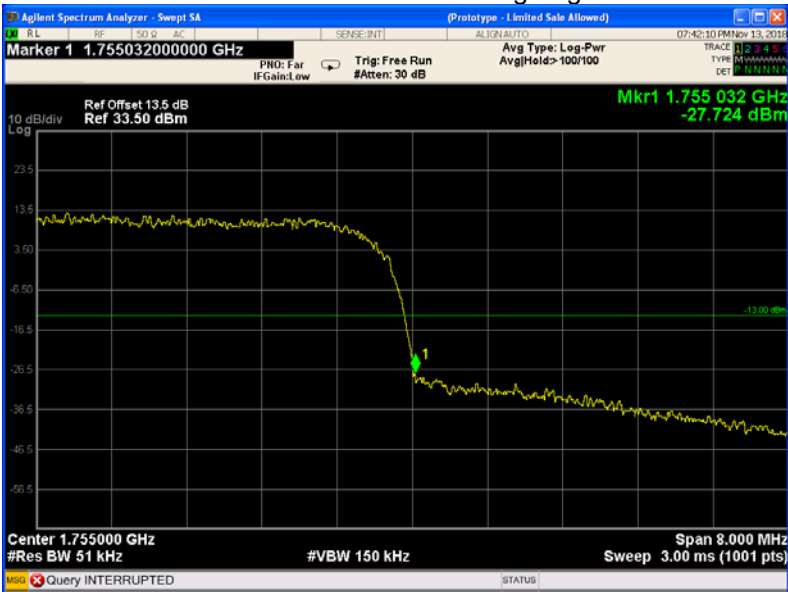


WCDMA band IV band edge-left side (HSDPA)

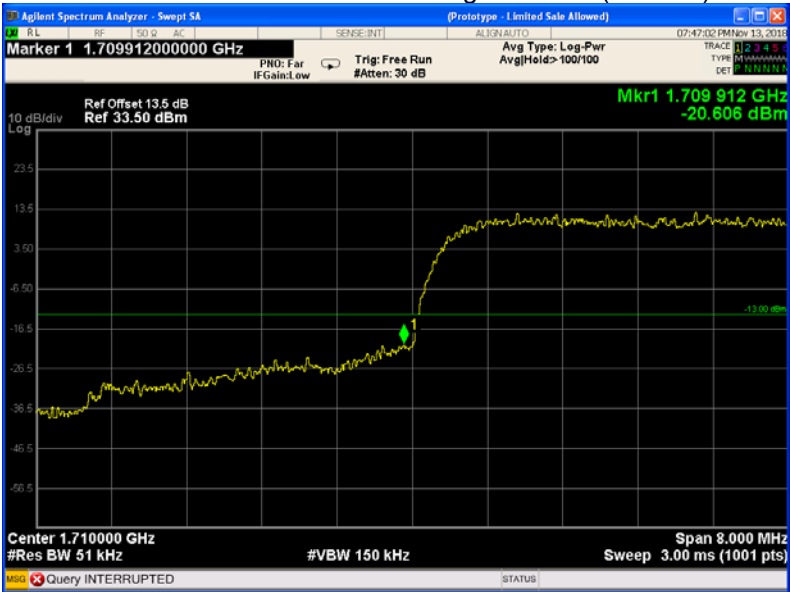


WCDMA band IV band edge-right side (HSDPA)

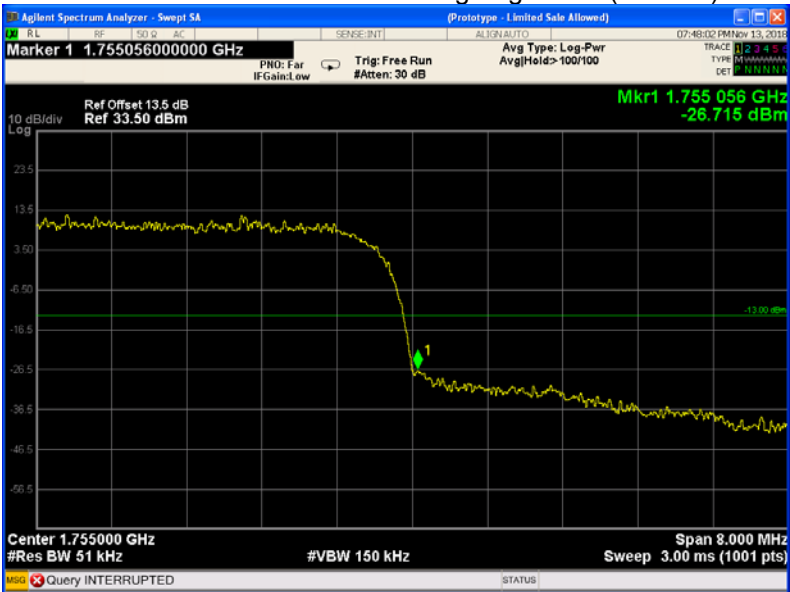

WCDMA band IV band edge-left side (HSUPA)

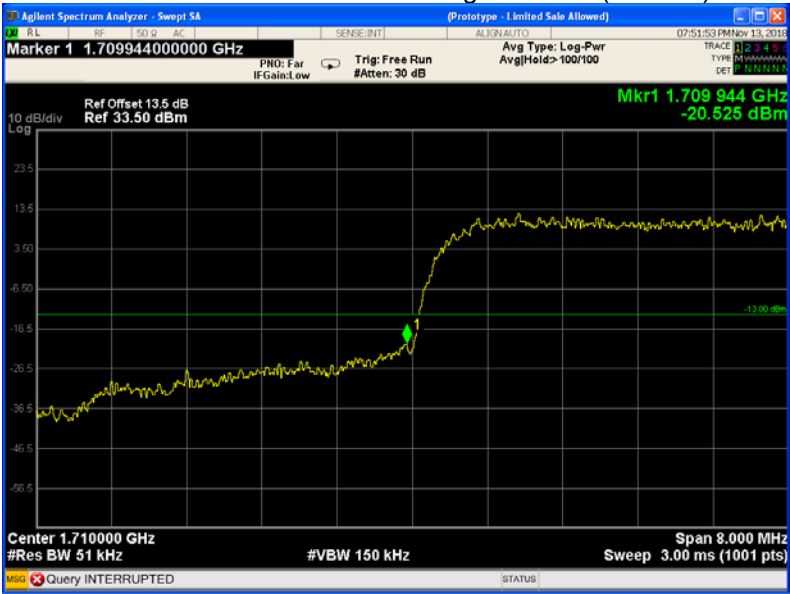

WCDMA band IV band edge-right side (HSUPA)

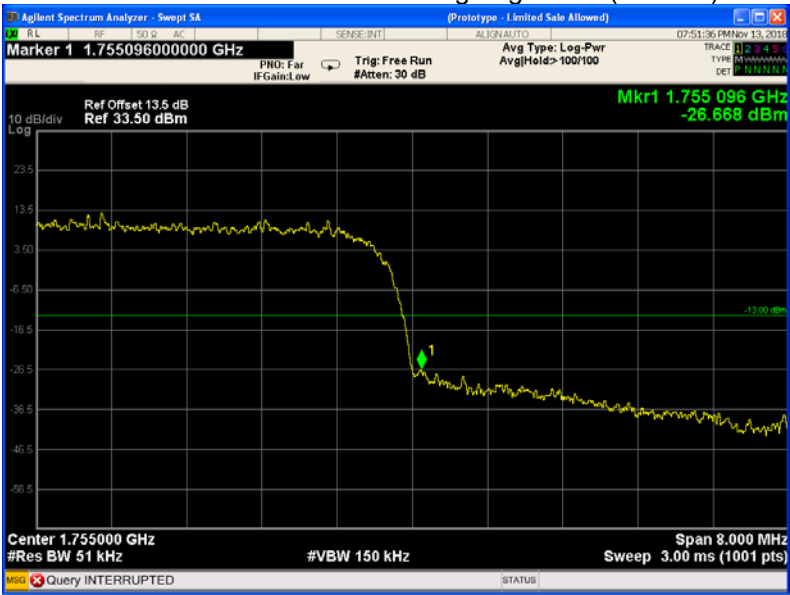

14 FREQUENCY STABILITY

Test Requirement:	FCC Part 2.1055, 22.355, 24.235, 27.5(h),27.54
Test Method:	TIA/EIA-603-D:2010 KDB971168 D01 v03
Test Mode:	TX transmitting

14.1 EUT Operation

Operating Environment :


Temperature:	22.9 °C
Humidity:	52.0 % RH
Atmospheric Pressure:	101.3kPa

14.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

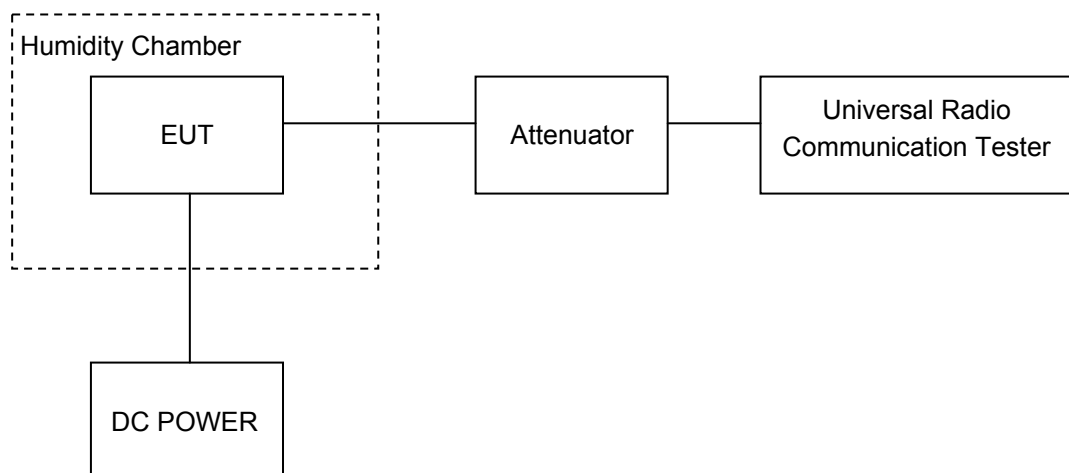

14.3 Test Result

Cellular Band (Part 22H)

GSM 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-1	-0.0012	2.5
40		-10	-0.0120	2.5
30		-16	-0.0191	2.5
20		-9	-0.0108	2.5
10		-7	-0.0084	2.5
0		-18	-0.0215	2.5
-10		-4	-0.0048	2.5
-20		-3	-0.0036	2.5
-30		-11	-0.0131	2.5
20	3.3	-4	-0.0048	2.5
20	4.2	-6	-0.0072	2.5

GPRS 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-7	-0.0084	2.5
40		-12	-0.0143	2.5
30		-18	-0.0215	2.5
20		-14	-0.0167	2.5
10		-21	-0.0251	2.5
0		-14	-0.0167	2.5
-10		-16	-0.0191	2.5
-20		-9	-0.0108	2.5
-30		-16	-0.0191	2.5
20	3.3	-5	-0.0060	2.5
20	4.2	-22	-0.0263	2.5

EGPRS 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-2	-0.0024	2.5
40		-10	-0.0120	2.5
30		-13	-0.0155	2.5
20		-9	-0.0108	2.5
10		-14	-0.0167	2.5
0		-8	-0.0096	2.5
-10		-10	-0.0120	2.5
-20		-5	-0.0060	2.5
-30		-18	-0.0215	2.5
20	3.3	-1	-0.0012	2.5
20	4.2	-13	-0.0155	2.5

WCDMA Band V Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-1	-0.0012	2.5
40		9	0.0108	2.5
30		1	0.0012	2.5
20		7	0.0084	2.5
10		14	0.0167	2.5
0		16	0.0191	2.5
-10		0	0.0000	2.5
-20		0	0.0000	2.5
-30		1	0.0012	2.5
20	3.3	5	0.0060	2.5
20	4.2	14	0.0167	2.5

WCDMA Band V Test Frequency:836.6MHz(HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-3	-0.0036	2.5
40		-6	-0.0072	2.5
30		0	0.0000	2.5
20		-5	-0.0060	2.5
10		-14	-0.0167	2.5
0		-7	-0.0084	2.5
-10		-6	-0.0072	2.5
-20		-12	-0.0143	2.5
-30		-7	-0.0084	2.5
20	3.3	4	0.0048	2.5
20	4.2	-14	-0.0167	2.5

WCDMA Band V Test Frequency:836.6MHz(HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-4	-0.0048	2.5
40		0	0.0000	2.5
30		-4	-0.0048	2.5
20		1	0.0012	2.5
10		5	0.0060	2.5
0		-3	-0.0036	2.5
-10		5	0.0060	2.5
-20		-3	-0.0036	2.5
-30		-4	-0.0048	2.5
20	3.3	-7	-0.0084	2.5
20	4.2	0	0.0000	2.5

PCS Band (Part 24E)

PCS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-2	-0.0011	2.5
40		0	0.0000	2.5
30		-1	-0.0005	2.5
20		6	0.0032	2.5
10		3	0.0016	2.5
0		0	0.0000	2.5
-10		11	0.0059	2.5
-20		0	0.0000	2.5
-30		-3	-0.0016	2.5
20	3.3	14	0.0074	2.5
20	4.2	13	0.0069	2.5

GPRS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-9	-0.0048	2.5
40		3	0.0016	2.5
30		-9	-0.0048	2.5
20		-4	-0.0021	2.5
10		-10	-0.0053	2.5
0		-13	-0.0069	2.5
-10		1	0.0005	2.5
-20		1	0.0005	2.5
-30		-13	-0.0069	2.5
20	3.3	-7	-0.0037	2.5
20	4.2	-4	-0.0021	2.5

EGPRS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-8	-0.0043	2.5
40		-18	-0.0096	2.5
30		-5	-0.0027	2.5
20		-9	-0.0048	2.5
10		-6	-0.0032	2.5
0		-6	-0.0032	2.5
-10		-2	-0.0011	2.5
-20		-1	-0.0005	2.5
-30		-2	-0.0011	2.5
20	3.3	-14	-0.0074	2.5
20	4.2	-17	-0.0090	2.5

WCDMA Band II Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	0	0.0000	2.5
40		9	0.0048	2.5
30		3	0.0016	2.5
20		0	0.0000	2.5
10		-2	-0.0011	2.5
0		4	0.0021	2.5
-10		4	0.0021	2.5
-20		-2	-0.0011	2.5
-30		3	0.0016	2.5
20	3.3	4	0.0021	2.5
20	4.2	6	0.0032	2.5

WCDMA Band II Test Frequency:1880.0MHz(HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-3	-0.0016	2.5
40		0	0.0000	2.5
30		-6	-0.0032	2.5
20		-1	-0.0005	2.5
10		-3	-0.0016	2.5
0		-4	-0.0021	2.5
-10		-2	-0.0011	2.5
-20		0	0.0000	2.5
-30		-2	-0.0011	2.5
20	3.3	-5	-0.0027	2.5
20	4.2	0	0.0000	2.5

WCDMA Band II Test Frequency:1880.0MHz(HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	7	0.0037	2.5
40		-7	-0.0037	2.5
30		7	0.0037	2.5
20		-1	-0.0005	2.5
10		8	0.0043	2.5
0		-2	-0.0011	2.5
-10		-6	-0.0032	2.5
-20		-3	-0.0016	2.5
-30		2	0.0011	2.5
20	3.3	3	0.0016	2.5
20	4.2	5	0.0027	2.5

Part 27

WCDMA Band IV Test Frequency:1732.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	0	0.0000	2.5
40		-3	-0.0017	2.5
30		1	0.0006	2.5
20		-3	-0.0017	2.5
10		-11	-0.0063	2.5
0		-1	-0.0006	2.5
-10		-4	-0.0023	2.5
-20		-10	-0.0058	2.5
-30		2	0.0012	2.5
20	3.3	0	0.0000	2.5
20	4.2	-1	-0.0006	2.5

WCDMA Band IV Test Frequency:1732.6MHz (HSDPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	5	0.0029	2.5
40		0	0.0000	2.5
30		4	0.0023	2.5
20		-2	-0.0012	2.5
10		-1	-0.0006	2.5
0		4	0.0023	2.5
-10		2	0.0012	2.5
-20		-10	-0.0058	2.5
-30		3	0.0017	2.5
20	3.3	-3	-0.0017	2.5
20	4.2	-2	-0.0012	2.5

WCDMA Band IV Test Frequency:1732.6MHz (HSUPA)				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.8	-2	-0.0012	2.5
40		2	0.0012	2.5
30		-3	-0.0017	2.5
20		0	0.0000	2.5
10		1	0.0006	2.5
0		9	0.0052	2.5
-10		-8	-0.0046	2.5
-20		-1	-0.0006	2.5
-30		2	0.0012	2.5
20	3.3	7	0.0040	2.5
20	4.2	-4	-0.0023	2.5

15 RF Exposure

Remark: refer to SAR test report: WTS18S11128310-1W.

16 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS18S11128310W_Photo.

===== End of Report =====