

#

# FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

## FCC ID: 2ANMU-K13PRO

**Product:** Smart Phone  
**Trade Mark:** OUKITEL  
**Model Number:** K13 Pro  
**Family Model:** N/A  
**Report No.:** S19061203412006

### Prepared for

SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD  
A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL  
ZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX China

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen 518126 P.R. China  
Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599  
Website:<http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD  
**Address**..... : A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX China  
**Manufacturer's Name**..... : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD  
**Address**..... : A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX China  
**Product name**..... : Smart Phone  
**Model and/or type reference** .. : K13 Pro  
**Family Model:** N/A  
**Standards**..... : FCC CFR 47 Part 22H, Part 24E, Part 27  
**Test procedure** ..... : ANSI C63.26:2015  
ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.


**Date of Test** .....


Date (s) of performance of tests..... Jun. 13, 2019 ~ Jul. 23, 2019

Date of Issue ..... 24 Jul, 2019

Test Result..... **Pass**

Testing Engineer :   
\_\_\_\_\_  
(Allen Liu)

Technical Manager :   
\_\_\_\_\_  
(Jason Chen)

Authorized Signatory :   
\_\_\_\_\_  
(Sam Chen)

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b> .....	<b>5</b>
<b>1. GENERAL INFORMATION</b> .....	<b>5</b>
<b>1.1 PRODUCT DESCRIPTION</b> .....	<b>5</b>
<b>1.2 RELATED SUBMITTAL(S) / GRANT (S)</b> .....	<b>6</b>
<b>1.3 TEST METHODOLOGY</b> .....	<b>6</b>
<b>1.4 TEST FACILITY</b> .....	<b>6</b>
<b>MEASUREMENT UNCERTAINTY</b> .....	<b>6</b>
<b>1.5 SPECIAL ACCESSORIES</b> .....	<b>6</b>
<b>1.6 WORST-CASE CONFIGURATION AND MODE</b> .....	<b>6</b>
<b>2. SYSTEM TEST CONFIGURATION</b> .....	<b>7</b>
<b>2.1 EUT CONFIGURATION</b> .....	<b>7</b>
<b>2.2 EUT EXERCISE</b> .....	<b>7</b>
<b>2.3 CONFIGURATION OF EUT SYSTEM</b> .....	<b>7</b>
<b>2.4 TEST SETUP</b> .....	<b>8</b>
<b>3.TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>9</b>
<b>4. OUTPUT POWER</b> .....	<b>10</b>
<b>4.1 OUTPUT POWER MEASUREMENT</b> .....	<b>10</b>
<b>6. BANDEDGE AND EMISSION MASK</b> .....	<b>13</b>
<b>7. OUT OF BAND EMISSIONS</b> .....	<b>14</b>
<b>7.1 MEASUREMENT METHOD</b> .....	<b>14</b>
<b>8. RADIATED MEASUREMENT</b> .....	<b>15</b>
<b>8.1. RADIATED POWER (ERP &amp; EIRP)</b> .....	<b>15</b>
<b>8.2 LTE BAND 2</b> .....	<b>16</b>
<b>8.3 LTE BAND 4</b> .....	<b>20</b>
<b>8.4 LTE BAND 5</b> .....	<b>24</b>

8.5 LTE BAND 7..... 26

8.6 LTE BAND 12 ..... 28

8.7 LTE BAND 17 ..... 30

9. SPURIOUS RADIATION EMISSION .....32

9.1 LTE BAND 2..... 34

9.2 LTE BAND 4..... 36

9.3 LTE BAND 5..... 37

9.4 LTE BAND 7..... 38

9.5 LTE BAND 12 ..... 39

9.6 LTE BAND 17 ..... 40

10. FREQUENCY STABILITY .....41

10.1 LTE BAND 2 ..... 42

10.2 LTE BAND 4 ..... 44

10.3 LTE BAND 5 ..... 46

10.4 LTE BAND 7 ..... 48

10.5 LTE BAND 12 ..... 50

10.6 LTE BAND 17 ..... 52

11. PEAK-TO-AVERAGE RATIO.....54

11.1 Description of the PAR Measurement..... 54

11.2 Measuring Instruments ..... 54

11.3 Test Procedures..... 54

11.4 Test Setup..... 54

# 1. GENERAL INFORMATION

## 1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smart Phone
Trade Mark	OUKITEL
Model Name	K13 Pro
Family Model	N/A
Model Difference	N/A
FCC ID:	2ANMU-K13PRO
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 2,4,5,7,12,17
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, Downlink: 729MHz-746MHz; LTE FDD Band 17 Uplink: 704MHz-716MHz, Downlink: 734MHz-746MHz;
Type of Modulation:	QPSK/16QAM
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	FPC Antenna
Antenna gain:	1.5dBi
Power Supply:	DC 3.85V/10100mAh from battery or DC 5V from USB port.
Adapter:	Model: HJ-050600K9-US Input: 100-240V~50/60Hz 0.8A Output: 5V---6.0A
Extreme Vol. Limits:	DC 3.4V to DC 4.4V (Nominal DC 3.85V) (Note 1)
HW Version	HCT-M861MB-B1
SW Version	OUKITEL_K13_Pro_EEA_V09_20190614
** Note1: The High Voltage DC 4.4V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

## 1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ANMU-K13PRO** filing to comply with the FCC Part 22H&24E &27.

## 1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

## 1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

## MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	2.5dB

## 1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

## 1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7, Band 12, Band 17.

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission’s requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Smart Phone	K13 Pro	FCC ID: 2ANMU-K13PRO	EUT


*Note: All the accessories have been used during the test.  
the following “EUT” in setup diagram means EUT system.*

**2.4 TEST SETUP**

**CONDUCTED SETUP DIAGRAM FOR TESTS**

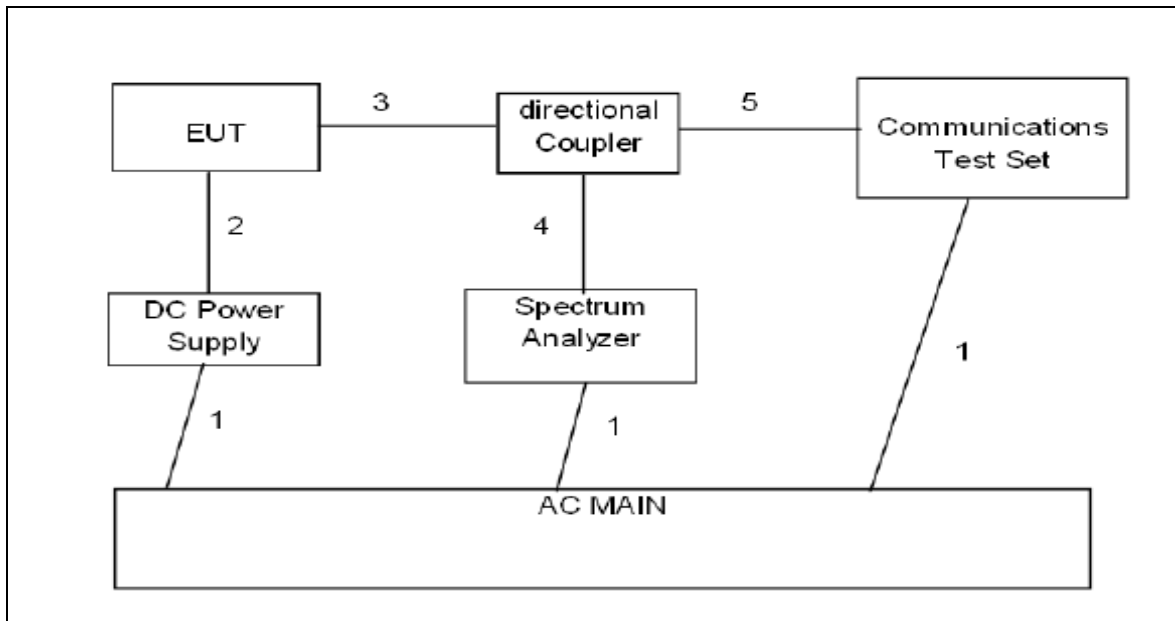

**RADIATED SETUP DIAGRAM FOR TESTS**

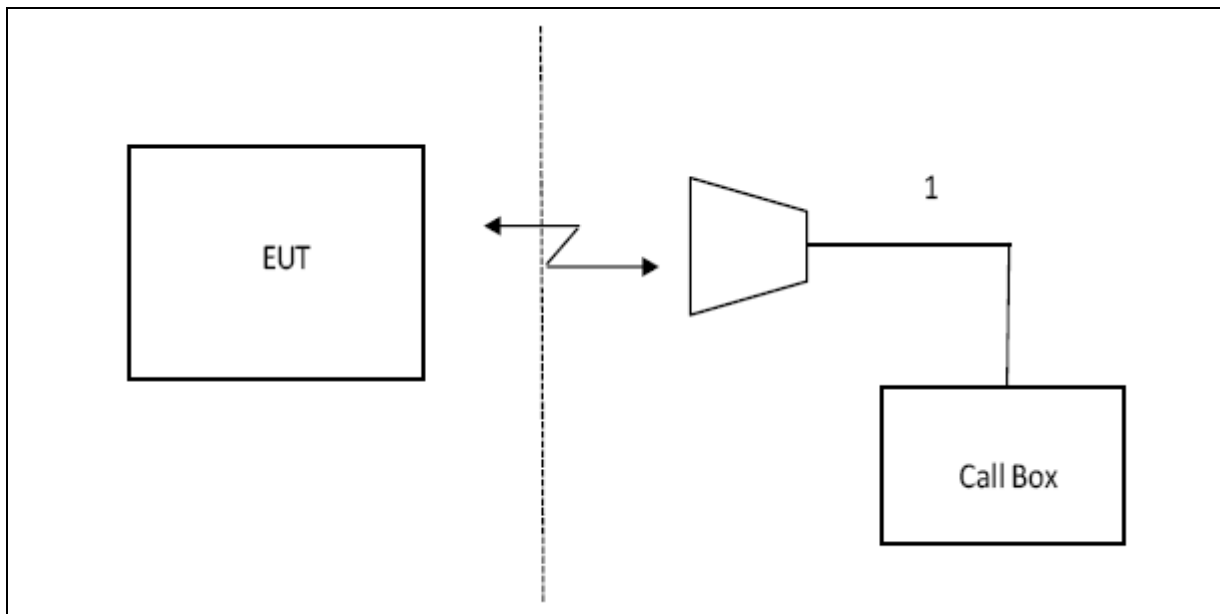



### 3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	N9020A	MY49100060	2019.10.07
TEST RECEIVER	R&S	ESCI	101318	2020.05.12
COMMUNICATION TESTER	R&S	CMU200	117858	2020.05.12
COMMUNICATION TESTER	R&S	CMW500	148500	2020.05.12
TEST RECEIVER	R&S	FCKL1528	A0304230	2020.05.12
LISN	SCHWARZBECK	NSLK8127	A0304233	2020.05.12
CLIMATE CHAMBER	ALBATROSS	--	--	2020.05.12
Loop Antenna	Daze	ZN30900N	SEL0097	2020.05.12
Biological Antenna	A.H. Systems Inc.	SAS-521-4	N/A	2020.05.12
Horn Antenna	EM	EM-AH-10180	2011071402	2020.05.12
DC Power Source	N/A	PS-6005D	20170402923	2020.05.12

## 4. OUTPUT POWER

### 4.1 OUTPUT POWER MEASUREMENT

#### LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".3

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 <sup>1</sup>	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

## 5. OCCUPIED BANDWIDTH

### RULE PART(S)

FCC: §2.1049

### LIMITS

For reporting purposes only

### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

### MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17

### RESULTS

**PASS**

Test data reference attachment.

## 6. BANDEDGE AND EMISSION MASK

### RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53, and §90.691

FCC: §22.359

### LIMITS

FCC: §22.359, §24.238,

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

### TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency (704, 716, 824, 849, 1710 and 1755, 1850 and 1910MHz)

Set a marker to point the corresponding band edge frequency in each test case.

Set display line at -13 dBm

Set resolution bandwidth to at least 1% of emission bandwidth.

### MODES TESTED

LTE Band 2

LTE Band 4

LTE Band 5

LTE Band 7

LTE Band 12

LTE Band 17

### RESULTS

Test data reference attachment.

## 7. OUT OF BAND EMISSIONS

### RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238 and §27.53

### LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

Set display line at -13 dBm

Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

### **MODES TESTED**

LTE Band 2

LTE Band 4

LTE Band 5

LTE Band 7

LTE Band 12

LTE Band 17

### 7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

## 8. RADIATED MEASUREMENT

### 8.1. RADIATED POWER (ERP & EIRP)

#### RULE PART(S)

FCC: §2.1046, §22.913, §24.232 and §27.50

#### LIMITS:

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

#### TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

#### MODES TESTED

LTE Band 2  
LTE Band 4  
LTE Band 5  
LTE Band 7  
LTE Band 12  
LTE Band 17

#### RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB SIZE/RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/Mid	1850.7	-2.57	3.76	28.24	21.91	155.334	Horizontal	Pass
		1880	-2.70	3.91	28.22	21.61	145.031	Horizontal	Pass
		1909.3	-2.89	3.93	28.20	21.38	137.380	Horizontal	Pass
3.0MHz Band QPSK	1/Mid	1851.5	-2.67	3.77	28.23	21.79	151.025	Horizontal	Pass
		1880	-2.87	3.91	28.24	21.46	139.948	Horizontal	Pass
		1908.5	-2.56	3.94	28.25	21.75	149.708	Horizontal	Pass
5.0MHz Band QPSK	1/Mid	1852.5	-3.31	3.77	28.31	21.23	132.691	Horizontal	Pass
		1880	-2.83	3.91	28.22	21.48	140.552	Horizontal	Pass
		1907.5	-3.36	3.94	28.20	20.90	122.973	Horizontal	Pass
10.0MHz z Band QPSK	1/Mid	1855	-3.43	3.79	28.33	21.11	129.041	Horizontal	Pass
		1880	-3.07	3.95	28.22	21.20	131.738	Horizontal	Pass
		1905	-2.69	3.97	28.19	21.53	142.204	Horizontal	Pass
15.0MHz z Band QPSK	1/Mid	1857.5	-2.67	3.79	28.34	21.88	154.063	Horizontal	Pass
		1880	-2.37	3.95	28.22	21.90	154.788	Horizontal	Pass
		1902.5	-2.91	3.97	28.18	21.30	134.817	Horizontal	Pass
20.0MHz z Band QPSK	1/ Mid	1860	-3.59	3.81	28.35	20.95	124.435	Horizontal	Pass
		1880	-2.93	3.96	28.22	21.33	135.972	Horizontal	Pass
		1900	-2.28	4.00	28.16	21.88	154.197	Horizontal	Pass
1.4MHz Band QPSK	1/ Mid	1850.7	-2.86	3.76	28.24	21.62	145.123	Vertical	Pass
		1880	-2.79	3.91	28.22	21.52	141.776	Vertical	Pass
		1909.3	-3.10	3.93	28.20	21.17	130.892	Vertical	Pass
3.0MHz Band QPSK	1/ Mid	1851.5	-2.91	3.77	28.23	21.55	142.922	Vertical	Pass
		1880	-2.26	3.91	28.24	22.07	160.919	Vertical	Pass
		1908.5	-2.38	3.94	28.25	21.93	155.992	Vertical	Pass
5.0MHz Band QPSK	1/Mid	1852.5	-3.06	3.77	28.31	21.48	140.734	Vertical	Pass
		1880	-2.64	3.91	28.22	21.67	146.982	Vertical	Pass
		1907.5	-3.22	3.94	28.20	21.04	127.091	Vertical	Pass
10.0MHz z Band	1/ Mid	1855	-2.63	3.79	28.33	21.91	155.223	Vertical	Pass
		1880	-2.96	3.95	28.22	21.31	135.317	Vertical	Pass



QPSK		1905	-3.19	3.97	28.19	21.03	126.624	Vertical	Pass
15.0MHz z Band QPSK	1/ Mid	1857.5	-3.05	3.79	28.34	21.50	141.229	Vertical	Pass
		1880	-2.40	3.95	28.22	21.87	153.990	Vertical	Pass
		1902.5	-2.49	3.97	28.18	21.72	148.526	Vertical	Pass
20.0MHz z Band QPSK	1/ Mid	1860	-2.22	3.81	28.35	22.32	170.608	Vertical	Pass
		1880	-2.11	3.96	28.22	22.15	164.059	Vertical	Pass
		1900	-2.10	4.00	28.16	22.06	160.694	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2									
Mode	RB SIZE/RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/ Mid	1850.7	-4.11	3.76	28.24	20.37	108.792	Horizontal	Pass
		1880	-3.71	3.91	28.22	20.60	114.714	Horizontal	Pass
		1909.3	-3.51	3.93	28.20	20.76	119.082	Horizontal	Pass
3.0MHz Band 16 QAM	1/ Mid	1851.5	-4.33	3.77	28.23	20.13	102.921	Horizontal	Pass
		1880	-3.93	3.91	28.24	20.40	109.757	Horizontal	Pass
		1908.5	-4.05	3.94	28.25	20.26	106.201	Horizontal	Pass
5.0MHz Band 16 QAM	1/ Mid	1852.5	-3.94	3.77	28.31	20.60	114.809	Horizontal	Pass
		1880	-3.36	3.91	28.22	20.95	124.506	Horizontal	Pass
		1907.5	-4.14	3.94	28.20	20.12	102.778	Horizontal	Pass
10.0MHz Band 16 QAM	1/ Mid	1855	-3.74	3.79	28.33	20.80	120.298	Horizontal	Pass
		1880	-3.28	3.95	28.22	20.99	125.697	Horizontal	Pass
		1905	-3.39	3.97	28.19	20.83	121.006	Horizontal	Pass
15.0MHz Band 16 QAM	1/ Mid	1857.5	-4.11	3.79	28.34	20.44	110.653	Horizontal	Pass
		1880	-4.13	3.95	28.22	20.14	103.370	Horizontal	Pass
		1902.5	-3.42	3.97	28.18	20.79	120.021	Horizontal	Pass
20.0MHz Band 16 QAM	1/ Mid	1860	-4.08	3.81	28.35	20.46	111.293	Horizontal	Pass
		1880	-3.94	3.96	28.22	20.32	107.604	Horizontal	Pass
		1900	-4.10	4.00	28.16	20.06	101.504	Horizontal	Pass
1.4MHz Band 16 QAM	1/ Mid	1850.7	-3.61	3.76	28.24	20.87	122.281	Vertical	Pass
		1880	-3.75	3.91	28.22	20.56	113.847	Vertical	Pass
		1909.3	-3.37	3.93	28.20	20.90	123.065	Vertical	Pass
3.0MHz Band 16 QAM	1/ Mid	1851.5	-4.45	3.77	28.23	20.01	100.331	Vertical	Pass
		1880	-3.55	3.91	28.24	20.78	119.647	Vertical	Pass
		1908.5	-3.98	3.94	28.25	20.33	107.914	Vertical	Pass
5.0MHz Band 16 QAM	1/ Mid	1852.5	-4.06	3.77	28.31	20.48	111.624	Vertical	Pass
		1880	-4.12	3.91	28.22	20.19	104.363	Vertical	Pass
		1907.5	-3.49	3.94	28.20	20.77	119.390	Vertical	Pass
10.0MHz Band 16 QAM	1/ Mid	1855	-4.28	3.79	28.33	20.26	106.161	Vertical	Pass
		1880	-3.90	3.95	28.22	20.37	108.956	Vertical	Pass
		1905	-4.07	3.97	28.19	20.15	103.493	Vertical	Pass
15.0MHz Band 16	1/ Mid	1857.5	-3.80	3.79	28.34	20.75	118.838	Vertical	Pass
		1880	-3.63	3.95	28.22	20.64	115.791	Vertical	Pass

QAM		1902.5	-3.89	3.97	28.18	20.32	107.630	Vertical	Pass
20.0MHz	1/ Mid	1860	-2.56	3.81	28.35	21.98	157.761	Vertical	Pass
Band 16		1880	-3.20	3.96	28.22	21.06	127.644	Vertical	Pass
QAM		1900	-2.44	4.00	28.16	21.72	148.594	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB SIZE/RB Position	Frequency	Result					Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)		
1.4MHz Band QPSK	1/ Mid	1710.7	-3.13	3.12	27.58	21.33	135.771	Horizontal	Pass
		1732.5	-3.46	3.27	27.61	20.88	122.447	Horizontal	Pass
		1754.3	-3.10	3.29	27.63	21.24	133.199	Horizontal	Pass
3.0MHz Band QPSK	1/ Mid	1711.5	-3.49	3.13	27.61	20.99	125.635	Horizontal	Pass
		1732.5	-2.58	3.27	27.61	21.76	149.798	Horizontal	Pass
		1753.5	-2.65	3.30	27.62	21.67	146.743	Horizontal	Pass
5.0MHz Band QPSK	1/ Mid	1712.5	-3.14	3.13	27.63	21.36	136.875	Horizontal	Pass
		1732.5	-2.48	3.27	27.61	21.86	153.523	Horizontal	Pass
		1752.5	-2.16	3.30	27.60	22.14	163.644	Horizontal	Pass
10.0MHz Band QPSK	1/ Mid	1715	-3.19	3.15	27.64	21.30	134.834	Horizontal	Pass
		1732.5	-2.50	3.31	27.61	21.80	151.335	Horizontal	Pass
		1750	-3.14	3.33	27.59	21.12	129.329	Horizontal	Pass
15.0MHz Band QPSK	1/ Mid	1717.5	-3.53	3.15	27.65	20.97	125.031	Horizontal	Pass
		1732.5	-2.76	3.31	27.61	21.54	142.494	Horizontal	Pass
		1747.5	-2.28	3.33	27.57	21.96	157.132	Horizontal	Pass
20.0MHz Band QPSK	1/ Mid	1720	-3.26	3.17	27.66	21.23	132.777	Horizontal	Pass
		1732.5	-2.47	3.32	27.61	21.82	152.217	Horizontal	Pass
		1745	-2.73	3.36	27.56	21.47	140.296	Horizontal	Pass
1.4MHz Band QPSK	1/ Mid	1710.7	-2.48	3.12	27.58	21.98	157.731	Vertical	Pass
		1732.5	-3.11	3.27	27.61	21.23	132.789	Vertical	Pass
		1754.3	-3.16	3.29	27.63	21.18	131.085	Vertical	Pass
3.0MHz Band QPSK	1/ Mid	1711.5	-2.50	3.13	27.61	21.98	157.658	Vertical	Pass
		1732.5	-2.75	3.27	27.61	21.59	144.097	Vertical	Pass
		1753.5	-3.19	3.30	27.62	21.13	129.593	Vertical	Pass
5.0MHz Band QPSK	1/ Mid	1712.5	-2.75	3.13	27.63	21.75	149.766	Vertical	Pass
		1732.5	-2.29	3.27	27.61	22.05	160.149	Vertical	Pass
		1752.5	-2.38	3.30	27.60	21.92	155.699	Vertical	Pass
10.0MHz Band QPSK	1/ Mid	1715	-3.22	3.15	27.64	21.27	134.118	Vertical	Pass
		1732.5	-2.41	3.31	27.61	21.89	154.581	Vertical	Pass
		1750	-2.77	3.33	27.59	21.49	141.053	Vertical	Pass

15.0MHz Band QPSK	1/ Mid	1717.5	-3.26	3.15	27.65	21.24	133.138	Vertical	Pass
		1732.5	-3.02	3.31	27.61	21.28	134.414	Vertical	Pass
		1747.5	-2.30	3.33	27.57	21.94	156.432	Vertical	Pass
20.0MHz Band QPSK	1/ Mid	1720	-2.38	3.17	27.66	22.11	162.555	Vertical	Pass
		1732.5	-2.25	3.32	27.61	22.04	159.956	Vertical	Pass
		1745	-2.16	3.36	27.56	22.04	159.956	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 4									
Mode	RB SIZE/RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/ Mid	1710.7	-4.13	3.12	27.58	20.33	107.869	Horizontal	Pass
		1732.5	-3.73	3.27	27.61	20.61	115.031	Horizontal	Pass
		1754.3	-4.23	3.29	27.63	20.11	102.473	Horizontal	Pass
3.0MHz Band 16 QAM	1/ Mid	1711.5	-4.97	3.13	27.61	19.51	89.311	Horizontal	Pass
		1732.5	-4.75	3.27	27.61	19.59	91.064	Horizontal	Pass
		1753.5	-4.64	3.30	27.62	19.68	92.859	Horizontal	Pass
5.0MHz Band 16 QAM	1/ Mid	1712.5	-5.24	3.13	27.63	19.26	84.303	Horizontal	Pass
		1732.5	-4.49	3.27	27.61	19.85	96.558	Horizontal	Pass
		1752.5	-4.11	3.30	27.60	20.19	104.435	Horizontal	Pass
10.0MHz Band 16 QAM	1/ Mid	1715	-4.09	3.15	27.64	20.40	109.750	Horizontal	Pass
		1732.5	-4.14	3.31	27.61	20.16	103.767	Horizontal	Pass
		1750	-3.55	3.33	27.59	20.71	117.783	Horizontal	Pass
15.0MHz Band 16 QAM	1/ Mid	1717.5	-3.83	3.15	27.65	20.67	116.630	Horizontal	Pass
		1732.5	-3.50	3.31	27.61	20.80	120.292	Horizontal	Pass
		1747.5	-3.56	3.33	27.57	20.68	117.049	Horizontal	Pass
20.0MHz Band 16 QAM	1/ Mid	1720	-4.44	3.17	27.66	20.05	101.114	Horizontal	Pass
		1732.5	-3.77	3.32	27.61	20.52	112.844	Horizontal	Pass
		1745	-3.41	3.36	27.56	20.79	119.872	Horizontal	Pass
1.4MHz Band 16 QAM	1/ Mid	1710.7	-3.64	3.12	27.58	20.82	120.771	Vertical	Pass
		1732.5	-3.71	3.27	27.61	20.63	115.483	Vertical	Pass
		1754.3	-4.05	3.29	27.63	20.29	107.026	Vertical	Pass
3.0MHz Band 16 QAM	1/ Mid	1711.5	-4.33	3.13	27.61	20.15	103.450	Vertical	Pass
		1732.5	-3.96	3.27	27.61	20.38	109.186	Vertical	Pass
		1753.5	-4.36	3.30	27.62	19.96	99.017	Vertical	Pass
5.0MHz Band 16 QAM	1/ Mid	1712.5	-4.65	3.13	27.63	19.85	96.510	Vertical	Pass
		1732.5	-3.97	3.27	27.61	20.37	108.890	Vertical	Pass
		1752.5	-4.49	3.30	27.60	19.81	95.733	Vertical	Pass
10.0MHz Band 16 QAM	1/ Mid	1715	-3.89	3.15	27.64	20.60	114.780	Vertical	Pass
		1732.5	-4.01	3.31	27.61	20.29	106.793	Vertical	Pass
		1750	-4.05	3.33	27.59	20.21	105.067	Vertical	Pass
15.0MHz Band 16	1/ Mid	1717.5	-3.65	3.15	27.65	20.85	121.718	Vertical	Pass
		1732.5	-4.15	3.31	27.61	20.15	103.446	Vertical	Pass

QAM		1747.5	-4.27	3.33	27.57	19.97	99.257	Vertical	Pass
20.0MHz	1/ Mid	1720	-3.43	3.17	27.66	21.06	127.644	Vertical	Pass
Band 16		1732.5	-3.18	3.32	27.61	21.11	129.122	Vertical	Pass
QAM		1745	-3.17	3.36	27.56	21.03	126.765	Vertical	Pass

**Note:**

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5											
Mode	RB SIZE/ RB Position	Frequency	Result							Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)			
1.4MHz Band QPSK	1/ Mid	824.7	4.63	2.01	19.68	2.15	20.15	103.514	Horizontal	Pass	
		836.5	4.65	2.01	19.77	2.15	20.26	106.170	Horizontal	Pass	
		848.3	4.51	2.02	19.82	2.15	20.16	103.753	Horizontal	Pass	
3.0MHz Band QPSK	1/ Mid	825.5	4.68	2.01	19.70	2.15	20.22	105.196	Horizontal	Pass	
		836.5	4.62	2.01	19.77	2.15	20.23	105.439	Horizontal	Pass	
		847.5	4.55	2.02	19.81	2.15	20.19	104.472	Horizontal	Pass	
5.0MHz Band QPSK	1/ Mid	826.5	4.56	2.01	19.71	2.15	20.11	102.565	Horizontal	Pass	
		836.5	4.60	2.01	19.77	2.15	20.21	104.954	Horizontal	Pass	
		846.5	4.54	2.02	19.79	2.15	20.16	103.753	Horizontal	Pass	
10.0MHz Band QPSK	1/ Mid	829	4.50	2.01	19.73	2.15	20.07	101.625	Horizontal	Pass	
		836.5	4.52	2.01	19.77	2.15	20.13	103.039	Horizontal	Pass	
		844	4.42	2.02	19.78	2.15	20.03	100.693	Horizontal	Pass	
1.4MHz Band QPSK	1/ Mid	824.7	4.70	2.01	19.68	2.15	20.22	105.196	Vertical	Pass	
		836.5	4.60	2.01	19.77	2.15	20.21	104.954	Vertical	Pass	
		848.3	4.47	2.02	19.82	2.15	20.12	102.802	Vertical	Pass	
3.0MHz Band QPSK	1/ Mid	825.5	4.71	2.01	19.70	2.15	20.25	105.925	Vertical	Pass	
		836.5	4.63	2.01	19.77	2.15	20.24	105.682	Vertical	Pass	
		847.5	4.72	2.02	19.81	2.15	20.36	108.643	Vertical	Pass	
5.0MHz Band QPSK	1/ Mid	826.5	4.46	2.01	19.71	2.15	20.01	100.231	Vertical	Pass	
		836.5	4.50	2.01	19.77	2.15	20.11	102.565	Vertical	Pass	
		846.5	4.51	2.02	19.79	2.15	20.13	103.039	Vertical	Pass	
10.0MHz Band QPSK	1/ Mid	829	5.19	2.01	19.73	2.15	20.76	119.124	Vertical	Pass	
		836.5	5.42	2.01	19.77	2.15	21.03	126.765	Vertical	Pass	
		844	4.90	2.02	19.78	2.15	20.51	112.460	Vertical	Pass	

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)



Radiated Power (ERP) for Band 5											
Mode	RB SIZE/ RB Position	Frequency	Result							Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)			
1.4MHz Band 16 QAM	1/ Mid	824.7	4.49	2.01	19.68	2.15	20.01	100.231	Horizontal	Pass	
		836.5	4.54	2.01	19.77	2.15	20.15	103.514	Horizontal	Pass	
		848.3	4.48	2.02	19.82	2.15	20.13	103.039	Horizontal	Pass	
3.0MHz Band 16 QAM	1/ Mid	825.5	4.72	2.01	19.70	2.15	20.26	106.170	Horizontal	Pass	
		836.5	4.63	2.01	19.77	2.15	20.24	105.682	Horizontal	Pass	
		847.5	4.47	2.02	19.81	2.15	20.11	102.565	Horizontal	Pass	
5.0MHz Band 16 QAM	1/ Mid	826.5	4.51	2.01	19.71	2.15	20.06	101.391	Horizontal	Pass	
		836.5	4.74	2.01	19.77	2.15	20.35	108.393	Horizontal	Pass	
		846.5	4.49	2.02	19.79	2.15	20.11	102.565	Horizontal	Pass	
10.0MHz z Band 16 QAM	1/ Mid	829	4.85	2.01	19.73	2.15	20.42	110.154	Horizontal	Pass	
		836.5	4.52	2.01	19.77	2.15	20.13	103.039	Horizontal	Pass	
		844	4.60	2.02	19.78	2.15	20.21	104.954	Horizontal	Pass	
1.4MHz Band 16 QAM	1/ Mid	824.7	4.70	2.01	19.68	2.15	20.22	105.196	Vertical	Pass	
		836.5	4.55	2.01	19.77	2.15	20.16	103.753	Vertical	Pass	
		848.3	4.59	2.02	19.82	2.15	20.24	105.682	Vertical	Pass	
3.0MHz Band 16 QAM	1/ Mid	825.5	4.77	2.01	19.70	2.15	20.31	107.399	Vertical	Pass	
		836.5	4.65	2.01	19.77	2.15	20.26	106.170	Vertical	Pass	
		847.5	4.52	2.02	19.81	2.15	20.16	103.753	Vertical	Pass	
5.0MHz Band 16 QAM	1/ Mid	826.5	4.67	2.01	19.71	2.15	20.22	105.196	Vertical	Pass	
		836.5	4.52	2.01	19.77	2.15	20.13	103.039	Vertical	Pass	
		846.5	4.64	2.02	19.79	2.15	20.26	106.170	Vertical	Pass	
10.0MHz z Band 16 QAM	1/ Mid	829	4.99	2.01	19.73	2.15	20.56	113.763	Vertical	Pass	
		836.5	4.55	2.01	19.77	2.15	20.16	103.753	Vertical	Pass	
		844	5.14	2.02	19.78	2.15	20.75	118.850	Vertical	Pass	

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB SIZE/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/ Mid	2502.5	-2.39	4.54	27.75	20.82	120.90	Vertical	Pass
		2535	-2.30	4.69	27.72	20.73	118.32	Vertical	Pass
		2567.5	-1.91	4.71	27.71	21.09	128.46	Vertical	Pass
5.0MHz Band 16 QAM	1/ Mid	2502.5	-4.01	4.54	27.75	19.20	83.23	Vertical	Pass
		2535	-3.06	4.69	27.72	19.97	99.41	Vertical	Pass
		2567.5	-3.70	4.71	27.71	19.30	85.13	Vertical	Pass
10.0MHz Band QPSK	1/ Mid	2505	-2.51	4.55	27.76	20.70	117.36	Vertical	Pass
		2535	-2.33	4.69	27.72	20.70	117.47	Vertical	Pass
		2565	-2.34	4.72	27.70	20.64	116.00	Vertical	Pass
10.0MHz Band 16 QAM	1/ Mid	2505	-3.34	4.55	27.76	19.87	97.09	Vertical	Pass
		2535	-3.56	4.69	27.72	19.47	88.49	Vertical	Pass
		2565	-3.90	4.72	27.70	19.08	80.89	Vertical	Pass
15.0MHz Band QPSK	1/ Mid	2507.5	-2.48	4.55	27.77	20.74	118.67	Vertical	Pass
		2535	-2.39	4.69	27.72	20.64	115.80	Vertical	Pass
		2562.5	-3.19	4.72	27.69	19.78	95.02	Vertical	Pass
15.0MHz Band 16 QAM	1/ Mid	2507.5	-3.78	4.55	27.77	19.44	87.98	Vertical	Pass
		2535	-4.07	4.69	27.72	18.96	78.68	Vertical	Pass
		2562.5	-3.30	4.72	27.69	19.67	92.71	Vertical	Pass
20.0MHz Band QPSK	1/0	2510	-2.42	4.57	27.78	20.79	119.97	Vertical	Pass
		2535	-2.67	4.73	27.72	20.32	107.54	Vertical	Pass
		2560	-2.25	4.75	27.68	20.68	116.89	Vertical	Pass
20.0MHz Band 16 QAM	1/ Mid	2510	-2.36	4.57	27.78	20.85	121.62	Vertical	Pass
		2535	-1.87	4.73	27.72	21.12	129.42	Vertical	Pass
		2560	-2.05	4.75	27.68	20.88	122.46	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 7									
Mode	RB SIZE/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/ Mid	2502.5	-2.60	4.54	27.75	20.61	114.984	Horizontal	Pass
		2535	-1.97	4.69	27.72	21.06	127.510	Horizontal	Pass
		2567.5	-2.59	4.71	27.71	20.41	109.843	Horizontal	Pass
5.0MHz Band 16 QAM	1/ Mid	2502.5	-3.40	4.54	27.75	19.81	95.710	Horizontal	Pass
		2535	-3.00	4.69	27.72	20.03	100.755	Horizontal	Pass
		2567.5	-2.65	4.71	27.71	20.35	108.340	Horizontal	Pass
10.0MHz Band QPSK	1/ Mid	2505	-2.30	4.55	27.76	20.91	123.339	Horizontal	Pass
		2535	-1.88	4.69	27.72	21.15	130.394	Horizontal	Pass
		2565	-2.33	4.72	27.70	20.65	116.186	Horizontal	Pass
10.0MHz Band 16 QAM	1/ Mid	2505	-3.03	4.55	27.76	20.18	104.176	Horizontal	Pass
		2535	-2.68	4.69	27.72	20.35	108.323	Horizontal	Pass
		2565	-3.28	4.72	27.70	19.70	93.254	Horizontal	Pass
15.0MHz Band QPSK	1/ Mid	2507.5	-1.93	4.55	27.77	21.29	134.645	Horizontal	Pass
		2535	-1.70	4.69	27.72	21.33	135.941	Horizontal	Pass
		2562.5	-2.22	4.72	27.69	20.75	118.719	Horizontal	Pass
15.0MHz Band 16 QAM	1/ Mid	2507.5	-2.82	4.55	27.77	20.40	109.739	Horizontal	Pass
		2535	-3.51	4.69	27.72	19.52	89.637	Horizontal	Pass
		2562.5	-3.00	4.72	27.69	19.97	99.198	Horizontal	Pass
20.0MHz Band QPSK	1/0	2510	-2.64	4.57	27.78	20.57	114.110	Horizontal	Pass
		2535	-2.42	4.73	27.72	20.57	114.042	Horizontal	Pass
		2560	-1.67	4.75	27.68	21.26	133.510	Horizontal	Pass
20.0MHz Band 16 QAM	1/ Mid	2510	-1.98	4.57	27.78	21.23	132.739	Horizontal	Pass
		2535	-1.93	4.73	27.72	21.06	127.644	Horizontal	Pass
		2560	-1.25	4.75	27.68	21.68	147.231	Horizontal	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 12

Radiated Power (ERP) for Band 12										
Mode	RB SIZE/ RB Position	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/ Mid	699.7	5.22	1.91	19.21	2.15	20.37	108.893	Vertical	Pass
		707.5	5.13	1.91	19.26	2.15	20.33	107.895	Vertical	Pass
		715.3	5.03	1.93	19.34	2.15	20.29	106.905	Vertical	Pass
3.0MHz Band QPSK	1/ Mid	700.5	4.99	1.91	19.21	2.15	20.14	103.276	Vertical	Pass
		707.5	5.01	1.91	19.26	2.15	20.21	104.954	Vertical	Pass
		714.5	4.90	1.93	19.34	2.15	20.16	103.753	Vertical	Pass
5.0MHz Band QPSK	1/ Mid	701.5	5.05	1.91	19.23	2.15	20.22	105.196	Vertical	Pass
		707.5	5.05	1.91	19.26	2.15	20.25	105.852	Vertical	Pass
		713.5	4.90	1.92	19.33	2.15	20.16	103.753	Vertical	Pass
10.0MHz Band QPSK	1/ Mid	704	5.10	1.91	19.25	2.15	20.29	106.782	Vertical	Pass
		707.5	5.16	1.91	19.26	2.15	20.36	108.643	Vertical	Pass
		711	5.47	1.92	19.32	2.15	20.72	118.032	Vertical	Pass
1.4MHz Band QPSK	1/ Mid	699.7	5.07	1.91	19.21	2.15	20.22	105.196	Horizontal	Pass
		707.5	5.22	1.91	19.26	2.15	20.42	110.154	Horizontal	Pass
		715.3	5.10	1.93	19.34	2.15	20.36	108.643	Horizontal	Pass
3.0MHz Band QPSK	1/ Mid	700.5	5.11	1.91	19.21	2.15	20.26	106.170	Horizontal	Pass
		707.5	4.98	1.91	19.26	2.15	20.18	104.232	Horizontal	Pass
		714.5	5.06	1.93	19.34	2.15	20.32	107.647	Horizontal	Pass
5.0MHz Band QPSK	1/ Mid	701.5	5.35	1.91	19.23	2.15	20.52	112.720	Horizontal	Pass
		707.5	5.01	1.91	19.26	2.15	20.21	104.954	Horizontal	Pass
		713.5	5.15	1.92	19.33	2.15	20.41	109.901	Horizontal	Pass
10.0MHz Band QPSK	1/ Mid	704	5.87	1.91	19.25	2.15	21.06	127.644	Horizontal	Pass
		707.5	5.52	1.91	19.26	2.15	20.72	118.032	Horizontal	Pass
		711	5.41	1.92	19.32	2.15	20.66	116.413	Horizontal	Pass

Radiated Power (EIRP) for Band 12										
Mode	RB SIZE/ RB Position	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/ Mid	699.7	4.96	1.91	19.21	2.15	20.11	102.565	Vertical	Pass
		707.5	4.75	1.91	19.26	2.15	19.95	98.855	Vertical	Pass
		715.3	4.77	1.93	19.34	2.15	20.03	100.693	Vertical	Pass
3.0MHz Band 16 QAM	1/ Mid	700.5	5.18	1.91	19.21	2.15	20.33	107.895	Vertical	Pass
		707.5	5.14	1.91	19.26	2.15	20.34	108.143	Vertical	Pass
		714.5	5.00	1.93	19.34	2.15	20.26	106.170	Vertical	Pass
5.0MHz Band 16 QAM	1/ Mid	701.5	5.25	1.91	19.23	2.15	20.42	110.154	Vertical	Pass
		707.5	5.24	1.91	19.26	2.15	20.44	110.662	Vertical	Pass
		713.5	5.10	1.92	19.33	2.15	20.36	108.643	Vertical	Pass
10.0MHz Band 16 QAM	1/ Mid	704	5.32	1.91	19.25	2.15	20.51	112.460	Vertical	Pass
		707.5	5.24	1.91	19.26	2.15	20.44	110.662	Vertical	Pass
		711	5.30	1.92	19.32	2.15	20.55	113.501	Vertical	Pass
1.4MHz Band 16 QAM	1/ Mid	699.7	5.01	1.91	19.21	2.15	20.16	103.753	Horizontal	Pass
		707.5	4.96	1.91	19.26	2.15	20.16	103.753	Horizontal	Pass
		715.3	4.96	1.93	19.34	2.15	20.22	105.196	Horizontal	Pass
3.0MHz Band 16 QAM	11/ Mid	700.5	5.22	1.91	19.21	2.15	20.37	108.893	Horizontal	Pass
		707.5	4.96	1.91	19.26	2.15	20.16	103.753	Horizontal	Pass
		714.5	5.17	1.93	19.34	2.15	20.43	110.408	Horizontal	Pass
5.0MHz Band 16 QAM	1/ Mid	701.5	5.21	1.91	19.23	2.15	20.38	109.144	Horizontal	Pass
		707.5	5.31	1.91	19.26	2.15	20.51	112.460	Horizontal	Pass
		713.5	5.18	1.92	19.33	2.15	20.44	110.662	Horizontal	Pass
10.0MHz Band 16 QAM	1/ Mid	704	5.57	1.91	19.25	2.15	20.76	119.124	Horizontal	Pass
		707.5	5.47	1.91	19.26	2.15	20.67	116.681	Horizontal	Pass
		711	5.24	1.92	19.32	2.15	20.49	111.944	Horizontal	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.7 LTE BAND 17

Radiated Power (ERP) for Band 17											
Mode	RB SIZE/ RB Position	Frequency	Result							Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)			
5.0MHz Band QPSK	1/ Mid	706.5	5.15	1.91	19.23	2.15	20.32	107.647	Vertical	Pass	
		710	5.13	1.91	19.26	2.15	20.33	107.895	Vertical	Pass	
		713.5	5.16	1.92	19.33	2.15	20.42	110.154	Vertical	Pass	
10.0MHz Band QPSK	1/ Mid	709	5.36	1.91	19.25	2.15	20.55	113.501	Vertical	Pass	
		710	5.46	1.91	19.26	2.15	20.66	116.413	Vertical	Pass	
		711	5.18	1.92	19.32	2.15	20.43	110.408	Vertical	Pass	
5.0MHz Band QPSK	1/ Mid	706.5	5.39	1.91	19.23	2.15	20.56	113.763	Horizontal	Pass	
		710	5.23	1.91	19.26	2.15	20.43	110.408	Horizontal	Pass	
		713.5	5.25	1.92	19.33	2.15	20.51	112.460	Horizontal	Pass	
10.0MHz Band QPSK	1/ Mid	709	5.62	1.91	19.25	2.15	20.81	120.504	Horizontal	Pass	
		710	5.56	1.91	19.26	2.15	20.76	119.124	Horizontal	Pass	
		711	5.43	1.92	19.32	2.15	20.68	116.950	Horizontal	Pass	

Radiated Power (ERP) for Band 17										
Mode	RB SIZE/ RB Position	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/ Mid	706.5	5.19	1.91	19.23	2.15	20.36	108.643	Vertical	Pass
		710	5.13	1.91	19.26	2.15	20.33	107.895	Vertical	Pass
		713.5	5.09	1.92	19.33	2.15	20.35	108.393	Vertical	Pass
10.0MHz Band 16 QAM	1/ Mid	709	5.07	1.91	19.25	2.15	20.26	106.170	Vertical	Pass
		710	4.95	1.91	19.26	2.15	20.15	103.514	Vertical	Pass
		711	4.99	1.92	19.32	2.15	20.24	105.682	Vertical	Pass
5.0MHz Band 16 QAM	1/ Mid	706.5	5.05	1.91	19.23	2.15	20.22	105.196	Horizontal	Pass
		710	5.14	1.91	19.26	2.15	20.34	108.143	Horizontal	Pass
		713.5	5.10	1.92	19.33	2.15	20.36	108.643	Horizontal	Pass
10.0MHz Band 16 QAM	1/ Mid	709	5.56	1.91	19.25	2.15	20.75	118.850	Horizontal	Pass
		710	5.38	1.91	19.26	2.15	20.58	114.288	Horizontal	Pass
		711	5.30	1.92	19.32	2.15	20.55	113.501	Horizontal	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

## 9. SPURIOUS RADIATION EMISSION

### RULE PART(S)

FCC: §2.1053, §22.917, §24.238 and §27.53

### LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

§27.53 (g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

### TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth ( i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.



The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than  $43 + 10 \text{ Log}_{10}(p)$ , dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than  $43 + 10 \text{ Log}_{10}(p)$ , dB at the channel edges and  $55 + 10 \text{ Log}_{10}(p)$  at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

**MODES TESTED**

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17

**RESULTS**

PASS

**Below 1G:**

**QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)**

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
98.81	-62.47	1.81	19.20	-45.08	-13.00	-32.08	Horizontal
217.79	-63.40	1.82	19.31	-45.91	-13.00	-32.91	Vertical
114.34	-63.08	1.82	19.22	-45.68	-13.00	-32.68	Vertical
218.59	-62.43	1.81	19.24	-45.00	-13.00	-32.00	Horizontal
Test Results for Mid Channel 1880MHz							
41.87	-64.71	1.81	18.11	-48.41	-13.00	-35.41	Horizontal
98.81	-62.72	1.91	19.20	-45.43	-13.00	-32.43	Vertical
418.04	-63.33	1.91	19.34	-45.90	-13.00	-32.90	Vertical
538.76	-63.54	1.91	19.21	-46.24	-13.00	-33.24	Horizontal
Test Results for High Channel 1909.3MHz							
96.11	-61.08	1.91	19.20	-43.79	-13.00	-30.79	Horizontal
222.02	-60.43	1.92	19.33	-43.02	-13.00	-30.02	Vertical
383.12	-60.63	1.91	19.22	-43.32	-13.00	-30.32	Vertical
580.40	-60.64	1.91	19.21	-43.34	-13.00	-30.34	Horizontal

**Note:**

1. Pre-test tests all modes, only the worst mode data is recorded in the report
2. All other emissions more than 20dB below the limit

**Above 1G:**

**9.1 LTE BAND 2**

**QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)**

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-57.56	4.04	33.51	-28.09	-13	-15.09	Horizontal
3701.4	-56.34	4.04	33.51	-26.87	-13	-13.87	Vertical
5552.1	-57.54	5.24	35.84	-26.94	-13	-13.94	Vertical
5552.1	-58.33	5.24	35.84	-27.73	-13	-14.73	Horizontal
Test Results for Mid Channel 1880MHz							
3760	-58.14	4.04	33.56	-28.62	-13	-15.62	Horizontal
3760	-55.33	4.04	33.56	-25.81	-13	-12.81	Vertical
5640	-56.73	5.24	35.91	-26.06	-13	-13.06	Vertical
5640	-57.68	5.24	35.91	-27.01	-13	-14.01	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-59.16	4.04	34.00	-29.20	-13	-16.20	Horizontal
3818.6	-57.47	4.04	34.00	-27.51	-13	-14.51	Vertical
5727.9	-57.73	5.24	36.04	-26.93	-13	-13.93	Vertical
5727.9	-56.69	5.24	36.04	-25.89	-13	-12.89	Horizontal

**QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)**

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720	-56.74	4.07	33.54	-27.27	-13	-14.27	Horizontal
3720	-56.47	4.07	33.54	-27.00	-13	-14.00	Vertical
5580	-56.47	5.28	35.86	-25.89	-13	-12.89	Vertical
5580	-57.44	5.28	35.86	-26.86	-13	-13.86	Horizontal
Test Results for Mid Channel 1880MHz							
3760	-57.63	4.04	33.56	-28.11	-13	-15.11	Horizontal
3760	-57.44	4.04	33.56	-27.92	-13	-14.92	Vertical
5640	-56.37	5.24	35.91	-25.70	-13	-12.70	Vertical
5640	-56.21	5.24	35.91	-25.54	-13	-12.54	Horizontal
Test Results for High Channel 1900MHz							
3800	-56.32	4.04	34.00	-26.36	-13	-13.36	Horizontal
3800	-56.54	4.04	34.00	-26.58	-13	-13.58	Vertical
5700	-56.25	5.24	36.04	-25.45	-13	-12.45	Vertical
5700	-57.47	5.24	36.04	-26.67	-13	-13.67	Horizontal

Note:  $P_{Mea}(dBm) = Power(dBm) + ARpl (dBm)$   
 Over Limit =  $P_{Mea}(dBm) - Limit(dBm)$   
 We test both H direction and V direction, recorded worst case direction.

## 9.2 LTE BAND 4

### QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-53.65	4.02	29.80	-27.87	-13	-14.87	Horizontal
3421.4	-55.32	4.02	29.80	-29.54	-13	-16.54	Vertical
5132.1	-56.14	5.24	35.84	-25.54	-13	-12.54	Vertical
5132.1	-57.47	5.24	35.84	-26.87	-13	-13.87	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465	-54.46	4.03	30.00	-28.49	-13	-15.49	Horizontal
3465	-54.14	4.03	30.00	-28.17	-13	-15.17	Vertical
5197.5	-57.54	5.25	35.86	-26.93	-13	-13.93	Vertical
5197.5	-57.66	5.25	35.86	-27.05	-13	-14.05	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-55.47	4.05	30.01	-29.51	-13	-16.51	Horizontal
3508.6	-56.33	4.05	30.01	-30.37	-13	-17.37	Vertical
5262.9	-56.65	5.26	35.86	-26.05	-13	-13.05	Vertical
5262.9	-57.88	5.26	35.86	-27.28	-13	-14.28	Horizontal

### QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440	-57.43	4.02	29.80	-31.65	-13	-18.65	Horizontal
3440	-55.21	4.02	29.80	-29.43	-13	-16.43	Vertical
5160	-56.13	5.24	35.84	-25.53	-13	-12.53	Vertical
5160	-57.65	5.24	35.84	-27.05	-13	-14.05	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465	-54.37	4.03	30.00	-28.40	-13	-15.40	Horizontal
3465	-55.56	4.03	30.00	-29.59	-13	-16.59	Vertical
5197.5	-57.76	5.25	35.86	-27.15	-13	-14.15	Vertical
5197.5	-57.15	5.25	35.86	-26.54	-13	-13.54	Horizontal
Test Results for High Channel 1745MHz							
3490	-54.36	2.91	27.68	-29.59	-13	-16.59	Horizontal
3490	-55.66	2.91	27.68	-30.89	-13	-17.89	Vertical
5235	-58.36	5.26	35.86	-27.76	-13	-14.76	Vertical
5235	-57.14	5.26	35.86	-26.54	-13	-13.54	Horizontal

Note: P<sub>Mea</sub>(dBm)= Power(dBm)+ AR<sub>pl</sub> (dBm)  
 Over Limit= : P<sub>Mea</sub>(dBm)-Limit(dBm)  
 We test both H direction and V direction, recorded worst case direction.

### 9.3 LTE BAND 5

#### QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-52.16	2.78	27.50	-27.44	-13	-14.44	Horizontal
1649.4	-53.58	2.78	27.50	-28.86	-13	-15.86	Vertical
2474.1	-55.18	2.90	27.80	-30.28	-13	-17.28	Vertical
2474.1	-54.07	2.90	27.80	-29.17	-13	-16.17	Horizontal
Test Results For Mid Channel 836.5MHz							
1673	-56.62	2.80	27.48	-31.94	-13	-18.94	Horizontal
1673	-53.18	2.80	27.48	-28.50	-13	-15.50	Vertical
2509.5	-57.31	2.91	27.70	-32.52	-13	-19.52	Vertical
2509.5	-55.16	2.91	27.70	-30.37	-13	-17.37	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-54.09	2.82	27.43	-29.48	-13	-16.48	Horizontal
1696.6	-53.75	2.82	27.43	-29.14	-13	-16.14	Vertical
2544.9	-54.28	2.92	27.74	-29.46	-13	-16.46	Vertical
2544.9	-53.65	2.92	27.74	-28.83	-13	-15.83	Horizontal

#### QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658	-56.95	2.78	27.50	-32.23	-13	-19.23	Horizontal
1658	-55.08	2.78	27.50	-30.36	-13	-17.36	Vertical
2487	-57.68	2.90	27.80	-32.78	-13	-19.78	Vertical
2487	-52.76	2.90	27.80	-27.86	-13	-14.86	Horizontal
Test Results For Mid Channel 836.5MHz							
1673	-56.09	2.80	27.48	-31.41	-13	-18.41	Horizontal
1673	-53.06	2.80	27.48	-28.38	-13	-15.38	Vertical
2509.5	-58.92	2.91	27.70	-34.13	-13	-21.13	Vertical
2509.5	-57.33	2.91	27.70	-32.54	-13	-19.54	Horizontal
Test Results for High Channel 844MHz							
1688	-56.29	2.82	27.43	-31.68	-13	-18.68	Horizontal
1688	-55.15	2.82	27.43	-30.54	-13	-17.54	Vertical
2532	-57.58	2.92	27.74	-32.76	-13	-19.76	Vertical
2532	-55.08	2.92	27.74	-30.26	-13	-17.26	Horizontal

Note: P<sub>Mea</sub>(dBm)= Power(dBm)+ AR<sub>pl</sub> (dBm)  
 . Over Limit= : P<sub>Mea</sub>(dBm)-Limit(dBm)  
 . We test both H direction and V direction, recorded worst case direction.

### 9.4 LTE BAND 7

#### QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005	-84.37	5.23	35.81	-53.79	-25.00	-28.79	Horizontal
5005	-85.79	5.23	35.81	-55.21	-25.00	-30.21	Vertical
7507.5	-82.67	5.67	36.85	-51.49	-25.00	-26.49	Vertical
7507.5	-84.19	5.67	36.85	-53.01	-25.00	-28.01	Horizontal
Test Results for Mid Channel 2535MHz							
5070	-81.67	5.23	35.82	-51.08	-25.00	-26.08	Horizontal
5070	-83.42	5.23	35.82	-52.83	-25.00	-27.83	Vertical
7605	-82.72	5.67	36.85	-51.54	-25.00	-26.54	Vertical
7605	-83.61	5.67	36.85	-52.43	-25.00	-27.43	Horizontal
Test Results for High Channel 2567.5MHz							
5135	-85.69	5.24	35.83	-55.10	-25.00	-30.10	Horizontal
5135	-86.72	5.24	35.83	-56.13	-25.00	-31.13	Vertical
7702.5	-85.67	5.68	36.87	-54.48	-25.00	-29.48	Vertical
7702.5	-85.84	5.68	36.87	-54.65	-25.00	-29.65	Horizontal

#### QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020	-80.64	5.23	35.82	-50.05	-25.00	-25.05	Horizontal
5020	-82.41	5.23	35.82	-51.82	-25.00	-26.82	Vertical
7530	-82.67	5.67	36.86	-51.48	-25.00	-26.48	Vertical
7530	-84.51	5.67	36.86	-53.32	-25.00	-28.32	Horizontal
Test Results for Mid Channel 2535MHz							
5070	-83.67	5.23	35.82	-53.08	-25.00	-28.08	Horizontal
5070	-82.67	5.23	35.82	-52.08	-25.00	-27.08	Vertical
7605	-84.67	5.67	36.85	-53.49	-25.00	-28.49	Vertical
7605	-82.15	5.67	36.85	-50.97	-25.00	-25.97	Horizontal
Test Results for High Channel 2560MHz							
5120	-83.67	5.24	35.83	-53.08	-25.00	-28.08	Horizontal
5120	-81.67	5.24	35.83	-51.08	-25.00	-26.08	Vertical
7680	-83.01	5.70	36.88	-51.83	-25.00	-26.83	Vertical
7680	-80.67	5.70	36.88	-49.49	-25.00	-24.49	Horizontal

Note: P<sub>Mea</sub>(dBm)= Power(dBm)+ AR<sub>pl</sub> (dBm)

Over Limit= : P<sub>Mea</sub>(dBm)-Limit(dBm)

We test both H direction and V direction, recorded worst case direction.

9.5 LTE BAND 12

**QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)**

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-51.66	2.60	27.20	-27.06	-13	-14.06	Horizontal
1399.4	-53.46	2.60	27.20	-28.86	-13	-15.86	Vertical
2099.1	-52.35	2.85	27.54	-27.66	-13	-14.66	Vertical
2099.1	-53.46	2.85	27.54	-28.77	-13	-15.77	Horizontal
Test Results For Mid Channel 707.5MHz							
1415	-53.54	2.61	27.28	-28.87	-13	-15.87	Horizontal
1415	-52.27	2.61	27.28	-27.60	-13	-14.60	Vertical
2122.5	-53.34	2.87	27.59	-28.62	-13	-15.62	Vertical
2122.5	-53.77	2.87	27.59	-29.05	-13	-16.05	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-54.83	2.63	27.28	-30.18	-13	-17.18	Horizontal
1430.6	-56.26	2.63	27.28	-31.61	-13	-18.61	Vertical
2145.9	-54.15	2.88	27.60	-29.43	-13	-16.43	Vertical
2145.9	-53.45	2.88	27.60	-28.73	-13	-15.73	Horizontal

**QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)**

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408	-51.85	2.61	27.26	-27.20	-13	-14.20	Horizontal
1408	-55.07	2.61	27.26	-30.42	-13	-17.42	Vertical
2112	-53.97	2.87	27.58	-29.26	-13	-16.26	Vertical
2112	-54.58	2.87	27.58	-29.87	-13	-16.87	Horizontal
Test Results for Mid Channel 707.5MHz							
1415	-53.42	2.61	27.28	-28.75	-13	-15.75	Horizontal
1415	-55.47	2.61	27.28	-30.80	-13	-17.80	Vertical
2122.5	-54.72	2.87	27.59	-30.00	-13	-17.00	Vertical
2122.5	-55.64	2.87	27.59	-30.92	-13	-17.92	Horizontal
Test Results for High Channel 711MHz							
1422	-56.08	2.62	27.28	-31.42	-13	-18.42	Horizontal
1422	-55.67	2.62	27.28	-31.01	-13	-18.01	Vertical
2133	-56.28	2.87	27.60	-31.55	-13	-18.55	Vertical
2133	-54.27	2.87	27.60	-29.54	-13	-16.54	Horizontal

Note: P<sub>Mea</sub>(dBm)= Power(dBm)+ ARpl (dBm)

Over Limit= : P<sub>Mea</sub>(dBm)-Limit(dBm)

We test both H direction and V direction, recorded worst case direction.

### 9.6 LTE BAND 17

#### QPSK EIRP POWER FOR LTE BAND 17 (5MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1413	-53.16	2.61	27.28	-28.49	-13	-15.49	Horizontal
1413	-54.33	2.61	27.28	-29.66	-13	-16.66	Vertical
2119.5	-53.73	2.87	27.59	-29.01	-13	-16.01	Vertical
2119.5	-52.35	2.87	27.59	-27.63	-13	-14.63	Horizontal
Test Results For Mid Channel 710MHz							
1420	-52.63	2.62	27.30	-27.95	-13	-14.95	Horizontal
1420	-54.45	2.62	27.30	-29.77	-13	-16.77	Vertical
2130	-55.31	2.87	27.62	-30.56	-13	-17.56	Vertical
2130	-56.67	2.87	27.62	-31.92	-13	-18.92	Horizontal
Test Results for High Channel 713.5MHz							
1427	-55.85	2.66	27.28	-31.23	-13	-18.23	Horizontal
1427	-56.49	2.66	27.28	-31.87	-13	-18.87	Vertical
2140.5	-54.34	2.88	27.60	-29.62	-13	-16.62	Vertical
2140.5	-55.72	2.88	27.60	-31.00	-13	-18.00	Horizontal

#### QPSK EIRP POWER FOR LTE BAND 17 (10MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1418	-55.48	2.62	27.30	-30.80	-13	-17.80	Horizontal
1418	-52.71	2.62	27.30	-28.03	-13	-15.03	Vertical
2127	-54.66	2.87	27.62	-29.91	-13	-16.91	Vertical
2127	-55.73	2.87	27.62	-30.98	-13	-17.98	Horizontal
Test Results for Mid Channel 710MHz							
1420	-54.20	2.62	27.30	-29.52	-13	-16.52	Horizontal
1420	-51.64	2.62	27.30	-26.96	-13	-13.96	Vertical
2130	-54.73	2.87	27.62	-29.98	-13	-16.98	Vertical
2130	-52.94	2.87	27.62	-28.19	-13	-15.19	Horizontal
Test Results for High Channel 711MHz							
1422	-51.73	2.62	27.30	-27.05	-13	-14.05	Horizontal
1422	-52.35	2.62	27.30	-27.67	-13	-14.67	Vertical
2133	-53.64	2.87	27.62	-28.89	-13	-15.89	Vertical
2133	-56.57	2.87	27.62	-31.82	-13	-18.82	Horizontal

Note: P<sub>Mea</sub>(dBm)= Power(dBm)+ AR<sub>pl</sub> (dBm)



Over Limit= : P<sub>Mea</sub>(dBm)-Limit(dBm)

We test both H direction and V direction, recorded worst case direction.

## 10. FREQUENCY STABILITY

### RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

### LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. =  $-30^{\circ}$  to  $+50^{\circ}$ C

Voltage =low voltage, DC 3.4V, Normal, DC 3.85V and High voltage, DC 4.4V.

### Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to  $-30^{\circ}$ C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until  $+50^{\circ}$ C is reached.

### Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

### MODES TESTED

LTE Band 2

LTE Band 4

LTE Band 5

LTE Band 7

LTE Band 12

LTE Band 17

## RESULTS

See the following pages.

10.1 LTE BAND 2

QPSK, (20MHz BANDWIDTH)

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
3.4	1880	-17.60	-0.009362	2.5
3.85	1880	-17.61	-0.009365	2.5
4.4	1880	-17.41	-0.009259	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
Normal (25C)	1880	-17.65	-0.009390	2.5
Extreme (50C)	1880	-15.10	-0.008033	2.5
Extreme (40C)	1880	-16.09	-0.008558	2.5
Extreme (30C)	1880	-17.84	-0.009487	2.5
Extreme (10C)	1880	-17.98	-0.009565	2.5
Extreme (0C)	1880	-18.05	-0.009602	2.5
Extreme (-10C)	1880	-19.42	-0.010332	2.5
Extreme (-20C)	1880	-18.83	-0.010015	2.5
Extreme (-30C)	1880	-19.59	-0.010420	2.5

**16QAM, (20MHz BANDWIDTH)**

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
3.4	1880	-24.1	-0.012798	2.5
3.85	1880	-20.1	-0.010705	2.5
4.4	1880	-23.3	-0.012410	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
Normal (25C)	1880	-23.54	-0.012519	2.5
Extreme (50C)	1880	-25.30	-0.013457	2.5
Extreme (40C)	1880	-24.47	-0.013014	2.5
Extreme (30C)	1880	-23.16	-0.012319	2.5
Extreme (10C)	1880	-23.47	-0.012483	2.5
Extreme (0C)	1880	-22.70	-0.012074	2.5
Extreme (-10C)	1880	-22.24	-0.011828	2.5
Extreme (-20C)	1880	-21.75	-0.011572	2.5
Extreme (-30C)	1880	-21.44	-0.011406	2.5

\*Note: Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

QPSK, (10MHz BANDWIDTH)

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
3.4	1732.5	-16.54	-0.009545	2.5
3.85	1732.5	-16.60	-0.009583	2.5
4.4	1732.5	-16.60	-0.009583	2.5

**Frequency error vs. Temperature**

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
Normal (25C)	1732.5	-16.24	-0.009376	2.5
Extreme (50C)	1732.5	-17.72	-0.010226	2.5
Extreme (40C)	1732.5	-17.41	-0.010050	2.5
Extreme (30C)	1732.5	-18.01	-0.010393	2.5
Extreme (10C)	1732.5	-15.94	-0.009201	2.5
Extreme (0C)	1732.5	-15.53	-0.008962	2.5
Extreme (-10C)	1732.5	-15.68	-0.009051	2.5
Extreme (-20C)	1732.5	-19.68	-0.011360	2.5
Extreme (-30C)	1732.5	-17.87	-0.010317	2.5

**16QAM, (20MHz BANDWIDTH)**

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
3.4	1732.5	-16.84	-0.009720	2.5
3.85	1732.5	-18.14	-0.010469	2.5
4.4	1732.5	-17.20	-0.009929	2.5

**Frequency error vs. Temperature**

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
Normal (25C)	1732.5	-17.86	-0.010309	2.5
Extreme (50C)	1732.5	-14.56	-0.008405	2.5
Extreme (40C)	1732.5	-15.30	-0.008831	2.5
Extreme (30C)	1732.5	-16.93	-0.009771	2.5
Extreme (10C)	1732.5	-16.78	-0.009686	2.5
Extreme (0C)	1732.5	-17.08	-0.009859	2.5
Extreme (-10C)	1732.5	-14.62	-0.008442	2.5
Extreme (-20C)	1732.5	-16.58	-0.009569	2.5
Extreme (-30C)	1732.5	-16.55	-0.009553	2.5

**\*Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

QPSK, (10MHz BANDWIDTH)

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
3.4	836.5	-13.46	-0.016088	2.5
3.85	836.5	-13.38	-0.015997	2.5
4.4	836.5	-14.42	-0.017238	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
Normal (25C)	836.5	-13.69	-0.016372	2.5
Extreme (50C)	836.5	-14.18	-0.016953	2.5
Extreme (40C)	836.5	-13.96	-0.016685	2.5
Extreme (30C)	836.5	-14.24	-0.017028	2.5
Extreme (10C)	836.5	-13.76	-0.016453	2.5
Extreme (0C)	836.5	-12.68	-0.015154	2.5
Extreme (-10C)	836.5	-14.25	-0.017034	2.5
Extreme (-20C)	836.5	-17.57	-0.021007	2.5
Extreme (-30C)	836.5	-18.71	-0.022368	2.5

**16QAM, (10MHz BANDWIDTH)**

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
3.4	836.5	-13.87	-0.016584	2.5
3.85	836.5	-14.68	-0.017551	2.5
4.4	836.5	-14.88	-0.017791	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
Normal (25C)	836.5	-15.13	-0.018082	2.5
Extreme (50C)	836.5	-16.28	-0.019467	2.5
Extreme (40C)	836.5	-15.69	-0.018762	2.5
Extreme (30C)	836.5	-14.70	-0.017574	2.5
Extreme (10C)	836.5	-13.81	-0.016512	2.5
Extreme (0C)	836.5	-13.26	-0.015855	2.5
Extreme (-10C)	836.5	-14.87	-0.017777	2.5
Extreme (-20C)	836.5	-14.95	-0.017869	2.5
Extreme (-30C)	836.5	-14.06	-0.016805	2.5

**\*Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

QPSK, (20MHz BANDWIDTH)

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
3.4	2535	-13.84	-0.005461	2.5
3.85	2535	-14.20	-0.005603	2.5
4.4	2535	-15.15	-0.005975	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
Normal (25C)	2535	-14.85	-0.005859	2.5
Extreme (50C)	2535	-16.34	-0.006446	2.5
Extreme (40C)	2535	-16.07	-0.006341	2.5
Extreme (30C)	2535	-14.63	-0.005772	2.5
Extreme (10C)	2535	-14.18	-0.005592	2.5
Extreme (0C)	2535	-13.27	-0.005234	2.5
Extreme (-10C)	2535	-15.57	-0.006141	2.5
Extreme (-20C)	2535	-14.60	-0.005759	2.5
Extreme (-30C)	2535	-14.12	-0.005569	2.5



**16QAM, (20MHz BANDWIDTH)**

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
3.4	2535	-24.06	-0.009490	2.5
3.85	2535	-24.97	-0.009851	2.5
4.4	2535	-25.30	-0.009982	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)</b>				
Normal (25C)	2535	-28.33	-0.011177	2.5
Extreme (50C)	2535	-29.35	-0.011577	2.5
Extreme (40C)	2535	-30.96	-0.012213	2.5
Extreme (30C)	2535	-28.17	-0.011113	2.5
Extreme (10C)	2535	-28.67	-0.011308	2.5
Extreme (0C)	2535	-29.29	-0.011555	2.5
Extreme (-10C)	2535	-30.28	-0.011946	2.5
Extreme (-20C)	2535	-29.50	-0.011637	2.5
Extreme (-30C)	2535	-29.96	-0.011820	2.5

**\*Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

QPSK, (10MHz BANDWIDTH)

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
3.4	707.5	-4.05	-0.005729	2.5
3.85	707.5	-4.21	-0.005956	2.5
4.4	707.5	-3.73	-0.005267	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
Normal (25C)	707.5	-4.34	-0.006129	2.5
Extreme (50C)	707.5	-5.03	-0.007105	2.5
Extreme (40C)	707.5	-4.85	-0.006856	2.5
Extreme (30C)	707.5	-5.63	-0.007953	2.5
Extreme (10C)	707.5	-4.43	-0.006261	2.5
Extreme (0C)	707.5	-2.15	-0.003033	2.5
Extreme (-10C)	707.5	-4.67	-0.006601	2.5
Extreme (-20C)	707.5	-4.06	-0.005743	2.5
Extreme (-30C)	707.5	-5.29	-0.007480	2.5

**16QAM, (10MHz BANDWIDTH)**

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 12 16QAM, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
3.4	707.5	-10.16	-0.014359	2.5
3.85	707.5	-9.65	-0.013639	2.5
4.4	707.5	-10.07	-0.014237	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
Normal (25C)	707.5	-9.73	-0.013755	2.5
Extreme (50C)	707.5	-10.41	-0.014717	2.5
Extreme (40C)	707.5	-9.71	-0.013730	2.5
Extreme (30C)	707.5	-9.69	-0.013702	2.5
Extreme (10C)	707.5	-10.27	-0.014510	2.5
Extreme (0C)	707.5	-9.41	-0.013305	2.5
Extreme (-10C)	707.5	-10.47	-0.014795	2.5
Extreme (-20C)	707.5	-10.26	-0.014499	2.5
Extreme (-30C)	707.5	-9.72	-0.013735	2.5

**\*Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.6 LTE BAND 17

QPSK, (10MHz BANDWIDTH)

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
3.4	710.0	-12.24	-0.017241	2.5
3.85	710.0	-11.02	-0.015525	2.5
4.4	710.0	-11.59	-0.016322	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
Normal (25C)	710.0	-11.91	-0.016780	2.5
Extreme (50C)	710.0	-12.46	-0.017554	2.5
Extreme (40C)	710.0	-12.06	-0.016985	2.5
Extreme (30C)	710.0	-12.07	-0.017006	2.5
Extreme (10C)	710.0	-12.47	-0.017559	2.5
Extreme (0C)	710.0	-12.25	-0.017259	2.5
Extreme (-10C)	710.0	-11.65	-0.016414	2.5
Extreme (-20C)	710.0	-12.27	-0.017284	2.5
Extreme (-30C)	710.0	-12.08	-0.017011	2.5

**16QAM, (10MHz BANDWIDTH)**

**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 17 16QAM, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
3.4	710.0	-13.19	-0.018578	2.5
3.85	710.0	-13.63	-0.019197	2.5
4.4	710.0	-13.66	-0.019233	2.5

**Frequency error vs. Temperature**

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
<b>BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)</b>				
Normal (25C)	710.0	-13.08	-0.018420	2.5
Extreme (50C)	710.0	-14.19	-0.019985	2.5
Extreme (40C)	710.0	-14.27	-0.020097	2.5
Extreme (30C)	710.0	-12.98	-0.018278	2.5
Extreme (10C)	710.0	-13.79	-0.019425	2.5
Extreme (0C)	710.0	-14.18	-0.019972	2.5
Extreme (-10C)	710.0	-13.67	-0.019250	2.5
Extreme (-20C)	710.0	-13.18	-0.018565	2.5
Extreme (-30C)	710.0	-14.00	-0.019725	2.5

**\*Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

## 11. Peak-to-Average Ratio

### 11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 11.2 Measuring Instruments

See list of measuring instruments of this test report.

### 11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
  - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
  - b. Set EUT in maximum power output, and triggered the burst signal.
  - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

### 11.4 Test Setup

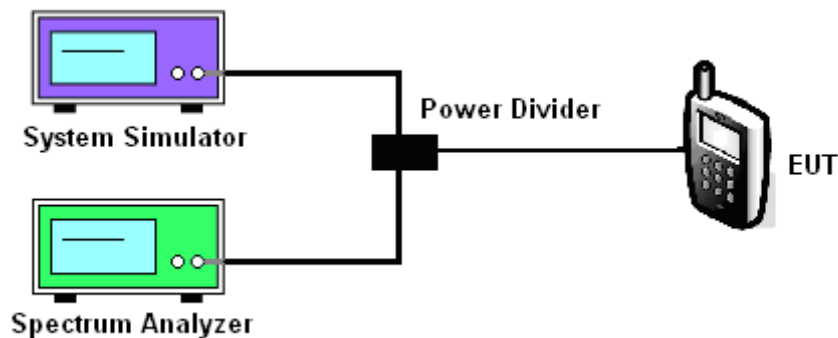

#### MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17

Test data reference attachment.

----END OF REPORT----