

Antenna Test report

Model Name: P10

Date: 10th Aug, 2023

Shenzhen ANWEI Technology Co., Ltd.

www.aw168.cn

Catalogue

CONTENTS

- 01 Project Introduction and Photos
- 02 Report Versions
- 03 Introduction of Company and Test Environment
- 004 Enviornment Test
- 05 Matching Circuit
- 06 Data of WIFI Antenna
- 07 Antenna Location
- 08 Conclusion

01.Project Introduction and Photos-Project Introduction

RF Engineer	WUXI	Email	303810988@qq.com
		Mobile	13751118278
Antenna Overview			
Status of Sample machine	Whole machine	Project Name	P10
Antenna Type	PIFA	Structure mode	FPC
Main Antenna	GSM850/900/1800/1900 WCDMA1/2/5/6/8/19 B1. 2. 3. 4. 5. 7. 8. 12. 13. 17. 18. 19. 20. 25. 26. 28. 66. 34. 38. 39. 40. 41 CDMA BC0/BC1/BC10		
Other Antenna	Diversity Three-in-one antenna		

02.Report Versions

Version	Report Time	Commissioning Overview
A0	2023.11.23	Antenna Test Report
A1		
A2		
A3		
A4		
A5		
A6		
A7		
A8		
A9		
A10		

03.Introduction of Company and Test Environment-Test Environment




The company owns several OTA darkrooms whose frequency bands covers from 400mhz to 8.5ghz.

☞ Providing OTA test for whole machine which include but not be limited to 5G NSA, SA(trp/tis), WiFi active test (supporting 11b/11g/11n/11ax mode), bluetooth/GPS active test

- ☞ Providing antenna gain and efficiency
- ☞ Providing 2D pattern / Apple chart analysis
- ☞ Providing upper and lower hemisphere efficiency
- ☞ Providing mutual interference correlation coefficient test items.


04. Enviornment Test

Location of
Tested
Machine

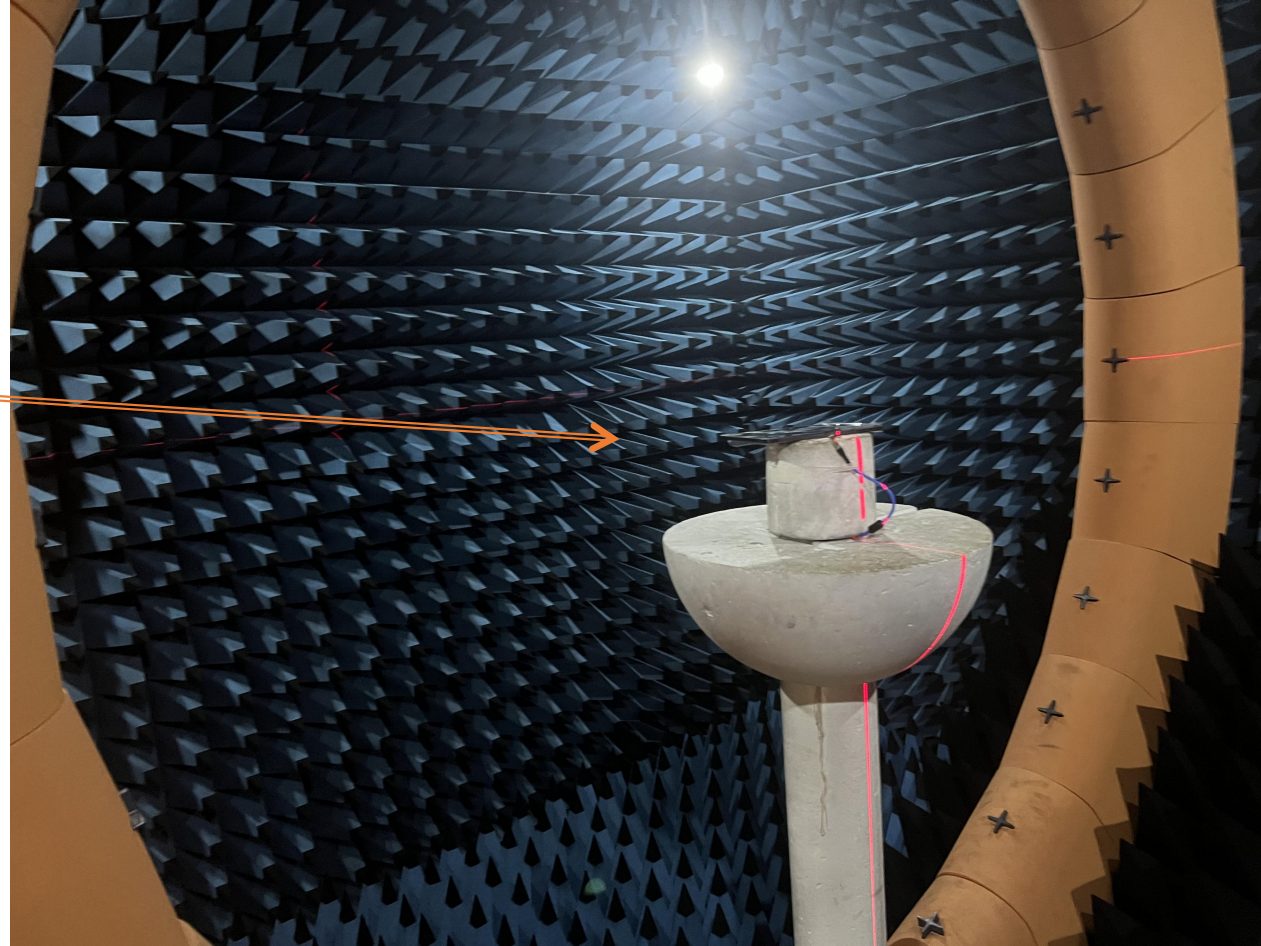

05. Antenna correlation data

	Channel	TRP (dBm)	TIS (dBm)		Channel	TRP (dBm)	TIS (dBm)	
GSM 850	128	28.24						
	190	28.04						
	251	28.46	-104.1					
GSM 900	1	28.67			W 1	LOW	17.12	
	62	28.35				medium	17.20	
	124	28.24	-103.5			high	17.24	-104.3
DCS 1800	512	25.04			W 2	LOW	17.07	
	698	25.16				medium	18.49	
	885	25.01	-103.6			high	17.18	-104.5
PCS 1900	512	25.13			W 5	LOW	17.34	
	661	25.48				medium	17.28	
	810	24.58	-103.4			high	17.64	-104.36
					W 6	LOW	18.26	
			medium			18.26		
			high			18.55	-103.5	
CDMA BC0	LOW	17.24			W 8	LOW	18.57	
	medium	17.32				medium	18.65	
	high	17.07	-103.3			high	18.45	-103.0
CDMA BC1	LOW	17.35			W 19	LOW	18.35	
	medium	17.59				medium	18.07	
	high	17.43	-103.0			high	18.54	-104.5
					W 4	LOW	18.54	
			medium			18.35		
			high			18.32	-104.1	

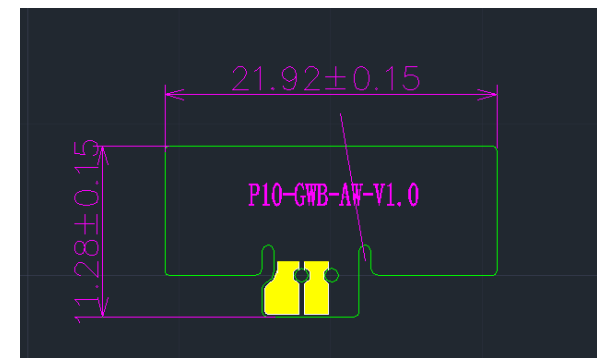

06. Antenna correlation data

Main antenna active data

	Channel	TRP (dBm)	TIS (dBm)			Channel	TRP (dBm)	TIS (dBm)			Channel	TRP (dBm)	TIS (dBm)	
FDD B1	18050	18.32		FDD B13	23780			FDD B28B	27410	17.35		FDD-66	132022	17.12
	18300	17.1			23790	17.31	-90.6		27510	17.01			132322	17.54
	18550	17.67	-91.5		23800				27600	17.32	-90.2		132622	17.67
FDD B2	18650	17.76		FDD B17	23780	17.52		TDD 34	38350	17.06		TDD 38	37850	18.43
	18900	17.59			23790	17.10			38450	17.18			38000	18.9
	19150	17.62	-91.6		23800	17.24	-90.4		38550	17.15	-91.3		38150	18.0
FDD B3	19250	16.83		FDD 18	23900	17.57		TDD 39	38350	18.51		TDD 40	38750	18.24
	19575	17.31			23925	17.49			38450	17.52			39150	18.24
	19900	17.1	-91.5		23950	17.18	-91		38550	17.79	-90.1		39550	18.71
FDD B4	20000	17.97		FDD-19	24050	17.34		TDD 41	40620	18.31	-90.2			
	20175	17.18			24075	17.28								
	20350	17.01	-91.5		24100	17.64	-91.5							
FDD B5	20450	17.23		FDD B20	24200	17.16								
	20525	18.01			24300	17.26								
	20600	18.02	-92.2		24400	17.15	-90.5							
FDD B7	20800	18.83		FDD-25	26090	18.15								
	21100	18.01			26365	17.52								
	21400	18.62	-91.5		26640	17.43	-90.4							
FDD B8	21500	18.23		FDD-26	26740	17.35								
	21625	18.51			26865	17.57								
	21750	18.32	-91.5		26990	17.59	-91.3							
FDD B12	23060	17.24		FDD B28A	27260	17.35								
	23095	17.35			27370	17.46								
	23130	17.87	-90.3		27469	17.54	-90.5							

07.GPS measured data

Show in single page

ID	CNR	ID	CNR	ID	CNR
G10	42.6/-/-/-/-	G12	38.3/-/-/-/-	G18	24.9/-/-/-/-
G23	29.3/-/-/-/-	G25	41.6/-/-/-/-	G28	35.0/-/-/-/-
G29	0.0/-/-/-/-	G31	0.0/-/-/-/-	R65	29.8/-/-/-/-
R71	41.7/-/-/-/-	R72	40.4/-/-/-/-	R74	27.0/-/-/-/-
R75	45.6/-/-/-/-	R81	42.5/-/-/-/-	R83	18.5/-/-/-/-
R88	33.1/-/-/-/-	B2	23.2/-/-/-/-	B3	0.0/-/-/-/-
B4	33.5/-/-/-/-	B9	24.8/-/-/-/-	B10	0.0/-/-/-/-
B13	40.8/-/-/-/-	B19	42.6/-/-/-/-	E9	37.6/-/-/-/-
E31	35.5/-/-/-/-	E34	31.7/-/-/-/-	E36	28.2/-/-/-/-
				Q4	45.0/-/-/-/-

08. WIFI active data







WIFI测试效果: OTA

BAND	2.4G WIFI			5.8WIFI		
CHANNEL	low	medium	high	low	medium	high
TRP (dBm)	12.35	11.55	11.67	10.67	10.55	11.07
TIS (dBm)	-81.5	-81.62	-81.04	-71.59	-71.54	-71.5





09. Antenna passive data

Gain		
Band	gain(dBi)	
LTE-B12/B17/B28 (704-798MHz)	-1.35	
GSM850,WCDMA-B5,LTE- B5/B18/B19/B20/B26 (824-894MHz)	-1.05	
GSM900,WCDMA-B8,LTE-B8 (880-960MHz)	-0.85	
DCS1800,WCDMA-B4,LTE- B4/B3/B25/B66 (1710-1880MHz)	1.3	
PCS1900,WCDMA-B2,LTE-B2/B39 (1850-1990MHz)	2.2	
WCDMA-B1,LTE-B1/B34 (1920-2170MHz)	1.8	
LTE-B7/B38/B41, (2500-2690MHz)	2.59	
LTE-B40 (2300-2400MHz)	2.32	
LTE-B13 (780MHz)	-1.2	
GPS (1575MHz)	1.2	
2.4G WIFI/BT	1.5	
5G WIFI	1.0	





11. Antenna correlation data

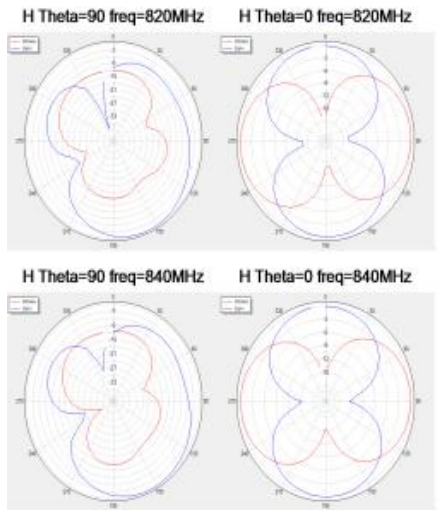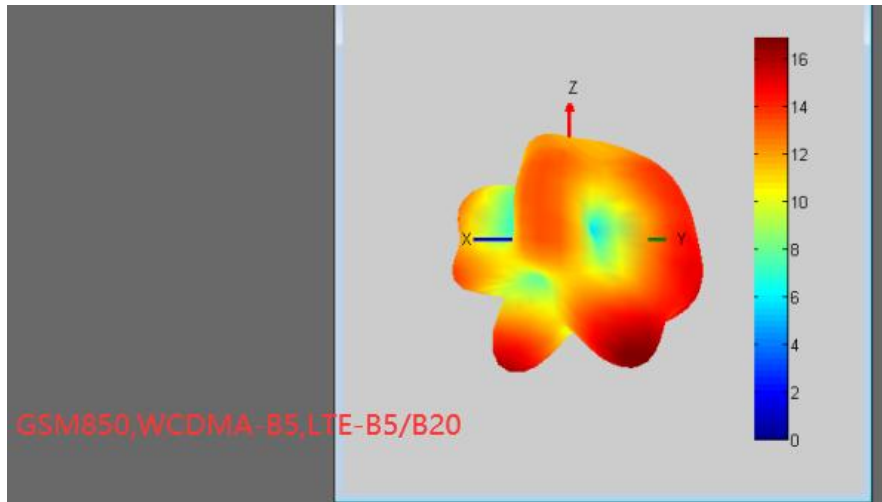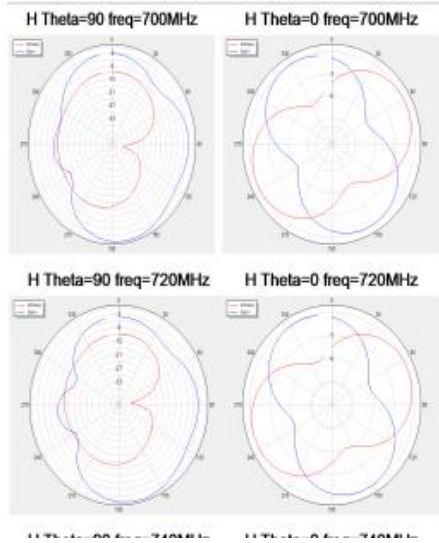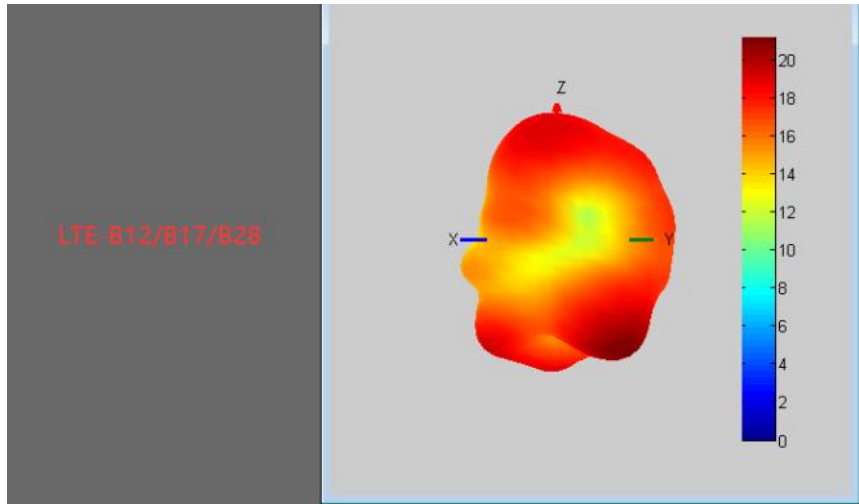



12. Antenna correlation data

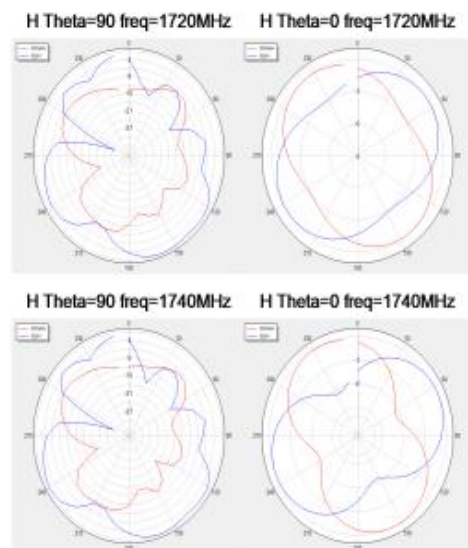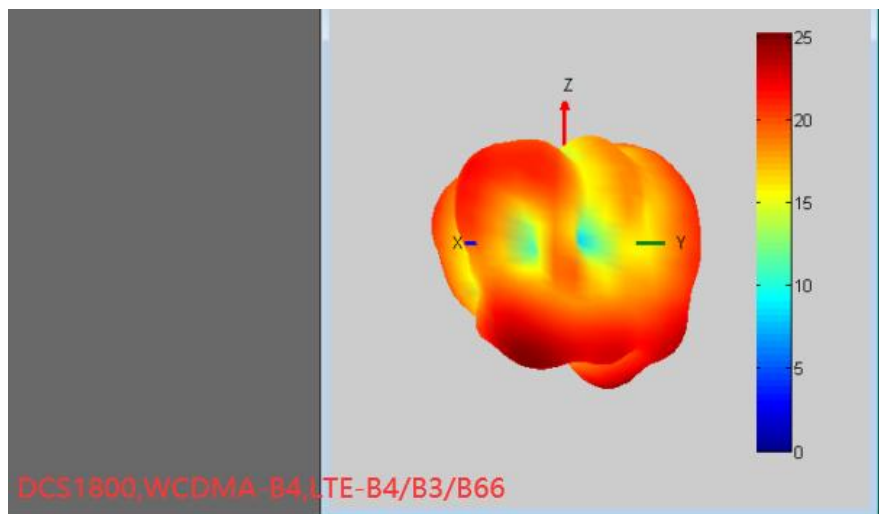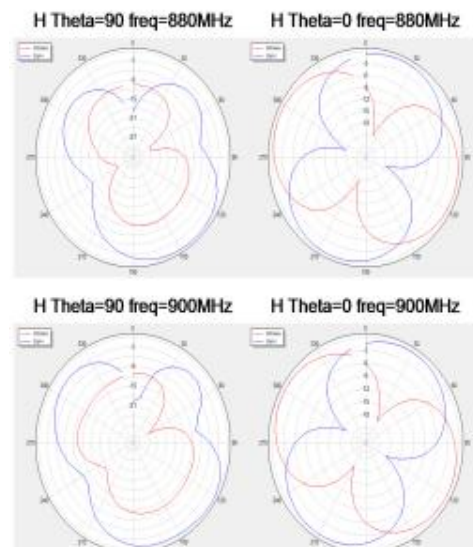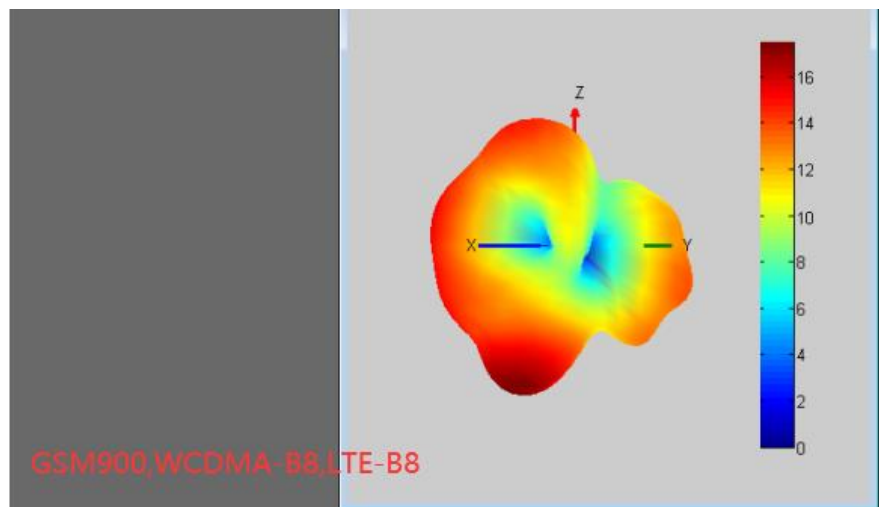



13. Antenna correlation data

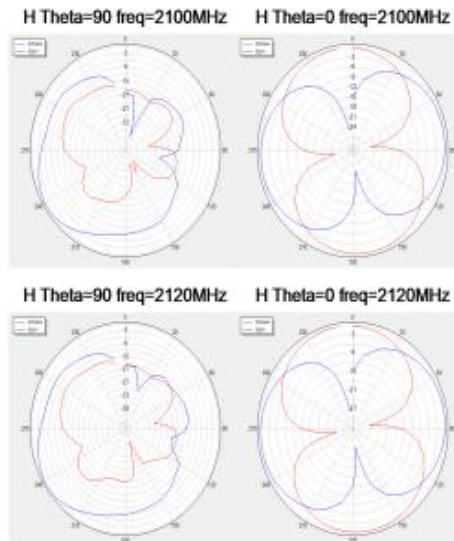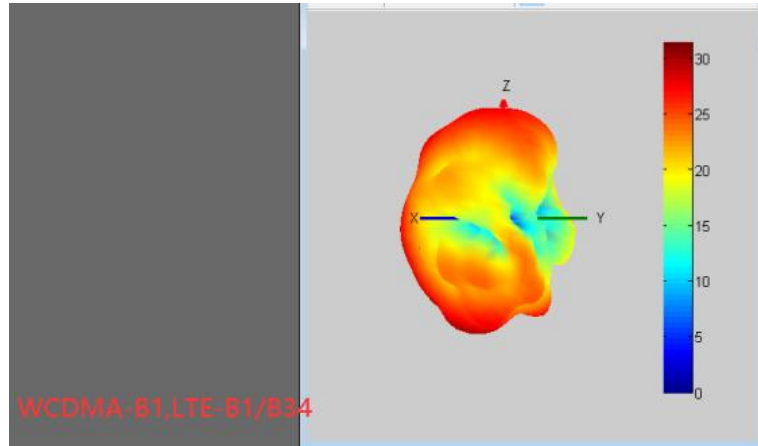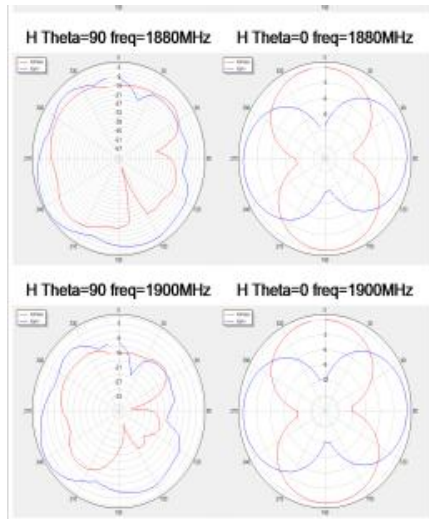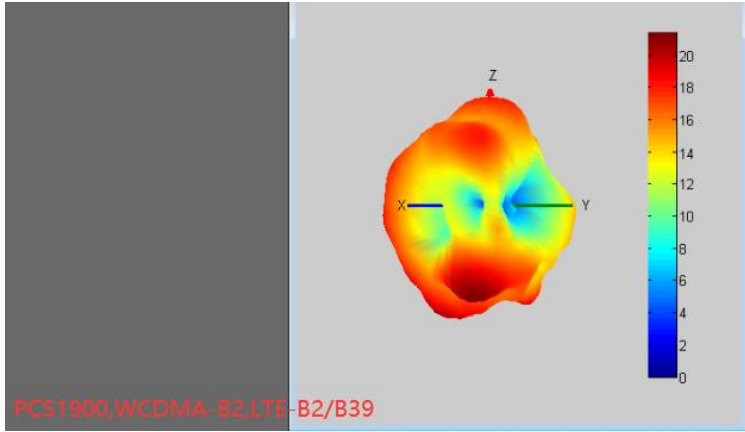





14. Antenna correlation data

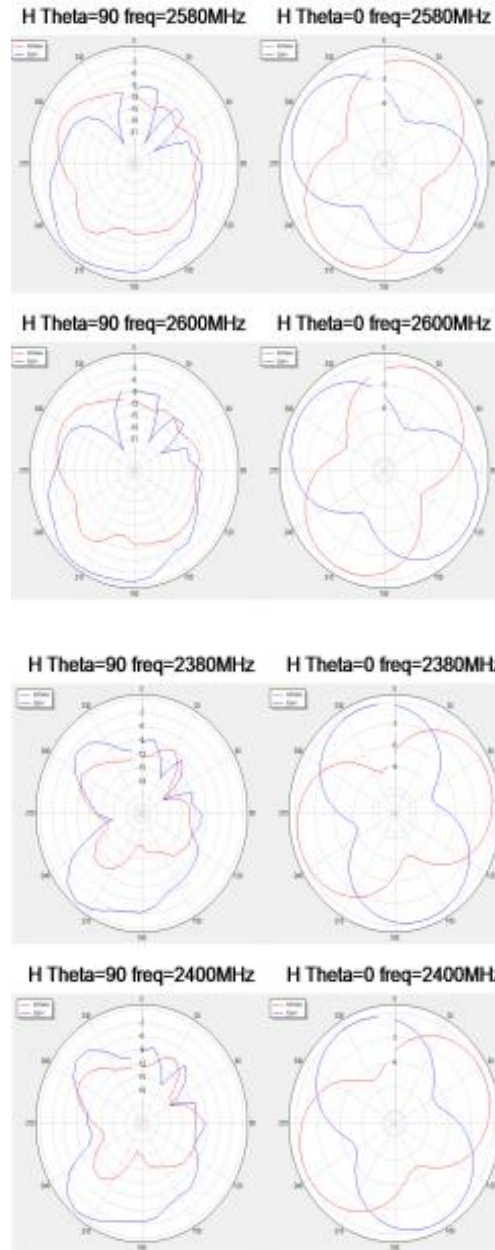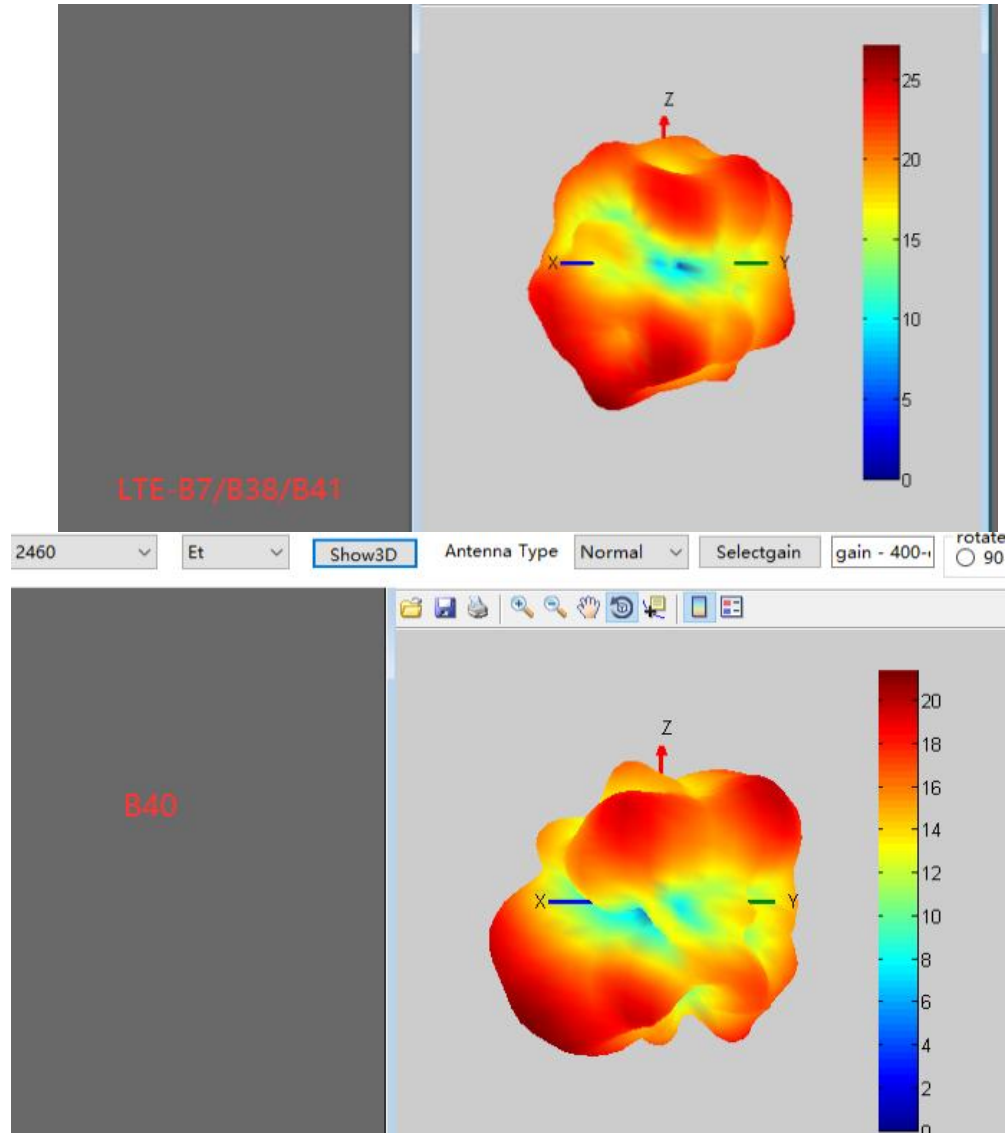





14. Antenna correlation data

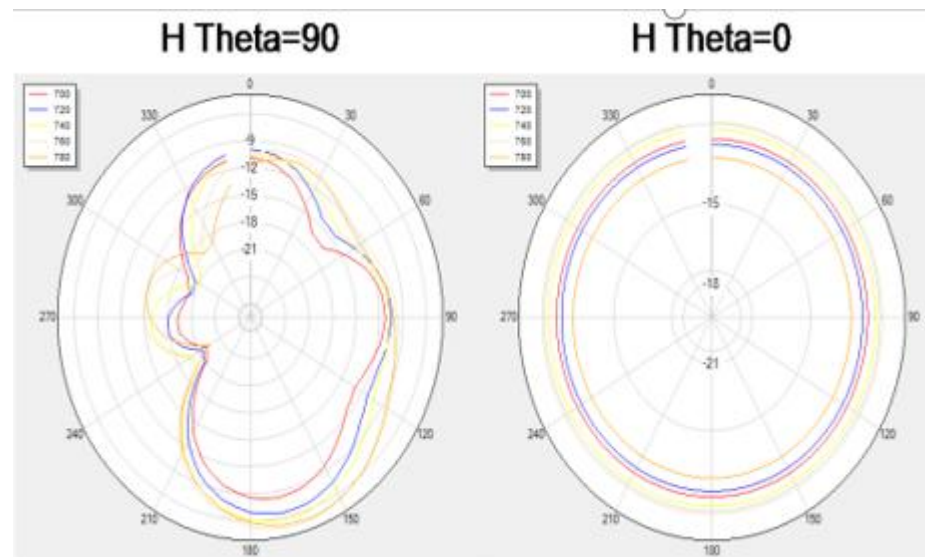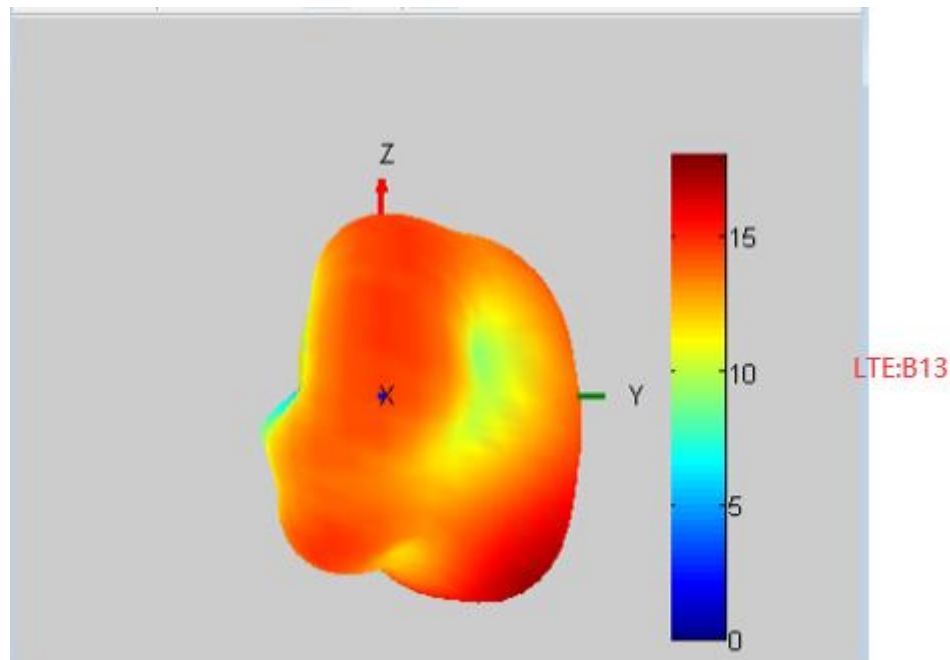

16. Antenna correlation data

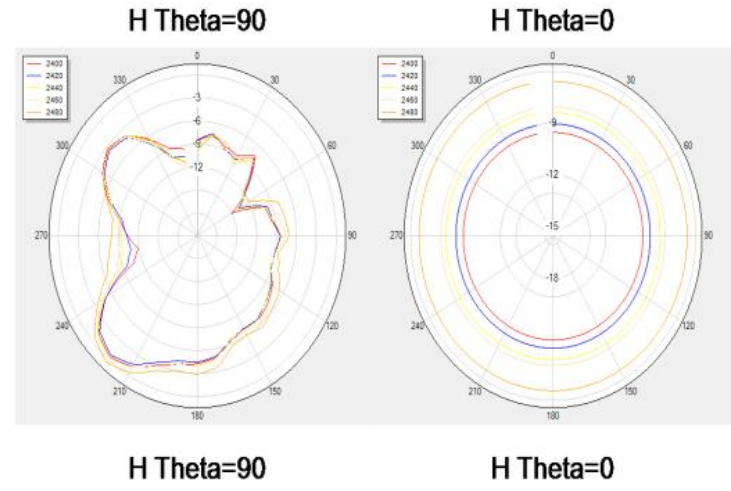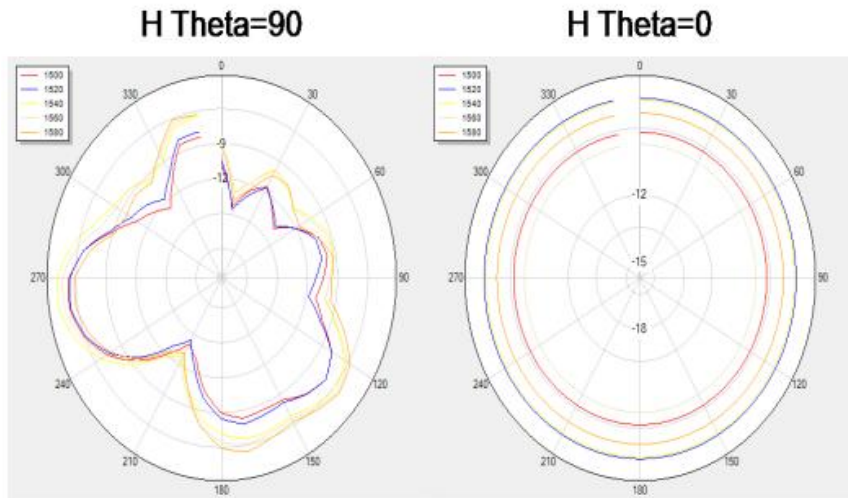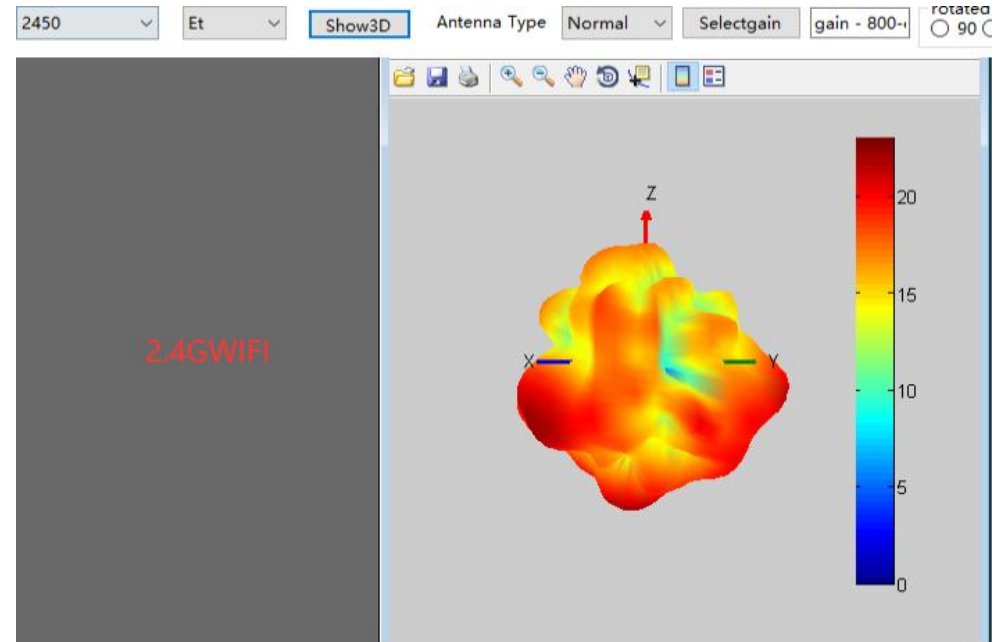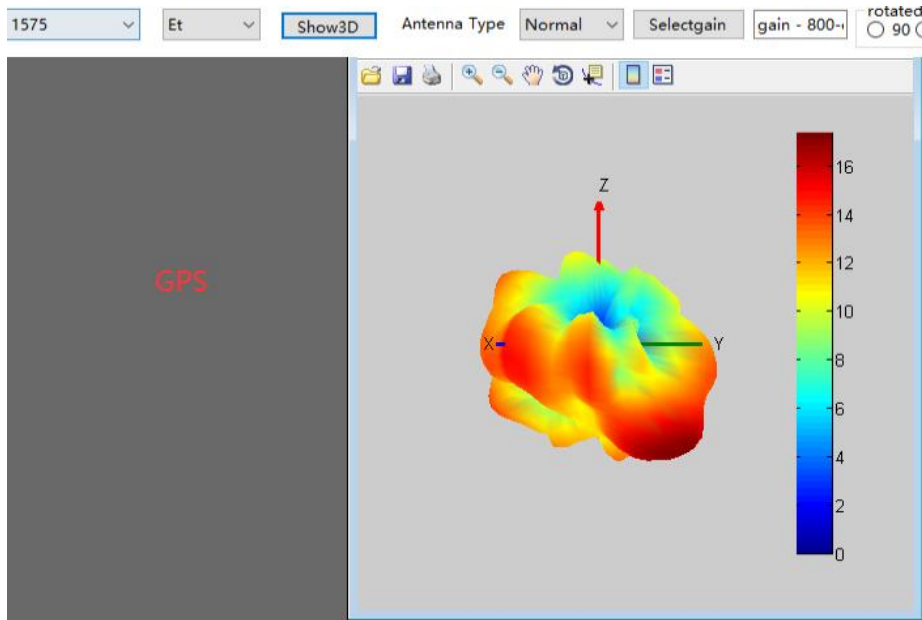


17. Antenna correlation data

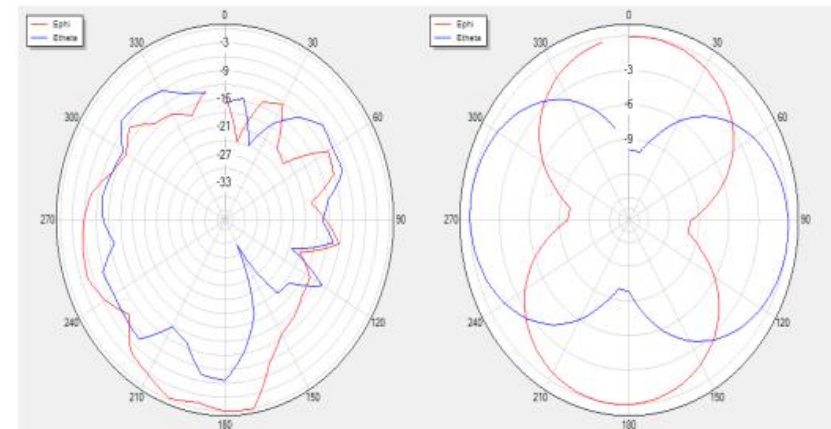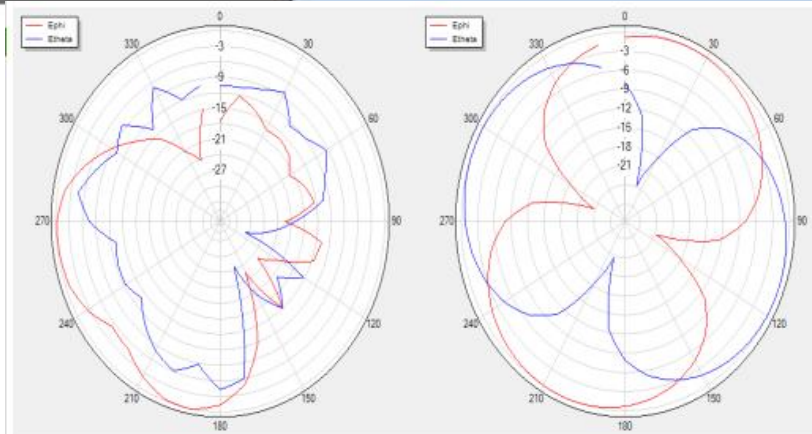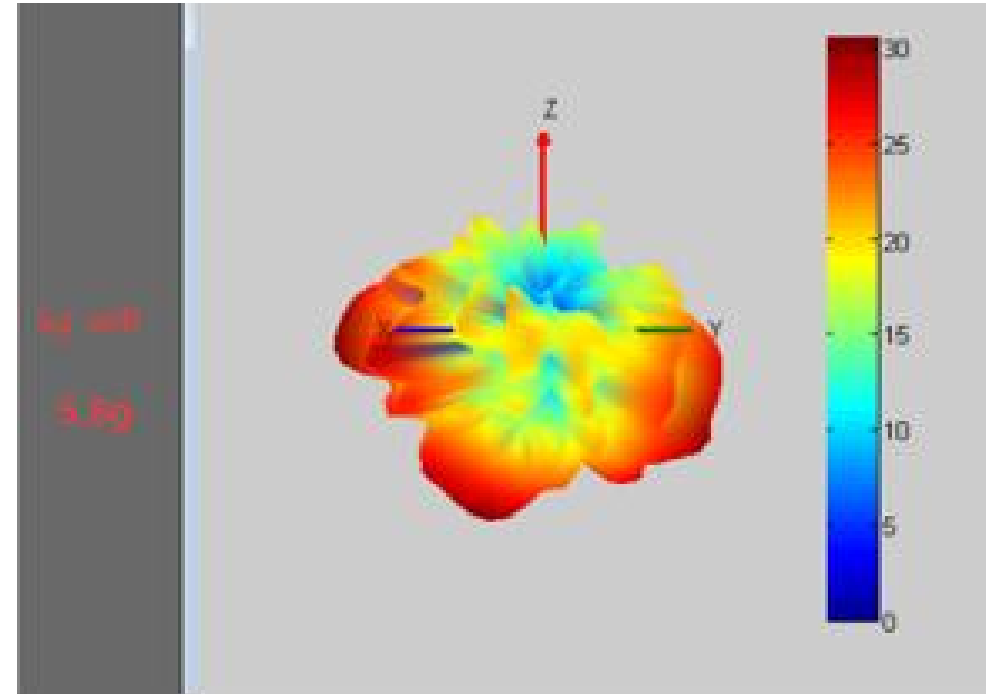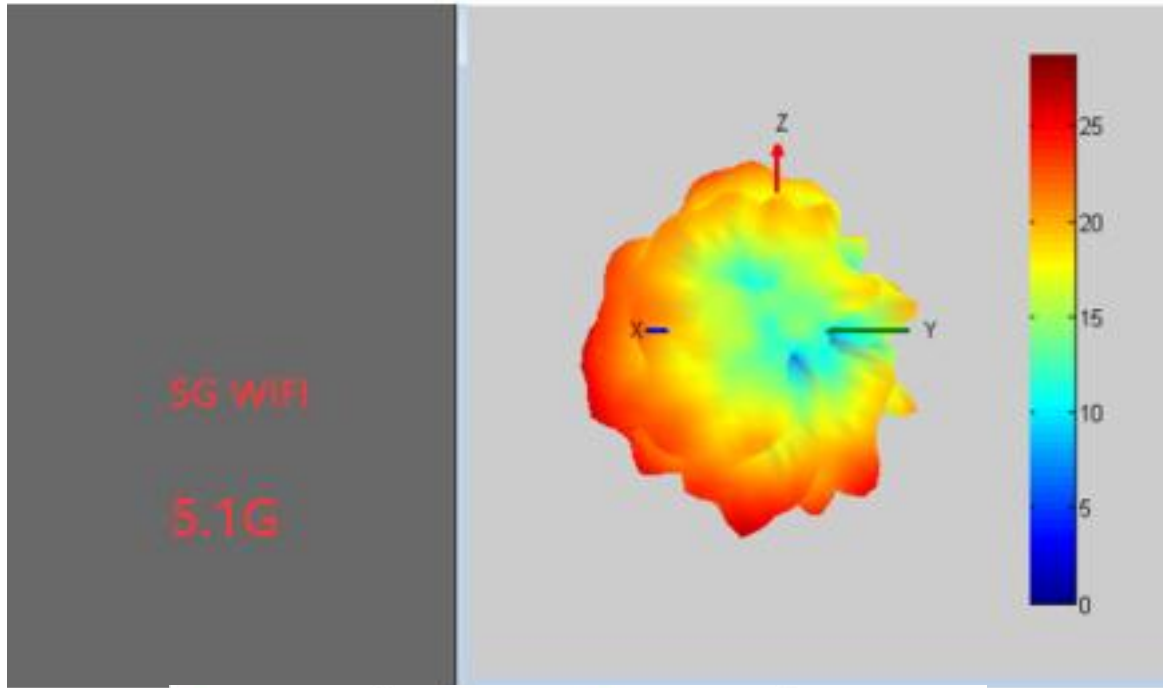

20.Conclusion

The software and hardware of batch production should be the same as the sample machine.

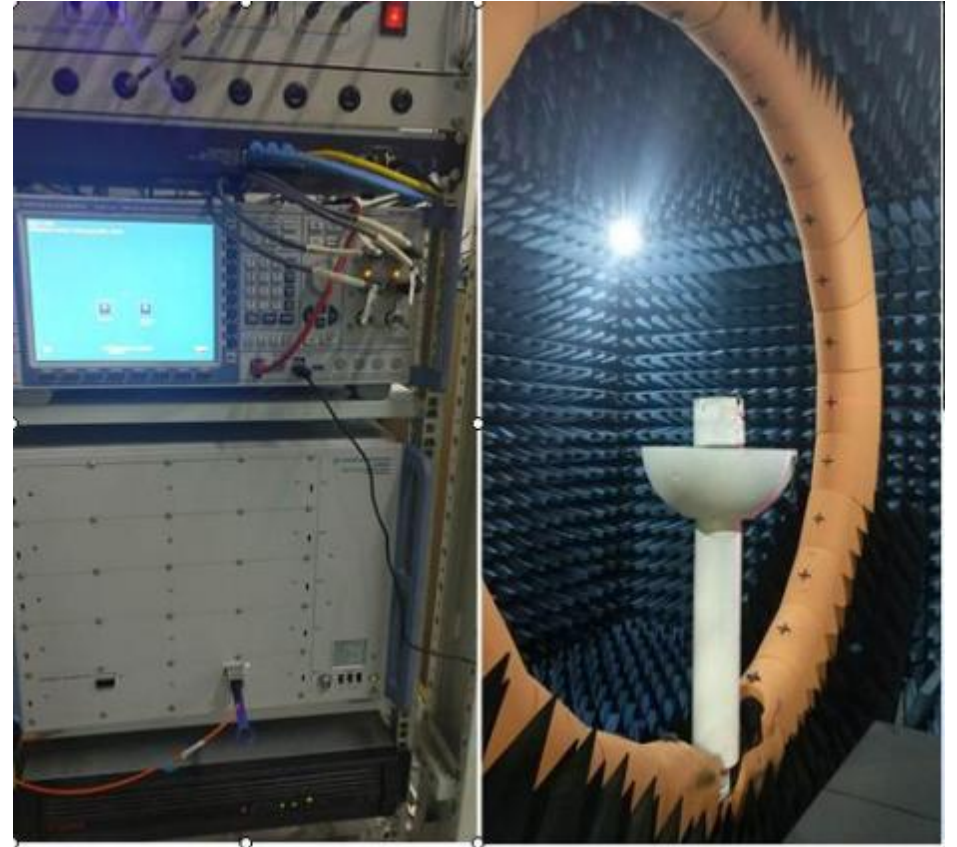

21.Main antenna size

22.Three in one antenna size

23. Diversity antenna size

THANKS!

Shenzhen anweiTechnology Co., Ltd.

www.aw168.cn