

TEST REPORT

Report No.: BCTC2304811624-4E

Applicant: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY
CO.,LTD

Product Name: Smart Phone

Model/Type
reference: WP26

Tested Date: 2023-04-07 to 2023-04-21

Issued Date: 2023-04-24


Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2ANMU-WP26SPU

Product Name: Smart Phone
Trademark: OUKITEL
Model/Type reference: WP26
WP26 S, WP26 Pro, WP26 Ultra
Prepared For: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address: A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE,
GUANLAN, LONGHUA SHENZHEN, 518XXX China
Manufacturer: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address: A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE,
GUANLAN, LONGHUA SHENZHEN, 518XXX China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng,
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2023-04-07
Sample tested Date: 2023-04-07 to 2023-04-21
Issue Date: 2023-04-24
Report No.: BCTC2304811624-4E
Test Standards: FCC Part15 15.407
ANSI C63.10-2013
KDB 789033 D02 v02r01
Test Results: PASS

Tested by:

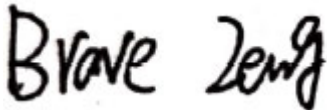

Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

	Page
Test Report Declaration	
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	9
4.5 Test Mode	10
5. Test Facility And Test Instrument Used	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test Procedure	14
6.4 EUT Operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test Procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	20
8. Power Spectral Density Test	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test Procedure	36
8.4 EUT Operating Conditions	36
8.5 Test Result	37
9. 26dB & 6dB & 99% Emission Bandwidth	52
9.1 Block Diagram Of Test Setup	52
9.2 Limit	52
9.3 Test Procedure	52
9.4 EUT Operating Conditions	53
9.5 Test Result	53
10. Maximum Conducted Output Power	83
10.1 Block Diagram Of Test Setup	83
10.2 Limit	83
10.3 Test Procedure	83
10.4 EUT Operating Conditions	84
10.5 Test Result	85
11. Out Of Band Emissions	100


11.1	Block Diagram Of Test Setup.....	100
11.2	Limit	100
11.3	Test Procedure	100
11.4	EUT Operating Conditions	100
11.5	Test Result.....	101
12.	Spurious RF Conducted Emissions.....	113
12.1	Block Diagram Of Test Setup.....	113
12.2	Limit	113
12.3	Test Procedure	113
12.4	Test Result.....	113
13.	Frequency Stability Measurement.....	128
13.1	Block Diagram Of Test Setup.....	128
13.2	Limit	128
13.3	Test Procedure	128
13.4	Test Result.....	129
14.	Antenna Requirement	135
14.1	Limit	135
14.2	Test Result.....	135
15.	EUT Photographs.....	136
16.	EUT Test Setup Photographs.....	137

(Note: N/A Means Not Applicable)

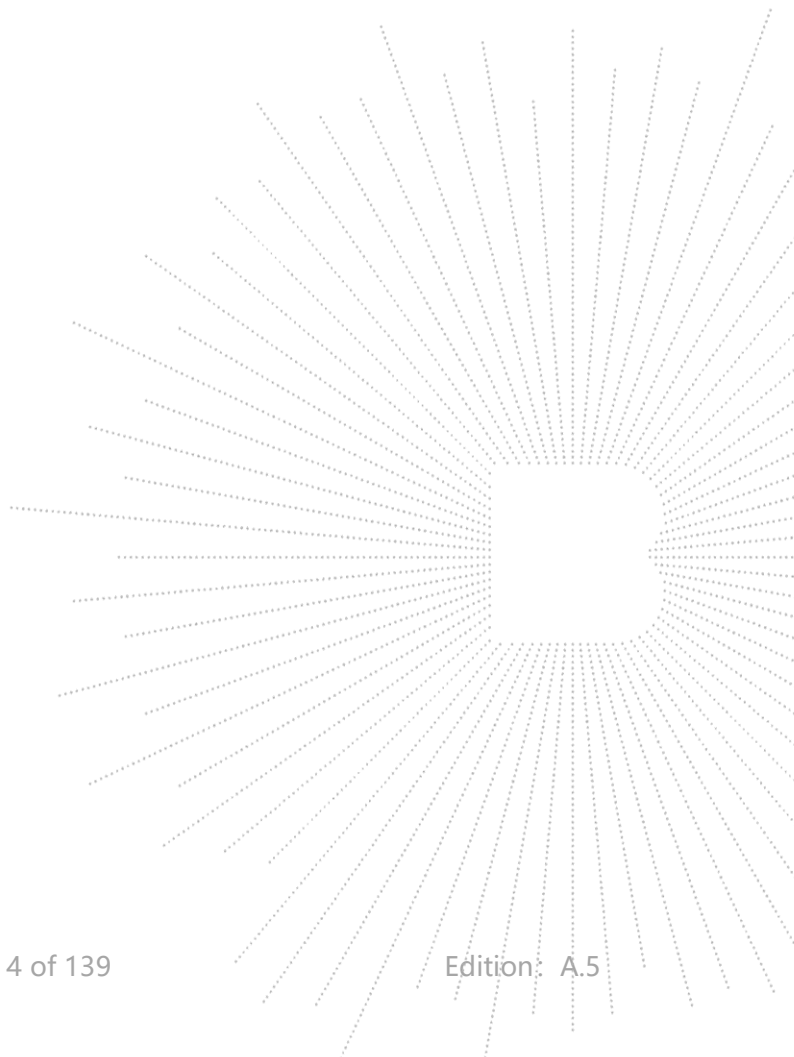

1. Version


Report No.	Issue Date	Description	Approved
BCTC2304811624-4E	2023-04-24	Original	Valid

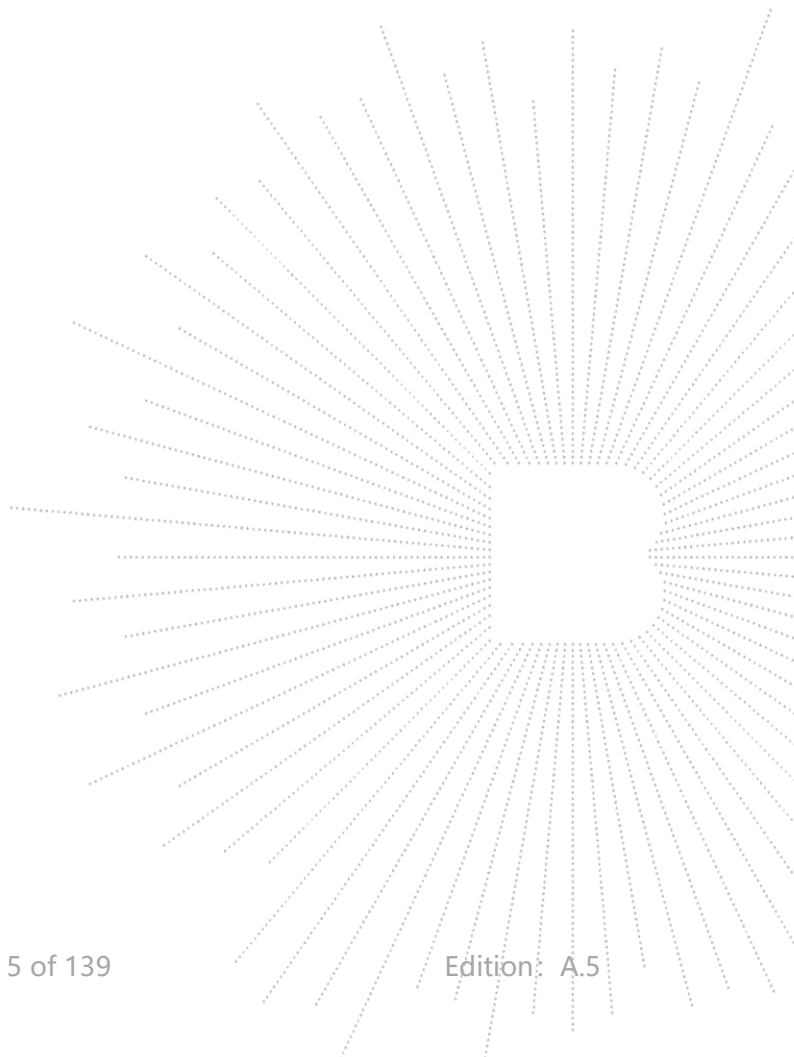

2. Test Summary

The Product has been tested according to the following specifications:


No.	Test Parameter	Clause No	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)(1) 15.407 (a)(3)	PASS
6	Band Edge	2.1051, 15.407(b)(1) 15.407(b)(4)	PASS
7	Power Spectral Density	15.407 (a)(1) 15.407 (a)(3)	PASS
8	Spurious Emissions at Antenna Terminals	2.1051, 15.407(b)	PASS
9	Antenna Requirement	15.203	PASS

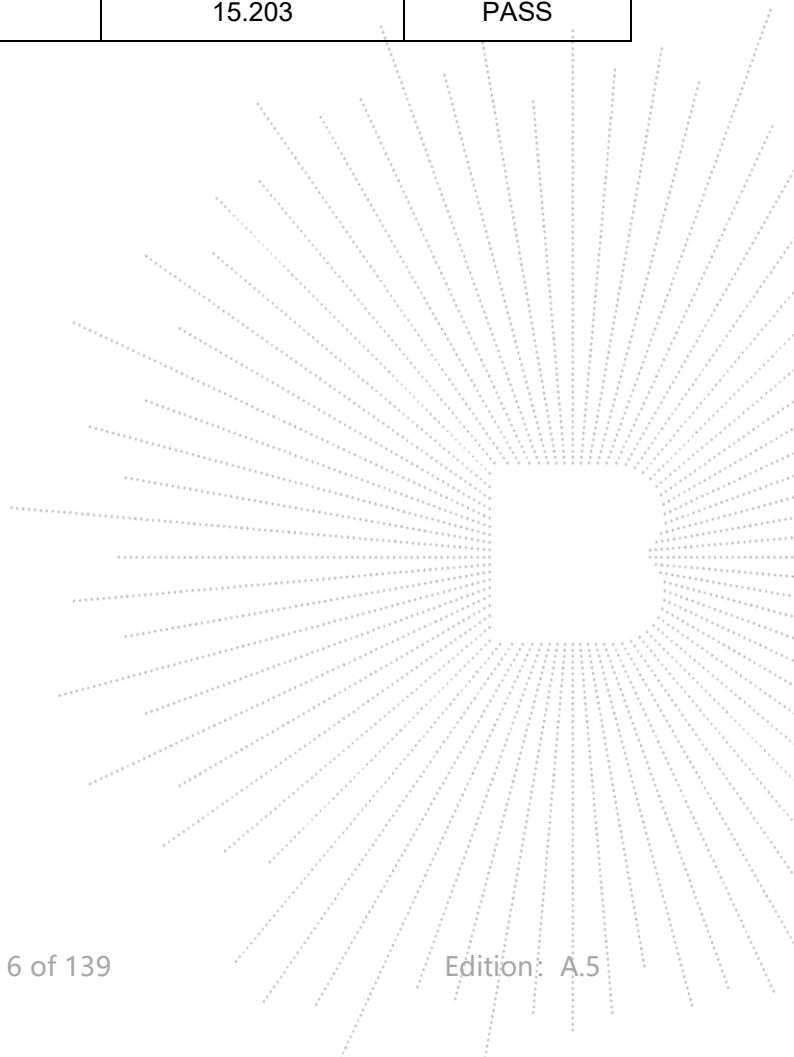

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

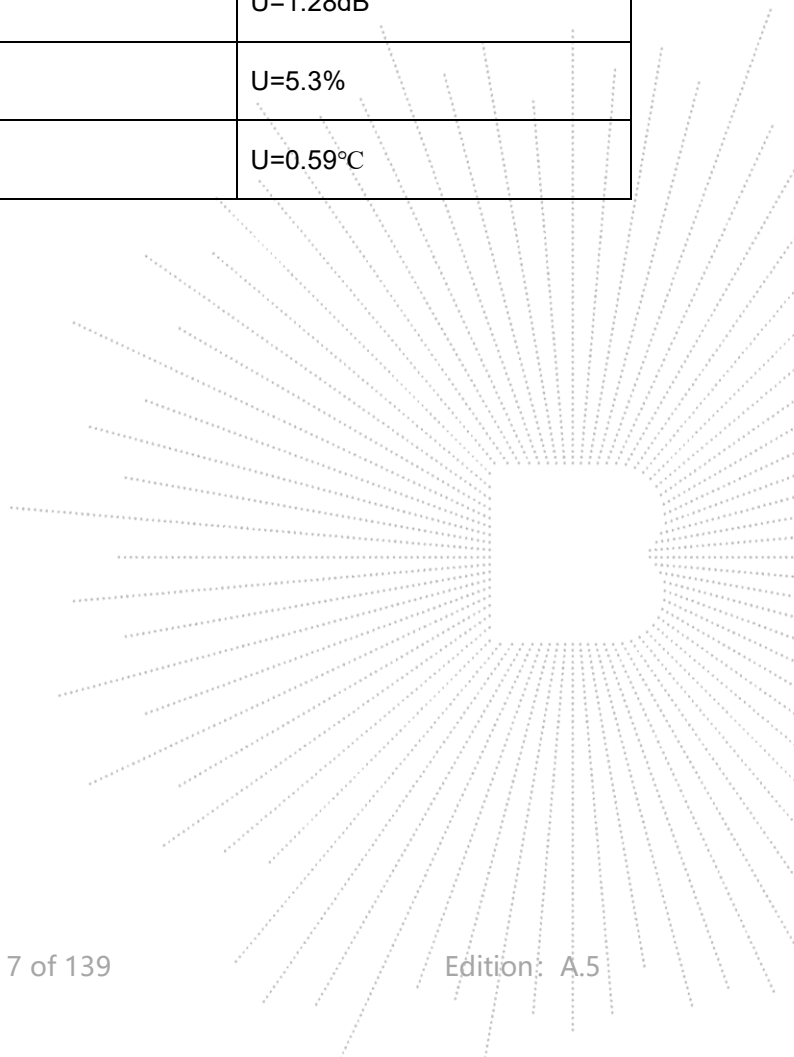

4. Product Information And Test Setup


4.1 Product Information

Model/Type Ref.:	WP26 WP26 S, WP26 Pro, WP26 Ultra
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	HCT-S930MB-A2
Software Version:	OUKITEL_WP26_EEA_V01
IEEE 802.11 WLAN Mode Supported	802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20); 5190-5230MHz for 802.11n(HT40); 5210MHz for 802.11 ac80; 5745-5825 MHz for 802.11a/n(HT20); 5755-5795 MHz for 802.11n(HT40); 5775MHz for 802.11 ac80;
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
Number Of Channel	4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; 5 channels for 802.11a/n20 in the 5745-5825MHz band ; 2 channels for 802.11 n40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band
Antenna installation:	Internal antenna
Antenna Gain:	-0.15 dBi
Ratings:	DC 5V from adapter/DC 3.85V from battery
Adapter Information:	Model: HJ-FC010K7-US Input: 100-240V~50/60Hz 0.6A Output: DC 5.0V 2.0A DC 9.0V 2.0A DC 12.0V 1.5A

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Smart Phone	OUKITEL	WP26	N/A	EUT
E-2	Adapter	N/A	HJ-FC010K7-US	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

5.1G

802.11a/n/ac (20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

5.8G

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155


Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We're testing antenna A data.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Parameters	DEF	DEF	DEF

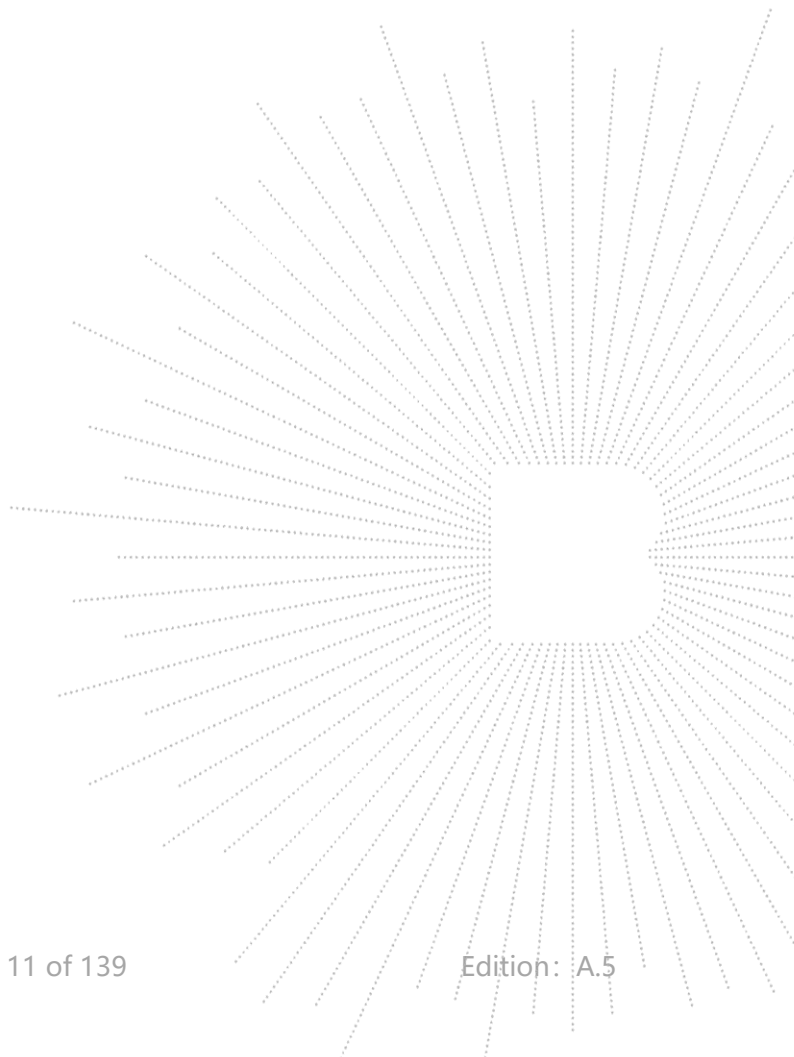

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used


Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
LISN	R&S	ENV216	101375	May 24, 2022	May 23, 2023
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 24, 2022	May 23, 2023

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 24, 2022	May 23, 2023
Power Sensor (AV)	Keysight	E9300A	\	May 24, 2022	May 23, 2023
Signal Analyzer20kHz- 26.5GHz	Keysight	N9020A	MY49100060	May 24, 2022	May 23, 2023
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 24, 2022	May 23, 2023
Communicatio n test set	R&S	CMW500	126173	Nov.8,2022	Nov.7,2023
Radio frequency control box	MAIWEI	MW200-RFC B	\	\	\
Software	MAIWEI	MTS 8200	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
Receiver	R&S	ESRP	101154	May 24, 2022	May 23, 2023
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 24, 2022	May 23, 2023
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 26, 2022	May 25, 2023
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 26, 2022	May 25, 2023
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 24, 2022	May 23, 2023
Horn Antenna	Schwarzbeck	BBHA9120D	1541	Jun. 06, 2022	Jun. 05, 2023
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 26, 2022	May 25, 2023
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	Jun. 06, 2022	Jun. 05, 2023
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 24, 2022	May 23, 2023
Communicatio n test set	R&S	CMW500	126173	Nov.8,2022	Nov.7,2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

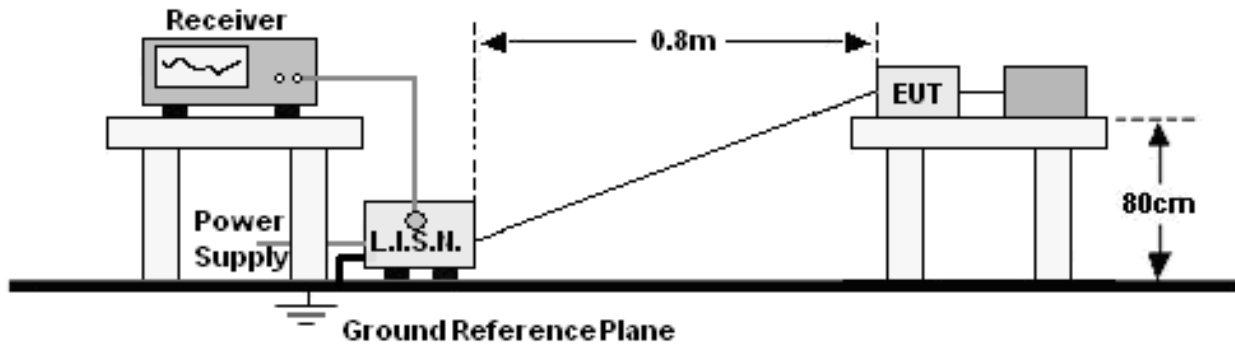

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 1	Test Voltage :	AC120V/60Hz

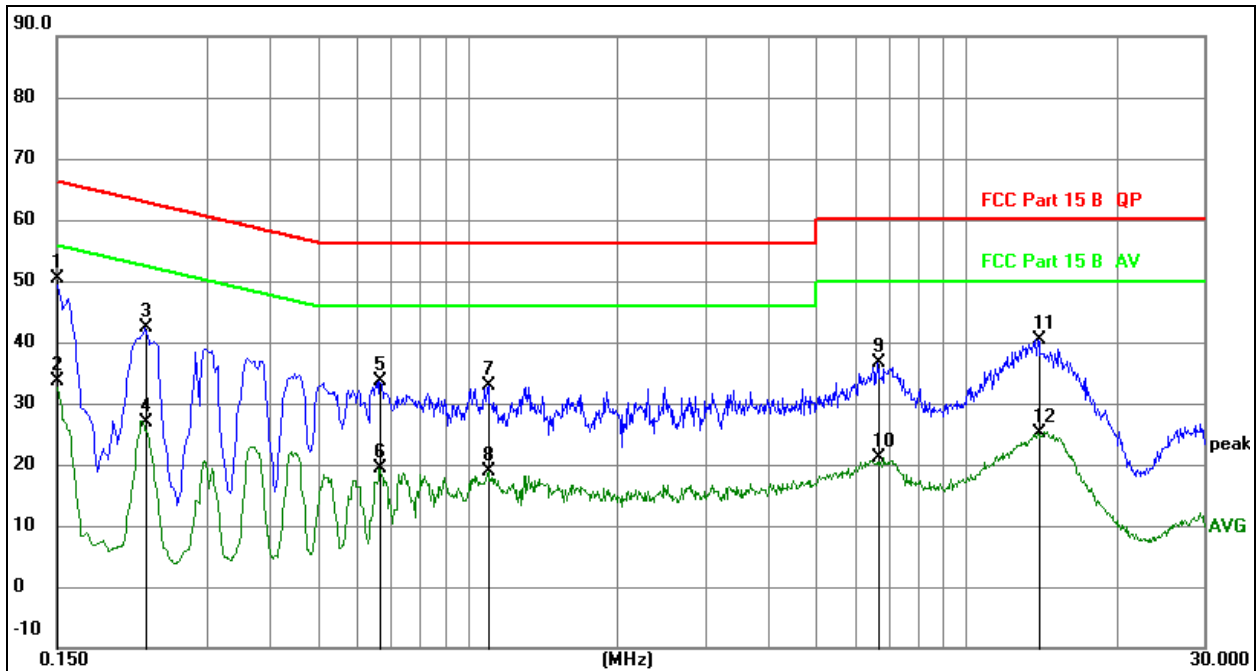


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1 *	0.1500	30.66	19.67	50.33	66.00	-15.67	QP
2	0.1500	13.95	19.67	33.62	56.00	-22.38	AVG
3	0.2265	22.48	19.79	42.27	62.58	-20.31	QP
4	0.2265	7.00	19.79	26.79	52.58	-25.79	AVG
5	0.6648	13.94	19.74	33.68	56.00	-22.32	QP
6	0.6648	-0.34	19.74	19.40	46.00	-26.60	AVG
7	1.0997	13.04	19.77	32.81	56.00	-23.19	QP
8	1.0997	-0.82	19.77	18.95	46.00	-27.05	AVG
9	6.6300	16.46	20.17	36.63	60.00	-23.37	QP
10	6.6300	1.04	20.17	21.21	50.00	-28.79	AVG
11	13.9785	20.14	20.28	40.42	60.00	-19.58	QP
12	13.9785	4.74	20.28	25.02	50.00	-24.98	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 1	Test Voltage :	AC120V/60Hz

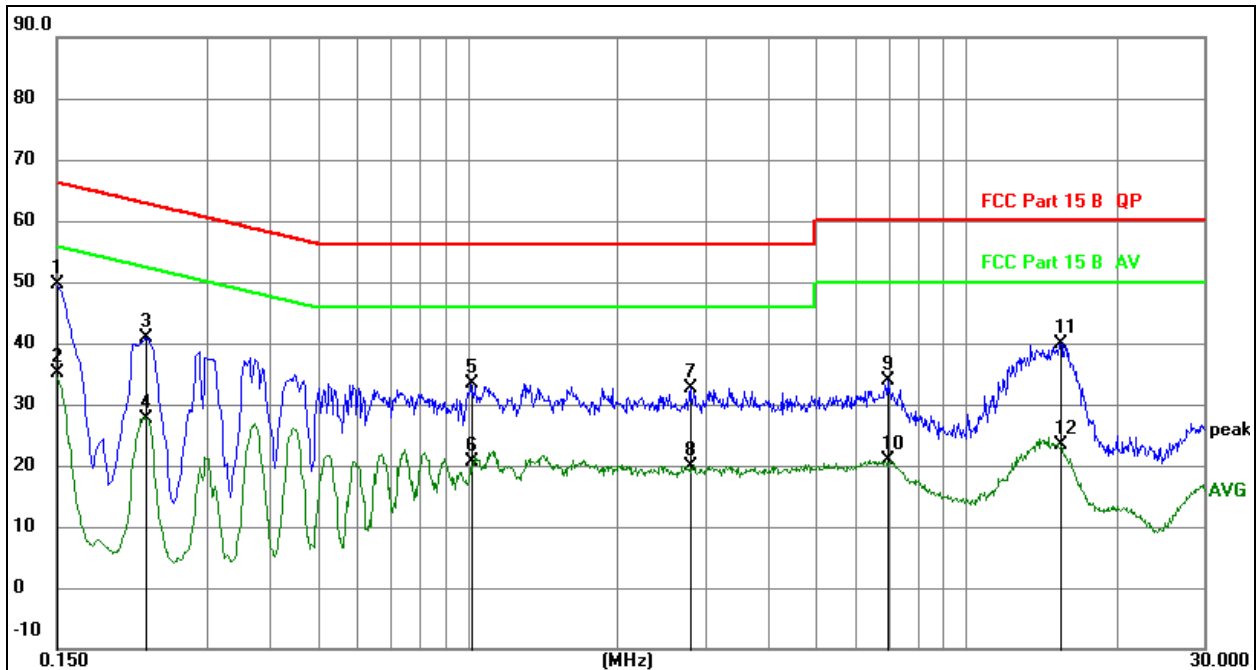
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over1 Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	29.96	19.67	49.63	66.00	-16.37	QP
2		0.1500	15.41	19.67	35.08	56.00	-20.92	AVG
3		0.2265	21.12	19.79	40.91	62.58	-21.67	QP
4		0.2265	7.96	19.79	27.75	52.58	-24.83	AVG
5		1.0184	13.53	19.76	33.29	56.00	-22.71	QP
6		1.0184	0.97	19.76	20.73	46.00	-25.27	AVG
7		2.8005	12.71	19.97	32.68	56.00	-23.32	QP
8		2.8005	-0.13	19.97	19.84	46.00	-26.16	AVG
9		6.9585	13.71	20.18	33.89	60.00	-26.11	QP
10		6.9585	0.80	20.18	20.98	50.00	-29.02	AVG
11		15.4635	19.59	20.30	39.89	60.00	-20.11	QP
12		15.4635	3.20	20.30	23.50	50.00	-26.50	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

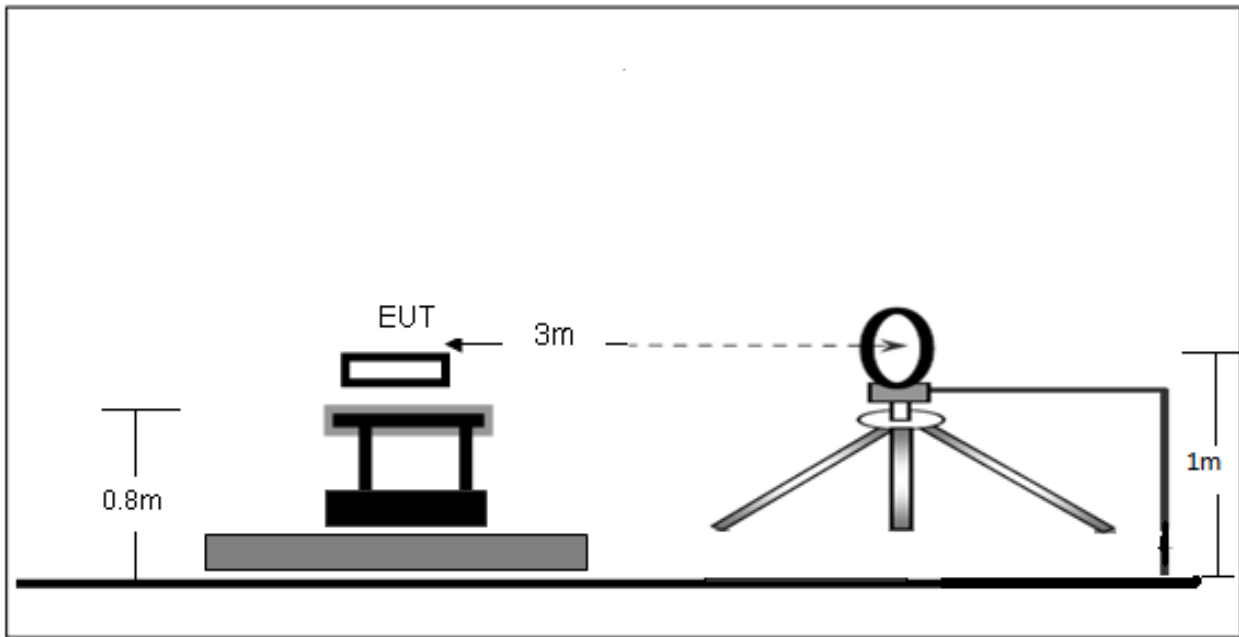

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

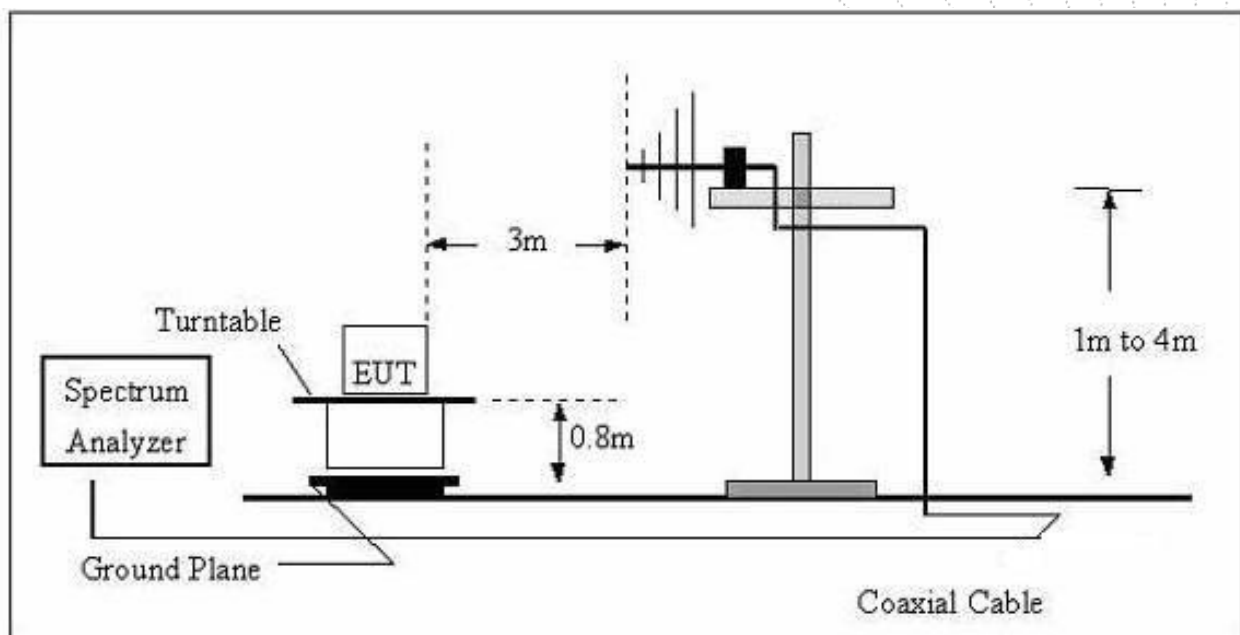

(C) Radiated Emission Test-Up Frequency Above 1GHz

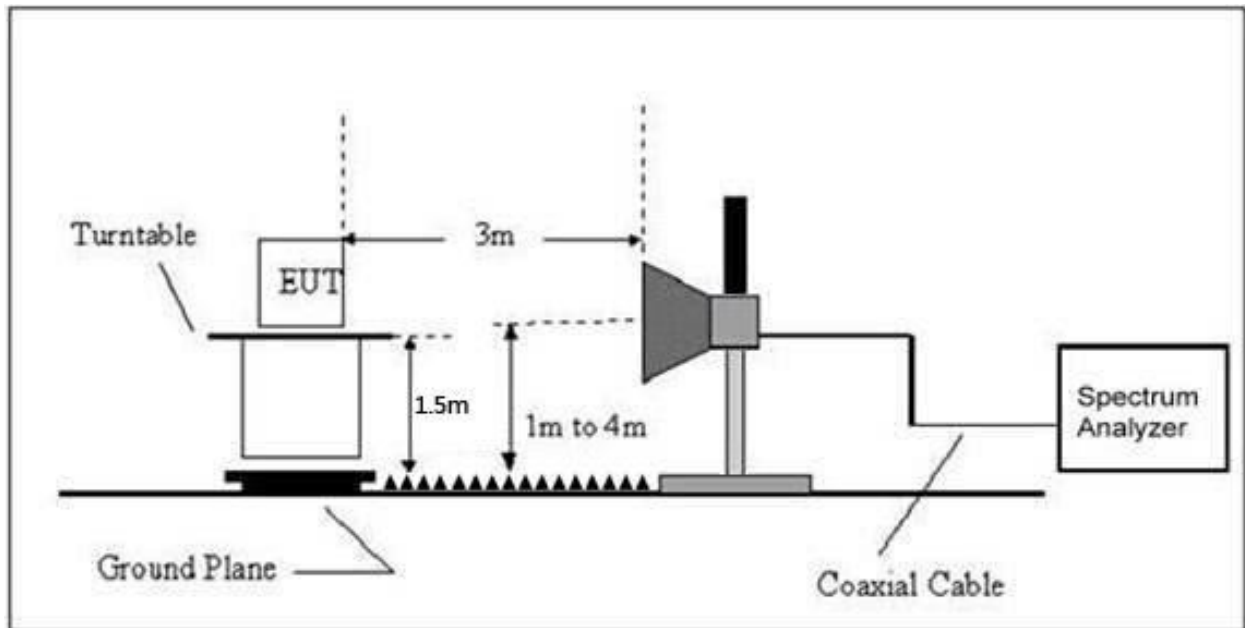

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})(dB)$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 3	Test Voltage :	AC120V/60Hz

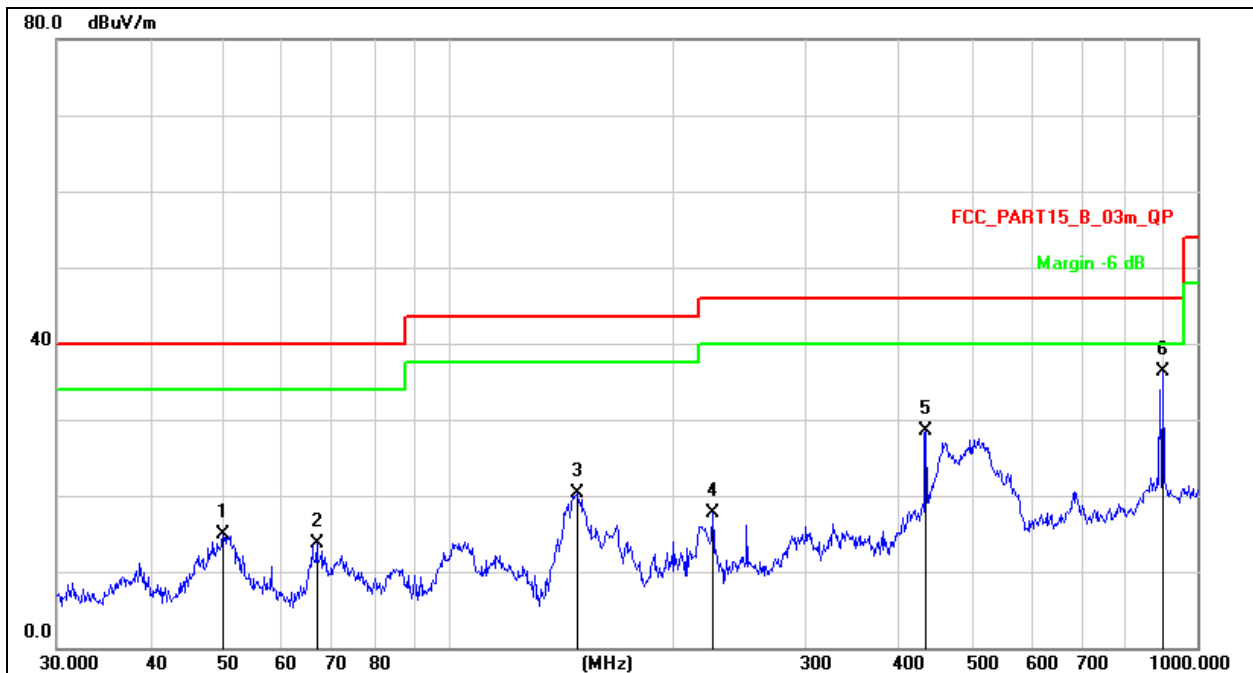


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		50.0566	30.45	-15.60	14.85	40.00	-25.15	QP
2		66.7325	32.73	-19.02	13.71	40.00	-26.29	QP
3		148.4410	41.23	-20.95	20.28	43.50	-23.22	QP
4		225.3080	34.33	-16.59	17.74	46.00	-28.26	QP
5		434.0651	40.22	-11.72	28.50	46.00	-17.50	QP
6	*	900.1474	40.85	-4.59	36.26	46.00	-9.74	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 3	Test Voltage :	AC120V/60Hz

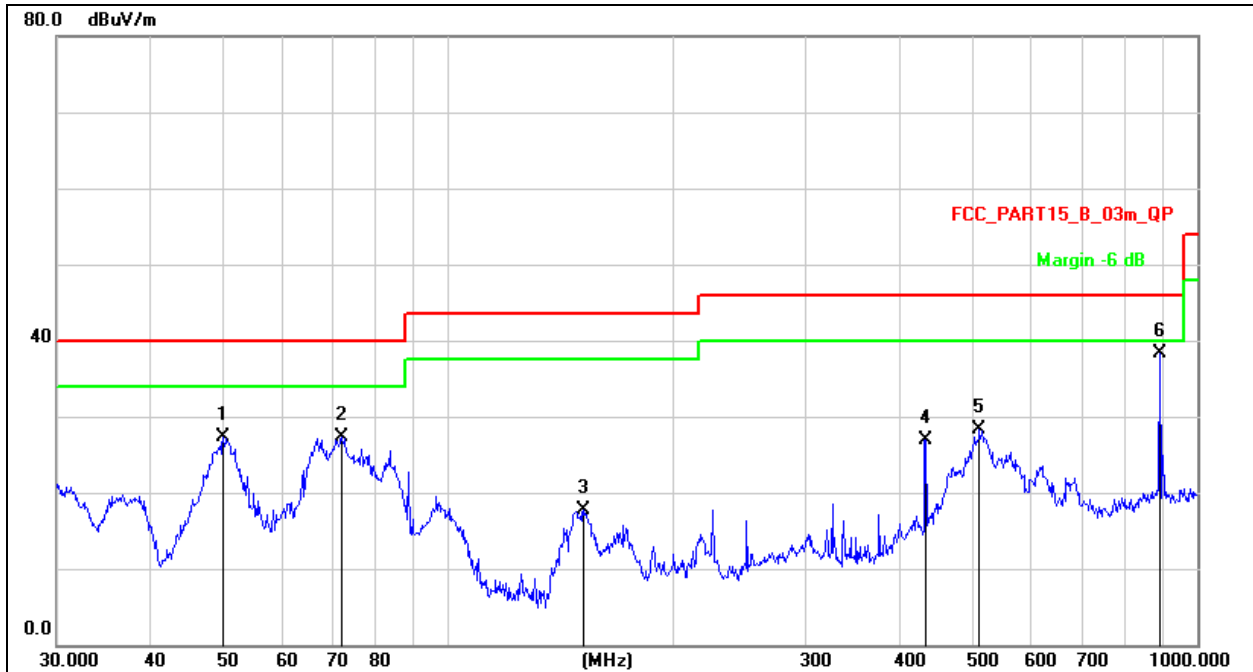

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		50.0566	42.84	-15.60	27.24	40.00	-12.76	QP
2		72.0843	47.61	-20.29	27.32	40.00	-12.68	QP
3		151.5972	38.68	-20.93	17.75	43.50	-25.75	QP
4		434.0651	38.66	-11.72	26.94	46.00	-19.06	QP
5		511.8352	38.31	-10.08	28.23	46.00	-17.77	QP
6	*	890.7278	43.08	-4.69	38.39	46.00	-7.61	QP

Between 1GHz – 40GHz

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.125	62.25	5.94	35.40	44.00	59.59	68.2	-8.61	PK
V	4434.125	43.48	5.94	35.40	44.00	40.82	54	-13.18	AV
V	10360.105	61.43	8.46	39.75	44.50	65.14	68.2	-3.06	PK
V	10360.105	43.12	8.46	39.75	44.50	46.83	54	-7.17	AV
V	15540.100	63.23	10.12	38.80	44.10	68.05	74	-5.95	PK
V	15540.100	43.03	10.12	38.80	42.70	49.25	54	-4.75	AV
H	4434.132	63.57	5.94	35.18	44.00	60.69	68.2	-7.51	PK
H	4434.132	43.59	5.94	35.18	44.00	40.71	54	-13.29	AV
H	10360.080	52.40	8.46	38.71	44.50	55.07	68.2	-13.13	PK
H	10360.080	43.20	8.46	38.71	44.50	45.87	54	-8.13	AV
H	15540.081	54.49	10.12	38.38	44.10	58.89	74	-15.11	PK
H	15540.081	41.82	10.12	38.38	44.10	46.22	54	-7.78	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.096	61.43	6.48	36.35	44.05	60.21	74	-13.79	PK
V	4592.096	43.64	6.48	36.35	44.05	42.42	54	-11.58	AV
V	10400.104	62.31	8.47	37.88	44.51	64.15	68.2	-4.05	PK
V	10400.104	43.89	8.47	37.88	44.51	45.73	54	-8.27	AV
V	15600.040	63.16	10.12	38.80	44.10	67.98	74	-6.02	PK
V	15600.040	43.62	10.12	38.80	42.70	49.84	54	-4.16	AV
H	4592.170	61.47	6.48	36.37	44.05	60.27	74	-13.73	PK
H	4592.170	43.11	6.48	36.37	44.05	41.91	54	-12.09	AV
H	10400.131	53.58	8.47	38.64	44.50	56.19	68.2	-12.01	PK
H	10400.131	40.23	8.47	38.64	44.50	42.84	54	-11.16	AV
H	15600.197	51.11	10.12	38.38	44.10	55.51	74	-18.49	PK
H	15600.197	40.24	10.12	38.38	44.10	44.64	54	-9.36	AV
High Channel (5240 MHz)-Above 1G									
V	4739.055	64.44	7.10	37.24	43.50	65.28	74	-8.72	PK
V	4739.055	43.44	7.10	37.24	43.50	44.28	54	-9.72	AV
V	10480.002	61.74	8.46	37.68	44.50	63.38	68.2	-4.82	PK
V	10480.002	43.12	8.46	37.68	44.50	44.76	54	-9.24	AV
V	15720.134	63.60	10.12	38.80	44.10	68.42	74	-5.58	PK
V	15720.134	43.17	10.12	38.80	42.70	49.39	54	-4.61	AV
H	4739.123	64.16	7.10	37.24	43.50	65.00	74	-9.00	PK
H	4739.123	43.58	7.10	37.24	43.50	44.42	54	-9.58	AV
H	10480.071	50.76	8.46	38.57	44.50	53.29	68.2	-14.91	PK
H	10480.071	43.01	8.46	38.57	44.50	45.54	54	-8.46	AV
H	15720.192	54.88	10.12	38.38	44.10	59.28	74	-14.72	PK
H	15720.192	43.72	10.12	38.38	44.10	48.12	54	-5.88	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.134	62.46	5.94	35.40	44.00	59.80	68.2	-8.40	PK
V	4434.134	43.69	5.94	35.40	44.00	41.03	54	-12.97	AV
V	10360.196	61.35	8.46	39.75	44.50	65.06	68.2	-3.14	PK
V	10360.196	43.53	8.46	39.75	44.50	47.24	54	-6.76	AV
V	15540.054	65.00	10.12	38.80	44.10	69.82	74	-4.18	PK
V	15540.054	43.86	10.12	38.80	42.70	50.08	54	-3.92	AV
H	4434.049	62.73	5.94	35.18	44.00	59.85	68.2	-8.35	PK
H	4434.049	43.17	5.94	35.18	44.00	40.29	54	-13.71	AV
H	10360.096	54.13	8.46	38.71	44.50	56.80	68.2	-11.40	PK
H	10360.096	41.17	8.46	38.71	44.50	43.84	54	-10.16	AV
H	15540.147	51.31	10.12	38.38	44.10	55.71	74	-18.29	PK
H	15540.147	43.32	10.12	38.38	44.10	47.72	54	-6.28	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.097	62.53	6.48	36.35	44.05	61.31	74	-12.69	PK
V	4592.097	43.38	6.48	36.35	44.05	42.16	54	-11.84	AV
V	10400.016	64.84	8.47	37.88	44.51	66.68	68.2	-1.52	PK
V	10400.016	43.02	8.47	37.88	44.51	44.86	54	-9.14	AV
V	15600.062	61.84	10.12	38.80	44.10	66.66	74	-7.34	PK
V	15600.062	43.23	10.12	38.80	42.70	49.45	54	-4.55	AV
H	4592.083	60.50	6.48	36.37	44.05	59.30	74	-14.70	PK
H	4592.083	43.64	6.48	36.37	44.05	42.44	54	-11.56	AV
H	10400.183	50.70	8.47	38.64	44.50	53.31	68.2	-14.89	PK
H	10400.183	41.89	8.47	38.64	44.50	44.50	54	-9.50	AV
H	15600.001	54.60	10.12	38.38	44.10	59.00	74	-15.00	PK
H	15600.001	44.15	10.12	38.38	44.10	48.55	54	-5.45	AV
High Channel (5240 MHz)-Above 1G									
V	4739.158	61.54	7.10	37.24	43.50	62.38	74	-11.62	PK
V	4739.158	43.84	7.10	37.24	43.50	44.68	54	-9.32	AV
V	10480.153	62.12	8.46	37.68	44.50	63.76	68.2	-4.44	PK
V	10480.153	43.30	8.46	37.68	44.50	44.94	54	-9.06	AV
V	15720.197	61.98	10.12	38.80	44.10	66.80	74	-7.20	PK
V	15720.197	43.67	10.12	38.80	42.70	49.89	54	-4.11	AV
H	4739.016	60.90	7.10	37.24	43.50	61.74	74	-12.26	PK
H	4739.016	43.13	7.10	37.24	43.50	43.97	54	-10.03	AV
H	10480.099	50.37	8.46	38.57	44.50	52.90	68.2	-15.30	PK
H	10480.099	44.27	8.46	38.57	44.50	46.80	54	-7.20	AV
H	15720.173	54.76	10.12	38.38	44.10	59.16	74	-14.84	PK
H	15720.173	43.98	10.12	38.38	44.10	48.38	54	-5.62	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.024	61.25	5.94	35.40	44.00	58.59	68.2	-9.61	PK
V	4434.024	43.16	5.94	35.40	44.00	40.50	54	-13.50	AV
V	10380.136	63.86	8.46	39.75	44.50	67.57	68.2	-0.63	PK
V	10380.136	43.87	8.46	39.75	44.50	47.58	54	-6.42	AV
V	15570.098	61.59	10.12	38.80	44.10	66.41	74	-7.59	PK
V	15570.098	43.38	10.12	38.80	42.70	49.60	54	-4.40	AV
H	4434.065	62.74	5.94	35.18	44.00	59.86	74	-14.14	PK
H	4434.065	43.74	5.94	35.18	44.00	40.86	54	-13.14	AV
H	10380.072	52.33	8.46	38.71	44.50	55.00	68.2	-13.20	PK
H	10380.072	43.80	8.46	38.71	44.50	46.47	54	-7.53	AV
H	15570.063	50.07	10.12	38.38	44.10	54.47	74	-19.53	PK
H	15570.063	40.77	10.12	38.38	44.10	45.17	54	-8.83	AV
middle Channel (5230 MHz)-Above 1G									
V	4739.149	63.27	6.48	36.35	44.05	62.05	68.2	-6.15	PK
V	4739.149	43.52	6.48	36.35	44.05	42.30	54	-11.70	AV
V	10460.182	62.35	8.47	37.88	44.51	64.19	68.2	-4.01	PK
V	10460.182	43.86	8.47	37.88	44.51	45.70	54	-8.30	AV
V	15690.016	61.20	10.12	38.80	44.10	66.02	74	-7.98	PK
V	15690.016	43.38	10.12	38.80	42.70	49.60	54	-4.40	AV
H	4739.136	64.86	6.48	36.37	44.05	63.66	68.2	-4.54	PK
H	4739.136	43.24	6.48	36.37	44.05	42.04	54	-11.96	AV
H	10460.023	50.91	8.47	38.64	44.50	53.52	68.2	-14.68	PK
H	10460.023	44.68	8.47	38.64	44.50	47.29	54	-6.71	AV
H	15690.176	53.13	10.12	38.38	44.10	57.53	74	-16.47	PK
H	15690.176	42.96	10.12	38.38	44.10	47.36	54	-6.64	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.062	63.30	5.94	35.40	44.00	60.64	68.2	-7.56	PK
V	4434.062	43.84	5.94	35.40	44.00	41.18	54	-12.82	AV
V	10360.133	60.52	8.46	39.75	44.50	64.23	68.2	-3.97	PK
V	10360.133	43.98	8.46	39.75	44.50	47.69	54	-6.31	AV
V	15540.099	62.32	10.12	38.80	44.10	67.14	74	-6.86	PK
V	15540.099	43.96	10.12	38.80	42.70	50.18	54	-3.82	AV
H	4434.138	62.34	5.94	35.18	44.00	59.46	68.2	-8.74	PK
H	4434.138	43.58	5.94	35.18	44.00	40.70	54	-13.30	AV
H	10360.033	53.24	8.46	38.71	44.50	55.91	68.2	-12.29	PK
H	10360.033	42.87	8.46	38.71	44.50	45.54	54	-8.46	AV
H	15540.053	53.46	10.12	38.38	44.10	57.86	74	-16.14	PK
H	15540.053	43.81	10.12	38.38	44.10	48.21	54	-5.79	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.085	61.32	6.48	36.35	44.05	60.10	74	-13.90	PK
V	4592.085	43.45	6.48	36.35	44.05	42.23	54	-11.77	AV
V	10400.123	63.13	8.47	37.88	44.51	64.97	68.2	-3.23	PK
V	10400.123	43.86	8.47	37.88	44.51	45.70	54	-8.30	AV
V	15600.063	62.93	10.12	38.80	44.10	67.75	74	-6.25	PK
V	15600.063	43.78	10.12	38.80	42.70	50.00	54	-4.00	AV
H	4592.110	60.21	6.48	36.37	44.05	59.01	74	-14.99	PK
H	4592.110	43.33	6.48	36.37	44.05	42.13	54	-11.87	AV
H	10400.168	51.76	8.47	38.64	44.50	54.37	68.2	-13.83	PK
H	10400.168	41.85	8.47	38.64	44.50	44.46	54	-9.54	AV
H	15600.072	51.38	10.12	38.38	44.10	55.78	74	-18.22	PK
H	15600.072	42.14	10.12	38.38	44.10	46.54	54	-7.46	AV
High Channel (5240 MHz)-Above 1G									
V	4739.095	62.39	7.10	37.24	43.50	63.23	74	-10.77	PK
V	4739.095	43.90	7.10	37.24	43.50	44.74	54	-9.26	AV
V	10480.181	60.55	8.46	37.68	44.50	62.19	68.2	-6.01	PK
V	10480.181	43.38	8.46	37.68	44.50	45.02	54	-8.98	AV
V	15720.133	62.25	10.12	38.80	44.10	67.07	74	-6.93	PK
V	15720.133	43.82	10.12	38.80	42.70	50.04	54	-3.96	AV
H	4739.172	61.94	7.10	37.24	43.50	62.78	74	-11.22	PK
H	4739.172	43.28	7.10	37.24	43.50	44.12	54	-9.88	AV
H	10480.123	52.68	8.46	38.57	44.50	55.21	68.2	-12.99	PK
H	10480.123	44.43	8.46	38.57	44.50	46.96	54	-7.04	AV
H	15720.184	52.04	10.12	38.38	44.10	56.44	74	-17.56	PK
H	15720.184	40.51	10.12	38.38	44.10	44.91	54	-9.09	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.169	61.63	5.94	35.40	44.00	58.97	68.2	-9.23	PK
V	4434.169	43.06	5.94	35.40	44.00	40.40	54	-13.60	AV
V	10380.045	61.03	8.46	39.75	44.50	64.74	68.2	-3.46	PK
V	10380.045	43.37	8.46	39.75	44.50	47.08	54	-6.92	AV
V	15570.083	64.72	10.12	38.80	44.10	69.54	74	-4.46	PK
V	15570.083	43.86	10.12	38.80	42.70	50.08	54	-3.92	AV
H	4434.011	63.52	5.94	35.18	44.00	60.64	74	-13.36	PK
H	4434.011	43.40	5.94	35.18	44.00	40.52	54	-13.48	AV
H	10380.076	51.45	8.46	38.71	44.50	54.12	68.2	-14.08	PK
H	10380.076	41.58	8.46	38.71	44.50	44.25	54	-9.75	AV
H	15570.007	52.29	10.12	38.38	44.10	56.69	74	-17.31	PK
H	15570.007	42.78	10.12	38.38	44.10	47.18	54	-6.82	AV
middle Channel (5230 MHz)-Above 1G									
V	4739.157	62.48	6.48	36.35	44.05	61.26	68.2	-6.94	PK
V	4739.157	43.62	6.48	36.35	44.05	42.40	54	-11.60	AV
V	10460.067	61.14	8.47	37.88	44.51	62.98	68.2	-5.22	PK
V	10460.067	43.85	8.47	37.88	44.51	45.69	54	-8.31	AV
V	15690.025	60.45	10.12	38.80	44.10	65.27	74	-8.73	PK
V	15690.025	43.07	10.12	38.80	42.70	49.29	54	-4.71	AV
H	4739.144	63.49	6.48	36.37	44.05	62.29	68.2	-5.91	PK
H	4739.144	43.47	6.48	36.37	44.05	42.27	54	-11.73	AV
H	10460.187	54.41	8.47	38.64	44.50	57.02	68.2	-11.18	PK
H	10460.187	40.31	8.47	38.64	44.50	42.92	54	-11.08	AV
H	15690.159	53.59	10.12	38.38	44.10	57.99	74	-16.01	PK
H	15690.159	40.53	10.12	38.38	44.10	44.93	54	-9.07	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac 80
------------	------------------------


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5210 MHz)-Above 1G									
V	4434.091	60.50	5.94	35.40	44.00	57.84	68.2	-10.36	PK
V	4434.091	43.90	5.94	35.40	44.00	41.24	54	-12.76	AV
V	10420.185	62.30	8.46	39.75	44.50	66.01	68.2	-2.19	PK
V	10420.185	43.94	8.46	39.75	44.50	47.65	54	-6.35	AV
V	15630.079	63.38	10.12	38.80	44.10	68.20	74	-5.80	PK
V	15630.079	43.95	10.12	38.80	42.70	50.17	54	-3.83	AV
H	4434.004	63.92	5.94	35.18	44.00	61.04	68.2	-7.16	PK
H	4434.004	43.31	5.94	35.18	44.00	40.43	54	-13.57	AV
H	10420.141	53.68	8.46	38.71	44.50	56.35	68.2	-11.85	PK
H	10420.141	42.89	8.46	38.71	44.50	45.56	54	-8.44	AV
H	15630.055	54.03	10.12	38.38	44.10	58.43	74	-15.57	PK
H	15630.055	42.43	10.12	38.38	44.10	46.83	54	-7.17	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

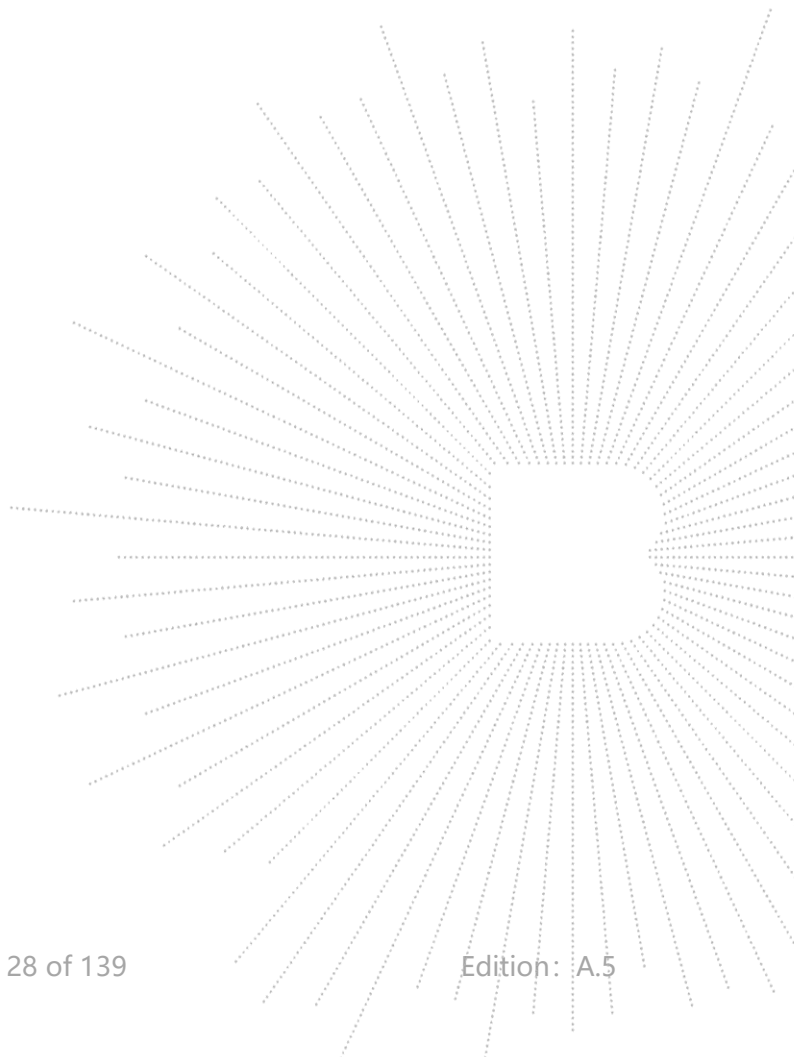

Test Mode:	TX (5.8G) -- 802.11a
------------	----------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.123	58.89	5.94	35.40	44.00	56.23	74	-17.77	PK
V	4679.123	44.00	5.94	35.40	44.00	41.34	54	-12.66	AV
V	11490.127	56.39	8.46	39.75	44.50	60.10	68.2	-8.10	PK
V	11490.127	43.30	8.46	39.75	44.50	47.01	54	-6.99	AV
V	17235.167	58.31	10.12	38.80	44.10	63.13	68.2	-5.07	PK
V	17235.167	43.86	10.12	38.80	42.70	50.08	54	-3.92	AV
H	4679.124	54.28	5.94	35.18	44.00	51.40	74	-22.60	PK
H	4679.124	43.69	5.94	35.18	44.00	40.81	54	-13.19	AV
H	11490.031	51.17	8.46	38.71	44.50	53.84	68.2	-14.36	PK
H	11490.031	41.69	8.46	38.71	44.50	44.36	54	-9.64	AV
H	17235.062	51.05	10.12	38.38	44.10	55.45	68.2	-12.75	PK
H	17235.062	40.49	10.12	38.38	44.10	44.89	54	-9.11	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.007	54.79	6.48	36.35	44.05	53.57	74	-20.43	PK
V	4592.007	43.90	6.48	36.35	44.05	42.68	54	-11.32	AV
V	11570.001	55.87	8.47	37.88	44.51	57.71	68.2	-10.49	PK
V	11570.001	43.55	8.47	37.88	44.51	45.39	54	-8.61	AV
V	17355.027	58.86	10.12	38.80	44.10	63.68	68.2	-4.52	PK
V	17355.027	39.69	10.12	38.80	42.70	45.91	54	-8.09	AV
H	4592.197	59.13	6.48	36.37	44.05	57.93	74	-16.07	PK
H	4592.197	43.38	6.48	36.37	44.05	42.18	54	-11.82	AV
H	11570.089	53.23	8.47	38.64	44.50	55.84	68.2	-12.36	PK
H	11570.089	41.49	8.47	38.64	44.50	44.10	54	-9.90	AV
H	17355.032	53.29	10.12	38.38	44.10	57.69	68.2	-10.51	PK
H	17355.032	40.04	10.12	38.38	44.10	44.44	54	-9.56	AV
High Channel (5825 MHz)-Above 1G									
V	6039.005	60.11	7.10	37.24	43.50	60.95	68.2	-7.25	PK
V	6039.005	43.39	7.10	37.24	43.50	44.23	54	-9.77	AV
V	11650.149	60.15	8.46	37.68	44.50	61.79	74	-12.21	PK
V	11650.149	43.52	8.46	37.68	44.50	45.16	54	-8.84	AV
V	17475.177	55.03	10.12	38.80	44.10	59.85	68.2	-8.35	PK
V	17475.177	43.53	10.12	38.80	42.70	49.75	54	-4.25	AV
H	6039.004	54.10	7.10	37.24	43.50	54.94	68.2	-13.26	PK
H	6039.004	43.44	7.10	37.24	43.50	44.28	54	-9.72	AV
H	11650.112	53.26	8.46	38.57	44.50	55.79	74	-18.21	PK
H	11650.112	41.15	8.46	38.57	44.50	43.68	54	-10.32	AV
H	17475.076	51.19	10.12	38.38	44.10	55.59	68.2	-12.61	PK
H	17475.076	40.89	10.12	38.38	44.10	45.29	54	-8.71	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) --802.11n-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.046	60.11	5.94	35.40	44.00	57.45	74	-16.55	PK
V	4679.046	43.23	5.94	35.40	44.00	40.57	54	-13.43	AV
V	11490.170	56.69	8.46	39.75	44.50	60.40	68.2	-7.80	PK
V	11490.170	43.94	8.46	39.75	44.50	47.65	54	-6.35	AV
V	17235.116	60.00	10.12	38.80	44.10	64.82	68.2	-3.38	PK
V	17235.116	43.04	10.12	38.80	42.70	49.26	54	-4.74	AV
H	4679.124	56.74	5.94	35.18	44.00	53.86	74	-20.14	PK
H	4679.124	43.41	5.94	35.18	44.00	40.53	54	-13.47	AV
H	11490.139	47.20	8.46	38.71	44.50	49.87	68.2	-18.33	PK
H	11490.139	41.24	8.46	38.71	44.50	43.91	54	-10.09	AV
H	17235.056	52.77	10.12	38.38	44.10	57.17	68.2	-11.03	PK
H	17235.056	42.43	10.12	38.38	44.10	46.83	54	-7.17	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.109	59.55	6.48	36.35	44.05	58.33	74	-15.67	PK
V	4592.109	43.70	6.48	36.35	44.05	42.48	54	-11.52	AV
V	11570.060	56.28	8.47	37.88	44.51	58.12	68.2	-10.08	PK
V	11570.060	43.20	8.47	37.88	44.51	45.04	54	-8.96	AV
V	17355.041	57.92	10.12	38.80	44.10	62.74	68.2	-5.46	PK
V	17355.041	43.99	10.12	38.80	42.70	50.21	54	-3.79	AV
H	4592.050	58.74	6.48	36.37	44.05	57.54	74	-16.46	PK
H	4592.050	43.69	6.48	36.37	44.05	42.49	54	-11.51	AV
H	11570.187	52.23	8.47	38.64	44.50	54.84	68.2	-13.36	PK
H	11570.187	43.70	8.47	38.64	44.50	46.31	54	-7.69	AV
H	17355.089	51.01	10.12	38.38	44.10	55.41	68.2	-12.79	PK
H	17355.089	44.65	10.12	38.38	44.10	49.05	54	-4.95	AV
High Channel (5825 MHz)-Above 1G									
V	6039.051	59.71	7.10	37.24	43.50	60.55	68.2	-7.65	PK
V	6039.051	43.97	7.10	37.24	43.50	44.81	54	-9.19	AV
V	11650.015	59.38	8.46	37.68	44.50	61.02	74	-12.98	PK
V	11650.015	43.76	8.46	37.68	44.50	45.40	54	-8.60	AV
V	17475.165	58.94	10.12	38.80	44.10	63.76	68.2	-4.44	PK
V	17475.165	43.57	10.12	38.80	42.70	49.79	54	-4.21	AV
H	6039.069	58.36	7.10	37.24	43.50	59.20	68.2	-9.00	PK
H	6039.069	43.23	7.10	37.24	43.50	44.07	54	-9.93	AV
H	11650.157	54.99	8.46	38.57	44.50	57.52	74	-16.48	PK
H	11650.157	40.32	8.46	38.57	44.50	42.85	54	-11.15	AV
H	17475.026	52.93	10.12	38.38	44.10	57.33	68.2	-10.87	PK
H	17475.026	41.45	10.12	38.38	44.10	45.85	54	-8.15	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) -- 802.11n-HT40
------------	---------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G									
V	4679.010	58.11	5.94	35.40	44.00	55.45	74	-18.55	PK
V	4679.010	43.93	5.94	35.40	44.00	41.27	54	-12.73	AV
V	11510.039	56.27	8.46	39.75	44.50	59.98	74	-14.02	PK
V	11510.039	43.55	8.46	39.75	44.50	47.26	54	-6.74	AV
V	17265.001	56.27	10.12	38.80	44.10	61.09	68.2	-7.11	PK
V	17265.001	2.00	10.12	38.80	42.70	8.22	54	-45.78	AV
H	4679.138	57.19	5.94	35.18	44.00	54.31	74	-19.69	PK
H	4679.138	43.04	5.94	35.18	44.00	40.16	54	-13.84	AV
H	11510.170	51.47	8.46	38.71	44.50	54.14	74	-19.86	PK
H	11510.170	40.33	8.46	38.71	44.50	43.00	54	-11.00	AV
H	17265.186	52.54	10.12	38.38	44.10	56.94	68.2	-11.26	PK
H	17265.186	44.96	10.12	38.38	44.10	49.36	54	-4.64	AV
middle Channel (5795 MHz)-Above 1G									
V	6039.050	60.97	6.48	36.35	44.05	59.75	68.2	-8.45	PK
V	6039.050	43.45	6.48	36.35	44.05	42.23	54	-11.77	AV
V	11590.090	56.57	8.47	37.88	44.51	58.41	74	-15.59	PK
V	11590.090	43.24	8.47	37.88	44.51	45.08	54	-8.92	AV
V	17385.166	55.72	10.12	38.80	44.10	60.54	68.2	-7.66	PK
V	17385.166	41.11	10.12	38.80	42.70	47.33	54	-6.67	AV
H	6039.153	57.69	6.48	36.37	44.05	56.49	68.2	-11.71	PK
H	6039.153	43.37	6.48	36.37	44.05	42.17	54	-11.83	AV
H	11590.054	52.41	8.47	38.64	44.50	55.02	74	-18.98	PK
H	11590.054	40.69	8.47	38.64	44.50	43.30	54	-10.70	AV
H	17385.028	50.97	10.12	38.38	44.10	55.37	68.2	-12.83	PK
H	17385.028	42.52	10.12	38.38	44.10	46.92	54	-7.08	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) --802.11ac-HT20
------------	---------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.092	56.80	5.94	35.40	44.00	54.14	74	-19.86	PK
V	4679.092	43.35	5.94	35.40	44.00	40.69	54	-13.31	AV
V	11490.132	54.85	8.46	39.75	44.50	58.56	68.2	-9.64	PK
V	11490.132	43.78	8.46	39.75	44.50	47.49	54	-6.51	AV
V	17235.160	59.81	10.12	38.80	44.10	64.63	68.2	-3.57	PK
V	17235.160	43.65	10.12	38.80	42.70	49.87	54	-4.13	AV
H	4679.051	58.59	5.94	35.18	44.00	55.71	74	-18.29	PK
H	4679.051	43.19	5.94	35.18	44.00	40.31	54	-13.69	AV
H	11490.025	50.15	8.46	38.71	44.50	52.82	68.2	-15.38	PK
H	11490.025	44.06	8.46	38.71	44.50	46.73	54	-7.27	AV
H	17235.152	52.85	10.12	38.38	44.10	57.25	68.2	-10.95	PK
H	17235.152	42.36	10.12	38.38	44.10	46.76	54	-7.24	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.088	58.07	6.48	36.35	44.05	56.85	74	-17.15	PK
V	4592.088	43.23	6.48	36.35	44.05	42.01	54	-11.99	AV
V	11570.072	57.98	8.47	37.88	44.51	59.82	68.2	-8.38	PK
V	11570.072	43.88	8.47	37.88	44.51	45.72	54	-8.28	AV
V	17355.113	57.50	10.12	38.80	44.10	62.32	68.2	-5.88	PK
V	17355.113	43.43	10.12	38.80	42.70	49.65	54	-4.35	AV
H	4592.179	56.86	6.48	36.37	44.05	55.66	74	-18.34	PK
H	4592.179	43.51	6.48	36.37	44.05	42.31	54	-11.69	AV
H	11570.177	54.57	8.47	38.64	44.50	57.18	68.2	-11.02	PK
H	11570.177	43.36	8.47	38.64	44.50	45.97	54	-8.03	AV
H	17355.035	51.73	10.12	38.38	44.10	56.13	68.2	-12.07	PK
H	17355.035	41.62	10.12	38.38	44.10	46.02	54	-7.98	AV
High Channel (5825 MHz)-Above 1G									
V	6039.081	55.14	7.10	37.24	43.50	55.98	68.2	-12.22	PK
V	6039.081	43.40	7.10	37.24	43.50	44.24	54	-9.76	AV
V	11650.025	60.23	8.46	37.68	44.50	61.87	74	-12.13	PK
V	11650.025	43.60	8.46	37.68	44.50	45.24	54	-8.76	AV
V	17475.191	55.14	10.12	38.80	44.10	59.96	68.2	-8.24	PK
V	17475.191	43.56	10.12	38.80	42.70	49.78	54	-4.22	AV
H	6039.131	58.78	7.10	37.24	43.50	59.62	68.2	-8.58	PK
H	6039.131	43.62	7.10	37.24	43.50	44.46	54	-9.54	AV
H	11650.194	52.39	8.46	38.57	44.50	54.92	74	-19.08	PK
H	11650.194	44.96	8.46	38.57	44.50	47.49	54	-6.51	AV
H	17475.041	52.62	10.12	38.38	44.10	57.02	68.2	-11.18	PK
H	17475.041	42.14	10.12	38.38	44.10	46.54	54	-7.46	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G									
V	4679.047	56.93	5.94	35.40	44.00	54.27	74	-19.73	PK
V	4679.047	43.91	5.94	35.40	44.00	41.25	54	-12.75	AV
V	11510.171	55.80	8.46	39.75	44.50	59.51	74	-14.49	PK
V	11510.171	43.91	8.46	39.75	44.50	47.62	54	-6.38	AV
V	17265.033	57.22	10.12	38.80	44.10	62.04	68.2	-6.16	PK
V	17265.033	2.00	10.12	38.80	42.70	8.22	54	-45.78	AV
H	4679.184	56.31	5.94	35.18	44.00	53.43	74	-20.57	PK
H	4679.184	43.11	5.94	35.18	44.00	40.23	54	-13.77	AV
H	11510.007	53.97	8.46	38.71	44.50	56.64	74	-17.36	PK
H	11510.007	44.07	8.46	38.71	44.50	46.74	54	-7.26	AV
H	17265.069	50.81	10.12	38.38	44.10	55.21	68.2	-12.99	PK
H	17265.069	40.59	10.12	38.38	44.10	44.99	54	-9.01	AV
middle Channel (5795 MHz)-Above 1G									
V	6039.046	59.83	6.48	36.35	44.05	58.61	68.2	-9.59	PK
V	6039.046	43.37	6.48	36.35	44.05	42.15	54	-11.85	AV
V	11590.097	58.37	8.47	37.88	44.51	60.21	74	-13.79	PK
V	11590.097	43.53	8.47	37.88	44.51	45.37	54	-8.63	AV
V	17385.023	55.68	10.12	38.80	44.10	60.50	68.2	-7.70	PK
V	17385.023	42.00	10.12	38.80	42.70	48.22	54	-5.78	AV
H	6039.006	56.47	6.48	36.37	44.05	55.27	68.2	-12.93	PK
H	6039.006	43.59	6.48	36.37	44.05	42.39	54	-11.61	AV
H	11590.012	54.98	8.47	38.64	44.50	57.59	74	-16.41	PK
H	11590.012	41.60	8.47	38.64	44.50	44.21	54	-9.79	AV
H	17385.075	53.54	10.12	38.38	44.10	57.94	68.2	-10.26	PK
H	17385.075	42.31	10.12	38.38	44.10	46.71	54	-7.29	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ac 80
-------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5775 MHz)-Above 1G									
V	4679.094	55.96	5.94	35.40	44.00	53.30	74	-20.70	PK
V	4679.094	43.90	5.94	35.40	44.00	41.24	54	-12.76	AV
V	11550.071	55.30	8.46	39.75	44.50	59.01	74	-14.99	PK
V	11550.071	42.54	8.46	39.75	44.50	46.25	54	-7.75	AV
V	17325.153	59.59	10.12	38.80	44.10	64.41	68.2	-3.79	PK
V	17325.153	41.79	10.12	38.80	42.70	48.01	54	-5.99	AV
H	4679.156	55.58	5.94	35.18	44.00	52.70	74	-21.30	PK
H	4679.156	43.35	5.94	35.18	44.00	40.47	54	-13.53	AV
H	11550.099	54.37	8.46	38.71	44.50	57.04	74	-16.96	PK
H	11550.099	44.12	8.46	38.71	44.50	46.79	54	-7.21	AV
H	17325.076	53.52	10.12	38.38	44.10	57.92	68.2	-10.28	PK
H	17325.076	40.99	10.12	38.38	44.10	45.39	54	-8.61	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

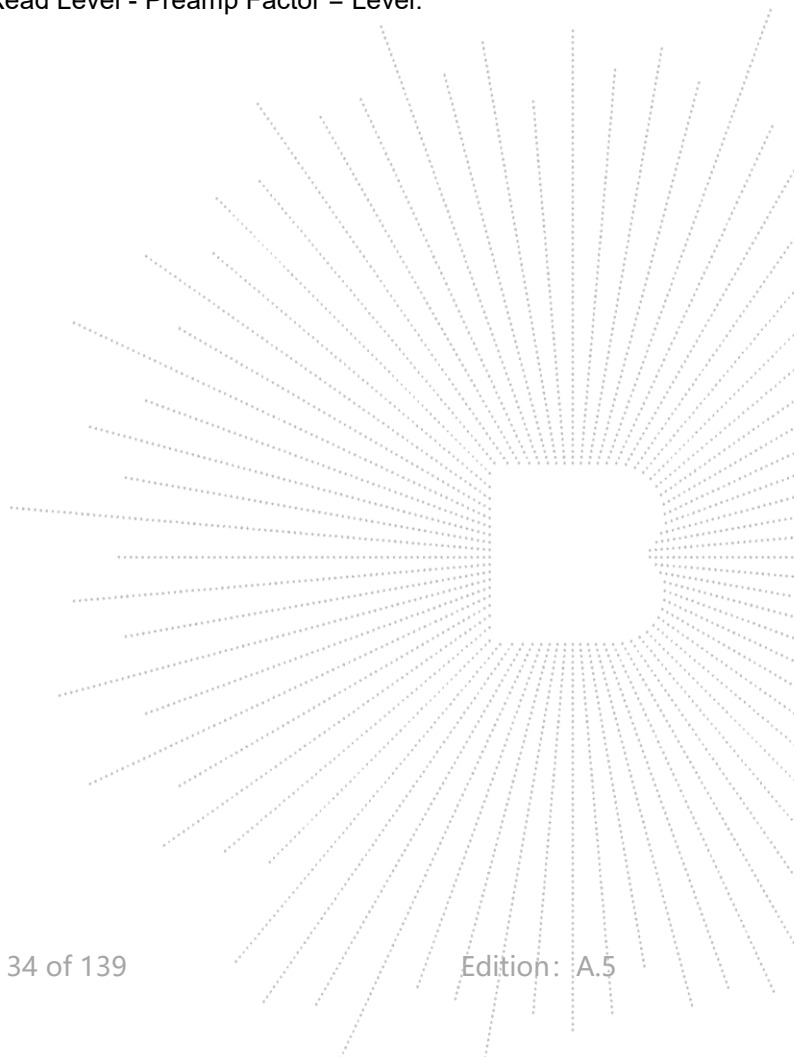

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test Procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

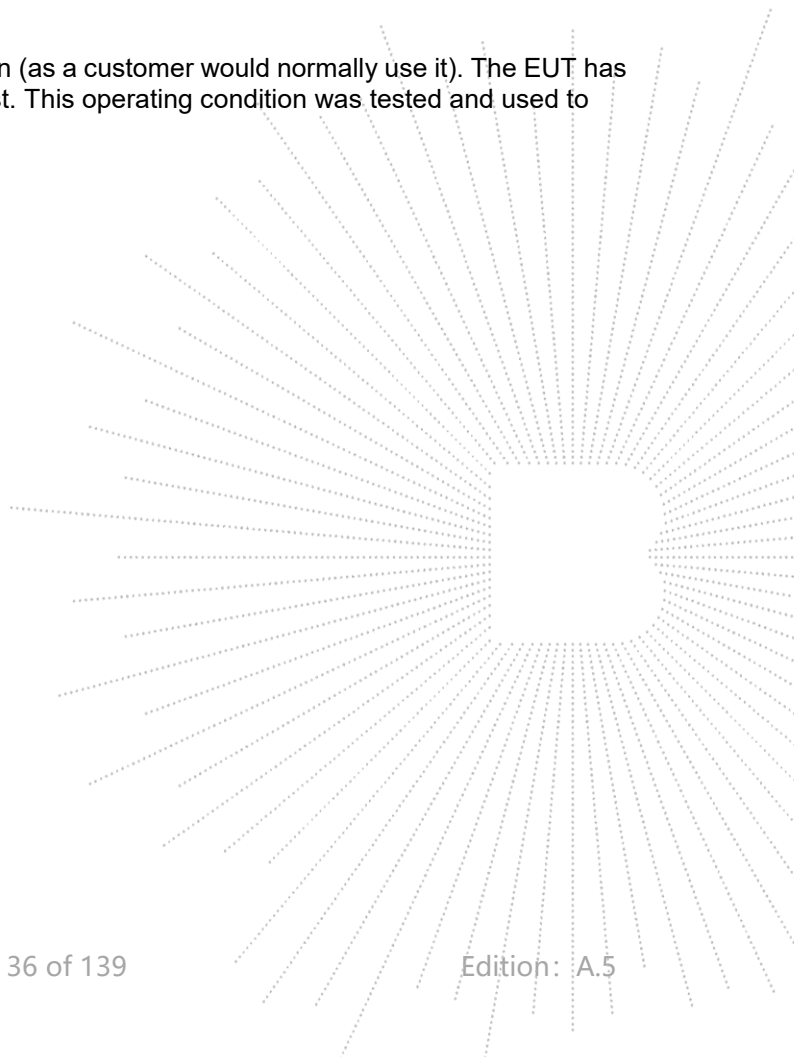




8.5 Test Result



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	(5180-5240MHz); (5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/1MHz)	Limit (dBm/1MHz)	Verdict
NVNT	a	5180	-0.39	11	Pass
NVNT	a	5200	0.03	11	Pass
NVNT	a	5240	-0.65	11	Pass
NVNT	n20	5180	-1.75	11	Pass
NVNT	n20	5200	-1.28	11	Pass
NVNT	n20	5240	0.07	11	Pass
NVNT	n40	5190	-5.37	11	Pass
NVNT	n40	5230	-3.76	11	Pass
NVNT	ac20	5180	-1.96	11	Pass
NVNT	ac20	5200	-1.86	11	Pass
NVNT	ac20	5240	-0.26	11	Pass
NVNT	ac40	5190	-5.64	11	Pass
NVNT	ac40	5230	-3.89	11	Pass
NVNT	ac80	5210	-7.85	11	Pass



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	-2.01	30	Pass
NVNT	a	5785	-2.73	30	Pass
NVNT	a	5825	-3.01	30	Pass
NVNT	n20	5745	-2.8	30	Pass
NVNT	n20	5785	-4.13	30	Pass
NVNT	n20	5825	-4.61	30	Pass
NVNT	n40	5755	-6.87	30	Pass
NVNT	n40	5795	-8.24	30	Pass
NVNT	ac20	5745	-3.59	30	Pass
NVNT	ac20	5785	-3.67	30	Pass
NVNT	ac20	5825	-4.26	30	Pass
NVNT	ac40	5755	-7.04	30	Pass
NVNT	ac40	5795	-7.95	30	Pass
NVNT	ac80	5775	-12.4	30	Pass


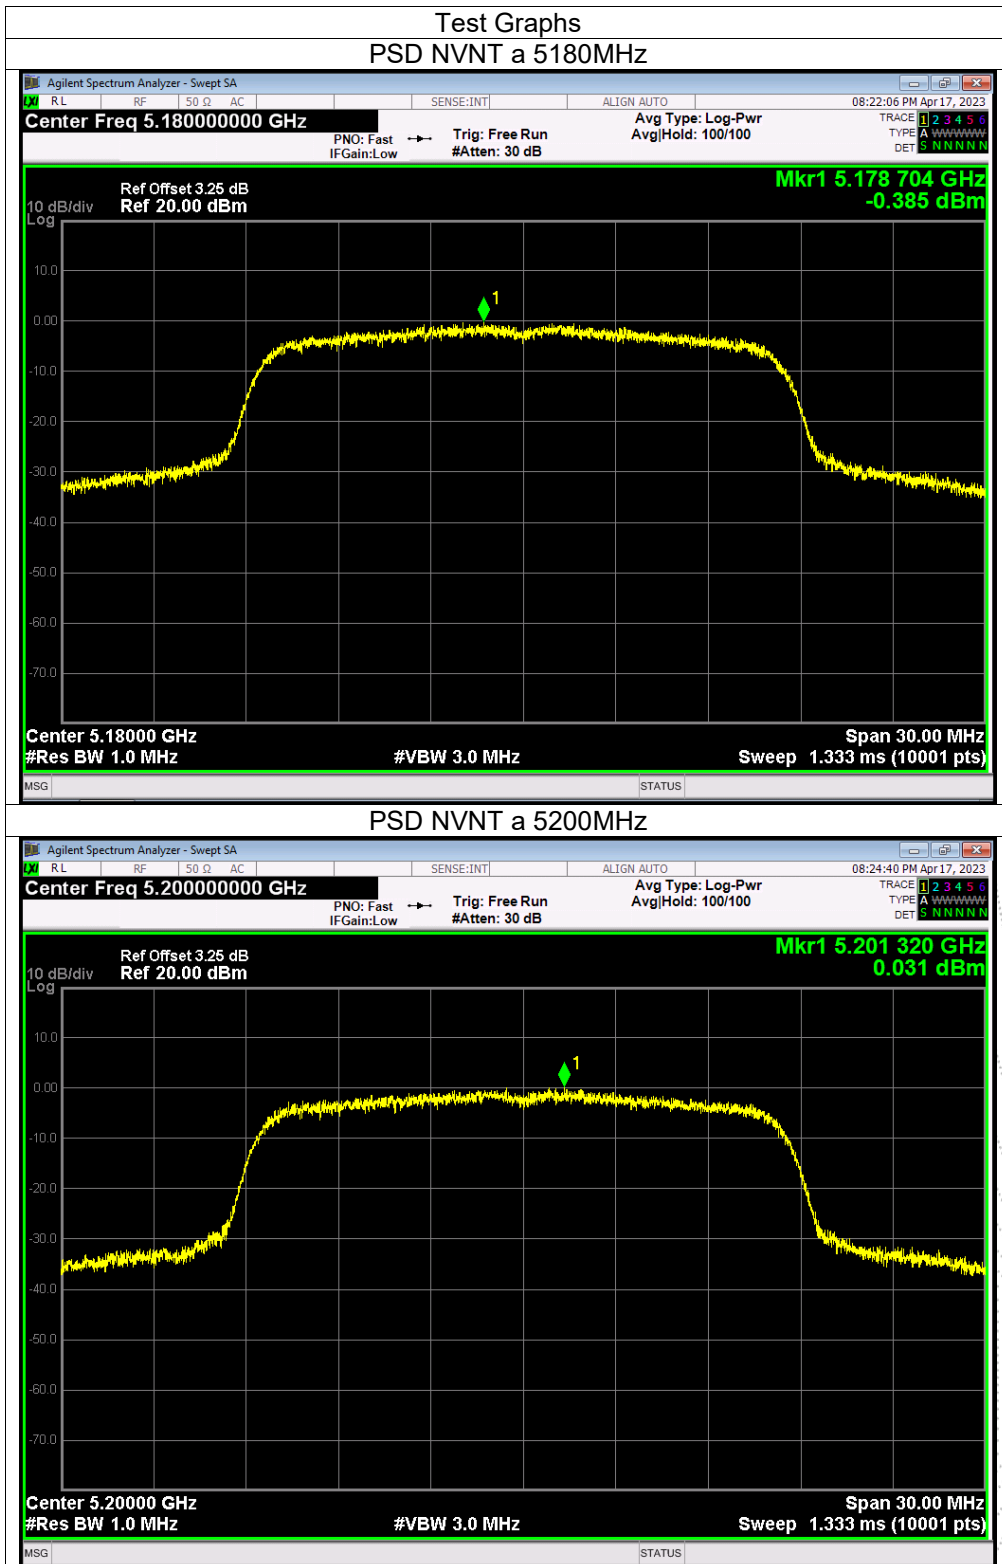


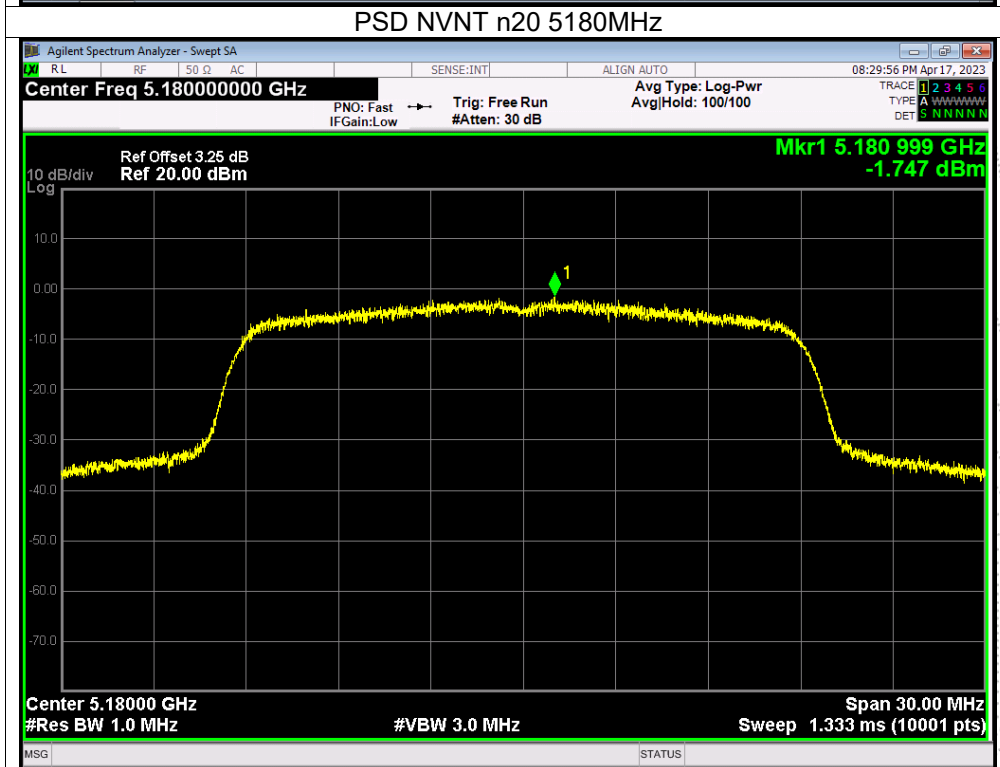
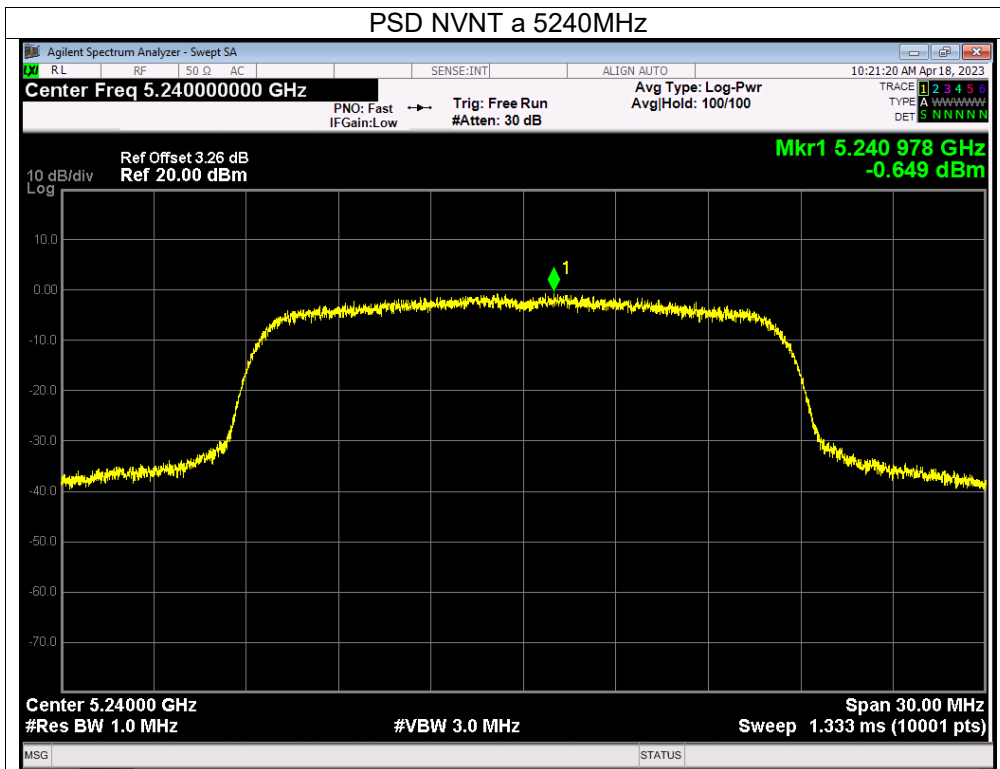


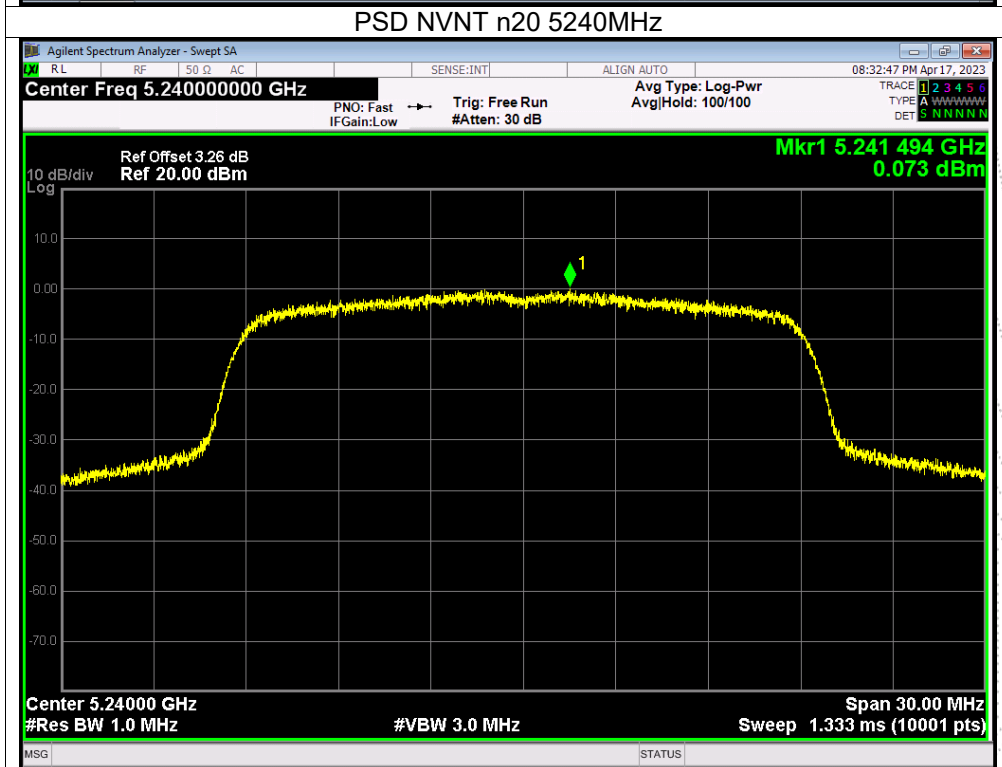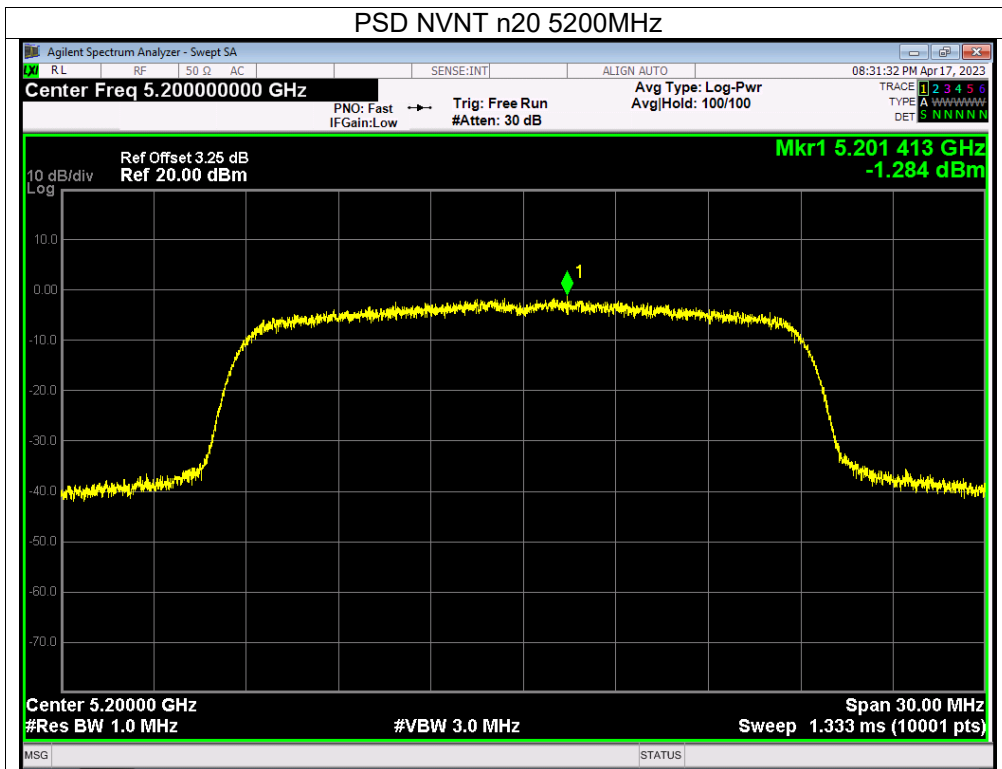


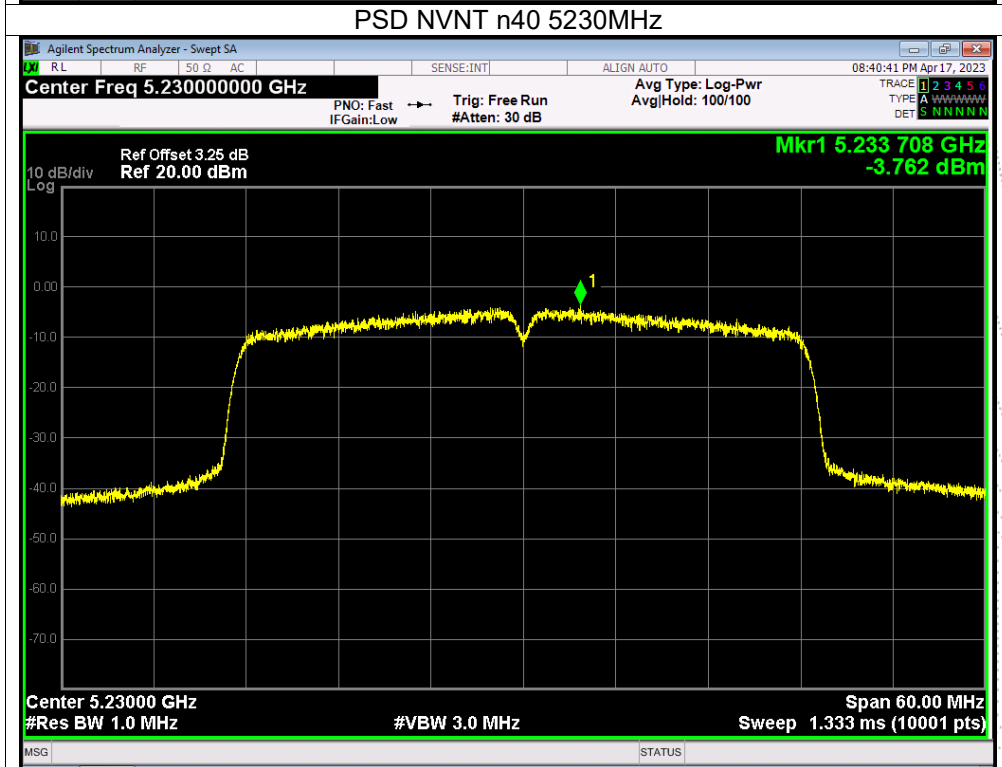
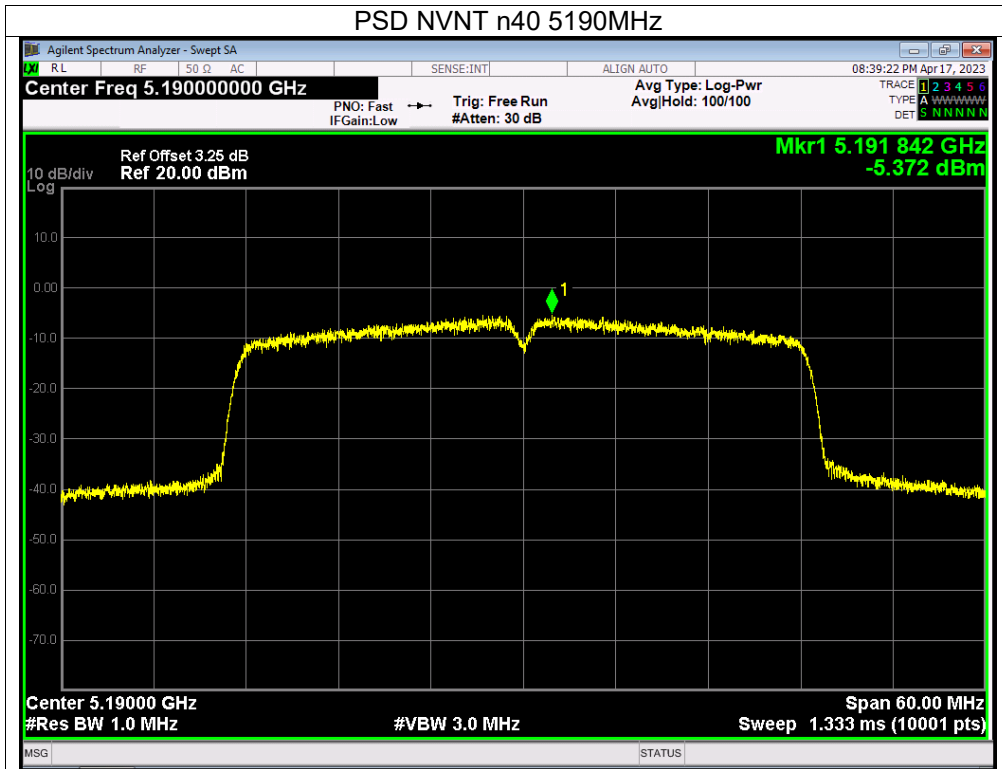


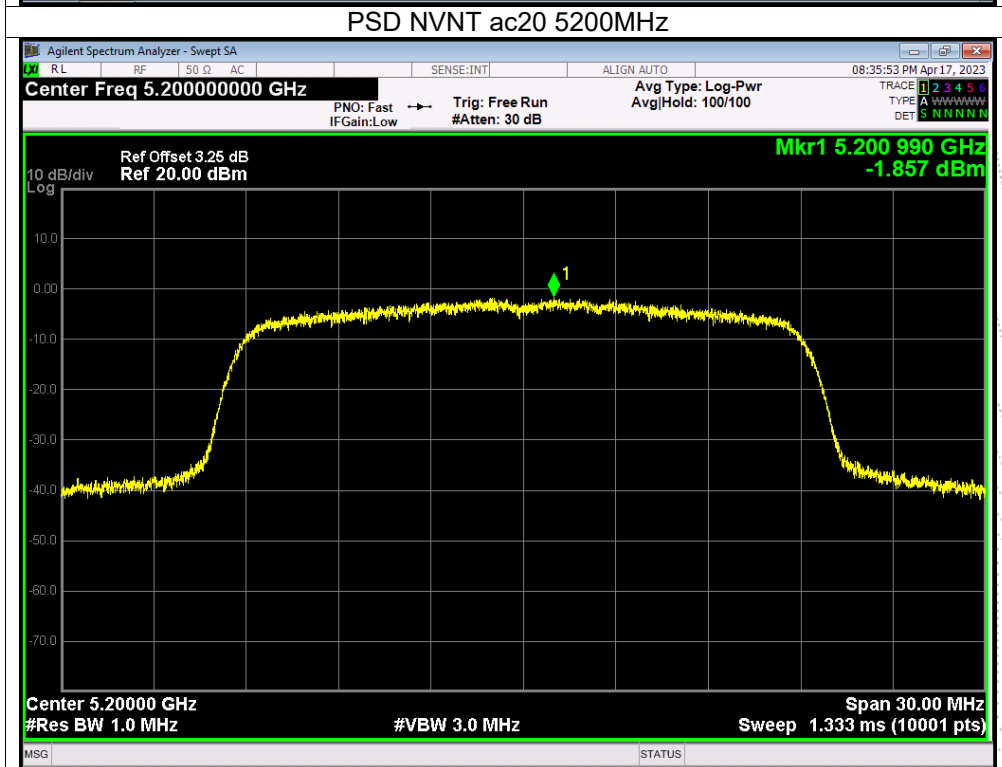
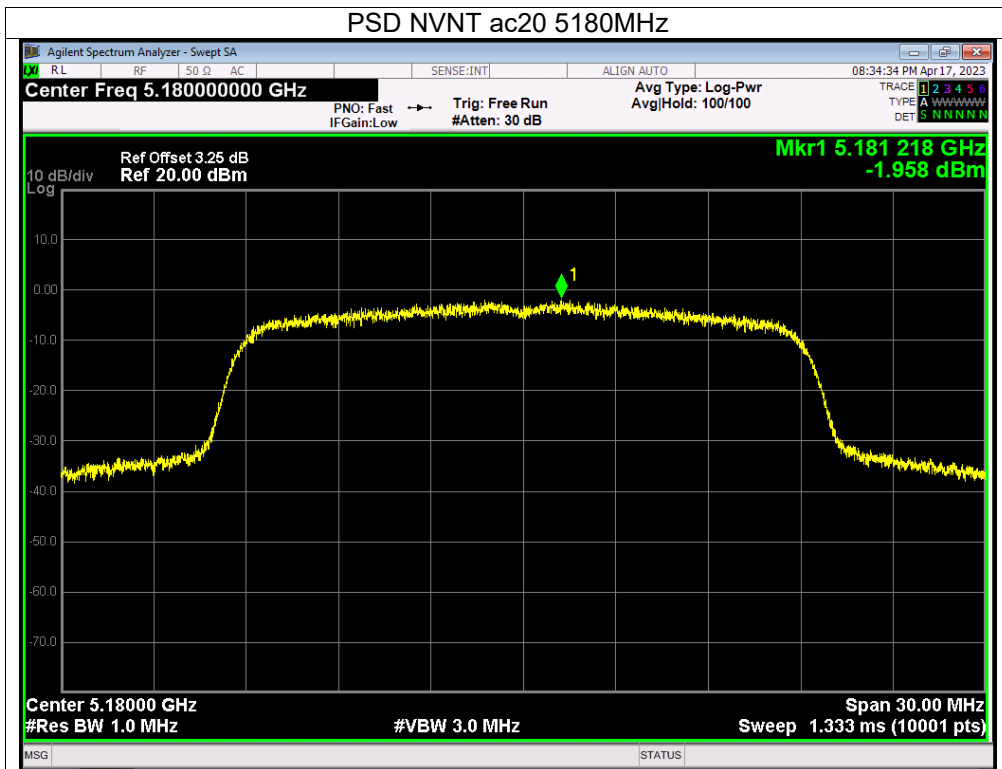


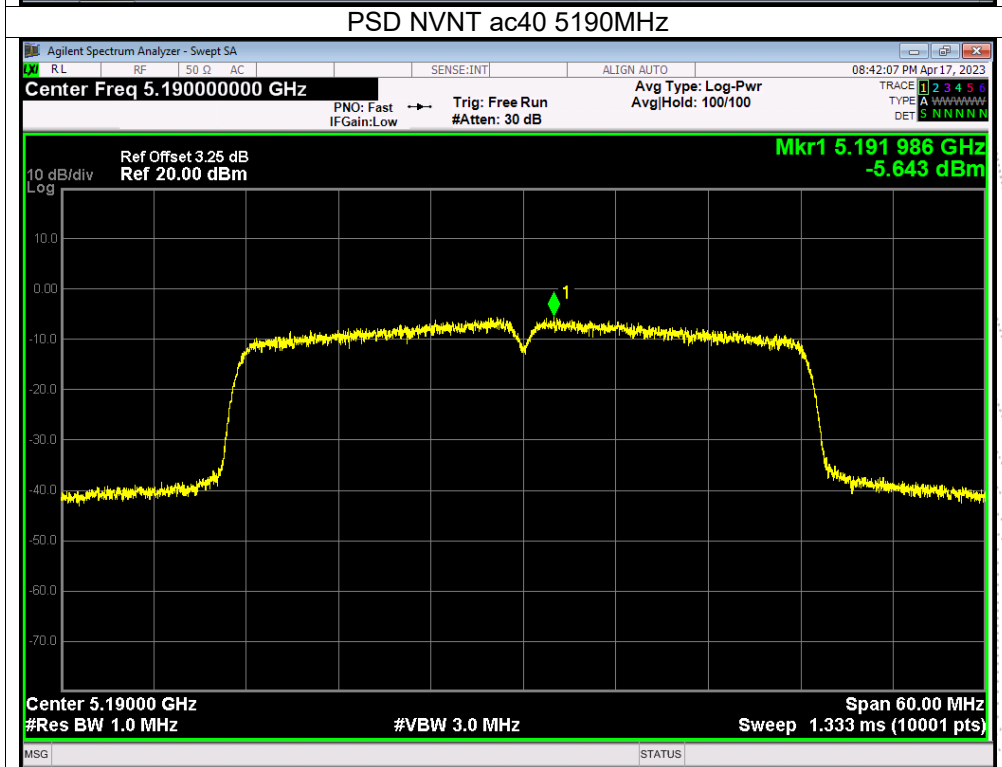
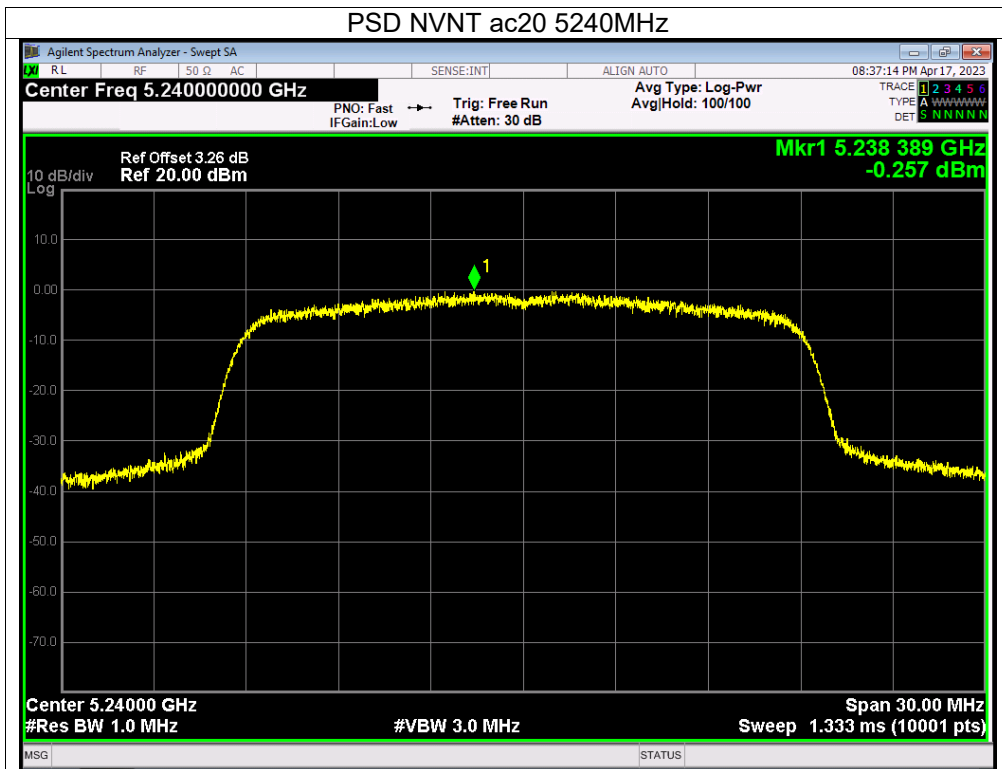


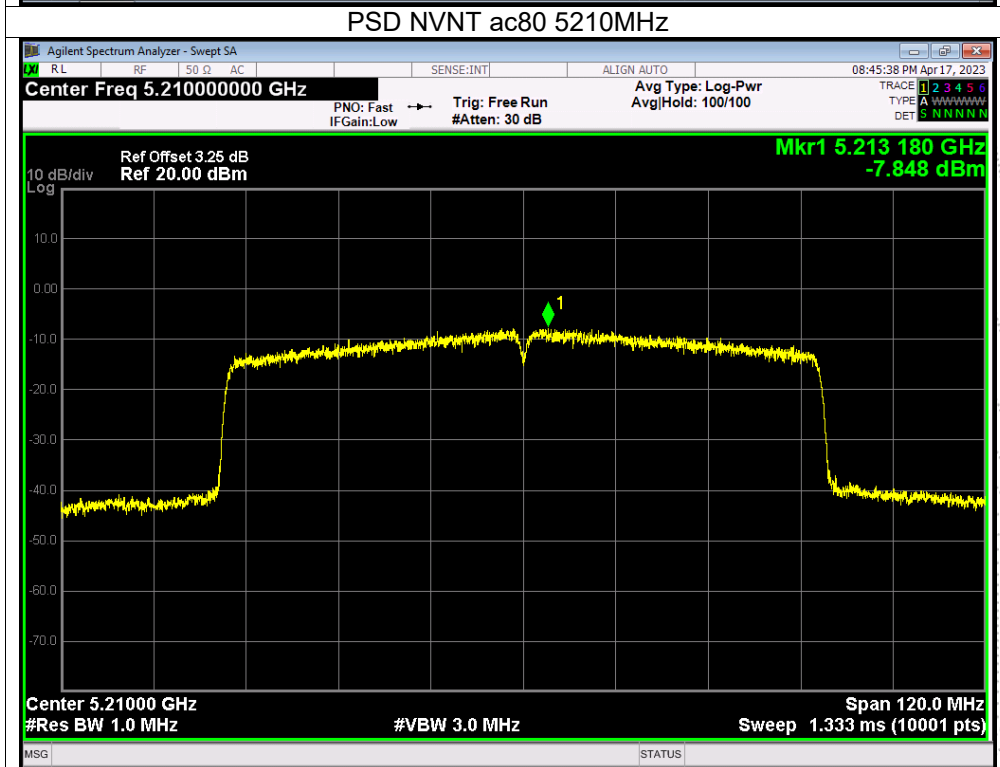
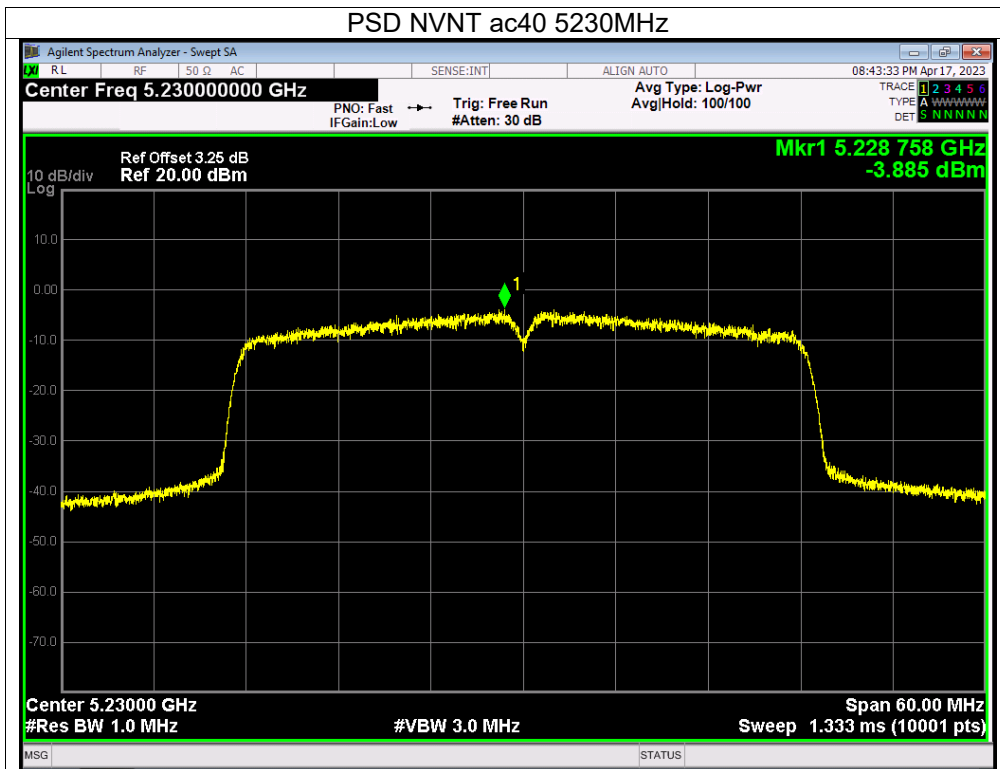



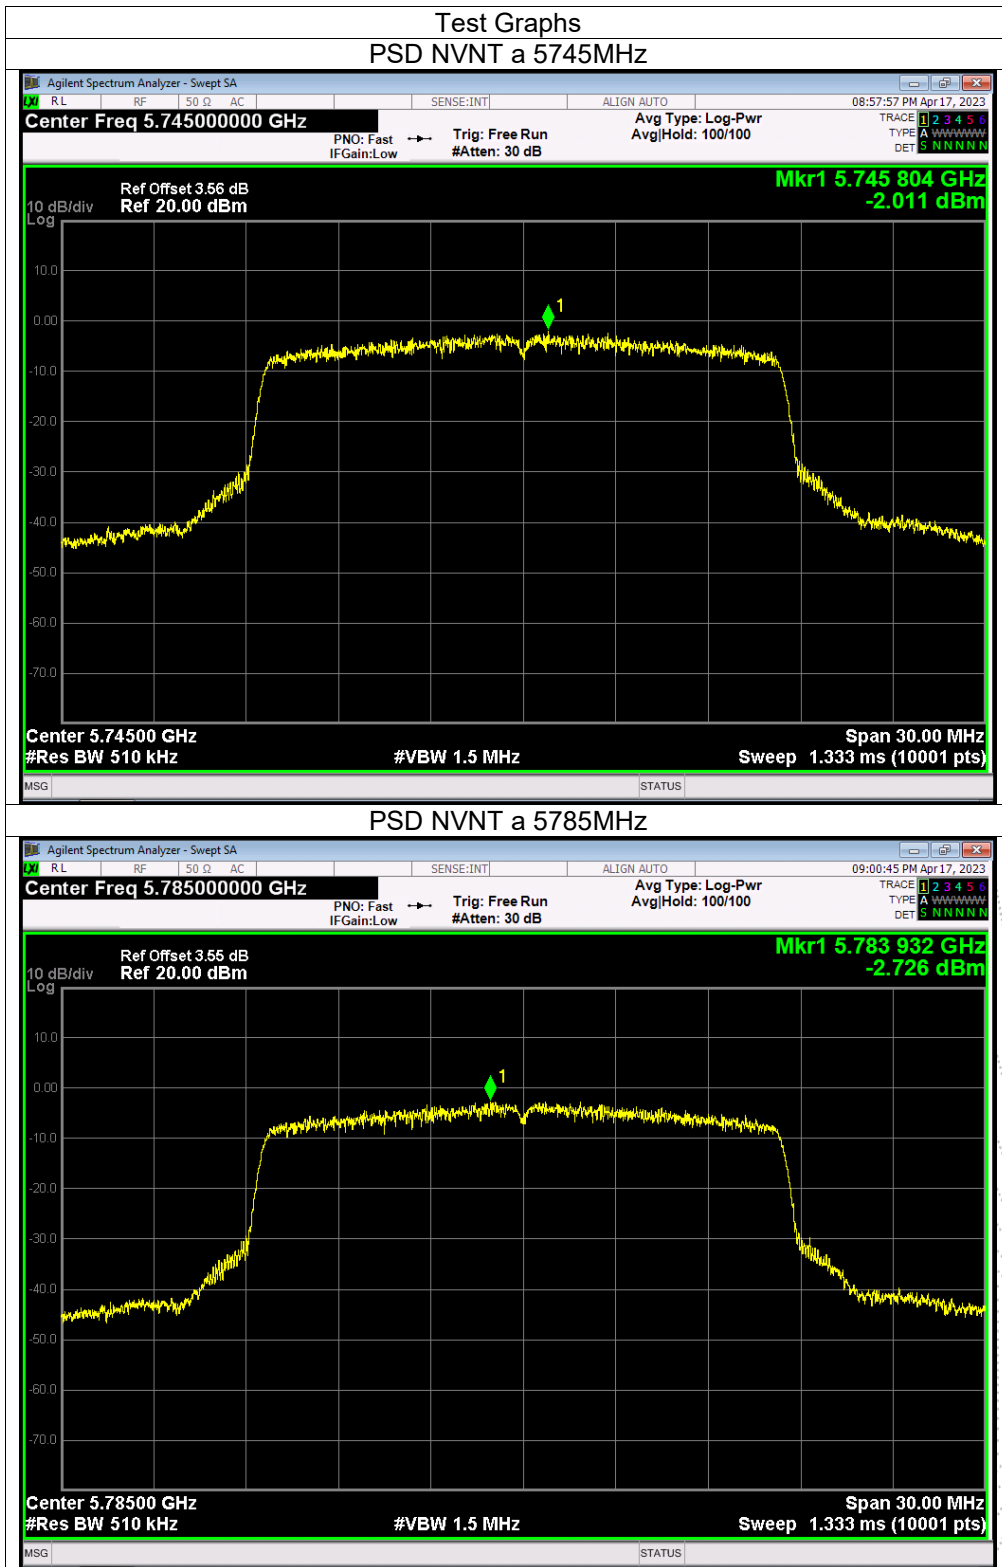


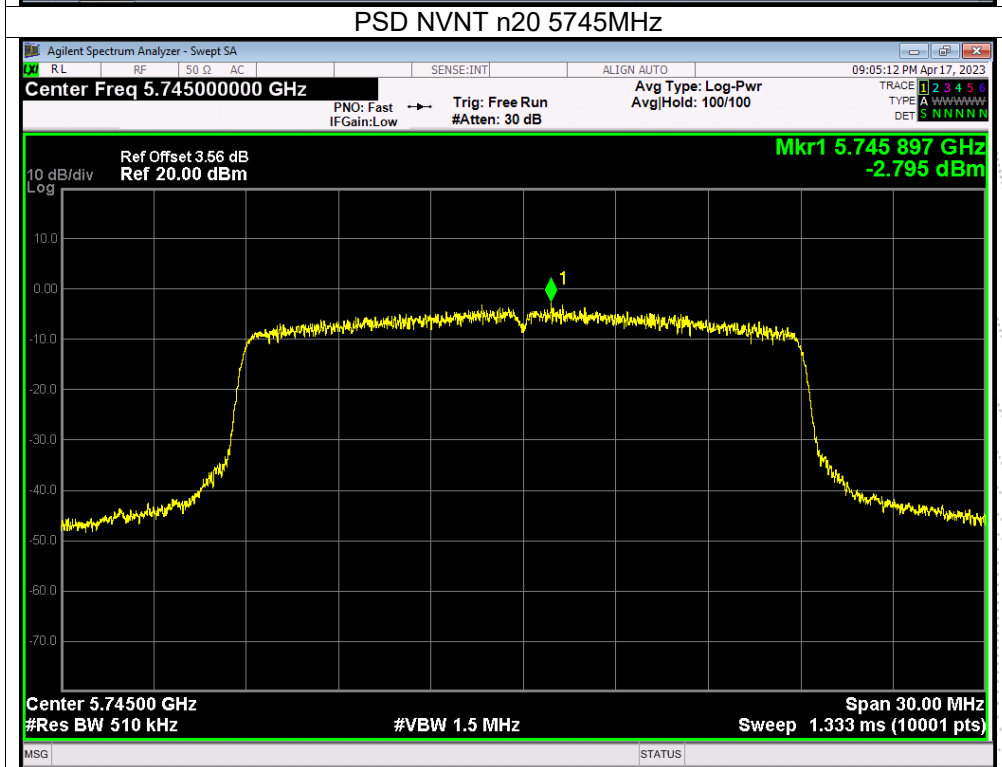
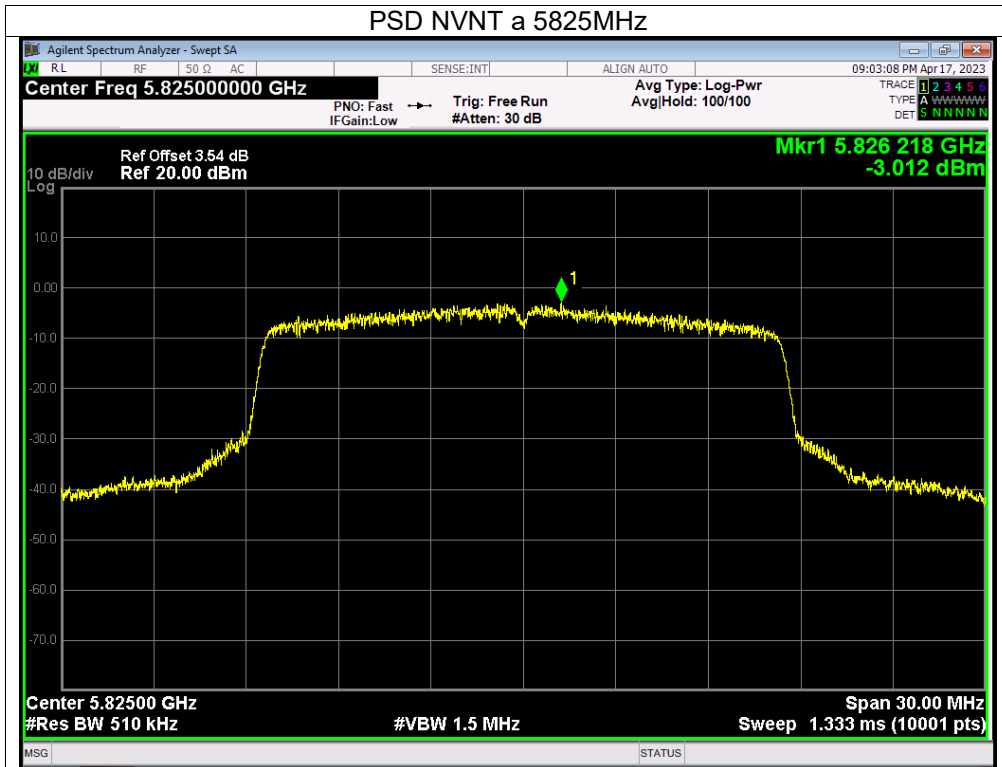


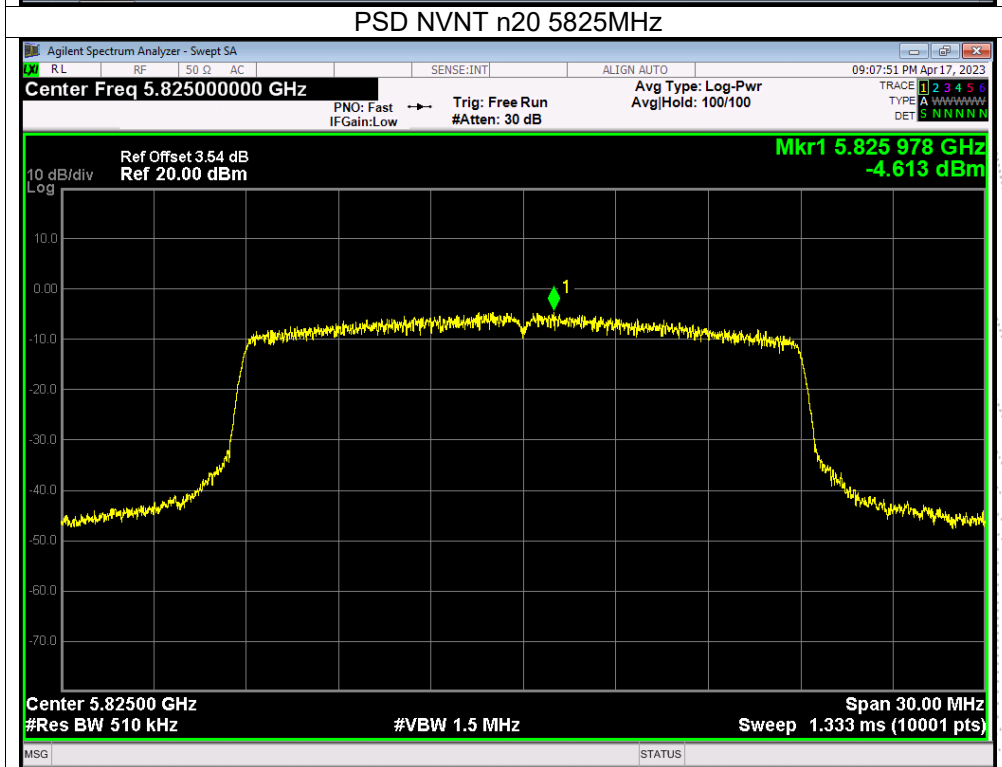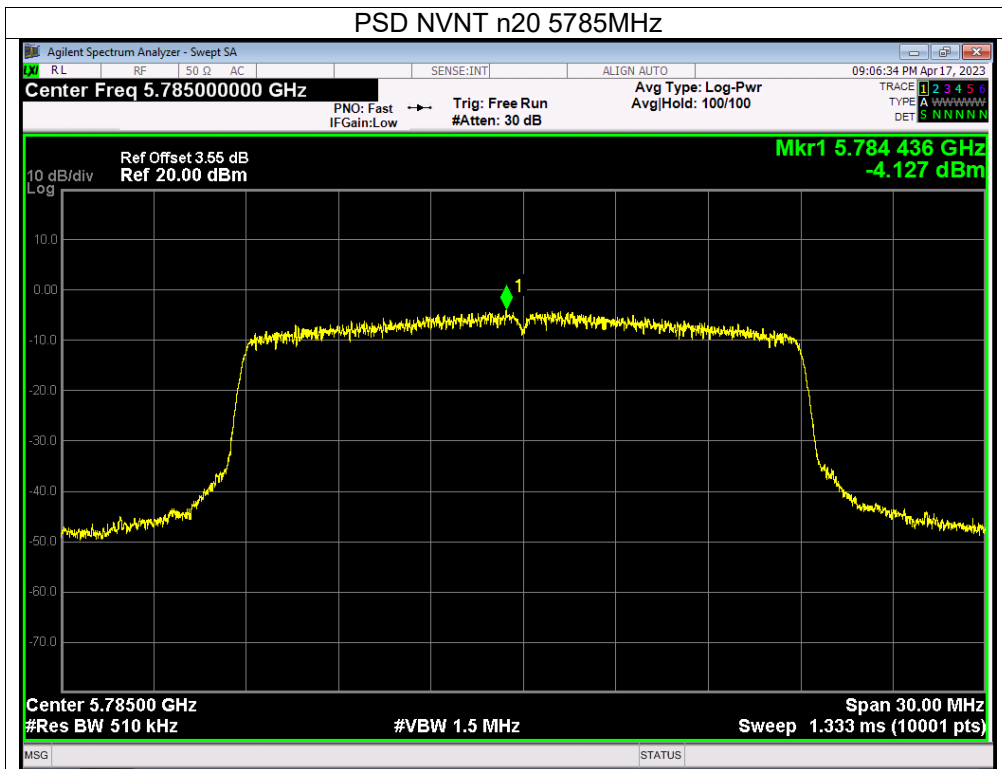

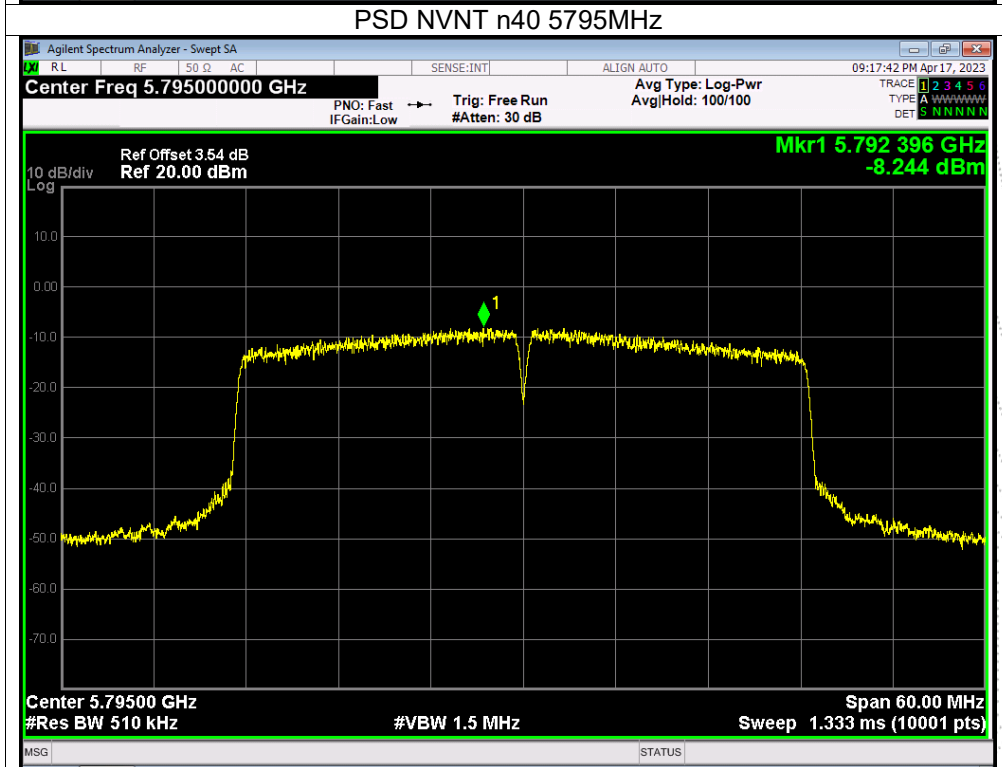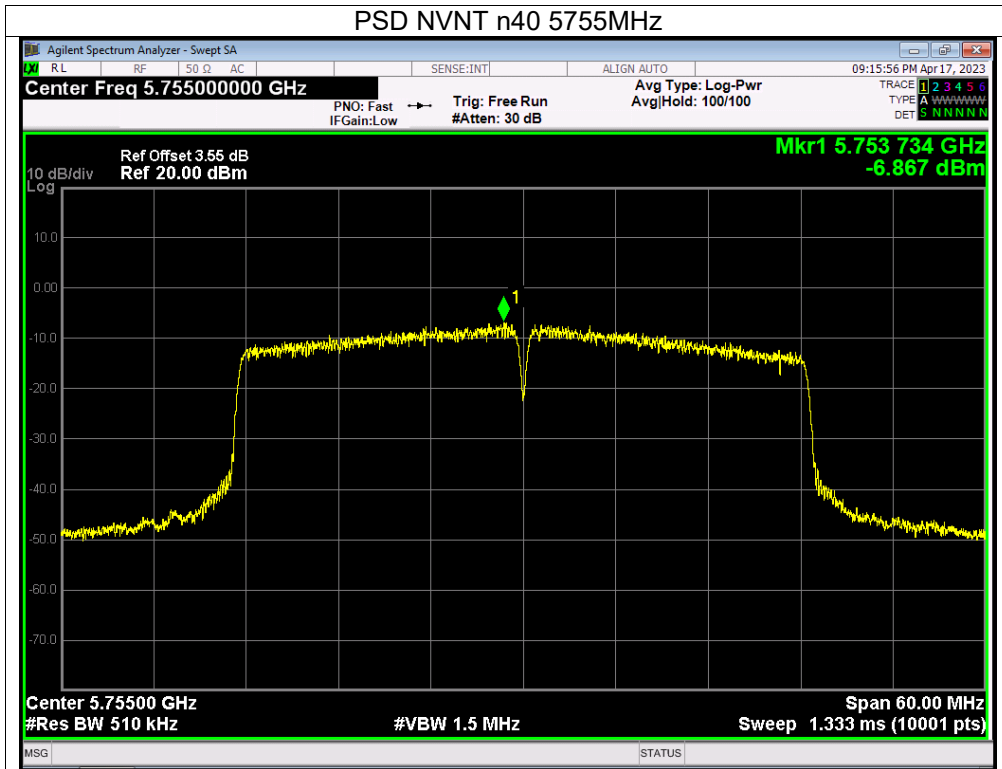

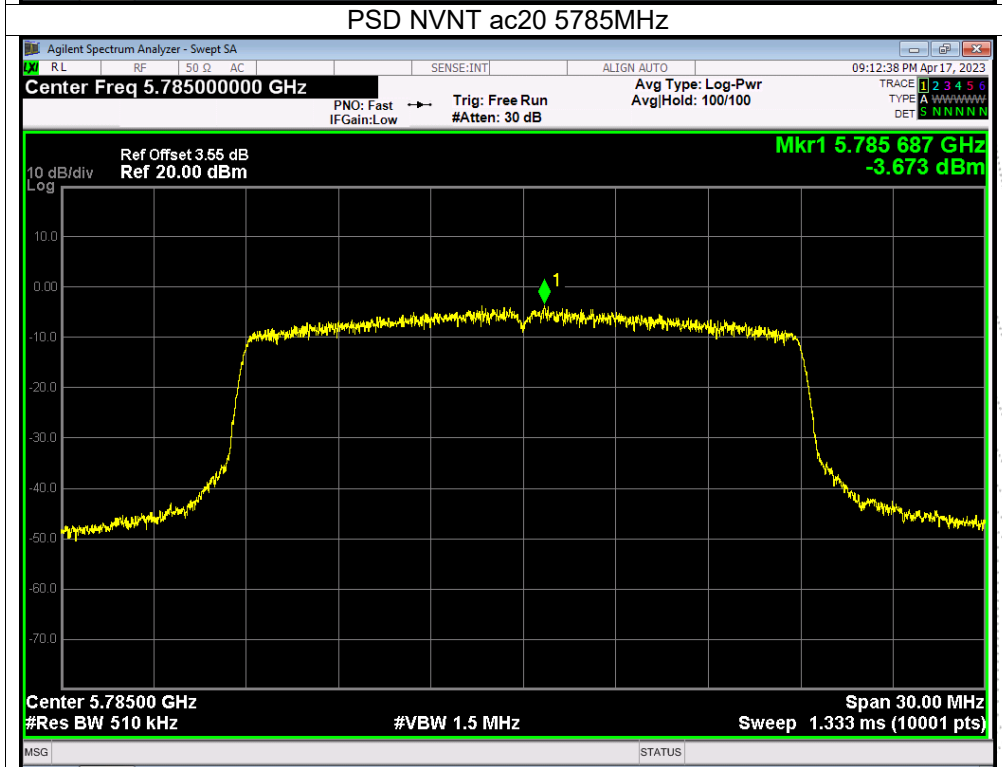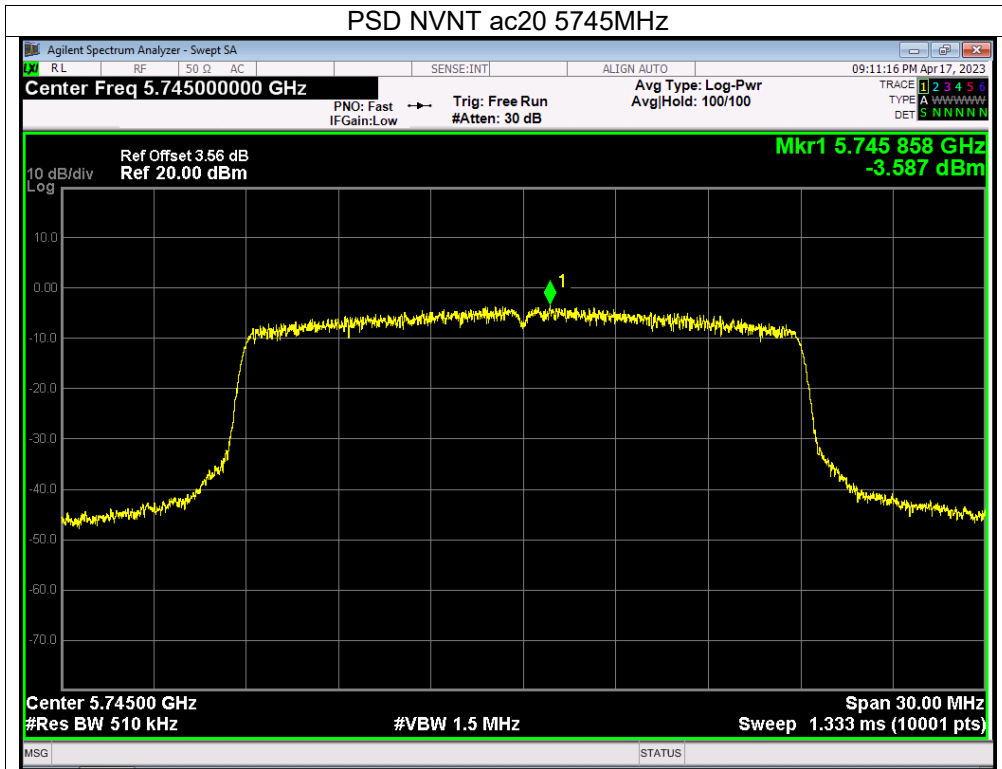


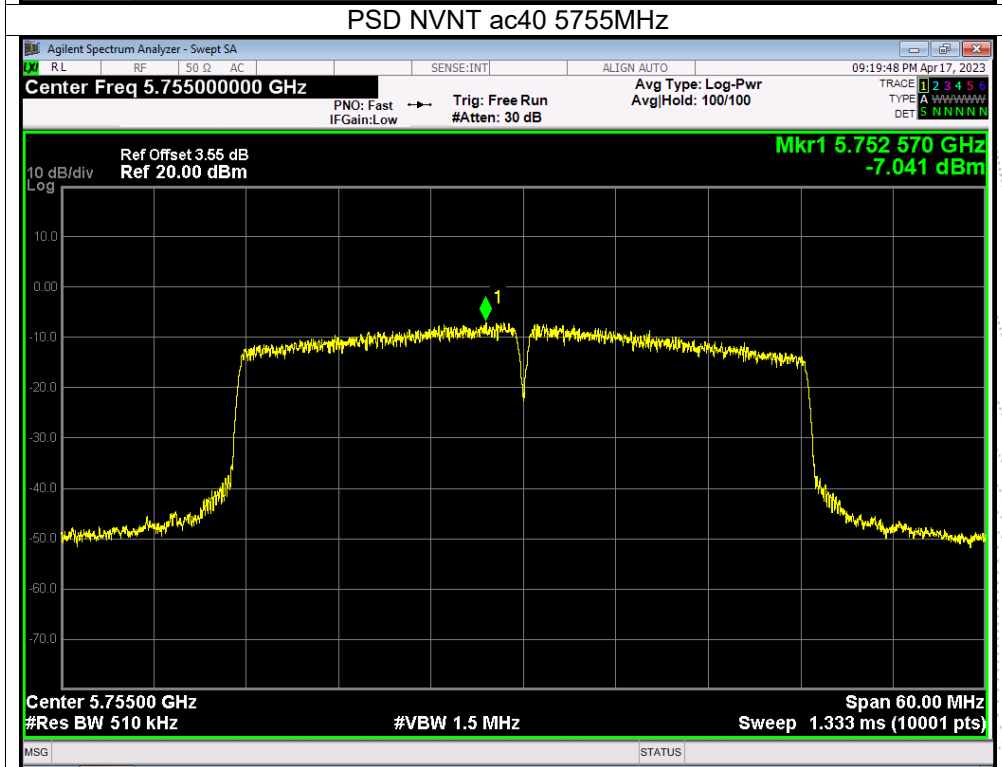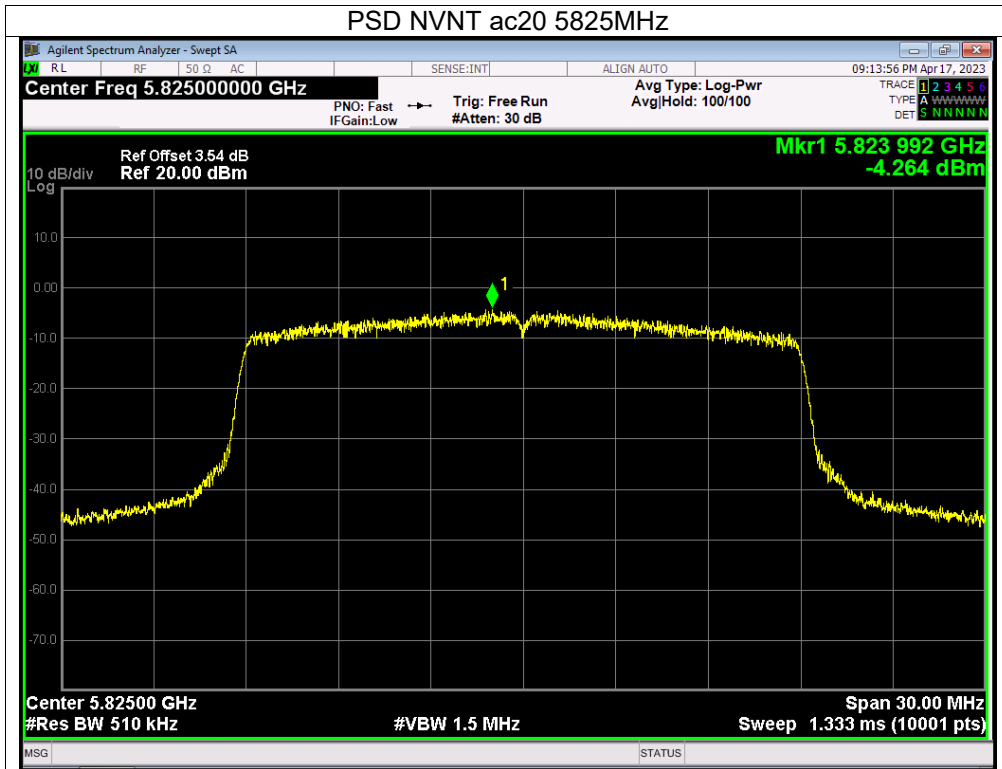

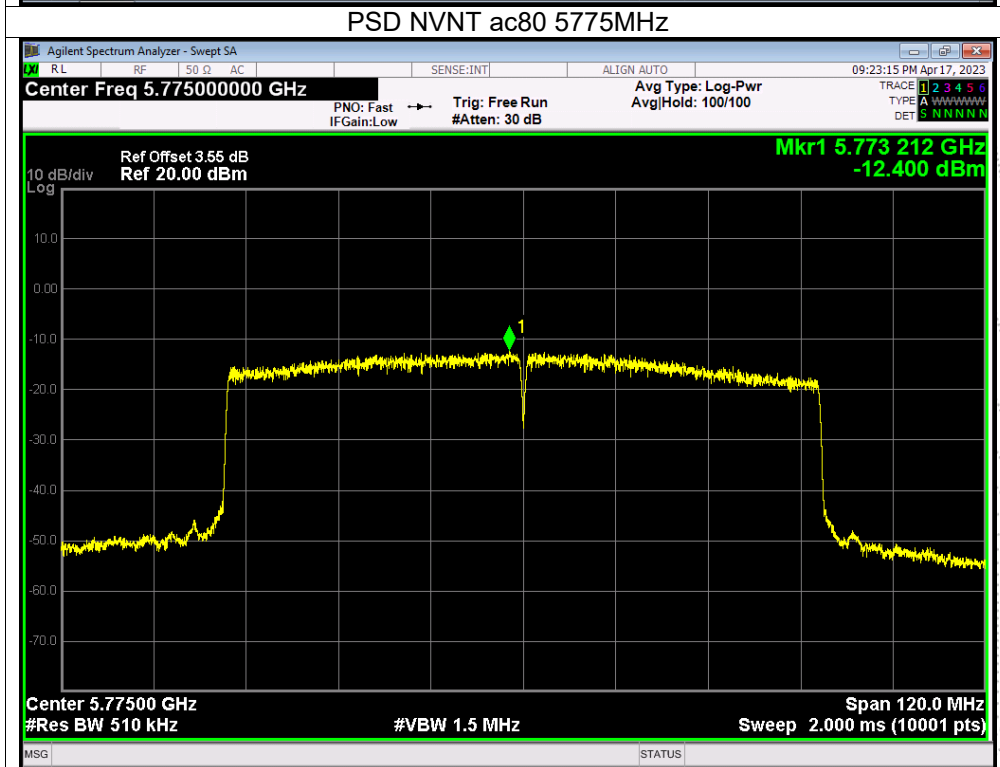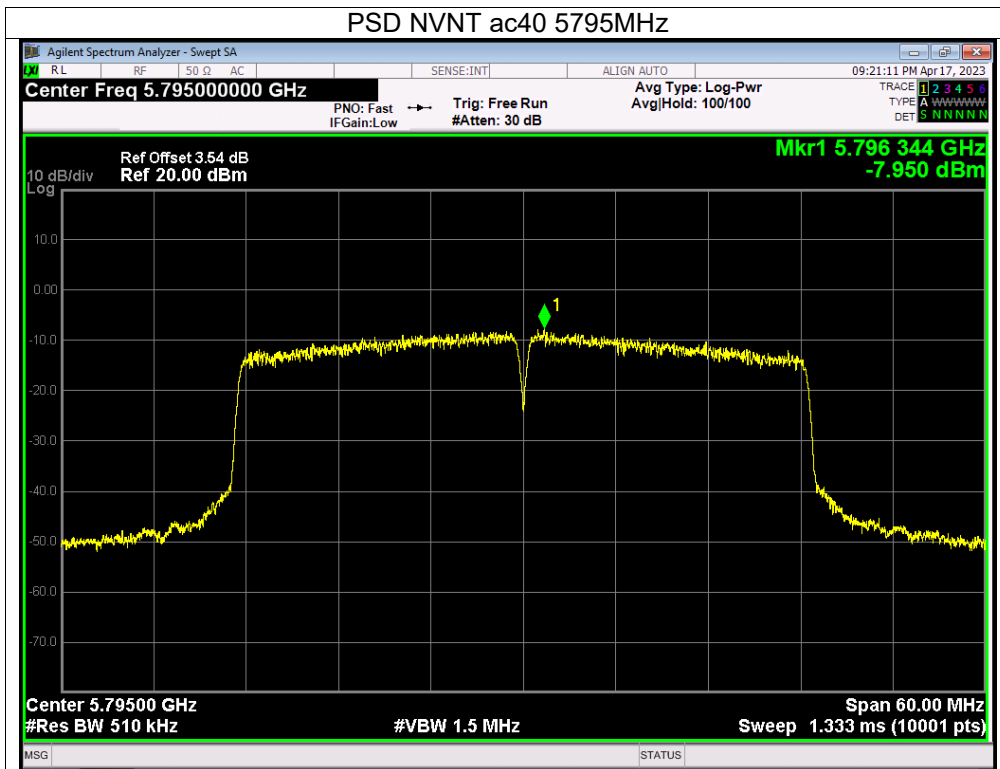

9. 26dB & 6dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

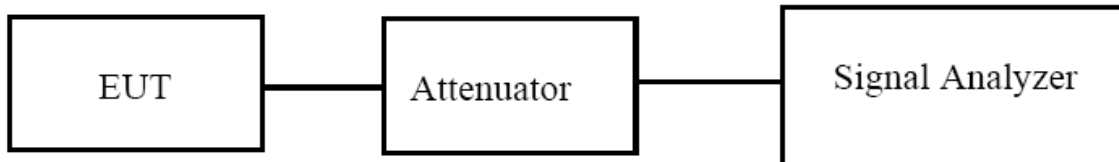

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.
(6dB bandwidth)>500kHz

9.3 Test Procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6dB

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.

6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


9.4 EUT Operating Conditions



The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



9.5 Test Result



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		



Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-26dB bandwidth (MHz)	Result
NVNT	a	5180	16.588	27.635	Pass
NVNT	a	5200	16.613	25.462	Pass
NVNT	a	5240	16.567	24.174	Pass
NVNT	n20	5180	17.604	24.838	Pass
NVNT	n20	5200	17.626	23.914	Pass
NVNT	n20	5240	17.605	20.54	Pass
NVNT	n40	5190	36.052	46.355	Pass
NVNT	n40	5230	35.977	43.049	Pass
NVNT	ac20	5180	17.66	23.041	Pass
NVNT	ac20	5200	17.624	26.87	Pass
NVNT	ac20	5240	17.601	22.024	Pass
NVNT	ac40	5190	36.043	49.658	Pass
NVNT	ac40	5230	35.994	45.29	Pass
NVNT	ac80	5210	75.082	80.728	Pass


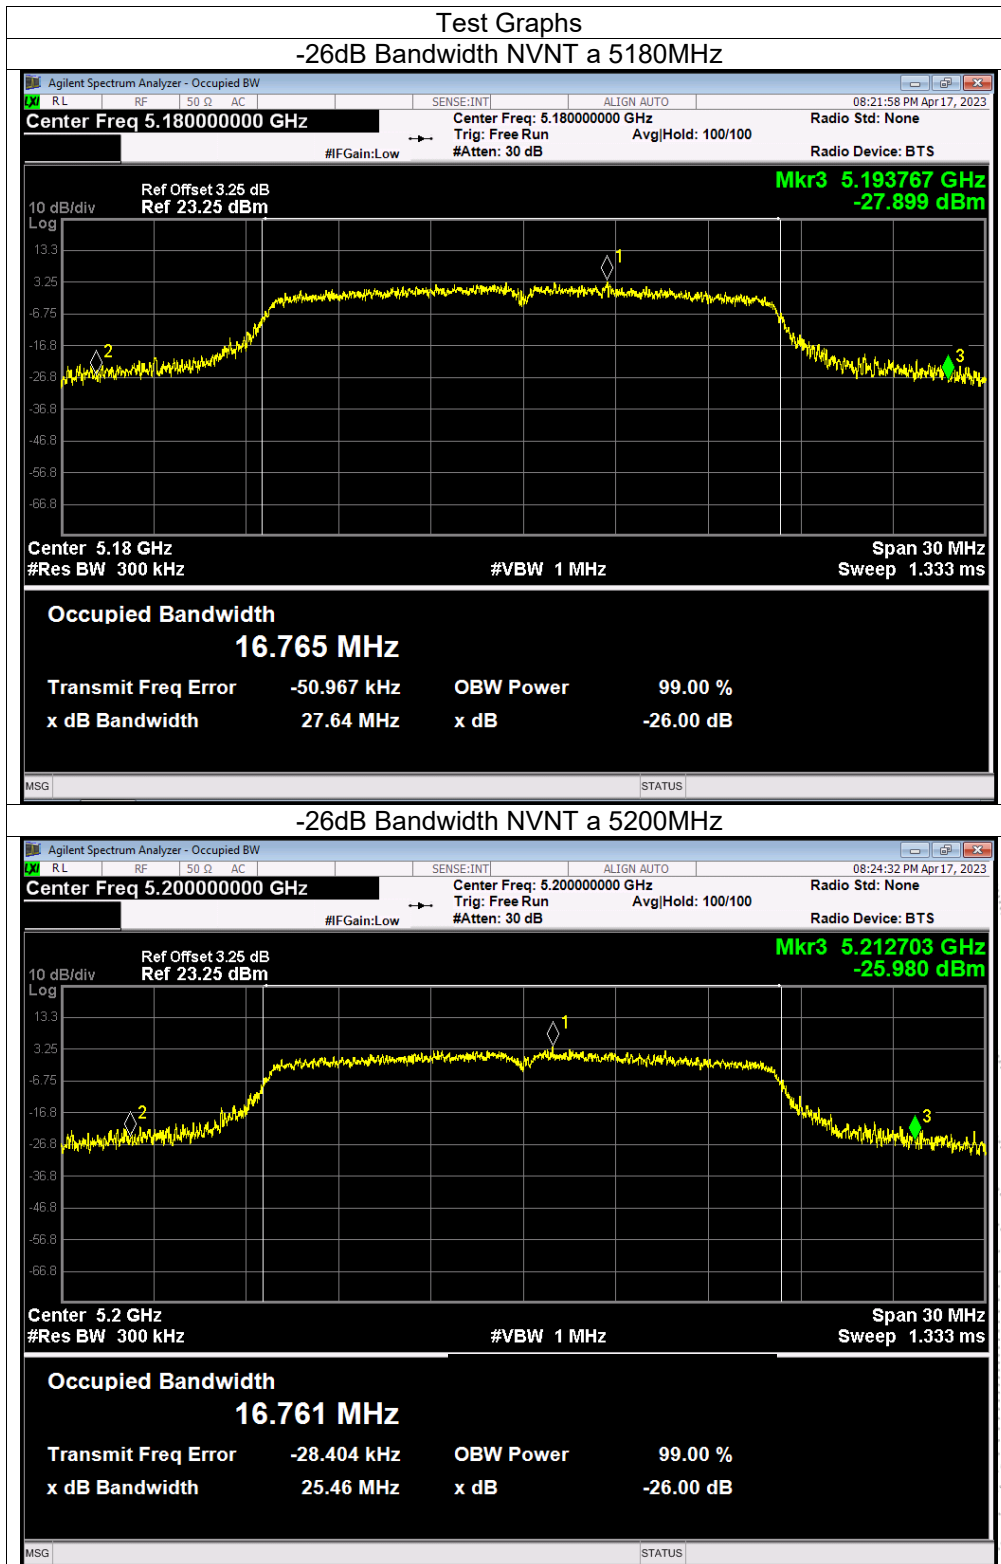


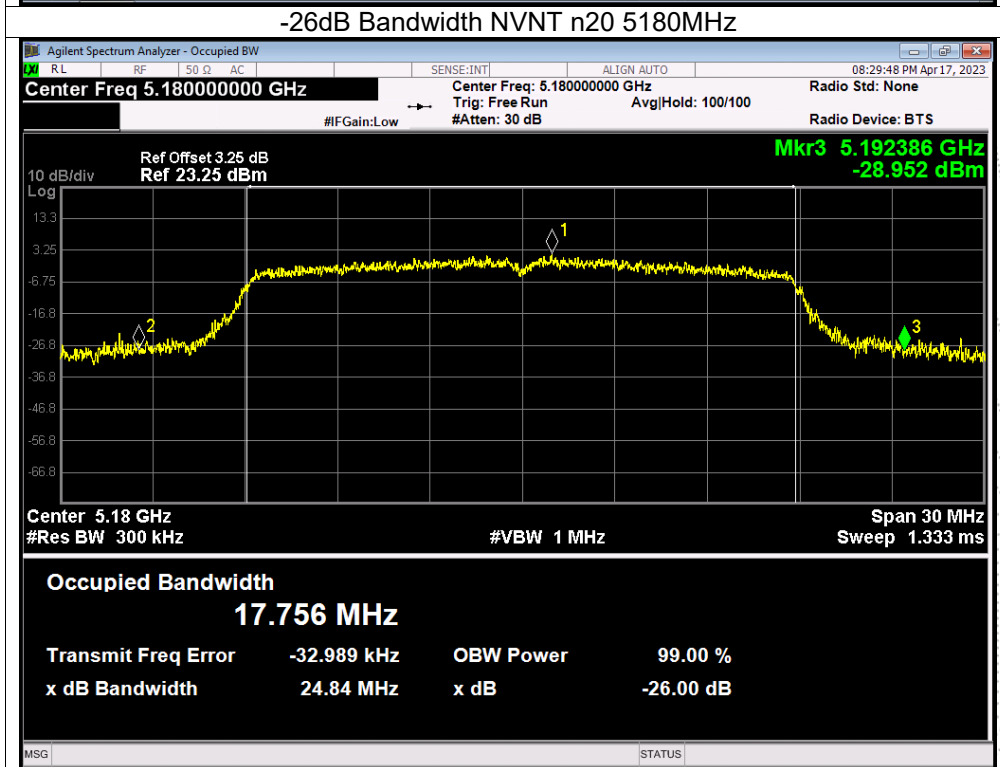
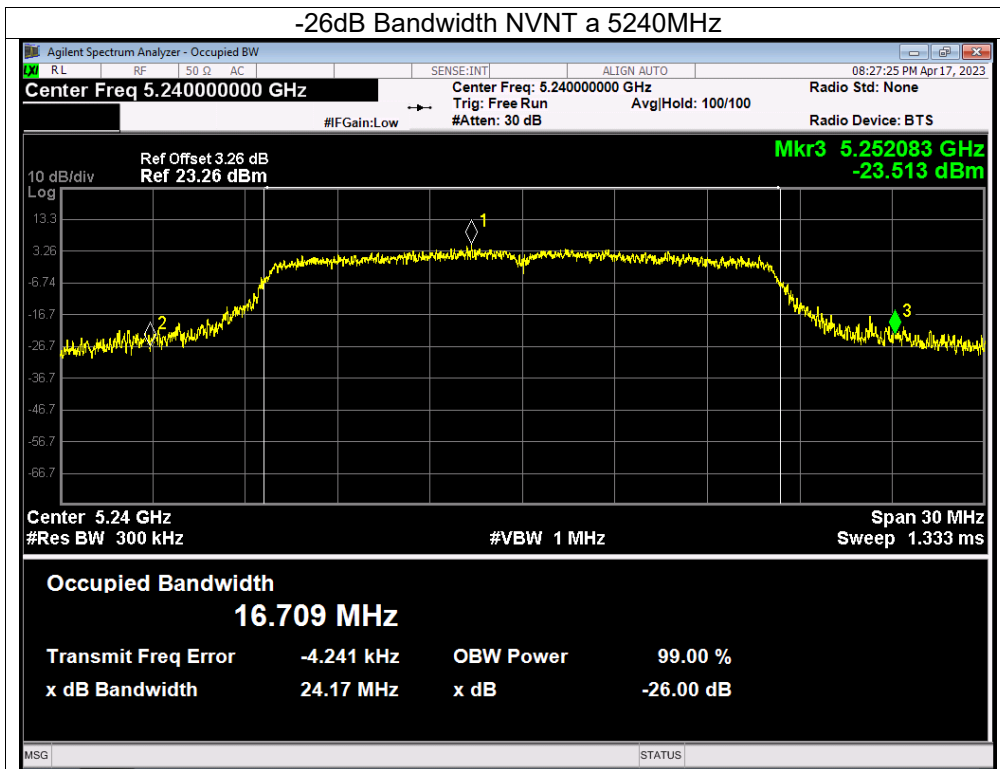


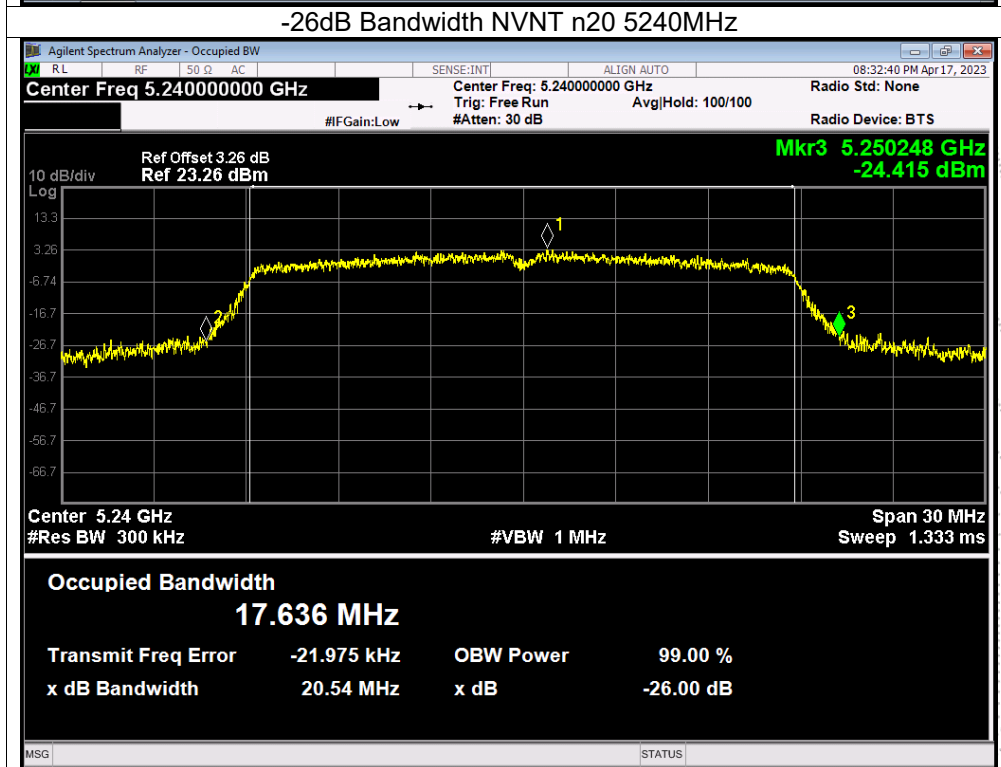
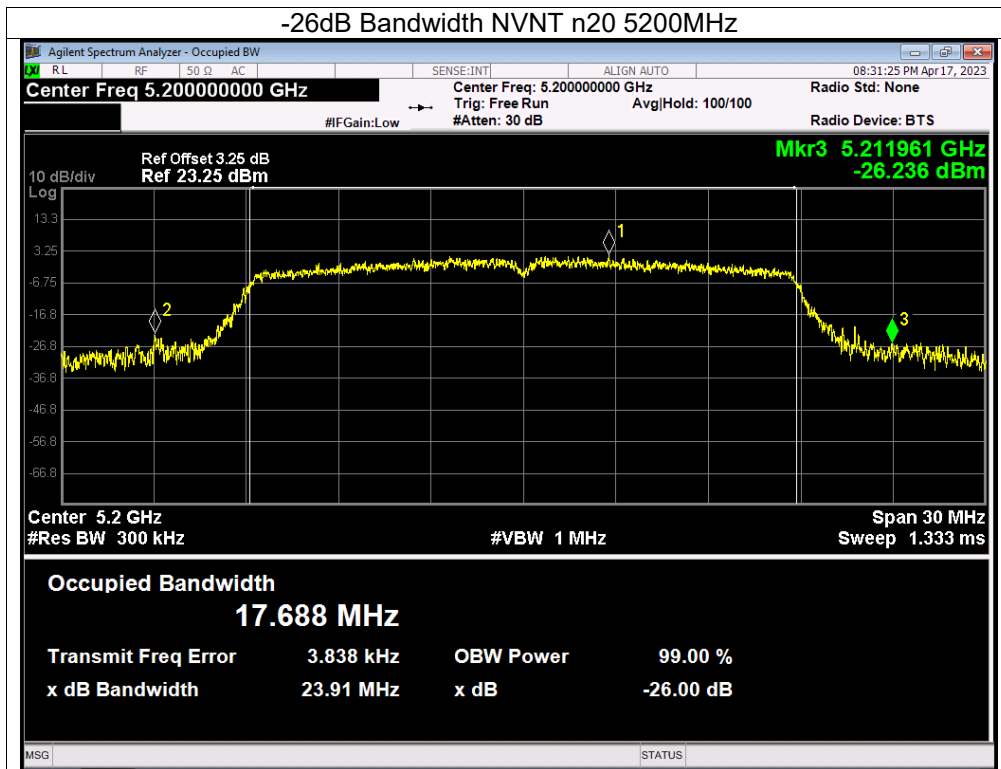


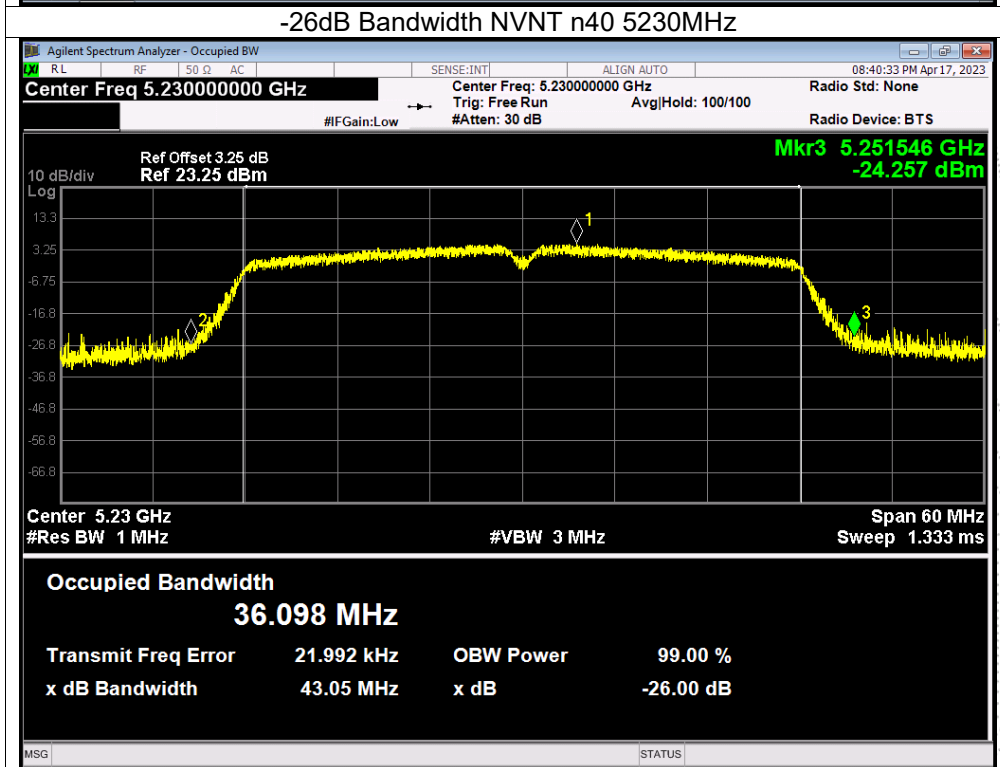
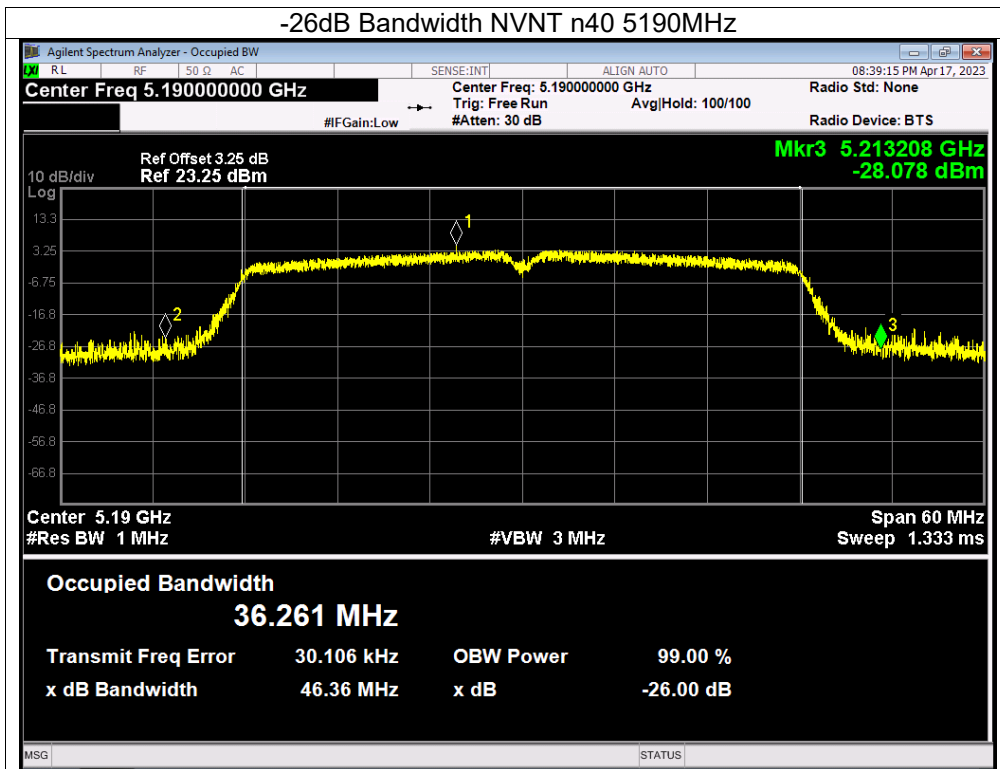


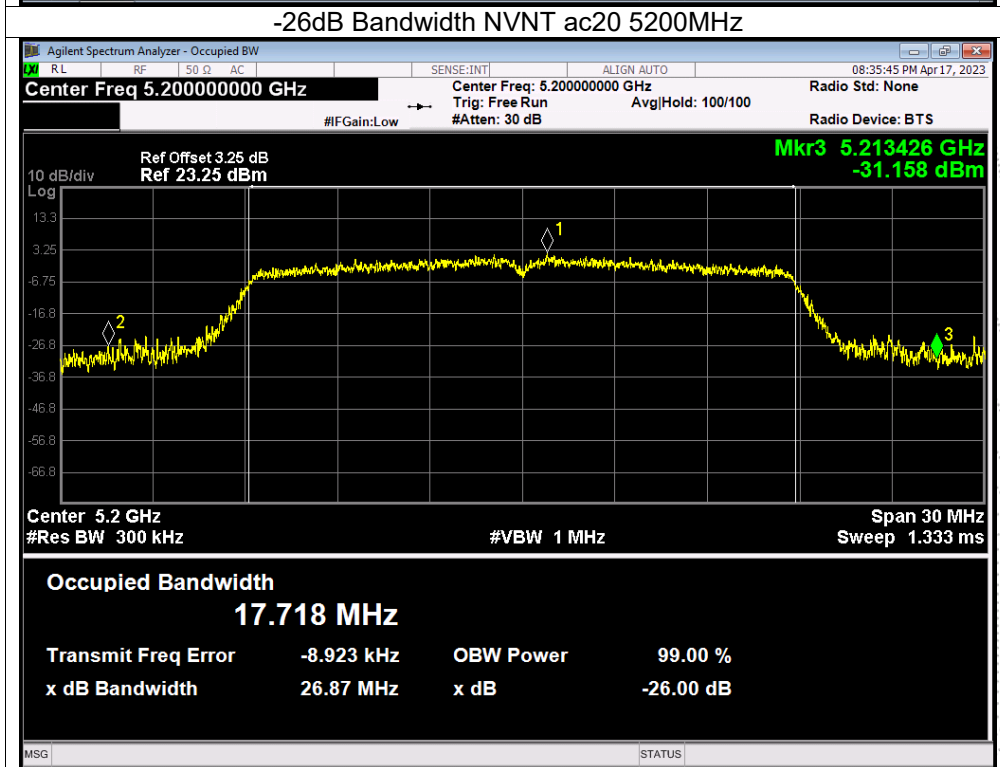
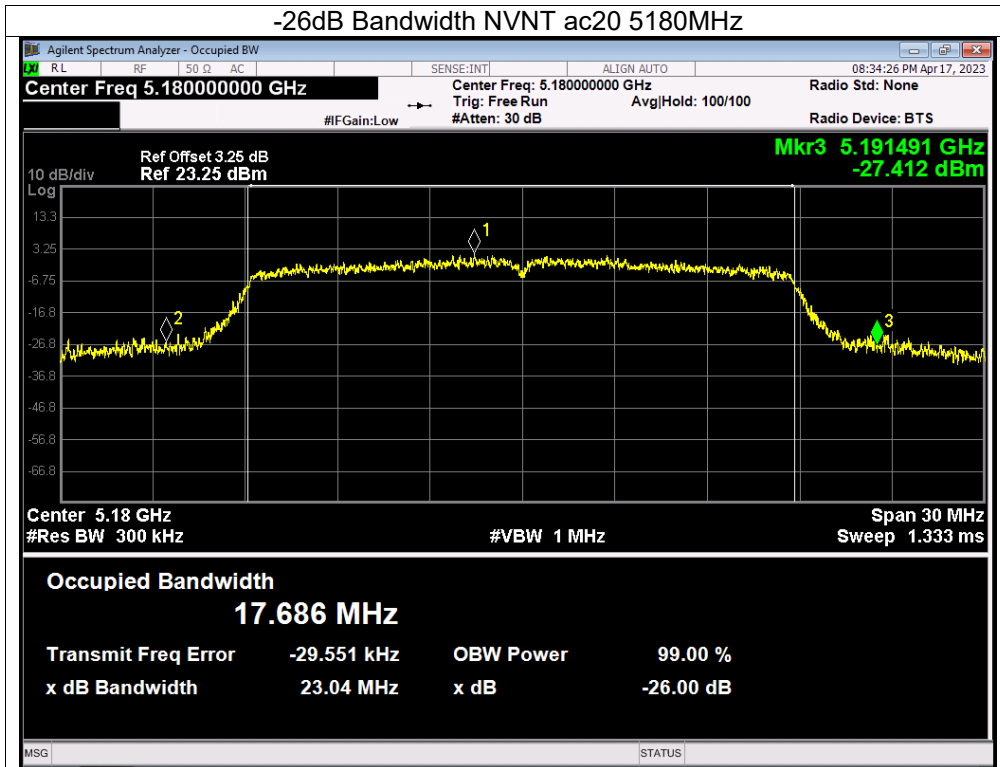


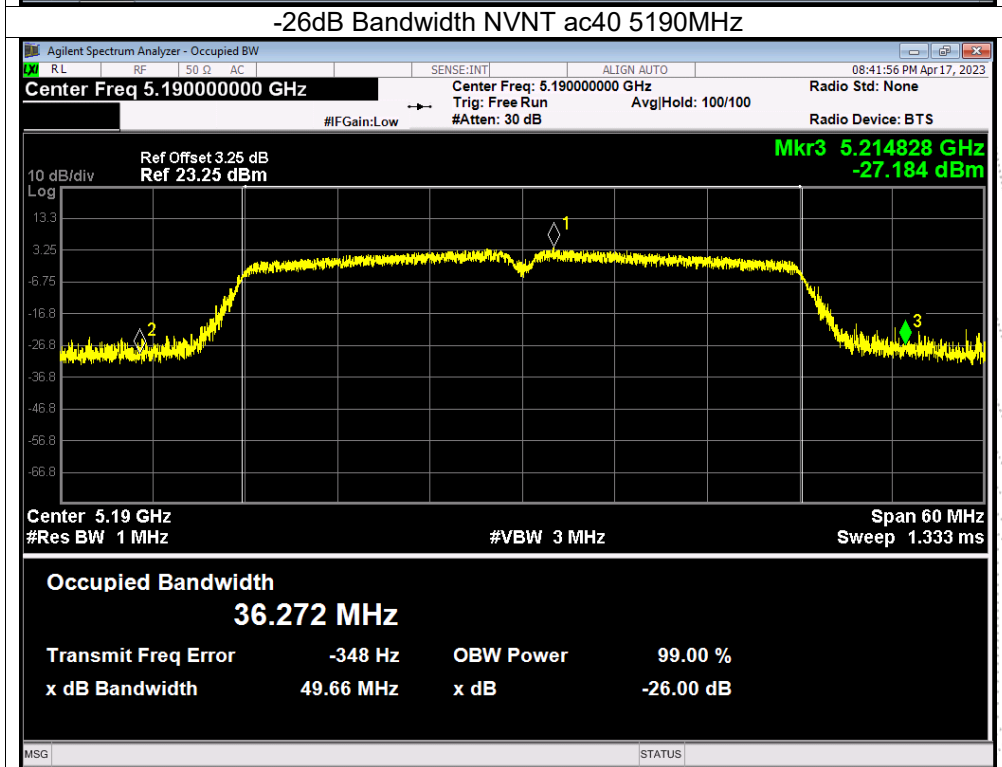
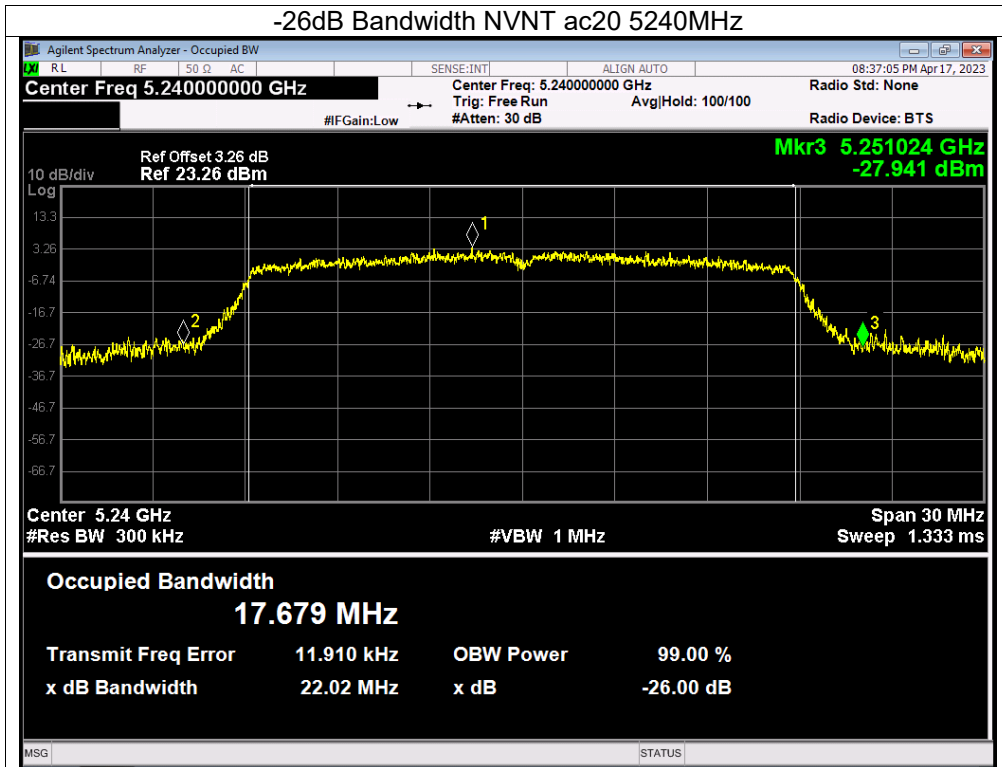


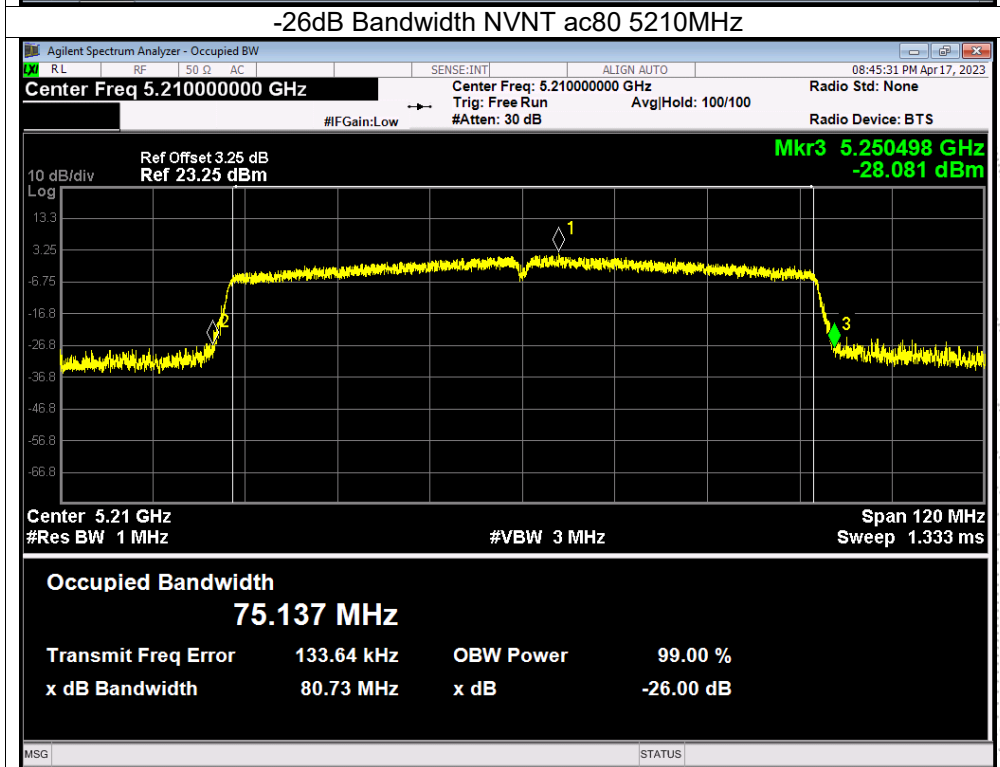
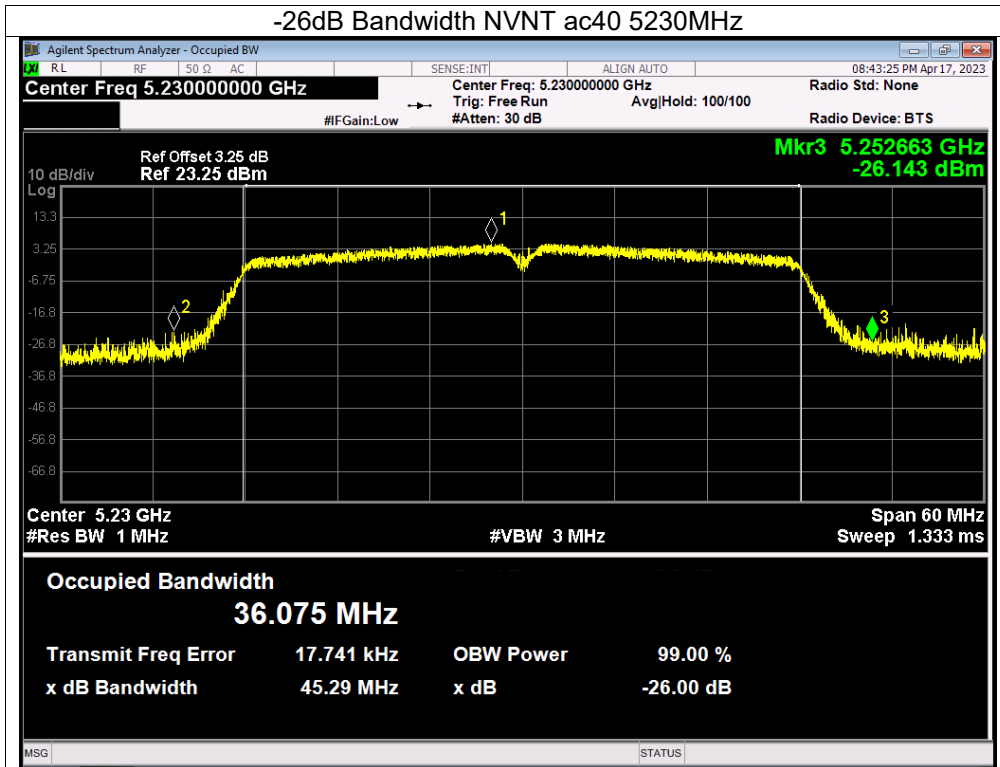


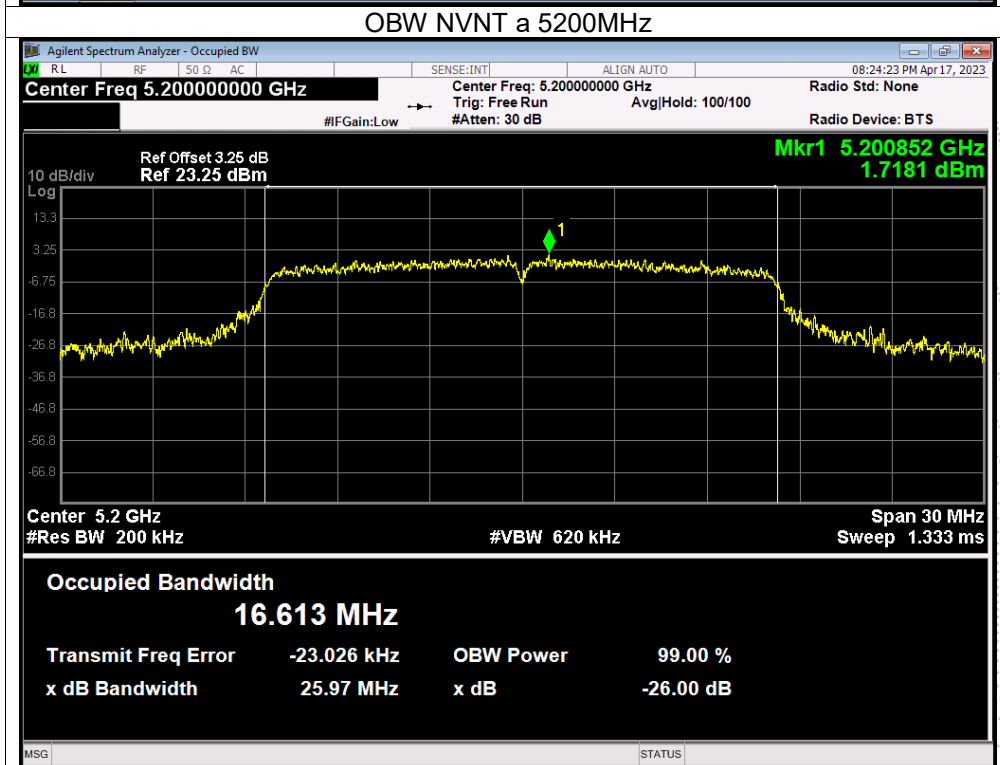
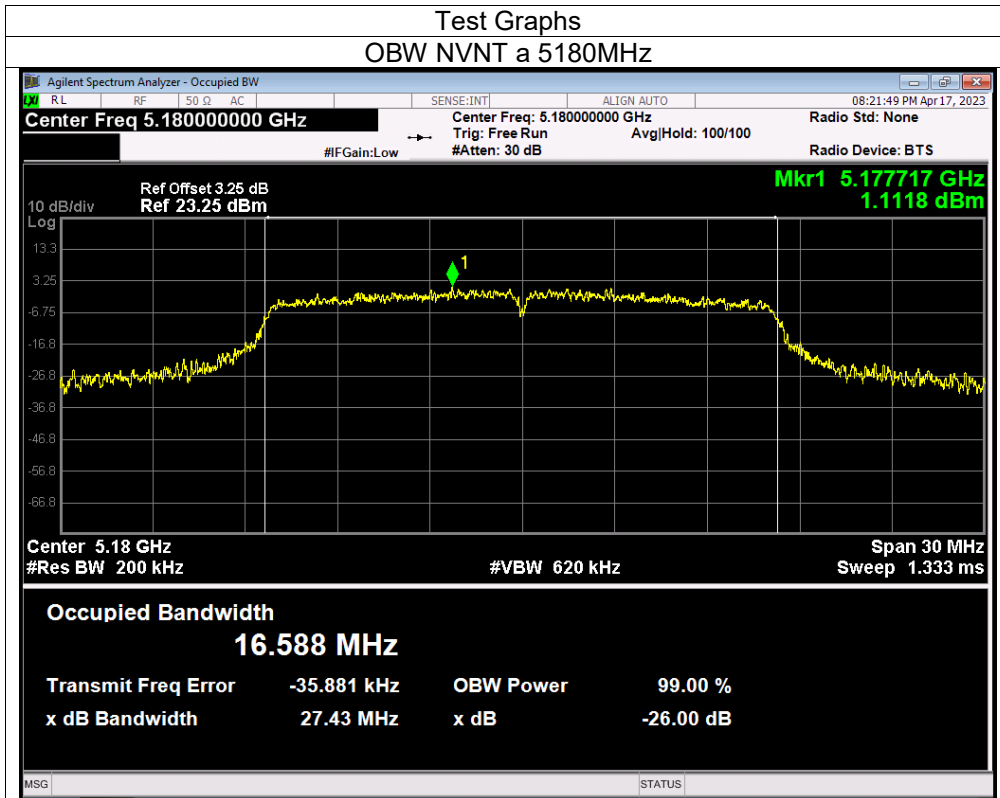


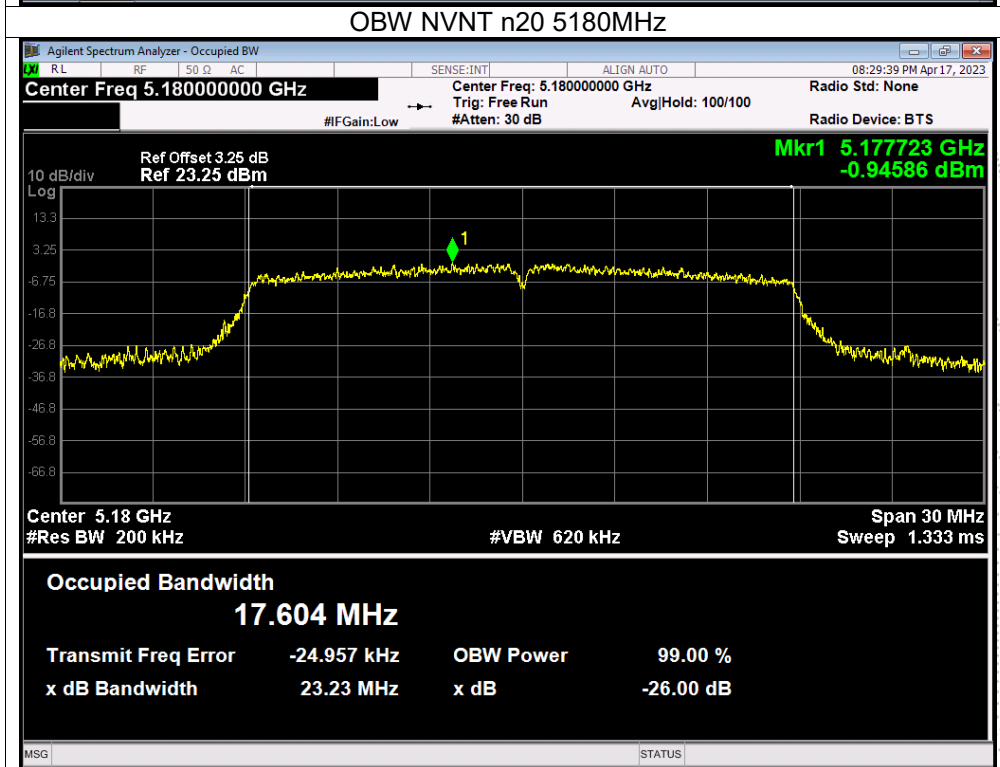
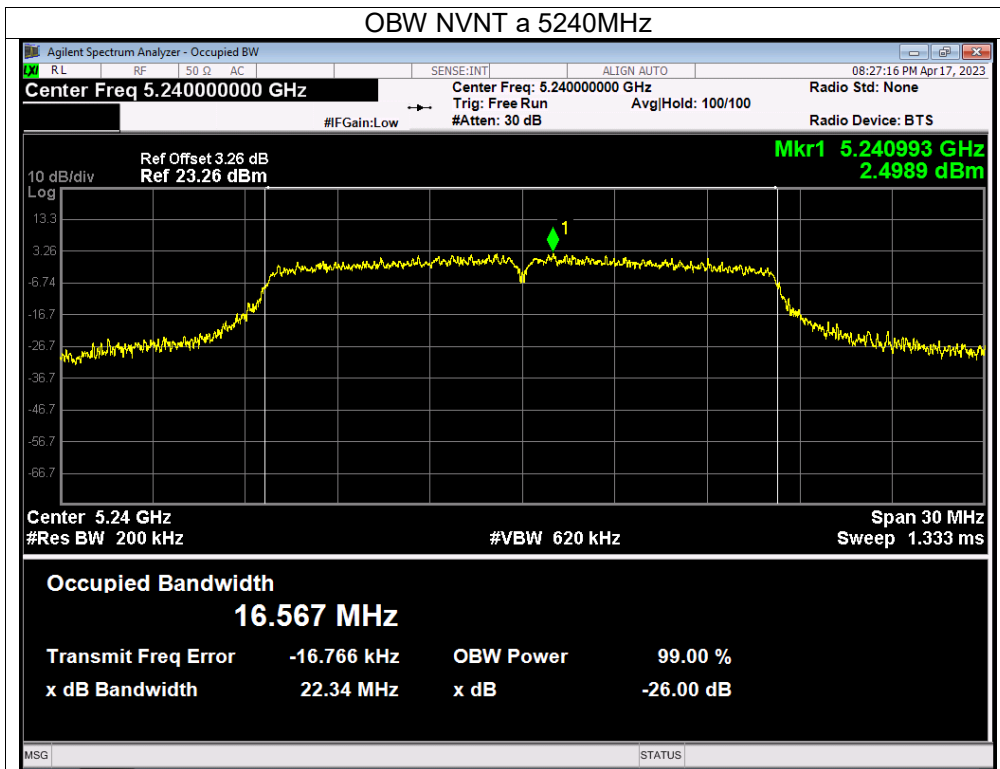


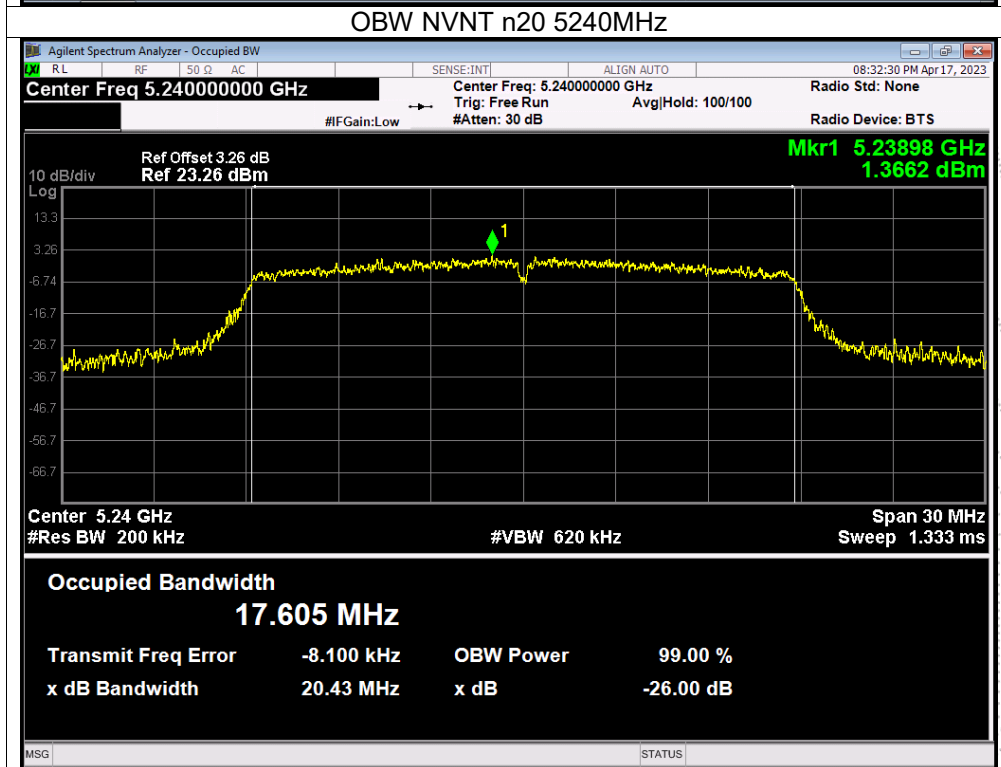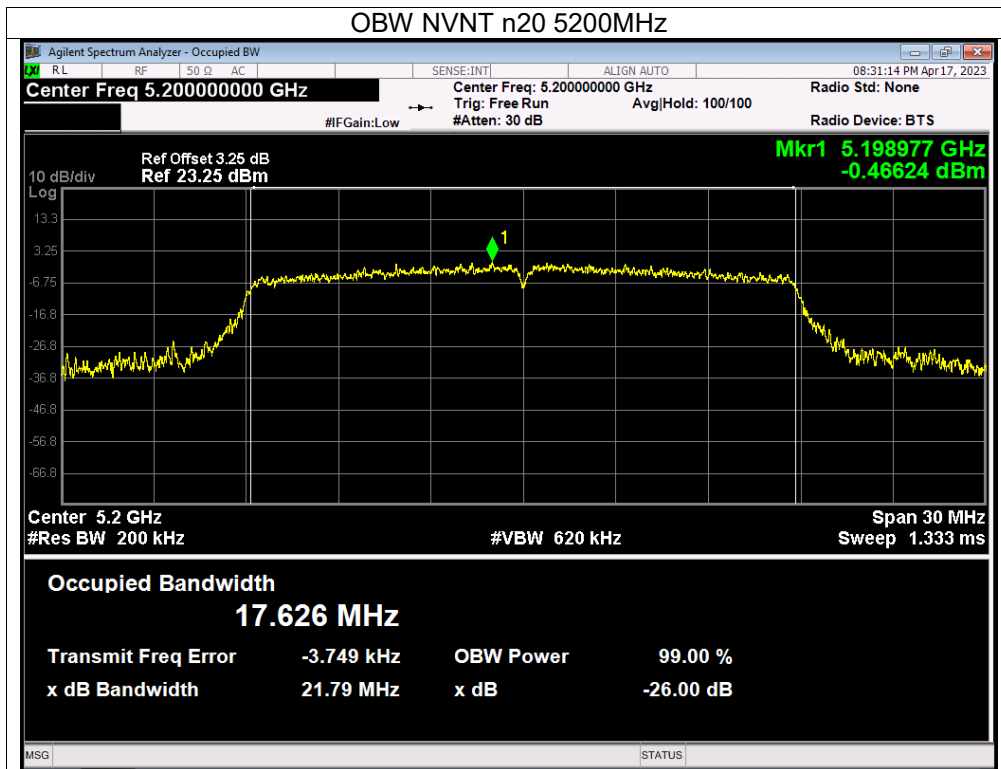

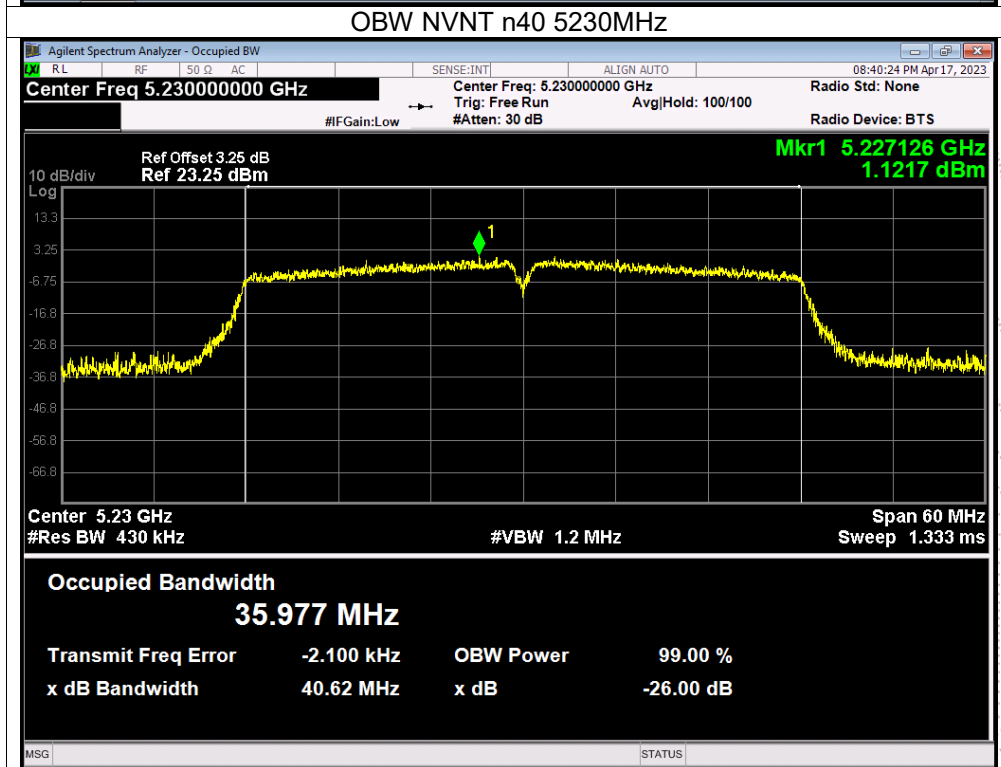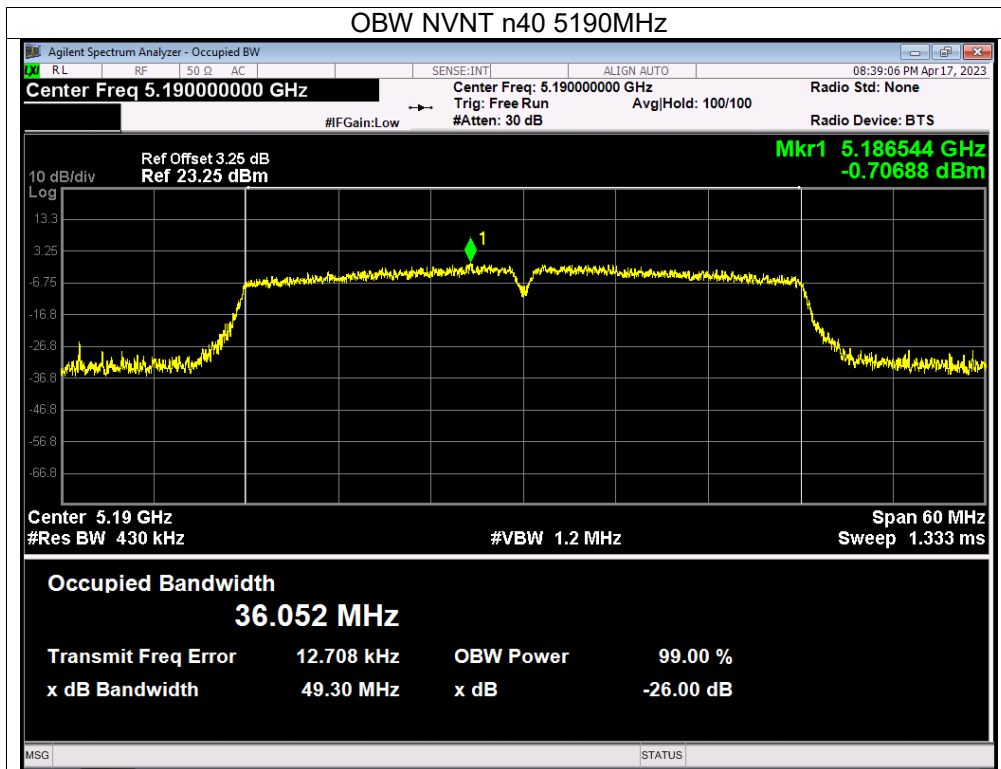

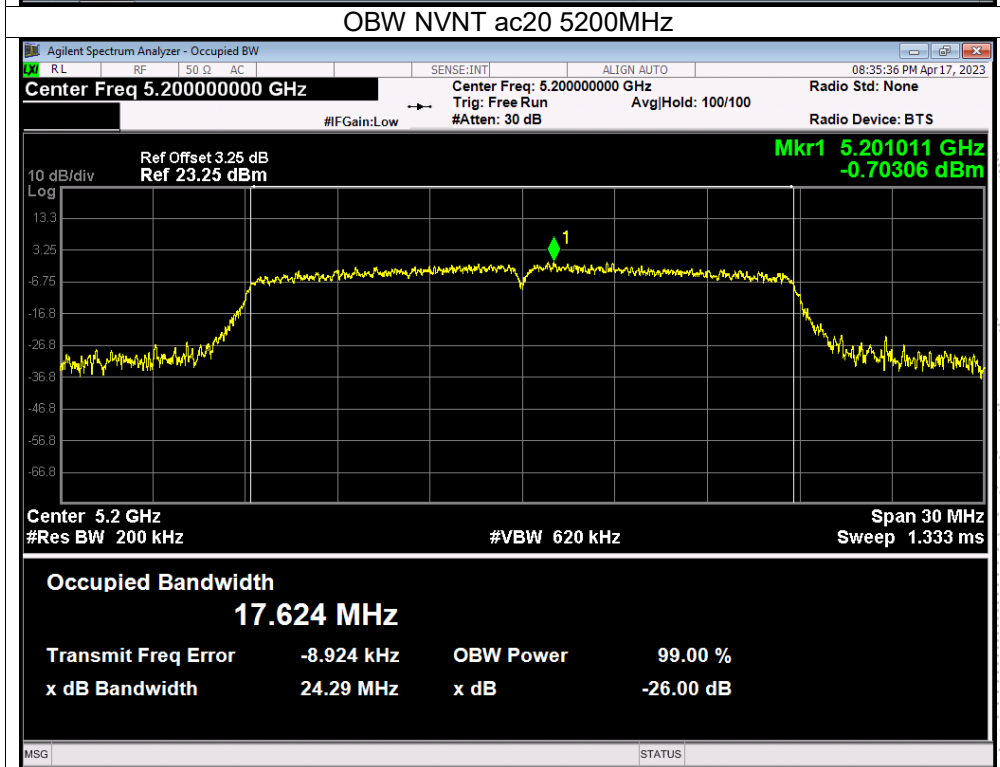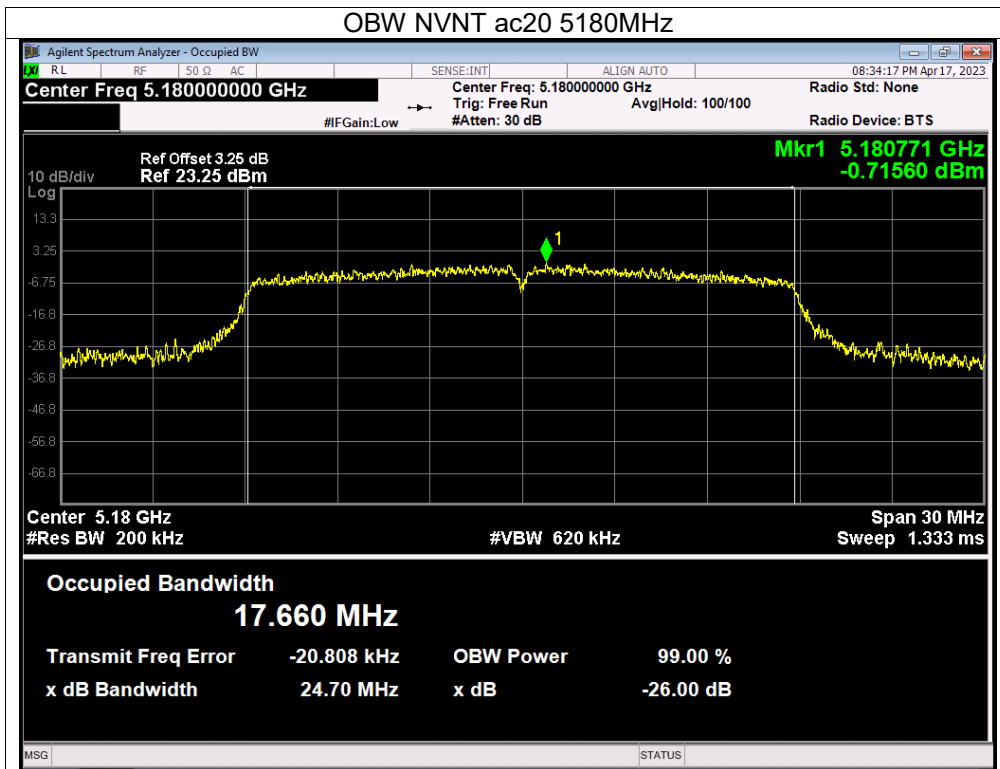

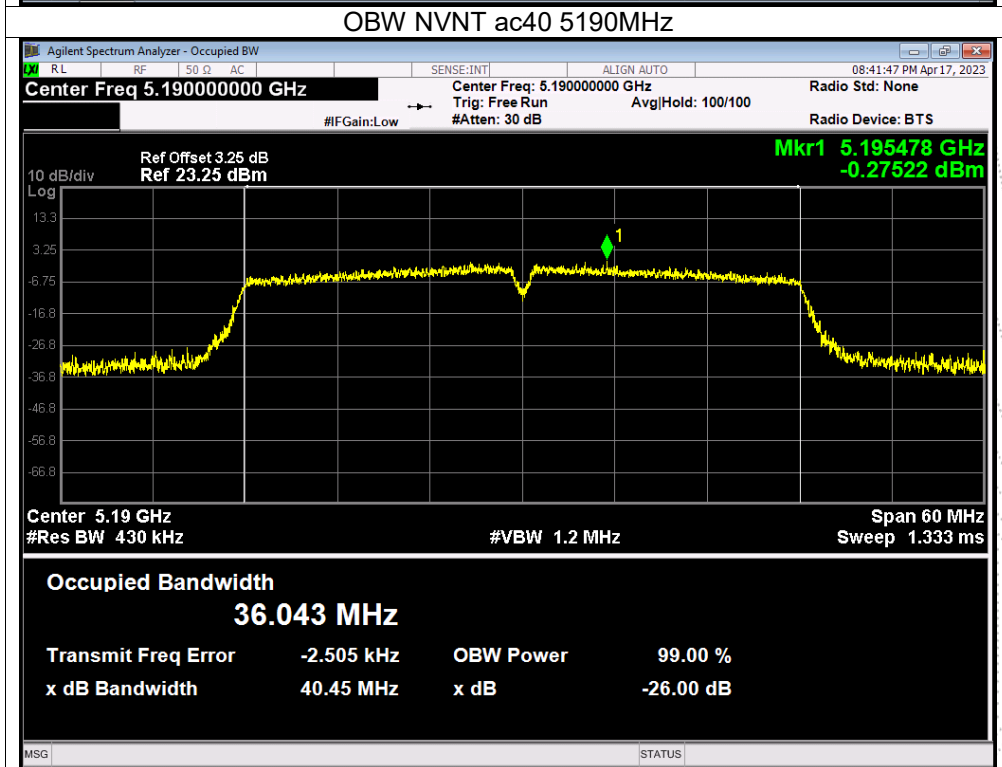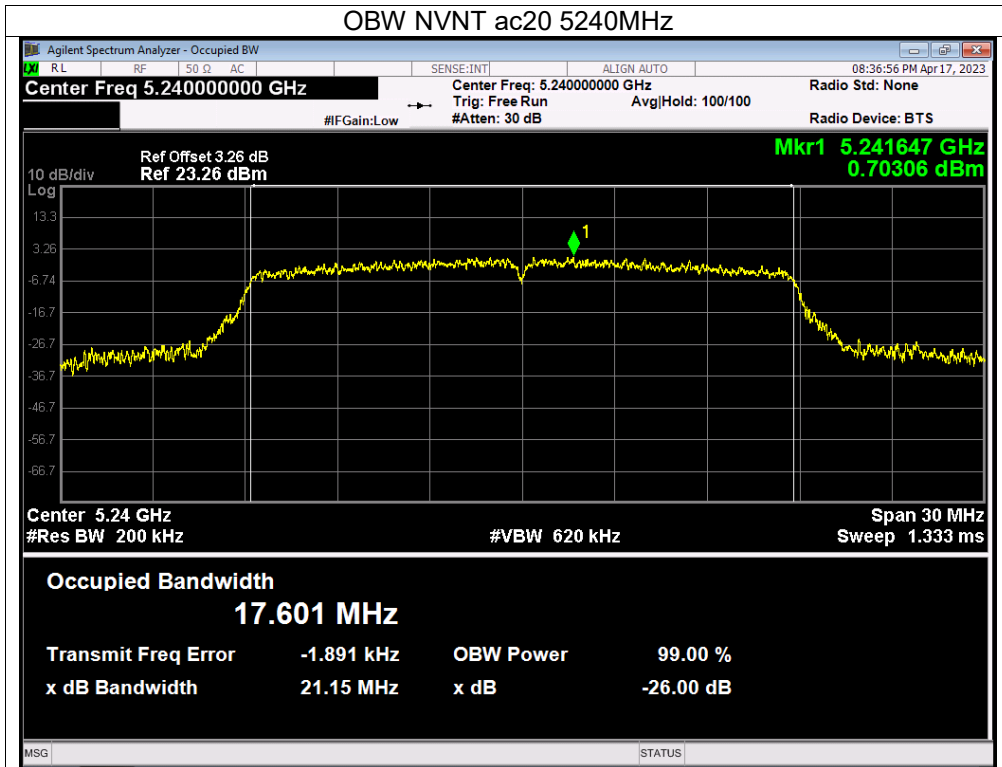

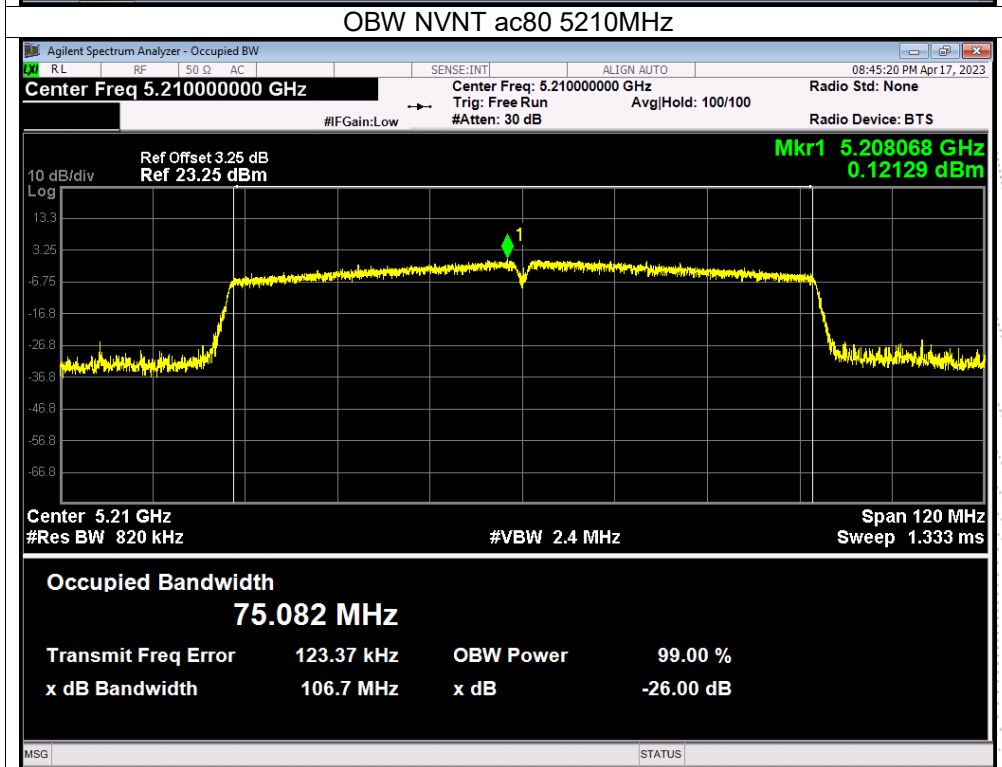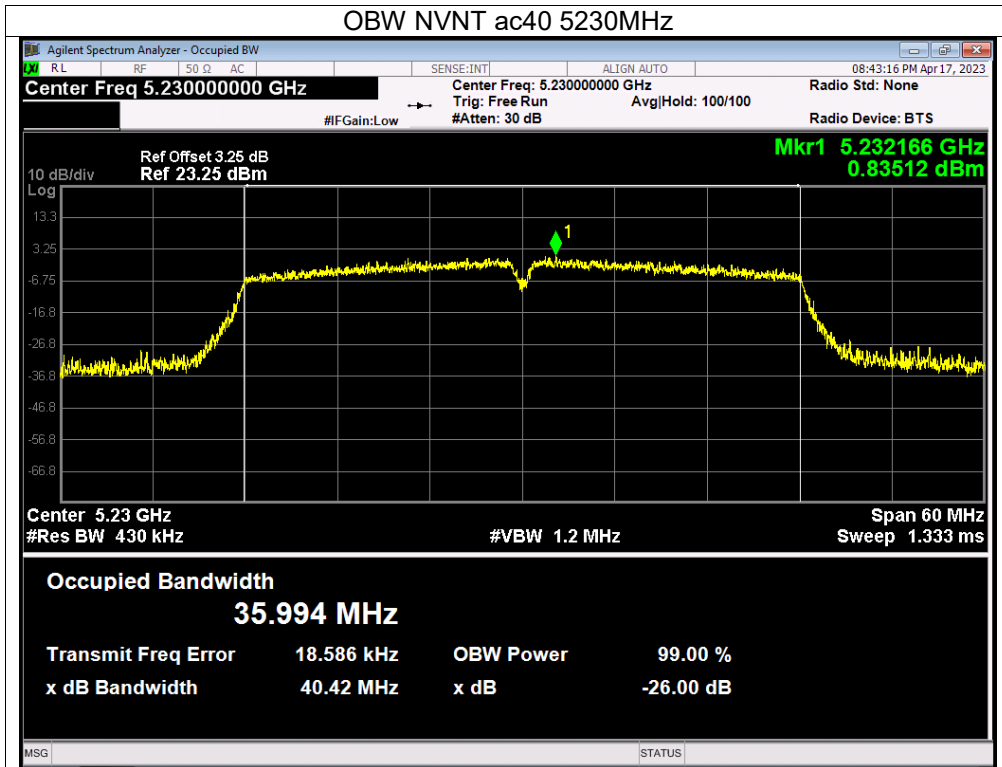

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		

Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-6dB bandwidth (MHz)	Limit -6dB bandwidth MHz	Result
NVNT	a	5745	16.454	16.339	≥500	Pass
NVNT	a	5785	16.421	16.331	≥500	Pass
NVNT	a	5825	16.44	16.302	≥500	Pass
NVNT	n20	5745	17.572	17.565	≥500	Pass
NVNT	n20	5785	17.524	17.605	≥500	Pass
NVNT	n20	5825	17.558	17.555	≥500	Pass
NVNT	n40	5755	35.933	33.787	≥500	Pass
NVNT	n40	5795	35.893	35.911	≥500	Pass
NVNT	ac20	5745	17.559	17.563	≥500	Pass
NVNT	ac20	5785	17.544	17.581	≥500	Pass
NVNT	ac20	5825	17.566	17.588	≥500	Pass
NVNT	ac40	5755	35.906	35.341	≥500	Pass
NVNT	ac40	5795	35.916	36.016	≥500	Pass
NVNT	ac80	5775	75.051	76.098	≥500	Pass

