

# MEASUREMENT 2


Date of measurement: 8/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>GSM850</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>TDMA (Crest factor: 2.0)</u>
<b>ConvF</b>	<u>2.32</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	41.006798
<b>Relative permittivity (imaginary part)</b>	19.082279
<b>Conductivity (S/m)</b>	0.886690
<b>Variation (%)</b>	-0.550000

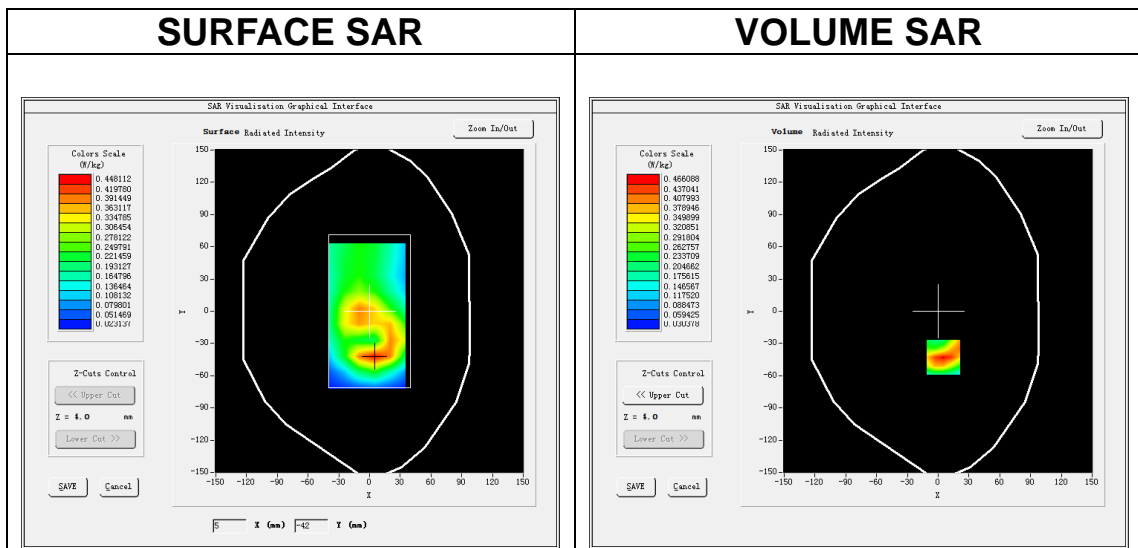

**Maximum location: X=5.00, Y=-43.00**  
**SAR Peak: 0.72 W/kg**

<b>SAR 10g (W/Kg)</b>	0.247334
<b>SAR 1g (W/Kg)</b>	0.441644

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.7131</b>	<b>0.4661</b>	<b>0.2755</b>	<b>0.1751</b>	<b>0.1163</b>	<b>0.0815</b>	<b>0.0578</b>

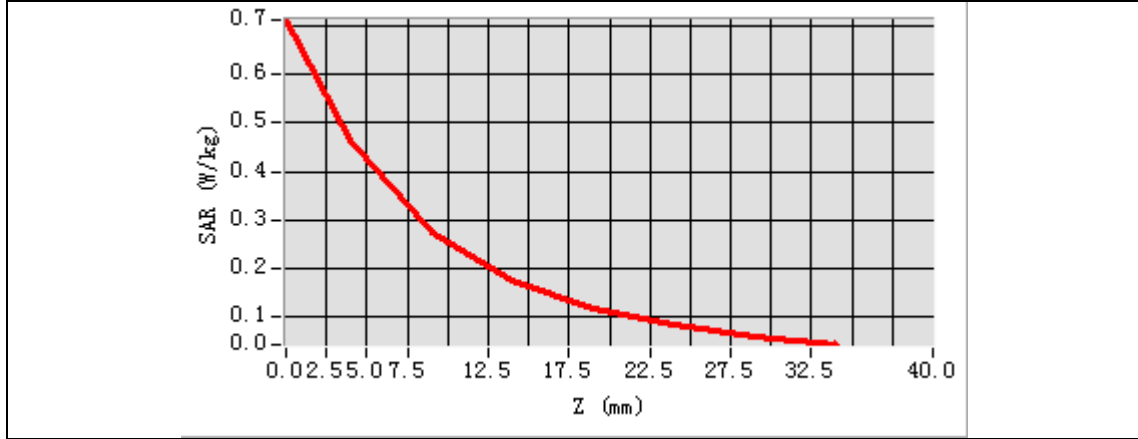

3D screen shot	Hot spot position

# MEASUREMENT 3


Date of measurement: 9/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>2.63</u>



## B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.100822
Relative permittivity (imaginary part)	13.853208
Conductivity (S/m)	1.446891
Variation (%)	-0.580000

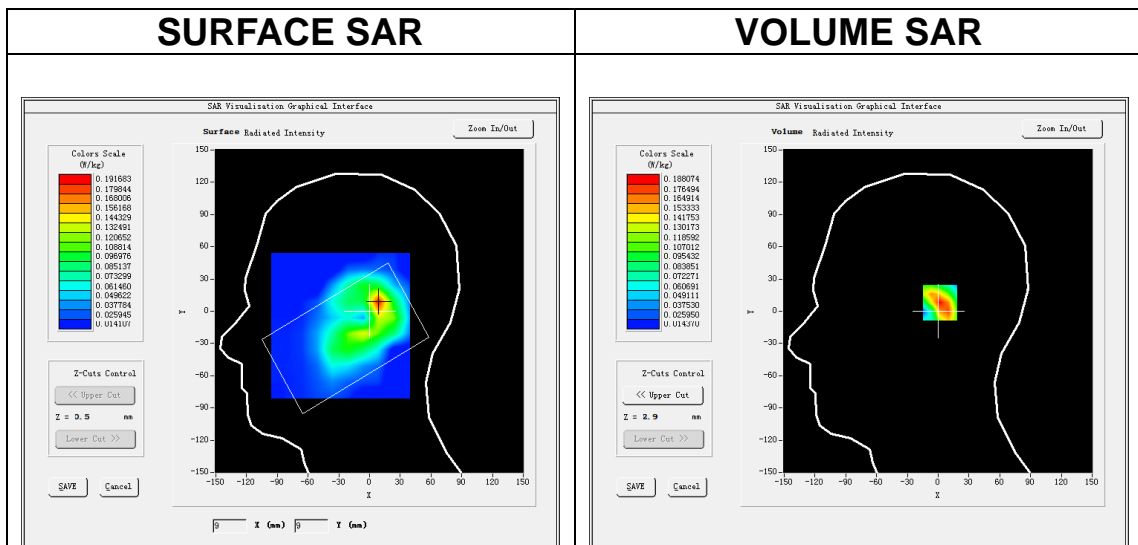

**Maximum location: X=9.00, Y=8.00**  
**SAR Peak: 0.30 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.100075</b>
<b>SAR 1g (W/Kg)</b>	<b>0.182431</b>

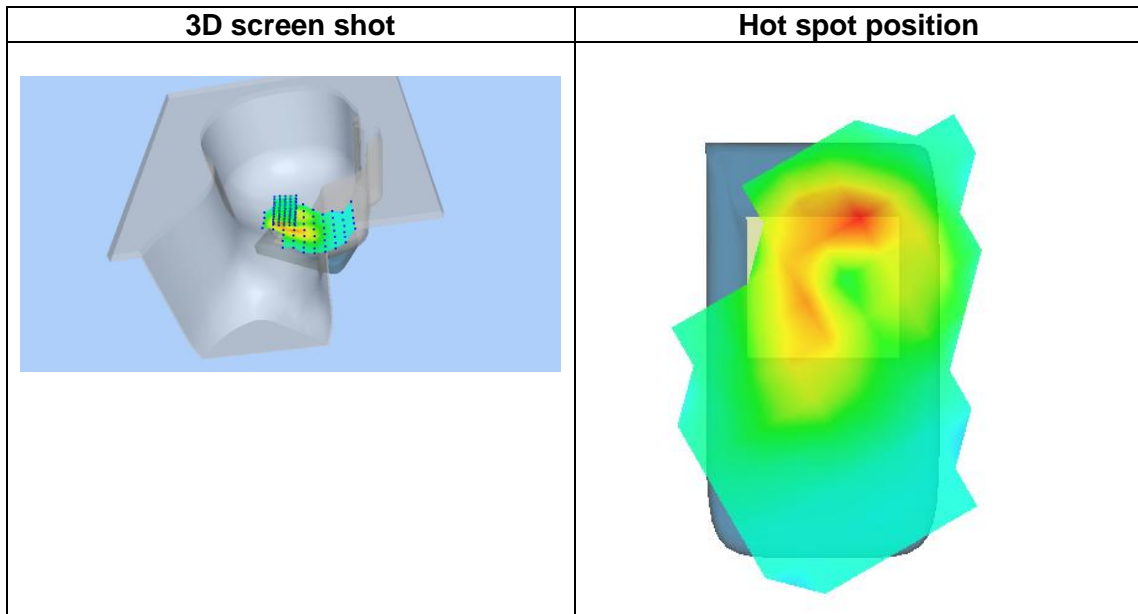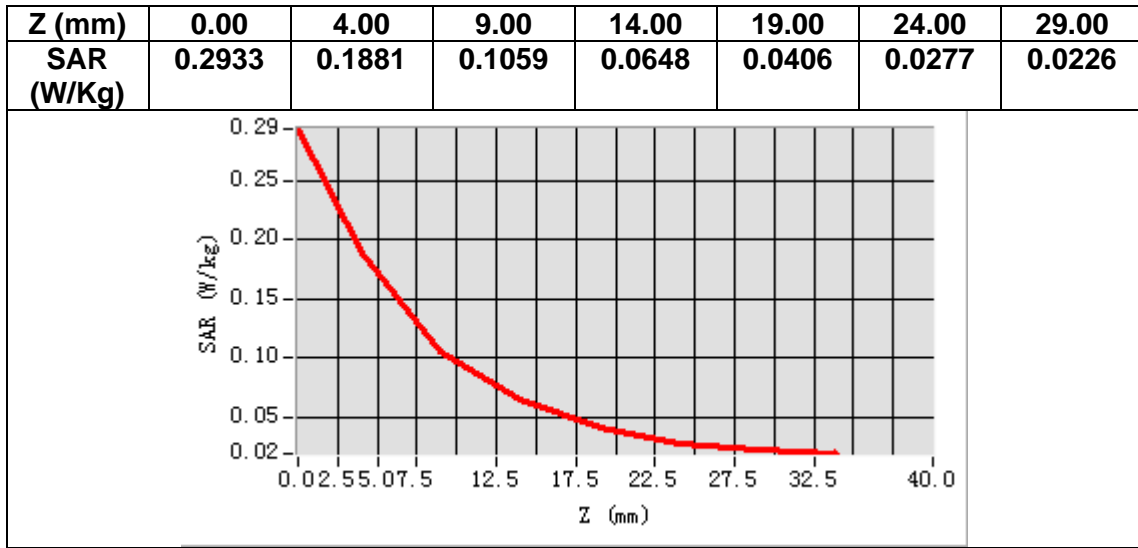

# MEASUREMENT 4


Date of measurement: 9/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>GSM1900</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>TDMA (Crest factor: 2.0)</u>
<b>ConvF</b>	<u>2.63</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.100822
<b>Relative permittivity (imaginary part)</b>	13.853208
<b>Conductivity (S/m)</b>	1.446891
<b>Variation (%)</b>	-3.980000

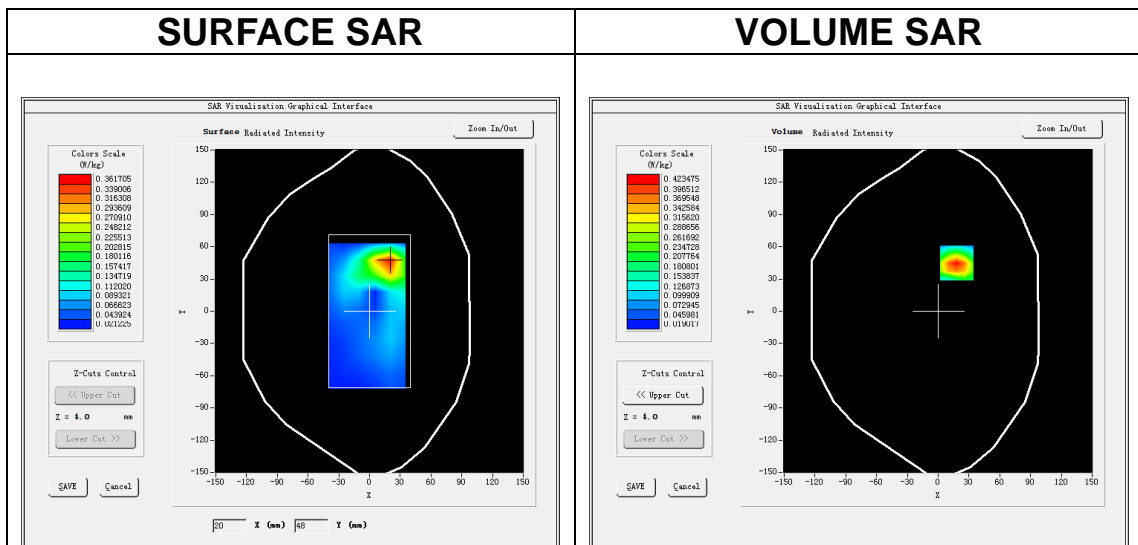

**Maximum location: X=18.00, Y=45.00**  
**SAR Peak: 0.66 W/kg**

<b>SAR 10g (W/Kg)</b>	0.211934
<b>SAR 1g (W/Kg)</b>	0.411018

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.6267</b>	<b>0.4235</b>	<b>0.2521</b>	<b>0.1464</b>	<b>0.0886</b>	<b>0.0536</b>	<b>0.0384</b>

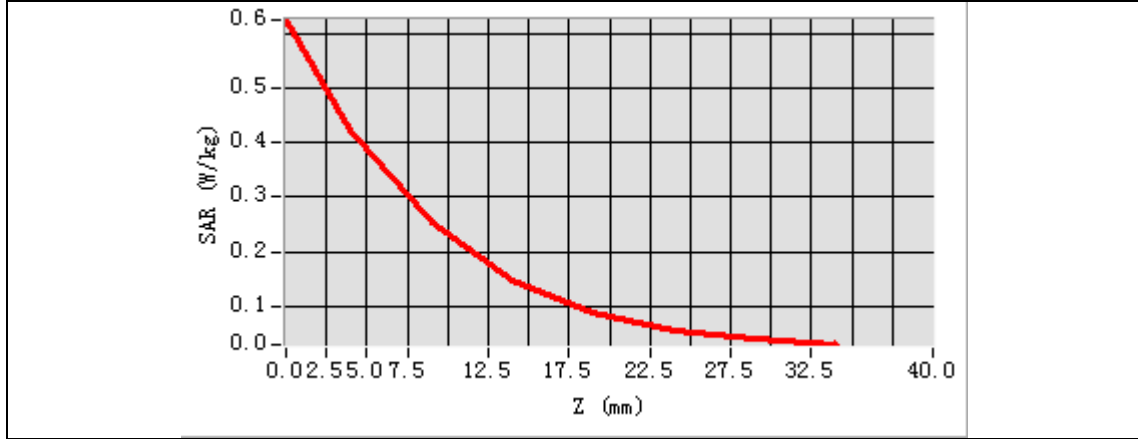

3D screen shot	Hot spot position

# MEASUREMENT 5


Date of measurement: 9/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>Band2_WCDMA1900</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.63</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.100822
<b>Relative permittivity (imaginary part)</b>	13.853208
<b>Conductivity (S/m)</b>	1.446891
<b>Variation (%)</b>	-0.590000

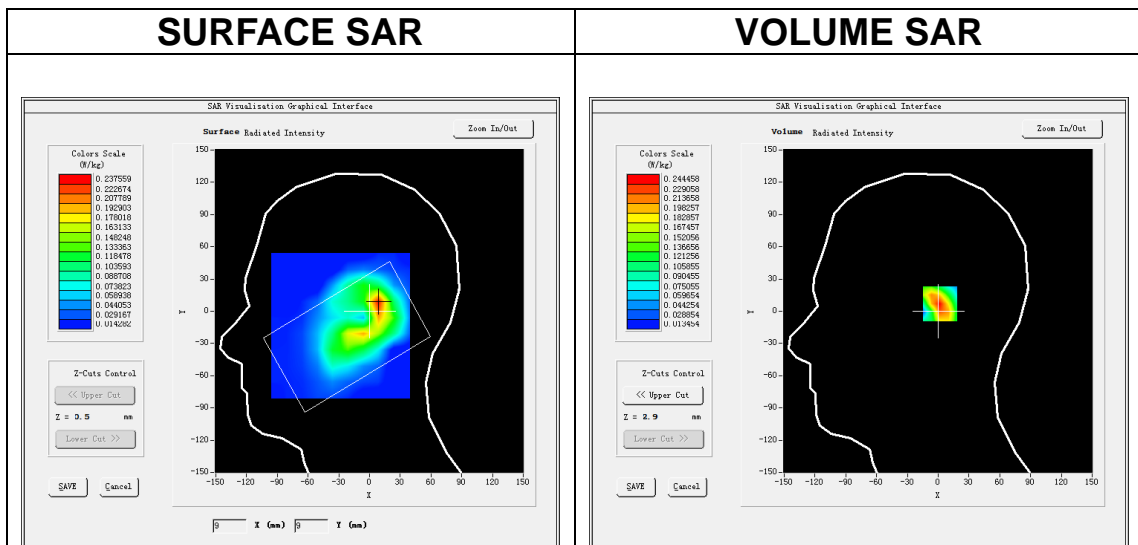

**Maximum location: X=9.00, Y=7.00**  
**SAR Peak: 0.38 W/kg**

<b>SAR 10g (W/Kg)</b>	0.125746
<b>SAR 1g (W/Kg)</b>	0.233683

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.3753</b>	<b>0.2445</b>	<b>0.1406</b>	<b>0.0804</b>	<b>0.0496</b>	<b>0.0333</b>	<b>0.0238</b>

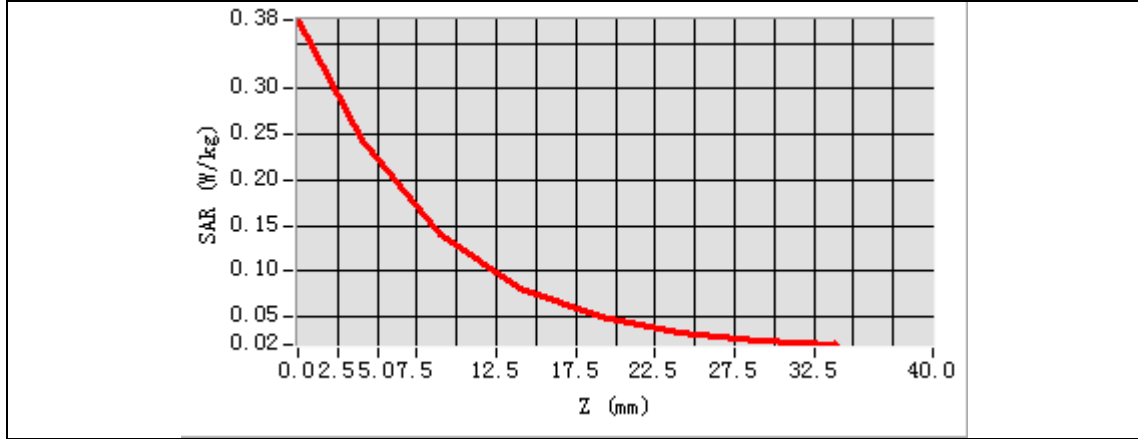

3D screen shot	Hot spot position
<p>A 3D rendering of a human head model. A grid of small colored dots is overlaid on the face, representing the spatial distribution of SAR values. The colors range from blue (low SAR) to red (high SAR), with the highest values concentrated in the central forehead area.</p>	<p>A heatmap visualization of the SAR distribution on the head model. The color scale transitions from cyan (low SAR) to red (high SAR). The 'hot spot' is clearly visible as a red/orange region in the center of the forehead.</p>



# MEASUREMENT 6


Date of measurement: 9/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>Band2_WCDMA1900</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.63</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.100822
<b>Relative permittivity (imaginary part)</b>	13.853208
<b>Conductivity (S/m)</b>	1.446891
<b>Variation (%)</b>	-3.900000

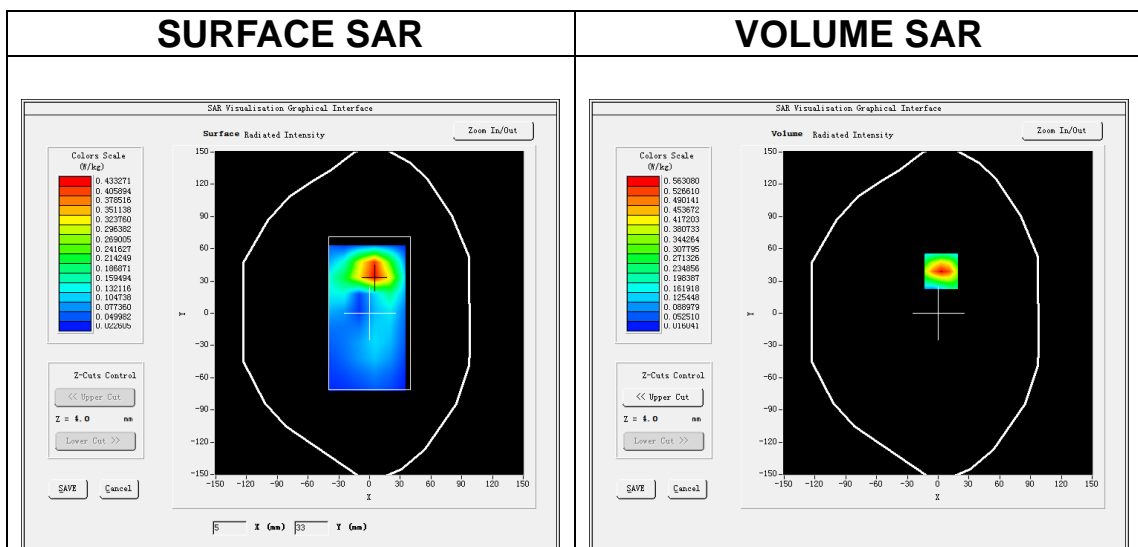


**Maximum location: X=3.00, Y=39.00**

**SAR Peak: 0.88 W/kg**

<b>SAR 10g (W/Kg)</b>	0.273842
<b>SAR 1g (W/Kg)</b>	0.537932

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.8823</b>	<b>0.5631</b>	<b>0.3145</b>	<b>0.1803</b>	<b>0.1067</b>	<b>0.0646</b>	<b>0.0424</b>

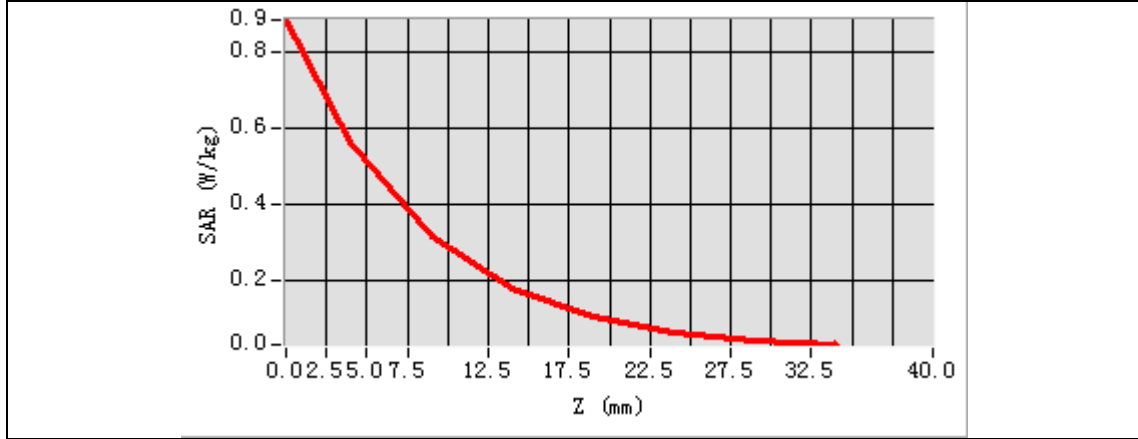

3D screen shot	Hot spot position

# MEASUREMENT 7


Date of measurement: 10/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>Band4_WCDMA1700</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.45</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1732.600000
<b>Relative permittivity (real part)</b>	39.661102
<b>Relative permittivity (imaginary part)</b>	13.922263
<b>Conductivity (S/m)</b>	1.339631
<b>Variation (%)</b>	0.730000

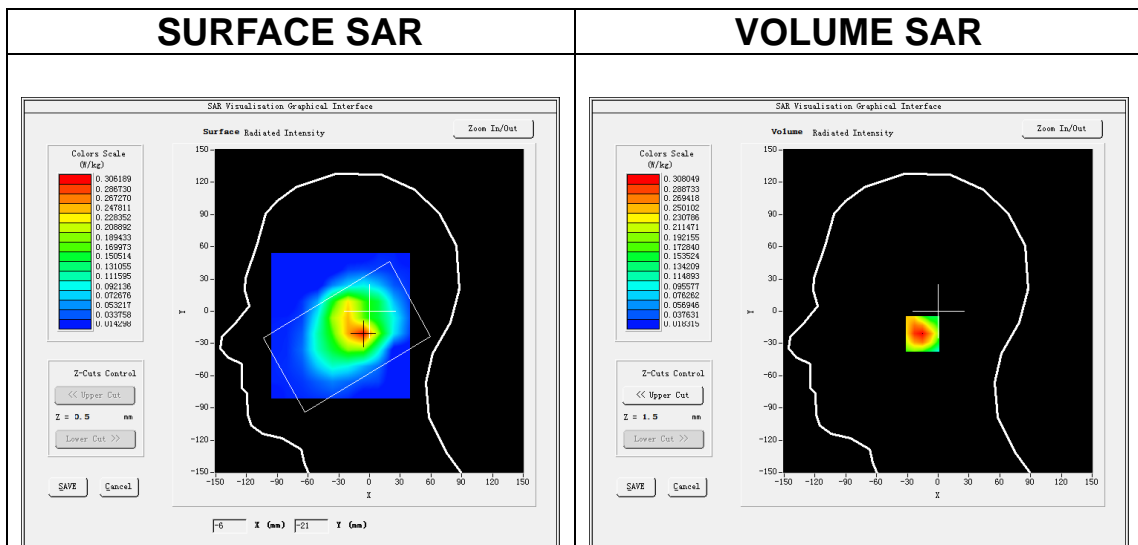

**Maximum location: X=-7.00, Y=-21.00**  
**SAR Peak: 0.45 W/kg**

<b>SAR 10g (W/Kg)</b>	0.170443
<b>SAR 1g (W/Kg)</b>	0.293746

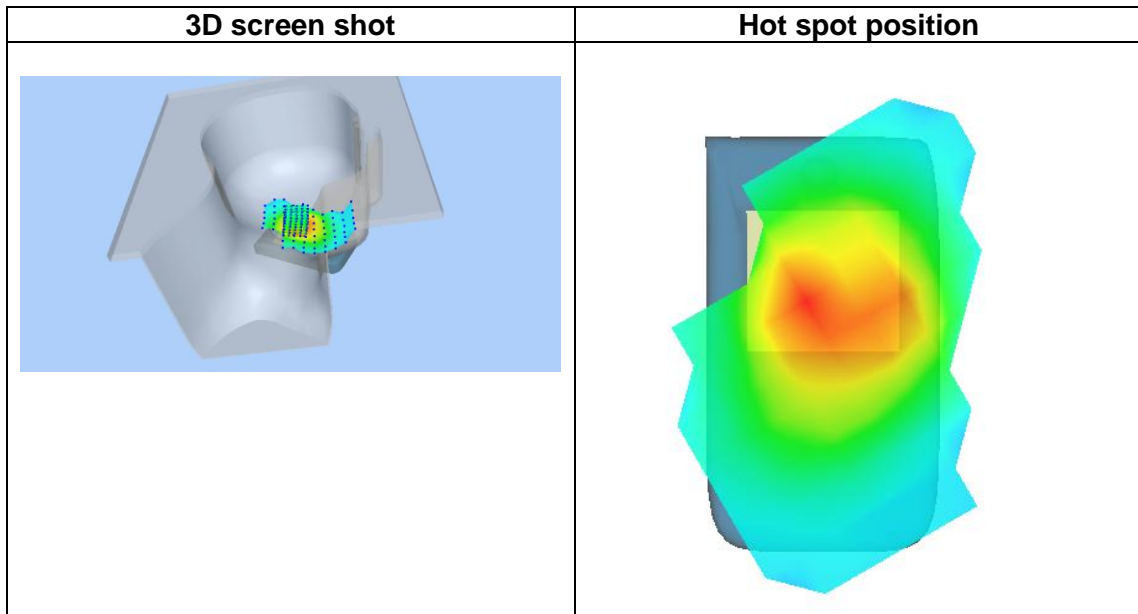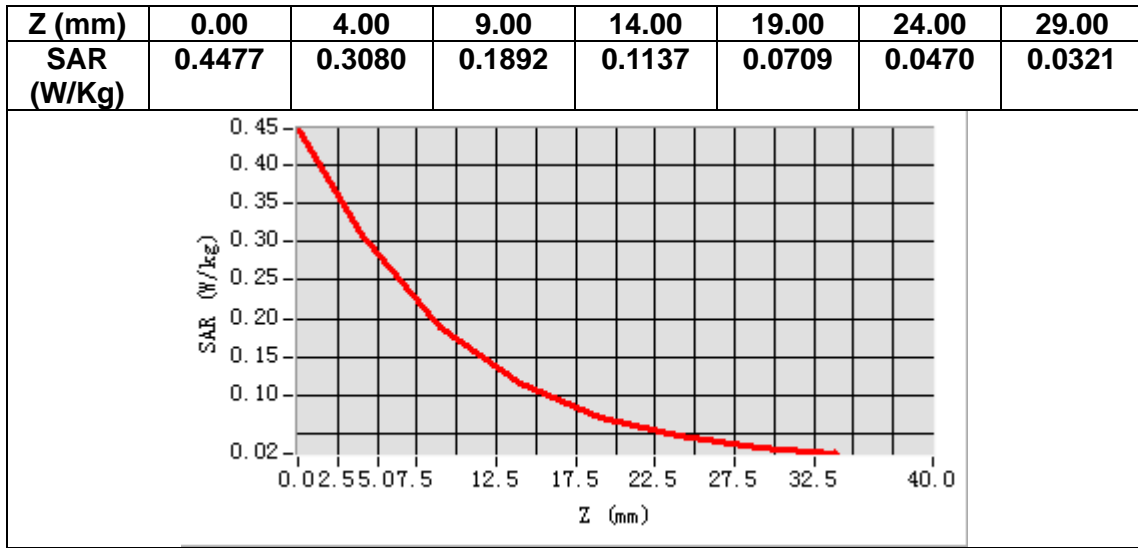

# MEASUREMENT 8


Date of measurement: 10/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>Band4_WCDMA1700</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.45</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	1732.600000
<b>Relative permittivity (real part)</b>	39.661102
<b>Relative permittivity (imaginary part)</b>	13.922263
<b>Conductivity (S/m)</b>	1.339631
<b>Variation (%)</b>	0.780000

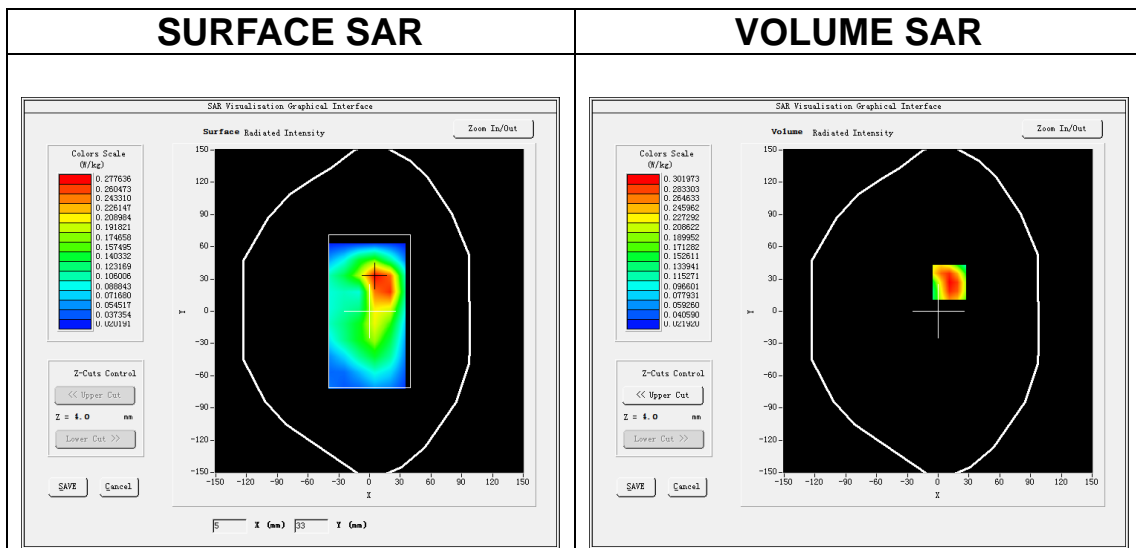

**Maximum location: X=11.00, Y=27.00**  
**SAR Peak: 0.46 W/kg**

<b>SAR 10g (W/Kg)</b>	0.170072
<b>SAR 1g (W/Kg)</b>	0.291617

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.4562</b>	<b>0.3020</b>	<b>0.1786</b>	<b>0.1099</b>	<b>0.0710</b>	<b>0.0464</b>	<b>0.0345</b>

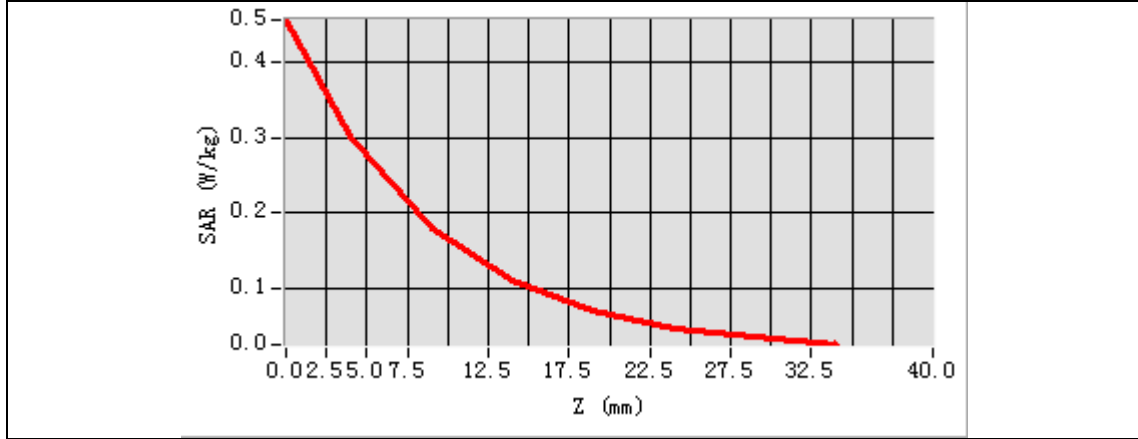

3D screen shot	Hot spot position

# MEASUREMENT 9


Date of measurement: 8/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5_WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>



## B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.006798
Relative permittivity (imaginary part)	19.082279
Conductivity (S/m)	0.886690
Variation (%)	-2.070000

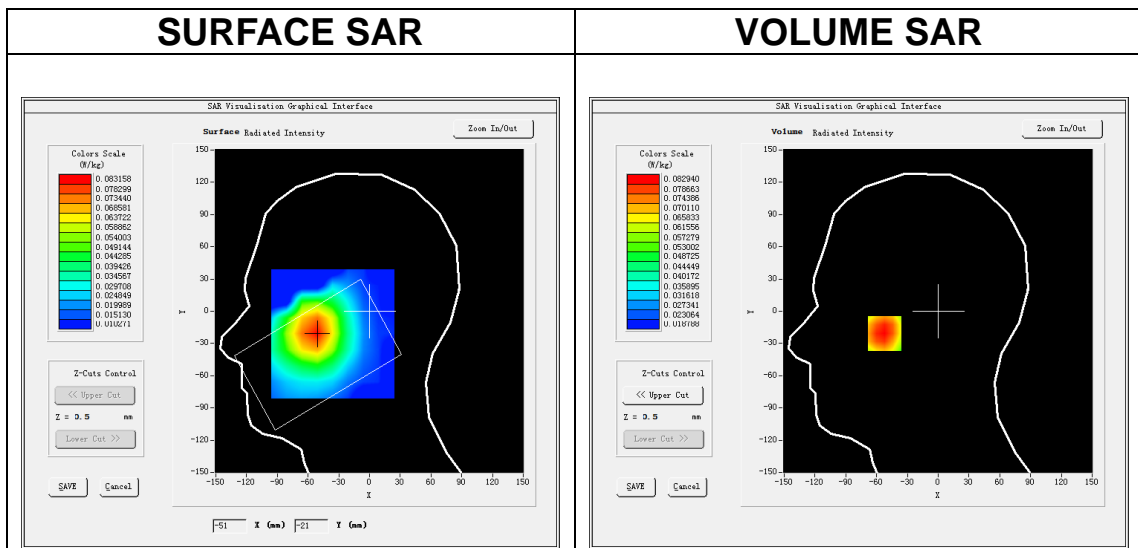

**Maximum location: X=-52.00, Y=-20.00**  
**SAR Peak: 0.09 W/kg**

<b>SAR 10g (W/Kg)</b>	0.062961
<b>SAR 1g (W/Kg)</b>	0.080290

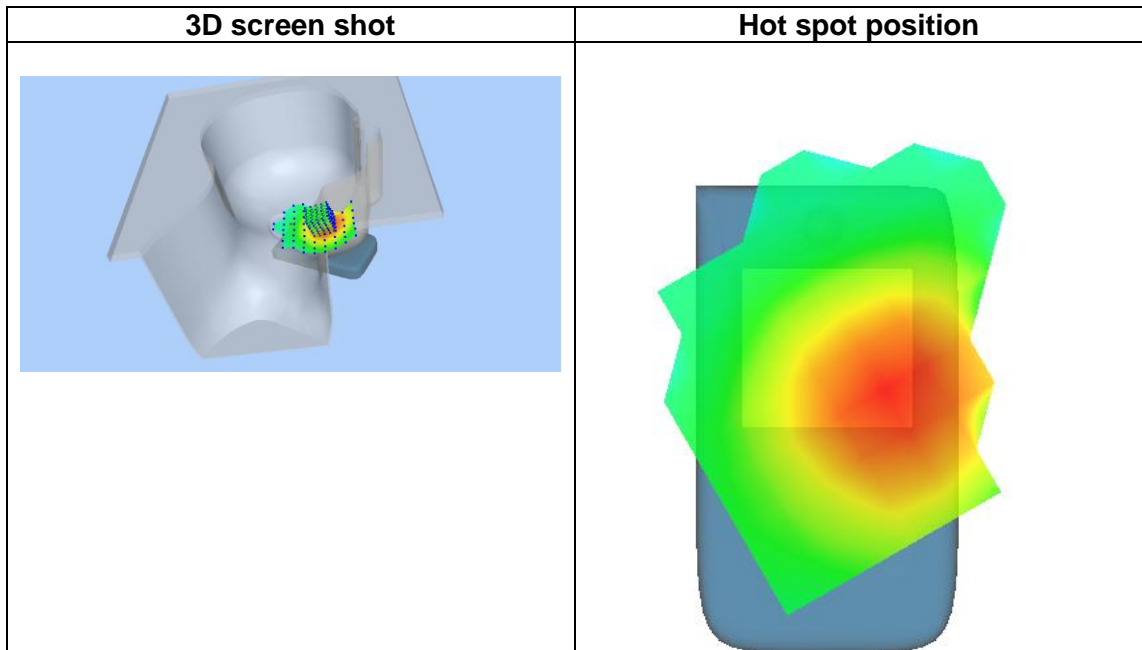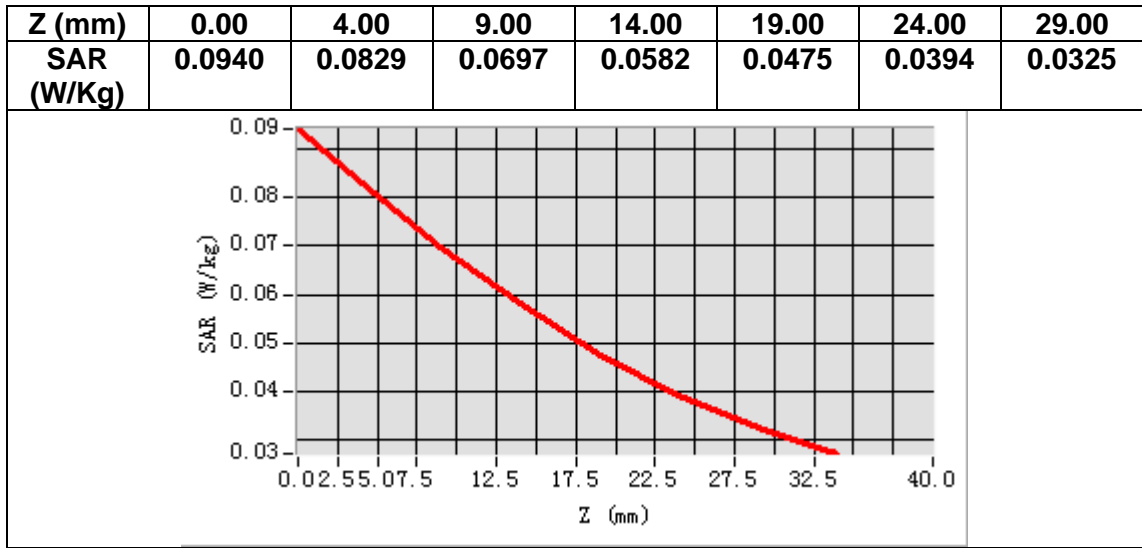



# MEASUREMENT 10


Date of measurement: 8/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>Band5_WCDMA850</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.32</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	41.006798
<b>Relative permittivity (imaginary part)</b>	19.082279
<b>Conductivity (S/m)</b>	0.886690
<b>Variation (%)</b>	-2.450000

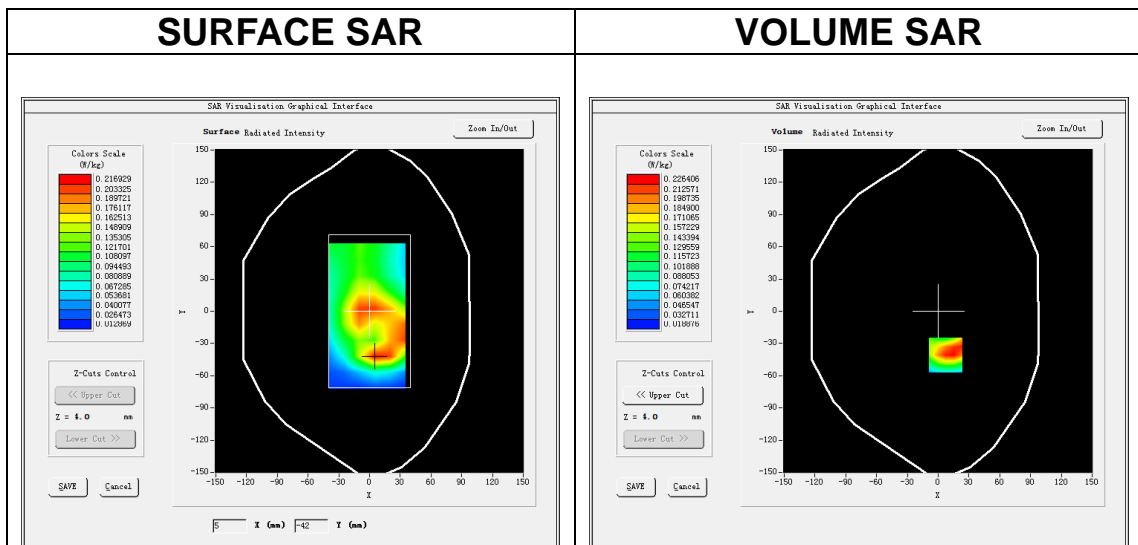

**Maximum location: X=7.00, Y=-41.00**  
**SAR Peak: 0.35 W/kg**

<b>SAR 10g (W/Kg)</b>	0.130309
<b>SAR 1g (W/Kg)</b>	0.221332

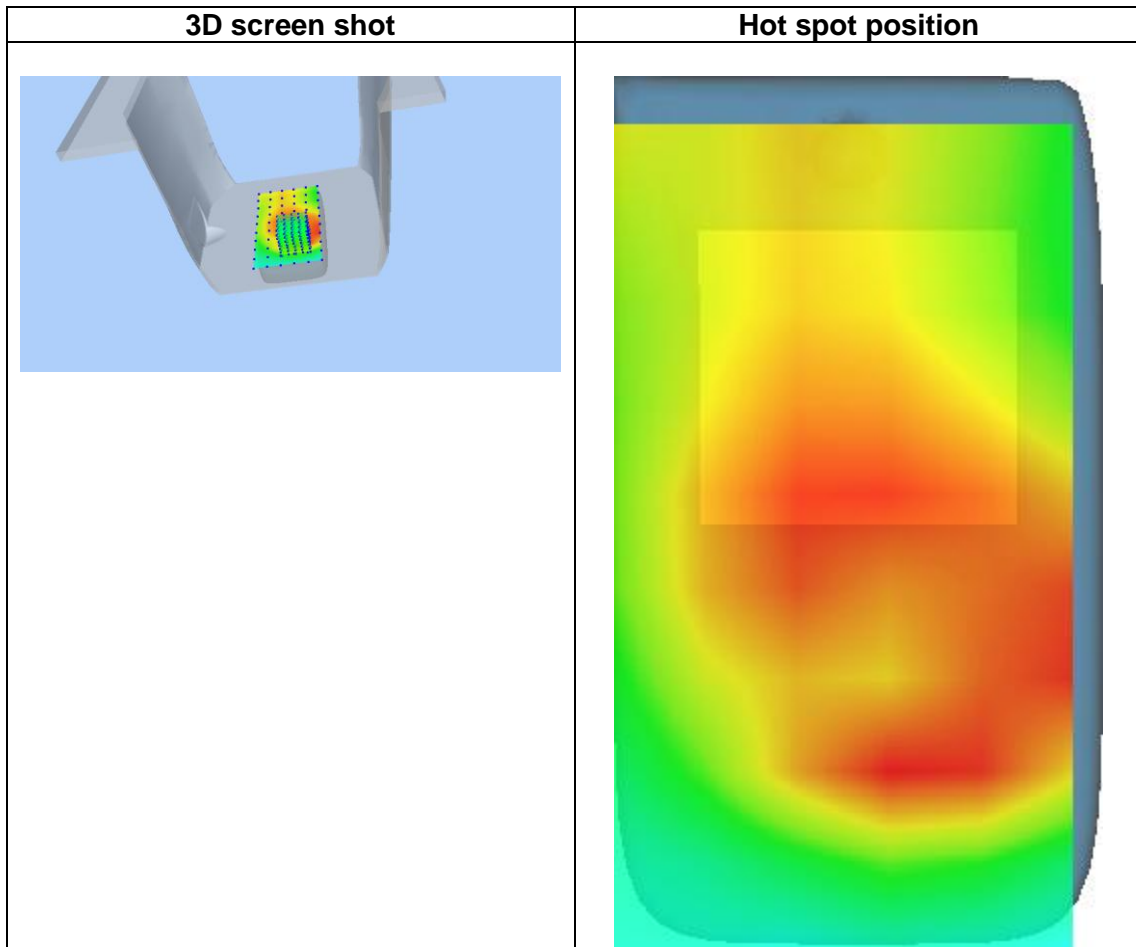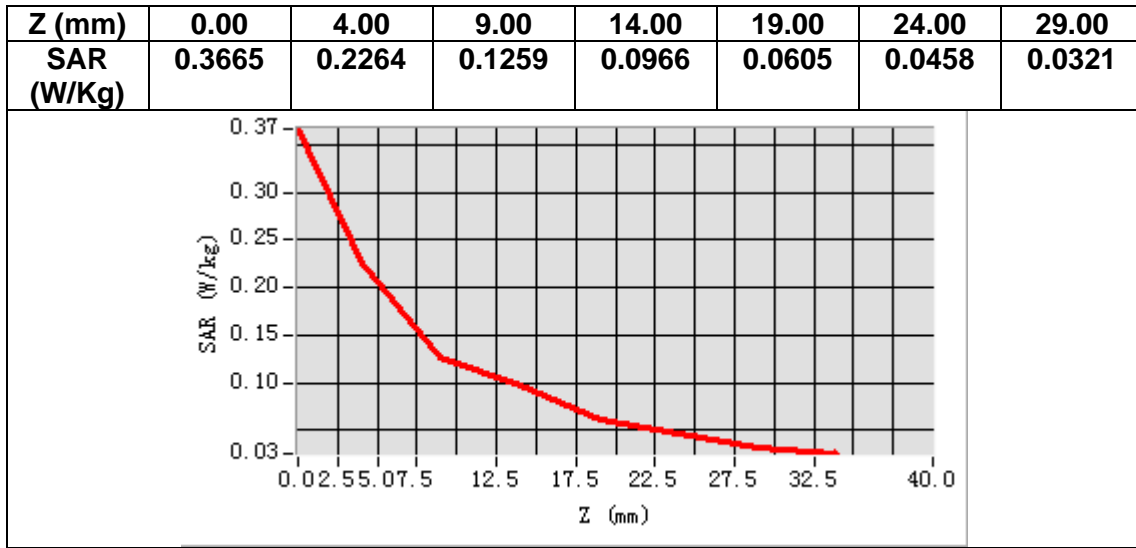

# MEASUREMENT 11


Date of measurement: 12/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>Bluetooth</u>
<b>Channels</b>	<u>High</u>
<b>Signal</b>	<u>Bluetooth (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.85</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2480.000000
<b>Relative permittivity (real part)</b>	37.575235
<b>Relative permittivity (imaginary part)</b>	13.040978
<b>Conductivity (S/m)</b>	1.796757
<b>Variation (%)</b>	-3.340000

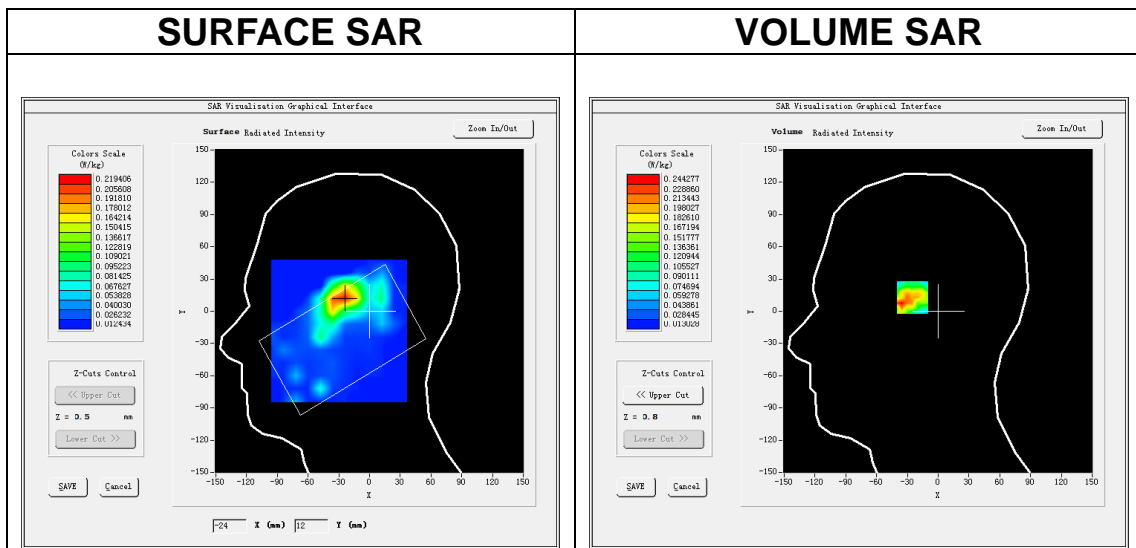

**Maximum location: X=-24.00, Y=14.00**  
**SAR Peak: 0.42 W/kg**

<b>SAR 10g (W/Kg)</b>	0.108741
<b>SAR 1g (W/Kg)</b>	0.211761

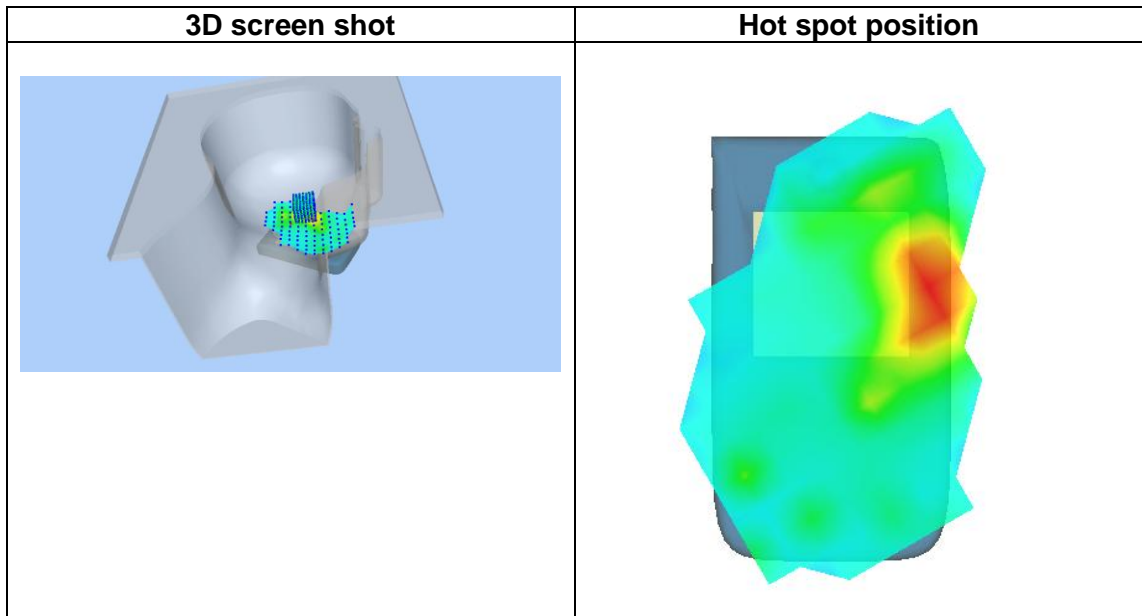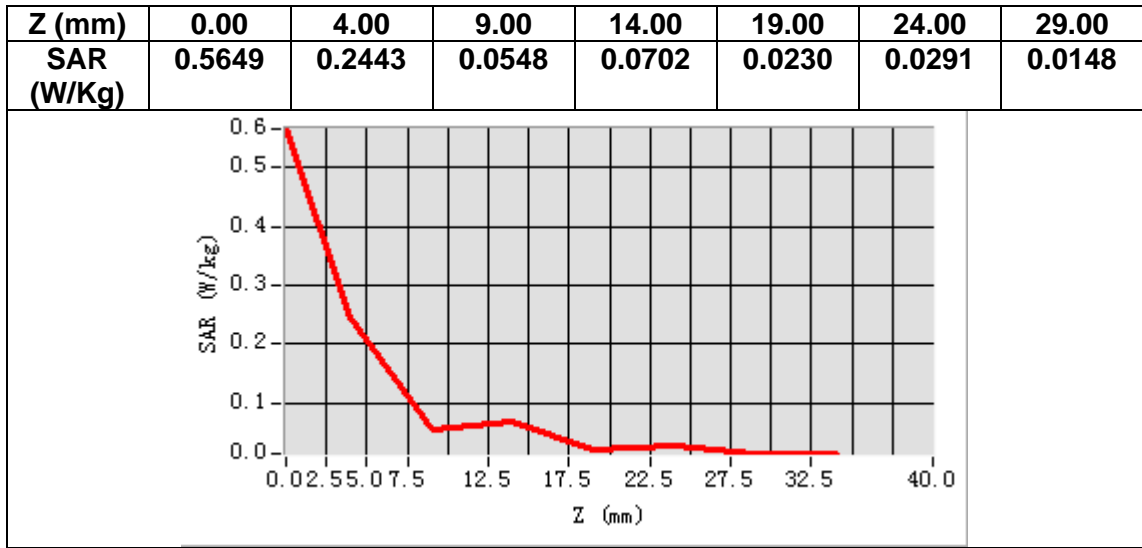

# MEASUREMENT 12


Date of measurement: 12/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>Bluetooth</u>
<b>Channels</b>	<u>High</u>
<b>Signal</b>	<u>Bluetooth (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.85</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	2480.000000
<b>Relative permittivity (real part)</b>	37.575235
<b>Relative permittivity (imaginary part)</b>	13.040978
<b>Conductivity (S/m)</b>	1.796757
<b>Variation (%)</b>	-0.760000

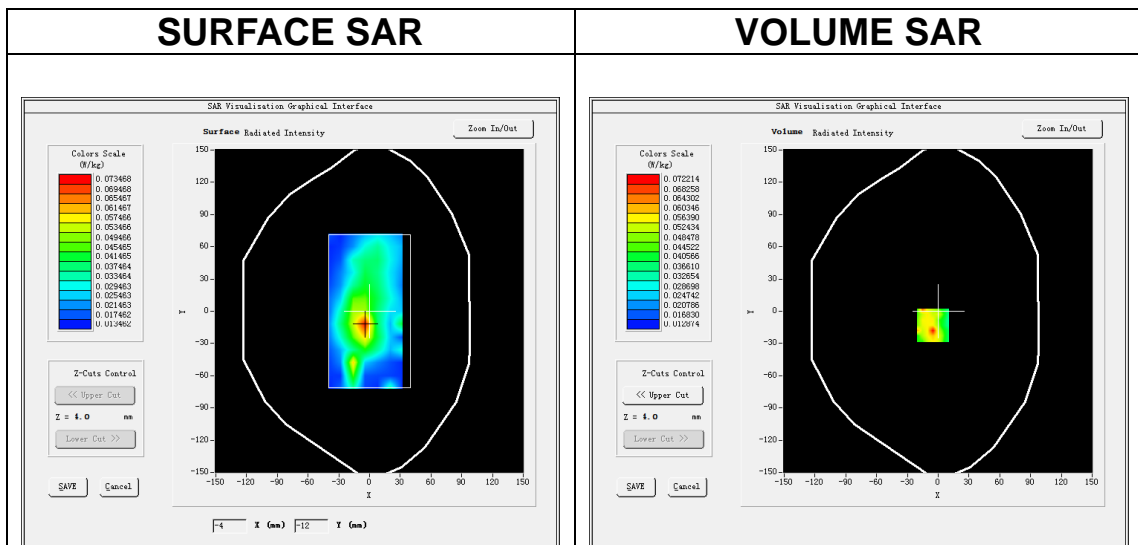

**Maximum location: X=-5.00, Y=-13.00**  
**SAR Peak: 0.13 W/kg**

<b>SAR 10g (W/Kg)</b>	0.036340
<b>SAR 1g (W/Kg)</b>	0.060008

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.1277</b>	<b>0.0722</b>	<b>0.0354</b>	<b>0.0261</b>	<b>0.0191</b>	<b>0.0147</b>	<b>0.0150</b>

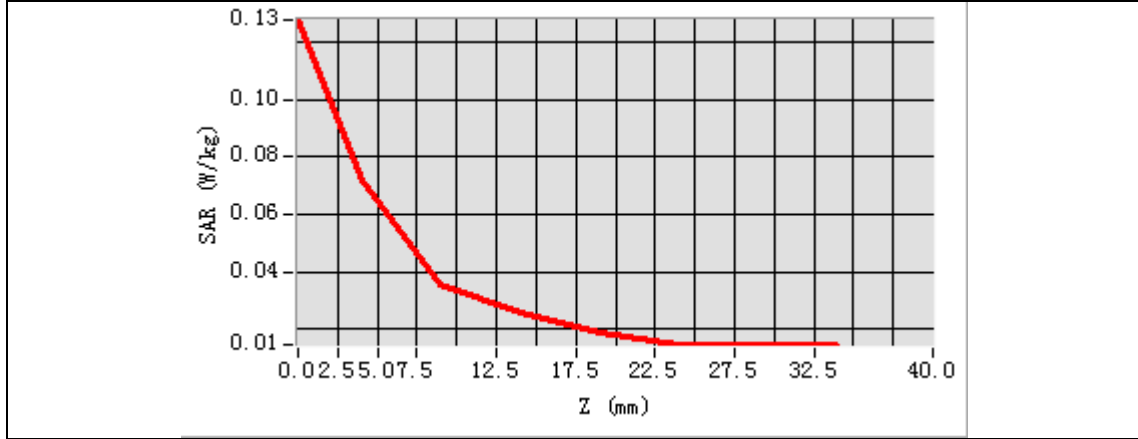

3D screen shot	Hot spot position

# MEASUREMENT 13


Date of measurement: 21/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<b>ZoomScan</b>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>IEEE 802.11ac U-NII</u>
<b>Channels</b>	<u>High</u>
<b>Signal</b>	<u>IEEE802.11ac (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.07</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	5230.000000
<b>Relative permittivity (real part)</b>	34.390342
<b>Relative permittivity (imaginary part)</b>	15.666192
<b>Conductivity (S/m)</b>	4.551899
<b>Variation (%)</b>	-1.930000

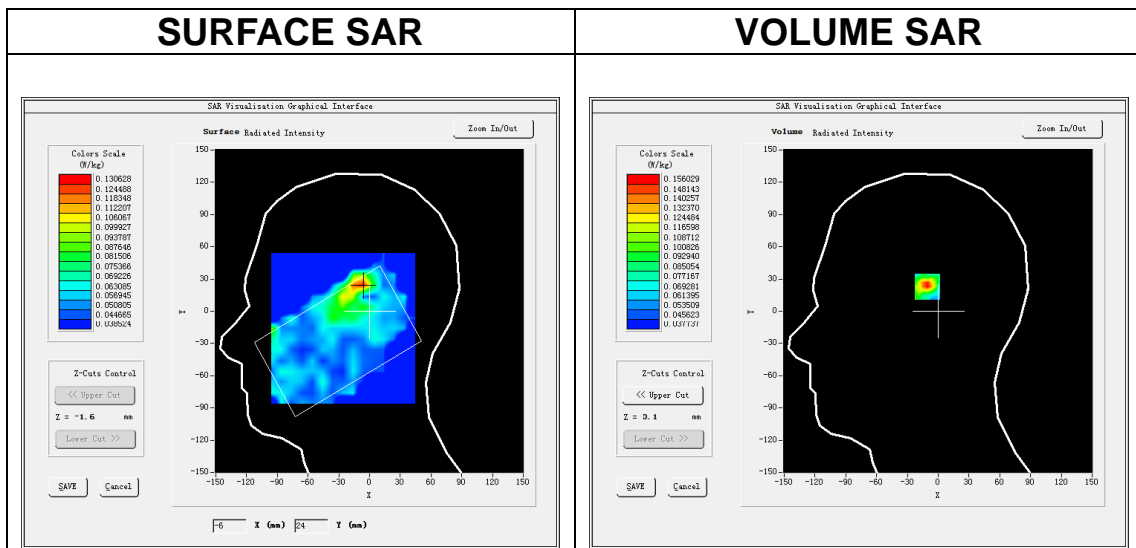

**Maximum location: X=-7.00, Y=25.00**  
**SAR Peak: 0.35 W/kg**

<b>SAR 10g (W/Kg)</b>	0.078823
<b>SAR 1g (W/Kg)</b>	0.140711

<b>Z (m m)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.00</b>	<b>12.00</b>	<b>14.00</b>	<b>16.00</b>	<b>18.00</b>	<b>20.00</b>	<b>22.00</b>
<b>SAR (W/Kg)</b>	<b>0.2159</b>	<b>0.1560</b>	<b>0.0970</b>	<b>0.0752</b>	<b>0.0714</b>	<b>0.0458</b>	<b>0.0655</b>	<b>0.0449</b>	<b>0.0421</b>	<b>0.0408</b>	<b>0.0522</b>	<b>0.0588</b>

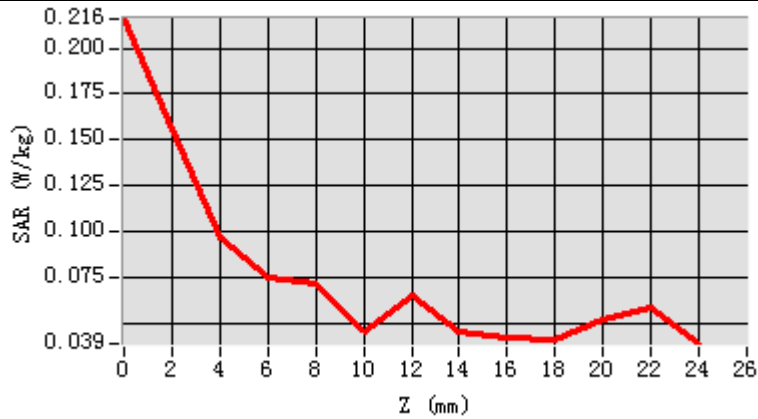

3D screen shot	Hot spot position



# MEASUREMENT 14


Date of measurement: 20/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11ac U-NII</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>IEEE802.11ac (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	5795.000000
<b>Relative permittivity (real part)</b>	33.899743
<b>Relative permittivity (imaginary part)</b>	16.061959
<b>Conductivity (S/m)</b>	5.171058
<b>Variation (%)</b>	-2.830000

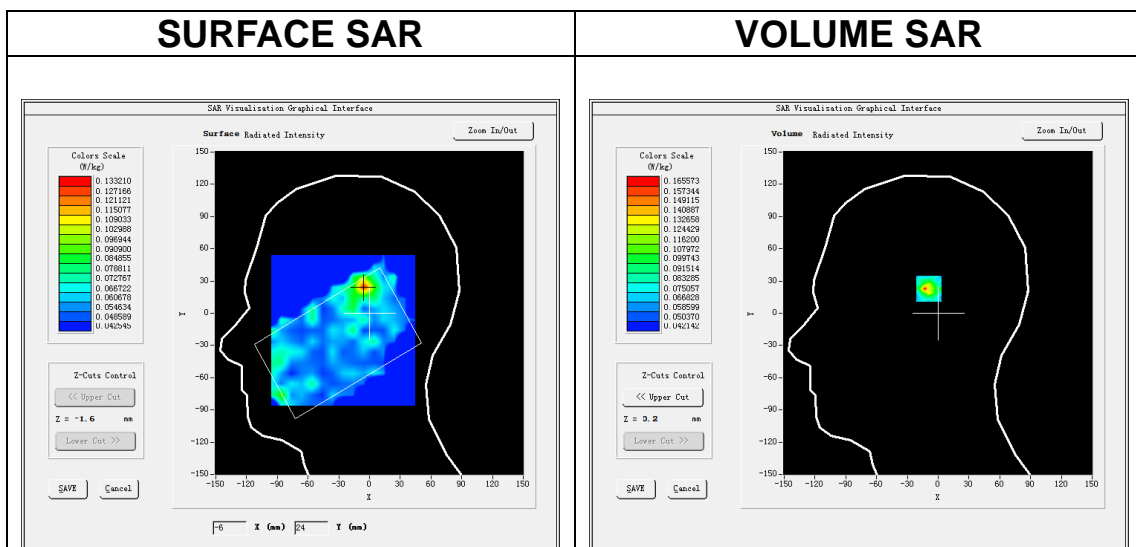

**Maximum location: X=-6.00, Y=25.00**  
**SAR Peak: 0.46 W/kg**

<b>SAR 10g (W/Kg)</b>	0.076377
<b>SAR 1g (W/Kg)</b>	0.140698

<b>Z (m m)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.0</b>	<b>12.0</b>	<b>14.0</b>	<b>16.0</b>	<b>18.0</b>	<b>20.0</b>	<b>22.0</b>
<b>SAR (W/Kg)</b>	<b>0.2710</b>	<b>0.1656</b>	<b>0.0974</b>	<b>0.0596</b>	<b>0.0640</b>	<b>0.0690</b>	<b>0.0521</b>	<b>0.0456</b>	<b>0.0653</b>	<b>0.0589</b>	<b>0.0500</b>	<b>0.0523</b>

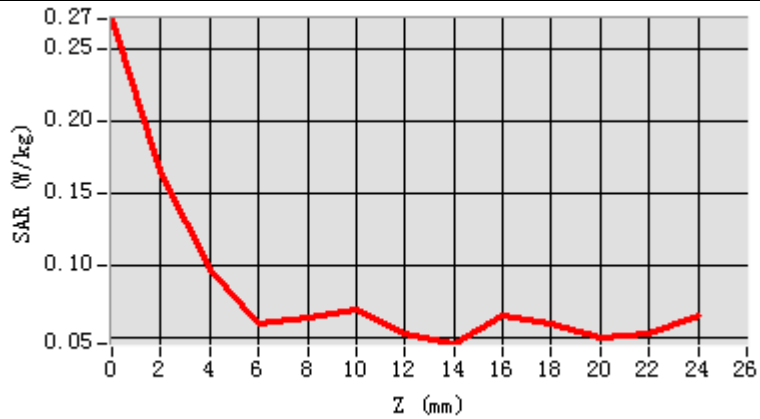

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 15


Date of measurement: 21/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<b>ZoomScan</b>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>IEEE 802.11ac U-NII</u>
<b>Channels</b>	<u>High</u>
<b>Signal</b>	<u>IEEE802.11ac (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.07</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	5230.000000
<b>Relative permittivity (real part)</b>	34.390342
<b>Relative permittivity (imaginary part)</b>	15.666192
<b>Conductivity (S/m)</b>	4.551899
<b>Variation (%)</b>	-2.060000

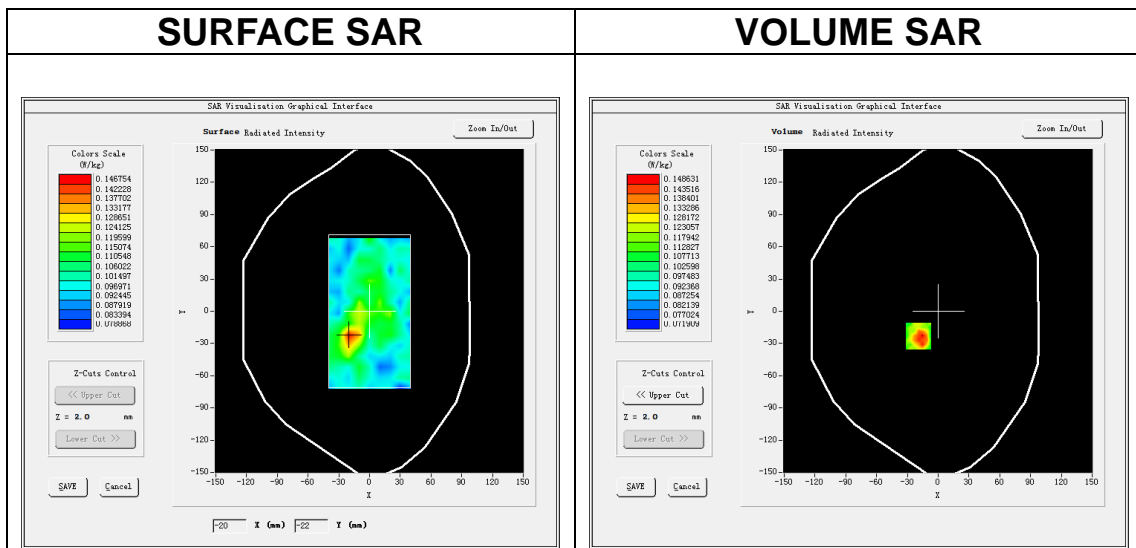


**Maximum location: X=-19.00, Y=-23.00**  
**SAR Peak: 0.22 W/kg**

<b>SAR 10g (W/Kg)</b>	0.105930
<b>SAR 1g (W/Kg)</b>	0.124646


<b>Z (m m)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.0 0</b>	<b>12.0 0</b>	<b>14.0 0</b>	<b>16.0 0</b>	<b>18.0 0</b>	<b>20.0 0</b>	<b>22.0 0</b>
<b>SAR (W/ Kg)</b>	<b>0.20 09</b>	<b>0.14 86</b>	<b>0.11 56</b>	<b>0.08 63</b>	<b>0.09 44</b>	<b>0.10 35</b>	<b>0.09 46</b>	<b>0.08 78</b>	<b>0.09 53</b>	<b>0.10 01</b>	<b>0.09 11</b>	<b>0.10 30</b>

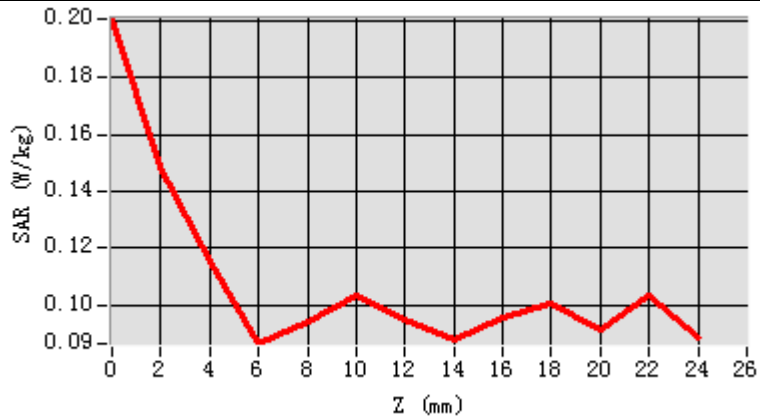

**3D screen shot**

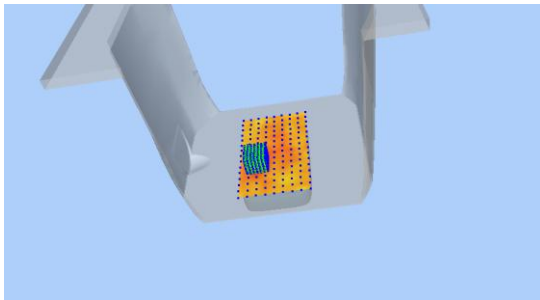

**Hot spot position**

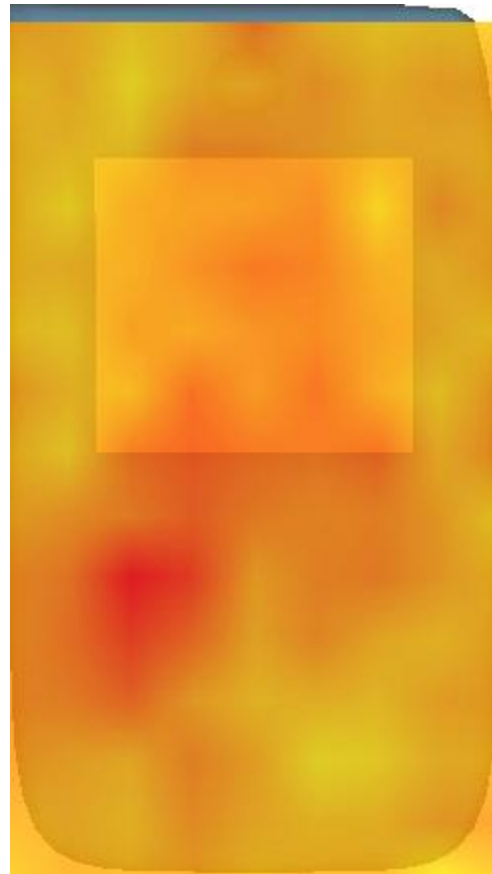

# MEASUREMENT 16


Date of measurement: 20/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<b>ZoomScan</b>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>IEEE 802.11ac U-NII</u>
<b>Channels</b>	<u>High</u>
<b>Signal</b>	<u>IEEE802.11ac (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.04</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	5795.000000
<b>Relative permittivity (real part)</b>	33.899743
<b>Relative permittivity (imaginary part)</b>	16.061959
<b>Conductivity (S/m)</b>	5.171058
<b>Variation (%)</b>	0.680000

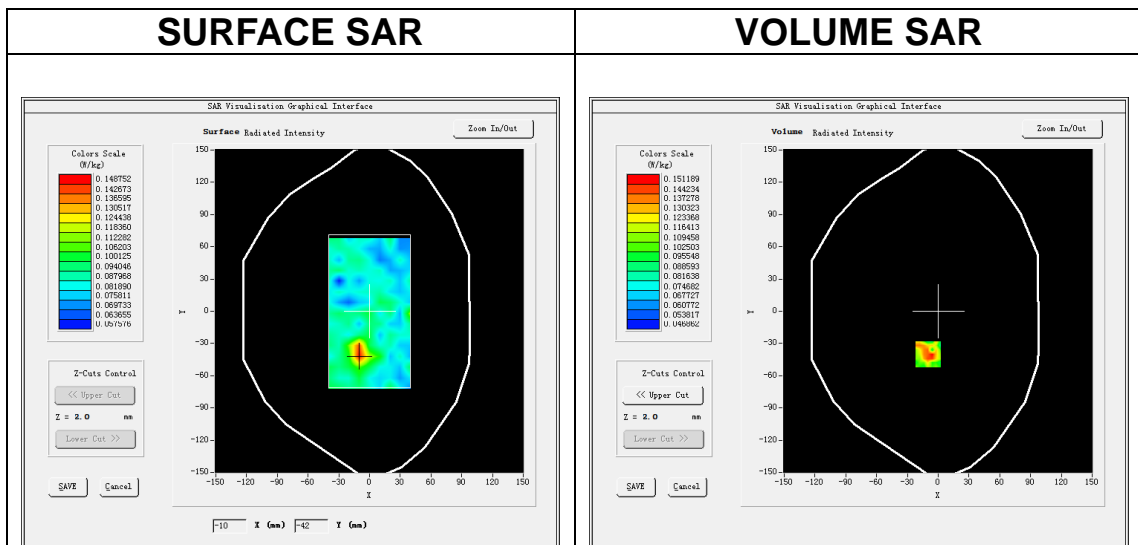


**Maximum location: X=-10.00, Y=-40.00**  
**SAR Peak: 0.22 W/kg**

<b>SAR 10g (W/Kg)</b>	0.089256
<b>SAR 1g (W/Kg)</b>	0.114076


<b>Z (m m)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.0 0</b>	<b>12.0 0</b>	<b>14.0 0</b>	<b>16.0 0</b>	<b>18.0 0</b>	<b>20.0 0</b>	<b>22.0 0</b>
<b>SAR (W/ Kg)</b>	<b>0.20 27</b>	<b>0.15 12</b>	<b>0.10 10</b>	<b>0.08 99</b>	<b>0.08 40</b>	<b>0.08 82</b>	<b>0.06 67</b>	<b>0.07 60</b>	<b>0.07 01</b>	<b>0.06 99</b>	<b>0.07 87</b>	<b>0.07 51</b>

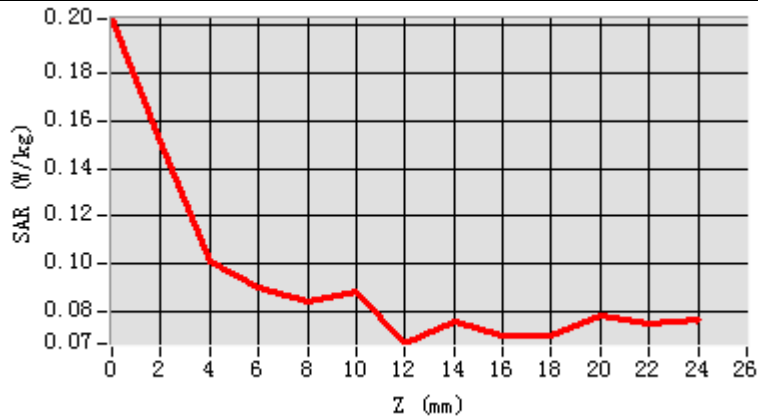

**3D screen shot**

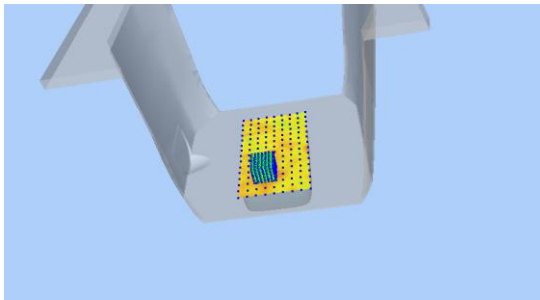

**Hot spot position**

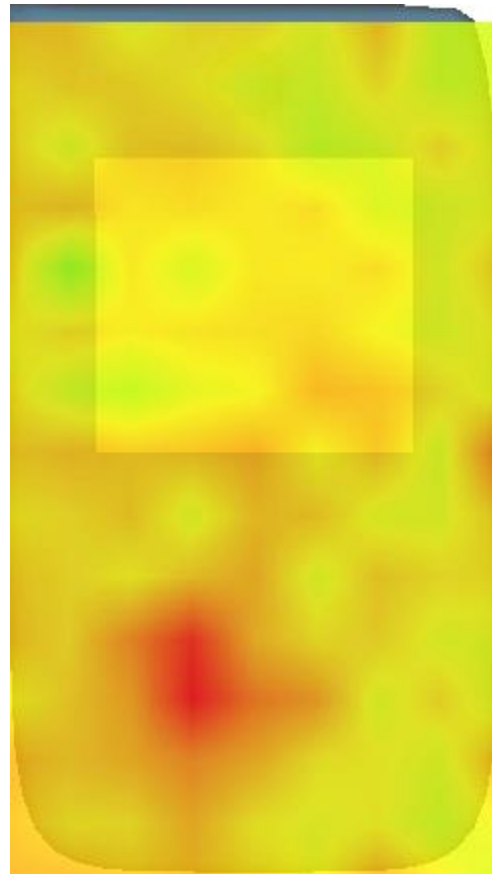

# MEASUREMENT 17


Date of measurement: 12/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	2437.000000
<b>Relative permittivity (real part)</b>	37.726734
<b>Relative permittivity (imaginary part)</b>	12.814278
<b>Conductivity (S/m)</b>	1.734911
<b>Variation (%)</b>	-1.180000

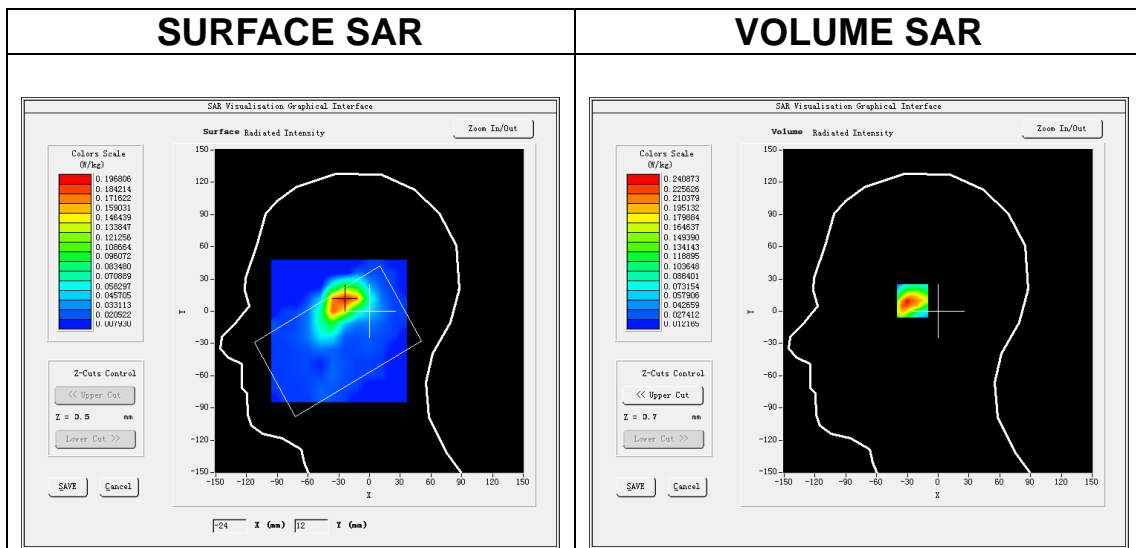

**Maximum location: X=-24.00, Y=11.00**  
**SAR Peak: 0.43 W/kg**

<b>SAR 10g (W/Kg)</b>	0.105062
<b>SAR 1g (W/Kg)</b>	0.220916

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.4779</b>	<b>0.2409</b>	<b>0.0882</b>	<b>0.0587</b>	<b>0.0266</b>	<b>0.0236</b>	<b>0.0157</b>

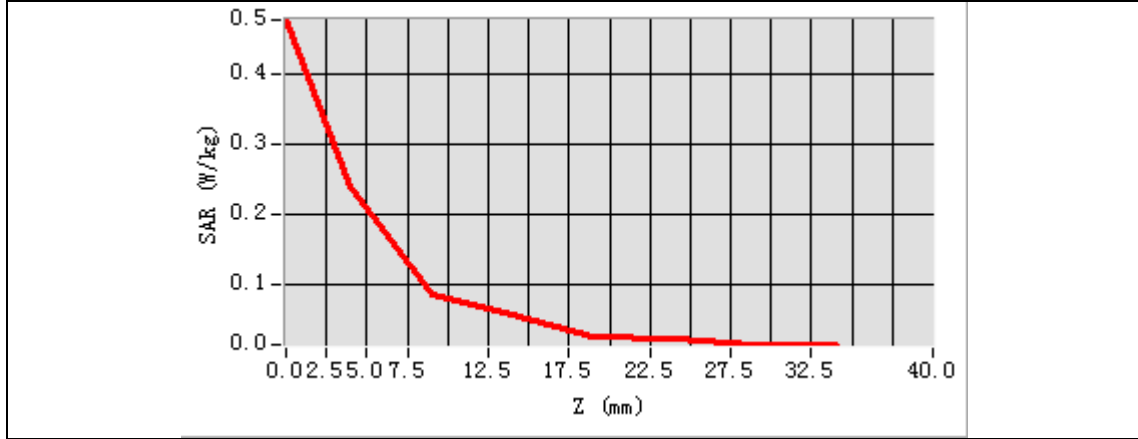

3D screen shot	Hot spot position



# MEASUREMENT 18


Date of measurement: 12/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>



## B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	37.726734
Relative permittivity (imaginary part)	12.814278
Conductivity (S/m)	1.734911
Variation (%)	1.209999

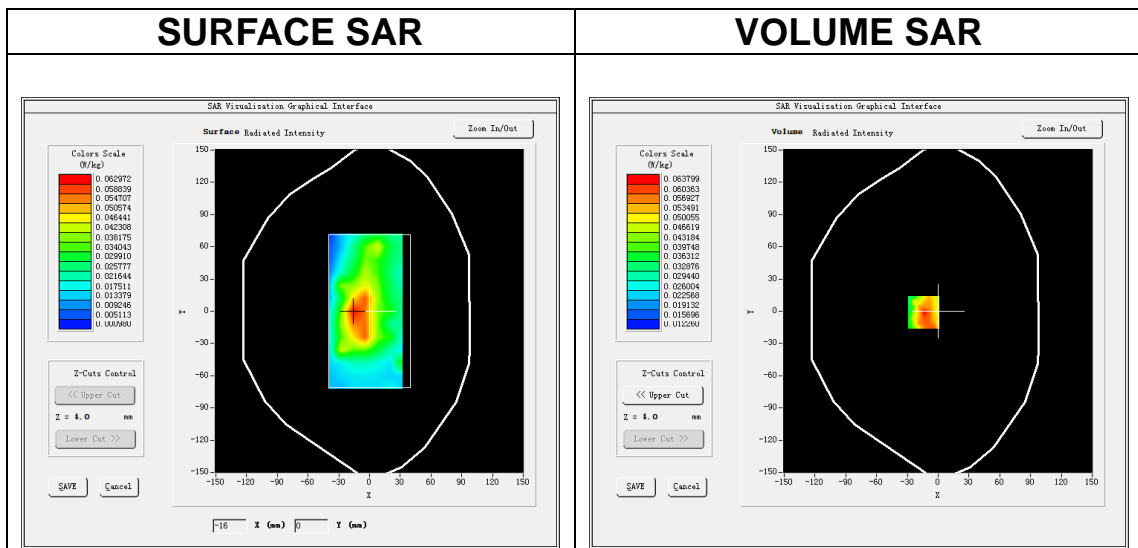

**Maximum location: X=-14.00, Y=-1.00**  
**SAR Peak: 0.10 W/kg**

<b>SAR 10g (W/Kg)</b>	0.037204
<b>SAR 1g (W/Kg)</b>	0.058180

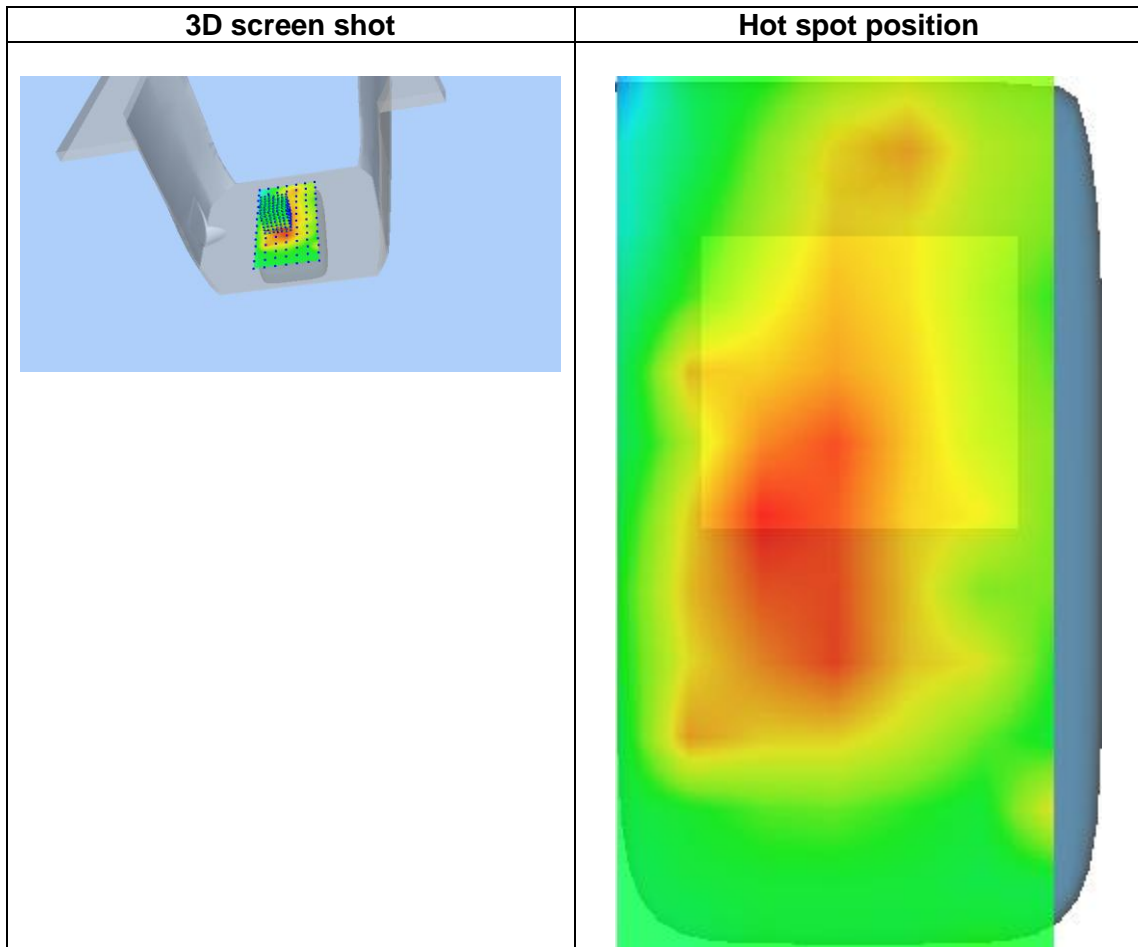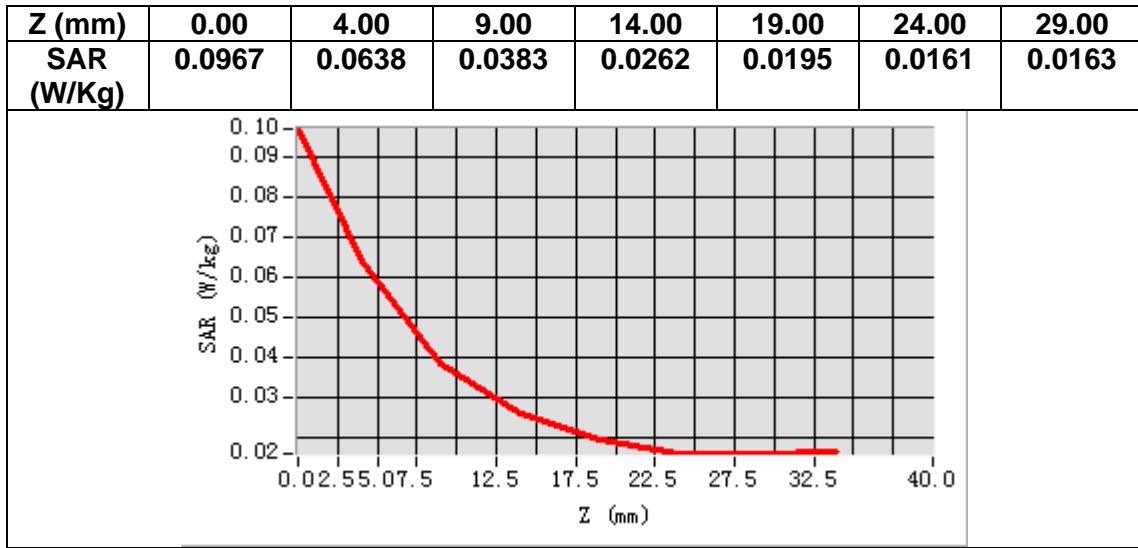

# MEASUREMENT 19


Date of measurement: 9/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 2</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.63</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.100822
<b>Relative permittivity (imaginary part)</b>	13.853208
<b>Conductivity (S/m)</b>	1.446891
<b>Variation (%)</b>	0.030000

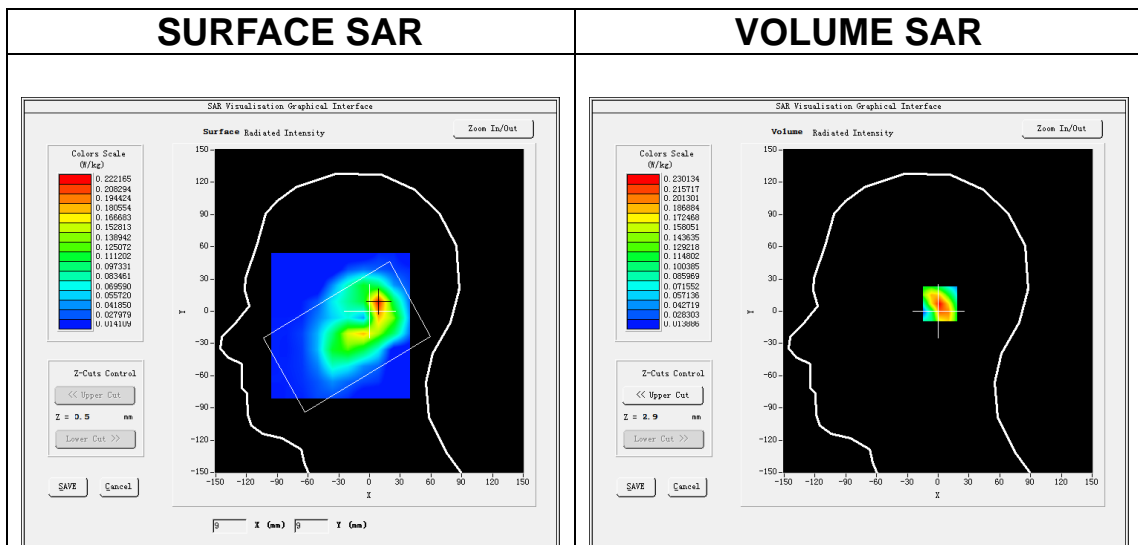

**Maximum location: X=9.00, Y=7.00**  
**SAR Peak: 0.37 W/kg**

<b>SAR 10g (W/Kg)</b>	0.117813
<b>SAR 1g (W/Kg)</b>	0.220972

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.3637</b>	<b>0.2301</b>	<b>0.1276</b>	<b>0.0742</b>	<b>0.0463</b>	<b>0.0306</b>	<b>0.0231</b>

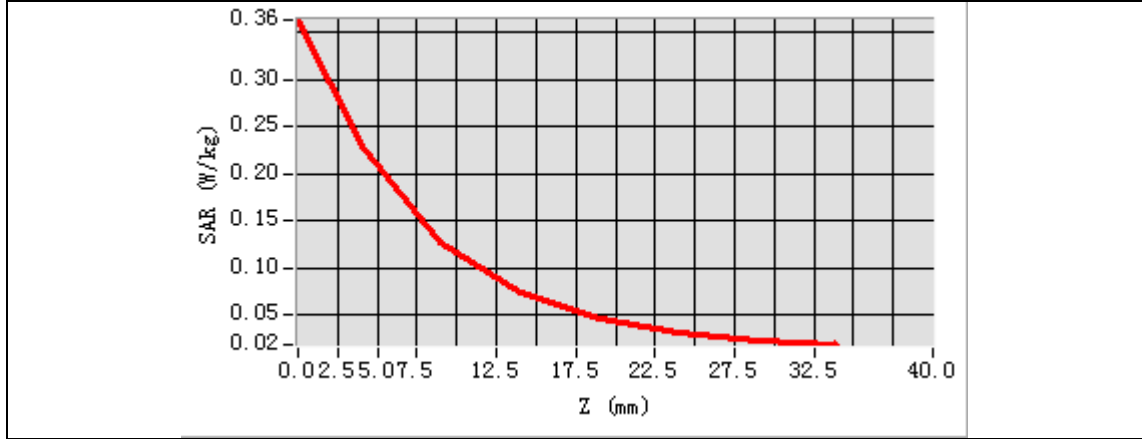

3D screen shot	Hot spot position
<p>A 3D rendering of a human head model with a grid of small colored dots representing SAR measurement points on the face and neck area.</p>	<p>A heatmap overlaid on the 3D head model, showing a concentration of high SAR values (red and orange) on the forehead and upper face, indicating the hot spot position.</p>

# MEASUREMENT 20


Date of measurement: 9/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 2</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.63</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.100822
<b>Relative permittivity (imaginary part)</b>	13.853208
<b>Conductivity (S/m)</b>	1.446891
<b>Variation (%)</b>	-0.870000

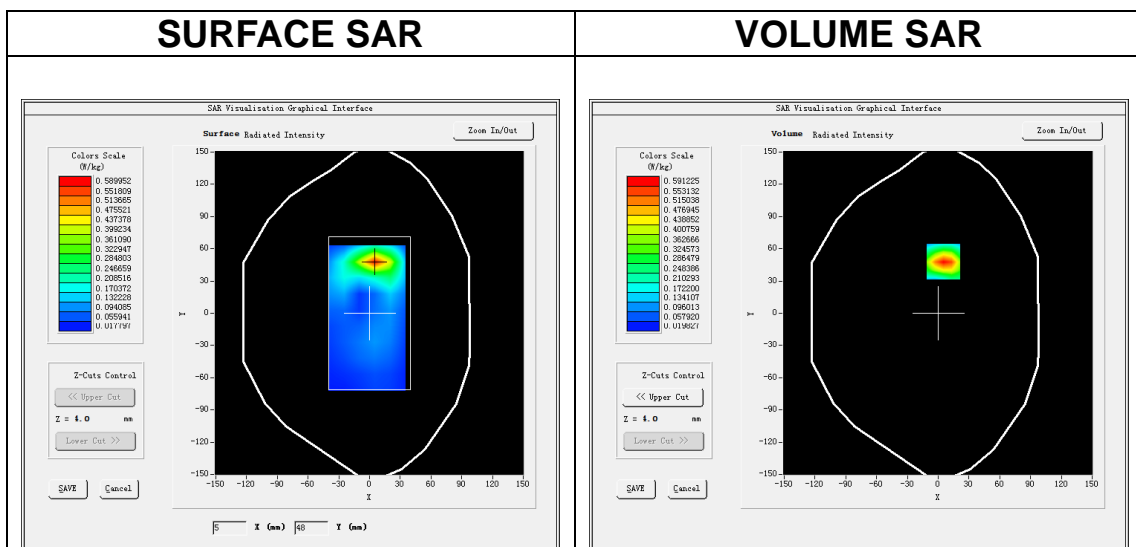

**Maximum location: X=5.00, Y=48.00**  
**SAR Peak: 0.93 W/kg**

<b>SAR 10g (W/Kg)</b>	0.285494
<b>SAR 1g (W/Kg)</b>	0.562152

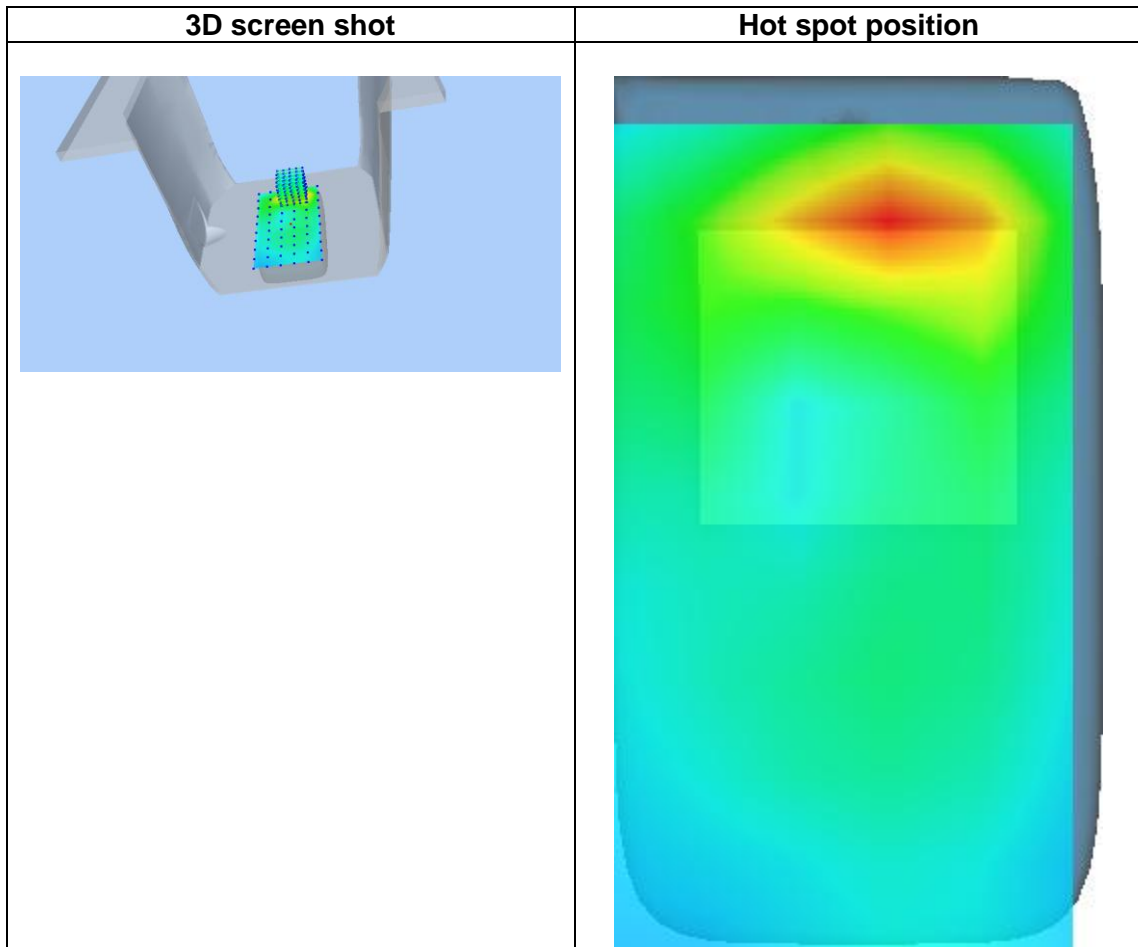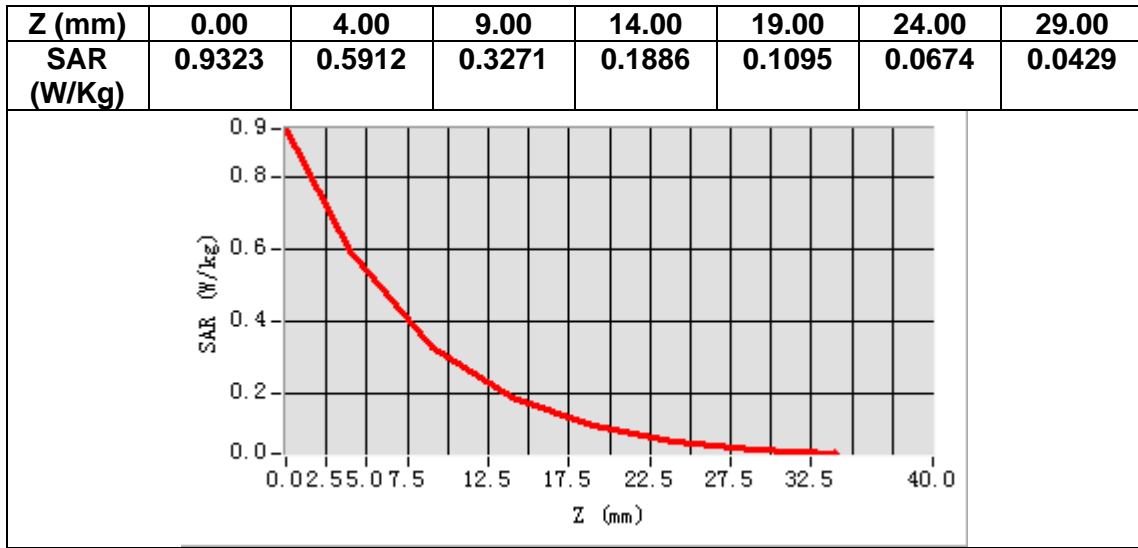

# MEASUREMENT 21


Date of measurement: 10/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

## B. SAR Measurement Results


Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.669003
Relative permittivity (imaginary part)	13.907113
Conductivity (S/m)	1.338560
Variation (%)	-0.270000

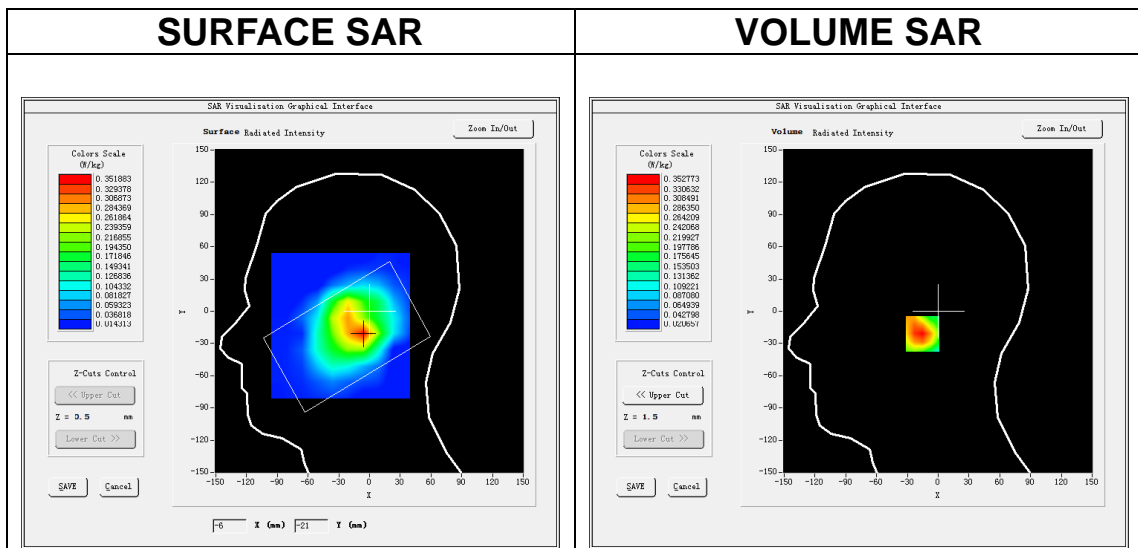

**Maximum location: X=-7.00, Y=-21.00**  
**SAR Peak: 0.52 W/kg**

<b>SAR 10g (W/Kg)</b>	0.196373
<b>SAR 1g (W/Kg)</b>	0.336387

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.5153</b>	<b>0.3528</b>	<b>0.2156</b>	<b>0.1302</b>	<b>0.0804</b>	<b>0.0529</b>	<b>0.0359</b>

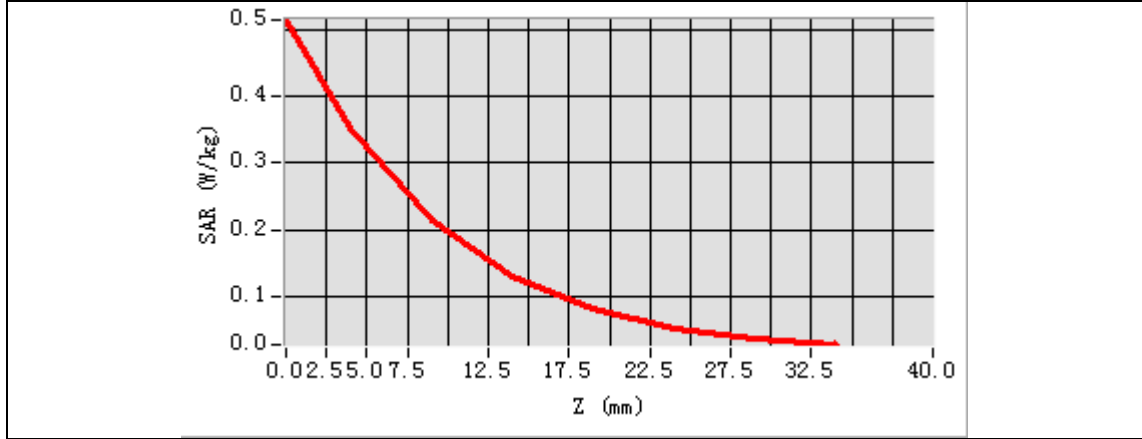

3D screen shot	Hot spot position
<p>A 3D rendering of a human head model with a grid of small colored squares overlaid on the face, representing the SAR distribution. The colors range from blue (low SAR) to red (high SAR).</p>	<p>A heatmap visualization of the SAR distribution on the head model. The highest SAR values (red/orange) are concentrated in the center of the forehead, indicating the hot spot position.</p>



# MEASUREMENT 22


Date of measurement: 10/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	1732.500000
<b>Relative permittivity (real part)</b>	39.669003
<b>Relative permittivity (imaginary part)</b>	13.907113
<b>Conductivity (S/m)</b>	1.338560
<b>Variation (%)</b>	-3.220000

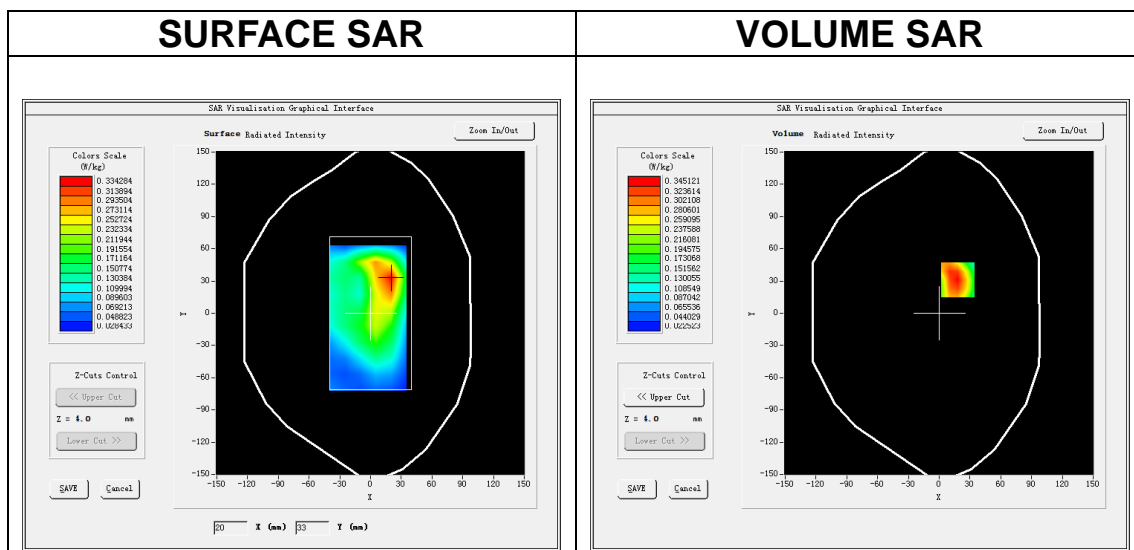

**Maximum location: X=18.00, Y=31.00**  
**SAR Peak: 0.53 W/kg**

<b>SAR 10g (W/Kg)</b>	0.194447
<b>SAR 1g (W/Kg)</b>	0.334116

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.5181</b>	<b>0.3451</b>	<b>0.2059</b>	<b>0.1277</b>	<b>0.0822</b>	<b>0.0519</b>	<b>0.0376</b>

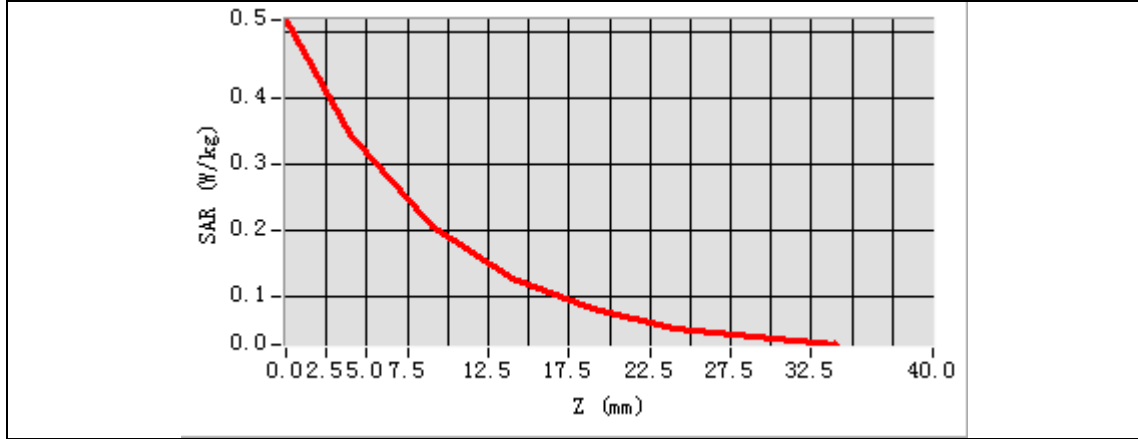

3D screen shot	Hot spot position

# MEASUREMENT 23


Date of measurement: 8/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.500000
<b>Relative permittivity (real part)</b>	41.009068
<b>Relative permittivity (imaginary part)</b>	19.084080
<b>Conductivity (S/m)</b>	0.886880
<b>Variation (%)</b>	3.320000

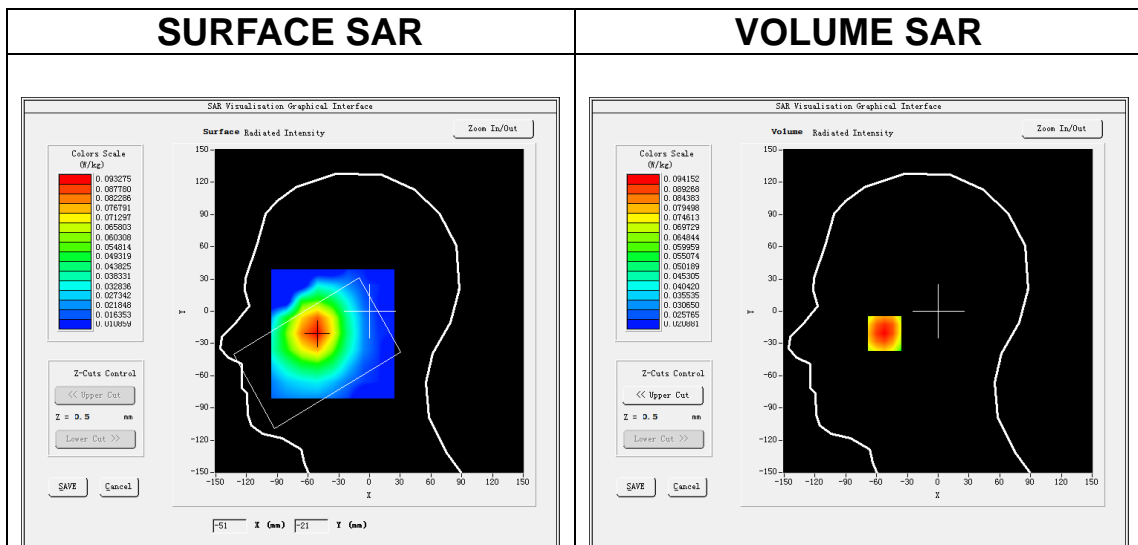

**Maximum location: X=-52.00, Y=-20.00**  
**SAR Peak: 0.11 W/kg**

<b>SAR 10g (W/Kg)</b>	0.070490
<b>SAR 1g (W/Kg)</b>	0.091176

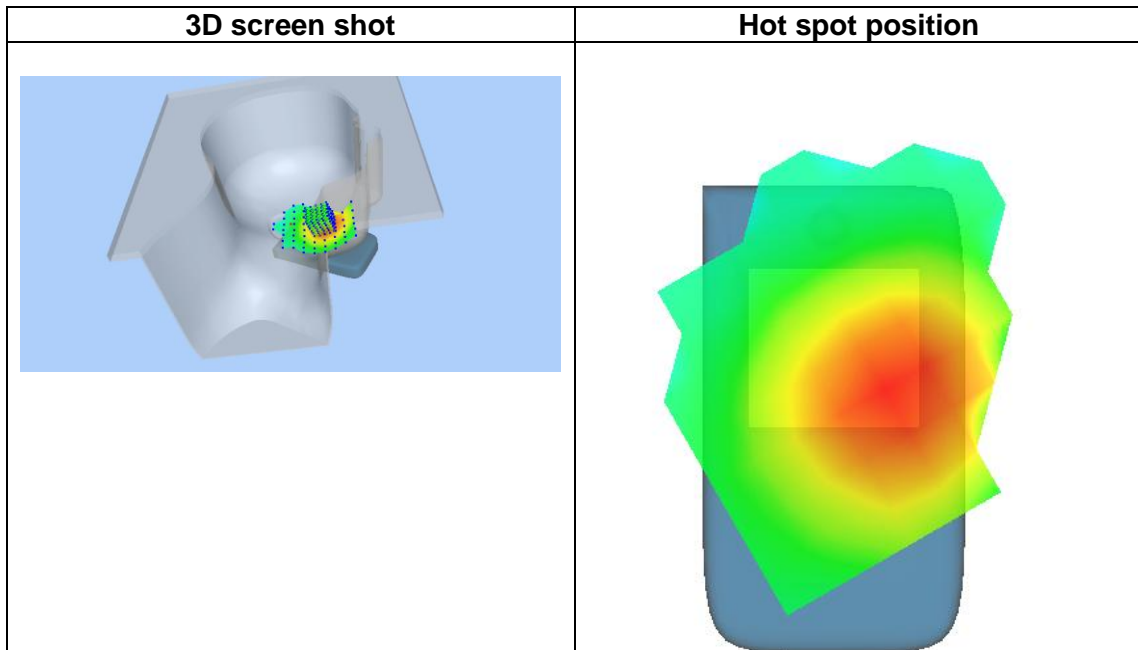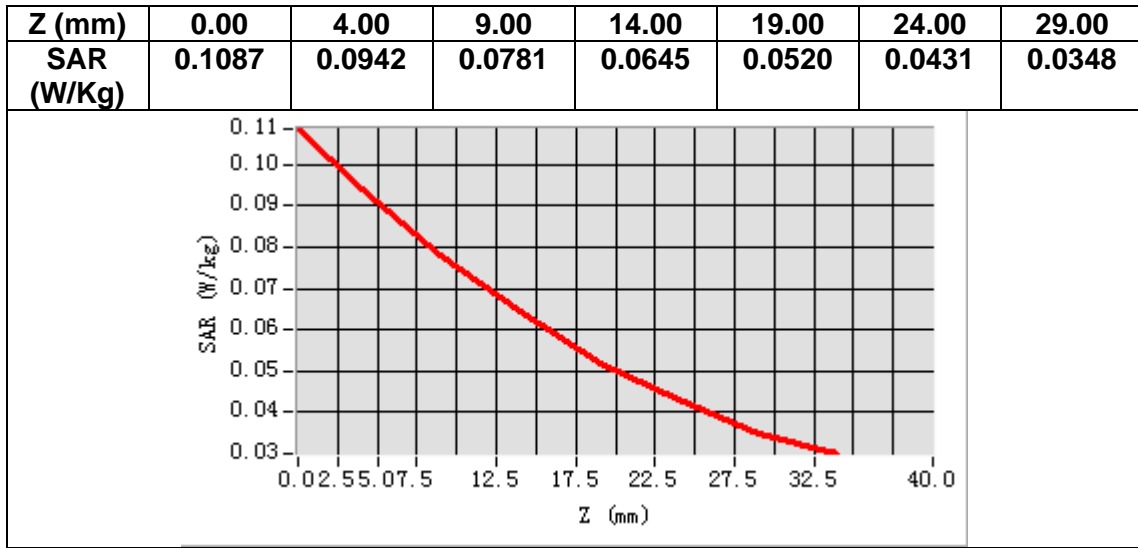

# MEASUREMENT 24


Date of measurement: 8/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.32</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.500000
<b>Relative permittivity (real part)</b>	41.009068
<b>Relative permittivity (imaginary part)</b>	19.084080
<b>Conductivity (S/m)</b>	0.886880
<b>Variation (%)</b>	1.020000

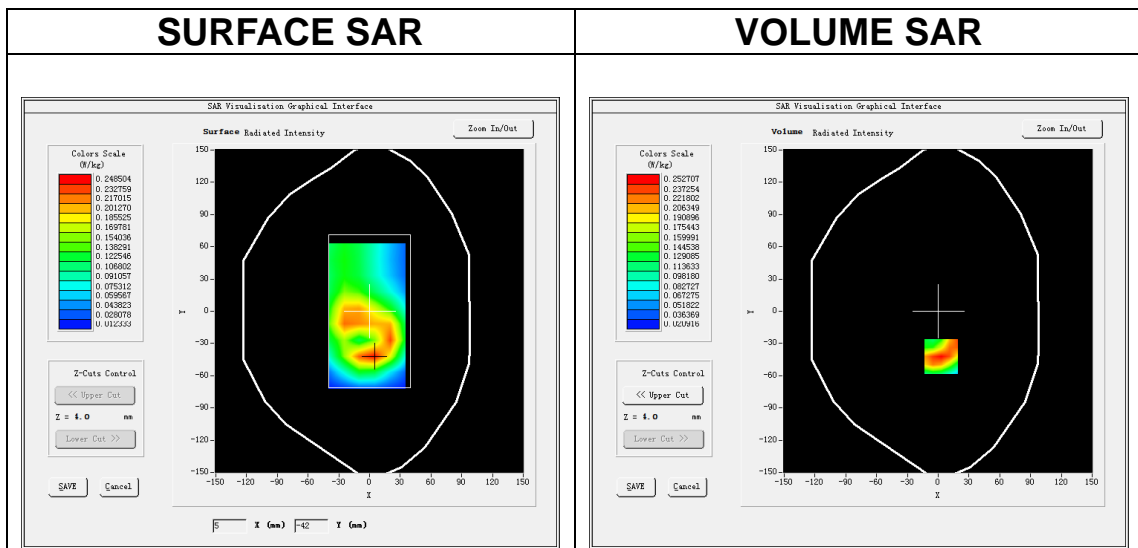

**Maximum location: X=3.00, Y=-42.00**  
**SAR Peak: 0.38 W/kg**

<b>SAR 10g (W/Kg)</b>	0.138618
<b>SAR 1g (W/Kg)</b>	0.239963

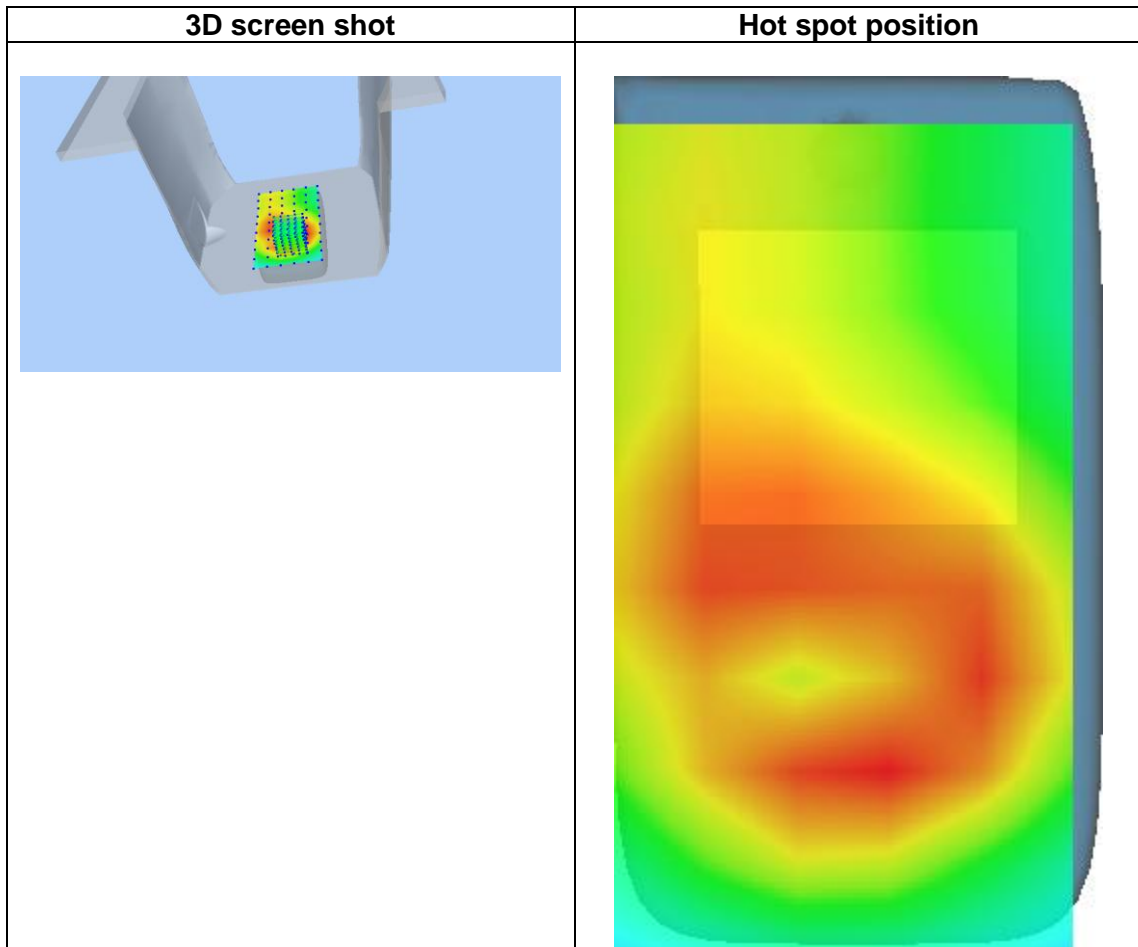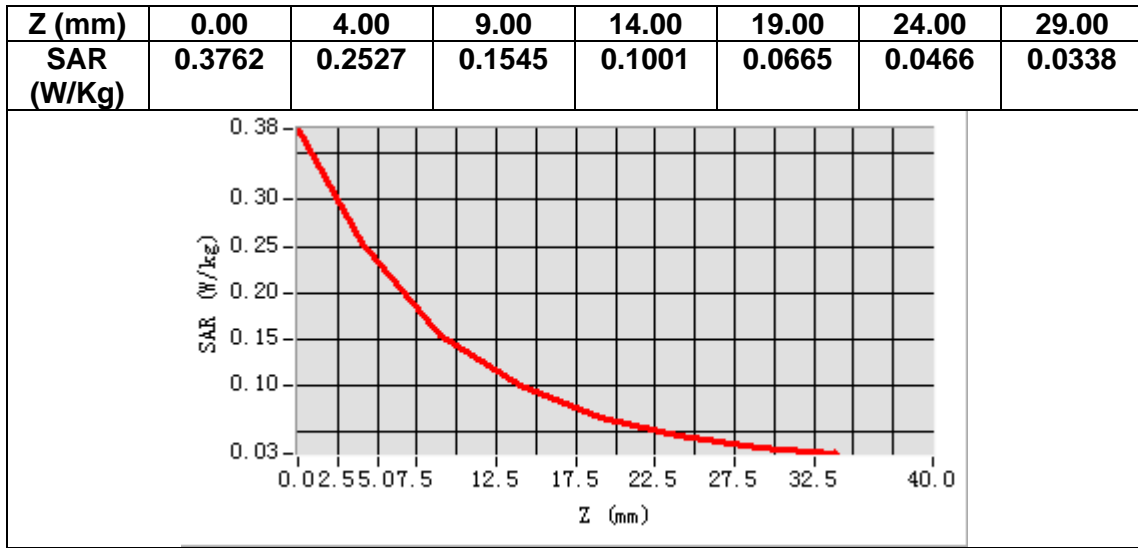

# MEASUREMENT 25


Date of measurement: 16/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 7</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.65</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	2535.000000
<b>Relative permittivity (real part)</b>	39.157543
<b>Relative permittivity (imaginary part)</b>	13.515832
<b>Conductivity (S/m)</b>	1.903480
<b>Variation (%)</b>	1.470000

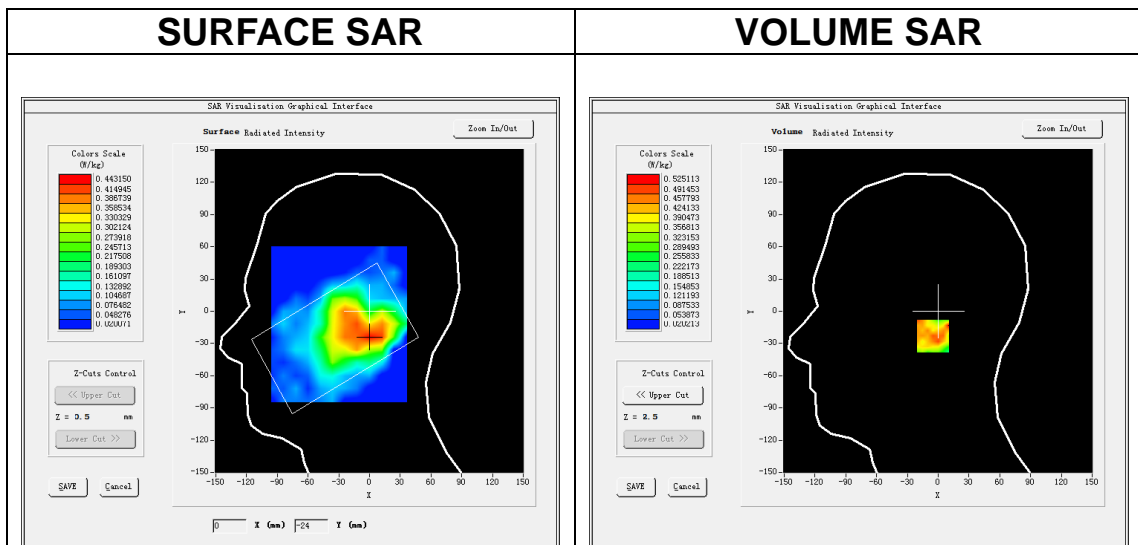

**Maximum location: X=1.00, Y=-23.00**  
**SAR Peak: 0.97 W/kg**

<b>SAR 10g (W/Kg)</b>	0.261029
<b>SAR 1g (W/Kg)</b>	0.438397

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>1.0589</b>	<b>0.5251</b>	<b>0.2237</b>	<b>0.1119</b>	<b>0.1186</b>	<b>0.0518</b>	<b>0.0480</b>

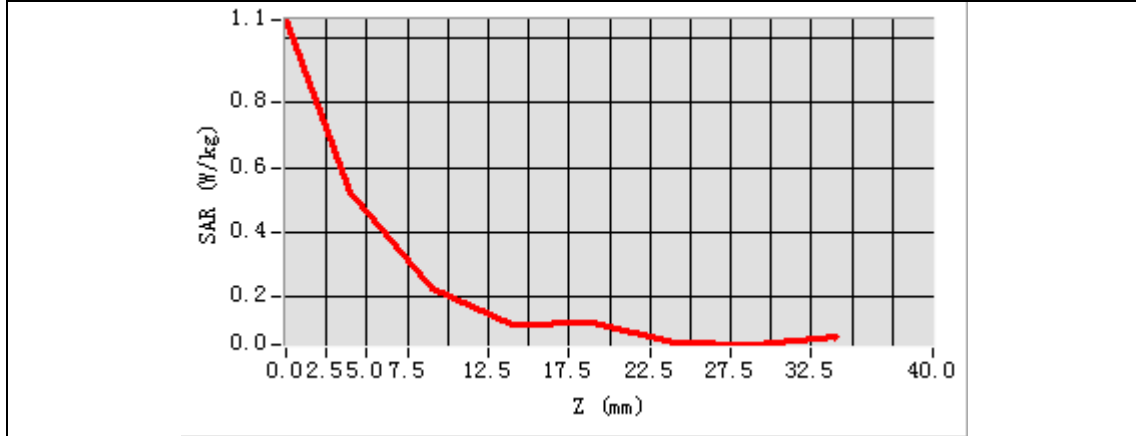

3D screen shot	Hot spot position



# MEASUREMENT 26


Date of measurement: 16/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 7</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.65</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2535.000000
<b>Relative permittivity (real part)</b>	39.157543
<b>Relative permittivity (imaginary part)</b>	13.515832
<b>Conductivity (S/m)</b>	1.903480
<b>Variation (%)</b>	1.620000

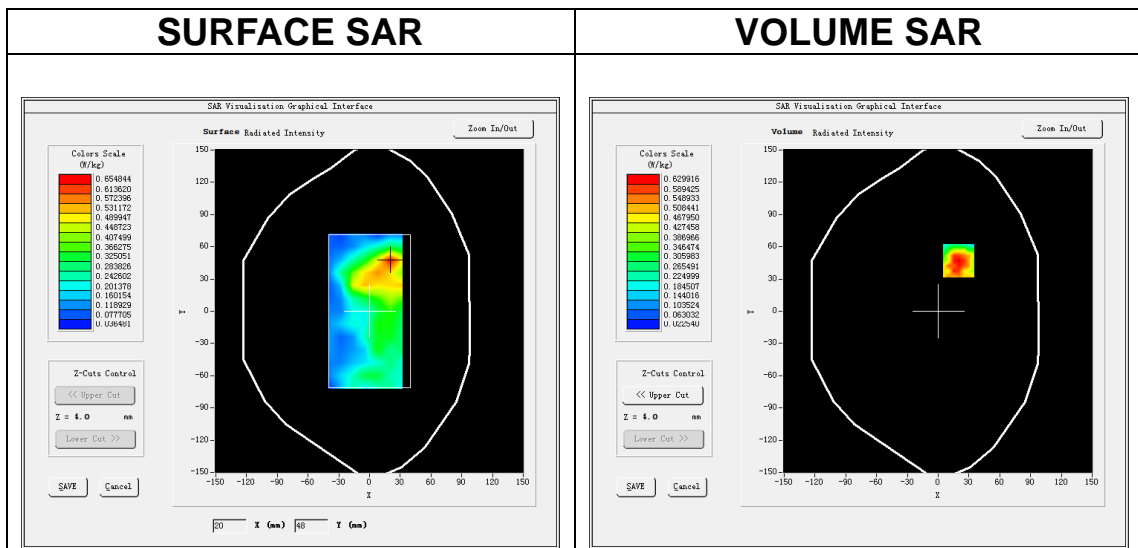

**Maximum location: X=20.00, Y=47.00**  
**SAR Peak: 1.13 W/kg**

<b>SAR 10g (W/Kg)</b>	0.329162
<b>SAR 1g (W/Kg)</b>	0.586458

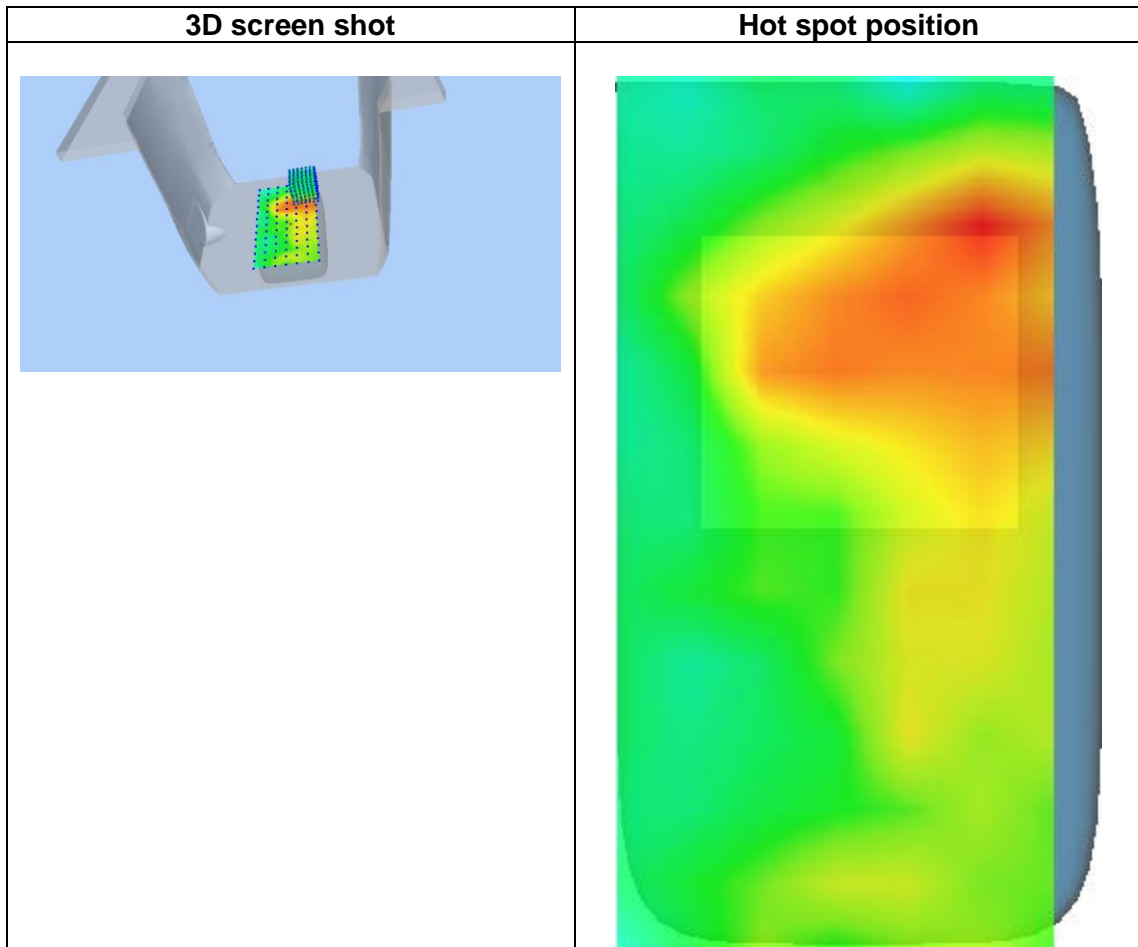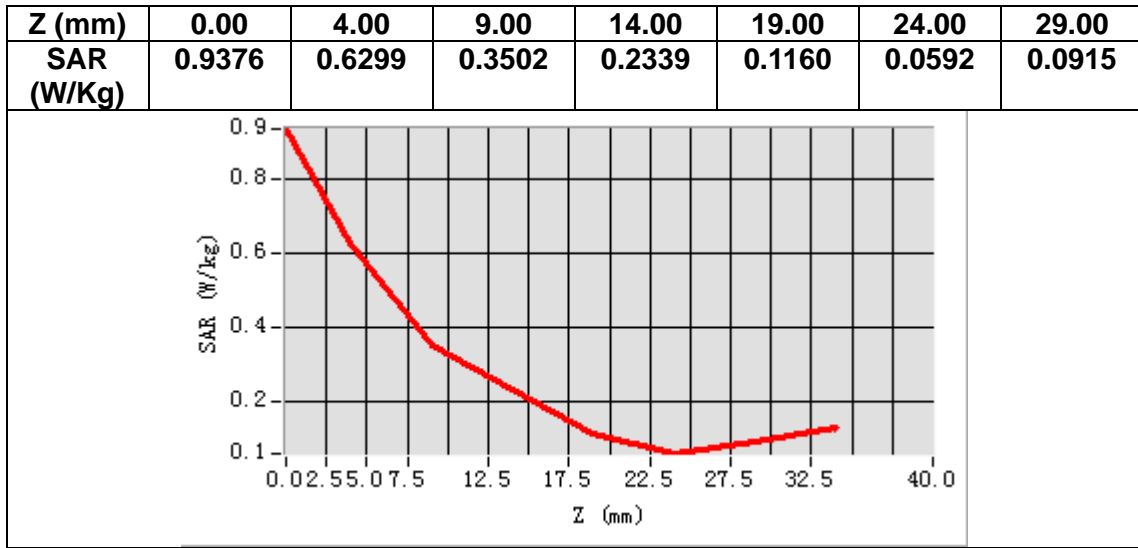

# MEASUREMENT 27


Date of measurement: 19/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 12</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.37</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	707.500000
<b>Relative permittivity (real part)</b>	41.615261
<b>Relative permittivity (imaginary part)</b>	22.004171
<b>Conductivity (S/m)</b>	0.864886
<b>Variation (%)</b>	0.270000

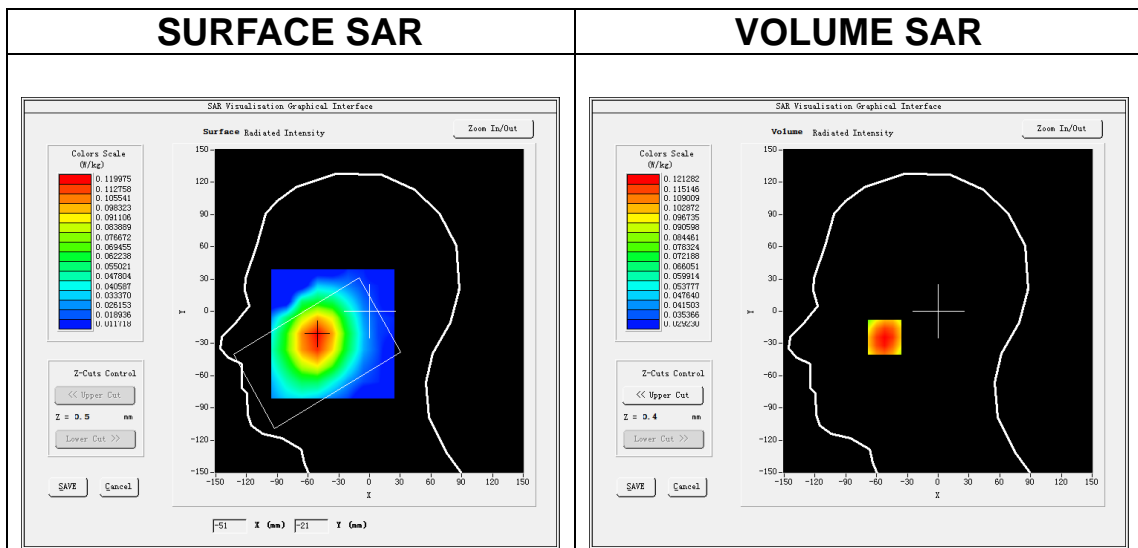

**Maximum location: X=-52.00, Y=-24.00**  
**SAR Peak: 0.13 W/kg**

<b>SAR 10g (W/Kg)</b>	0.096064
<b>SAR 1g (W/Kg)</b>	0.117949

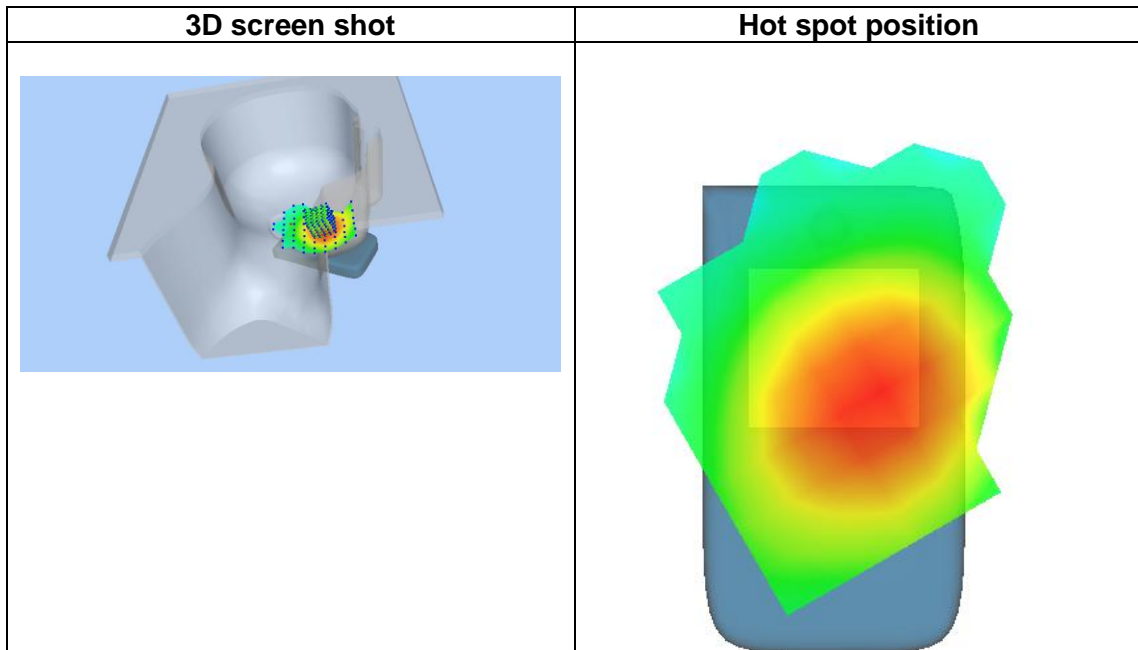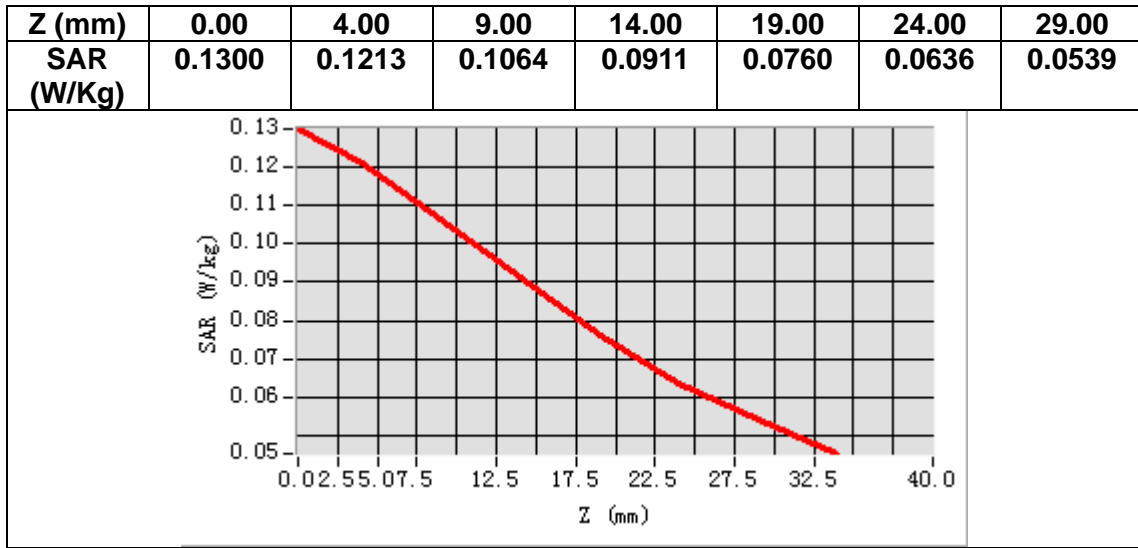

# MEASUREMENT 28


Date of measurement: 19/4/2024

## A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	707.500000
<b>Relative permittivity (real part)</b>	41.615261
<b>Relative permittivity (imaginary part)</b>	22.004171
<b>Conductivity (S/m)</b>	0.864886
<b>Variation (%)</b>	-0.750000

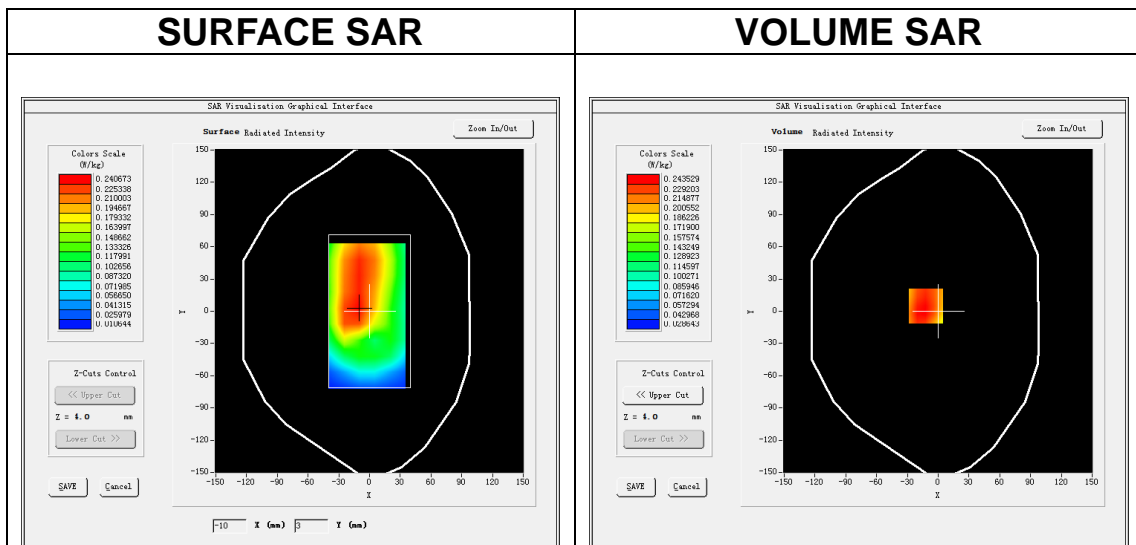

**Maximum location: X=-12.00, Y=5.00**  
**SAR Peak: 0.30 W/kg**

<b>SAR 10g (W/Kg)</b>	0.182856
<b>SAR 1g (W/Kg)</b>	0.238937

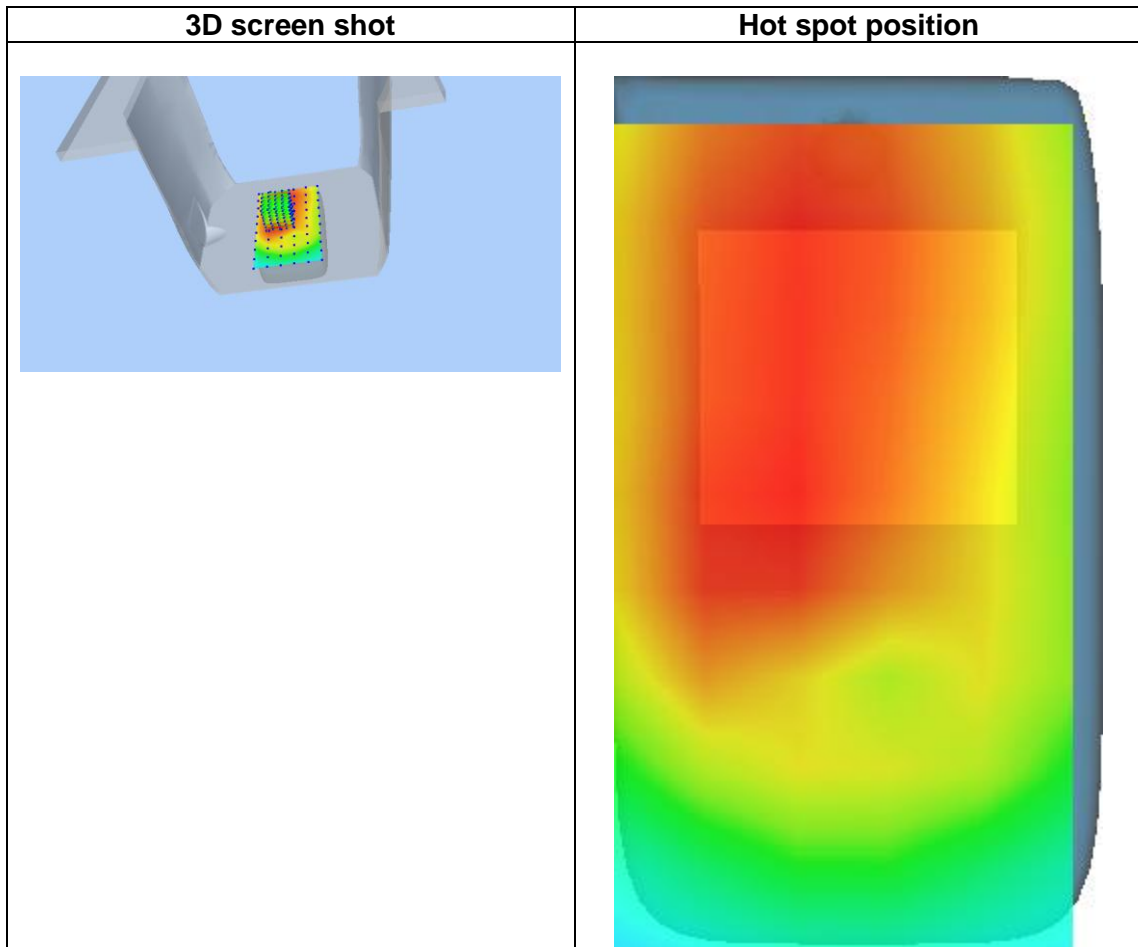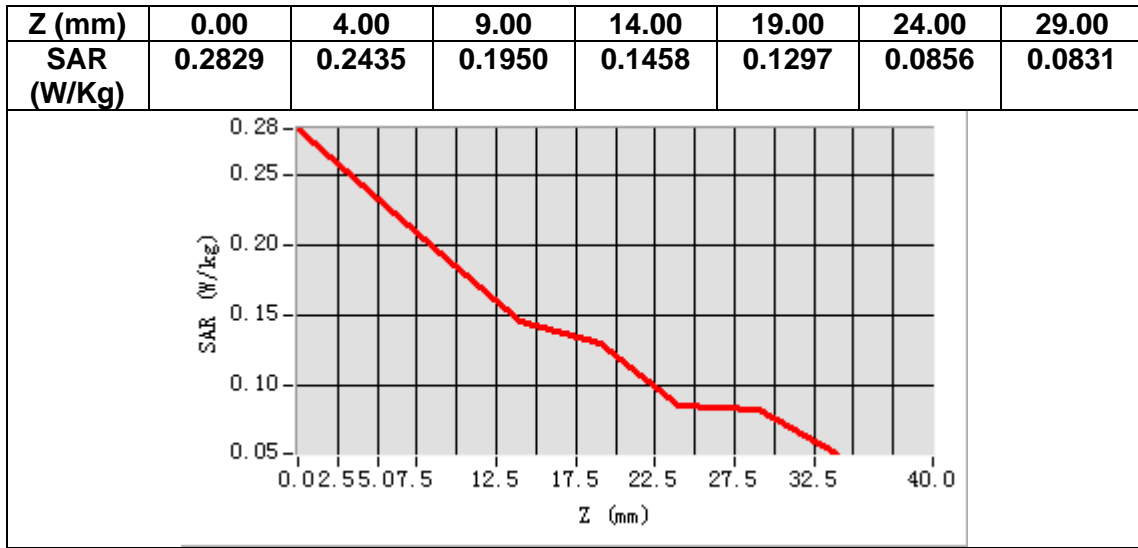

# MEASUREMENT 29


Date of measurement: 19/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 17</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.37</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	710.000000
<b>Relative permittivity (real part)</b>	41.599911
<b>Relative permittivity (imaginary part)</b>	21.944620
<b>Conductivity (S/m)</b>	0.865593
<b>Variation (%)</b>	0.410000

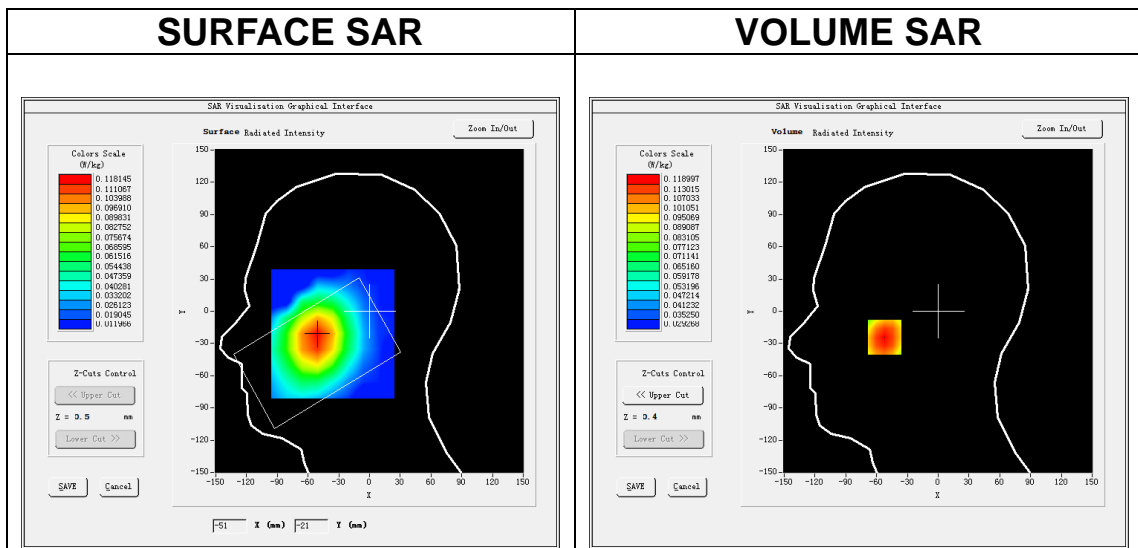

**Maximum location: X=-52.00, Y=-24.00**  
**SAR Peak: 0.13 W/kg**

<b>SAR 10g (W/Kg)</b>	0.094443
<b>SAR 1g (W/Kg)</b>	0.116296

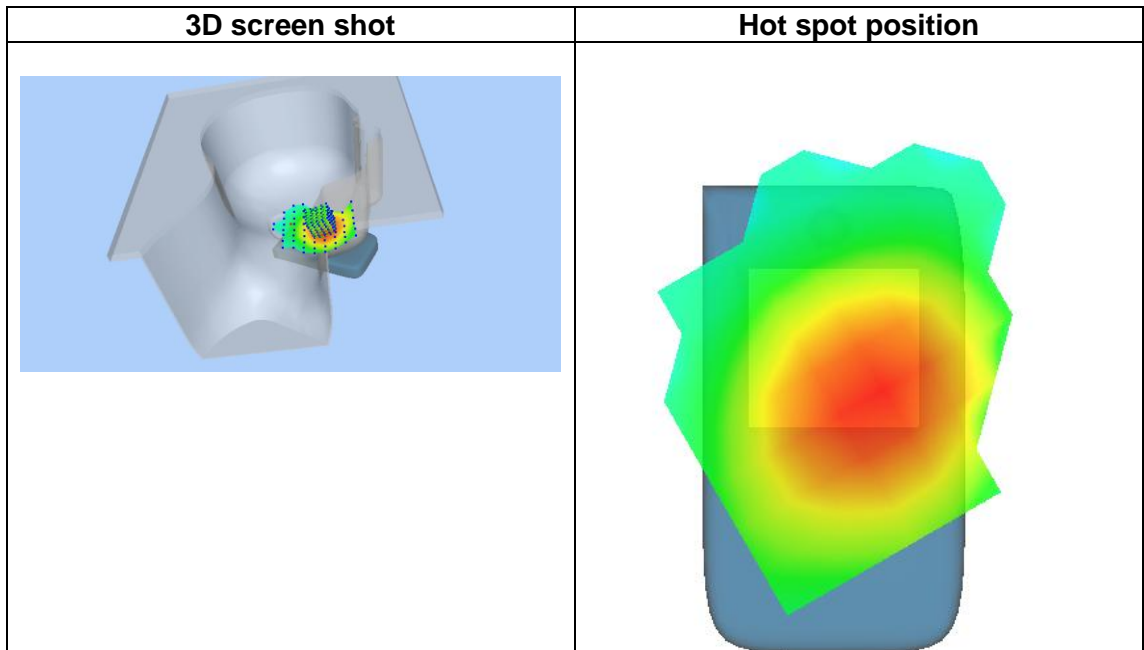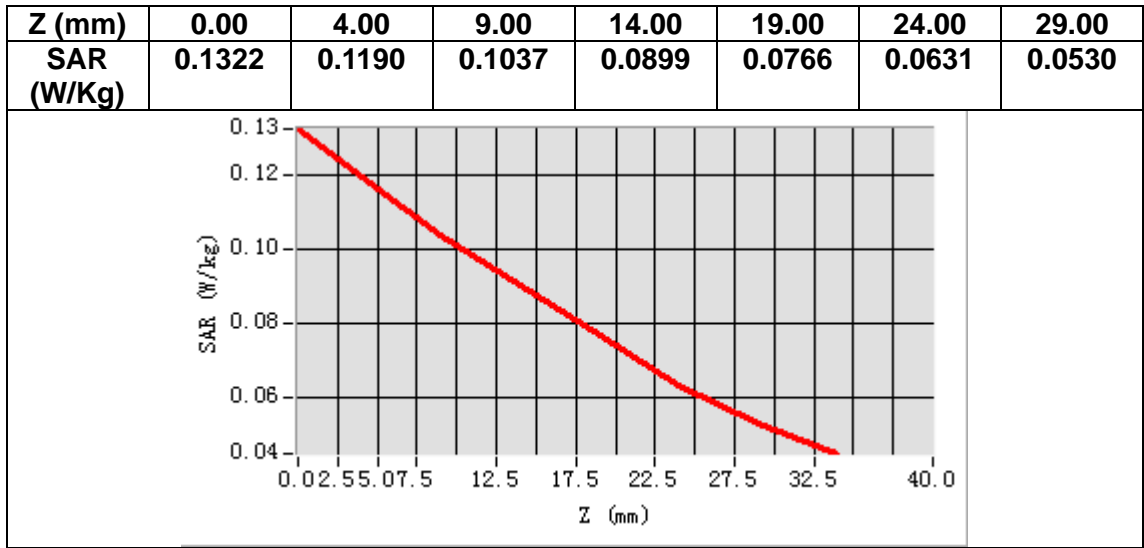



# MEASUREMENT 30


Date of measurement: 19/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 17</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.37</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	710.000000
<b>Relative permittivity (real part)</b>	41.599911
<b>Relative permittivity (imaginary part)</b>	21.944620
<b>Conductivity (S/m)</b>	0.865593
<b>Variation (%)</b>	-0.870000

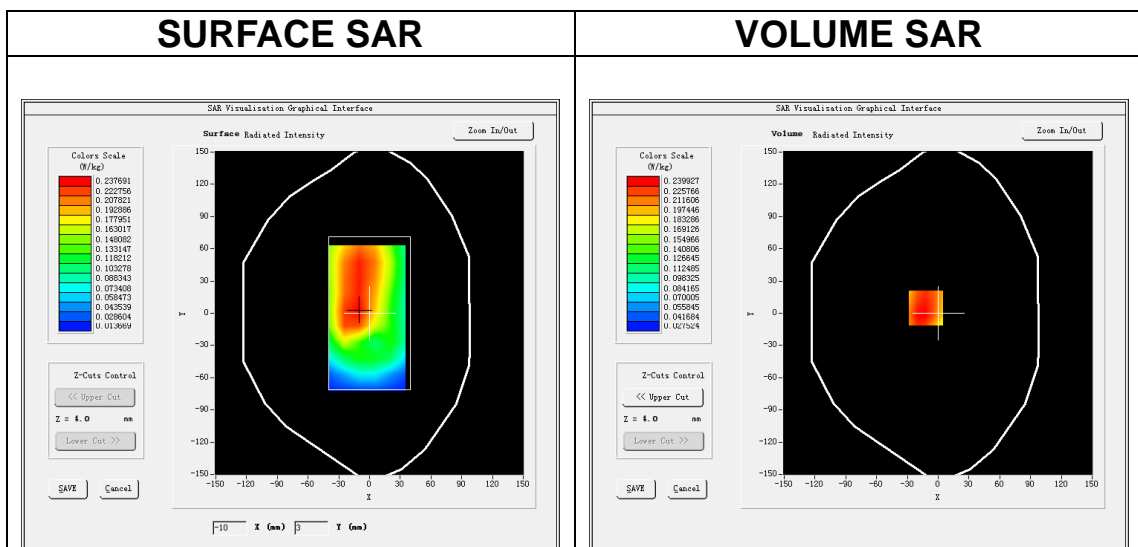

**Maximum location: X=-12.00, Y=5.00**  
**SAR Peak: 0.29 W/kg**

<b>SAR 10g (W/Kg)</b>	0.179453
<b>SAR 1g (W/Kg)</b>	0.235011

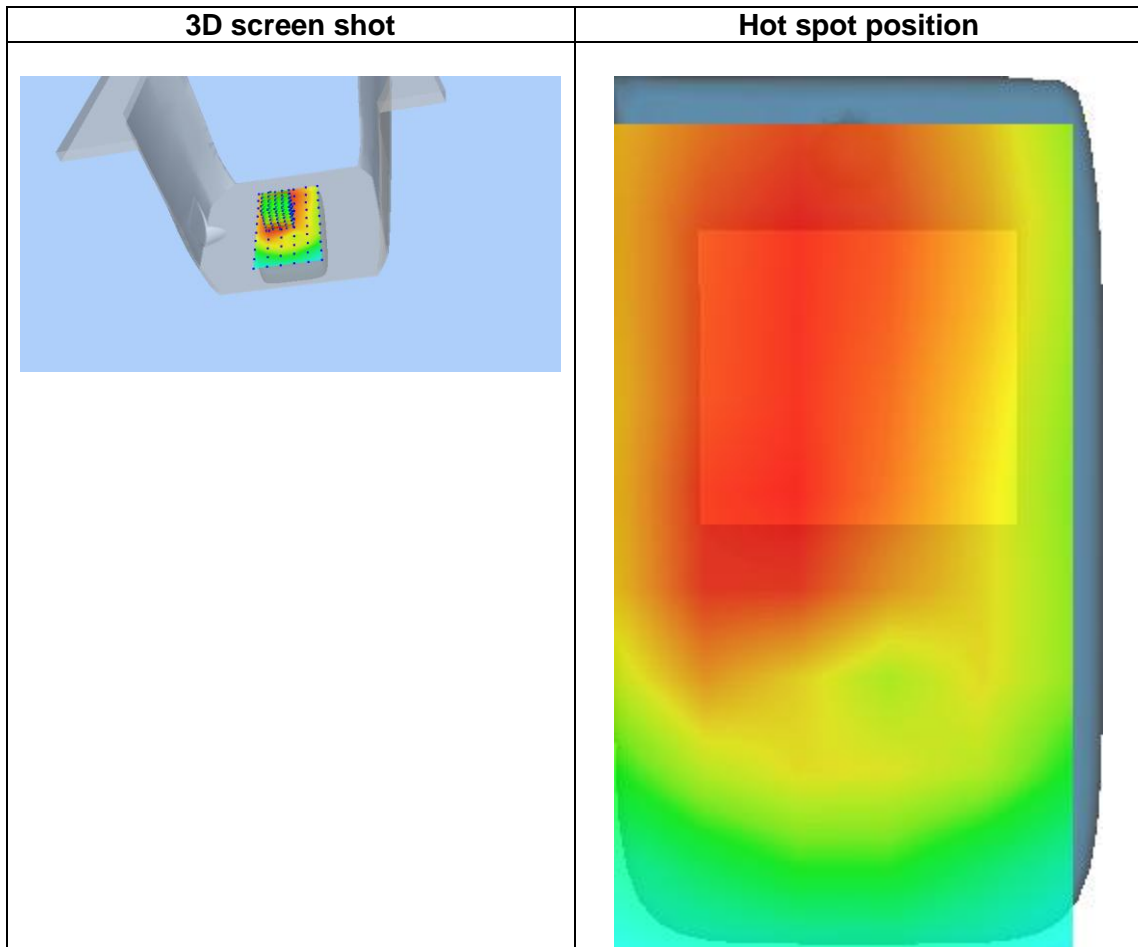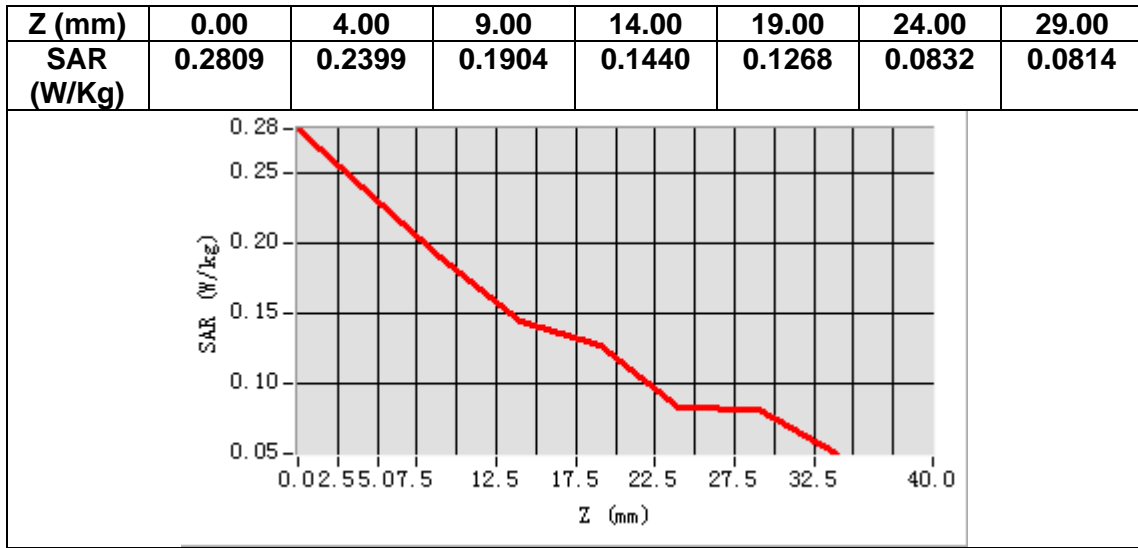

# MEASUREMENT 31


Date of measurement: 16/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 38</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.65</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	2595.000000
<b>Relative permittivity (real part)</b>	38.789642
<b>Relative permittivity (imaginary part)</b>	13.729632
<b>Conductivity (S/m)</b>	1.979355
<b>Variation (%)</b>	2.010000

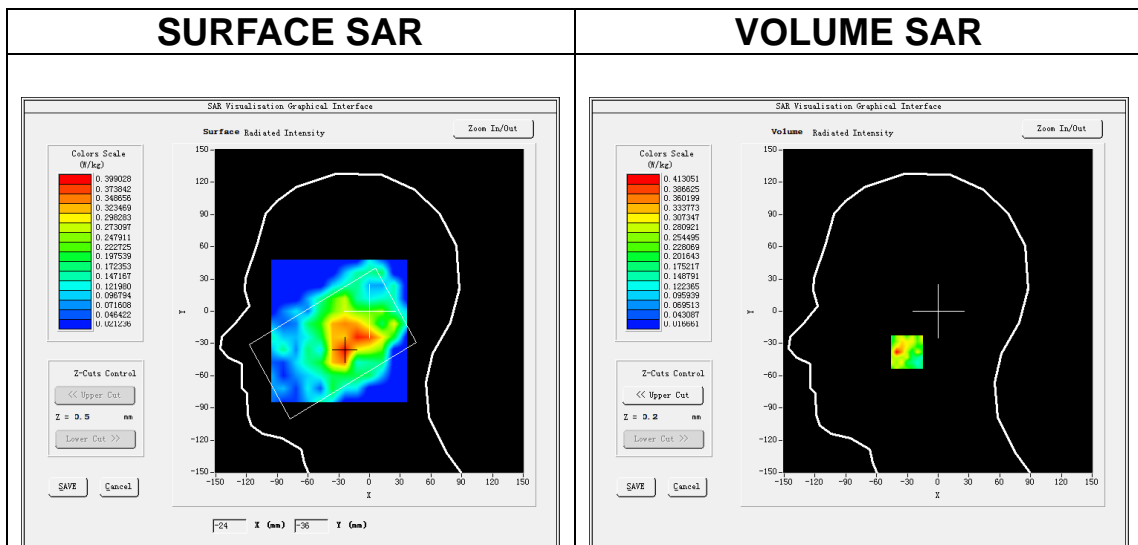

**Maximum location: X=-25.00, Y=-38.00**  
**SAR Peak: 0.83 W/kg**

<b>SAR 10g (W/Kg)</b>	0.199384
<b>SAR 1g (W/Kg)</b>	0.346787

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.7538</b>	<b>0.4131</b>	<b>0.1950</b>	<b>0.1631</b>	<b>0.0618</b>	<b>0.1151</b>	<b>0.0561</b>

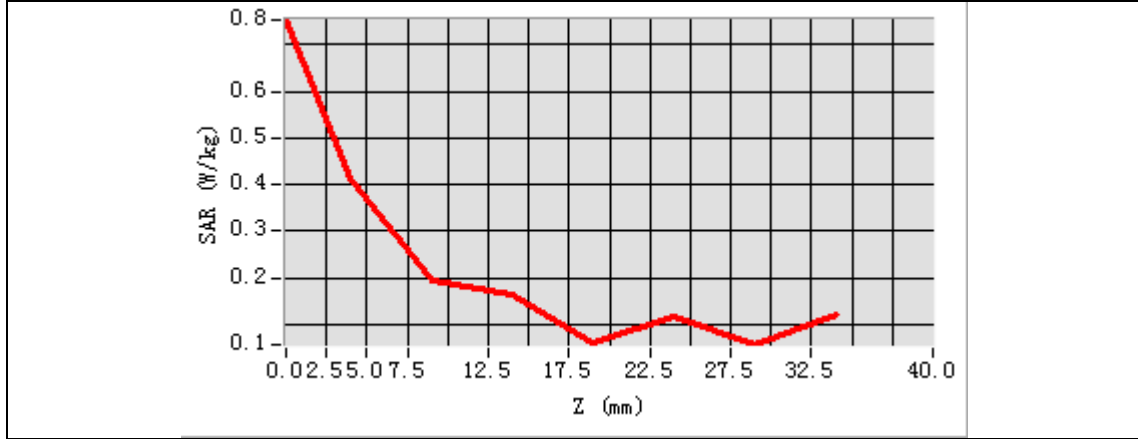

3D screen shot	Hot spot position

# MEASUREMENT 32


Date of measurement: 16/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 38</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.65</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	2595.000000
<b>Relative permittivity (real part)</b>	38.789642
<b>Relative permittivity (imaginary part)</b>	13.729632
<b>Conductivity (S/m)</b>	1.979355
<b>Variation (%)</b>	4.830000


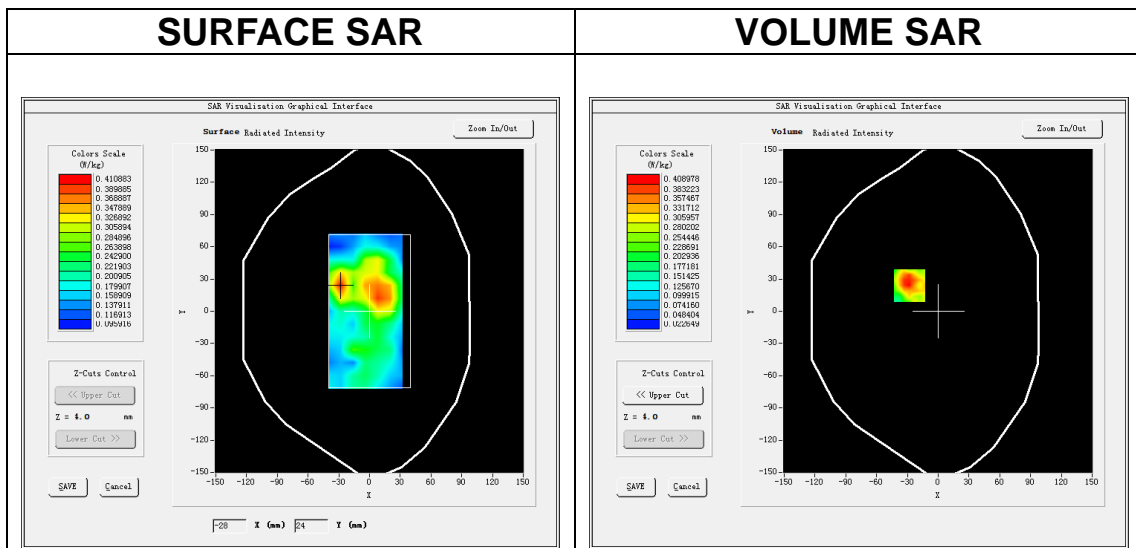


**Maximum location: X=-28.00, Y=24.00**  
**SAR Peak: 0.68 W/kg**

<b>SAR 10g (W/Kg)</b>	0.249154
<b>SAR 1g (W/Kg)</b>	0.399755

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.6841</b>	<b>0.4090</b>	<b>0.2828</b>	<b>0.1675</b>	<b>0.1763</b>	<b>0.1204</b>	<b>0.0587</b>

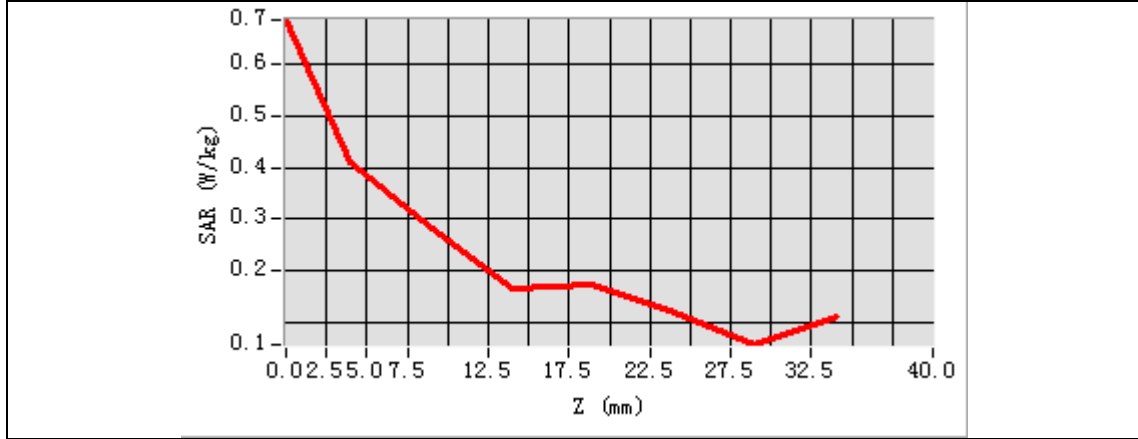

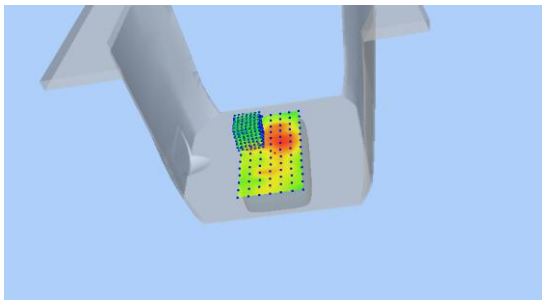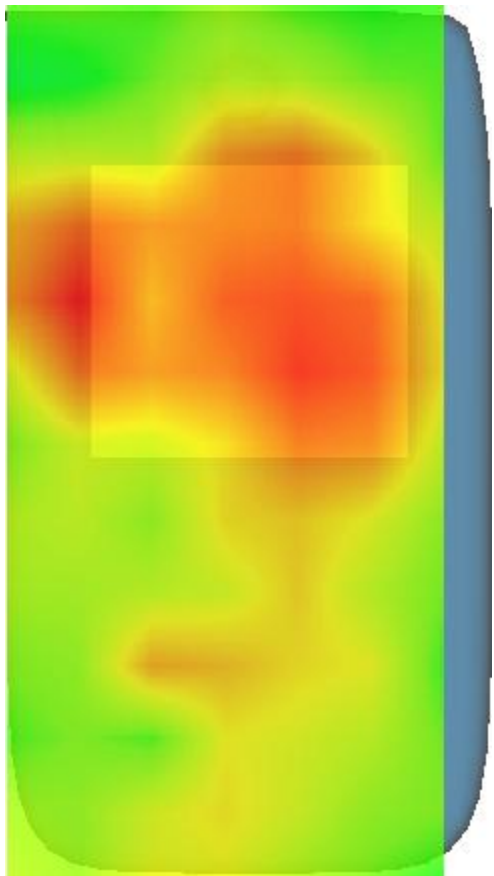3D screen shot	Hot spot position
	

# MEASUREMENT 33


Date of measurement: 16/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 41</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.65</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2593.000000
<b>Relative permittivity (real part)</b>	38.876041
<b>Relative permittivity (imaginary part)</b>	13.679432
<b>Conductivity (S/m)</b>	1.970598
<b>Variation (%)</b>	2.380000

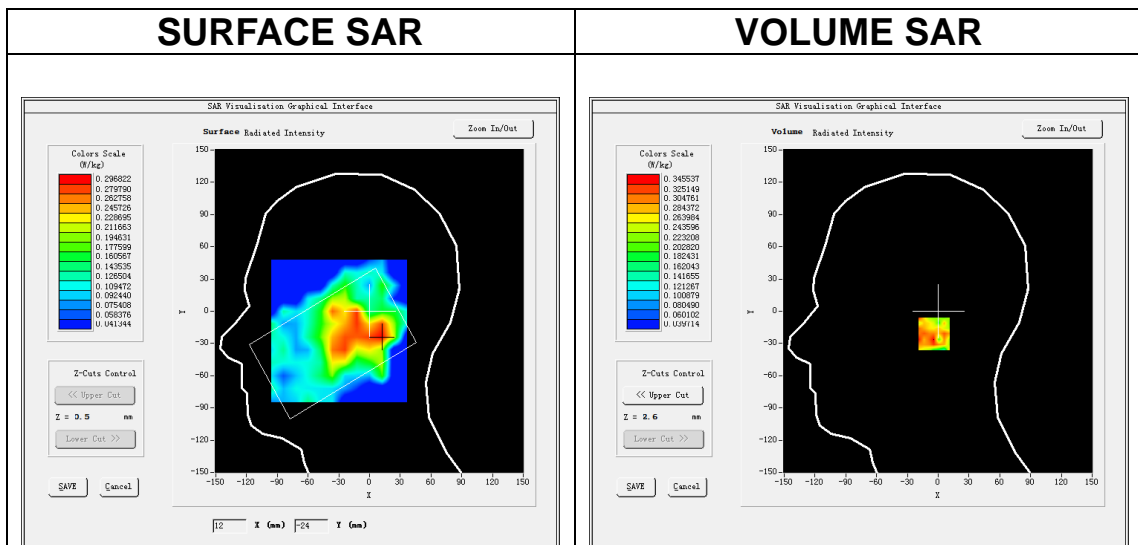

**Maximum location: X=2.00, Y=-21.00**  
**SAR Peak: 0.66 W/kg**

<b>SAR 10g (W/Kg)</b>	0.207536
<b>SAR 1g (W/Kg)</b>	0.321939

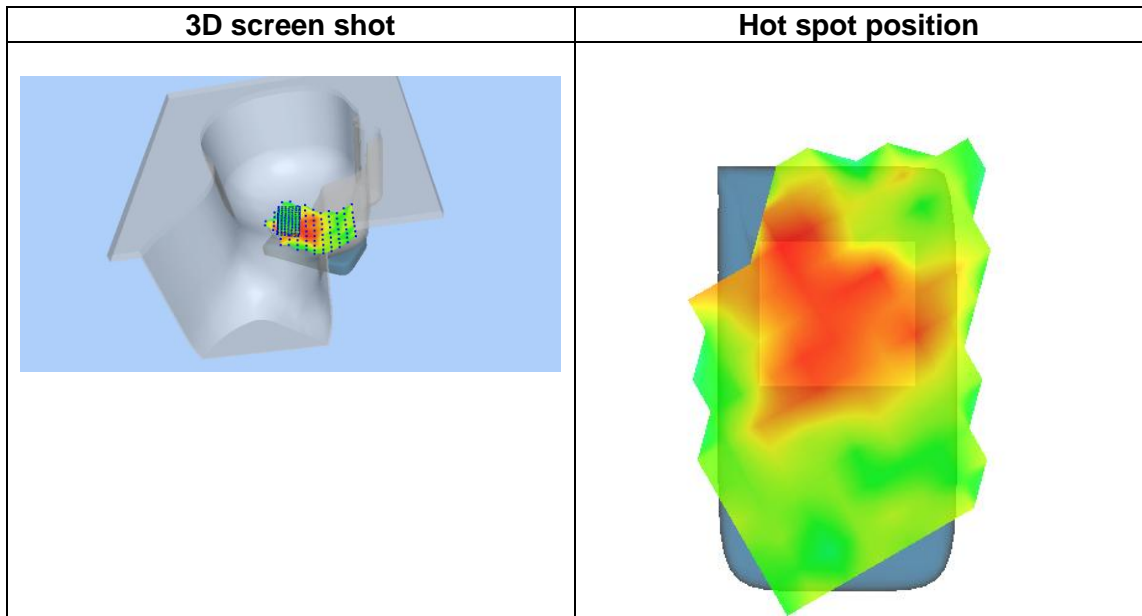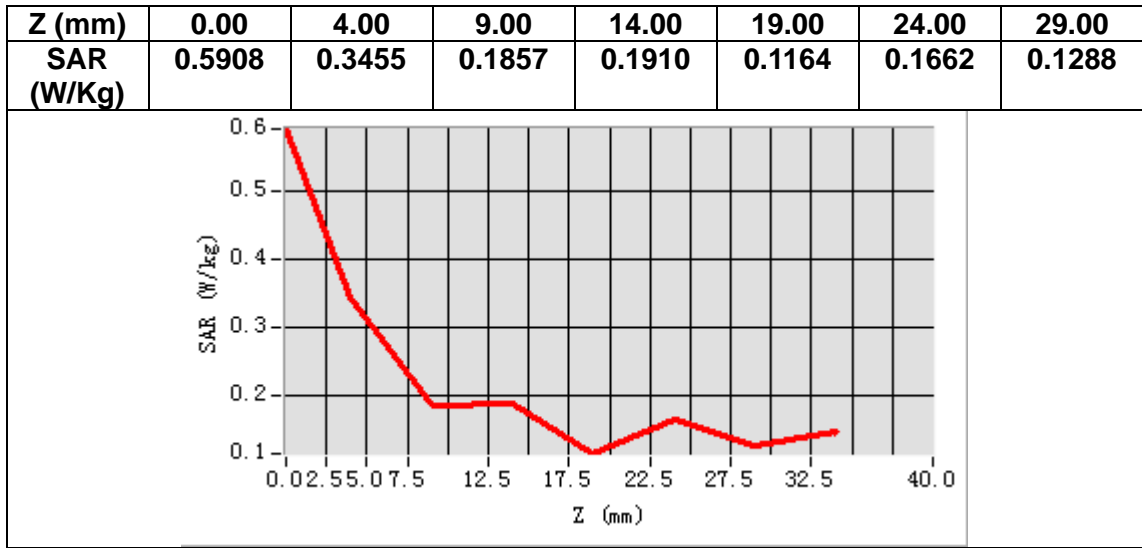



# MEASUREMENT 34


Date of measurement: 16/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 41</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.65</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	2593.000000
<b>Relative permittivity (real part)</b>	38.876041
<b>Relative permittivity (imaginary part)</b>	13.679432
<b>Conductivity (S/m)</b>	1.970598
<b>Variation (%)</b>	-1.300000


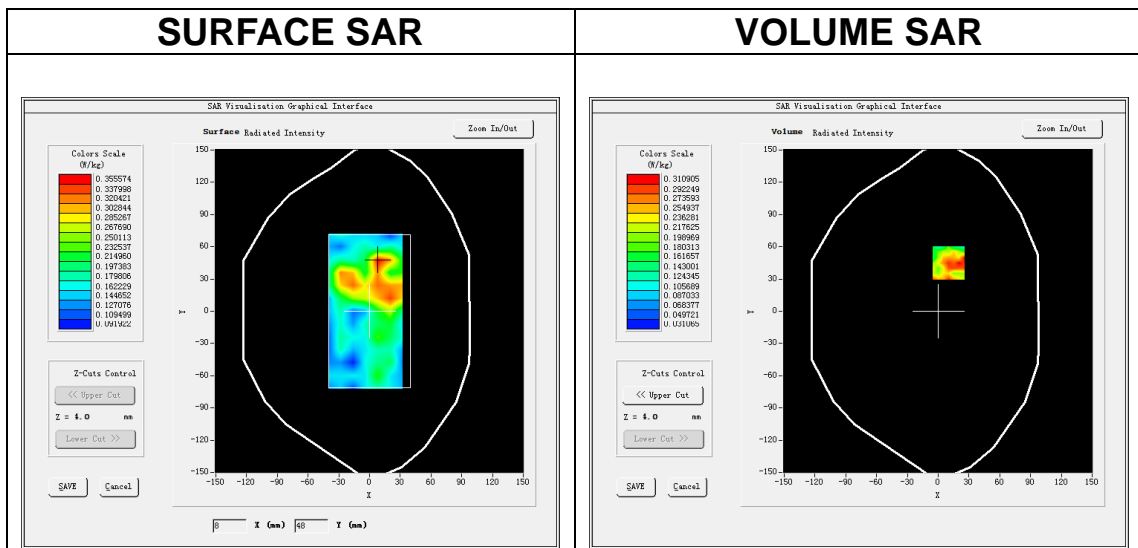


**Maximum location: X=10.00, Y=45.00**  
**SAR Peak: 0.54 W/kg**

<b>SAR 10g (W/Kg)</b>	0.193821
<b>SAR 1g (W/Kg)</b>	0.292085

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.6569</b>	<b>0.3109</b>	<b>0.1313</b>	<b>0.1494</b>	<b>0.1143</b>	<b>0.1579</b>	<b>0.0934</b>

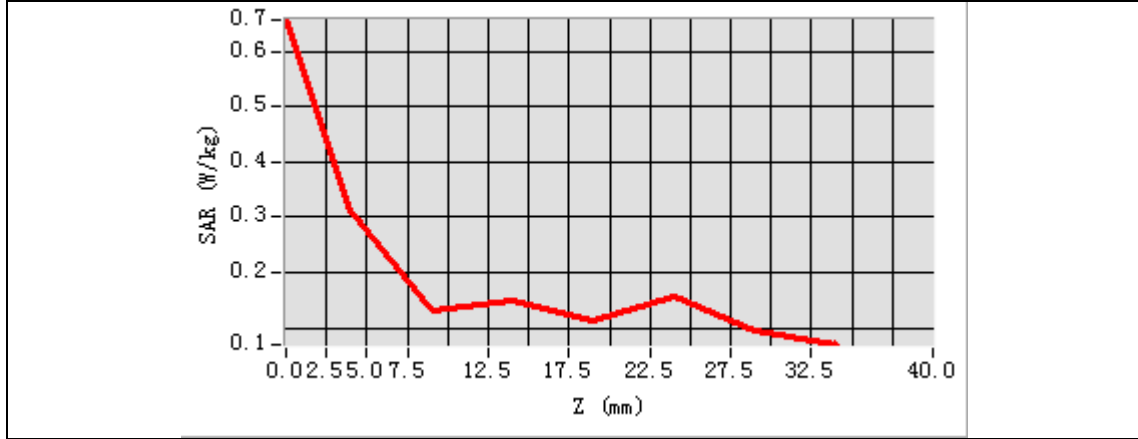

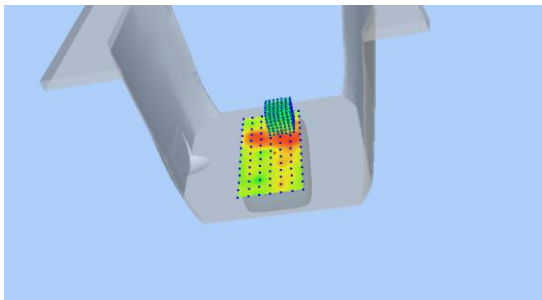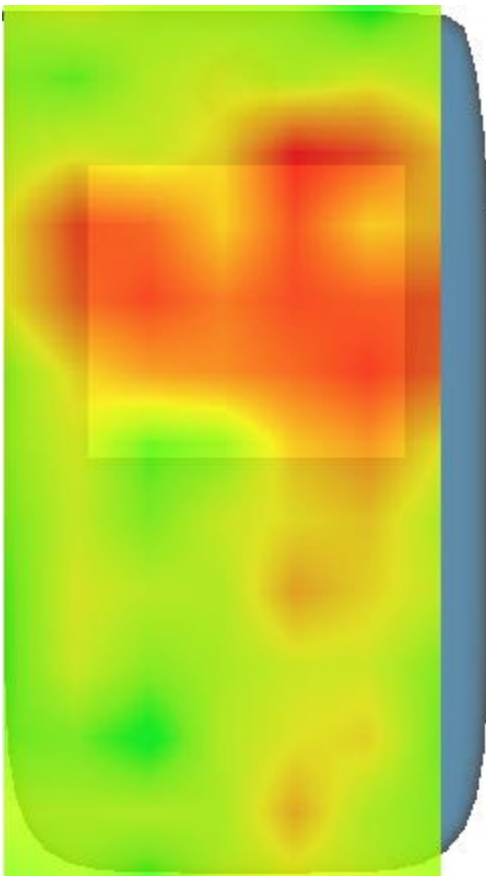3D screen shot	Hot spot position
	

# MEASUREMENT 35


Date of measurement: 7/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>SA_n78</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>(Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.20</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	3499.990000
<b>Relative permittivity (real part)</b>	37.884593
<b>Relative permittivity (imaginary part)</b>	14.443988
<b>Conductivity (S/m)</b>	2.808545
<b>Variation (%)</b>	-2.050000

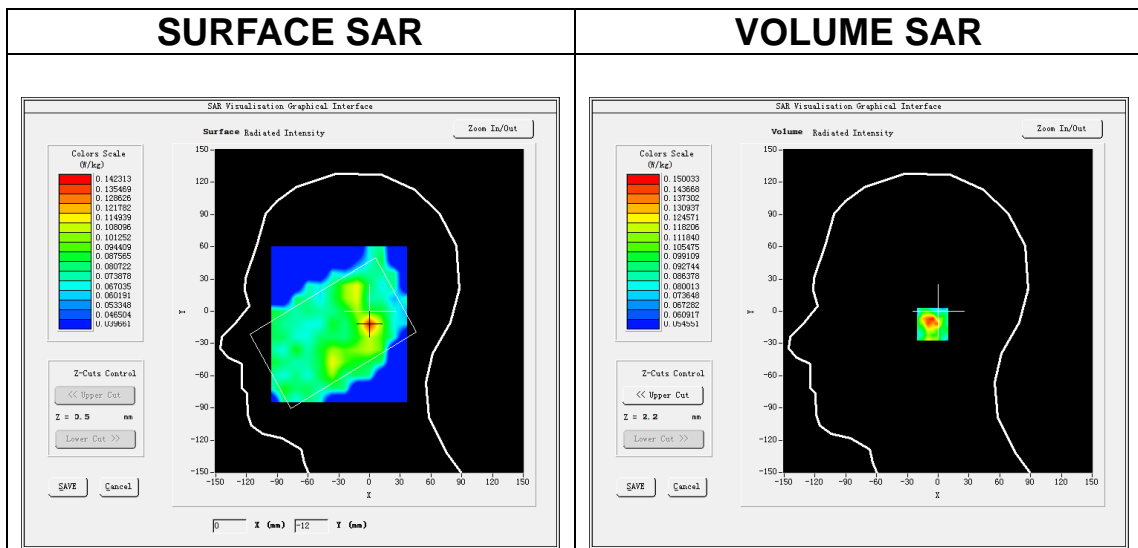

**Maximum location: X=0.00, Y=-12.00**  
**SAR Peak: 0.26 W/kg**

<b>SAR 10g (W/Kg)</b>	0.092860
<b>SAR 1g (W/Kg)</b>	0.135174

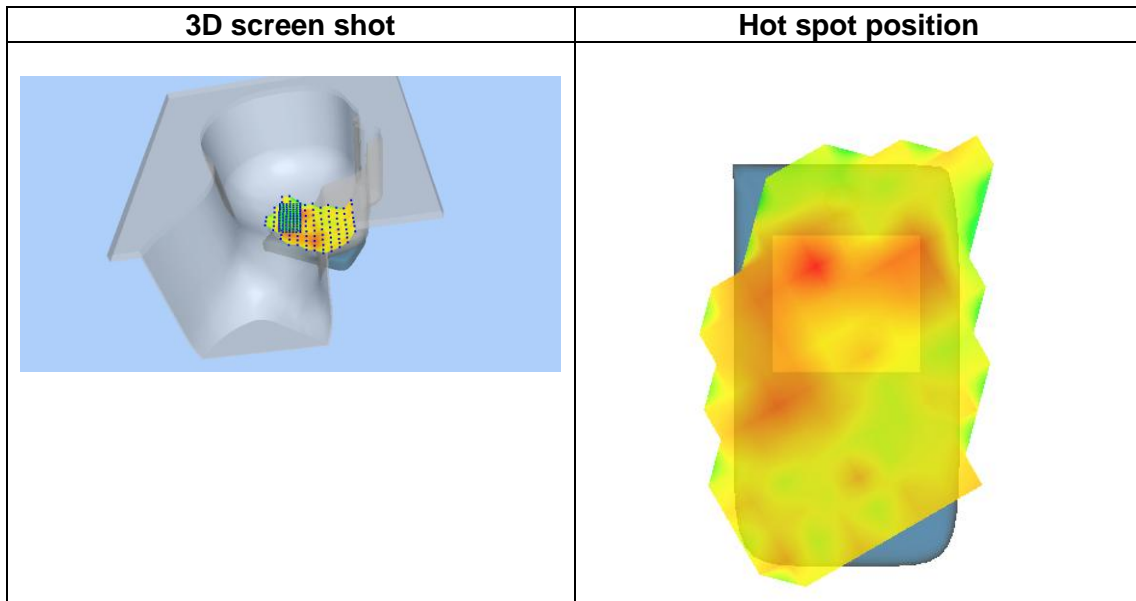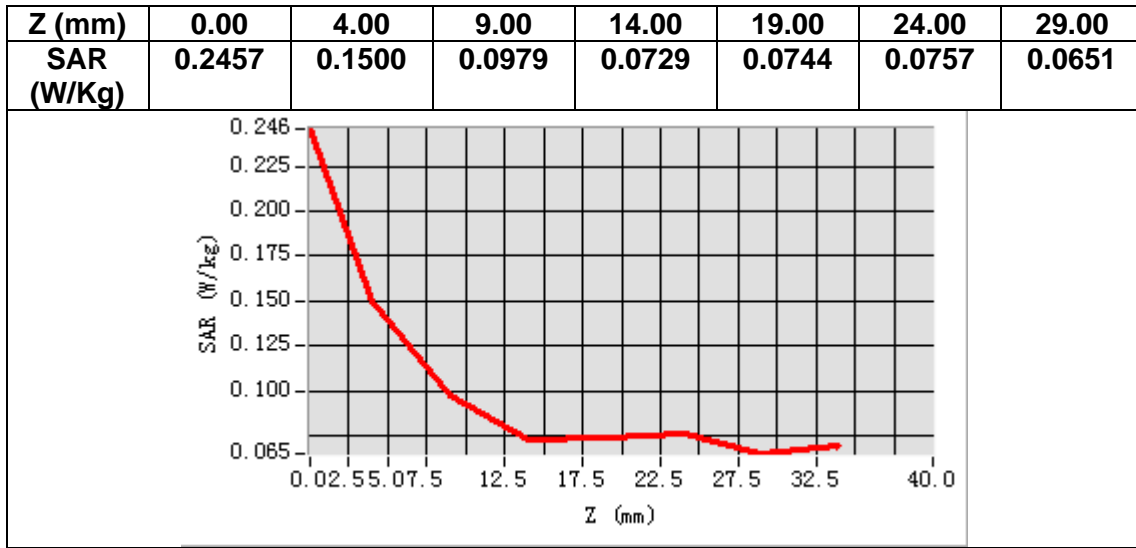

# MEASUREMENT 36


Date of measurement: 7/4/2024

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>SA_n78</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>(Crest factor: 1.0)</u>
<b>ConvF</b>	<u>2.20</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	3499.990000
<b>Relative permittivity (real part)</b>	37.884593
<b>Relative permittivity (imaginary part)</b>	14.443988
<b>Conductivity (S/m)</b>	2.808545
<b>Variation (%)</b>	2.349998

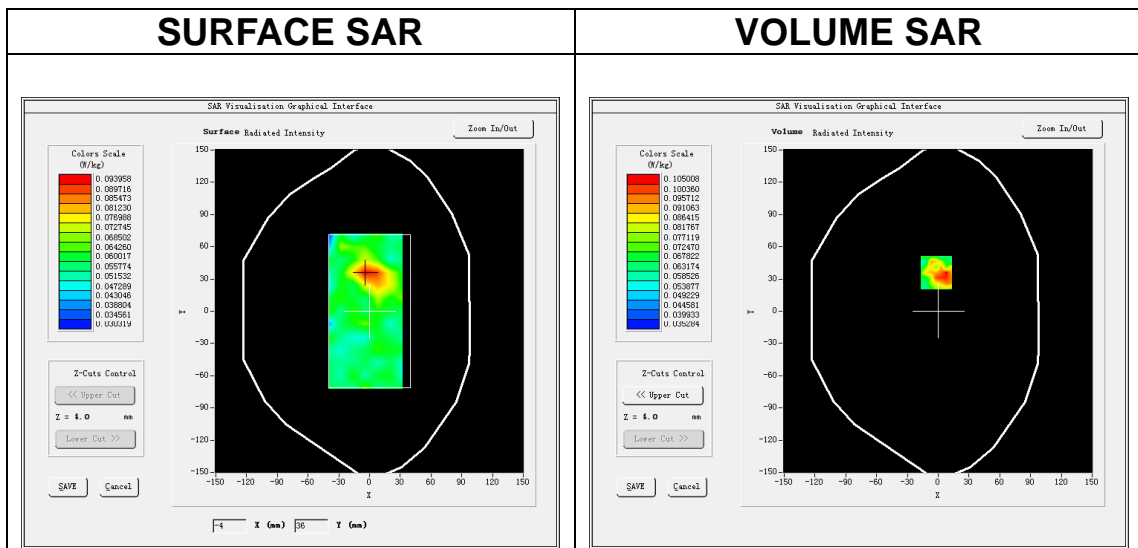

**Maximum location: X=-2.00, Y=36.00**  
**SAR Peak: 0.19 W/kg**

<b>SAR 10g (W/Kg)</b>	0.071475
<b>SAR 1g (W/Kg)</b>	0.100619

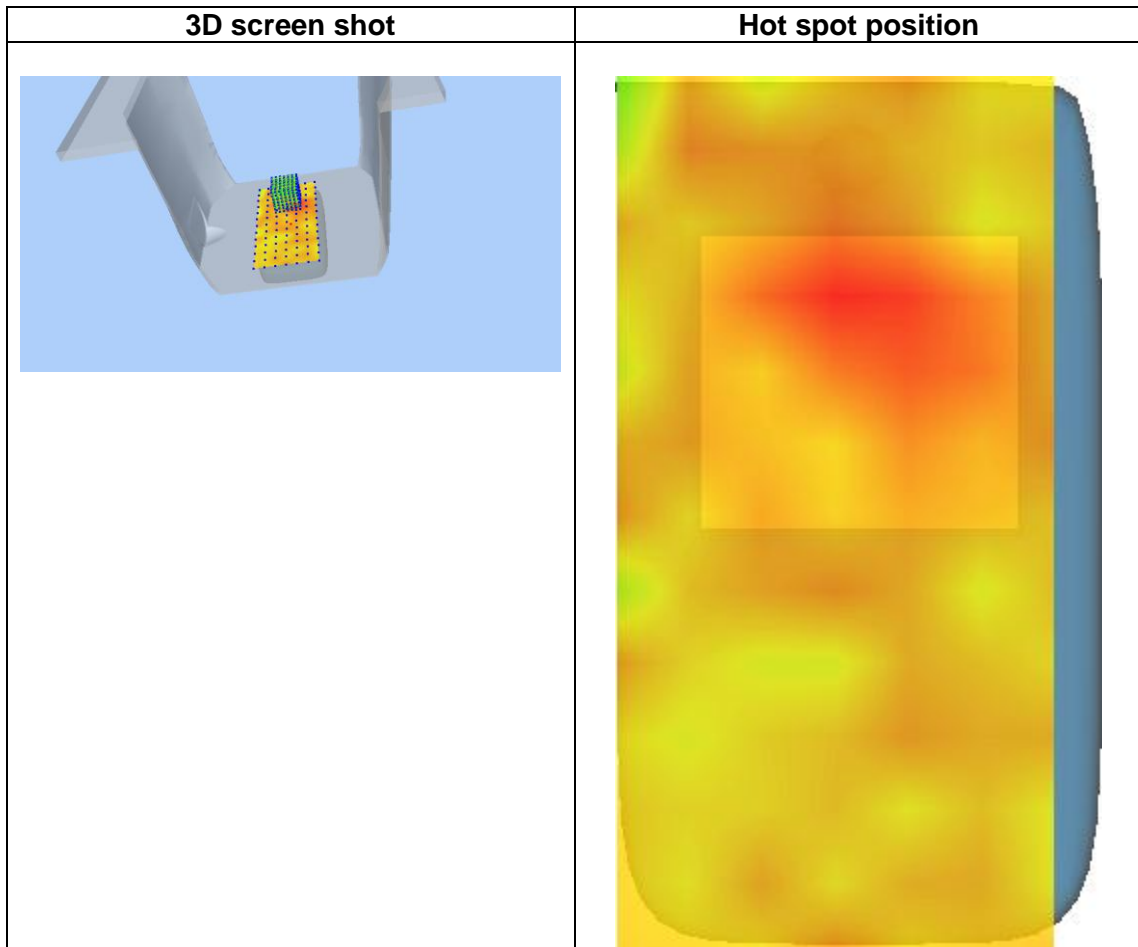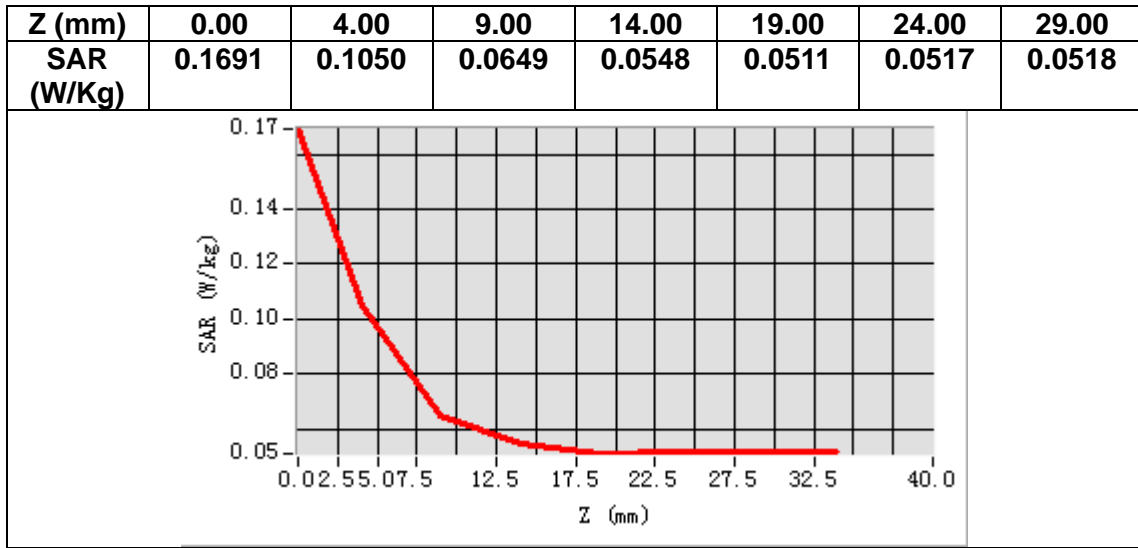

## 14. Appendix D. Calibration Certificate

<b>Table of contents</b>
E Field Probe - 3423-EPGO-426
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
3500 MHz Dipole - SN 09/12 DIP 3G500-360
5000-6000 MHz Dipole - SN 13/14 WGA 33



## COMOSAR E-Field Probe Calibration Report

Ref : ACR.261.11.23.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY  
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI  
COMMUNITY, XIXIANG STREET,  
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA  
MVG COMOSAR DOSIMETRIC E-FIELD PROBE  
SERIAL NO.: 3423-EPGO-426**

**Calibrated at MVG**

**Z.I. de la pointe du diable**

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon  
29280 PLOUZANE - FRANCE**

**Calibration date: 09/18/2023**



Accreditations #2-6789  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)

**The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.**

### *Summary:*




This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by:</i>	Cyrille ONNEE	Measurement Responsible	9/18/2023	
<i>Checked &amp; approved by:</i>	Jérôme Luc	Technical Manager	9/18/2023	
<i>Authorized by:</i>	Yann Toutain	Laboratory Director	9/19/2023	

Yann  
Toutain ID  Signature numérique de Yann Toutain ID  
Date: 2023.09.19 09:08:14 +02'00'

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

<i>Issue</i>	<i>Name</i>	<i>Date</i>	<i>Modifications</i>
A	Cyrille ONNEE	9/18/2023	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

TABLE OF CONTENTS

1 Device Under Test ..... 4

2 Product Description ..... 4

    2.1 General Information ..... 4

3 Measurement Method ..... 4

    3.1 Sensitivity ..... 4

    3.2 Linearity ..... 5

    3.3 Isotropy ..... 5

    3.4 Boundary Effect ..... 5

4 Measurement Uncertainty ..... 6

5 Calibration Results ..... 6

    5.1 Calibration in air ..... 6

    5.2 Calibration in liquid ..... 7

6 Verification Results ..... 8

7 List of Equipment ..... 9



**COMOSAR E-FIELD PROBE CALIBRATION REPORT**

Ref: ACR.261.11.23.BES.A

**1 DEVICE UNDER TEST**

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	3423-EPGO-426
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-7.5GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.261 MΩ Dipole 2: R2=0.213 MΩ Dipole 3: R3=0.233 MΩ

**2 PRODUCT DESCRIPTION**

**2.1 GENERAL INFORMATION**

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



**Figure 1 – MVG COMOSAR Dosimetric E field Probe**

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

**3 MEASUREMENT METHOD**

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

**3.1 SENSITIVITY**

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and  $d_{be} + d_{step}$  along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})}{\delta/2} \text{ for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

- $SAR_{uncertainty}$  is the uncertainty in percent of the probe boundary effect
- $d_{be}$  is the distance between the surface and the closest *zoom-scan* measurement point, in millimetre
- $\Delta_{step}$  is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
- $\delta$  is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e.,  $\delta \approx 14$  mm at 3 GHz;
- $\Delta SAR_{be}$  in percent of SAR is the deviation between the measured SAR value, at the distance  $d_{be}$  from the boundary, and the analytical SAR value.

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

5 CALIBRATION RESULTS

Ambient condition	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

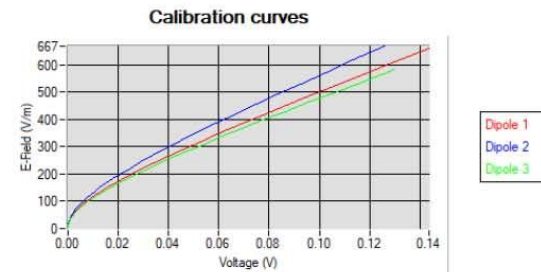

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

where

Vi=voltage readings on the 3 channels of the probe

DCPi=diode compression point given below for the 3 channels of the probe

Normi=dipole sensitivity given below for the 3 channels of the probe



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

Normx dipole 1 (μV/(V/m) <sup>2</sup> )	Normy dipole 2 (μV/(V/m) <sup>2</sup> )	Normz dipole 3 (μV/(V/m) <sup>2</sup> )
0.78	0.62	0.85

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
105	108	107

5.2 CALIBRATION IN LIQUID

The calorimeter cell or the waveguide is used to determine the calibration in liquid using the formula below.

$$ConvF = \frac{E_{liquid}^2}{E_{air}^2}$$

The E-field in the liquid is determined from the SAR measurement according to the below formula.

$$E_{liquid}^2 = \frac{\rho SAR}{\sigma}$$

where

σ=the conductivity of the liquid

ρ=the volumetric density of the liquid

SAR=the SAR measured from the formula that depends on the setup used. The SAR formulas are given below

For the calorimeter cell (150-450 MHz), the formula is:

$$SAR = c \frac{dT}{dt}$$

where

c=the specific heat for the liquid

dT/dt=the temperature rises over the time

For the waveguide setup (600-75000 MHz), the formula is:

$$SAR = \frac{4P_w}{ab\delta} e^{-\frac{2z}{\delta}}$$

where

a=the larger cross-sectional of the waveguide

b=the smaller cross-sectional of the waveguide

δ=the skin depth for the liquid in the waveguide

Pw=the power delivered to the liquid





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

The below table summarize the ConvF for the calibrated liquid. The curves give examples for the measured SAR depending on the voltage in some liquid.


Liquid	Frequency (MHz*)	ConvF
HL750	750	2.37
HL850	835	2.32
HL900	900	2.23
HL1800	1800	2.45
HL1900	1900	2.63
HL2000	2000	2.83
HL2300	2300	2.81
HL2450	2450	2.85
HL2600	2600	2.65
HL3300	3300	2.21
HL3500	3500	2.20
HL3700	3700	2.11
HL3900	3900	2.40
HL4200	4200	2.40
HL4600	4600	2.33
HL4900	4900	2.37
HL5200	5200	2.07
HL5400	5400	2.11
HL5600	5600	2.20
HL5800	5800	2.04

(\*) Frequency validity is +/-50MHz below 600MHz, +/-100MHz from 600MHz to 6GHz and +/-700MHz above 6GHz

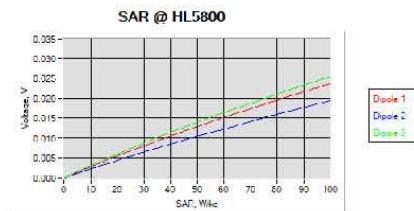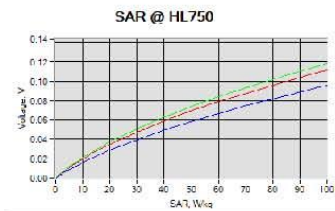


6 VERIFICATION RESULTS

The figures below represent the measured linearity and axial isotropy for this probe. The probe specification is +/-0.2 dB for linearity and +/-0.15 dB for axial isotropy.

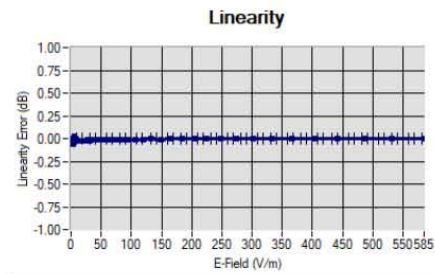

Linearity: +/- 1.42% (+/- 0.06dB)

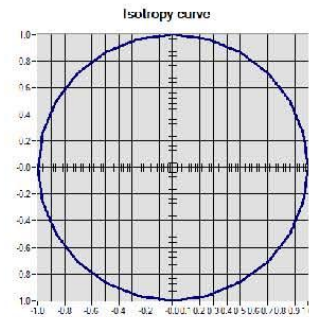

Isotropy: +/- 0.21% (+/- 0.01dB)