



Page 165 of 822



	Suspe	ected List							_			
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
	1	5150.00 00	34.65	15.08	-40.54	35.26	44.45	54.00	9.55	Pass	Horizontal	Average
C	2	5180.25 03	34.68	15.38	-40.55	80.83	90.34	54.00	-36.34	Pass	Horizontal	Average

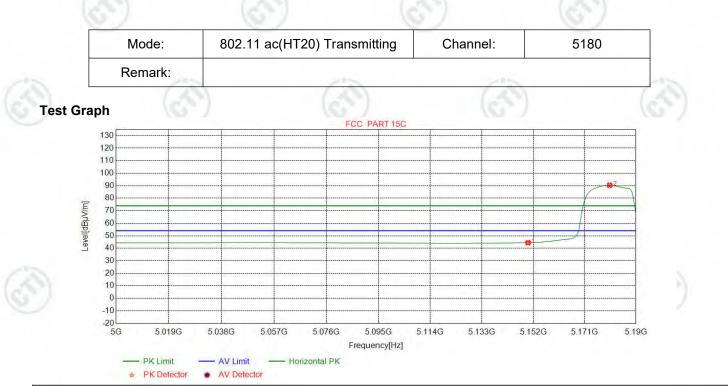

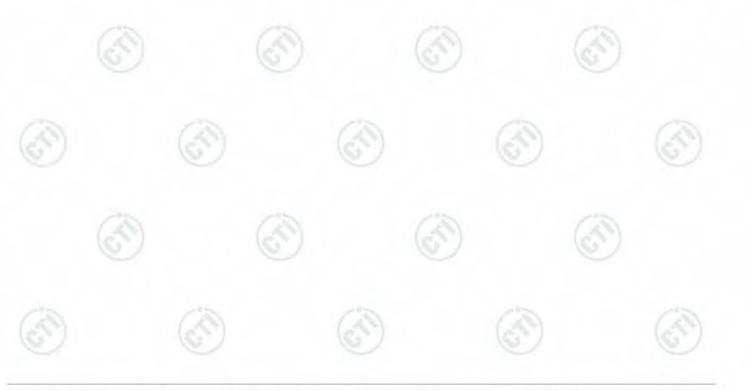

30 20 10 -10 -20 5G

5.019G

- PK Limit

5.038G

- AV Limit

5.057G

5.076G

- Vertical PK

			 PK Detected 	or 🗰 AV	Detector							
	Suspe	ected List					_	_	_		_	
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
à	1	5150.00 00	34.65	15.08	-40.54	34.70	43.89	54.00	10.11	Pass	Vertical	Average
Q	2	5180.72 59	34.68	15.38	-40.55	75.42	84.93	54.00	-30.93	Pass	Vertical	Average

5.095G

Frequency[Hz]


5.114G

5.133G

5.152G

5.171G

5.19G

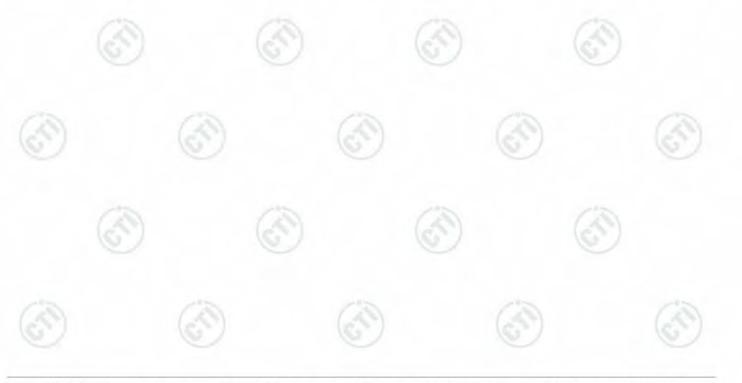



Page 167 of 822 Report No. : EED32L00167704 802.11 ac(HT40) Transmitting Channel: 5190 Mode: Remark: Test Graph FCC PART 15C 130 120 110 100 90 80 Level[dBµV/m] 70 m 60 50 40 30 20 10 0 -10 -20 5G 5.021G 5.042G 5.084G 5.126G 5.147G 5.168G 5.189G 5.21G 5.063G 5.105G Frequency[Hz] - PK Limit - AV Limit - Horizontal PK

PK Detector	*	AV Detector	

*

	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
à	1	5150.00 00	34.65	15.08	-40.54	53.63	62.82	74.00	11.18	Pass	Horizontal	Peak
6	2	5195.80 73	34.70	15.53	-40.56	88.58	98.25	74.00	-24.25	Pass	Horizontal	Peak






Page 168 of 822 Report No. : EED32L00167704 802.11 ac(HT40) Transmitting Channel: 5190 Mode: Remark: Test Graph FCC PART 15C 130 120 110 100 90 83 80 Level[dBµV/m] 70 60 50 40 30 20 10 0 -10 -20 5G 5.021G 5.042G 5.084G 5.126G 5.147G 5.168G 5.189G 5.21G 5.063G 5.105G Frequency[Hz] - PK Limit - AV Limit - Vertical PK PK Detector * AV Detector

	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
à	1	5150.00 00	34.65	15.08	-40.54	49.60	58.79	74.00	15.21	Pass	Vertical	Peak
C	2	5186.08 26	34.69	15.43	-40.55	82.39	91.96	74.00	-17.96	Pass	Vertical	Peak






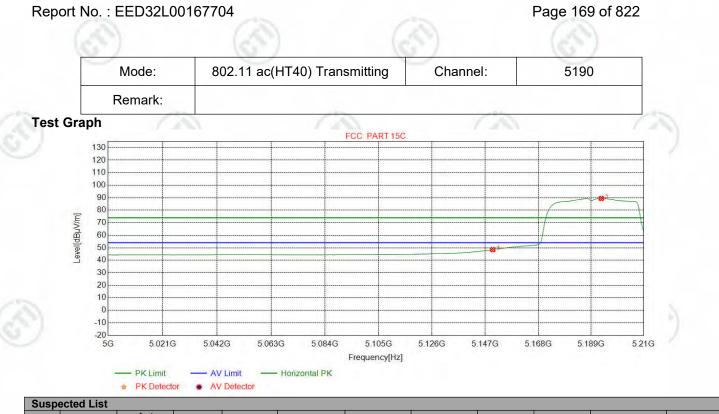


	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
-	1	5150.00 00	34.65	15.08	-40.54	39.33	48.52	54.00	5.48	Pass	Horizontal	Average
ć	2	5193.17 90	34.69	15.50	-40.55	79.76	89.40	54.00	-35.40	Pass	Horizontal	Average





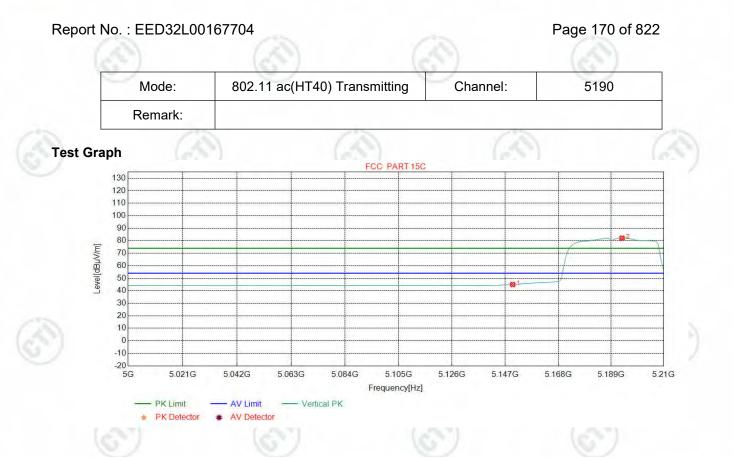


	Suspe	ected List										
10	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
	1	5150.0 000	34.65	15.08	-40.54	35.80	44.99	54.00	9.01	Pass	Vertical	Average
	2	5193.4 418	34.69	15.51	-40.55	72.44	82.09	54.00	-28.09	Pass	Vertical	Average






Page 171 of 822

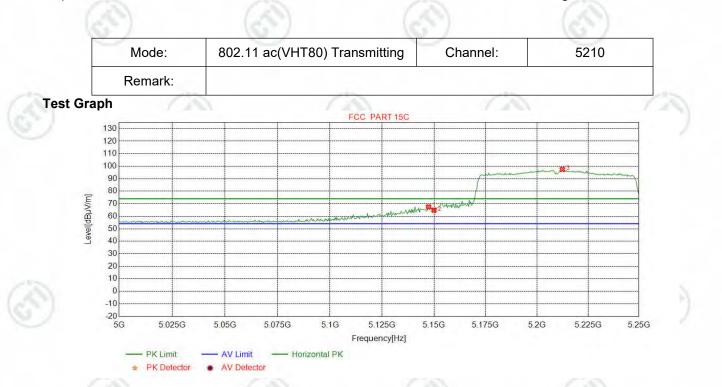

	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
S	1	5147.37 17	34.65	15.11	-40.55	58.29	67.50	74.00	6.50	Pass	Horizontal	Peak
	2	5150.00 00	34.65	15.08	-40.54	55.64	64.83	74.00	9.17	Pass	Horizontal	Peak
	3	5212.45 31	34.71	15.52	-40.56	87.76	97.43	74.00	-23.43	Pass	Horizontal	Peak





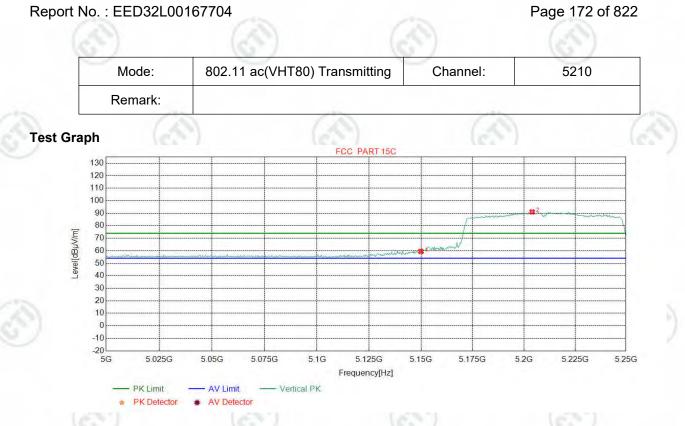

	Susp	ected List							_			
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
3	1	5150.00 00	34.65	15.08	-40.54	50.24	59.43	74.00	14.57	Pass	Vertical	Peak
~	2	5204.00 50	34.70	15.55	-40.55	81.32	91.02	74.00	-17.02	Pass	Vertical	Peak





Page 173 of 822



	Suspe	ected List										
à	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
Q	1	5147.05 88	34.65	15.11	-40.55	41.07	50.28	54.00	3.72	Pass	Horizontal	Average
	2	5150.00 00	34.65	15.08	-40.54	39.82	49.01	54.00	4.99	Pass	Horizontal	Average
	3	5208.07 26	34.71	15.53	-40.56	77.85	87.53	54.00	-33.53	Pass	Horizontal	Average
•		- CC -			0		6	1.1		G.)	













Page 174 of 822



	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
Q	1	5150.00 00	34.65	15.08	-40.54	35.90	45.09	54.00	8.91	Pass	Vertical	Average
	2	5208.07 26	34.71	15.53	-40.56	71.50	81.18	54.00	-27.18	Pass	Vertical	Average
					100			in the second		200		
















Page 175 of 822

For U-NII-2a band Ant1

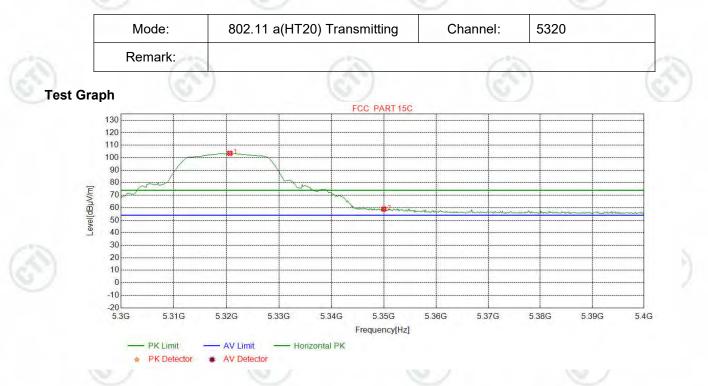

	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
0	1	5320.65 08	34.82	15.66	-40.59	93.64	103.53	74.00	-29.53	Pass	Horizontal	Peak
	2	5350.00 00	34.85	15.92	-40.60	48.75	58.92	74.00	15.08	Pass	Horizontal	Peak


















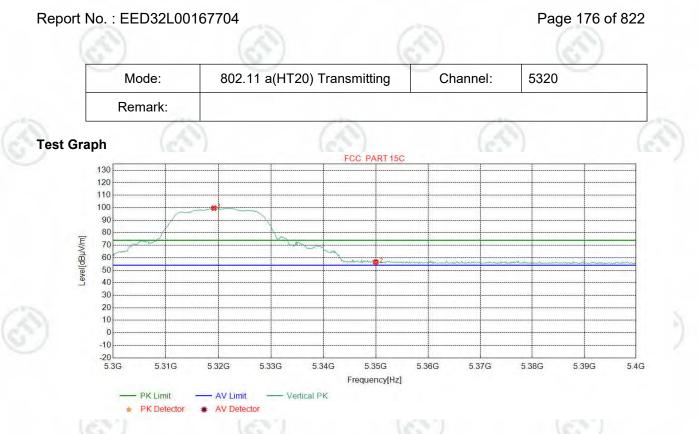


	Suspe	ected List									-	
-11	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
ć	1	5319.14 89	34.82	15.64	-40.59	89.80	99.67	74.00	-25.67	Pass	Vertical	Peak
	2	5350.00 00	34.85	15.92	-40.60	46.37	56.54	74.00	17.46	Pass	Vertical	Peak





Page 177 of 822

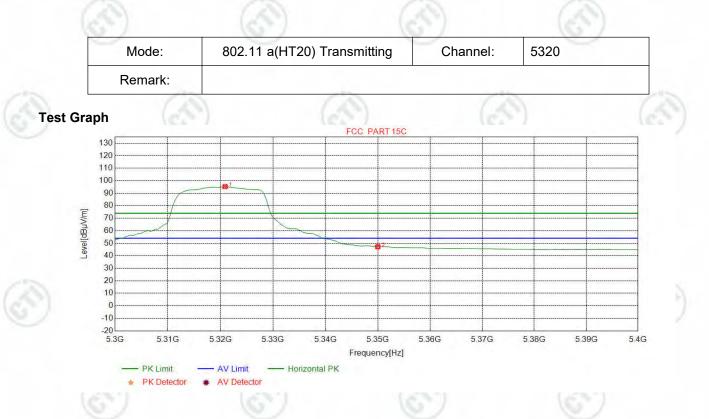

	Suspe	ected List										
à	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
Q	1	5320.90 11	34.82	15.66	-40.59	85.41	95.30	54.00	-41.30	Pass	Horizontal	Average
	2	5350.00 00	34.85	15.92	-40.60	36.95	47.12	54.00	6.88	Pass	Horizontal	Average
		00								-		_
















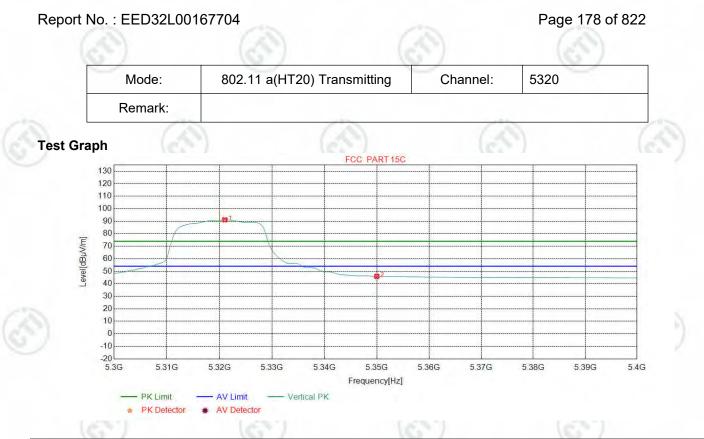


	Suspe	ected List										
-1-	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
ć	1	5321.02 63	34.82	15.66	-40.59	81.21	91.10	54.00	-37.10	Pass	Vertical	Average
	2	5350.00 00	34.85	15.92	-40.60	35.80	45.97	54.00	8.03	Pass	Vertical	Average





Page 179 of 822

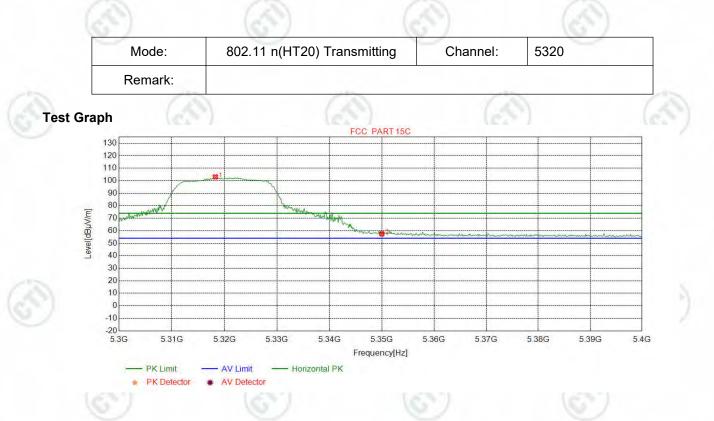

	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
6	1	5318.27 28	34.82	15.63	-40.59	93.19	103.05	74.00	-29.05	Pass	Horizontal	Peak
	2	5350.00 00	34.85	15.92	-40.60	47.38	57.55	74.00	16.45	Pass	Horizontal	Peak















Page 180 of 822



	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
	1	5322.27 78	34.82	15.67	-40.59	88.84	98.74	74.00	-24.74	Pass	Vertical	Peak
	2	5350.00 00	34.85	15.92	-40.60	46.07	56.24	74.00	17.76	Pass	Vertical	Peak
















Page 181 of 822

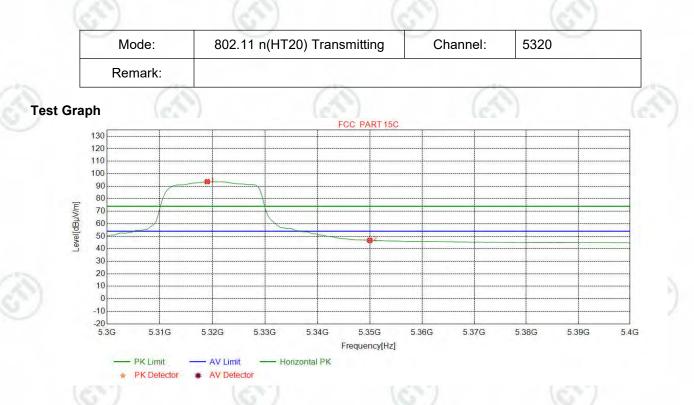

	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
	1	5319.02 38	34.82	15.64	-40.59	83.81	93.68	54.00	-39.68	Pass	Horizontal	Average
	2	5350.00 00	34.85	15.92	-40.60	36.51	46.68	54.00	7.32	Pass	Horizontal	Average













3



PK Detector


* AV Detector

Page 182 of 822 Report No. : EED32L00167704 802.11 n(HT20) Transmitting Channel: 5320 Mode: Remark: Test Graph FCC PART 15C 130 120 110 100 90 80 Level[dBµV/m] 70 60 50 40 30 20 10 0 -10 -20 5.3G 5.31G 5.32G 5.33G 5.34G 5.35G 5.36G 5.37G 5.38G 5.39G 5.4G Frequency[Hz] - AV Limit - Vertical PK - PK Limit

	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
	1	5321.40 18	34.82	15.66	-40.59	79.62	89.51	54.00	-35.51	Pass	Vertical	Average
	2	5350.00 00	34.85	15.92	-40.60	35.58	45.75	54.00	8.25	Pass	Vertical	Average
		-01			100			in the second		215		



Page 183 of 822

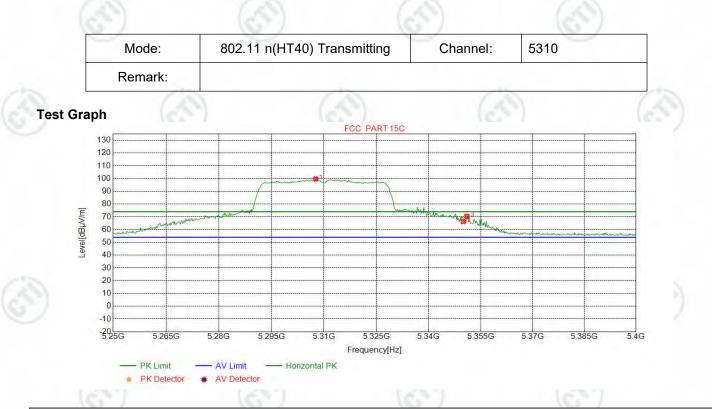

	Suspe	ected List						_	_			
-	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
	1	5307.63 45	34.81	15.54	-40.59	89.93	99.69	74.00	-25.69	Pass	Horizontal	Peak
	2	5350.00 00	34.85	15.92	-40.60	56.15	66.32	74.00	7.68	Pass	Horizontal	Peak
	3	5351.00 13	34.85	15.91	-40.59	60.31	70.48	74.00	3.52	Pass	Horizontal	Peak

Ì














Page 184 of 822

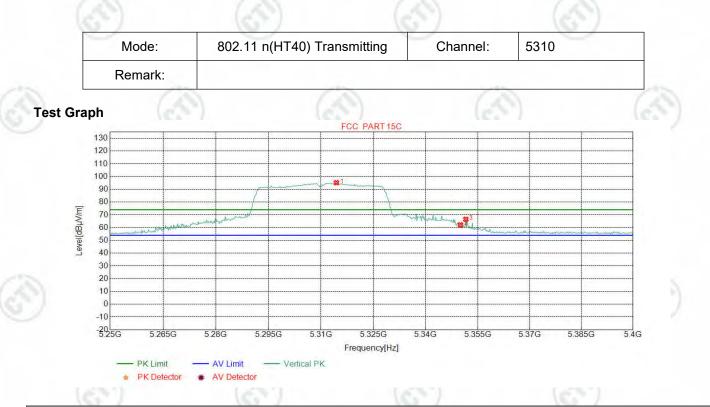

	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
3	1	5314.39 30	34.81	15.60	-40.58	85.35	95.18	74.00	-21.18	Pass	Vertical	Peak
	2	5350.00 00	34.85	15.92	-40.60	52.00	62.17	74.00	11.83	Pass	Vertical	Peak
	3	5351.56 45	34.85	15.91	-40.60	56.41	66.57	74.00	7.43	Pass	Vertical	Peak
















Page 185 of 822

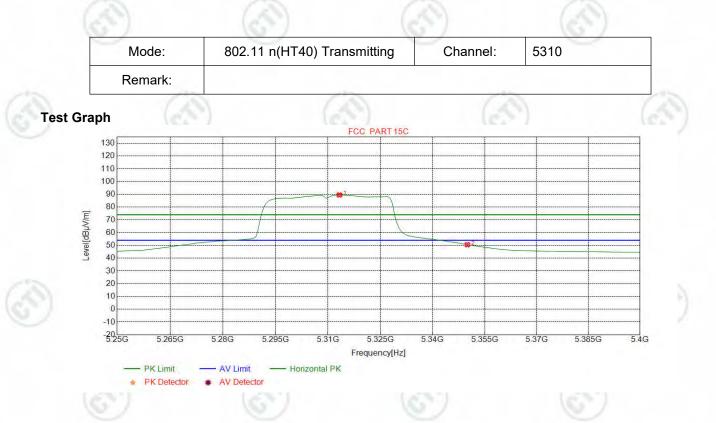

	Suspe	ected List									_	
à	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
Q	1	5313.26 66	34.81	15.59	-40.59	79.72	89.53	54.00	-35.53	Pass	Horizontal	Average
	2	5350.00 00	34.85	15.92	-40.60	40.41	50.58	54.00	3.42	Pass	Horizontal	Average
















Page 186 of 822

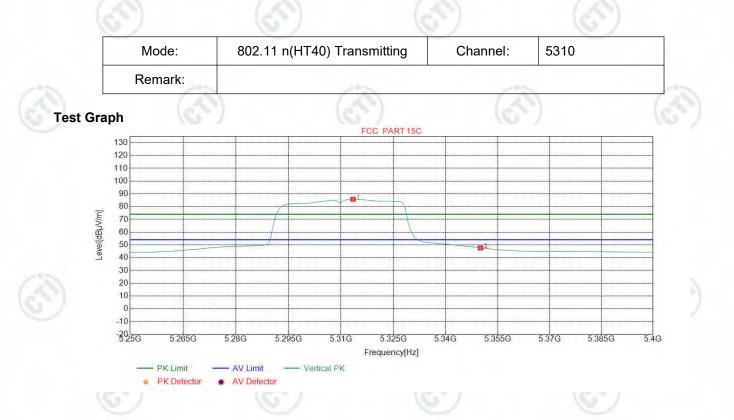

	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
	1	5313.45 43	34.81	15.59	-40.58	75.93	85.75	54.00	-31.75	Pass	Vertical	Average
	2	5350.00 00	34.85	15.92	-40.60	37.46	47.63	54.00	6.37	Pass	Vertical	Average
		1			100		1	100		0.5	C	


















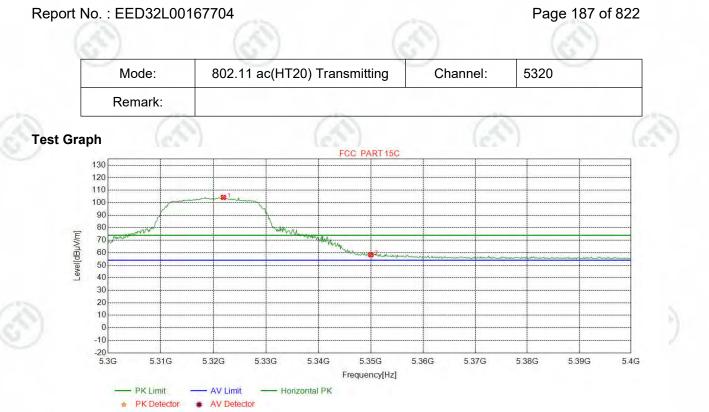


	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
Ż	1	5321.90 24	34.82	15.67	-40.59	94.34	104.24	74.00	-30.24	Pass	Horizontal	Peak
2	2	5350.00 00	34.85	15.92	-40.60	48.27	58.44	74.00	15.56	Pass	Horizontal	Peak

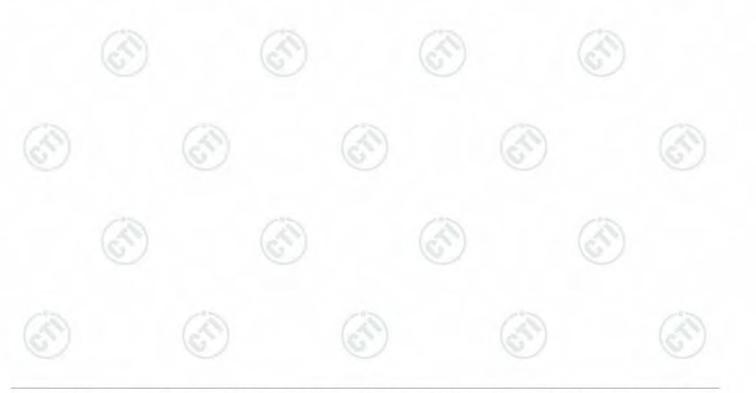




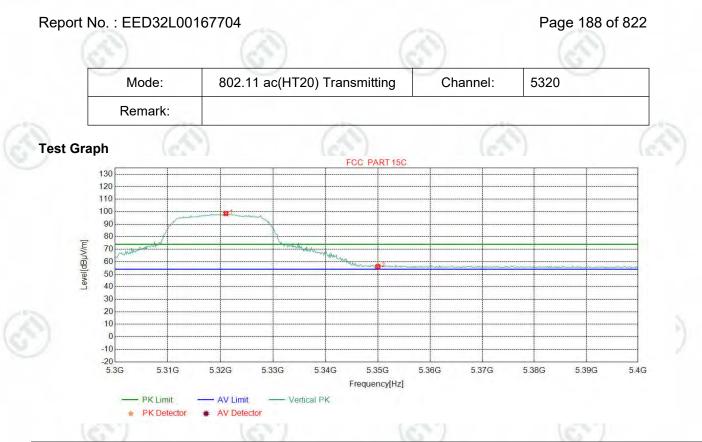


Su	spected List	(
NC	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5321.02 63	34.82	15.66	-40.59	88.67	98.56	74.00	-24.56	Pass	Vertical	Peak
2	5350.00 00	34.85	15.92	-40.60	45.89	56.06	74.00	17.94	Pass	Vertical	Peak

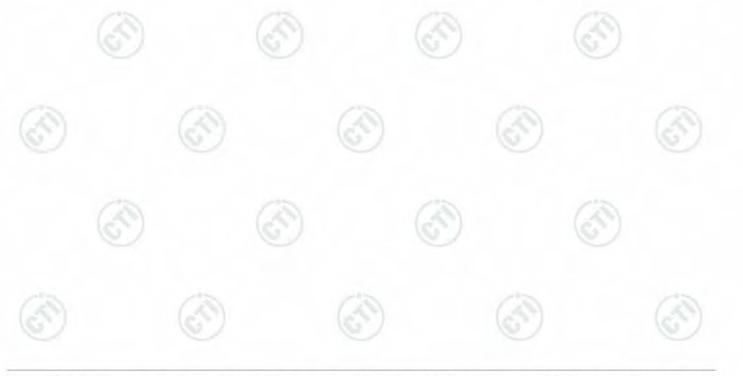



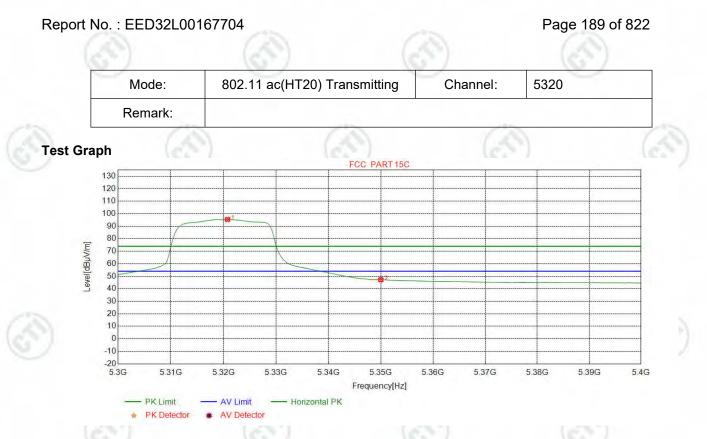

		<i>.</i>		1000			2		1000	1	
Su	spected List										
NC	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5320.77 60	34.82	15.66	-40.59	85.51	95.40	54.00	-41.40	Pass	Horizontal	Average
2	5350.00 00	34.85	15.92	-40.60	37.02	47.19	54.00	6.81	Pass	Horizontal	Average

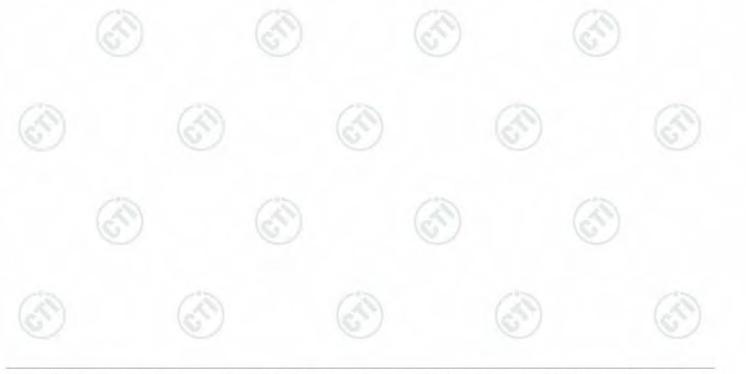



Page 190 of 822 Report No. : EED32L00167704 802.11 ac(HT20) Transmitting Channel: 5320 Mode: Remark: Test Graph FCC PART 15C 130 120 110 100 90 80 Level[dBµV/m] 70 60 50 40 30 20 10 0 -10 -20 5.3G 5.31G 5.32G 5.33G 5.34G 5.35G 5.36G 5.37G 5.38G 5.39G 5.4G Frequency[Hz] - AV Limit - Vertical PK - PK Limit PK Detector * AV Detector

	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
C	1	5320.52 57	34.82	15.65	-40.58	79.68	89.57	54.00	-35.57	Pass	Vertical	Average
	2	5350.00 00	34.85	15.92	-40.60	35.47	45.64	54.00	8.36	Pass	Vertical	Average
















Page 191 of 822

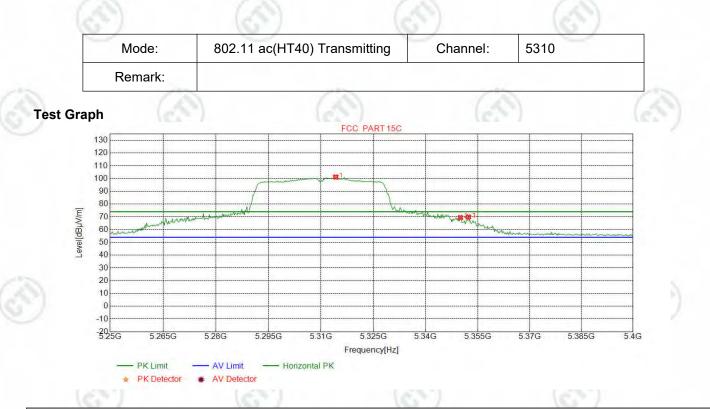

	Suspe	ected List							_			
-	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
3	1	5314.20 53	34.81	15.60	-40.59	91.40	101.22	74.00	-27.22	Pass	Horizontal	Peak
	2	5350.00 00	34.85	15.92	-40.60	59.24	69.41	74.00	4.59	Pass	Horizontal	Peak
	3	5352.31 54	34.85	15.90	-40.59	59.73	69.89	74.00	4.11	Pass	Horizontal	Peak

 (\mathcal{S})













Page 192 of 822 Report No. : EED32L00167704 802.11 ac(HT40) Transmitting Channel: 5310 Mode: Remark: Test Graph FCC PART 15C 130 120 110 100 21 90 80 Level[dBµV/m] 70 22 60 50 40 30 20 10 0 -10 -20 5.25G 5.265G 5.28G 5.295G 5.31G 5.325G 5.34G 5.355G 5.37G 5.385G 5.4G Frequency[Hz] - AV Limit - Vertical PK - PK Limit PK Detector * AV Detector

	Suspe	ected List										
à	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
C	1	5313.26 66	34.81	15.59	-40.59	85.51	95.32	74.00	-21.32	Pass	Vertical	Peak
	2	5350.00 00	34.85	15.92	-40.60	53.56	63.73	74.00	10.27	Pass	Vertical	Peak
	3	5351.56 45	34.85	15.91	-40.60	55.23	65.39	74.00	8.61	Pass	Vertical	Peak
		1000			(0)		0	1.7		G	/	















Page 193 of 822



	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
C	1	5312.89 11	34.81	15.59	-40.59	79.49	89.30	54.00	-35.30	Pass	Horizontal	Average
	2	5350.00 00	34.85	15.92	-40.60	40.73	50.90	54.00	3.10	Pass	Horizontal	Average














(3)





Page 194 of 822

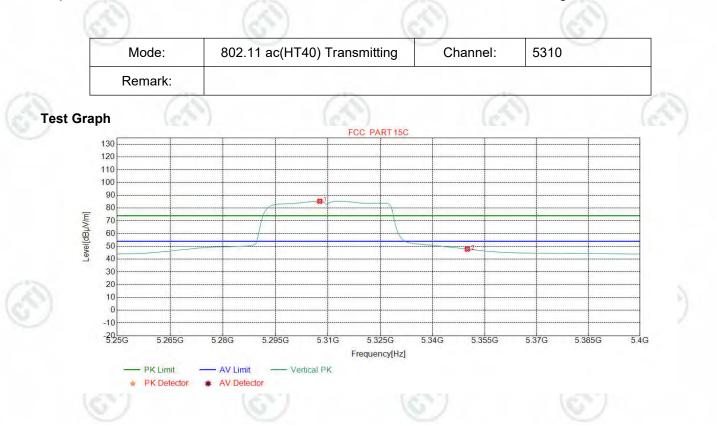

	Suspe	ected List									_	
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
C	1	5307.63 45	34.81	15.54	-40.59	75.66	85.42	54.00	-31.42	Pass	Vertical	Average
	2	5350.00 00	34.85	15.92	-40.60	37.70	47.87	54.00	6.13	Pass	Vertical	Average
	2		34.85	15.92	-40.60	37.70		54.00	6.13		Vertical	














12



Page 195 of 822

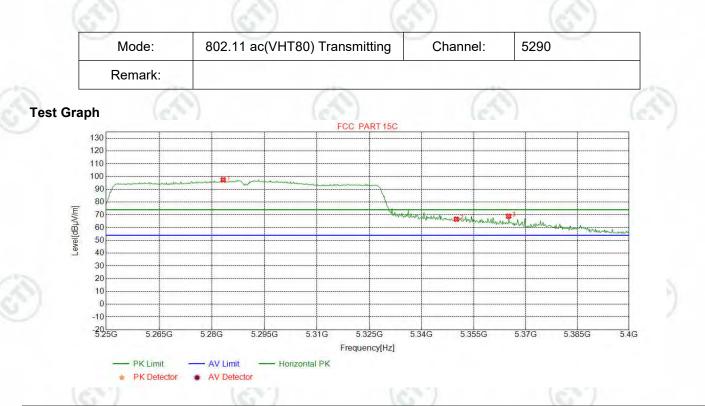

	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
ć	1	5283.22 90	34.78	15.43	-40.58	87.80	97.43	74.00	-23.43	Pass	Horizontal	Peak
_	2	5350.00 00	34.85	15.92	-40.60	56.46	66.63	74.00	7.37	Pass	Horizontal	Peak
	3	5365.08 14	34.87	15.81	-40.61	58.89	68.96	74.00	5.04	Pass	Horizontal	Peak










(F



Page 196 of 822

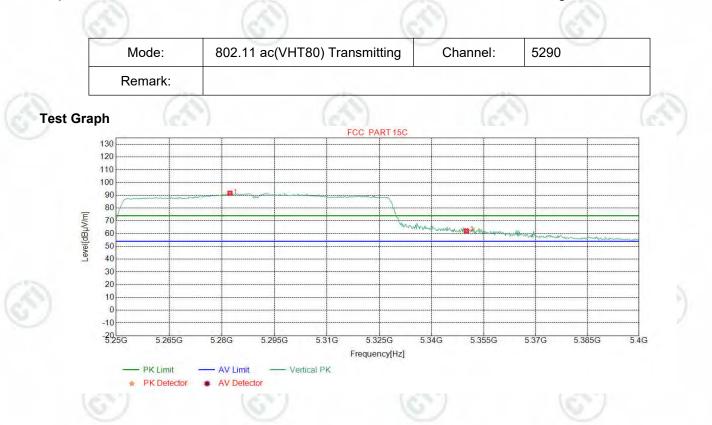

	Suspe	ected List										
a	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
C	1	5282.29 04	34.78	15.43	-40.58	82.08	91.71	74.00	-17.71	Pass	Vertical	Peak
	2	5350.00 00	34.85	15.92	-40.60	52.02	62.19	74.00	11.81	Pass	Vertical	Peak
















Page 197 of 822

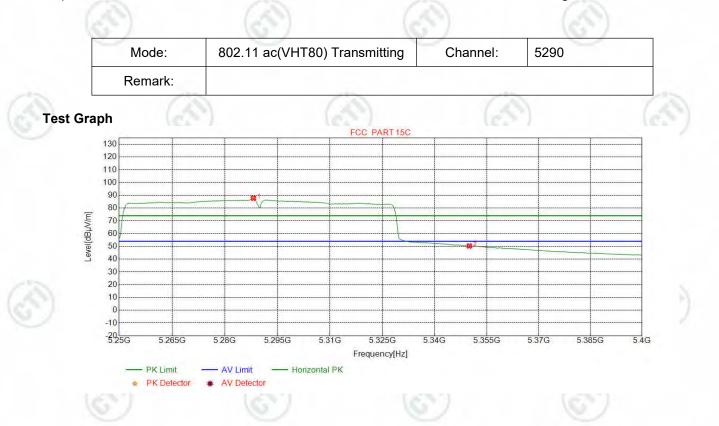

	Suspe	ected List										
à	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
C	1	5288.11 01	34.79	15.44	-40.58	78.10	87.75	54.00	-33.75	Pass	Horizontal	Average
	2	5350.00 00	34.85	15.92	-40.60	40.16	50.33	54.00	3.67	Pass	Horizontal	Average
















Page 198 of 822

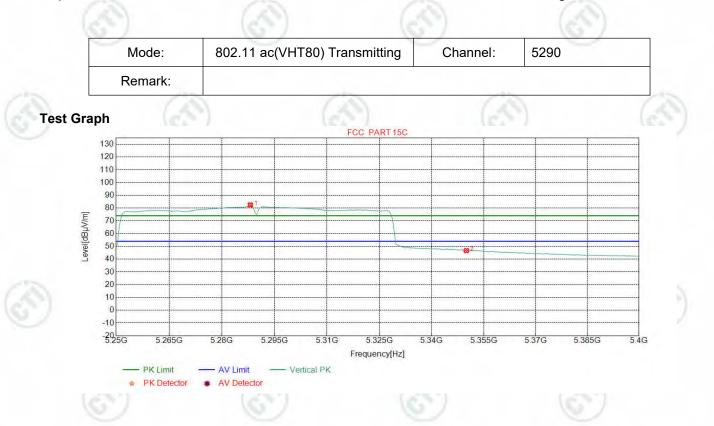

	Suspe	ected List										
à	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
C	1	5288.11 01	34.79	15.44	-40.58	72.89	82.54	54.00	-28.54	Pass	Vertical	Average
	2	5350.00 00	34.85	15.92	-40.60	36.62	46.79	54.00	7.21	Pass	Vertical	Average















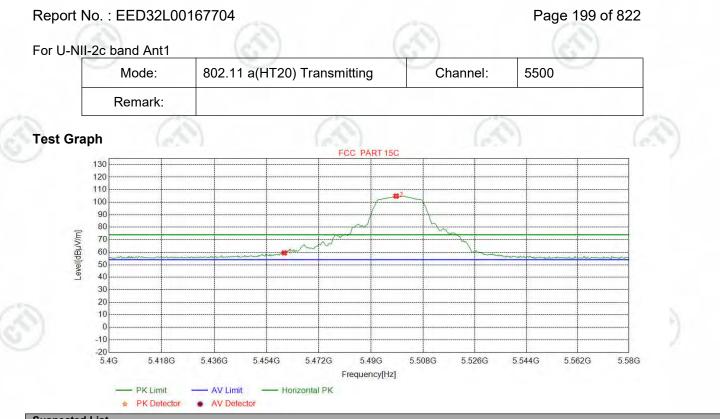

	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
à	1	5460.00 00	34.96	16.02	-40.63	49.12	59.47	74.00	14.53	Pass	Horizontal	Peak
G	2	5498.67 33	35.00	15.92	-40.64	94.61	104.89	74.00	-30.89	Pass	Horizontal	Peak

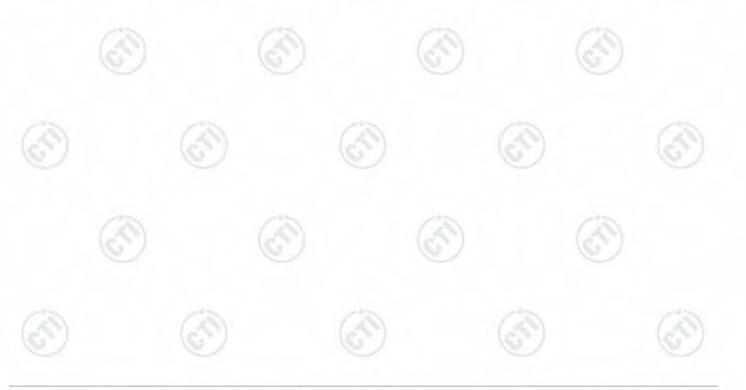





Page 200 of 822


	F	Remark:			63	9	1	3		65	
Test	Graph	6	2		C			V		(e	
	130				/F	CC PART 15C					
	120										
	110 100					* ²	1				
	90 80										
					and the	<u></u>	- Josh				
	[W/\70 60 50 40		mana	and the second	State Contract of the			M-Mh-m-m			
	ب ع 30										
	20										
	10										
	-10										
	-10	5.418G	5.4360	G 5.454G		5.49G 5 Frequency[Hz]	5.508G 5.526	6G 5.544	G 5.562G	5.58G	
	-10 -20 5.4G	- PK Limit	AV	Limit. —			5.508G 5.52(6G 5.544	G 5.562G	5.58G	
Suspi	-10 -20 5.4G		AV		F		5.508G 5.524	6G 5.544	.G 5.562G	5.58G	
Susp	-10 -20 5.4G	PK Limit PK Detector	- AV or * AV	Limit — Detector	· Vertical PK	Frequency[Hz]			1G 5.562G	5.58G	
Susp	-10 -20 5.4G	PK Limit	AV	Limit. —	F		5.508G 5.526	6G 5.544 Margin [dB]	G 5.562G	5.58G Polarity	Rema
	-10 -20 5.4G	PK Limit PK Detector Ant Factor	or * AV Cable loss	Limit — Detector Pream gain	Vertical PK	Frequency[Hz]	Limit	Margin			
NO	-10 -20 5.4G	PK Limit PK Detector Factor [dB]	Cable loss [dB]	Limit Detector Pream gain [dB]	· Vertical PK Reading [dBμV]	Frequency[Hz] Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Pea
NO 1	-10 -20 5.4G	PK Limit PK Detector Ant Factor [dB] 34.96	Cable loss [dB] 16.02	Limit Detector Pream gain [dB] -40.63	Vertical PK Reading [dBµV] 46.56	Level [dBµV/m] 56.91	Limit [dBµV/m] 74.00	Margin [dB] 17.09	Result Pass	Polarity Vertical	Rema Peal Peal





Page 201 of 822

Mode:	802.11 a(HT20) Transmitting	Channel:	5500	
Remark:				

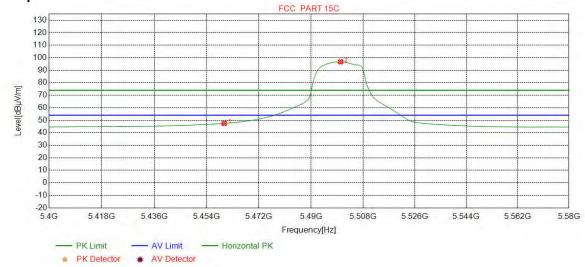

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	37.13	47.48	54.00	6.52	Pass	Horizontal	Average
2	5500.25 03	35.00	15.92	-40.64	86.47	96.75	54.00	-42.75	Pass	Horizontal	Average
2		35.00	15.92	-40.64	86.47	96.75	54.00	-42.75		Horizontal	


















Page 202 of 822

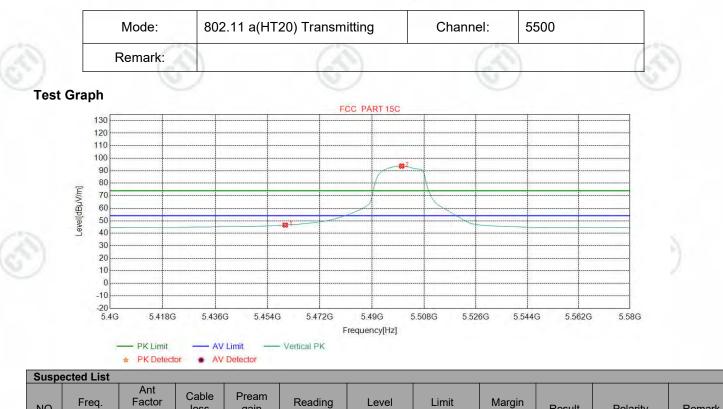

23	NO	Freq. [MHz]	Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
C	1	5460.00 00	34.96	16.02	-40.63	36.20	46.55	54.00	7.45	Pass	Vertical	Average
	2	5500.25 03	35.00	15.92	-40.64	83.40	93.68	54.00	-39.68	Pass	Vertical	Average










802.11 n(HT20) Transmitting Channel: 5500 Mode: Remark:

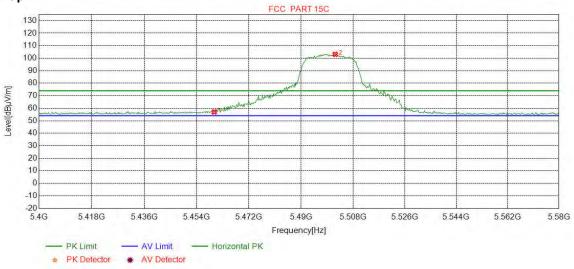

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	46.68	57.03	74.00	16.97	Pass	Horizontal	Peak
2	5501.82 73	35.00	15.89	-40.64	92.86	103.11	74.00	-29.11	Pass	Horizontal	Peak

























Page 204 of 822

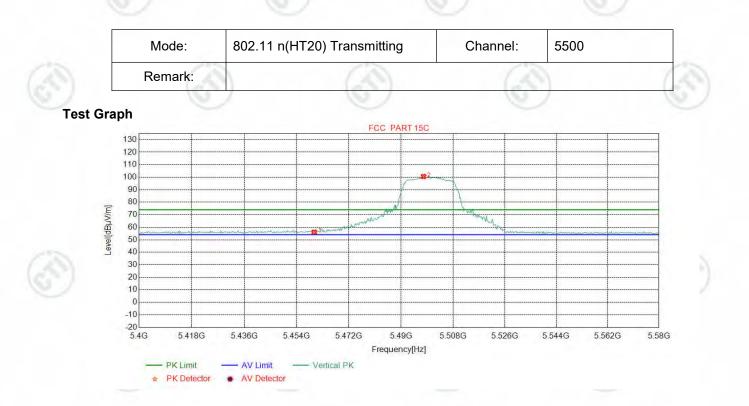

Suspe	ected List						-				
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	45.78	56.13	74.00	17.87	Pass	Vertical	Peak
2	5497.77 22	35.00	15.93	-40.65	90.27	100.55	74.00	-26.55	Pass	Vertical	Peak
	125			62		6			6		






















Mode:	802.11 n(HT20) Transmitting	Channel:	5500	
Remark:	e) (29)	(3))	6

Test Graph

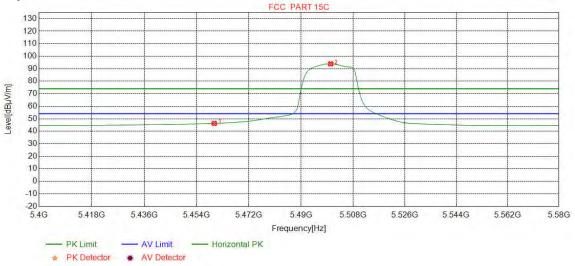

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remai
1	5460.00 00	34.96	16.02	-40.63	35.96	46.31	54.00	7.69	Pass	Horizontal	Averaç
2	5500.25 03	35.00	15.92	-40.64	83.62	93.90	54.00	-39.90	Pass	Horizontal	Avera




















Page 206 of 822

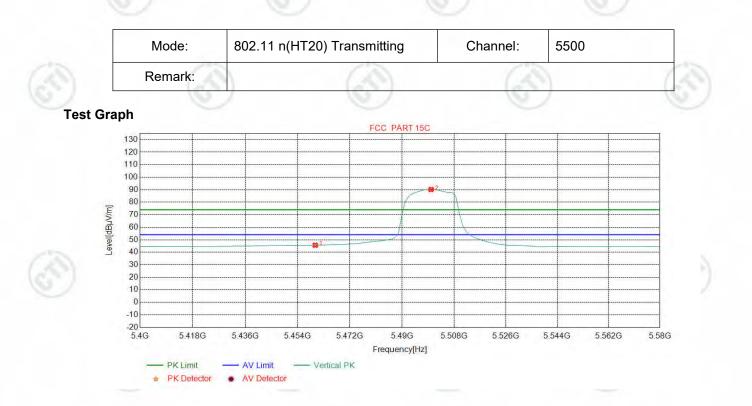

Suspe	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	35.31	45.66	54.00	8.34	Pass	Vertical	Average
2	5500.02 50	35.00	15.92	-40.64	79.88	90.16	54.00	-36.16	Pass	Vertical	Average
	125			627		6			6		
















Page 207 of 822

Mode: 802.11n(HT4 Transmitting	0Mbps)	Channel:	5510
Remark:	(\mathcal{G})	6).

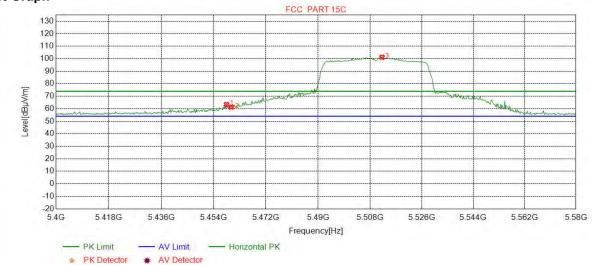

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5458.34 79	34.96	16.03	-40.63	53.06	63.42	74.00	10.58	Pass	Horizontal	Peak
2	5460.00 00	34.96	16.02	-40.63	50.98	61.33	74.00	12.67	Pass	Horizontal	Peak
3	5512.19 02	35.02	15.74	-40.65	91.06	101.17	74.00	-27.17	Pass	Horizontal	Peak
















Page 208 of 822

Mode:	802.11n(HT40Mbps) Transmitting	Channel:	5510	-
Remark:		6).	

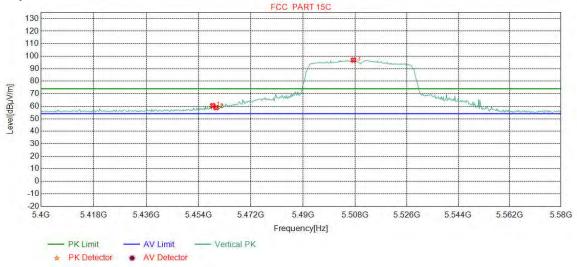

Suspe	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5458.79 85	34.96	16.03	-40.63	50.14	60.50	74.00	13.50	Pass	Vertical	Peak
2	5460.00 00	34.96	16.02	-40.63	48.50	58.85	74.00	15.15	Pass	Vertical	Peak
3	5507.45 93	35.01	15.81	-40.65	86.69	96.86	74.00	-22.86	Pass	Vertical	Peak




























Page 209 of 822

Mode:	802.11n(HT40Mbps) Transmitting	Channel:	5510	1
Remark:		6).	8

Test Graph

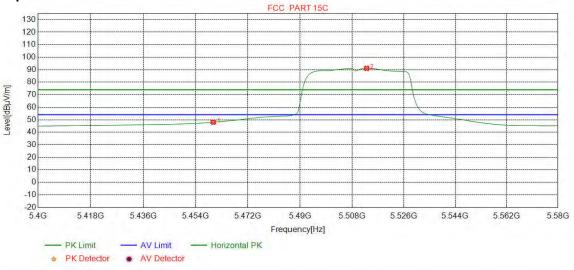

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	37.68	48.03	54.00	5.97	Pass	Horizontal	Average
2	5513.09 14	35.02	15.72	-40.65	81.00	91.09	54.00	-37.09	Pass	Horizontal	Average






















Page 210 of 822

Mode:	802.11n(HT40Mbps) Transmitting	Channel:	5510	7
Remark:		6		1



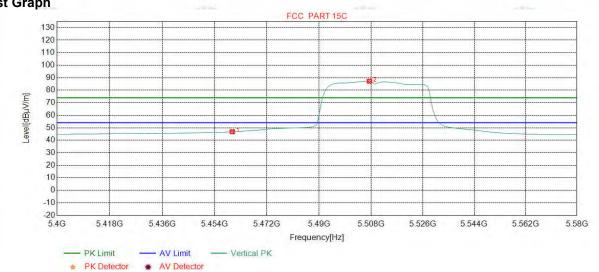

Susp	ected List	- C.			1.4					1.4	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	36.47	46.82	54.00	7.18	Pass	Vertical	Average
2	5507.45 93	35.01	15.81	-40.65	77.03	87.20	54.00	-33.20	Pass	Vertical	Average








Page 211 of 822

Mode:	802.11ac(HT20Mbps) Transmitting	Channel:	5500	1
Remark:		C		1

Test Graph

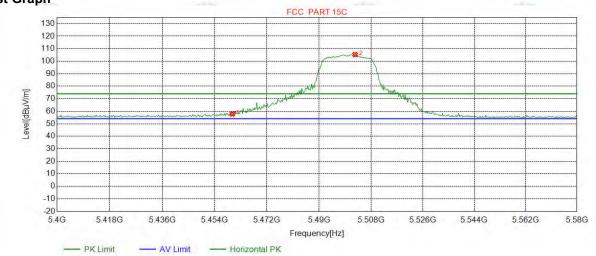

Susp	ected List	C			1.4					1.4	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	47.45	57.80	74.00	16.20	Pass	Horizontal	Peak
2	5502.50 31	35.00	15.88	-40.64	95.03	105.27	74.00	-31.27	Pass	Horizontal	Peak








Page 212 of 822

Mode:	802.11ac(HT20Mbps) Transmitting	Channel:	5500	1
Remark:		6)	8

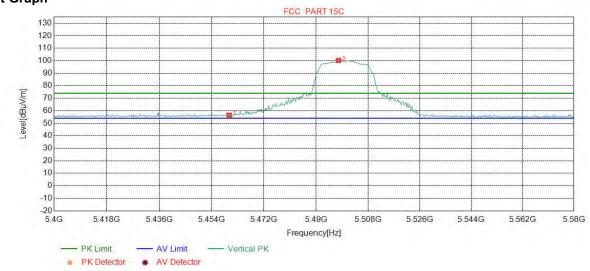

Susp	ected List						_				
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	46.13	56.48	74.00	17.52	Pass	Vertical	Peak
2	5497.77 22	35.00	15.93	-40.65	89.93	100.21	74.00	-26.21	Pass	Vertical	Peak










Page 213 of 822

Mode:	802.11ac(HT20Mbps) Transmitting	Channel:	5500	1
Remark:		6)	6

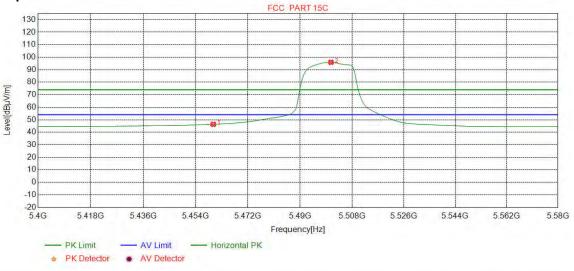

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	36.00	46.35	54.00	7.65	Pass	Horizontal	Average
2	5500.70 09	35.00	15.91	-40.64	85.64	95.91	54.00	-41.91	Pass	Horizontal	Average
















Page 214 of 822

Mode:	802.11ac(HT20Mbps) Transmitting	Channel:	5500	
Remark:		6)	1

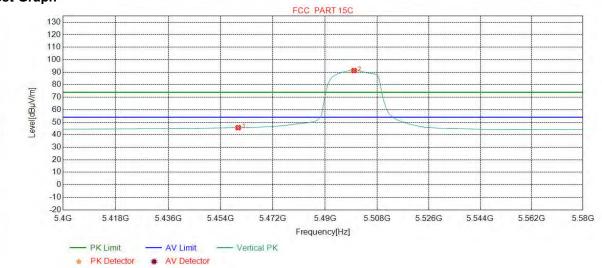


Susp	ected List									_	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	35.37	45.72	54.00	8.28	Pass	Vertical	Average
2	5500.02 50	35.00	15.92	-40.64	81.04	91.32	54.00	-37.32	Pass	Vertical	Average










Page 215 of 822

Mode:	802.11ac(HT40Mbps) Transmitting	Channel:	5510	
Remark:		0)	0

Test Graph

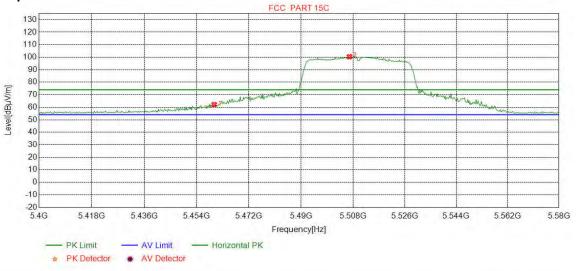

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	51.76	62.11	74.00	11.89	Pass	Horizontal	Peak
2	5506.78 35	35.01	15.82	-40.65	90.17	100.35	74.00	-26.35	Pass	Horizontal	Peak




















Page 216 of 822

Mode:	802.11ac(HT40Mbps) Transmitting	Channel:	5510	1
Remark:		6)	0

Test Graph

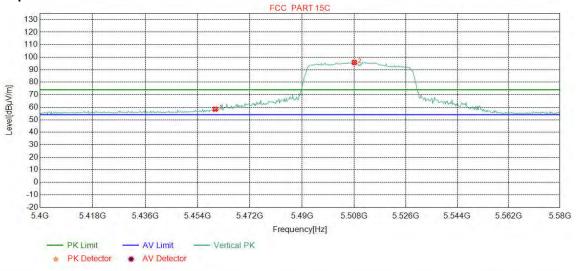

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	48.09	58.44	74.00	15.56	Pass	Vertical	Peak
2	5508.13 52	35.01	15.80	-40.65	85.64	95.80	74.00	-21.80	Pass	Vertical	Peak




















Page 217 of 822

Mode:	802.11ac(HT40Mbps) Transmitting	Channel:	5510	C
Remark:		0		10

Test Graph

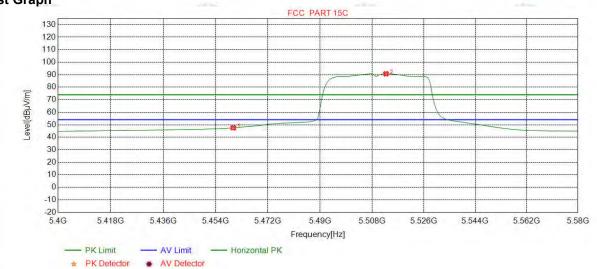

)		6	2)_		(c.)	2)	_	3		(2)	<u>)</u>
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	37.20	47.55	54.00	6.45	Pass	Horizontal	Average
2	5512.86 61	35.02	15.73	-40.65	80.63	90.73	54.00	-36.73	Pass	Horizontal	Average
















Page 218 of 822

1

Mode:	802.11ac(HT40Mbps) Transmitting	Channel:	5510	C
Remark:	6	6		10

Test Graph

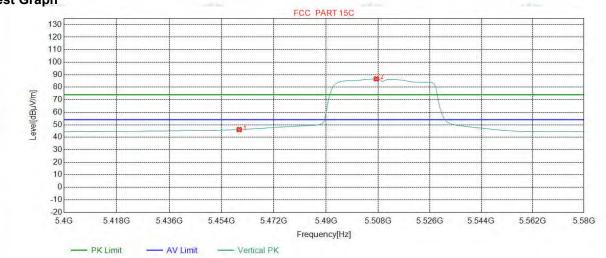

Suspe	ected List				1.1		-			(
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	35.82	46.17	54.00	7.83	Pass	Vertical	Average
2	5507.45 93	35.01	15.81	-40.65	76.56	86.73	54.00	-32.73	Pass	Vertical	Average








Page 219 of 822

Mode:	802.11ac(HT80Mbps) Transmitting	Channel:	5530	1
Remark:		6		1

Test Graph

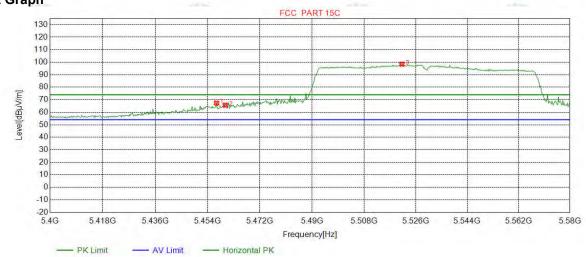

 PK Detector * AV Detector


Suspe	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5456.99 62	34.96	16.03	-40.63	56.95	67.31	74.00	6.69	Pass	Horizontal	Peak
2	5460.00 00	34.96	16.02	-40.63	55.25	65.60	74.00	8.40	Pass	Horizontal	Peak
3	5521.20 15	35.03	15.60	-40.65	88.44	98.42	74.00	-24.42	Pass	Horizontal	Peak





Page 220 of 822

Mode:	802.11ac(HT80Mbps) Transmitting	Channel:	5530	
Remark:		6)	(

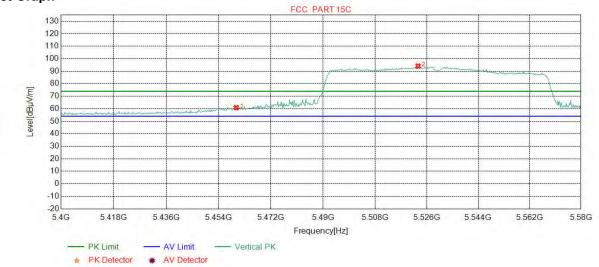


Susp	ected List				_	_	_	_		_	_
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-40.63	50.51	60.86	74.00	13.14	Pass	Vertical	Peak
2	5523.00 38	35.04	15.57	-40.66	84.14	94.09	74.00	-20.09	Pass	Vertical	Peak







Page 221 of 822

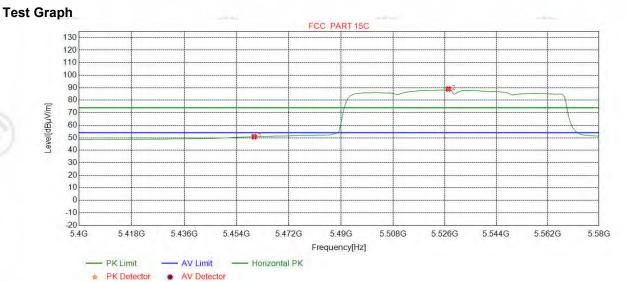

		1			1.2					12	
Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-36.15	35.99	50.82	54.00	3.18	Pass	Horizontal	Average
2	5527.28 41	35.04	15.51	-36.09	74.47	88.93	54.00	-34.93	Pass	Horizontal	Average








Page 222 of 822

Mode:	802.11ac(HT80Mbps) Transmitting	Channel:	5530	
Remark:		6		1

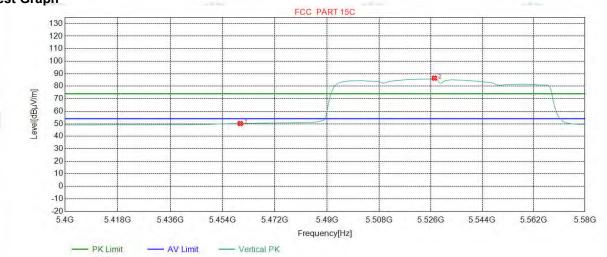


+	PK Detector	*	AV	Detector


Suspe	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5460.00 00	34.96	16.02	-36.15	35.35	50.18	54.00	3.82	Pass	Vertical	Average
2	5527.28 41	35.04	15.51	-36.09	72.01	86.47	54.00	-32.47	Pass	Vertical	Average





Page 223 of 822

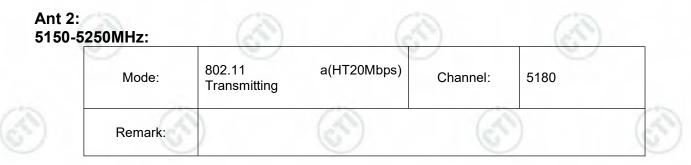

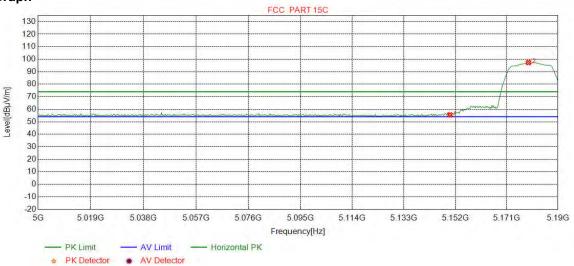

	Suspe	ected List						_				
ŝ	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
	1	5150.0 000	34.65	15.08	-40.54	46.30	55.49	74.00	18.51	Pass	Horizontal	Peak
	2	5179.0 613	34.68	15.36	-40.55	87.82	97.31	74.00	-23.31	Pass	Horizontal	Peak
		162	l		107		0			G)	
















Page 224 of 822



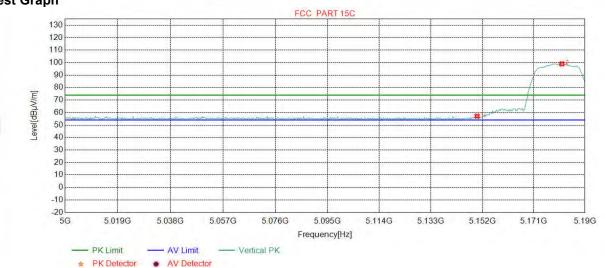


Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150.0 000	34.65	15.08	-40.54	47.90	57.09	74.00	16.91	Pass	Vertical	Peak
2	5181.4 393	34.68	15.39	-40.55	89.47	98.99	74.00	-24.99	Pass	Vertical	Peak






Page 225 of 822

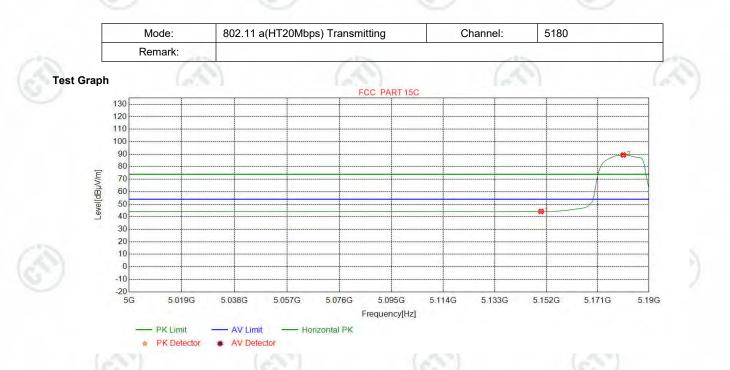


1	Susp	ected List									·	
-	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
ć	1	5150.00 00	34.65	15.08	-40.54	35.10	44.29	54.00	9.71	Pass	Horizontal	Peak
	2	5180.48 81	34.68	15.38	-40.55	79.89	89.40	54.00	-35.40	Pass	Horizontal	Peak

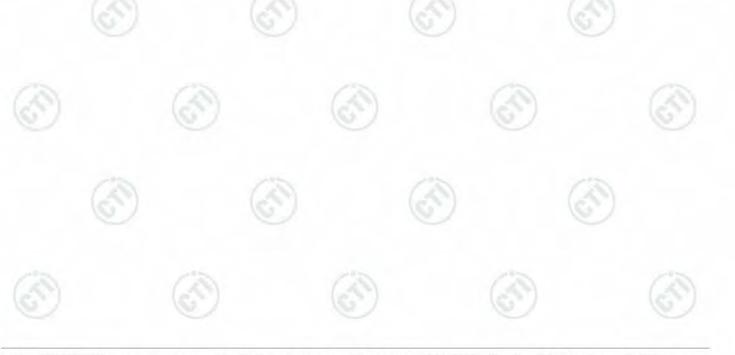




Page 226 of 822



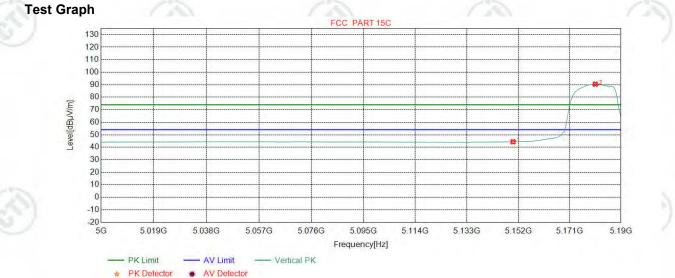


	10.0			A Carlo		16			16.4		
Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150.0 000	34.65	15.08	-40.54	35.18	44.37	54.00	9.63	Pass	Vertical	Peak
2	5180.4 881	34.68	15.38	-40.55	80.91	90.42	54.00	-36.42	Pass	Vertical	Peak

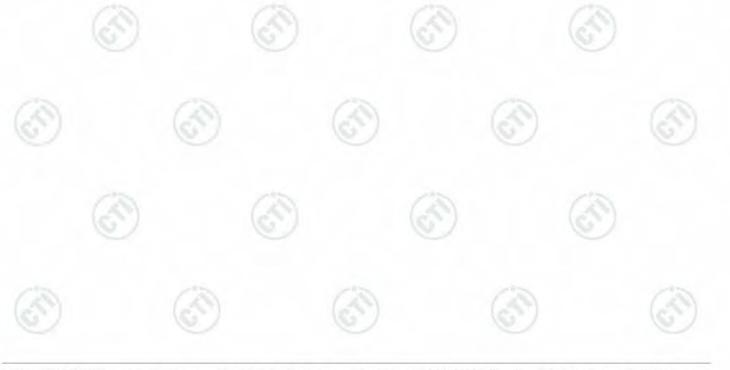



Page 227 of 822

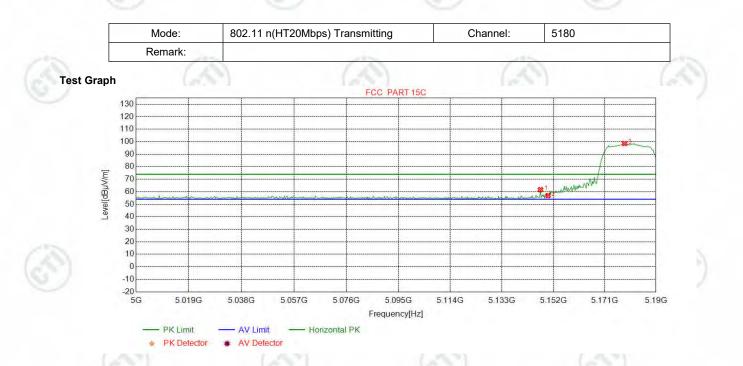

Suen	acted List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5147.19 65	34.65	15.11	-40.55	52.41	61.62	74.00	12.38	Pass	Horizontal	Peak
2	5150.00 00	34.65	15.08	-40.54	47.72	56.91	74.00	17.09	Pass	Horizontal	Peak
3	5178.34 79	34.68	15.36	-40.55	89.09	98.58	74.00	-24.58	Pass	Horizontal	Peak
	NO 1 2	NO [MHz] 1 5147.19 65 2 5150.00 00 3 5178.34	NO Freq. [MHz] Ant Factor [dB] 1 5147.19 65 34.65 2 5150.00 00 34.65 3 5178.34 34.68	NO Freq. [MHz] Ant Factor [dB] Cable loss [dB] 1 5147.19 65 34.65 15.11 2 5150.00 00 34.65 15.08 3 5178.34 34.68 15.36	NO Freq. [MHz] Ant Factor [dB] Cable loss [dB] Pream gain [dB] 1 5147.19 65 34.65 15.11 -40.55 2 5150.00 00 34.65 15.08 -40.54 3 5178.34 34.68 15.36 -40.55	NO Freq. [MHz] Ant Factor [dB] Cable loss [dB] Pream gain [dB] Reading [dB μ V] 1 5147.19 65 34.65 15.11 -40.55 52.41 2 5150.00 00 34.65 15.08 -40.54 47.72 3 5178.34 34.68 15.36 -40.55 89.09	NO Freq. [MHz] Ant Factor [dB] Cable loss [dB] Pream gain [dB] Reading [dB] Level [dB $\mu V]$ 1 5147.19 65 34.65 15.11 -40.55 52.41 61.62 2 5150.0000 34.65 15.08 -40.54 47.72 56.91 3 5178.34 34.68 15.36 -40.55 89.09 98.58	NO Freq. [MHz] Ant Factor [dB] Cable loss [dB] Pream gain [dB] Reading [dBµV] Level [dBµV/m] Limit [dBµV/m] 1 5147.19 65 34.65 15.11 -40.55 52.41 61.62 74.00 2 5150.0000 34.65 15.08 -40.54 47.72 56.91 74.00 3 5178.34 34.68 15.36 -40.55 89.09 98.58 74.00	NO Freq. [MHz] Ant Factor [dB] Cable loss [dB] Pream gain [dB] Reading [dBµV] Level [dBµV/m] Limit [dBµV/m] Margin [dB] 1 5147.19 65 34.65 15.11 -40.55 52.41 61.62 74.00 12.38 2 5150.00 00 34.65 15.08 -40.54 47.72 56.91 74.00 17.09 3 5178.34 34.68 15.36 -40.55 89.09 98.58 74.00 -24.58	NO Freq. [MHz] Ant Factor [dB] Cable loss [dB] Pream gain [dB] Reading [dB]V/ Level [dB μ V/m] Limit [dB μ V/m] Margin [dB] Result 1 5147.19 65 34.65 15.11 -40.55 52.41 61.62 74.00 12.38 Pass 2 5150.0000 34.65 15.08 -40.54 47.72 56.91 74.00 17.09 Pass 3 5178.34 34.68 15.36 -40.55 89.09 98.58 74.00 -24.58 Pass	NOFreq. [MHz]Ant Factor [dB]Cable loss [dB]Pream gain [dB]Reading [dB μV]Level [dB μV]Limit [dB $\mu V/m$]Margin [dB]ResultPolarity1 5147.19 65 34.65 15.11 -40.55 52.41 61.62 74.00 12.38 Pass PassHorizontal2 5150.00 00 34.65 15.08 -40.54 47.72 56.91 74.00 17.09 Pass PassHorizontal3 5178.34 34.68 15.36 -40.55 89.09 98.58 74.00 -24.58 Pass PassHorizontal

Ì












Page 228 of 822

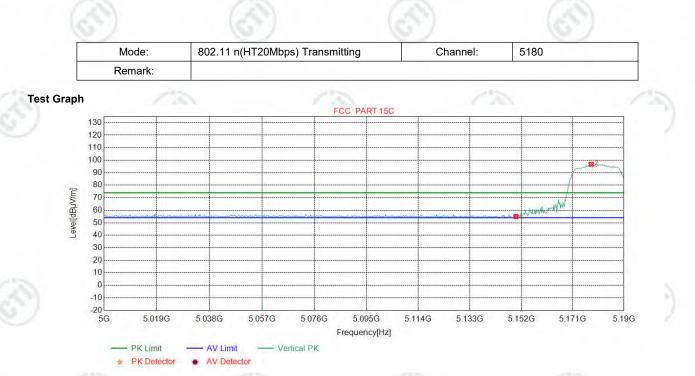


		1.00			1.00		1.2			1.00		
	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
À	1	5150.00 00	34.65	15.08	-40.54	45.74	54.93	74.00	19.07	Pass	Vertical	Peak
C	2	5177.87 23	34.68	15.35	-40.55	87.22	96.70	74.00	-22.70	Pass	Vertical	Peak





Page 229 of 822

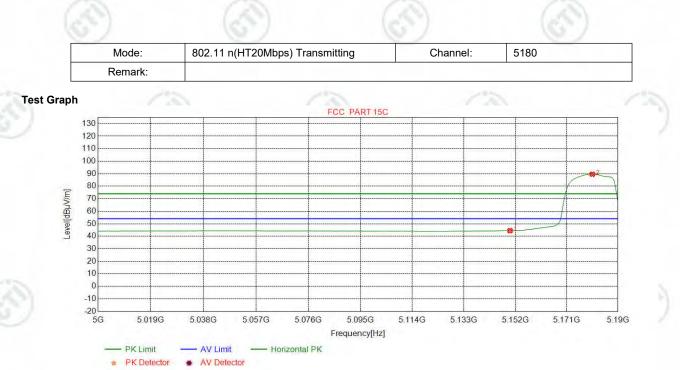


	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
Ż	1	5150.00 00	34.65	15.08	-40.54	35.28	44.47	54.00	9.53	Pass	Horizontal	Peak
Ľ	2	5180.48 81	34.68	15.38	-40.55	80.07	89.58	54.00	-35.58	Pass	Horizontal	Peak





Page 230 of 822

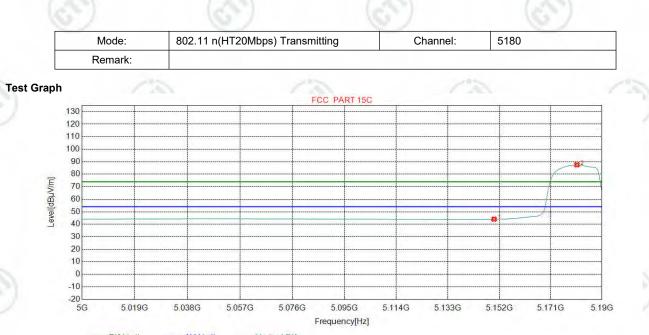


Susp	ected List			1.000							
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150.00 00	34.65	15.08	-40.54	34.91	44.10	54.00	9.90	Pass	Vertical	Peak
2	5180.72 59	34.68	15.38	-40.55	77.98	87.49	54.00	-33.49	Pass	Vertical	Peak





Page 231 of 822

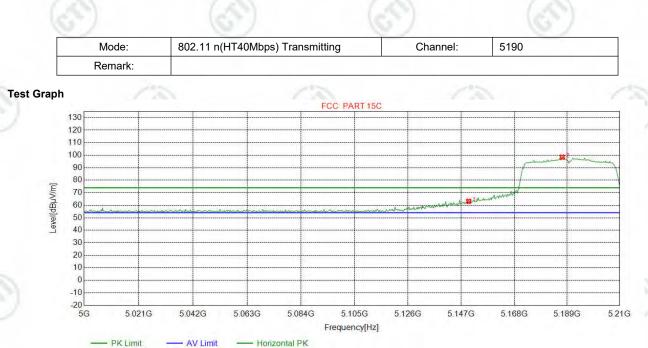



I	Suspe	ected List			1.00		1.1			1.0	A	
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
Ż	1	5150.00 00	34.65	15.08	-40.54	53.93	63.12	74.00	10.88	Pass	Horizontal	Peak
Ľ	2	5187.13 39	34.69	15.44	-40.55	88.93	98.51	74.00	-24.51	Pass	Horizontal	Peak





Page 232 of 822

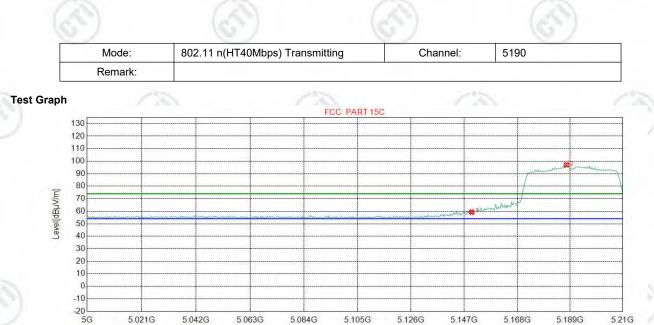



		1.20	V		1.40		1.2			1.40		
	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
2	1	5150.00 00	34.65	15.08	-40.54	50.12	59.31	74.00	14.69	Pass	Vertical	Peak
2	2	5187.65 96	34.69	15.45	-40.56	87.50	97.08	74.00	-23.08	Pass	Vertical	Peak





0 -10 -20 5G

5.021G


- PK Limit

5.042G

- AV Limit

Report No. : EED32L00167704

Page 233 of 822

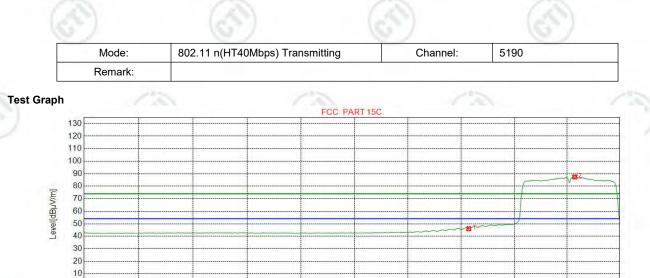

5.084G

- Horizontal PK

5.063G

Susp	ected List										
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150.00 00	34.65	15.08	-40.54	36.84	46.03	54.00	7.97	Pass	Horizontal	Peak
2	5192.12 77	34.69	15.49	-40.55	77.78	87.41	54.00	-33.41	Pass	Horizontal	Peak

5.105G

Frequency[Hz]


5.126G

5.147G

5.168G

5.189G

5.21G

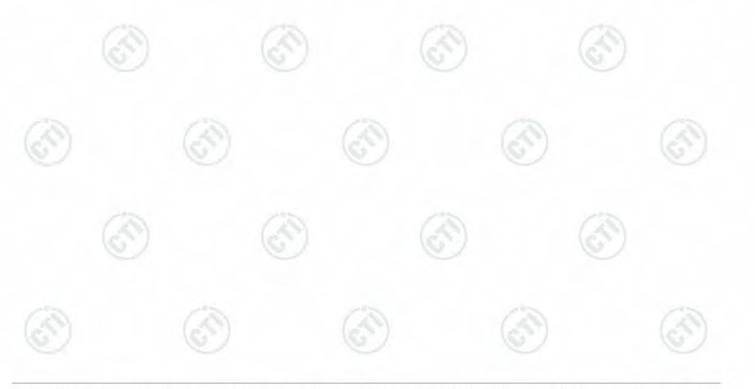



10 -10 -20 5G

5.021G

• PK Limit

PK Detector

5.042G

- AV Limit

* AV Detector


5.063G

5.084G

- Vertical PK

Report No. : EED32L00167704

Page 234 of 822

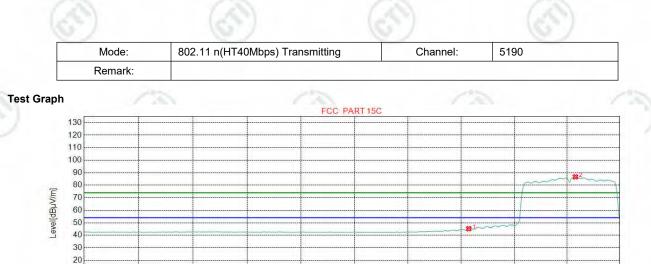

	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
2	1	5150.00 00	34.65	15.08	-40.54	36.05	45.24	54.00	8.76	Pass	Vertical	Peak
2	2	5192.39 05	34.69	15.50	-40.56	77.07	86.70	54.00	-32.70	Pass	Vertical	Peak

5.105G

Frequency[Hz]

5.126G

5.147G

5.168G


5.189G

5.21G






Page 235 of 822

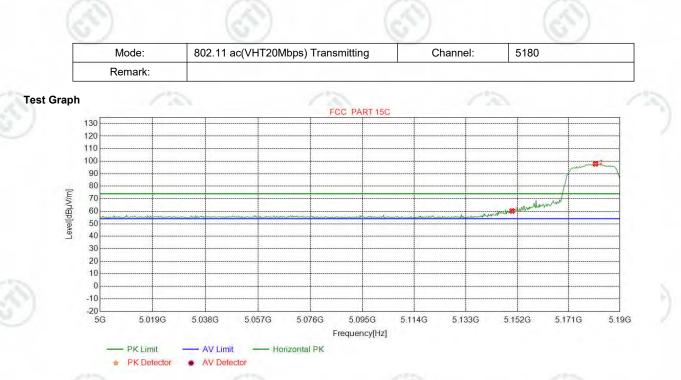


ſ	0	4 1 1 1 . 4	/		19.3			3 /		19.0	7	
ļ	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
ć	1	5150.00 00	34.65	15.08	-40.54	50.99	60.18	74.00	13.82	Pass	Horizontal	Peak
	2	5180.96 37	34.68	15.38	-40.55	88.30	97.81	74.00	-23.81	Pass	Horizontal	Peak

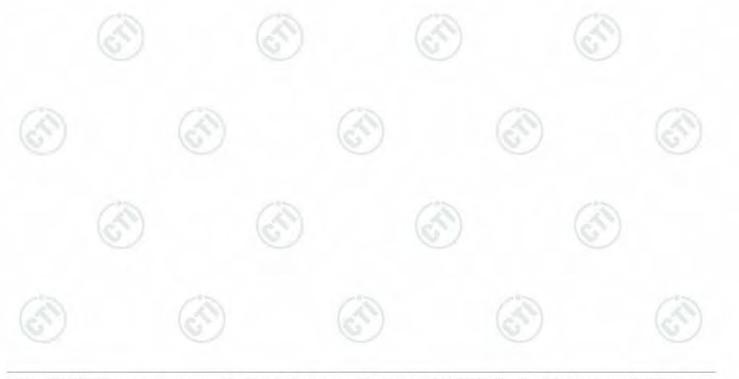




Page 236 of 822

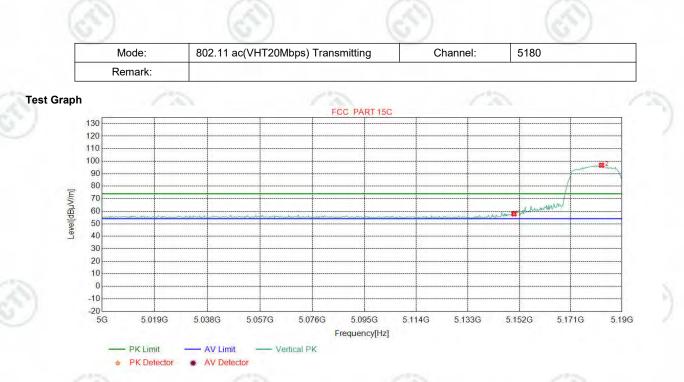

Susp	ected List	_		10.1			3 /		1.0.0	/	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150.00 00	34.65	15.08	-40.54	48.73	57.92	74.00	16.08	Pass	Vertical	Peak
2	5182.39 05	34.68	15.40	-40.55	87.26	96.79	74.00	-22.79	Pass	Vertical	Peak

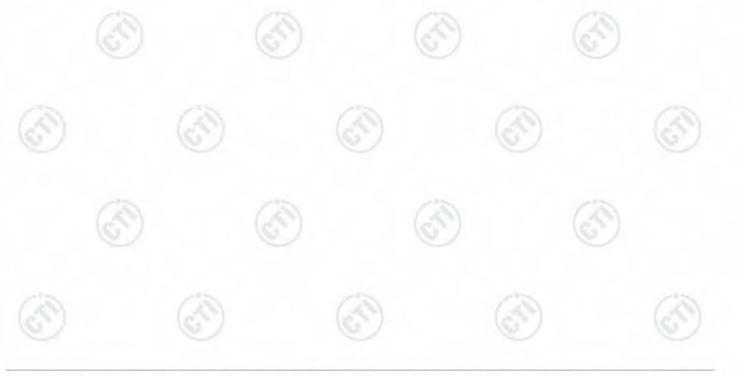




Page 237 of 822




L I	0	4 1 1 3 . 4			1.6					1.00	-	
_ L	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
3	1	5150.00 00	34.65	15.08	-40.54	35.52	44.71	54.00	9.29	Pass	Horizontal	Average
~	2	5180.48 81	34.68	15.38	-40.55	79.24	88.75	54.00	-34.75	Pass	Horizontal	Average

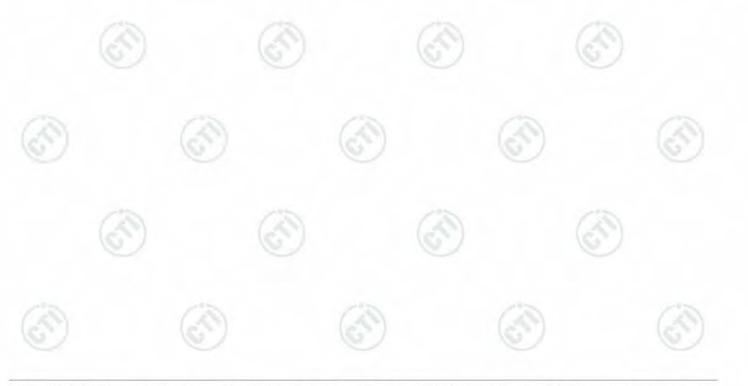



Page 238 of 822

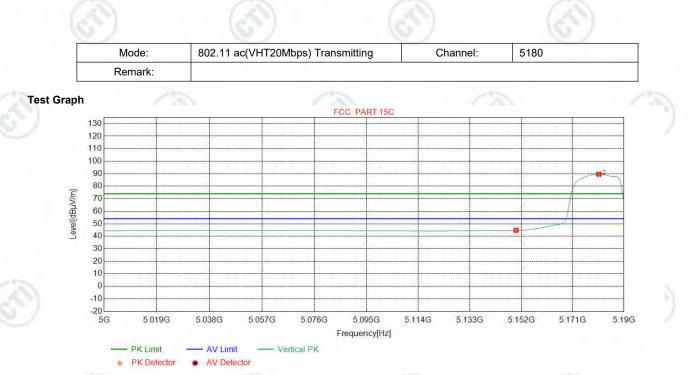


_		1.00	V		1.00		1.2			1.40		
	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
2	1	5150.00 00	34.65	15.08	-40.54	35.56	44.75	54.00	9.25	Pass	Vertical	Average
2	2	5180.72 59	34.68	15.38	-40.55	80.09	89.60	54.00	-35.60	Pass	Vertical	Average





Page 239 of 822

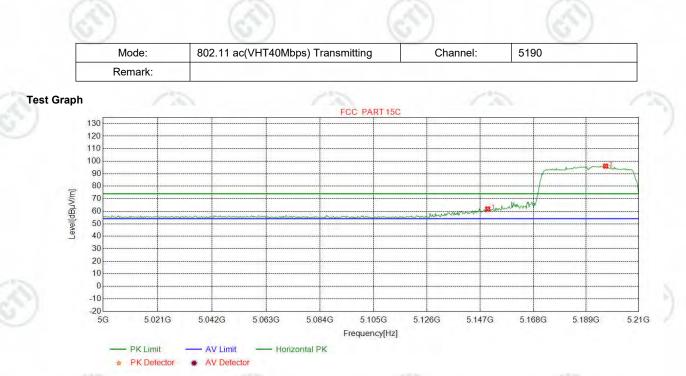


_		1.00	V		1.00		1.2			1.40		
	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
3	1	5150.00 00	34.65	15.08	-40.54	52.64	61.83	74.00	12.17	Pass	Horizontal	Peak
2	2	5196.85 86	34.70	15.54	-40.56	86.38	96.06	74.00	-22.06	Pass	Horizontal	Peak





Page 240 of 822

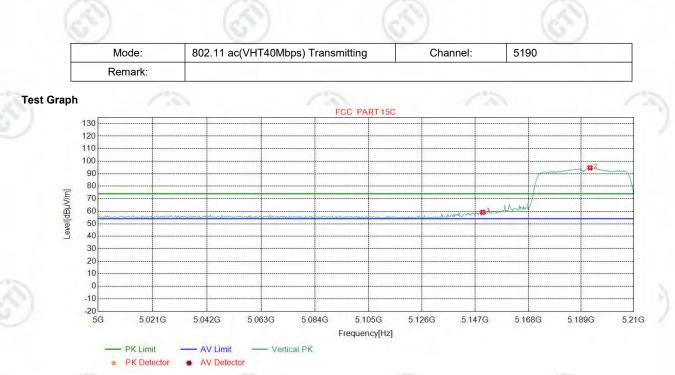


	_	1.00	L		1.00			S.21		1.00	1	
	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
2	1	5150.00 00	34.65	15.08	-40.54	49.97	59.16	74.00	14.84	Pass	Vertical	Peak
Ľ	2	5192.65 33	34.69	15.50	-40.55	85.05	94.69	74.00	-20.69	Pass	Vertical	Peak






Page 241 of 822

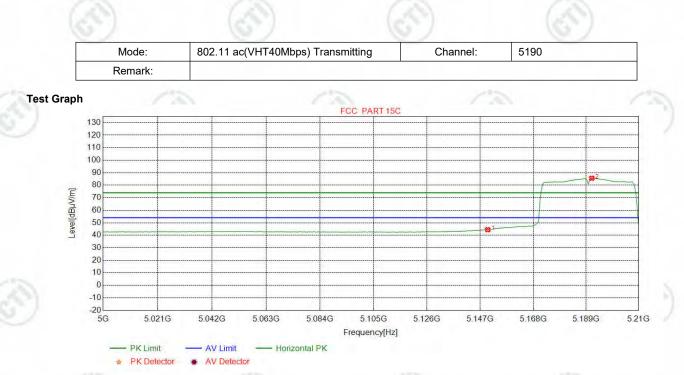


-		1.100	<u> </u>		1.00		1.1.2			1.42	A	
	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
3	1	5150.00 00	34.65	15.08	-40.54	35.28	44.47	54.00	9.53	Pass	Horizontal	Average
2	2	5191.33 92	34.69	15.49	-40.56	75.98	85.60	54.00	-31.60	Pass	Horizontal	Average

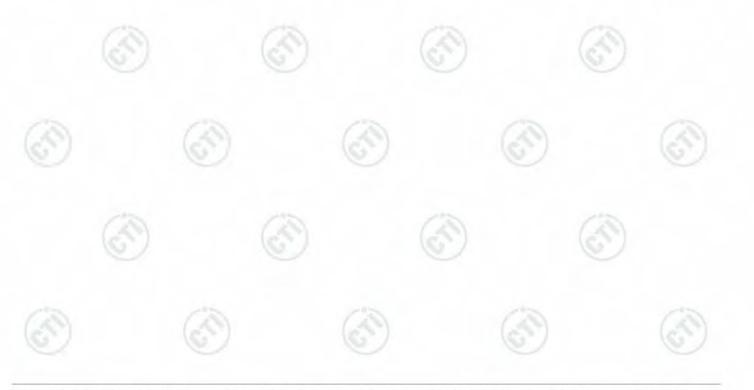



Page 242 of 822

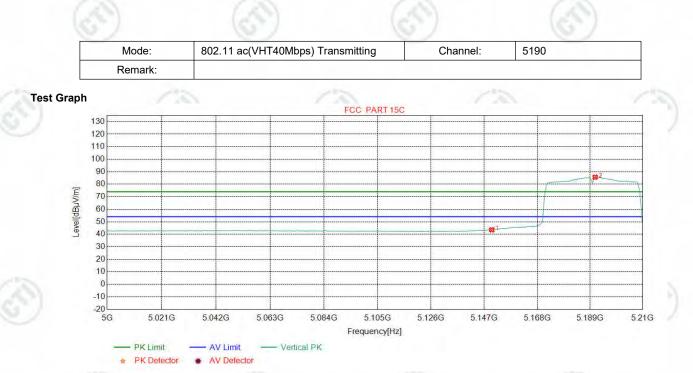


		1.00	V		1.43		1.1.2	(C)		1.63	1	
	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
3	1	5150.00 00	34.65	15.08	-40.54	34.36	43.55	54.00	10.45	Pass	Vertical	Average
2	2	5191.07 63	34.69	15.48	-40.55	76.02	85.64	54.00	-31.64	Pass	Vertical	Average





Page 243 of 822

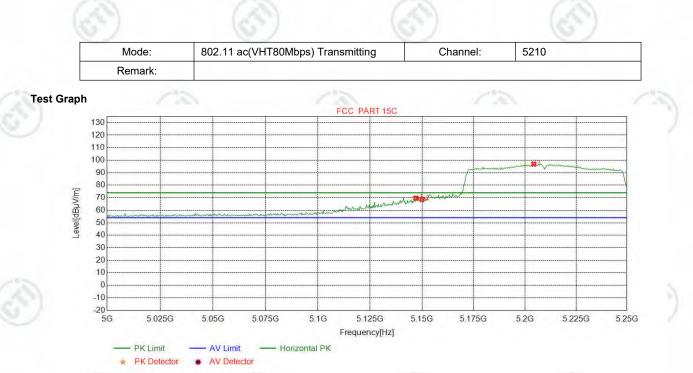


	Suspected List													
3	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark		
	1	5147.05 88	34.65	15.11	-40.55	60.46	69.67	74.00	4.33	Pass	Horizontal	Peak		
	2	5150.00 00	34.65	15.08	-40.54	59.42	68.61	74.00	5.39	Pass	Horizontal	Peak		
	3	5204.31 79	34.70	15.55	-40.55	87.20	96.90	74.00	-22.90	Pass	Horizontal	Peak		






Page 244 of 822

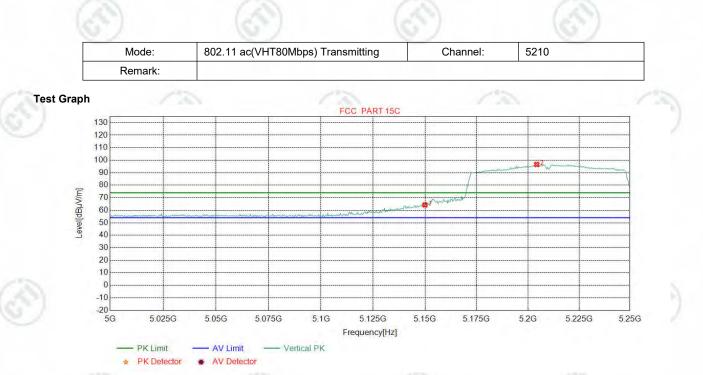


		1.00	V		1.00		1.1.2			1.40		
	Suspe	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
2	1	5150.00 00	34.65	15.08	-40.54	55.05	64.24	74.00	9.76	Pass	Vertical	Peak
2	2	5204.31 79	34.70	15.55	-40.55	86.93	96.63	74.00	-22.63	Pass	Vertical	Peak

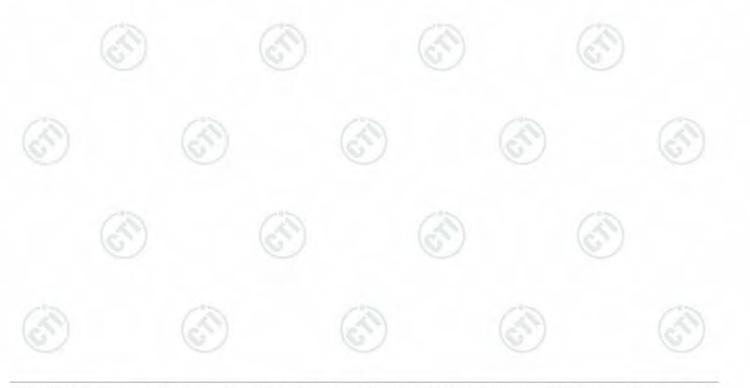



Page 245 of 822

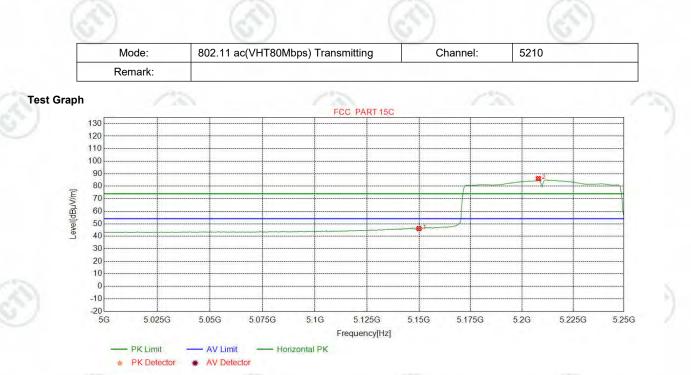


_		1.20			1.40		1.1			1.40		
	Susp	ected List										
	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
2	1	5150.00 00	34.65	15.08	-40.54	36.97	46.16	54.00	7.84	Pass	Horizontal	Average
2	2	5208.07 26	34.71	15.53	-40.56	76.38	86.06	54.00	-32.06	Pass	Horizontal	Average





Page 246 of 822

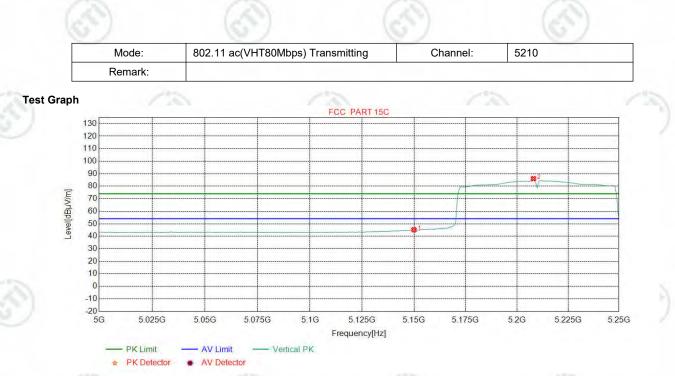

1	Susp	ected List	· · · · ·		10.1			3 /		10.0	/	
- 11	NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
ŝ	1	5150.00 00	34.65	15.08	-40.54	36.01	45.20	54.00	8.80	Pass	Vertical	Average
	2	5208.07 26	34.71	15.53	-40.56	76.36	86.04	54.00	-32.04	Pass	Vertical	Average

