



Test Report No.: RF200910N001-3



# TEST REPORT



Applicant	Linkplay Technology Inc.
Address	8F-8036, Qianren Building, No. 7, Yingcui Road, Jiangning District, Nanjing, China

Manufacturer or Supplier	N/A
Address	N/A
Product	Radio Module
Brand Name	Linkplay
Model	A98
Additional Model & Model Difference	N/A
Date of tests	Jul. 24, 2020 ~ Mar. 09, 2021

The submitted sample of the above equipment has been tested partially for according to the requirements of the following standards:

- FCC Part 15, Subpart C, Section 15.247**  
**For Radiated Emissions, Band Edge Measurement and Conducted Output power test items**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Mar. 11, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>2 MEASUREMENT UNCERTAINTY .....</b>	<b>5</b>
<b>3 GENERAL INFORMATION .....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF EUT .....	6
3.2 DESCRIPTION OF TEST MODES .....	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	7
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	9
3.4 DESCRIPTION OF SUPPORT UNITS .....	9
<b>4 TEST TYPES AND RESULTS.....</b>	<b>10</b>
4.1. RADIATED EMISSION MEASUREMENT .....	10
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	10
4.1.2 TEST INSTRUMENTS.....	11
4.1.3 TEST PROCEDURES .....	12
4.1.4 DEVIATION FROM TEST STANDARD .....	13
4.1.5 TEST SETUP.....	13
4.1.6 EUT OPERATING CONDITIONS .....	14
4.1.7 TEST RESULTS .....	15
4.2 CONDUCTED OUTPUT POWER.....	39
4.2.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	39
4.2.2 TEST SETUP.....	39
4.2.3 TEST INSTRUMENTS.....	39
4.2.4 TEST PROCEDURES .....	40
4.2.5 DEVIATION FROM TEST STANDARD .....	40
4.2.6 EUT OPERATING CONDITIONS .....	40
4.2.7 TEST RESULTS .....	41
4.3 OUT OF BAND EMISSION MEASUREMENT .....	45
4.3.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	45
4.3.2 TEST SETUP.....	45
4.3.3 TEST INSTRUMENTS.....	45
4.3.4 TEST PROCEDURE.....	45
4.3.5 DEVIATION FROM TEST STANDARD .....	46
4.3.6 EUT OPERATING CONDITION .....	46
4.3.7 TEST RESULTS .....	47



**BUREAU  
VERITAS**

**Test Report No.: RF200910N001-3**

<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>51</b>
<b>6</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>52</b>



Test Report No.: RF200910N001-3

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF200910N001-3	Original release	Mar. 11, 2021

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered by DC 5V
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	N/A	No Test
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	N/A	No Test
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

Note: The test items were required by client.

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.60dB
	1GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	5.00dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Radio Module
<b>BRAND</b>	Linkplay
<b>MODEL NO.</b>	A98
<b>ADDITIONAL NO.</b>	N/A
<b>FCC ID</b>	2ANOG-A98XX
<b>NOMINAL VOLTAGE</b>	DC 5V
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>OPERATING FREQUENCY</b>	2412MHz ~ 2462MHz for 11b/g/n(HT20)
<b>PEAK OUTPUT POWER</b>	67.608mW (Measured Maximum)
<b>ANTENNA TYPE</b>	<b>Home Antenna:</b> Chain 0: FPCB Antenna, 3.18dBi Gain Chain 1: FPCB Antenna, 3.07dBi Gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

#### NOTES:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
2. Please refer to the EUT photo document (Reference No.: 200910N001-1) for detailed product photo.
3. The EUT incorporates a SISO function for 2.4GHz Wi-Fi, without beam forming.

MODULATION MODE	FUNCTION
802.11b	2 Chains (SISO)
802.11g	2 Chains (SISO)
802.11n (HT20)	2 Chains (SISO)

\* 2.4 GHz WIFI provided a SISO function, the Radiated Emissions and Band Edge Measurement tests are carried out on the maximum power "Chain 1" antenna.

### 3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

#### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
<b>A</b>	√	√	-	√	<b>Powered By DC 5V</b>

Where **RE<1G**: Radiated Emission below 1GHz  
**RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission  
**APCM**: Antenna Port Conducted Measurement

#### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1	DSSS	DBPSK	1.0

For the test results, only the worst case was shown in test report.

**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 59%RH	DC 5V from base support	Bryant
RE≥1G	25deg. C, 53%RH	DC 5V from base support	Hu
PLC	-	-	-
APCM	25deg. C, 60%RH	DC 5V from base support	Daniel



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**  
**KDB 558074 D01 15.247 Meas Guidance v05r02**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Base support	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Cable: Unshielded, Detachable, 1.2m

## 4 TEST TYPES AND RESULTS

### 4.1. RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTES:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 17,21
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 13, 21
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 29,21
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 14,21
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	May 29,21
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 29,21
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	May 09, 21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 22,21
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	May 08,21
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Mar. 03,21
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A

**NOTES:**

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTES:


1. The resolution bandwidth of test receiver/spectrum analyzer is 200Hz for Quasi-peak detection (QP) at radiated spurious emission frequency below 0.15MHz; The resolution bandwidth of test receiver/spectrum analyzer is 9KHz for Quasi-peak detection (QP) at radiated spurious emission frequency below 30MHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at radiated spurious emission frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

#### 4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.1.5 TEST SETUP

##### Below 30MHz test setup

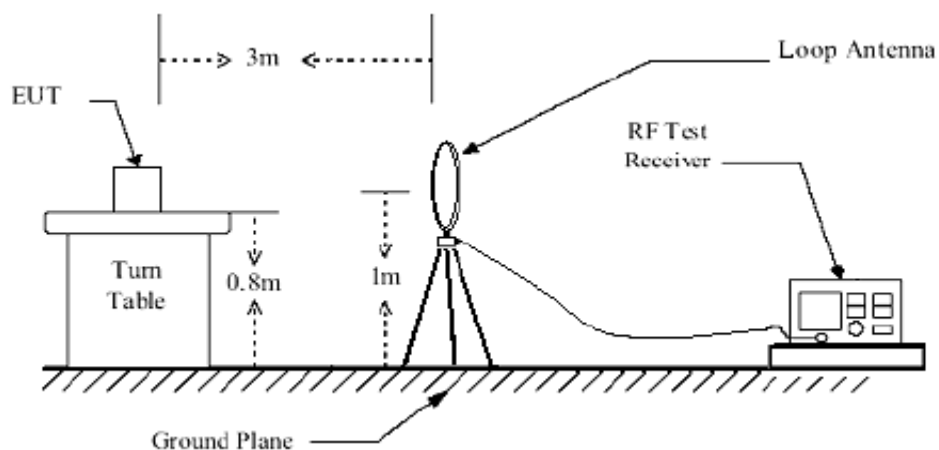


##### Below 1GHz test setup

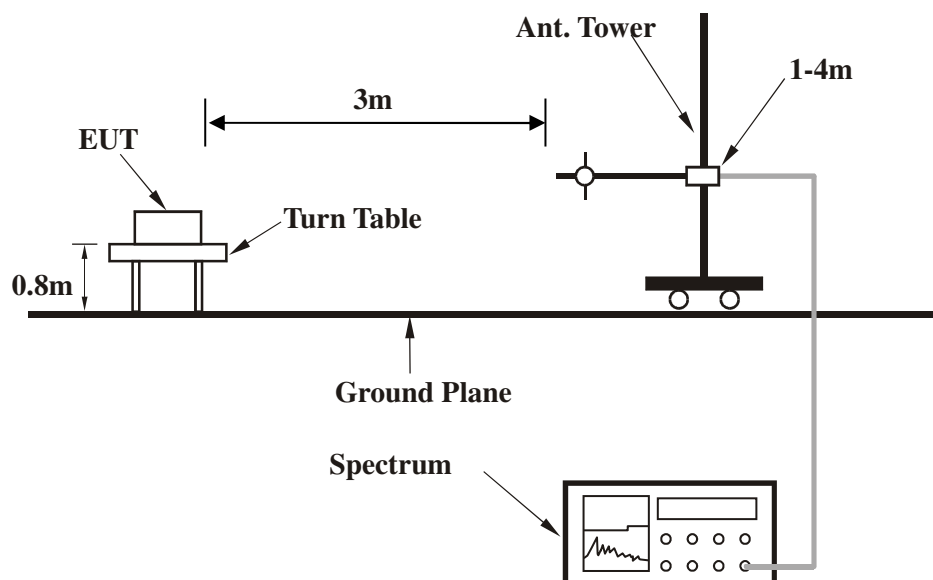

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

### Above 1GHz test setup

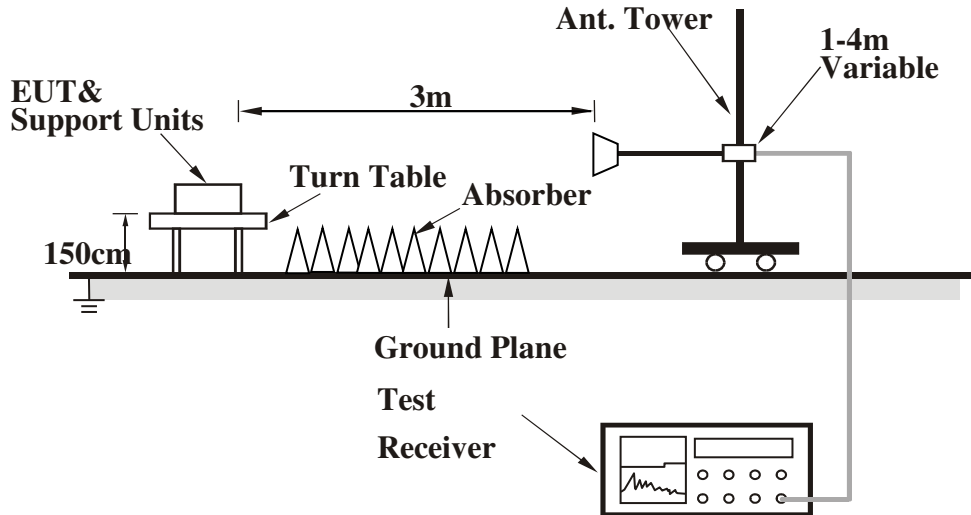

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.

### 4.1.7 TEST RESULTS


#### BELOW 30MHz WORST-CASE DATA:

802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak, 200Hz
<b>FREQUENCY RANGE</b>	9 -150KHz		

ANTENNA POLARITY & TEST DISTANCE: PARALLEL AT 3M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01020	-10.05	75.33	65.28	127.42	-62.14	100	256
2	0.01280	-10.21	67.47	57.26	125.47	-68.21	100	246
3	0.01790	-10.51	69.62	59.11	122.56	-63.45	100	243
4	0.03330	-11.30	60.46	49.16	117.17	-68.01	100	256
5	0.06070	-11.59	71.75	60.16	111.95	-51.79	100	272
6	0.10500	-11.79	73.36	61.57	107.18	-45.61	100	100
7	0.12130	-11.82	66.86	55.04	105.92	-50.88	100	270


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.009-0.15MHz.
  4. Only emissions significantly above equipment noise floor are reported.

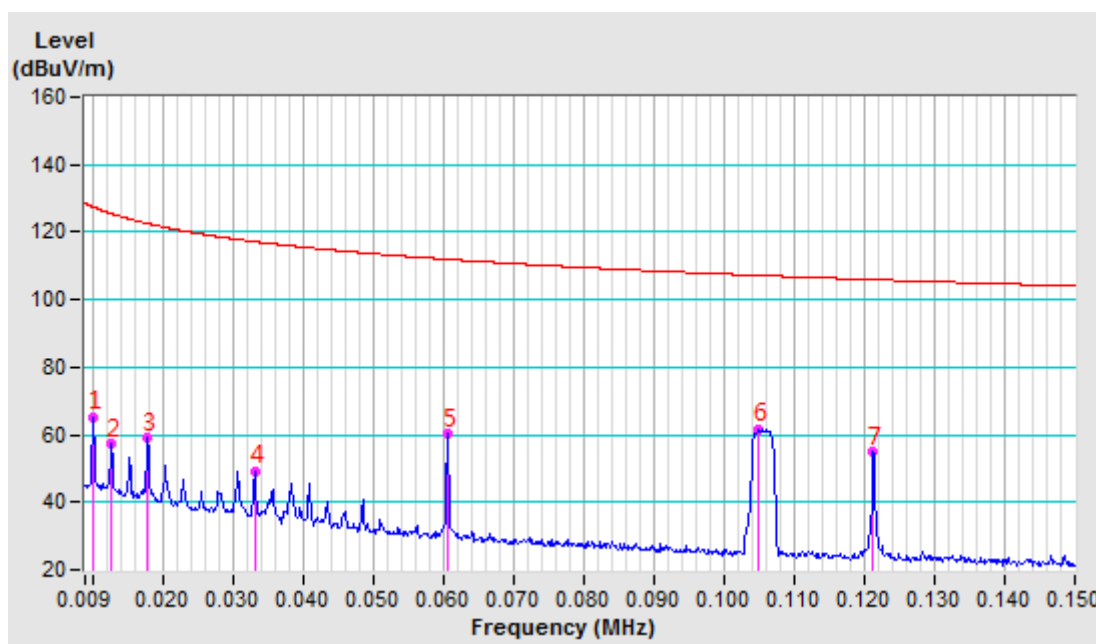

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak, 200Hz
<b>FREQUENCY RANGE</b>	150KHz-30MHz		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: PARALLEL AT 3M</b>								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.18130	-11.94	60.88	48.94	102.43	-53.49	100	278
2	1.09030	-12.02	37.38	25.36	67.49	-42.13	100	296
3	4.00980	-11.94	30.22	18.28	69.54	-51.26	100	348
4	8.65920	-11.83	29.42	17.59	69.54	-51.95	100	360
5	11.12340	-11.75	29.54	17.79	69.54	-51.75	100	53
6	15.60860	-11.55	30.95	19.40	69.54	-50.14	100	355

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.15-30MHz.
  4. Only emissions significantly above equipment noise floor are reported.

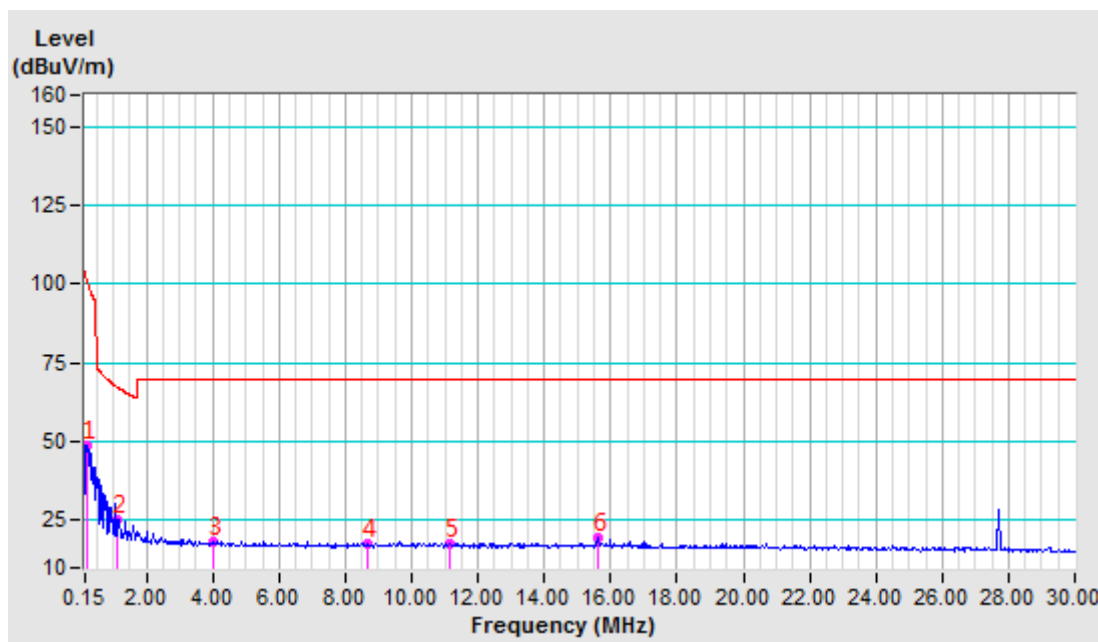




<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak, 200Hz
<b>FREQUENCY RANGE</b>	9 -150KHz		

ANTENNA POLARITY & TEST DISTANCE: PERPENDICYLARL AT 3M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01020	-10.05	70.07	60.02	127.40	-67.38	100	163
2	0.01790	-10.51	62.21	51.70	122.56	-70.86	100	318
3	0.03070	-11.26	54.08	42.82	117.85	-75.03	100	176
4	0.04090	-11.42	50.86	39.44	115.37	-75.93	100	192
5	0.06060	-11.59	64.56	52.97	111.95	-58.98	100	192
6	0.10570	-11.79	69.15	57.36	107.12	-49.76	100	181
7	0.12130	-11.82	59.67	47.85	105.93	-58.08	100	194


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.009-0.15MHz.
  4. Only emissions significantly above equipment noise floor are reported.

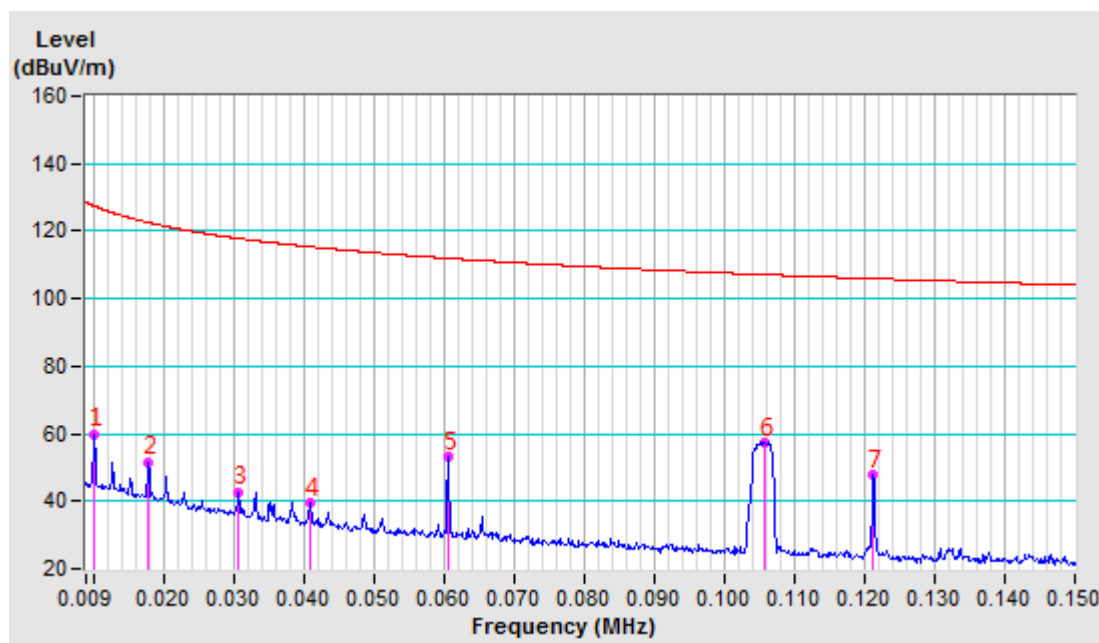

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak, 200Hz
<b>FREQUENCY RANGE</b>	150KHz-30MHz		

ANTENNA POLARITY & TEST DISTANCE: PERPENDICYLARL AT 3M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.31570	-12.16	54.37	42.21	97.62	-55.41	100	184
2	1.38290	-12.04	35.53	23.49	65.62	-42.13	100	360
3	6.29190	-11.96	30.12	18.16	69.54	-51.38	100	213
4	12.26520	-11.71	30.00	18.29	69.54	-51.25	100	65
5	15.52050	-11.55	29.29	17.74	69.54	-51.80	100	36
6	18.93850	-11.47	28.83	17.36	69.54	-52.18	100	220

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.15-30MHz
  4. Only emissions significantly above equipment noise floor are reported.

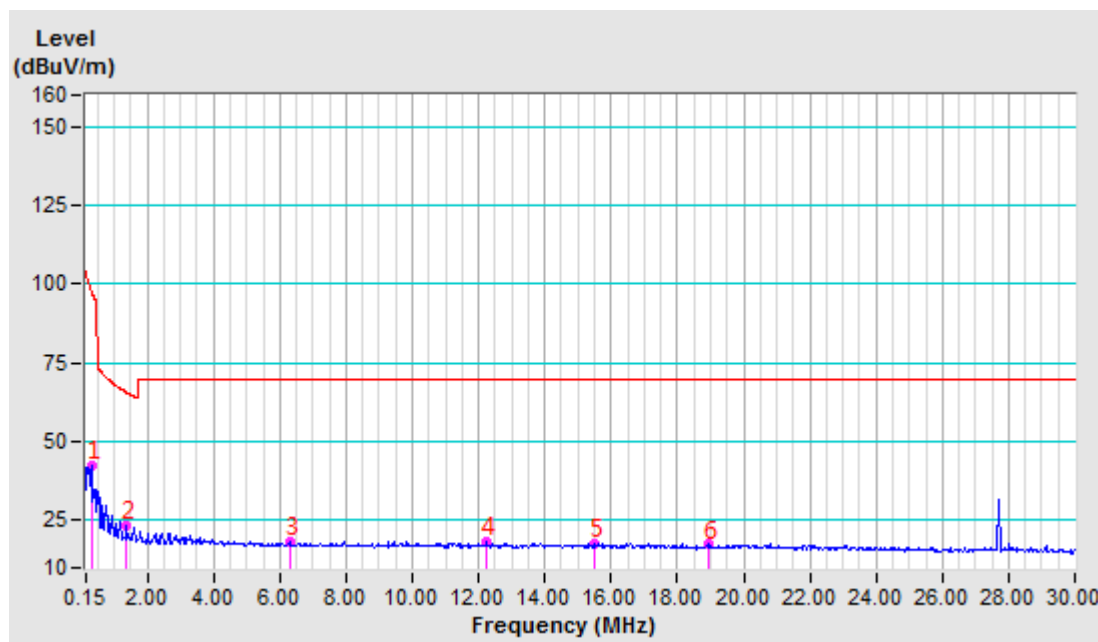

**BELOW 1GHz WORST-CASE DATA:**


**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	263.17	29.42 QP	46.00	-16.58	1.00 H	118	45.16	-15.74
2	311.36	32.00 QP	46.00	-14.00	1.00 H	200	45.93	-13.93
3	359.55	27.26 QP	46.00	-18.74	1.00 H	67	39.67	-12.41
4	407.74	29.10 QP	46.00	-16.90	1.00 H	173	40.47	-11.37
5	455.93	27.66 QP	46.00	-18.34	1.00 H	188	38.04	-10.38
6	532.10	24.42 QP	46.00	-21.58	1.00 H	100	32.89	-8.47

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.

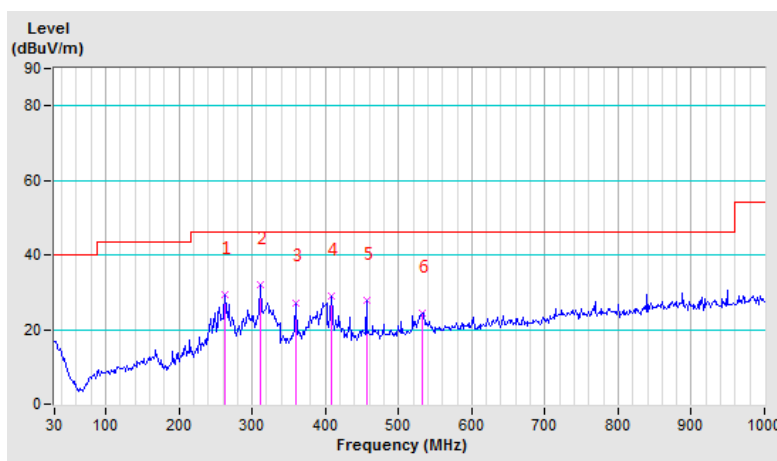


<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	311.36	26.03 QP	46.00	-19.97	1.00 V	242	39.96	-13.93
2	407.74	29.26 QP	46.00	-16.74	1.00 V	197	40.63	-11.37
3	455.93	33.29 QP	46.00	-12.71	1.00 V	165	43.67	-10.38
4	533.65	28.21 QP	46.00	-17.79	1.00 V	180	36.61	-8.40
5	880.30	32.14 QP	46.00	-13.86	1.00 V	274	34.62	-2.48
6	948.70	36.89 QP	46.00	-9.11	1.00 V	219	38.47	-1.58

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.

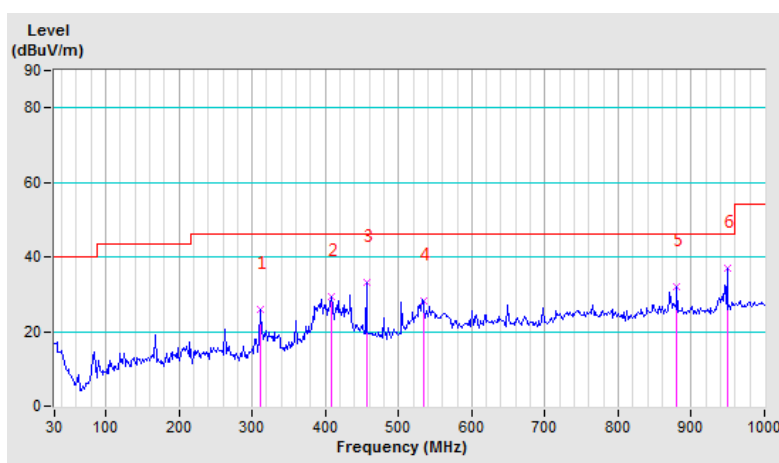

**ABOVE 1GHz DATA**

**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.38 PK	74.00	-26.62	1.00 H	20	43.85	3.53
2	2390.00	36.60 AV	54.00	-17.40	1.00 H	20	33.07	3.53
3	*2412.00	103.59 PK			1.00 H	20	99.94	3.65
4	*2412.00	96.29 AV			1.00 H	20	92.64	3.65
5	4824.00	50.14 PK	74.00	-23.86	1.00 H	0	42.09	8.05
6	4824.00	36.60 AV	54.00	-17.40	1.00 H	0	28.55	8.05
7	#7236.00	56.17 PK	74.00	-17.83	1.00 H	0	42.60	13.57
8	#7236.00	44.80 AV	54.00	-9.20	1.00 H	0	31.23	13.57

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**


NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.36 PK	74.00	-24.64	1.00 V	120	45.83	3.53
2	2390.00	38.90 AV	54.00	-15.10	1.00 V	120	35.37	3.53
3	*2412.00	101.28 PK			1.00 V	120	97.63	3.65
4	*2412.00	95.03 AV			1.00 V	120	91.38	3.65
5	4824.00	49.34 PK	74.00	-24.66	1.00 V	0	41.29	8.05
6	4824.00	36.00 AV	54.00	-18.00	1.00 V	0	27.95	8.05
7	#7236.00	56.14 PK	74.00	-17.86	1.00 V	0	42.57	13.57
8	#7236.00	44.20 AV	54.00	-9.80	1.00 V	0	30.63	13.57

**REMARKS:**


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

**Test Plot**

**2412MHz Horizontal**

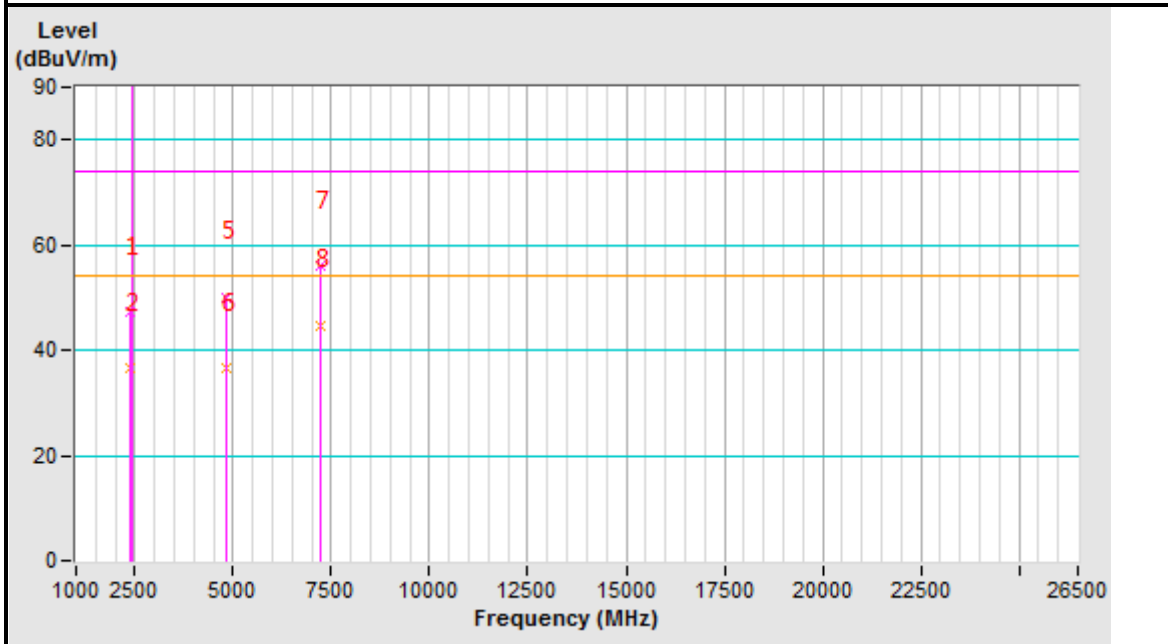

**2412MHz Vertical**

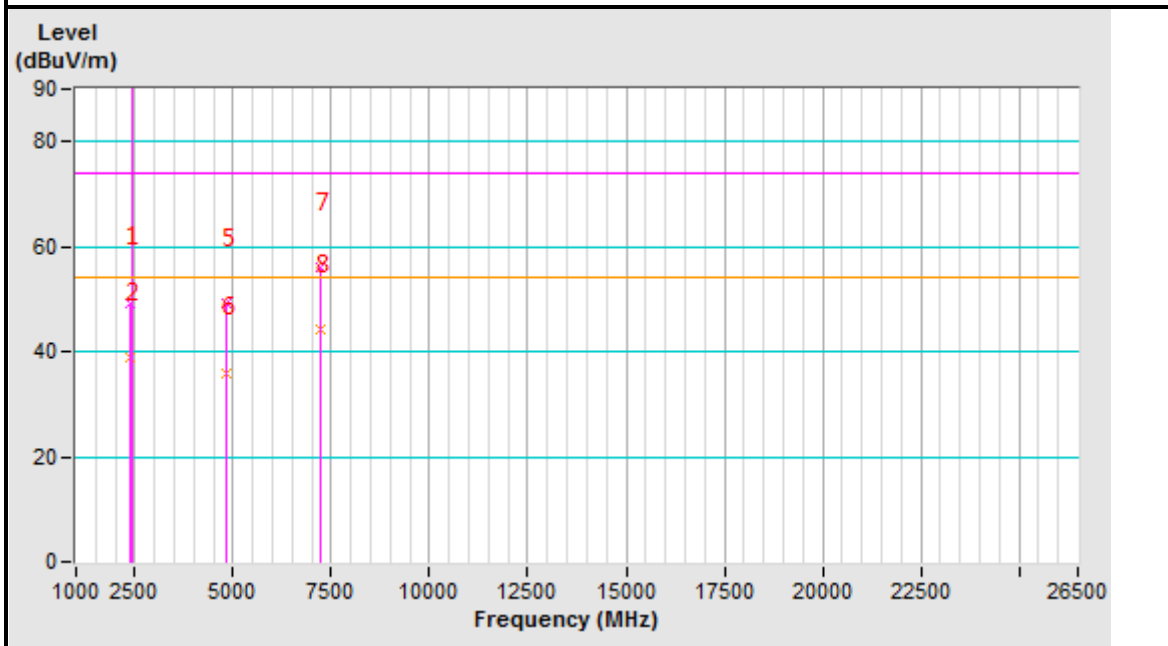


<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.82 PK			1.00 H	56	101.05	3.77
2	*2437.00	97.12 AV			1.00 H	56	93.35	3.77
3	4874.00	50.12 PK	74.00	-23.88	1.00 H	0	41.89	8.23
4	4874.00	36.90 AV	54.00	-17.10	1.00 H	0	28.67	8.23
5	7311.00	55.92 PK	74.00	-18.08	1.00 H	0	42.12	13.80
6	7311.00	44.12 AV	54.00	-9.88	1.00 H	0	30.32	13.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.23 PK			1.00 V	0	96.46	3.77
2	*2437.00	94.02 AV			1.00 V	0	90.25	3.77
3	4874.00	48.12 PK	74.00	-25.88	1.00 V	0	39.89	8.23
4	4874.00	35.50 AV	54.00	-18.50	1.00 V	0	27.27	8.23
5	7311.00	56.13 PK	74.00	-17.87	1.00 V	0	42.33	13.80
6	7311.00	44.70 AV	54.00	-9.30	1.00 V	0	30.90	13.80

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

Test Plot

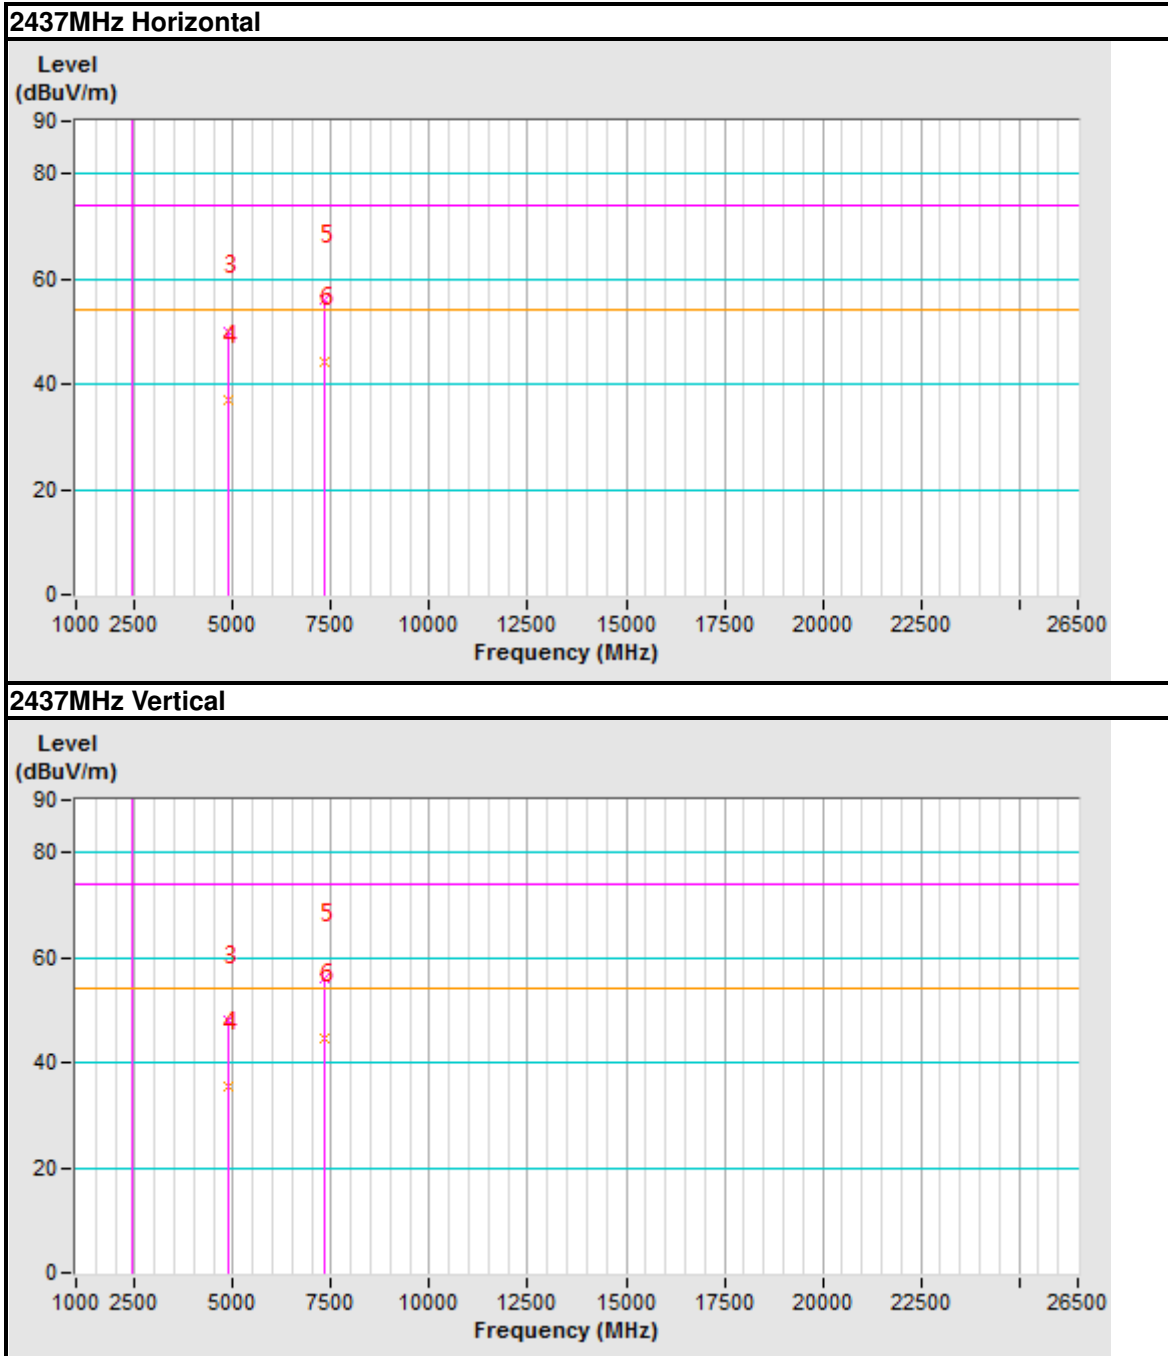



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.89 PK			1.00 H	25	102.00	3.89
2	*2462.00	95.10 AV			1.00 H	25	91.21	3.89
3	2483.50	52.64 PK	74.00	-21.36	1.00 H	25	48.64	4.00
4	2483.50	44.50 AV	54.00	-9.50	1.00 H	25	40.50	4.00
5	4924.00	49.20 PK	74.00	-24.80	1.00 H	0	40.80	8.40
6	4924.00	36.21 AV	54.00	-17.79	1.00 H	0	27.81	8.40
7	7386.00	55.46 PK	74.00	-18.54	1.00 H	0	41.43	14.03
8	7386.00	43.50 AV	54.00	-10.50	1.00 H	0	29.47	14.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.89 PK			1.00 V	25	99.00	3.89
2	*2462.00	95.90 AV			1.00 V	25	92.01	3.89
3	2483.50	50.24 PK	74.00	-23.76	1.00 V	25	46.24	4.00
4	2483.50	43.20 AV	54.00	-10.80	1.00 V	25	39.20	4.00
5	4924.00	48.90 PK	74.00	-25.10	1.00 V	0	40.50	8.40
6	4924.00	35.40 AV	54.00	-18.60	1.00 V	0	27.00	8.40
7	7386.00	55.46 PK	74.00	-18.54	1.00 V	0	41.43	14.03
8	7386.00	43.60 AV	54.00	-10.40	1.00 V	0	29.57	14.03

**REMARKS:**


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency.

**Test Plot**

**2462MHz Horizontal**

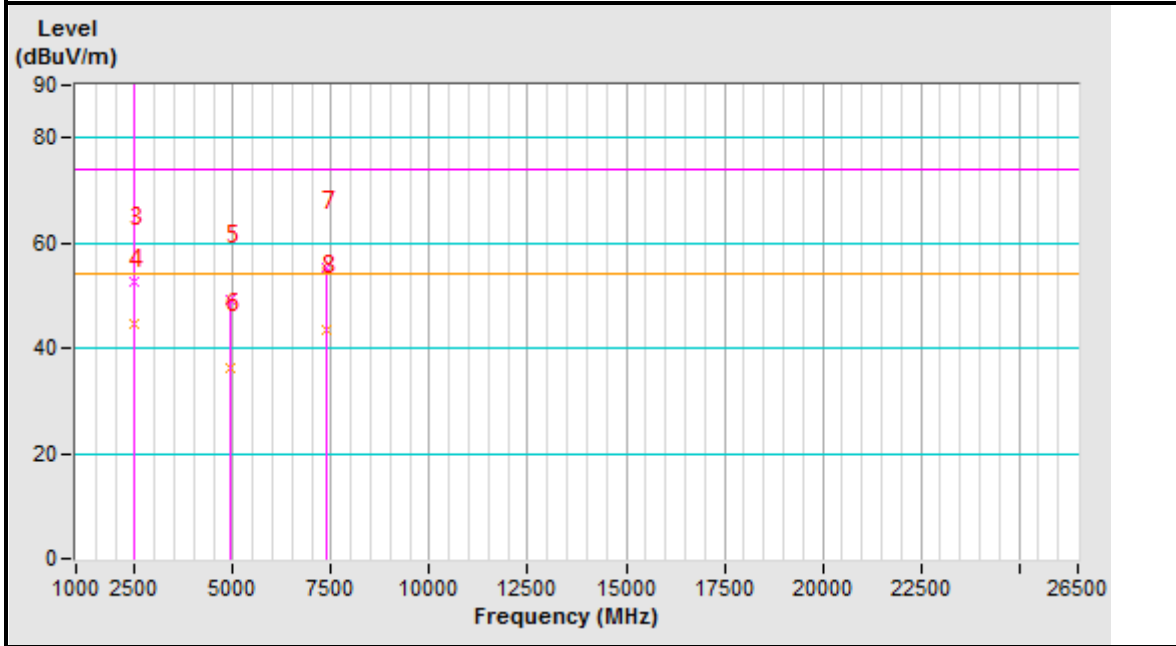

**2462MHz Vertical**

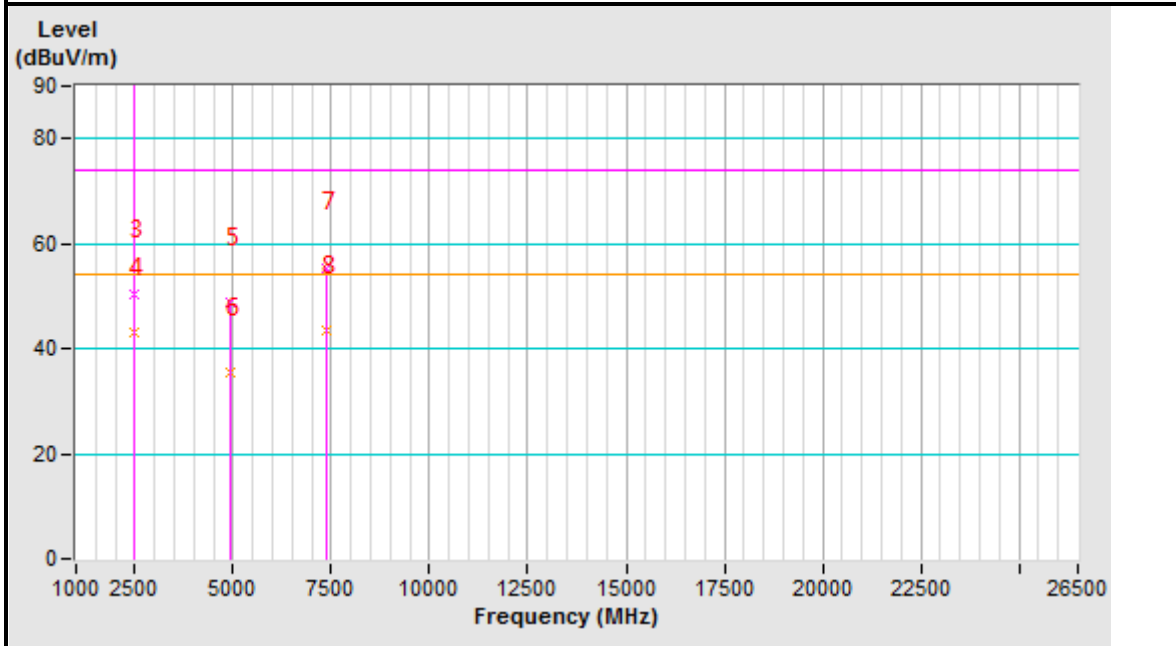



**BUREAU  
VERITAS**

**Test Report No.: RF200910N001-3**

802.11g


<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.70 PK	74.00	-8.30	1.00 H	212	62.17	3.53
2	2390.00	44.63 AV	54.00	-9.37	1.00 H	212	41.10	3.53
3	*2412.00	104.64 PK			1.00 H	212	100.99	3.65
4	*2412.00	90.11 AV			1.00 H	212	86.46	3.65
5	4824.00	50.36 PK	74.00	-23.64	1.00 H	0	42.31	8.05
6	4824.00	37.80 AV	54.00	-16.20	1.00 H	0	29.75	8.05
7	#7236.00	56.92 PK	74.00	-17.08	1.00 H	0	43.35	13.57
8	#7236.00	44.90 AV	54.00	-9.10	1.00 H	0	31.33	13.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.39 PK	74.00	-10.61	1.00 V	36	59.86	3.53
2	2390.00	43.90 AV	54.00	-10.10	1.00 V	36	40.37	3.53
3	*2412.00	103.62 PK			1.00 V	36	99.97	3.65
4	*2412.00	91.20 AV			1.00 V	36	87.55	3.65
5	4824.00	50.14 PK	74.00	-23.86	1.00 V	0	42.09	8.05
6	4824.00	37.00 AV	54.00	-17.00	1.00 V	0	28.95	8.05
7	#7236.00	55.92 PK	74.00	-18.08	1.00 V	0	42.35	13.57
8	#7236.00	44.80 AV	54.00	-9.20	1.00 V	0	31.23	13.57

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Test Plot

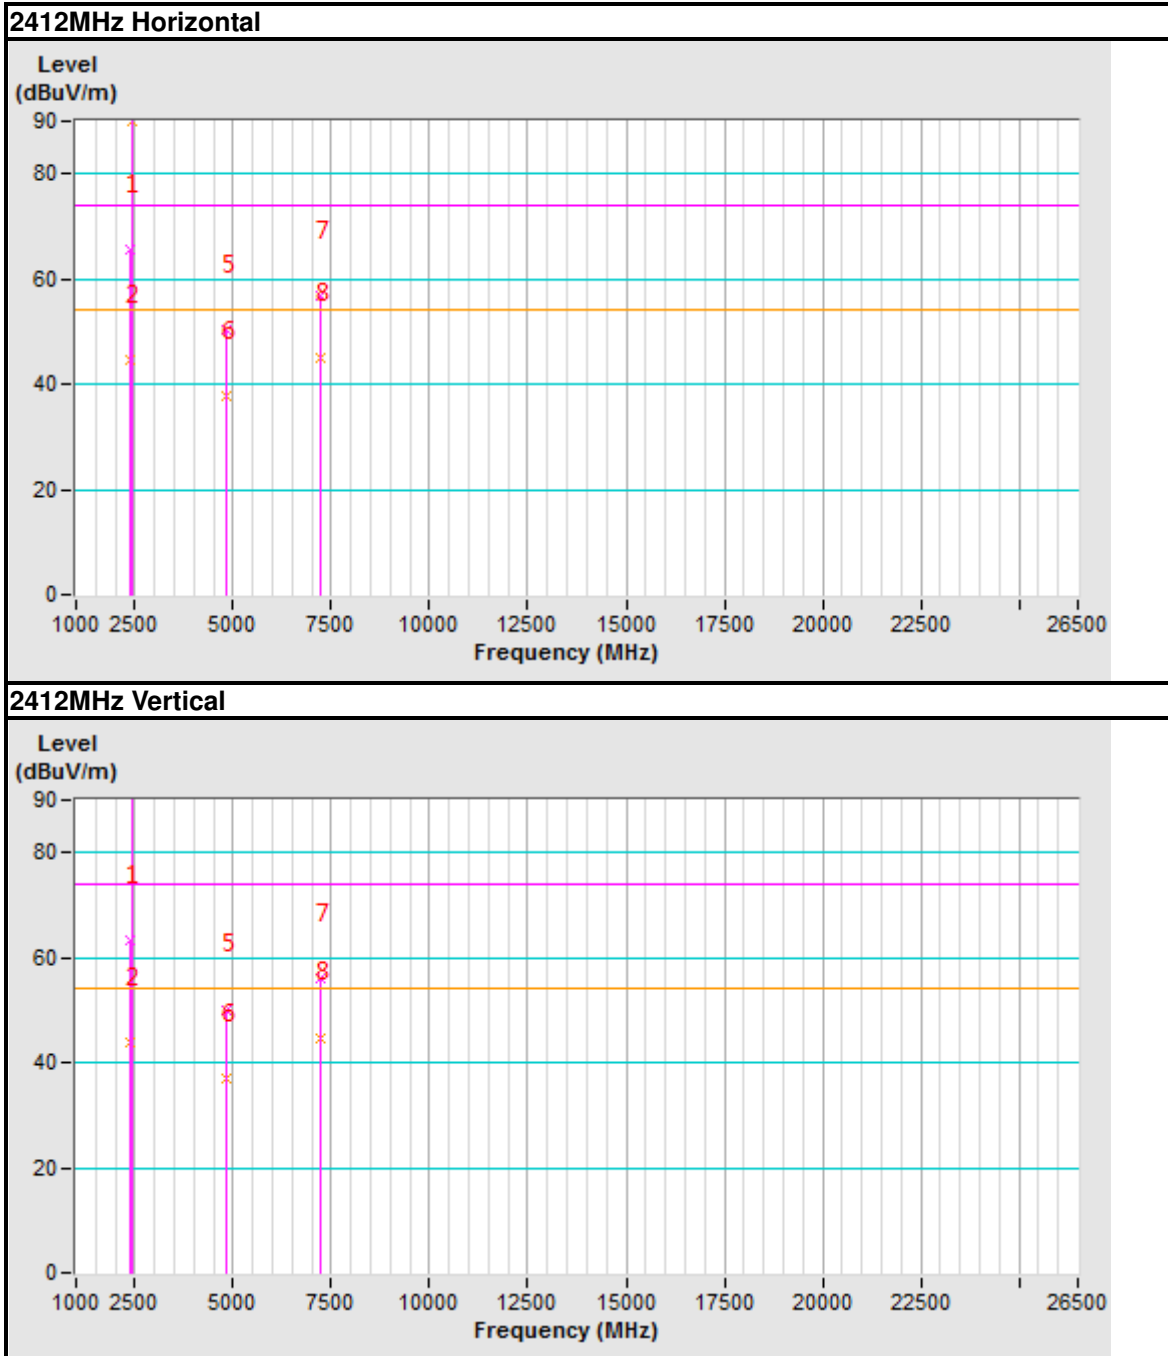


<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.64 PK			1.00 H	0	101.87	3.77
2	*2437.00	91.25 AV			1.00 H	0	87.48	3.77
3	4874.00	50.23 PK	74.00	-23.77	1.00 H	0	42.00	8.23
4	4874.00	36.12 AV	54.00	-17.88	1.00 H	0	27.89	8.23
5	7311.00	55.39 PK	74.00	-18.61	1.00 H	0	41.59	13.80
6	7311.00	44.90 AV	54.00	-9.10	1.00 H	0	31.10	13.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.05 PK			1.00 V	0	99.28	3.77
2	*2437.00	89.20 AV			1.00 V	0	85.43	3.77
3	4874.00	50.32 PK	74.00	-23.68	1.00 V	0	42.09	8.23
4	4874.00	39.60 AV	54.00	-14.40	1.00 V	0	31.37	8.23
5	7311.00	56.12 PK	74.00	-17.88	1.00 V	0	42.32	13.80
6	7311.00	44.71 AV	54.00	-9.29	1.00 V	0	30.91	13.80

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

Test Plot

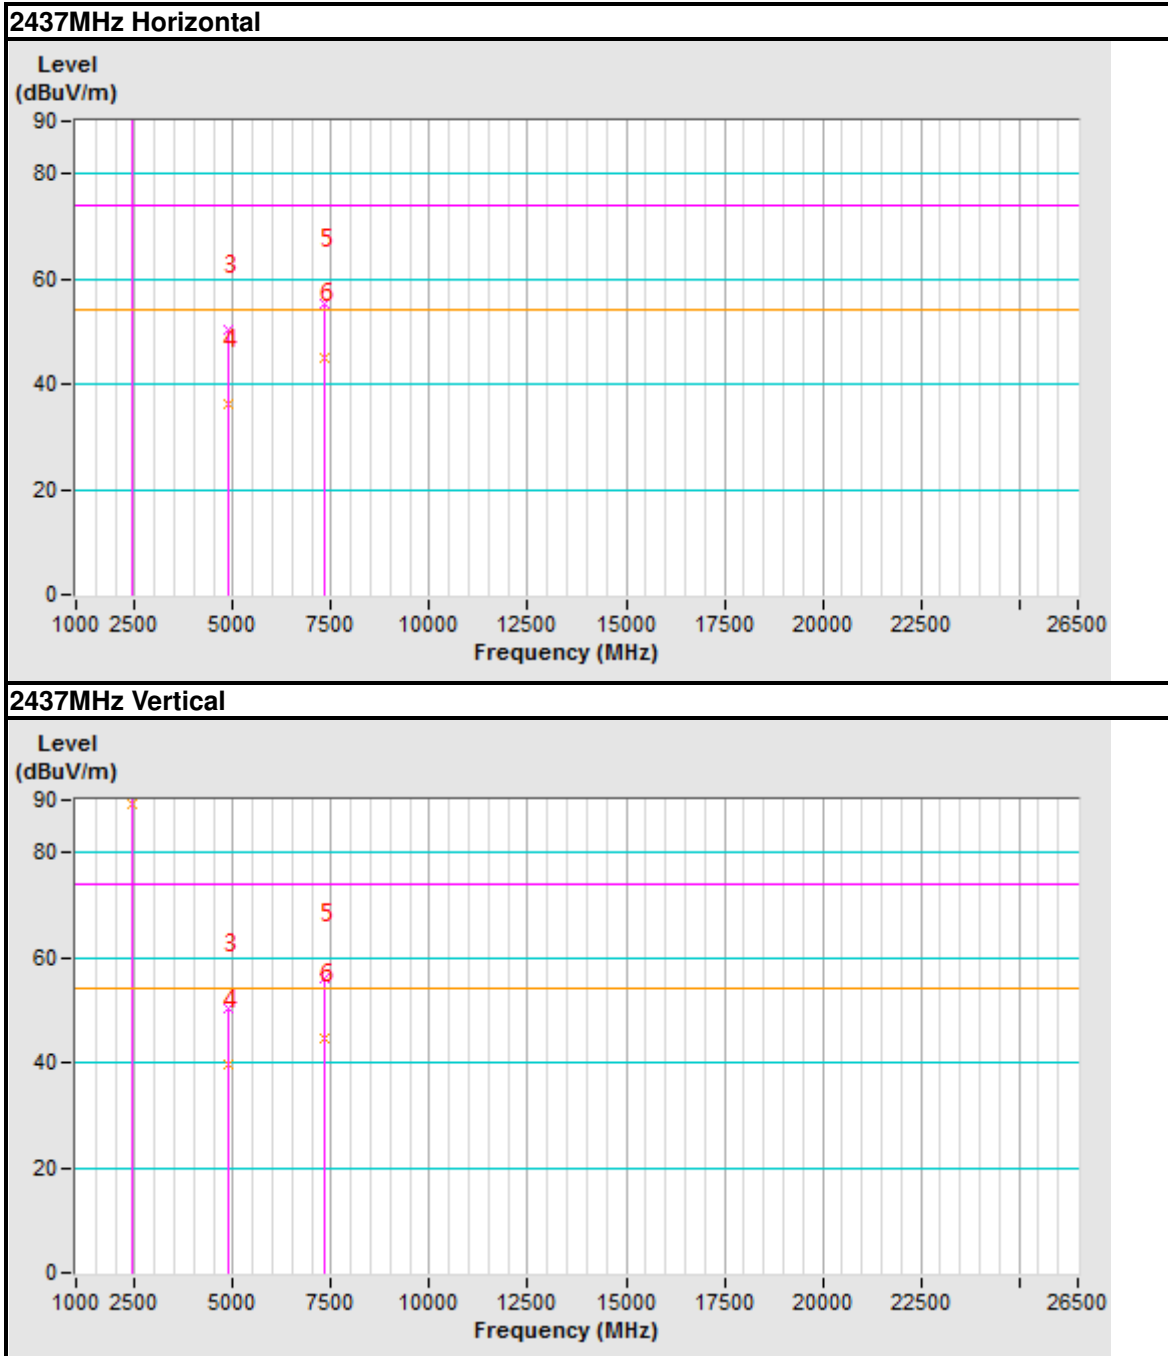


<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.48 PK			1.00 H	320	103.59	3.89
2	*2462.00	92.91 AV			1.00 H	320	89.02	3.89
3	2483.50	70.25 PK	74.00	-3.75	1.00 H	320	66.25	4.00
4	2483.50	48.72 AV	54.00	-5.28	1.00 H	320	44.72	4.00
5	4924.00	50.39 PK	74.00	-23.61	1.00 H	0	41.99	8.40
6	4924.00	38.90 AV	54.00	-15.10	1.00 H	0	30.50	8.40
7	7386.00	56.29 PK	74.00	-17.71	1.00 H	0	42.26	14.03
8	7386.00	44.10 AV	54.00	-9.90	1.00 H	0	30.07	14.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.97 PK			1.00 V	50	101.08	3.89
2	*2462.00	90.60 AV			1.00 V	50	86.71	3.89
3	2483.50	68.96 PK	74.00	-5.04	1.00 V	50	64.96	4.00
4	2483.50	47.00 AV	54.00	-7.00	1.00 V	50	43.00	4.00
5	4924.00	50.32 PK	74.00	-23.68	1.00 V	0	41.92	8.40
6	4924.00	37.62 AV	54.00	-16.38	1.00 V	0	29.22	8.40
7	7386.00	56.18 PK	74.00	-17.82	1.00 V	0	42.15	14.03
8	7386.00	45.00 AV	54.00	-9.00	1.00 V	0	30.97	14.03

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

Test Plot

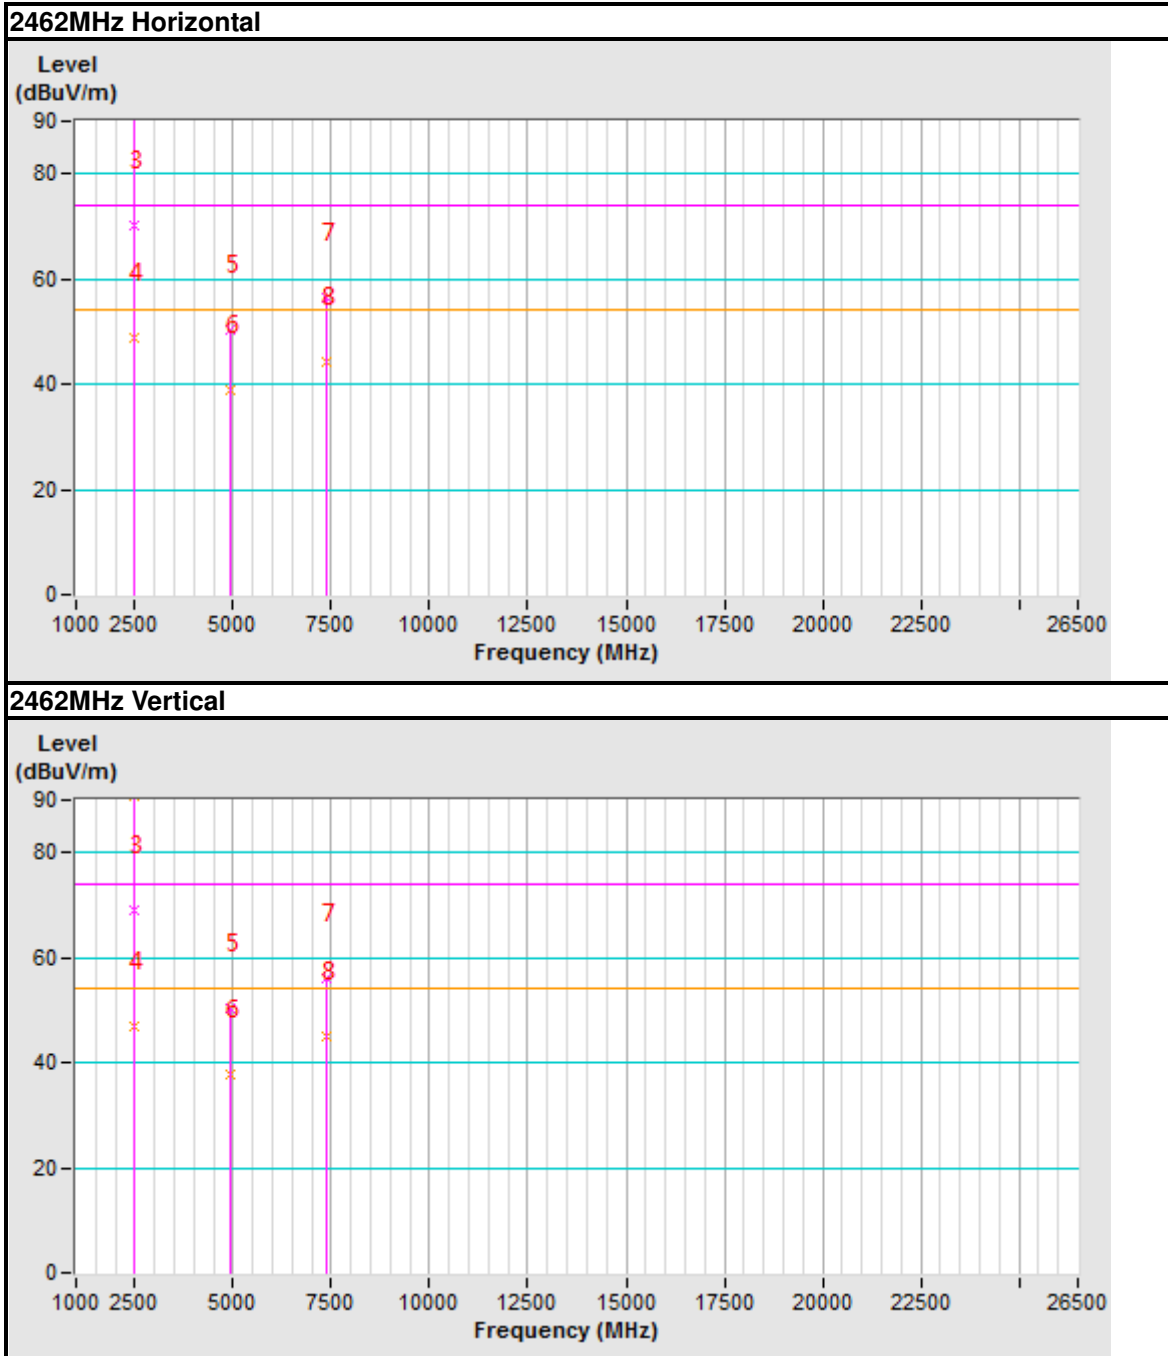





802.11n HT20


<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.73 PK	74.00	-9.27	1.00 H	221	61.20	3.53
2	2390.00	44.15 AV	54.00	-9.85	1.00 H	221	40.62	3.53
3	*2412.00	105.15 PK			1.00 H	221	101.50	3.65
4	*2412.00	89.63 AV			1.00 H	221	85.98	3.65
5	4824.00	59.93 PK	74.00	-14.07	1.00 H	0	51.88	8.05
6	4824.00	36.80 AV	54.00	-17.20	1.00 H	0	28.75	8.05
7	#7236.00	55.91 PK	74.00	-18.09	1.00 H	0	42.34	13.57
8	#7236.00	44.39 AV	54.00	-9.61	1.00 H	0	30.82	13.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.68 PK	74.00	-11.32	1.00 V	24	59.15	3.53
2	2390.00	43.90 AV	54.00	-10.10	1.00 V	24	40.37	3.53
3	*2412.00	103.40 PK			1.00 V	24	99.75	3.65
4	*2412.00	89.04 AV			1.00 V	24	85.39	3.65
5	4824.00	51.32 PK	74.00	-22.68	1.00 V	0	43.27	8.05
6	4824.00	40.21 AV	54.00	-13.79	1.00 V	0	32.16	8.05
7	#7236.00	55.94 PK	74.00	-18.06	1.00 V	0	42.37	13.57
8	#7236.00	44.81 AV	54.00	-9.19	1.00 V	0	31.24	13.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**Test Plot**

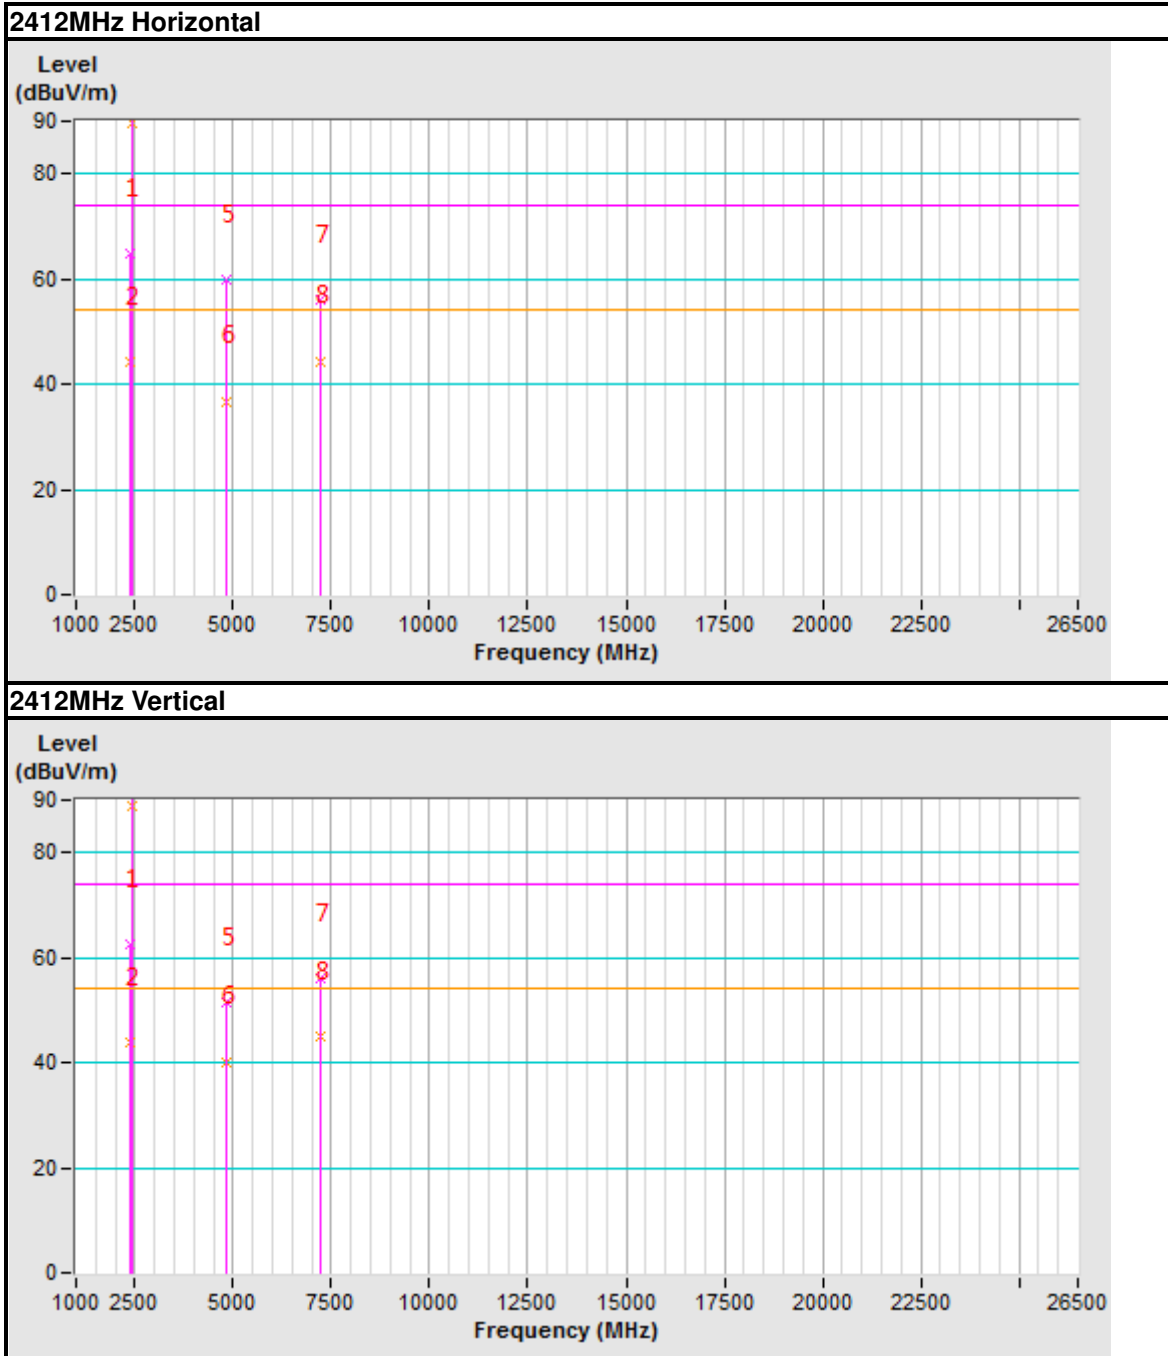


<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.64 PK			1.00 H	52	101.87	3.77
2	*2437.00	89.97 AV			1.00 H	52	86.20	3.77
3	4874.00	49.36 PK	74.00	-24.64	1.00 H	0	41.13	8.23
4	4874.00	36.10 AV	54.00	-17.90	1.00 H	0	27.87	8.23
5	7311.00	56.12 PK	74.00	-17.88	1.00 H	0	42.32	13.80
6	7311.00	45.20 AV	54.00	-8.80	1.00 H	0	31.40	13.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.24 PK			1.00 V	0	99.47	3.77
2	*2437.00	88.78 AV			1.00 V	0	85.01	3.77
3	4874.00	50.32 PK	74.00	-23.68	1.00 V	0	42.09	8.23
4	4874.00	38.71 AV	54.00	-15.29	1.00 V	0	30.48	8.23
5	7311.00	56.39 PK	74.00	-17.61	1.00 V	0	42.59	13.80
6	7311.00	46.21 AV	54.00	-7.79	1.00 V	0	32.41	13.80

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

Test Plot

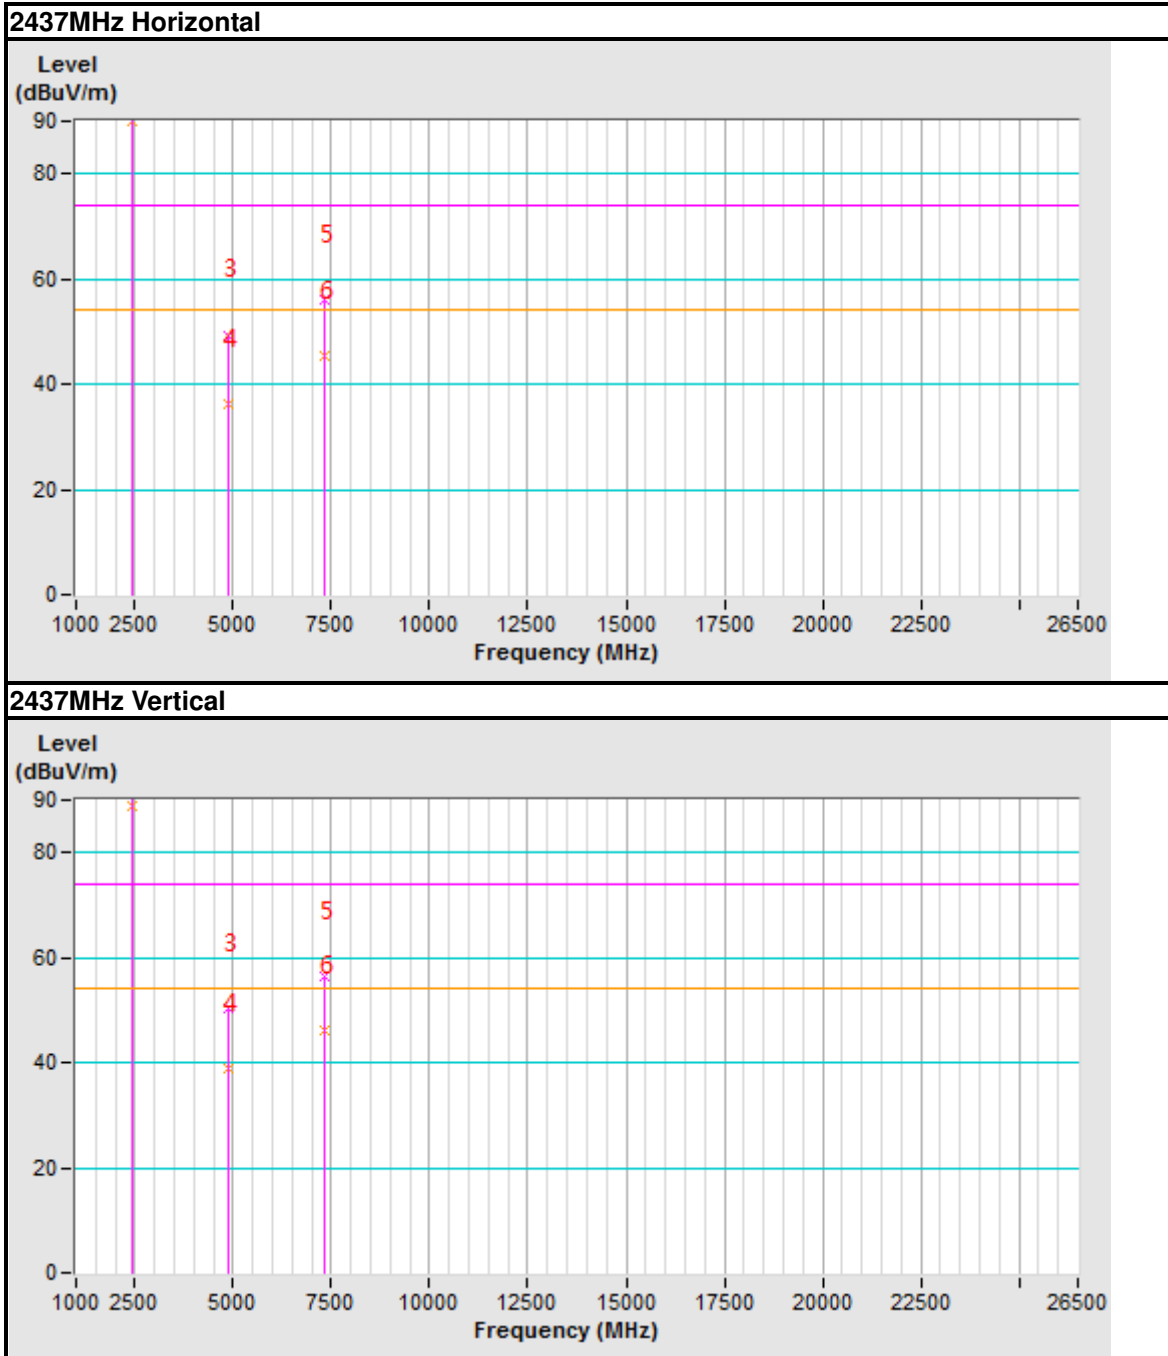



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.02 PK			1.00 H	210	102.13	3.89
2	*2462.00	91.05 AV			1.00 H	210	87.16	3.89
3	2483.50	70.70 PK	74.00	-3.30	1.00 H	210	66.70	4.00
4	2483.50	43.53 AV	54.00	-10.47	1.00 H	210	39.53	4.00
5	4924.00	50.32 PK	74.00	-23.68	1.00 H	0	41.92	8.40
6	4924.00	38.30 AV	54.00	-15.70	1.00 H	0	29.90	8.40
7	7386.00	55.88 PK	74.00	-18.12	1.00 H	0	41.85	14.03
8	7386.00	44.26 AV	54.00	-9.74	1.00 H	0	30.23	14.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.42 PK			1.00 V	110	98.53	3.89
2	*2462.00	89.30 AV			1.00 V	110	85.41	3.89
3	2483.50	69.38 PK	74.00	-4.62	1.00 V	110	65.38	4.00
4	2483.50	42.90 AV	54.00	-11.10	1.00 V	110	38.90	4.00
5	4924.00	50.02 PK	74.00	-23.98	1.00 V	0	41.62	8.40
6	4924.00	36.18 AV	54.00	-17.82	1.00 V	0	27.78	8.40
7	7386.00	56.29 PK	74.00	-17.71	1.00 V	0	42.26	14.03
8	7386.00	45.50 AV	54.00	-8.50	1.00 V	0	31.47	14.03

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency.

Test Plot

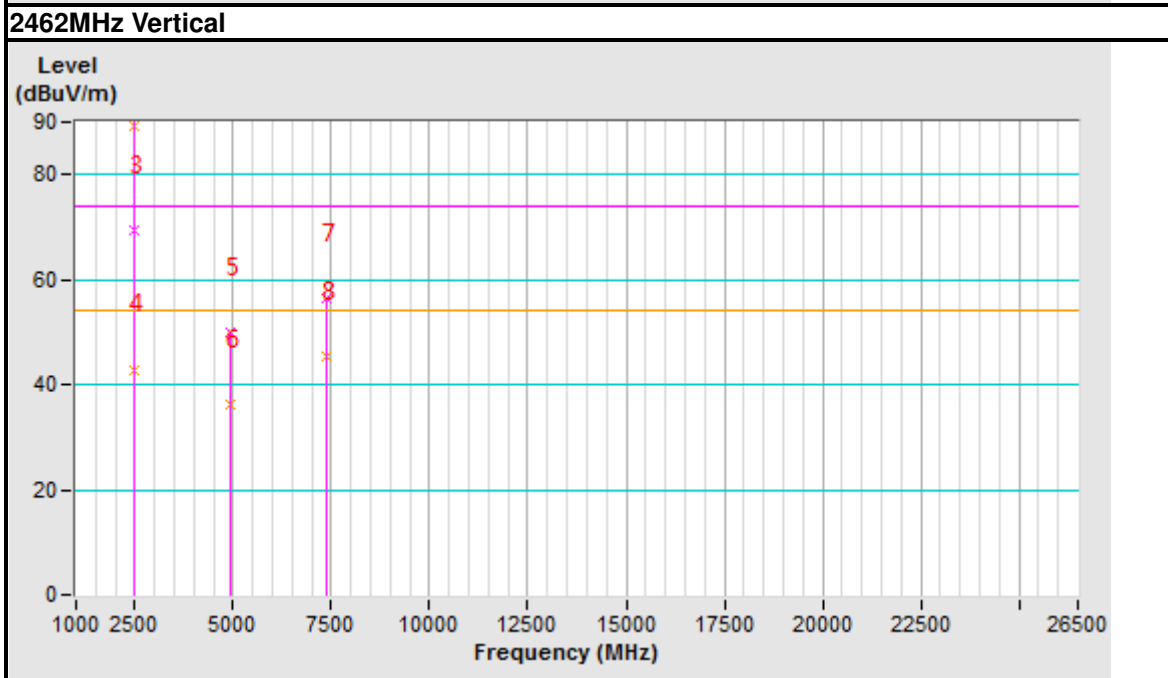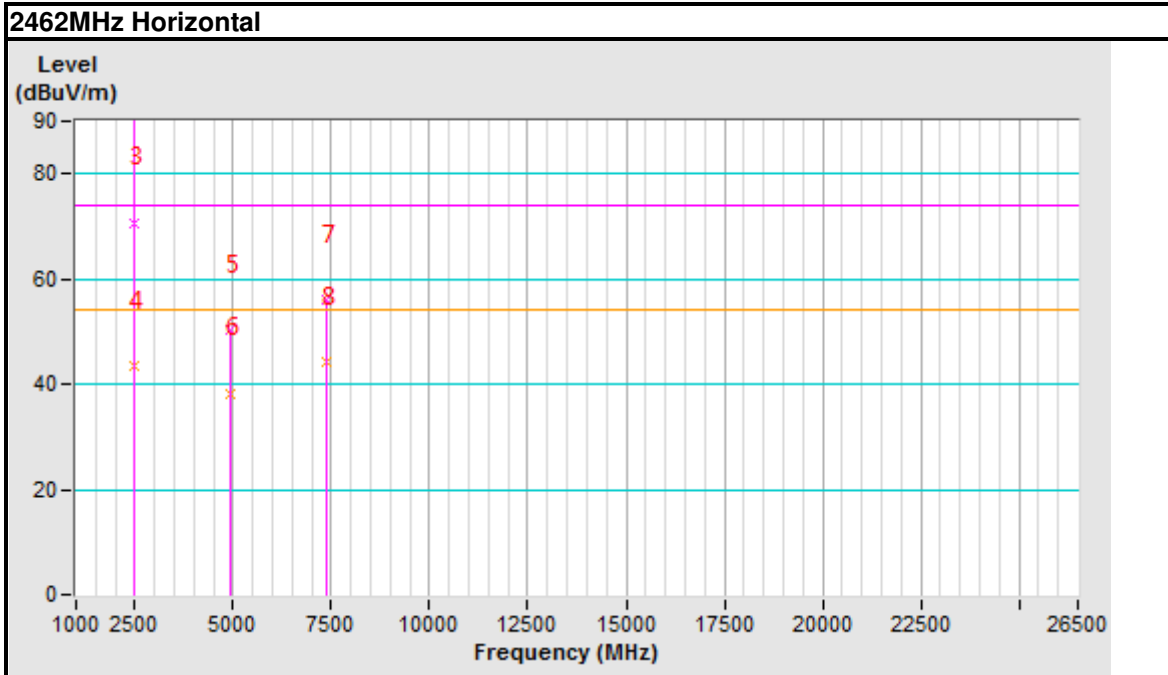


## 4.2 CONDUCTED OUTPUT POWER

### 4.2.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

### 4.2.2 TEST SETUP

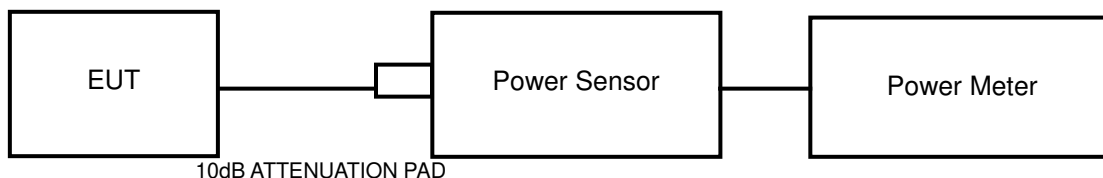

### 4.2.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 03,21
Power Meter	Anritsu	ML2495A	1139001	Mar. 17,21
Power Sensor	Anritsu	MA2411B	1531155	Mar. 17,21
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 30,21
Oscilloscope	Agilent	DSO9254A	MY51260160	Sep. 17,21
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Mar. 17,21
Signal Generator	Agilent	N5183A	MY50140980	Sep. 18,21
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 11,21
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A

#### NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.2.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

#### 4.2.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



#### 4.2.7 TEST RESULTS

##### MAXIMUM PEAK OUTPUT POWER

###### 802.11b

###### Chain 0

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	18.00	63.096	1	PASS
6	2437	18.18	65.766	1	PASS
11	2462	18.24	66.681	1	PASS

###### Chain 1

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	18.06	63.973	1	PASS
6	2437	18.30	67.608	1	PASS
11	2462	18.17	65.615	1	PASS

###### 802.11g

###### Chain 0

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	17.80	60.256	1	PASS
6	2437	17.32	53.951	1	PASS
11	2462	17.39	54.828	1	PASS

###### Chain 1

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	17.52	56.494	1	PASS
6	2437	17.22	52.723	1	PASS
11	2462	17.41	55.081	1	PASS

802.11n HT20

Chain 0

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	16.52	44.875	1	PASS
6	2437	16.32	42.855	1	PASS
11	2462	16.67	46.452	1	PASS

Chain 1

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	16.72	46.989	1	PASS
6	2437	16.34	43.053	1	PASS
11	2462	16.68	46.559	1	PASS

**AVERAGE OUTPUT POWER (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

**802.11b  
Chain 0**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	15.06	32.063
6	2437	15.27	33.651
11	2462	15.32	34.041

**Chain 1**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	15.14	32.659
6	2437	15.38	34.514
11	2462	15.24	33.420

**802.11g  
Chain 0**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	9.8	9.550
6	2437	9.35	8.610
11	2462	9.42	8.750

**Chain 1**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	9.91	9.795
6	2437	9.21	8.337
11	2462	9.49	8.892

802.11n HT20

Chain 0

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	7.62	5.781
6	2437	8.07	6.412
11	2462	8.21	6.622

Chain 1

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	8.34	6.823
6	2437	8.11	6.471
11	2462	8.23	6.653

### 4.3 OUT OF BAND EMISSION MEASUREMENT

#### 4.3.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.3.2 TEST SETUP



#### 4.3.3 TEST INSTRUMENTS

Refer to section 4.2.3 to get information of above instrument.

#### 4.3.4 TEST PROCEDURE

##### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

### **Measurement Procedure –Unwanted Emission Level**

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### **4.3.5 DEVIATION FROM TEST STANDARD**

No deviation.


#### **4.3.6 EUT OPERATING CONDITION**

Same as item 4.2.6


### 4.3.7 TEST RESULTS

#### 802.11b


##### CH 1

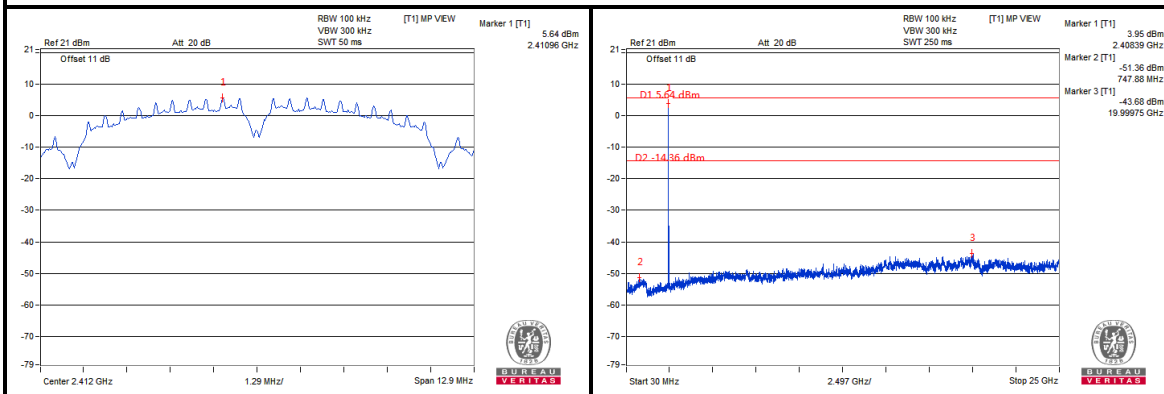


##### CH 6

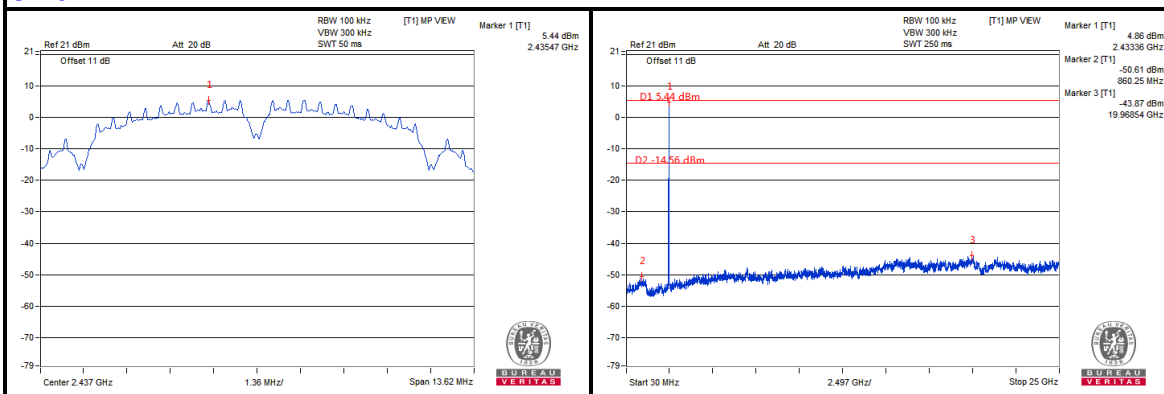

##### CH 11

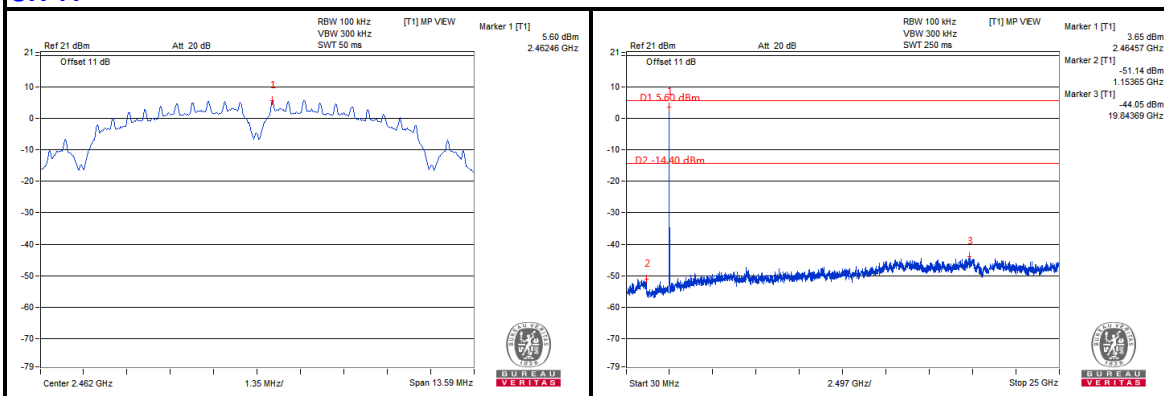



802.11g

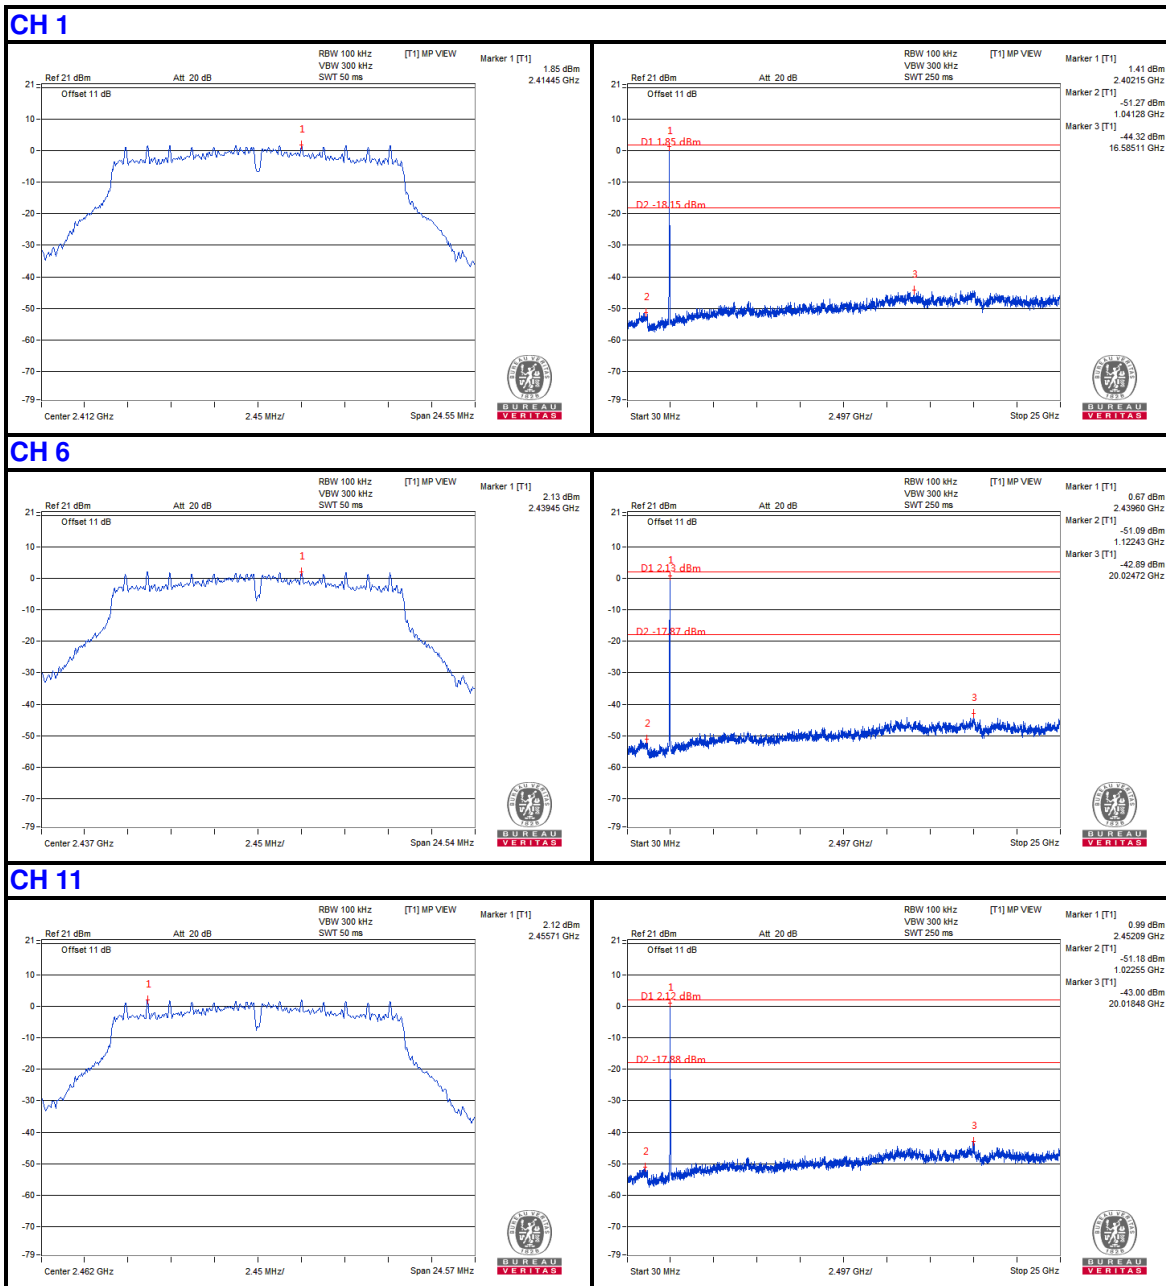





802.11n HT20



**CH 1**

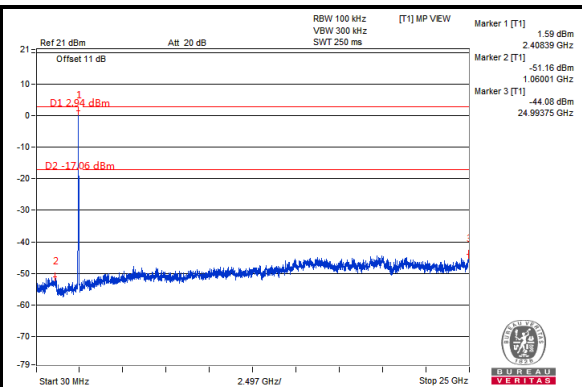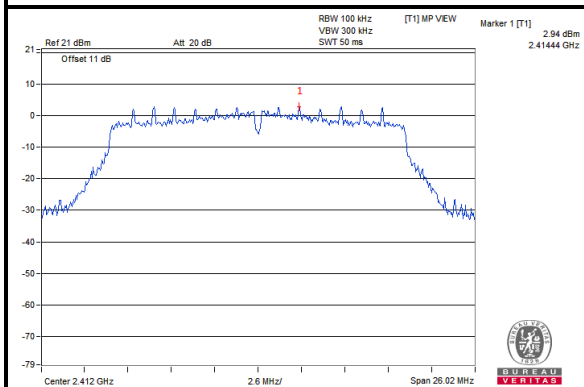


**CH 6**

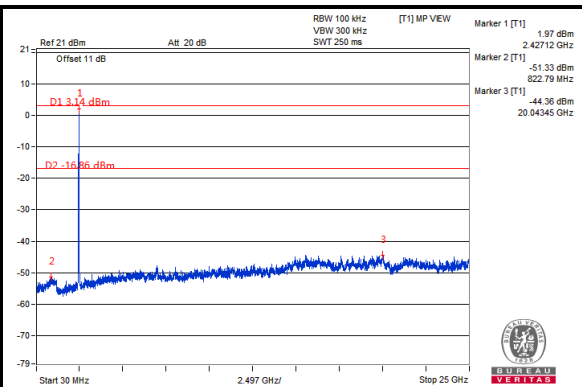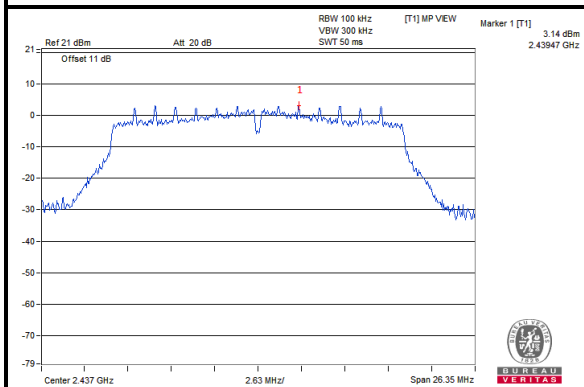


**CH 11**

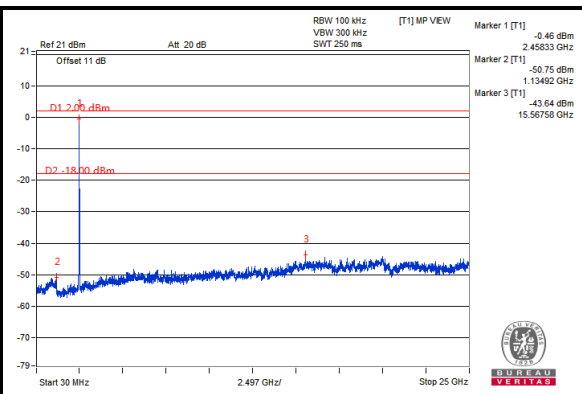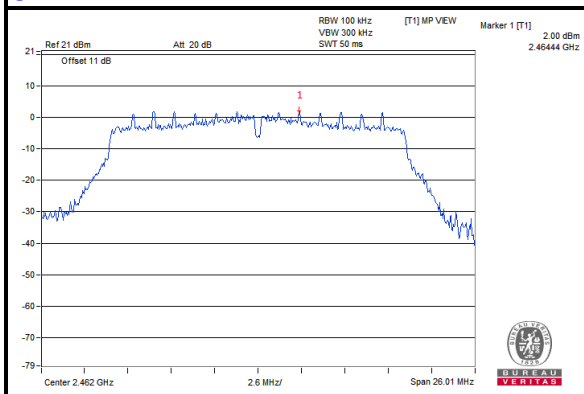


802.11b.

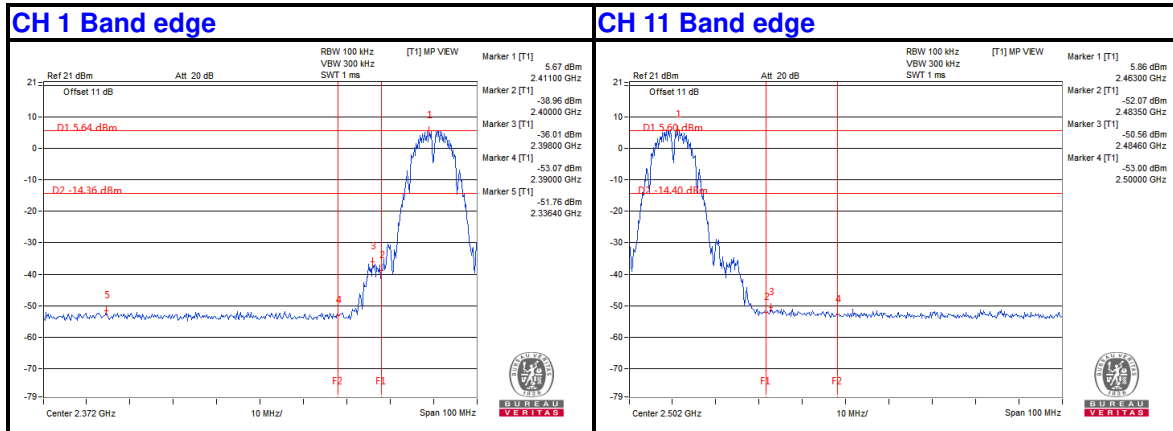

802.11g

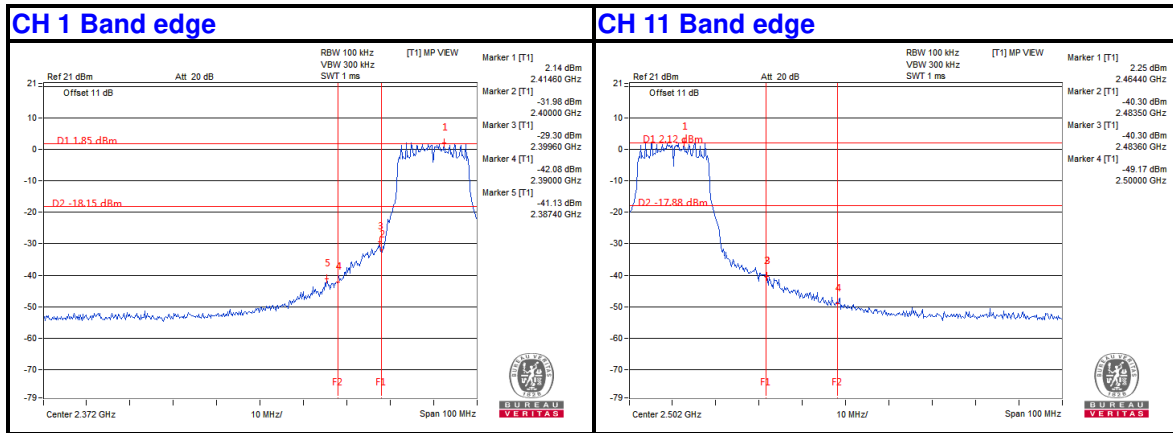

802.11n HT20

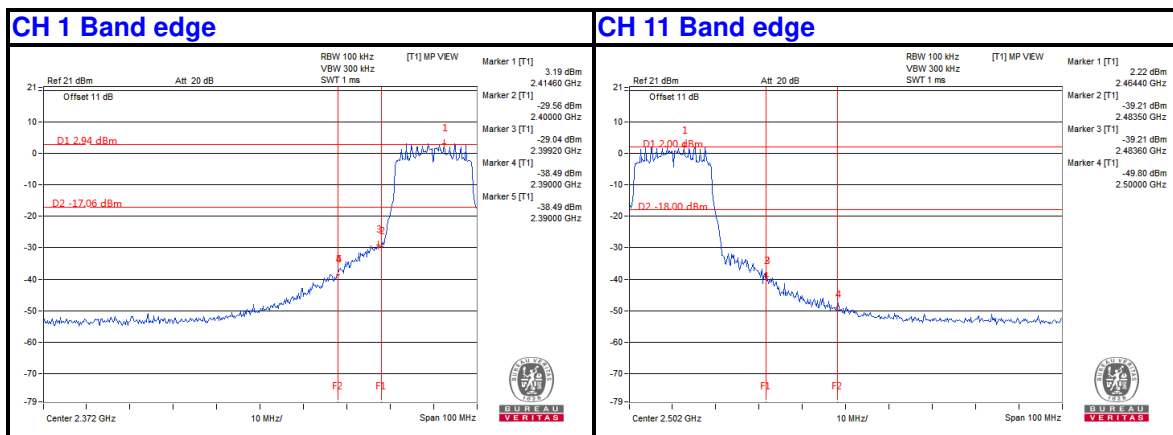



Test Report No.: RF200910N001-3

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF200910N001-3

## 6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---