

# TEST REPORT

**Reference No.** ..... : WTS18S07117356-3W  
**FCC ID**..... : 2ANOX69092  
**Applicant**..... : Kygo Life AS  
**Address**..... : Sjoyst Plass 3, 0278 Oslo, Norway  
**Manufacturer** ..... : Kygo Life AS  
**Address**..... : Sjoyst Plass 3, 0278 Oslo, Norway  
**Product**..... : Wireless WiFi Smart Speaker  
**Model(s)** ..... : B9/800, KYGO B9 800  
**Standards**..... : FCC CFR47 Part 15 C Section 15.407: 2018  
**Date of Receipt sample**..... : 2018-07-06  
**Date of Test**..... : 2018-08-14 to 2018-08-30  
**Date of Issue**..... : 2018-08-31  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.  
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,  
Guangdong, China  
Tel :+86-755-83551033  
Fax:+86-755-83552400

Compiled by:

*Frank Yin*

Frank Yin / Test Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 2 Laboratories Introduction

**Waltek Services (Shenzhen) Co., Ltd** is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), ISED Canada (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

## 2.1 Test Facility

### A. Accreditations for Conformity Assessment (International)

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ SDoC(VOC/DOC)	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. ISED Canada Registration No.: 7760A			

### B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd.	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

### 3 Revision History

Test report #	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S07117356-3W	2018-07-06	2018-08-14 to 2018-08-30	2018-08-31	Original	-	Valid

## 4 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	PASS
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 5 Contents

	<b>Page</b>
<b>COVER PAGE</b> .....	<b>1</b>
<b>2 LABORATORIES INTRODUCTION</b> .....	<b>2</b>
2.1 TEST FACILITY.....	3
<b>3 REVISION HISTORY</b> .....	<b>4</b>
<b>4 TEST SUMMARY</b> .....	<b>5</b>
<b>5 CONTENTS</b> .....	<b>6</b>
<b>6 GENERAL INFORMATION</b> .....	<b>8</b>
6.1 GENERAL DESCRIPTION OF E.U.T.....	8
6.2 DETAILS OF E.U.T.....	8
6.3 CHANNEL LIST.....	9
<b>7 EQUIPMENT USED DURING TEST</b> .....	<b>12</b>
7.1 EQUIPMENTS LIST.....	12
7.2 DESCRIPTION OF SUPPORT UNITS.....	13
7.3 MEASUREMENT UNCERTAINTY.....	13
7.4 TEST EQUIPMENT CALIBRATION.....	13
<b>8 CONDUCTED EMISSION</b> .....	<b>14</b>
8.1 E.U.T. OPERATION.....	14
8.2 EUT SETUP.....	14
8.3 MEASUREMENT DESCRIPTION.....	14
8.4 CONDUCTED EMISSION TEST RESULT.....	15
<b>9 RADIATED EMISSIONS</b> .....	<b>17</b>
9.1 EUT OPERATION.....	17
9.2 TEST SETUP.....	18
9.3 SPECTRUM ANALYZER SETUP.....	19
9.4 TEST PROCEDURE.....	20
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	20
9.6 SUMMARY OF TEST RESULTS.....	21
<b>10 DUTY CYCLE</b> .....	<b>33</b>
10.1 SUMMARY OF TEST RESULTS.....	33
<b>11 BAND EDGE</b> .....	<b>40</b>
11.1 TEST PRODUCE.....	40
11.2 TEST RESULT.....	41
<b>12 6 DB BANDWIDTH</b> .....	<b>53</b>
12.1 TEST PROCEDURE:.....	53
12.2 TEST RESULT:.....	53
<b>13 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</b> .....	<b>61</b>
13.1 TEST PROCEDURE:.....	61
13.2 TEST RESULT:.....	62
<b>14 CONDUCTED OUTPUT POWER</b> .....	<b>77</b>
14.1 TEST PROCEDURE:.....	77
14.2 TEST RESULT :.....	78
<b>15 POWER SPECTRAL DENSITY</b> .....	<b>93</b>
15.1 TEST PROCEDURE:.....	93
15.2 TEST RESULT:.....	94
<b>16 FREQUENCY STABILITY</b> .....	<b>110</b>

16.1	TEST PROCEDURE:.....	110
16.2	TEST RESULT: .....	111
<b>17</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>112</b>
<b>18</b>	<b>FCC ID: 2ANOX69092 RF EXPOSURE REPORT.....</b>	<b>113</b>
<b>19</b>	<b>PHOTOGRAPHS - MODEL KYGO B9 800 TEST SETUP PHOTOS .....</b>	<b>113</b>
<b>20</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....</b>	<b>113</b>
20.1	MODEL KYGO B9 800 - EXTERNAL PHOTOS .....	113
20.2	MODEL KYGO B9 800 - INTERNAL PHOTOS.....	113

## 6 General Information

### 6.1 General Description of E.U.T

Product:	Wireless WiFi Smart Speaker
Model(s):	B9/800, KYGO B9 800
Model Description:	Only the model names and color are different. The model KYGO B9 800 is the test sample.
Operation Frequency:	IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz
Type of modulation:	IEEE for 802.11a: OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11n : OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11ac : OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)
Antenna installation:	Internal Antenna
Antenna Gain:	5.77dBi

### 6.2 Details of E.U.T

<b>Ratings</b>	Input: AC 100-240V~, 50/60Hz 0.45A Output: 5Vdc, 2.1A
----------------	--



### 6.3 Channel List

U-NII-1 (5.15-5.25GHz)		U-NII-3 (5.725-5.85GHz)	
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5775
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11 ac(HT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210	155	5775

#### Test Mode Description:

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product. Transmitting duty cycle is no less 98%.

Test Items	Mode	Data Rate	Channel	TX/RX
Radiated Emissions	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX

	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Duty Cycle	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Band Edge	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
6dB Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX

26dB Bandwidth and 99% Occupied Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Conducted Output Power	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Power Spectral Density	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Frequency Stability	Un-modulation	/	U-NII-1 36/40/48 U-NII-3 149/155/165	TX

## 7 Equipment Used during Test

### 7.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	100115	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2018-04-29	2019-04-28
2	Broad-band Horn Antenna(1-18GHz)	SCHWARZBECK	BBHA 9120 D	667	2018-04-29	2019-04-28
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-29	2019-04-28
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2018-04-29	2019-04-28
5	Spectrum Analyzer	R&S	FSP40	100501	2017-10-20	2018-10-19
6	Broad-band Horn Antenna(18-40GHz)	SCHWARZBECK	BBHA 9170	BBHA917065 1	2017-10-25	2018-10-24
7	Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	100472	2017-10-25	2018-10-24
8	Cable	Top	18-40GHz	-	2017-10-25	2018-10-24
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-29	2019-04-28
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-29	2019-04-28
3	Active Loop Antenna	Com-power	AL-130R	10160007	2018-04-17	2019-04-16
4	Amplifier	ANRITSU	MH648A	M43381	2018-04-29	2019-04-28
5	Cable	HUBER+SUHNER	CBL2	525178	2018-04-29	2019-04-28
6	Coaxial Cable (below 1GHz)	Top	TYPE16 (13M)	-	2017-09-12	2018-09-11
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSL6	100959	2017-09-12	2018-09-11
2	Coaxial Cable	Top	10Hz-30GHz	-	2017-09-12	2018-09-11
3	Antenna Connector*	Realacc	45RSm	-	2017-09-12	2018-09-11
4	DC Block	Gwave	GDCB-3G-N-SMA	140307001	2017-09-12	2018-09-11

“\*”: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 7.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (A mains 150KHz~30MHz)

## 7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., L TD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

## 8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

### 8.1 E.U.T. Operation

Operating Environment :

Temperature:	21.5 °C
Humidity:	51.9 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation : Transmitting mode

The test was performed in Transmitting mode(For WIFI), Only the worst case 802.11a mode were record in the report.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

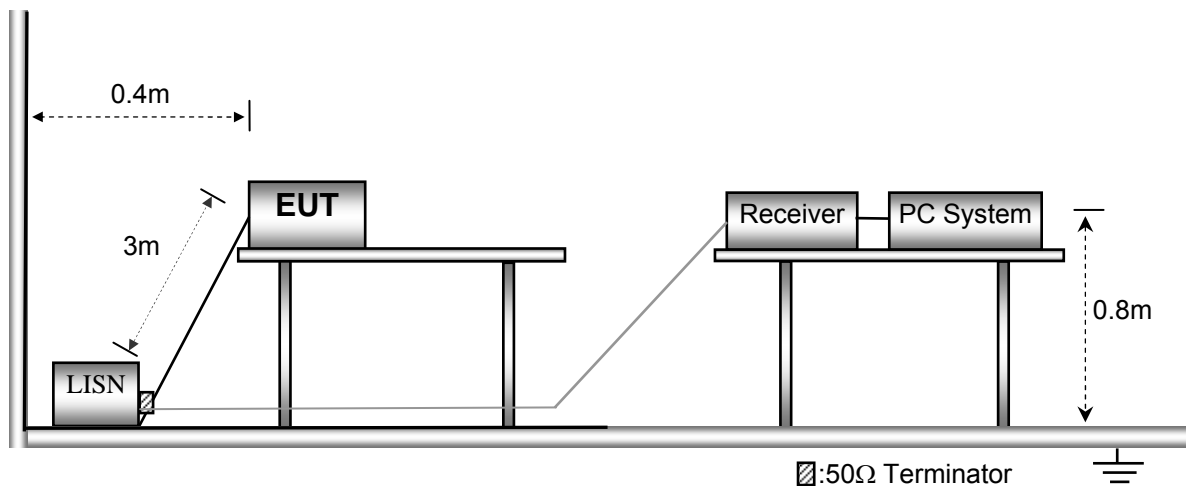


### 8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 8.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

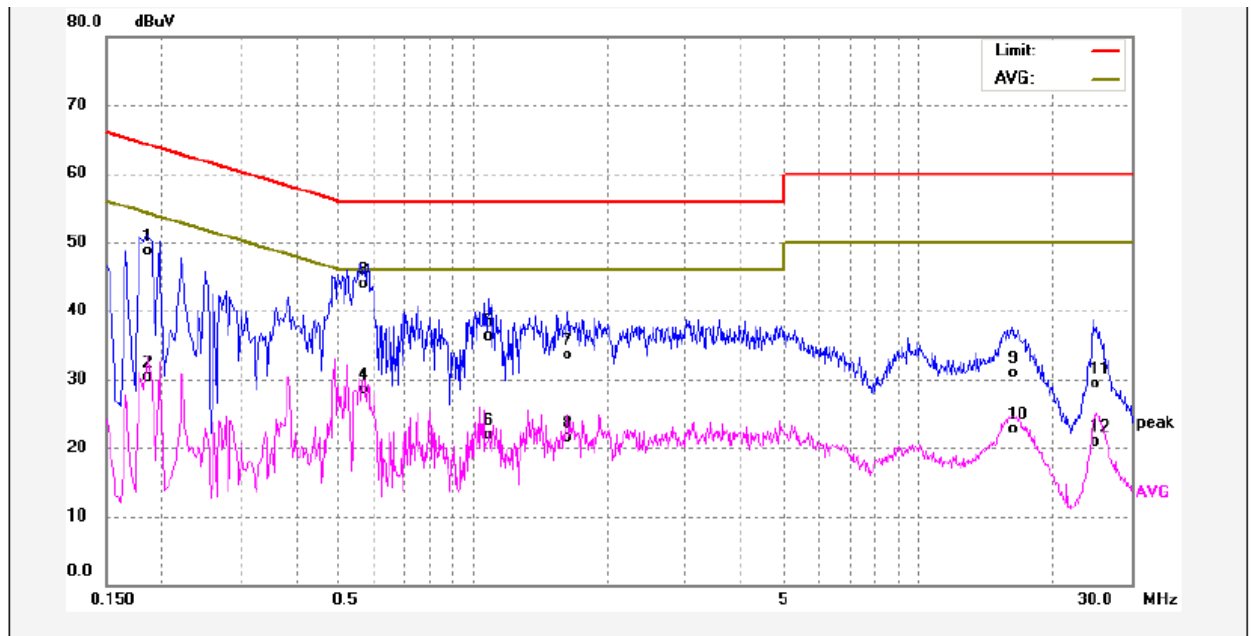

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1860	38.35	10.31	48.66	64.21	-15.55	QP	
2	0.1860	19.90	10.31	30.21	54.21	-24.00	AVG	
3	0.5620	33.44	10.46	43.90	56.00	-12.10	QP	
4	0.5620	18.10	10.46	28.56	46.00	-17.44	AVG	
5	1.0859	25.91	10.44	36.35	56.00	-19.65	QP	
6	1.0859	11.47	10.44	21.91	46.00	-24.09	AVG	
7	1.6340	23.04	10.50	33.54	56.00	-22.46	QP	
8	1.6340	11.06	10.50	21.56	46.00	-24.44	AVG	
9	16.2139	20.07	10.85	30.92	60.00	-29.08	QP	
10	16.2139	11.92	10.85	22.77	50.00	-27.23	AVG	
11	24.6180	18.84	10.53	29.37	60.00	-30.63	QP	
12	24.6180	10.45	10.53	20.98	50.00	-29.02	AVG	

Neutral line:

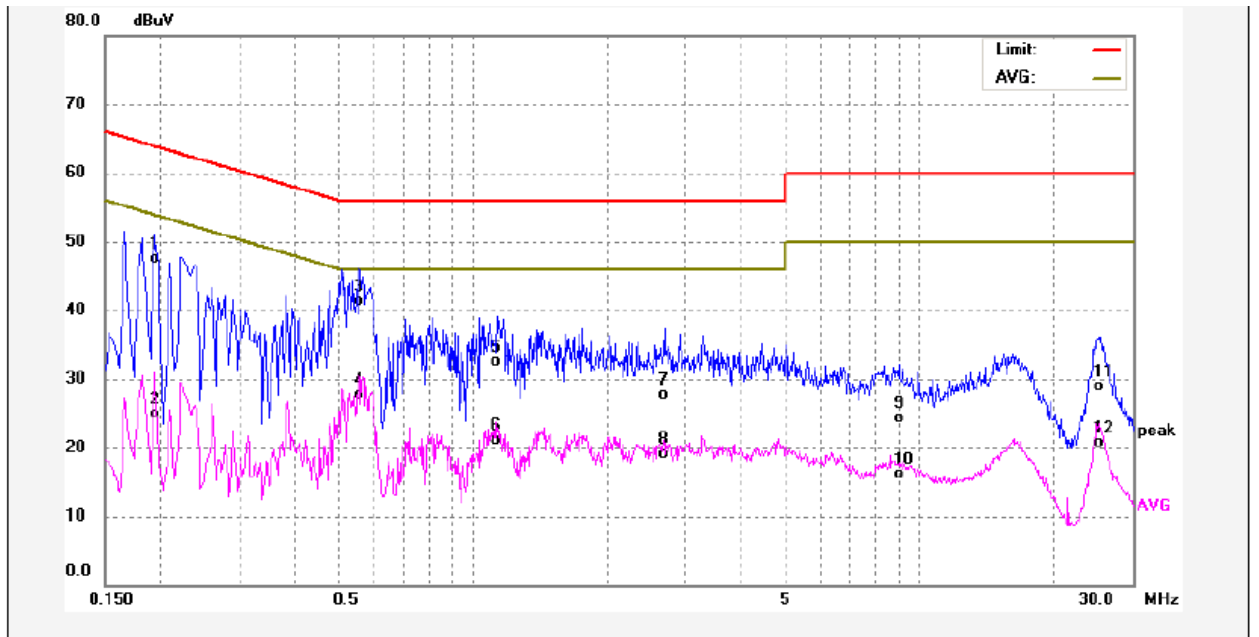

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1940	37.10	10.32	47.42	63.86	-16.44	QP	
2	0.1940	14.50	10.32	24.82	53.86	-29.04	AVG	
3	0.5580	30.90	10.46	41.36	56.00	-14.64	QP	
4	0.5580	17.19	10.46	27.65	46.00	-18.35	AVG	
5	1.1380	22.01	10.44	32.45	56.00	-23.55	QP	
6	1.1380	10.74	10.44	21.18	46.00	-24.82	AVG	
7	2.6900	17.10	10.67	27.77	56.00	-28.23	QP	
8	2.6900	8.51	10.67	19.18	46.00	-26.82	AVG	
9	8.9660	13.06	11.15	24.21	60.00	-35.79	QP	
10	8.9660	4.91	11.15	16.06	50.00	-33.94	AVG	
11	25.5820	18.45	10.48	28.93	60.00	-31.07	QP	
12	25.5820	10.15	10.48	20.63	50.00	-29.37	AVG	



## 9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

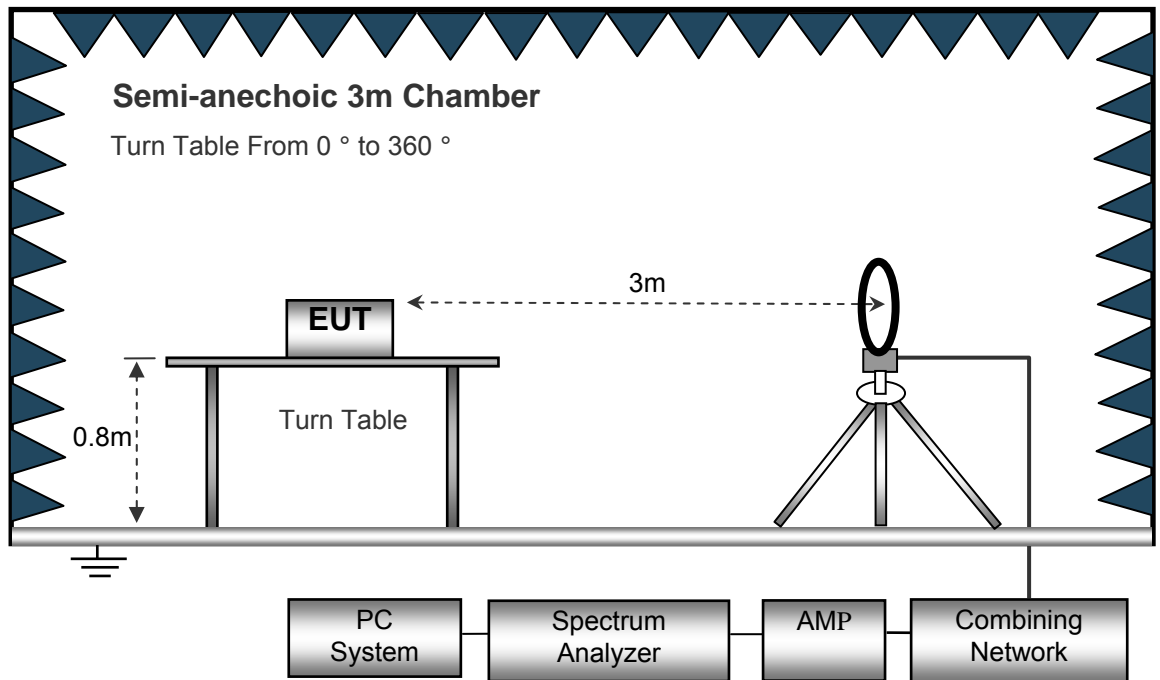

The test setup for emission measurement from 30 MHz to 1 GHz.

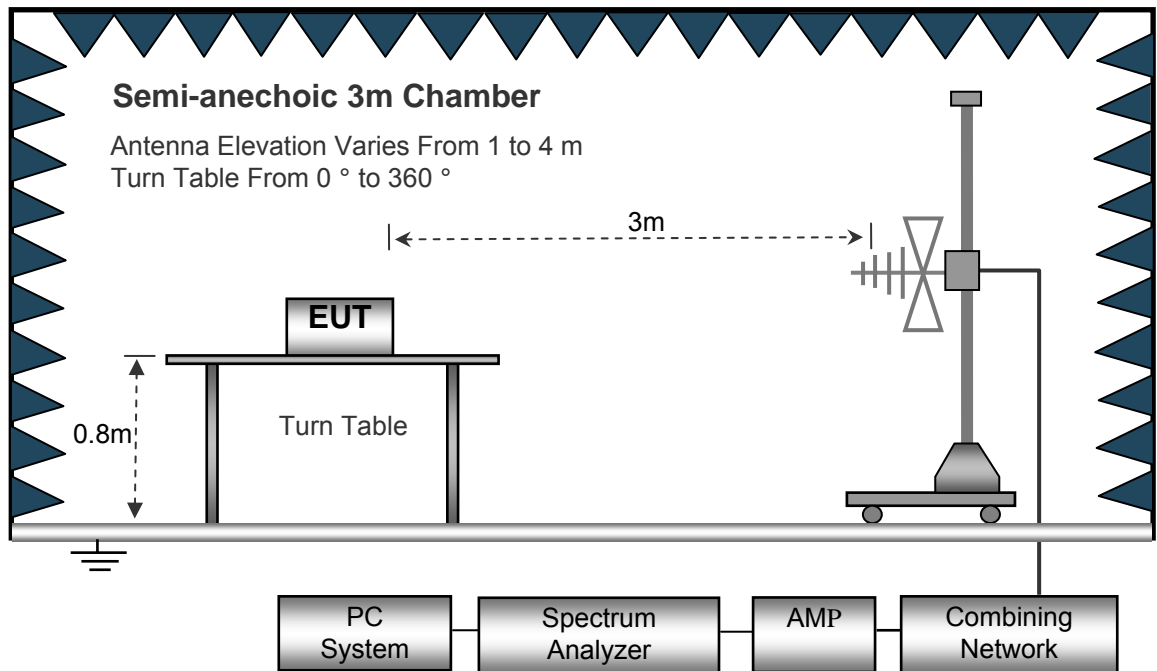

The test setup for emission measurement above 1 GHz.

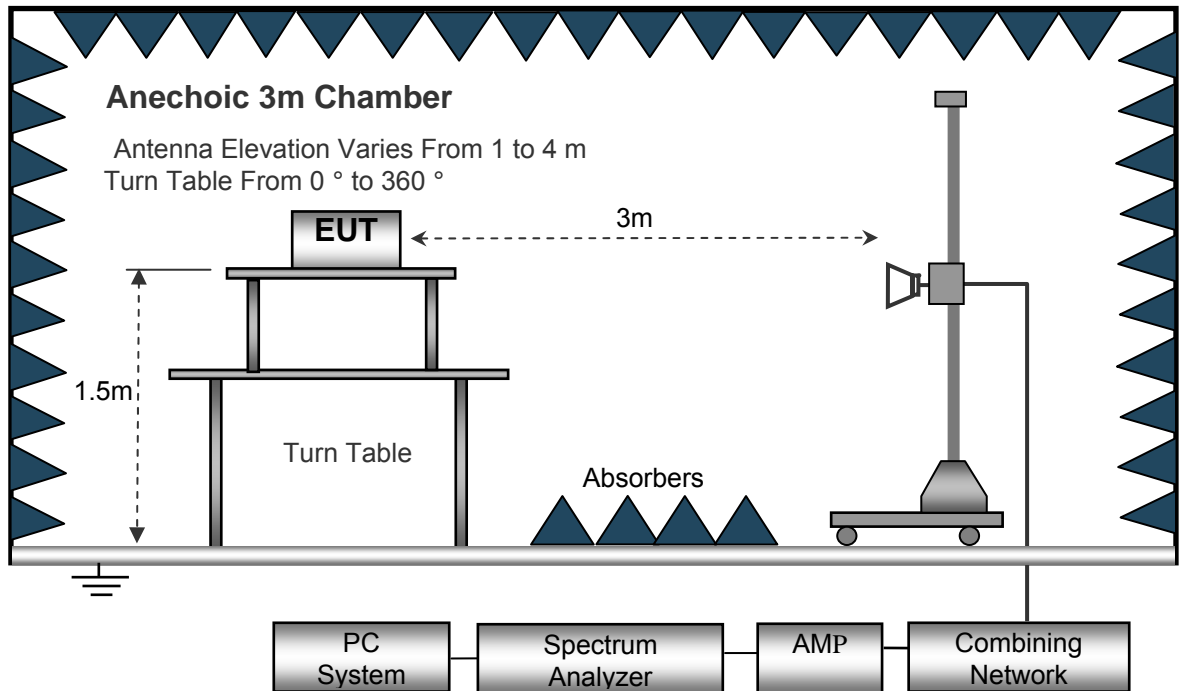

### 9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the EUT in X axis,so the worst data were shown as follow.
8. A 2.4GHz high-pass filter is used during radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

FCC Part15.33: For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph: If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

**Test Frequency: 9 kHz ~ 30 MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Fator	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-1 low Channel 5180MHz									
280.02	43.55	QP	116	1.1	H	-15.08	28.47	46.00	-17.53
280.02	51.46	QP	360	1.9	V	-15.08	36.38	46.00	-9.62
4503.85	46.24	PK	114	1.6	H	-1.54	44.70	74.00	-29.30
4503.85	39.66	Ave	114	1.6	H	-1.54	38.12	54.00	-15.88
5135.47	45.56	PK	310	2.0	H	-0.75	44.81	74.00	-29.19
5135.47	40.53	Ave	310	2.0	H	-0.75	39.78	54.00	-14.22
10360.00	38.83	PK	126	1.6	H	5.33	44.16	74.00	-29.84
10360.00	34.09	Ave	126	1.6	H	5.33	39.42	54.00	-14.58
15540.00	42.30	PK	55	1.1	H	5.29	47.59	74.00	-26.41
15540.00	37.82	Ave	55	1.1	H	5.29	43.11	54.00	-10.89
802.11n(HT20) U-NII-1 middle channel 5200MHz									
280.02	42.35	QP	116	1.1	H	-15.08	27.27	46.00	-18.73
280.02	52.17	QP	360	1.9	V	-15.08	37.09	46.00	-8.91
4509.36	45.21	PK	114	1.8	H	-1.64	43.57	74.00	-30.43
4509.36	43.13	Ave	114	1.8	H	-1.64	41.49	54.00	-12.51
5133.87	45.86	PK	21	1.1	H	-0.91	44.95	74.00	-29.05
5133.87	41.44	Ave	21	1.1	H	-0.91	40.53	54.00	-13.47
10400.00	37.71	PK	16	1.4	H	5.21	42.92	74.00	-31.08
10400.00	34.85	Ave	16	1.4	H	5.21	40.06	54.00	-13.94
15600.00	45.55	PK	101	1.4	H	5.30	50.85	74.00	-23.15
15600.00	39.29	Ave	101	1.4	H	5.30	44.59	54.00	-9.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Fator	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
280.02	42.78	QP	116	1.1	H	-15.08	27.70	46.00	-18.30
280.02	50.47	QP	360	1.9	V	-15.08	35.39	46.00	-10.61
4510.78	41.75	PK	183	1.3	H	-1.56	40.19	74.00	-33.81
4510.78	38.45	Ave	183	1.3	H	-1.56	36.89	54.00	-17.11
5128.12	42.19	PK	238	2.0	H	-0.81	41.38	74.00	-32.62
5128.12	40.25	Ave	238	2.0	H	-0.81	39.44	54.00	-14.56
10480.00	41.41	PK	308	1.6	H	5.14	46.55	74.00	-27.45
10480.00	36.63	Ave	308	1.6	H	5.14	41.77	54.00	-12.23
15720.00	45.52	PK	133	1.2	H	5.10	50.62	74.00	-23.38
15720.00	37.42	Ave	133	1.2	H	5.10	42.52	54.00	-11.48
802.11n(HT20) U-NII-3 low Channel 5745MHz									
227.25	42.50	QP	128	1.9	H	-10.99	27.42	46.00	-18.58
227.25	49.14	QP	295	1.7	V	-10.99	34.06	46.00	-11.94
4529.59	45.09	PK	62	1.5	H	-1.80	43.29	74.00	-30.71
4529.59	40.73	Ave	62	1.5	H	-1.80	38.93	54.00	-15.07
5141.43	40.54	PK	334	1.4	H	-0.96	39.58	74.00	-34.42
5141.43	37.32	Ave	334	1.4	H	-0.96	36.36	54.00	-17.64
11490.00	46.46	PK	68	1.4	H	5.93	52.39	74.00	-21.61
11490.00	37.31	Ave	68	1.4	H	5.93	43.24	54.00	-10.76
17235.00	45.04	PK	91	1.2	H	10.35	55.39	74.00	-18.61
17235.00	38.53	Ave	91	1.2	H	10.35	48.88	54.00	-5.12

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Fator	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-3 middle channel 5785MHz									
280.02	41.20	QP	116	1.1	H	-15.08	26.12	46.00	-19.88
280.02	48.80	QP	360	1.9	V	-15.08	33.72	46.00	-12.28
4510.69	41.93	PK	81	1.8	H	-1.59	40.34	74.00	-33.66
4510.69	37.09	Ave	81	1.8	H	-1.59	35.50	54.00	-18.50
5111.62	40.27	PK	274	1.4	H	-0.95	39.32	74.00	-34.68
5111.62	39.15	Ave	274	1.4	H	-0.95	38.20	54.00	-15.80
11570.00	44.98	PK	22	1.0	H	5.81	50.79	74.00	-23.21
11570.00	41.00	Ave	22	1.0	H	5.81	46.81	54.00	-7.19
17355.00	46.02	PK	355	1.5	H	10.37	56.39	74.00	-17.61
17355.00	38.85	Ave	355	1.5	H	10.37	49.22	54.00	-4.78
802.11n(HT20) U-NII-3 High channel 5825MHz									
227.37	42.40	QP	210	1.3	H	-11.03	27.32	46.00	-18.68
227.37	49.90	QP	82	1.6	V	-11.03	34.82	46.00	-11.18
4527.42	42.06	PK	268	1.5	H	-1.68	40.38	74.00	-33.62
4527.42	38.79	Ave	268	1.5	H	-1.68	37.11	54.00	-16.89
5127.21	42.91	PK	328	1.6	H	-0.96	41.95	74.00	-32.05
5127.21	38.17	Ave	328	1.6	H	-0.96	37.21	54.00	-16.79
11650.00	47.17	PK	211	2.0	H	5.84	53.01	74.00	-20.99
11650.00	37.83	Ave	211	2.0	H	5.84	43.67	54.00	-10.33
17475.00	45.71	PK	175	1.9	H	10.41	56.12	74.00	-17.88
17475.00	37.27	Ave	175	1.9	H	10.41	47.68	54.00	-6.32



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Fator	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a(HT20) U-NII-1 low Channel 5180MHz									
280.02	44.70	QP	116	1.1	H	-15.08	29.62	46.00	-16.38
280.02	52.18	QP	360	1.9	V	-15.08	37.10	46.00	-8.90
4501.75	44.61	PK	160	1.4	H	-1.80	42.81	74.00	-31.19
4501.75	42.52	Ave	160	1.4	H	-1.80	40.72	54.00	-13.28
5115.89	41.20	PK	306	1.4	H	-0.94	40.26	74.00	-33.74
5115.89	35.14	Ave	306	1.4	H	-0.94	34.20	54.00	-19.80
10360.00	43.24	PK	140	1.7	H	5.33	48.57	74.00	-25.43
10360.00	34.99	Ave	140	1.7	H	5.33	40.32	54.00	-13.68
15540.00	45.05	PK	174	1.8	H	5.29	50.34	74.00	-23.66
15540.00	37.12	Ave	174	1.8	H	5.29	42.41	54.00	-11.59
802.11a(HT20) U-NII-1 middle channel 5200MHz									
226.86	44.99	QP	358	1.6	H	-11.15	29.91	46.00	-16.09
226.86	52.17	QP	134	2.0	V	-11.15	37.09	46.00	-8.91
4513.24	43.44	PK	260	1.2	H	-1.69	41.75	74.00	-32.25
4513.24	40.71	Ave	260	1.2	H	-1.69	39.02	54.00	-14.98
5138.48	43.53	PK	16	1.8	H	-0.91	42.62	74.00	-31.38
5138.48	40.13	Ave	16	1.8	H	-0.91	39.22	54.00	-14.78
10400.00	41.06	PK	223	1.9	H	5.21	46.27	74.00	-27.73
10400.00	34.79	Ave	223	1.9	H	5.21	40.00	54.00	-14.00
15600.00	46.41	PK	108	1.4	H	5.30	51.71	74.00	-22.29
15600.00	39.23	Ave	108	1.4	H	5.30	44.53	54.00	-9.47

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Fator	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a(HT20) U-NII-1 High channel 5240MHz									
280.02	45.01	QP	116	1.1	H	-15.08	29.93	46.00	-16.07
280.02	52.96	QP	360	1.9	V	-15.08	37.88	46.00	-8.12
4501.21	42.61	PK	4	1.3	H	-1.77	40.84	74.00	-33.16
4501.21	40.25	Ave	4	1.3	H	-1.77	38.48	54.00	-15.52
5119.46	47.08	PK	352	1.5	H	-0.79	46.29	74.00	-27.71
5119.46	45.02	Ave	352	1.5	H	-0.79	44.23	54.00	-9.77
10480.00	41.58	PK	301	1.6	H	5.14	46.72	74.00	-27.28
10480.00	37.52	Ave	301	1.6	H	5.14	42.66	54.00	-11.34
15720.00	45.10	PK	185	1.1	H	5.10	50.20	74.00	-23.80
15720.00	38.60	Ave	185	1.1	H	5.10	43.70	54.00	-10.30
802.11a(HT20) U-NII-3 low Channel 5745MHz									
280.02	44.55	QP	116	1.1	H	-15.08	29.47	46.00	-16.53
280.02	52.81	QP	360	1.9	V	-15.08	37.73	46.00	-8.27
4520.90	39.88	PK	278	1.2	H	-1.64	38.24	74.00	-35.76
4520.90	36.84	Ave	278	1.2	H	-1.64	35.20	54.00	-18.80
5111.76	40.32	PK	322	1.2	H	-0.84	39.48	74.00	-34.52
5111.76	36.21	Ave	322	1.2	H	-0.84	35.37	54.00	-18.63
11490.00	45.93	PK	188	1.6	H	5.93	51.86	74.00	-22.14
11490.00	38.90	Ave	188	1.6	H	5.93	44.83	54.00	-9.17
17235.00	45.31	PK	31	1.8	H	10.35	55.66	74.00	-18.34
17235.00	38.95	Ave	31	1.8	H	10.35	49.30	54.00	-4.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Fator	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a(HT20) U-NII-3 middle channel 5785MHz									
280.02	45.83	QP	116	1.1	H	-15.08	30.75	46.00	-15.25
280.02	54.28	QP	360	1.9	V	-15.08	39.20	46.00	-6.80
4500.54	43.90	PK	288	1.2	H	-1.63	42.27	74.00	-31.73
4500.54	42.39	Ave	288	1.2	H	-1.63	40.76	54.00	-13.24
5113.75	40.79	PK	14	1.6	H	-0.73	40.06	74.00	-33.94
5113.75	36.15	Ave	14	1.6	H	-0.73	35.42	54.00	-18.58
11570.00	45.74	PK	86	1.6	H	5.81	51.55	74.00	-22.45
11570.00	37.59	Ave	86	1.6	H	5.81	43.40	54.00	-10.60
17355.00	45.81	PK	279	1.3	H	10.37	56.18	74.00	-17.82
17355.00	38.15	Ave	279	1.3	H	10.37	48.52	54.00	-5.48
802.11a(HT20) U-NII-3 High channel 5825MHz									
280.02	43.25	QP	116	1.1	H	-15.08	28.17	46.00	-17.83
280.02	51.82	QP	360	1.9	V	-15.08	36.74	46.00	-9.26
4520.74	44.37	PK	257	2.0	H	-1.67	42.70	74.00	-31.30
4520.74	42.50	Ave	257	2.0	H	-1.67	40.83	54.00	-13.17
5111.35	41.07	PK	35	1.3	H	-0.83	40.24	74.00	-33.76
5111.35	38.51	Ave	35	1.3	H	-0.83	37.68	54.00	-16.32
11650.00	46.69	PK	155	1.0	H	5.84	52.53	74.00	-21.47
11650.00	38.00	Ave	155	1.0	H	5.84	43.84	54.00	-10.16
17475.00	46.63	PK	106	1.8	H	10.41	57.04	74.00	-16.96
17475.00	38.24	Ave	106	1.8	H	10.41	48.65	54.00	-5.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) U-NII-1 low Channel 5190MHz									
280.02	43.65	QP	116	1.1	H	-15.08	28.57	46.00	-17.43
280.02	50.01	QP	360	1.9	V	-15.08	34.93	46.00	-11.07
4510.10	42.04	PK	163	1.4	H	-1.50	40.54	74.00	-33.46
4510.10	39.98	Ave	163	1.4	H	-1.50	38.48	54.00	-15.52
5122.62	46.19	PK	208	1.1	H	-0.86	45.33	74.00	-28.67
5122.62	38.93	Ave	208	1.1	H	-0.86	38.07	54.00	-15.93
10380.00	37.85	PK	187	1.3	H	5.26	43.11	74.00	-30.89
10380.00	33.55	Ave	187	1.3	H	5.26	38.81	54.00	-15.19
15570.00	46.57	PK	246	1.9	H	5.13	51.70	74.00	-22.30
15570.00	37.87	Ave	246	1.9	H	5.13	43.00	54.00	-11.00
802.11n(HT40) U-NII-1 High channel 5230MHz									
280.02	42.34	QP	116	1.1	H	-15.08	27.26	46.00	-18.74
280.02	50.94	QP	360	1.9	V	-15.08	35.86	46.00	-10.14
4511.33	42.63	PK	284	1.2	H	-1.63	41.00	74.00	-33.00
4511.33	41.38	Ave	284	1.2	H	-1.63	39.75	54.00	-14.25
5134.64	43.24	PK	157	1.7	H	-0.90	42.34	74.00	-31.66
5134.64	42.30	Ave	157	1.7	H	-0.90	41.40	54.00	-12.60
10460.00	41.90	PK	226	1.5	H	5.28	47.18	74.00	-26.82
10460.00	36.99	Ave	226	1.5	H	5.28	42.27	54.00	-11.73
15690.00	46.69	PK	334	1.9	H	5.02	51.71	74.00	-22.29
15690.00	37.09	Ave	334	1.9	H	5.02	42.11	54.00	-11.89

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) U-NII-3 low Channel 5755MHz									
280.02	43.99	QP	116	1.1	H	-15.08	28.91	46.00	-17.09
280.02	51.76	QP	360	1.9	V	-15.08	36.68	46.00	-9.32
4501.62	39.35	PK	117	1.8	H	-1.69	37.66	74.00	-36.34
4501.62	37.70	Ave	117	1.8	H	-1.69	36.01	54.00	-17.99
5117.93	37.62	PK	98	1.3	H	-0.74	36.88	74.00	-37.12
5117.93	34.12	Ave	98	1.3	H	-0.74	33.38	54.00	-20.62
11510.00	44.31	PK	333	1.6	H	5.88	50.19	74.00	-23.81
11510.00	37.24	Ave	333	1.6	H	5.88	43.12	54.00	-10.88
17265.00	45.89	PK	330	1.9	H	10.42	56.31	74.00	-17.69
17265.00	37.03	Ave	330	1.9	H	10.42	47.45	54.00	-6.55
802.11n(HT40) U-NII-3 High channel 5795MHz									
280.02	44.19	QP	116	1.1	H	-15.08	29.11	46.00	-16.89
280.02	50.53	QP	360	1.9	V	-15.08	35.45	46.00	-10.55
4520.20	44.54	PK	137	1.5	H	-1.69	42.85	74.00	-31.15
4520.20	41.05	Ave	137	1.5	H	-1.69	39.36	54.00	-14.64
5111.73	42.72	PK	153	1.2	H	-0.89	41.83	74.00	-32.17
5111.73	36.73	Ave	153	1.2	H	-0.89	35.84	54.00	-18.16
11590.00	44.99	PK	301	1.5	H	5.63	50.62	74.00	-23.38
11590.00	38.75	Ave	301	1.5	H	5.63	44.38	54.00	-9.62
17385.00	46.94	PK	118	1.2	H	10.63	57.57	74.00	-16.43
17385.00	37.94	Ave	118	1.2	H	10.63	48.57	54.00	-5.43

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT40) U-NII-1 low Channel 5190MHz									
280.02	42.24	QP	116	1.1	H	-15.08	27.16	46.00	-18.84
280.02	52.09	QP	360	1.9	V	-15.08	37.01	46.00	-8.99
4518.04	39.98	PK	127	1.1	H	-1.70	38.28	74.00	-35.72
4518.04	38.31	Ave	127	1.1	H	-1.70	36.61	54.00	-17.39
5110.75	47.37	PK	80	1.7	H	-0.78	46.59	74.00	-27.41
5110.75	40.05	Ave	80	1.7	H	-0.78	39.27	54.00	-14.73
10380.00	38.70	PK	32	1.4	H	5.26	43.96	74.00	-30.04
10380.00	35.70	Ave	32	1.4	H	5.26	40.96	54.00	-13.04
15570.00	45.54	PK	318	1.0	H	5.13	50.67	74.00	-23.33
15570.00	38.97	Ave	318	1.0	H	5.13	44.10	54.00	-9.90
802.11ac(HT40) U-NII-1 High channel 5230MHz									
280.02	43.25	QP	116	1.1	H	-15.08	28.17	46.00	-17.83
280.02	50.08	QP	360	1.9	V	-15.08	35.00	46.00	-11.00
4538.42	41.72	PK	148	1.9	H	-1.50	40.22	74.00	-33.78
4538.42	38.49	Ave	148	1.9	H	-1.50	36.99	54.00	-17.01
5132.58	41.34	PK	251	1.6	H	-0.85	40.49	74.00	-33.51
5132.58	36.53	Ave	251	1.6	H	-0.85	35.68	54.00	-18.32
10460.00	44.53	PK	271	1.6	H	5.28	49.81	74.00	-24.19
10460.00	37.65	Ave	271	1.6	H	5.28	42.93	54.00	-11.07
15690.00	46.10	PK	53	1.5	H	5.02	51.12	74.00	-22.88
15690.00	37.06	Ave	53	1.5	H	5.02	42.08	54.00	-11.92

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT40) U-NII-3 low Channel 5755MHz									
280.02	43.91	QP	116	1.1	H	-15.08	28.83	46.00	-17.17
280.02	50.87	QP	360	1.9	V	-15.08	35.79	46.00	-10.21
4531.13	40.86	PK	2	1.9	H	-1.79	39.07	74.00	-34.93
4531.16	38.72	Ave	2	1.9	H	-1.79	36.93	54.00	-17.07
5147.17	41.12	PK	248	1.3	H	-0.81	40.31	74.00	-33.69
5147.17	37.11	Ave	248	1.3	H	-0.81	36.30	54.00	-17.70
11510.00	45.19	PK	335	1.3	H	5.88	51.07	74.00	-22.93
11510.00	36.48	Ave	335	1.3	H	5.88	42.36	54.00	-11.64
17265.00	46.99	PK	246	1.7	H	10.42	57.41	74.00	-16.59
17265.00	37.35	Ave	246	1.7	H	10.42	47.77	54.00	-6.23
802.11ac(HT40) U-NII-3 High channel 5795MHz									
280.02	42.43	QP	59	1.0	H	-15.08	27.35	46.00	-18.65
280.02	52.20	QP	286	1.1	V	-15.08	37.12	46.00	-8.88
4503.46	44.78	PK	246	2.0	H	-1.54	43.24	74.00	-30.76
4503.46	43.07	Ave	246	2.0	H	-1.54	41.53	54.00	-12.47
5111.18	41.27	PK	25	1.6	H	-0.89	40.38	74.00	-33.62
5111.18	38.70	Ave	25	1.6	H	-0.89	37.81	54.00	-16.19
11590.00	47.50	PK	167	1.7	H	5.63	53.13	74.00	-20.87
11590.00	37.25	Ave	167	1.7	H	5.63	42.88	54.00	-11.12
17385.00	45.96	PK	76	1.6	H	10.63	56.59	74.00	-17.41
17385.00	39.53	Ave	76	1.6	H	10.63	50.16	54.00	-3.84

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT80) U-NII-1 low Channel 5210MHz									
280.02	42.59	QP	116	1.1	H	-15.08	27.51	46.00	-18.49
280.02	50.78	QP	360	1.9	V	-15.08	35.70	46.00	-10.30
4530.84	44.87	PK	334	1.0	H	-1.77	43.10	74.00	-30.90
4530.84	40.52	Ave	334	1.0	H	-1.77	38.75	54.00	-15.25
5135.27	46.79	PK	53	1.5	H	-0.82	45.97	74.00	-28.03
5135.27	40.93	Ave	53	1.5	H	-0.82	40.11	54.00	-13.89
10420.00	40.82	PK	336	1.4	H	4.65	45.47	74.00	-28.53
10420.00	36.52	Ave	336	1.4	H	4.65	41.17	54.00	-12.83
15630.00	46.55	PK	207	1.3	H	5.10	51.65	74.00	-22.35
15630.00	39.30	Ave	207	1.3	H	5.10	44.40	54.00	-9.60
802.11ac(HT80) U-NII-3 low Channel 5775MHz									
280.02	44.48	QP	116	1.1	H	-15.08	29.40	46.00	-16.60
280.02	52.23	QP	360	1.9	V	-15.08	37.15	46.00	-8.85
4514.54	43.62	PK	35	1.8	H	-1.75	41.87	74.00	-32.13
4514.54	39.50	Ave	35	1.8	H	-1.75	37.75	54.00	-16.25
5119.20	43.42	PK	61	1.5	H	-0.95	42.47	74.00	-31.53
5119.20	40.99	Ave	61	1.5	H	-0.95	40.04	54.00	-13.96
11550.00	44.55	PK	263	1.2	H	4.83	49.38	74.00	-24.62
11550.00	36.75	Ave	263	1.2	H	4.83	41.58	54.00	-12.42
17325.00	46.66	PK	120	1.7	H	10.55	57.21	74.00	-16.79
17325.00	38.40	Ave	120	1.7	H	10.55	48.95	54.00	-5.05

**Test Frequency: 18GHz~40GHz**

The measurements were more than 20 dB below the limit and not reported.



## 10 Duty cycle


Test Requirement:	47 CFR Part 15C 15.407 and 789033 D02 General UNII Test Procedures New Rules v02r01 , Section (B)
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	Only the worst case is recorded in the report.

### 10.1 Summary of Test Results

802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT80) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100
155	100	100	100

Test result plots shown as follows:


802.11a U-NII-1 Low channel

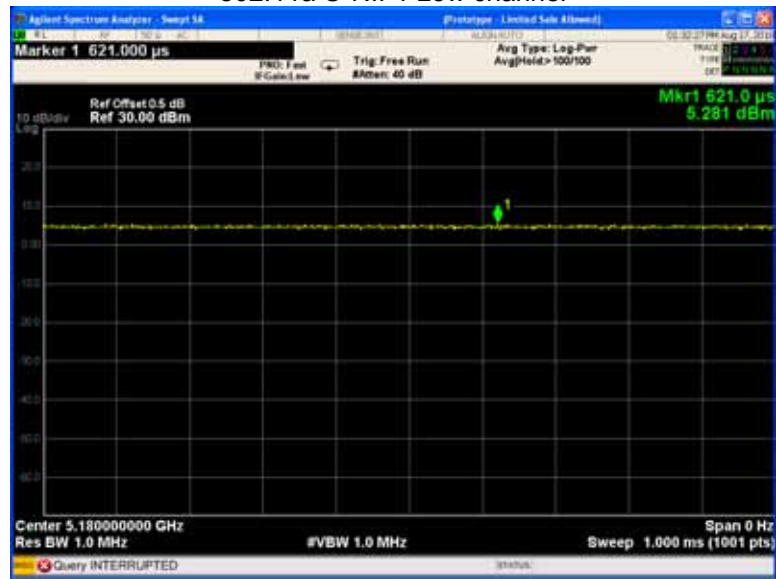


802.11n(HT20) U-NII-1 Low channel




802.11n(HT40) U-NII-1 Low channel

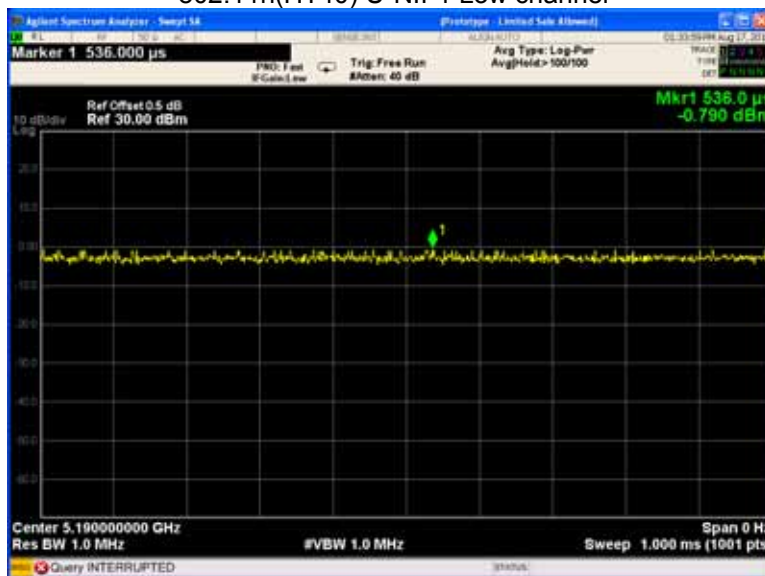


802.11ac(HT20) U-NII-1 Low channel

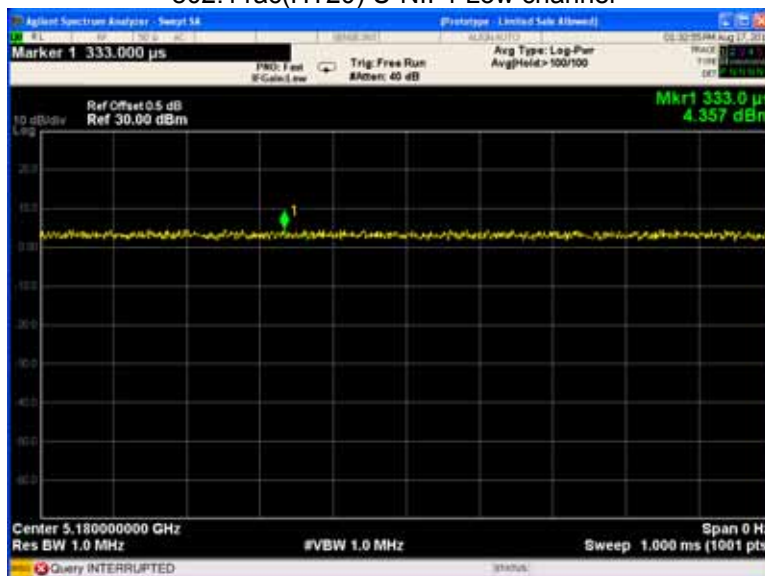

802.11ac(HT40) U-NII-1 Low channel

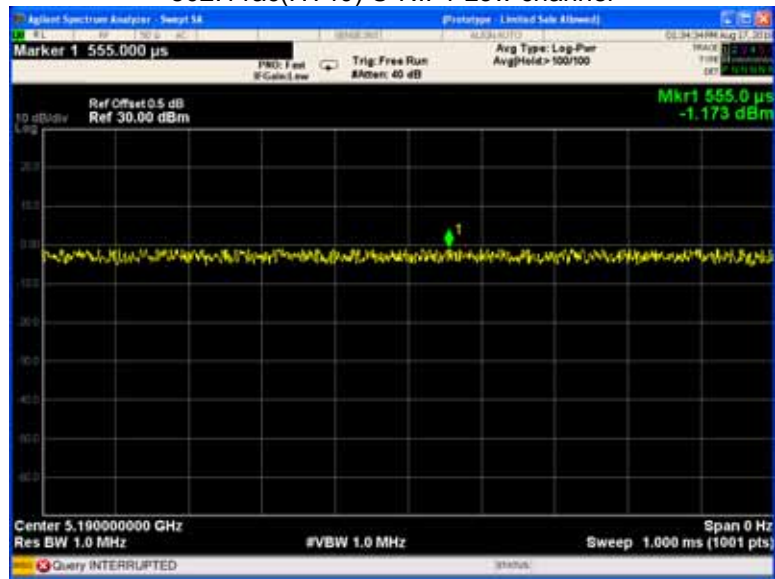


802.11ac(HT80) U-NII-1 Low channel

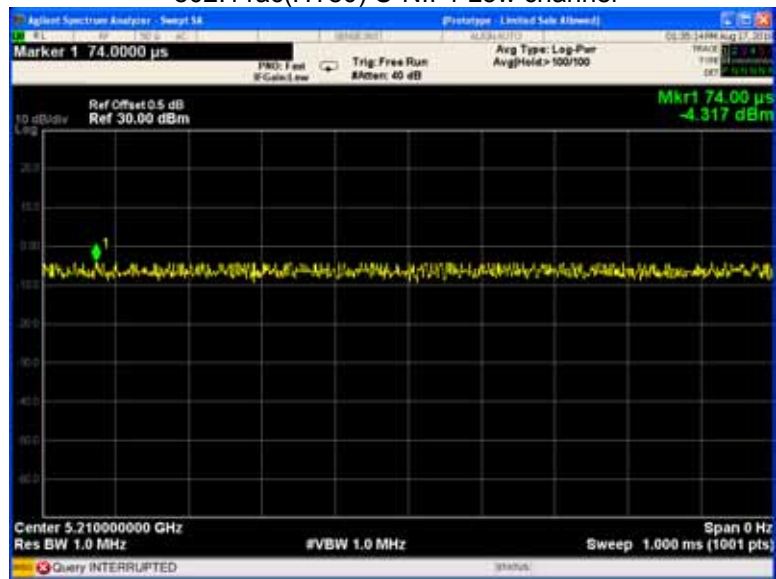


802.11a U-NII-3 Low channel




802.11n(HT20) U-NII-3 Low channel

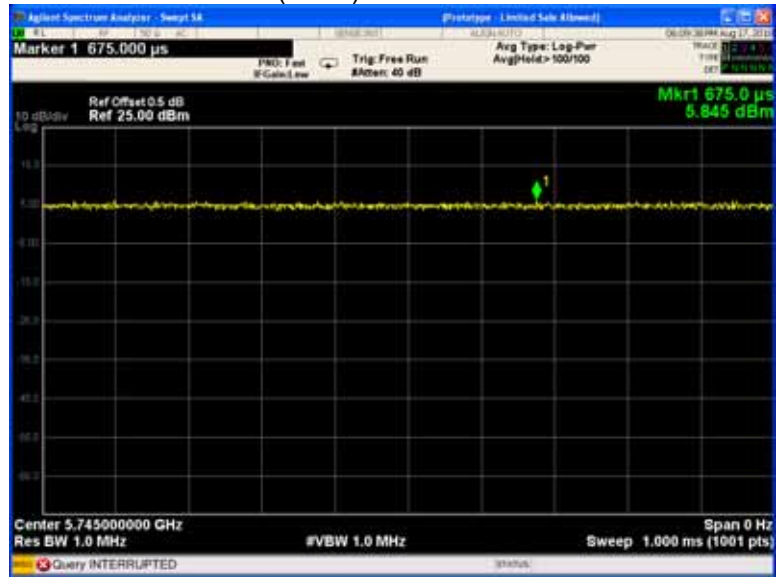


802.11n(HT40) U-NII-3 Low channel

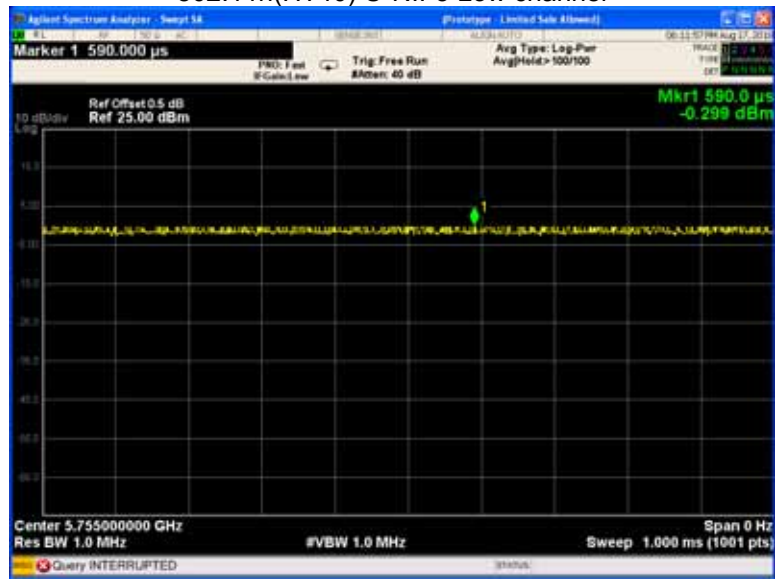


802.11ac(HT20) U-NII-3 Low channel

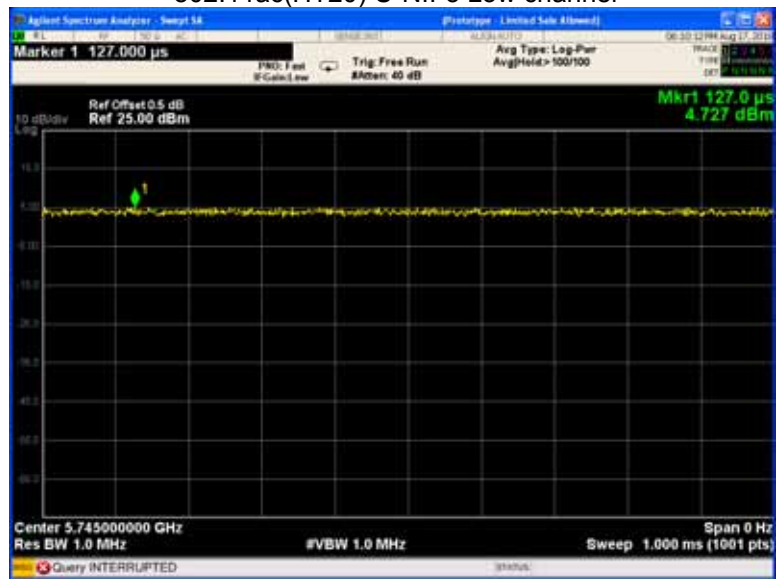

802.11ac(HT40) U-NII-3 Low channel

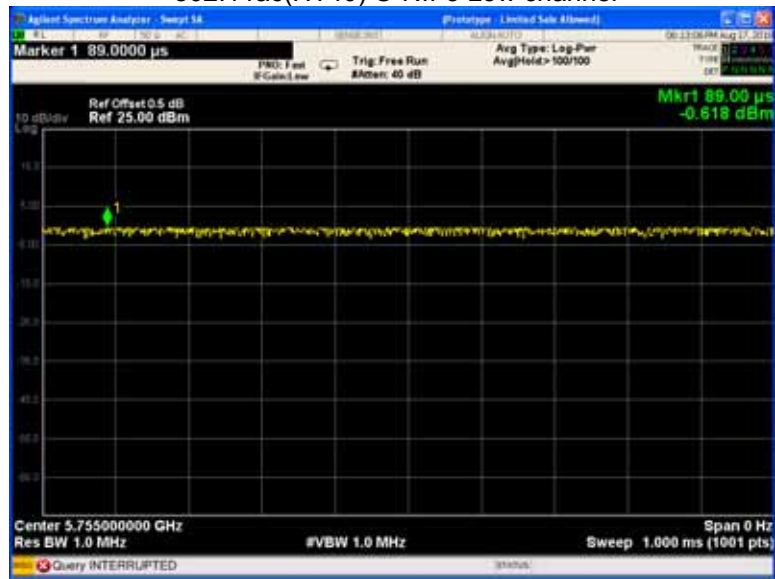

802.11ac(HT80) U-NII-3 Low channel

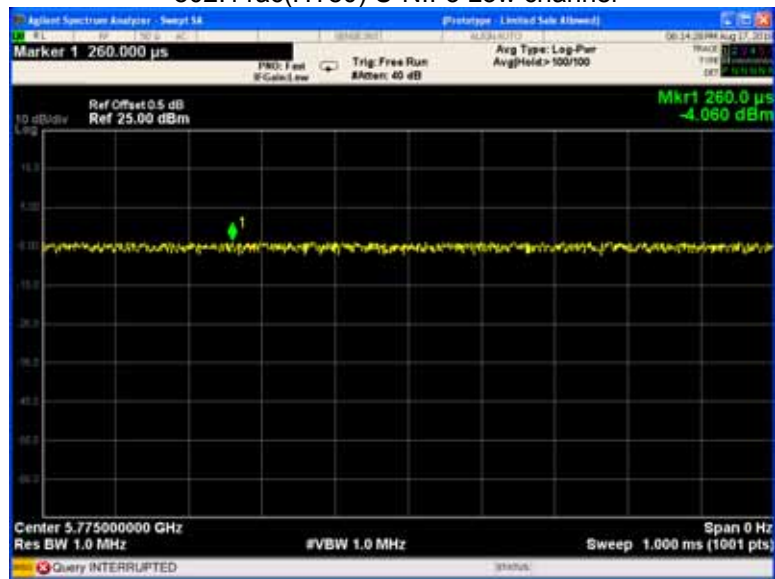

## 11 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2013
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz. (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Test Result:	PASS

### 11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### 11.2 Test Result

Test result plots shown as follows:


802.11a U-NII-1 Band edge-left side




802.11a U-NII-1 Band edge-right side




802.11a U-NII-3 Band edge-left side

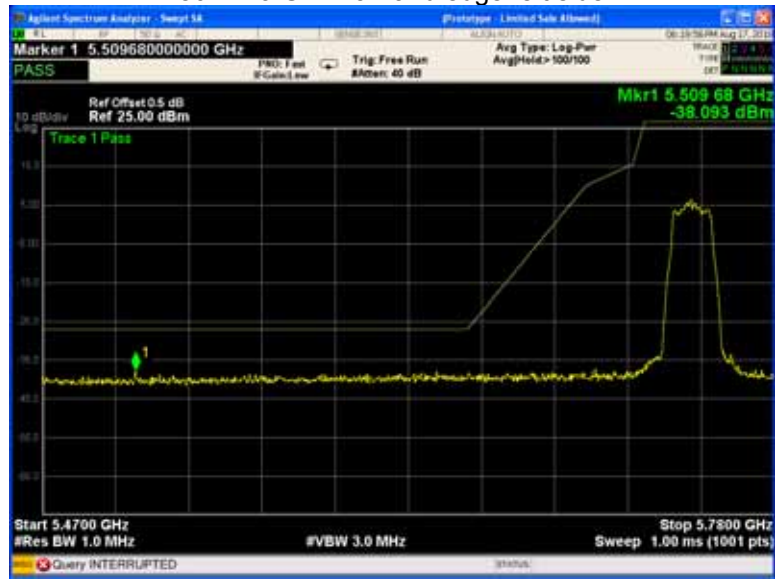

802.11a U-NII-3 Band edge-right side

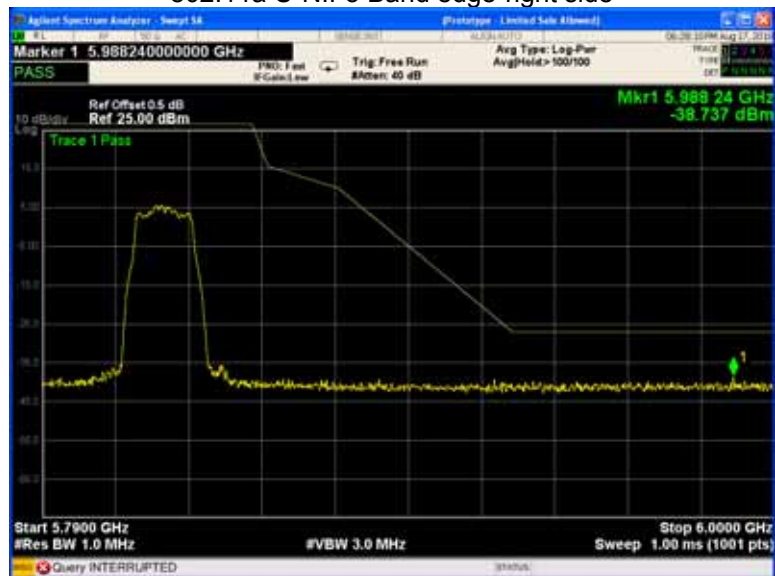


802.11n(HT20) U-NII-1 Band edge-left side

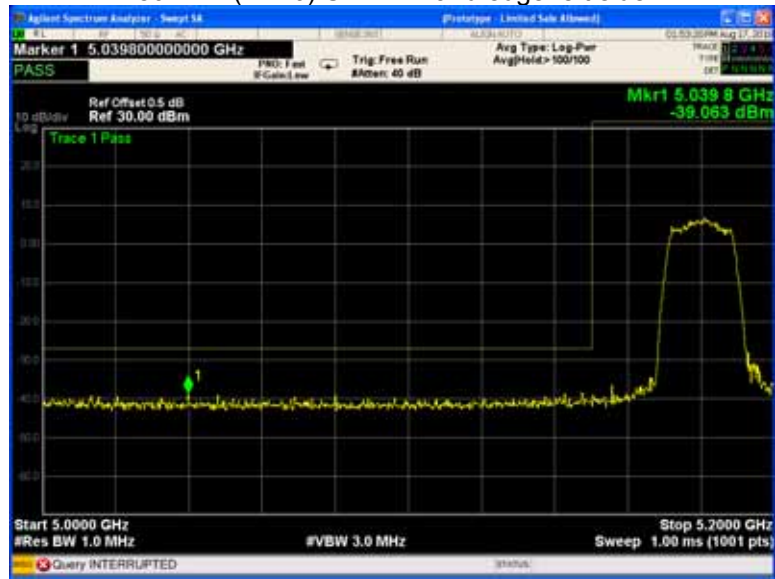


802.11n(HT20) U-NII-1 Band edge-right side




802.11n(HT20) U-NII-3 Band edge-left side

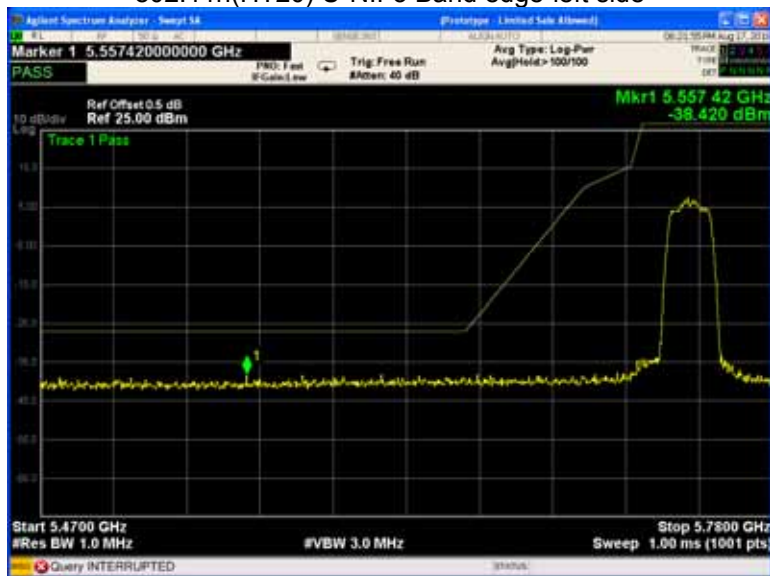

802.11n(HT20) U-NII-3 Band edge-right side

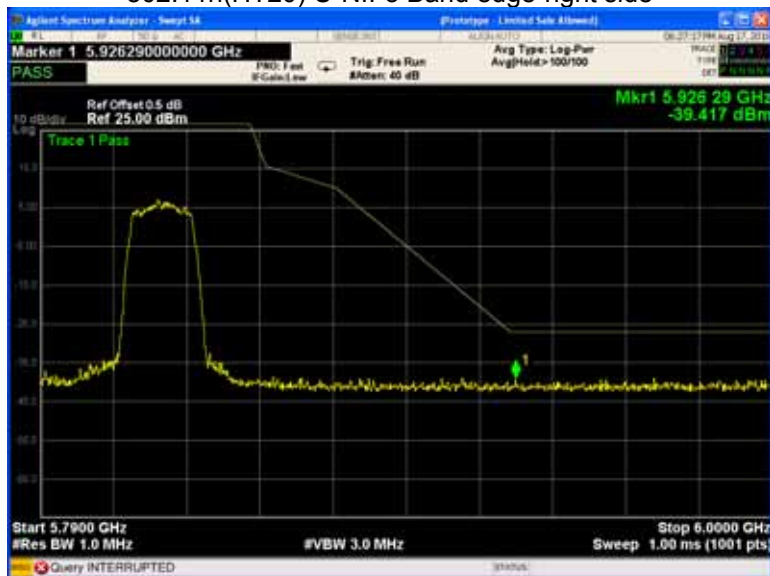


802.11n(HT40) U-NII-1 Band edge-left side

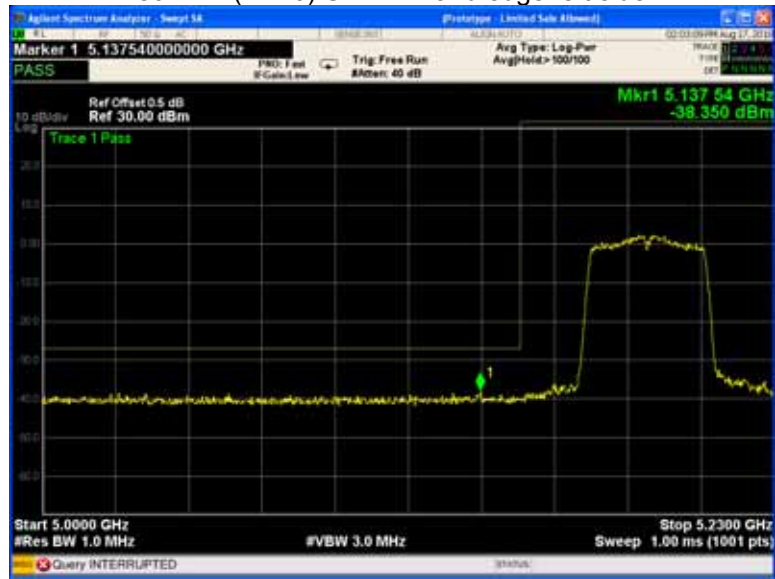


802.11n(HT40) U-NII-1 Band edge-right side




802.11n(HT40) U-NII-3 Band edge-left side

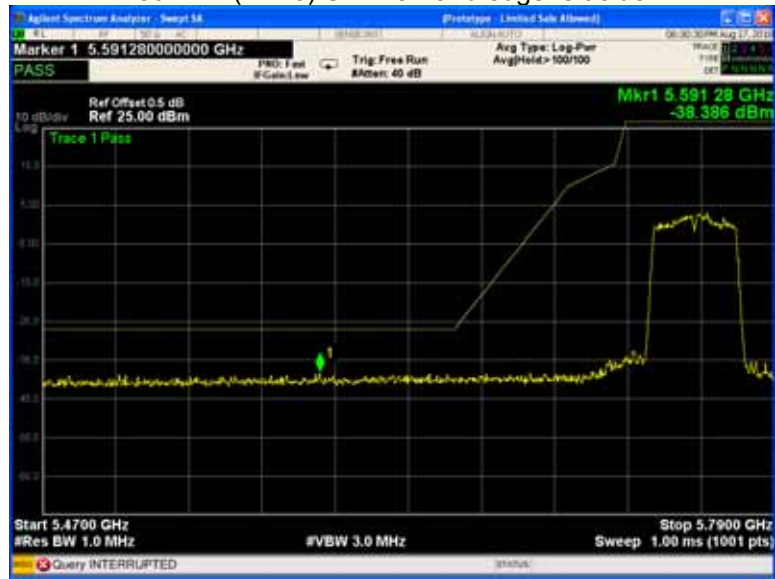

802.11n(HT40) U-NII-3 Band edge-right side

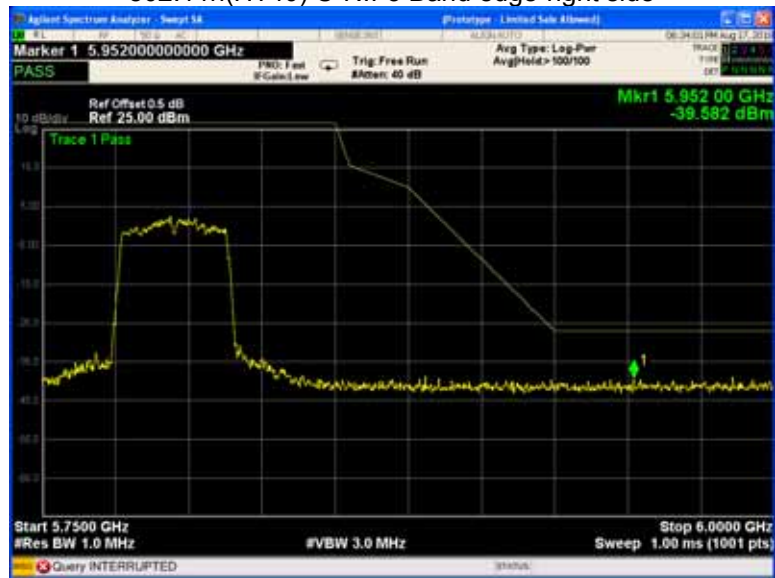

802.11ac(HT20) U-NII-1 Band edge-left side

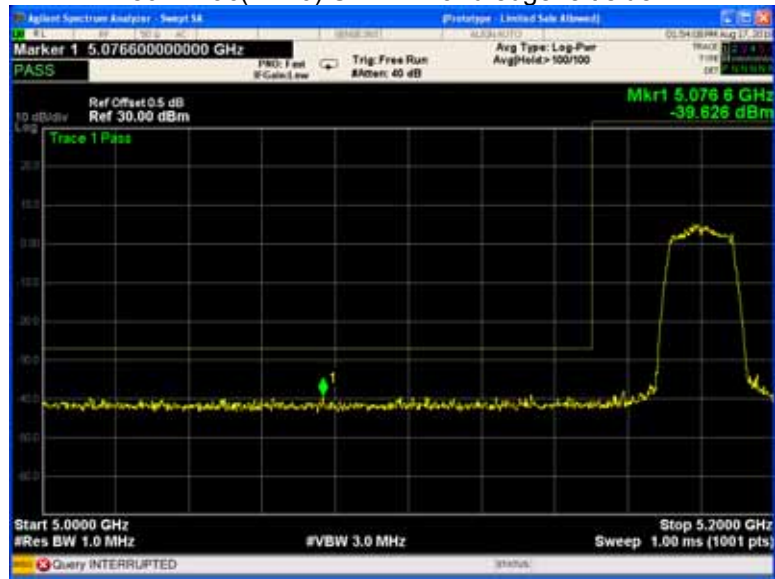


802.11ac(HT20) U-NII-1 Band edge-right side






802.11ac(HT20) U-NII-3 Band edge-left side

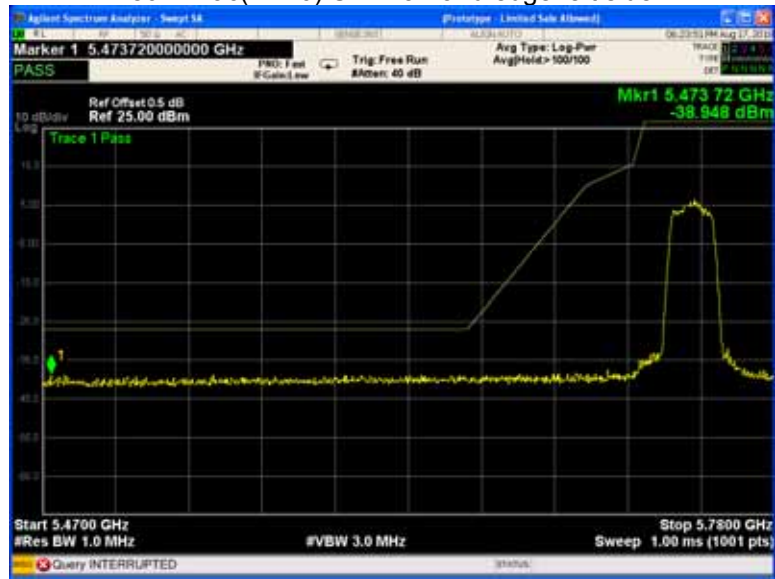

802.11ac(HT20) U-NII-3 Band edge-right side

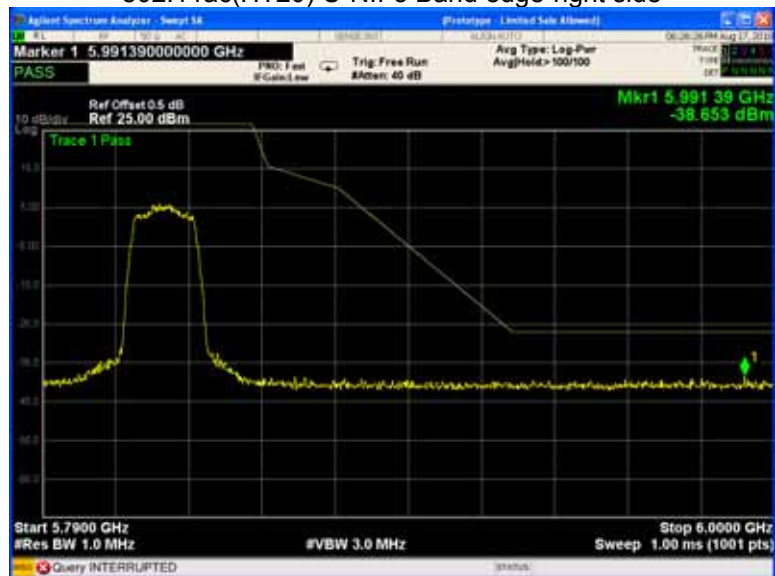




802.11ac(HT40) U-NII-1 Band edge-left side



802.11ac(HT40) U-NII-1 Band edge-right side




802.11ac(HT40) U-NII-3 Band edge-left side

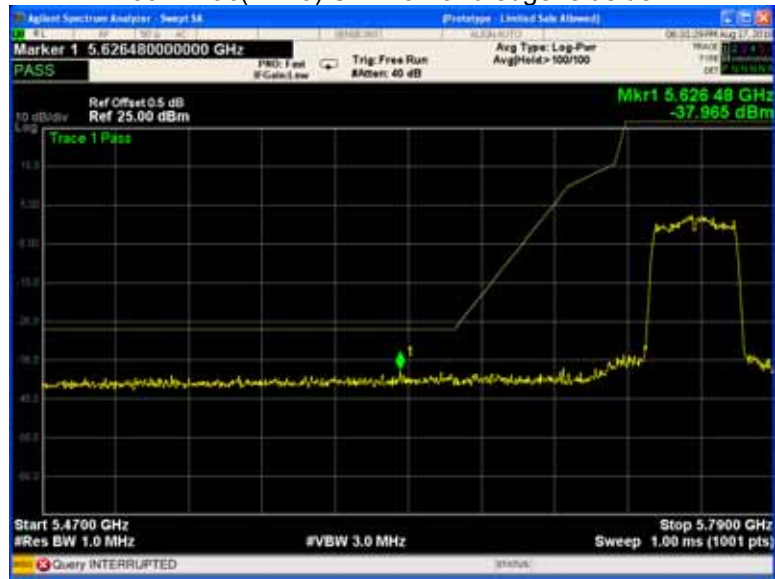

802.11ac(HT40) U-NII-3 Band edge-right side




802.11ac(HT80) U-NII-1 Band edge-left side

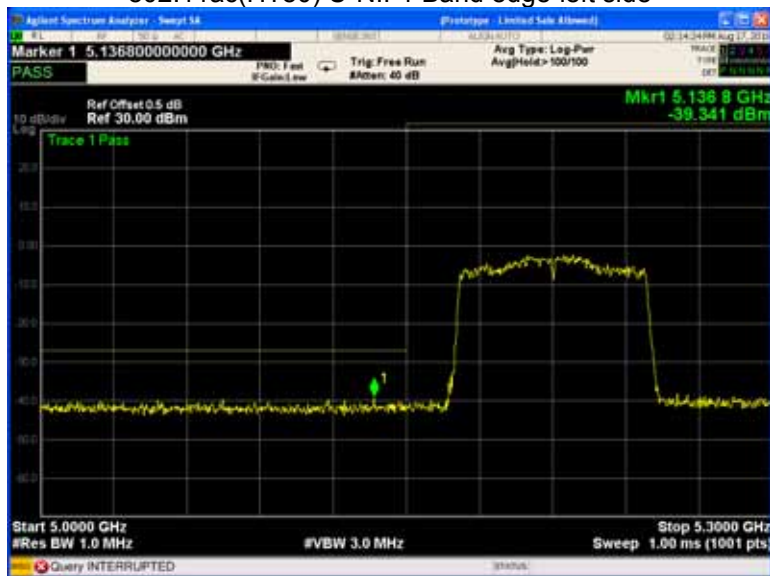

802.11ac(HT80) U-NII-1 Band edge-right side



802.11ac(HT80) U-NII-3 Band edge-left side

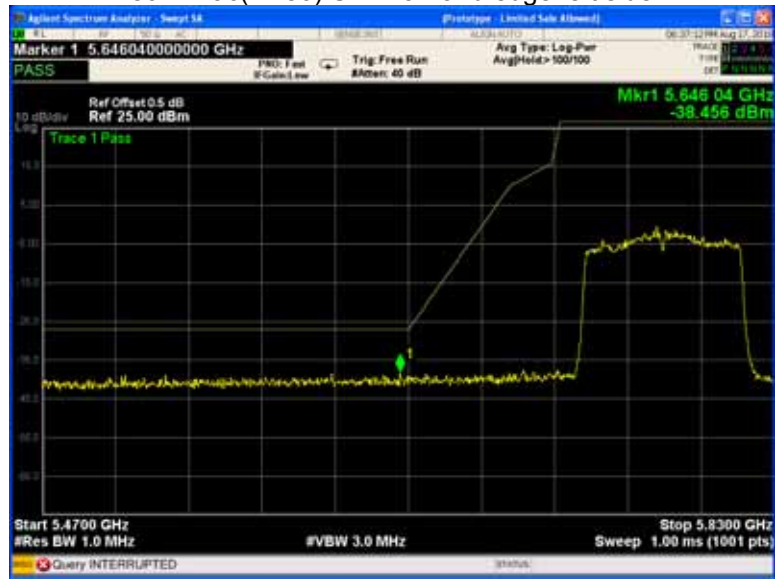

802.11ac(HT80) U-NII-3 Band edge-right side



## 12 6 dB Bandwidth

Test Requirement: FCC CFR47 Part 15 Section 15.407(e)  
 KDB789033 D02 General UNII Test Procedures New Rules  
 Test Method: v02r01 Section C  
 Test Limit:  $\geq 500$  kHz  
 Test Result: PASS

### 12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 12.2 Test Result:

Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	16.32	16.32	16.26
	802.11n(HT20)	17.70	17.73	17.73
	802.11n(HT40)	36.36	/	36.42
	802.11ac(HT20)	17.67	17.76	17.70
	802.11ac(HT40)	36.60	/	36.48
	802.11ac(HT80)	75.72	/	/

Test result plots shown as follows:

802.11a U-NII-3 Low channel



802.11a U-NII-3 Middle channel



802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 Low channel





802.11n(HT20) U-NII-3 Middle channel



802.11n(HT20) U-NII-3 High channel





802.11n(HT40) U-NII-3 Low channel



802.11n(HT40) U-NII-3 High channel




802.11ac(HT20) U-NII-3 Low channel



802.11ac(HT20) U-NII-3 Middle channel



802.11ac(HT20) U-NII-3 High channel

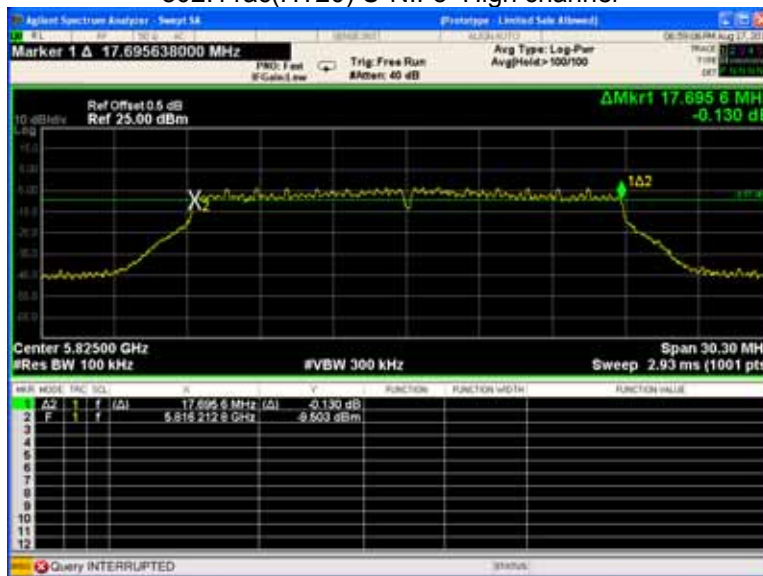


802.11ac(HT40) U-NII-3 Low channel



802.11ac(HT40) U-NII-3 High channel



802.11ac(HT80) U-NII-3 Low channel

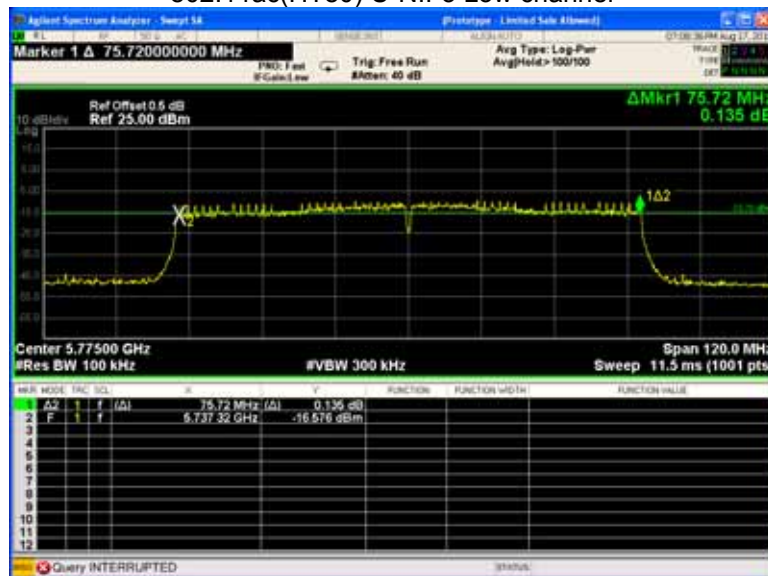

## 13 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D
Test Limit:	No restriction limits
Test Result:	PASS

### 13.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
RBW = approximately 1% of the emission bandwidth,  
VBW  $\geq 3 \times$  RBW

**13.2 Test Result:**


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
<b>U-NII-1</b>	802.11a	20.41	20.48	20.45	16.433	16.438	16.434
	802.11n(HT20)	21.20	21.10	20.92	17.735	17.721	17.737
	802.11n(HT40)	39.26	/	39.45	36.169	/	36.232
	802.11ac(HT20)	21.18	21.23	21.10	17.724	17.725	17.713
	802.11ac(HT40)	39.84	/	39.83	36.323	/	36.344
	802.11ac(HT80)	80.49	/	/	75.527	/	/
<b>U-NII-3</b>	802.11a	20.51	20.52	20.45	16.440	16.445	16.447
	802.11n(HT20)	19.45	19.15	19.35	17.490	17.500	17.510
	802.11n(HT40)	39.58	/	39.40	36.180	/	36.121
	802.11ac(HT20)	21.10	21.01	21.28	17.719	17.717	17.703
	802.11ac(HT40)	39.78	/	39.88	36.348	/	36.379
	802.11ac(HT80)	80.61	/	/	75.522	/	/

Test result plots shown as follows:


802.11a U-NII-1 Low channel

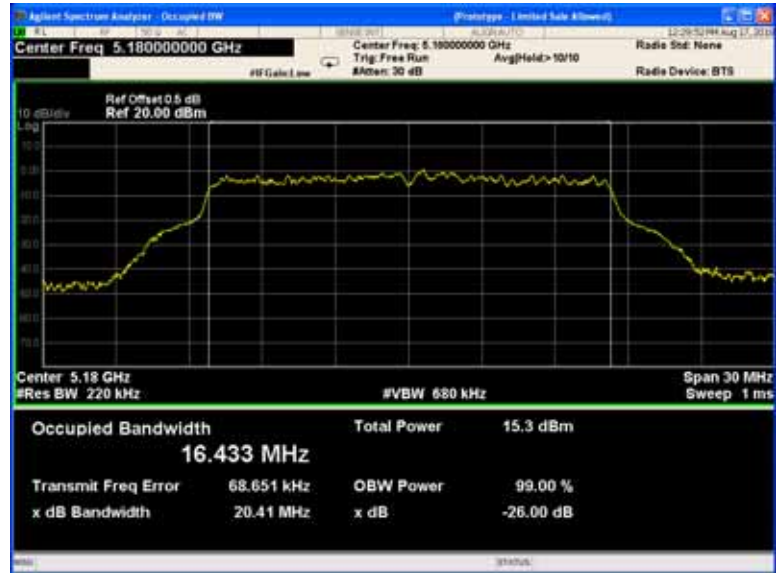


802.11a U-NII-1 Middle channel

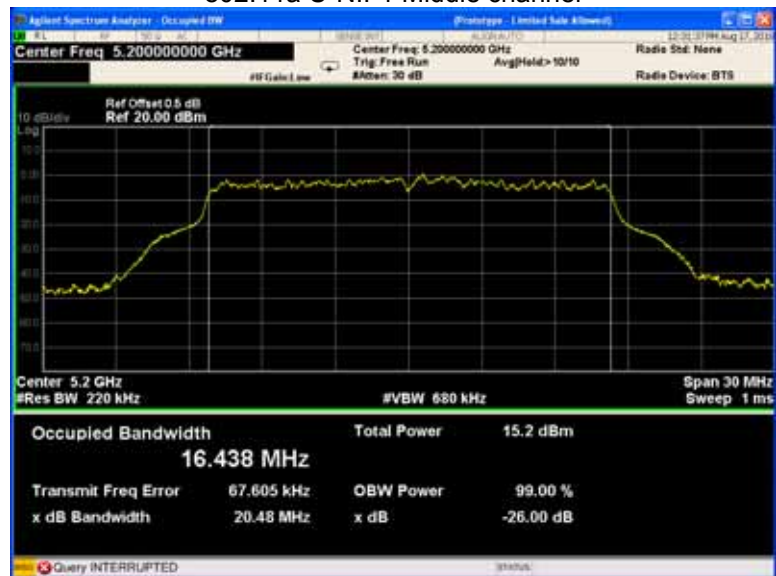

802.11a U-NII-1 High channel

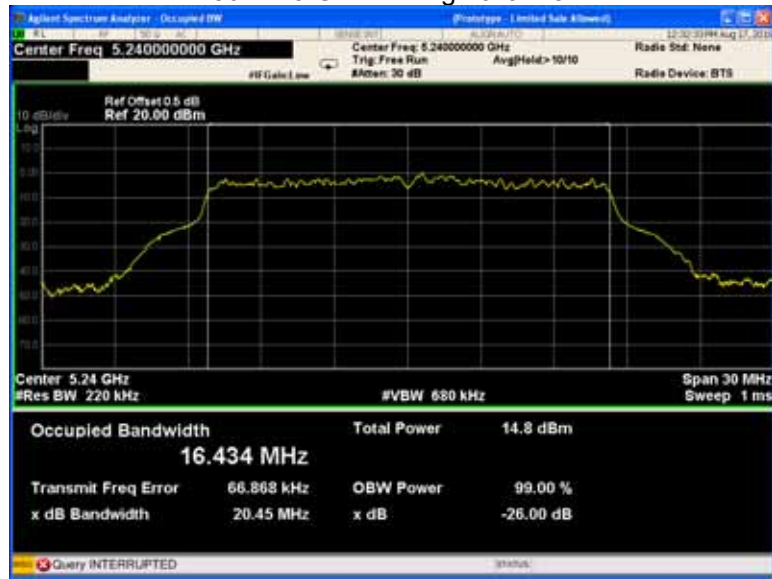


802.11n(HT20) U-NII-1 Low channel

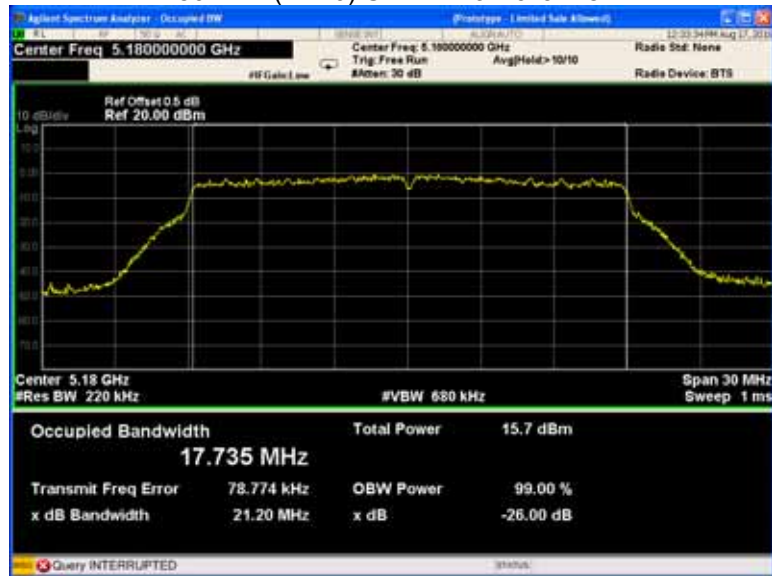




802.11n(HT20) U-NII-1 Middle channel

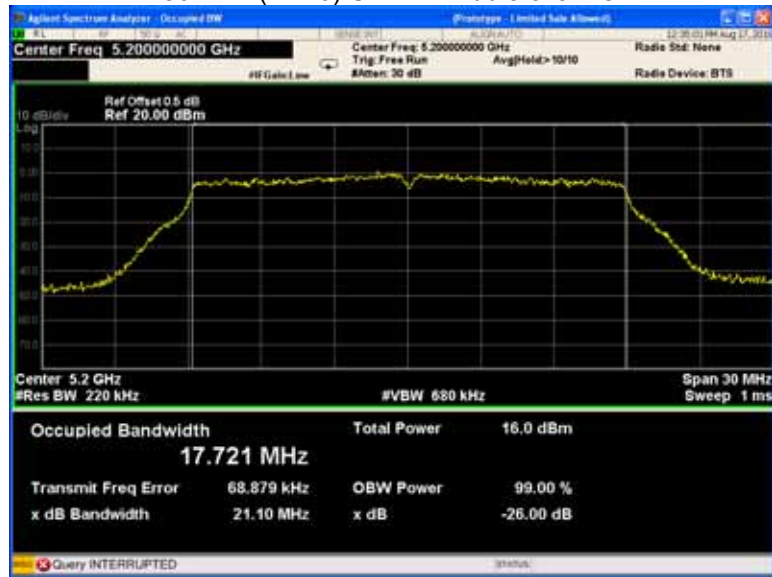


802.11n(HT20) U-NII-1 High channel

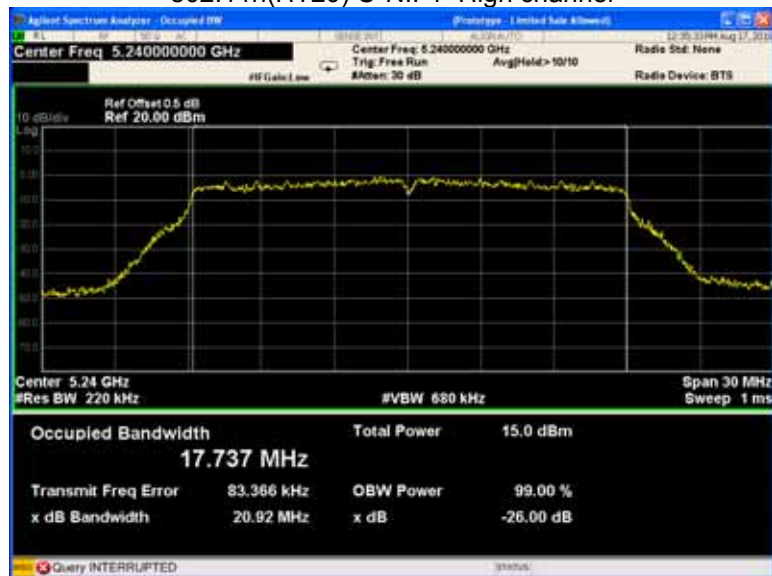


802.11n(HT40) U-NII-1 Low channel



802.11n(HT40) U-NII-1 High channel

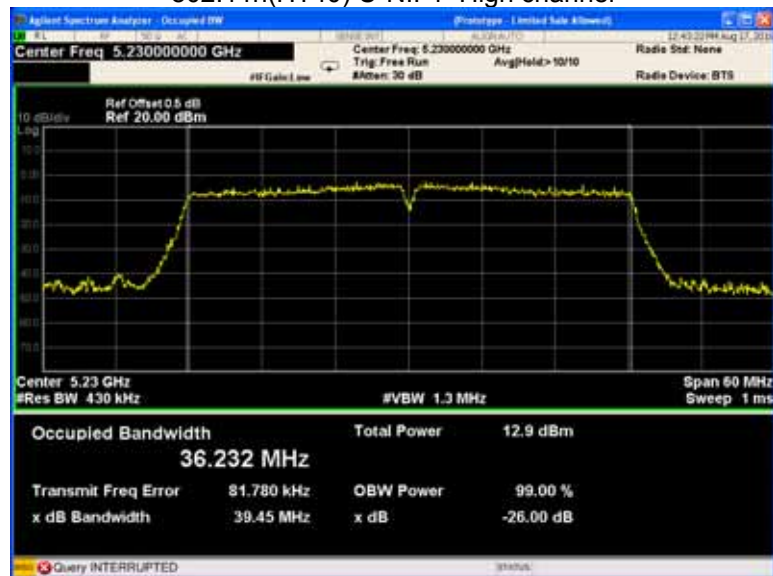


## 802.11ac(HT20) U-NII-1 Low channel

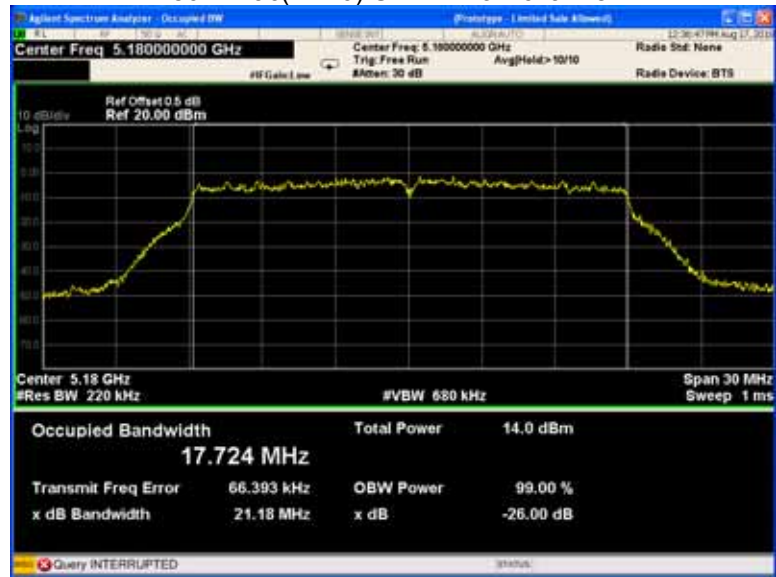


## 802.11ac(HT20) U-NII-1 Middle channel




## 802.11ac(HT20) U-NII-1 High channel

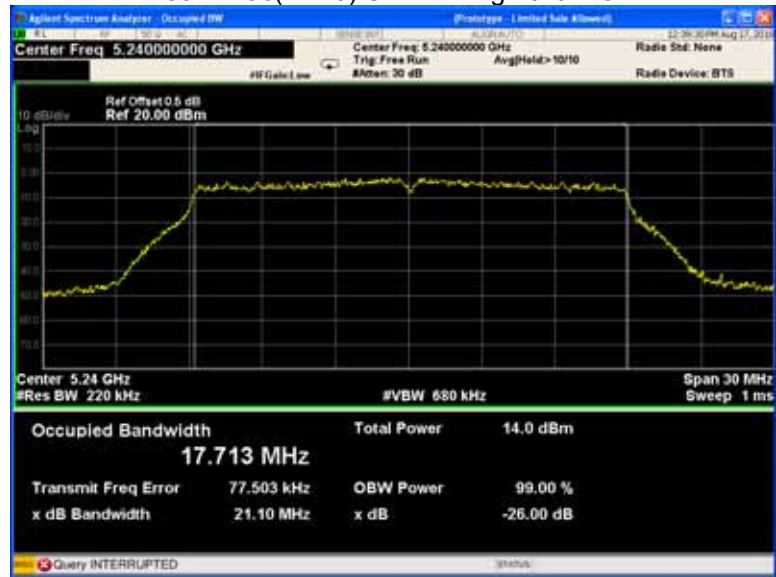

## 802.11ac(HT40) U-NII-1 Low channel

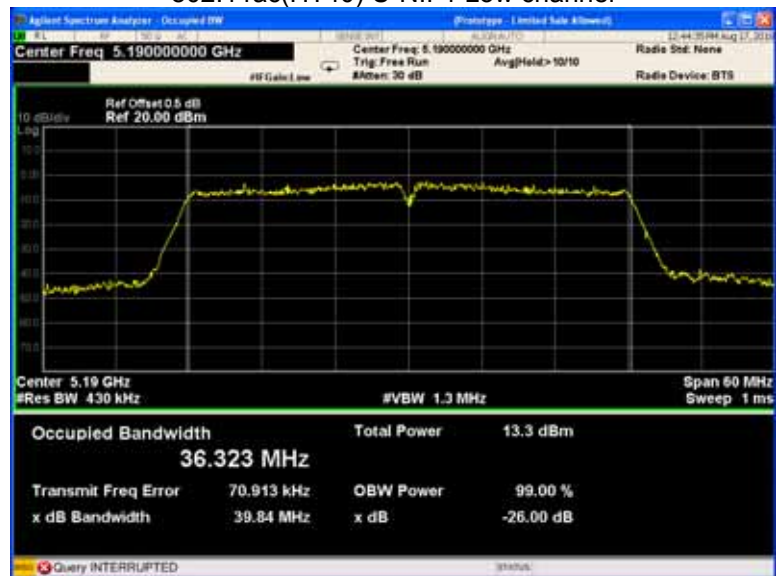


802.11n(HT40) U-NII-1 High channel

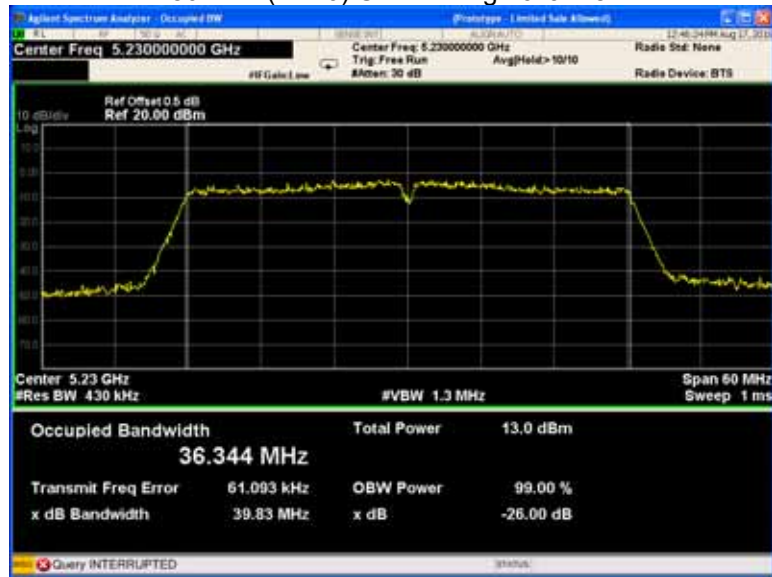


802.11ac(HT80) U-NII-1 Low channel




802.11a U-NII-3 Low channel

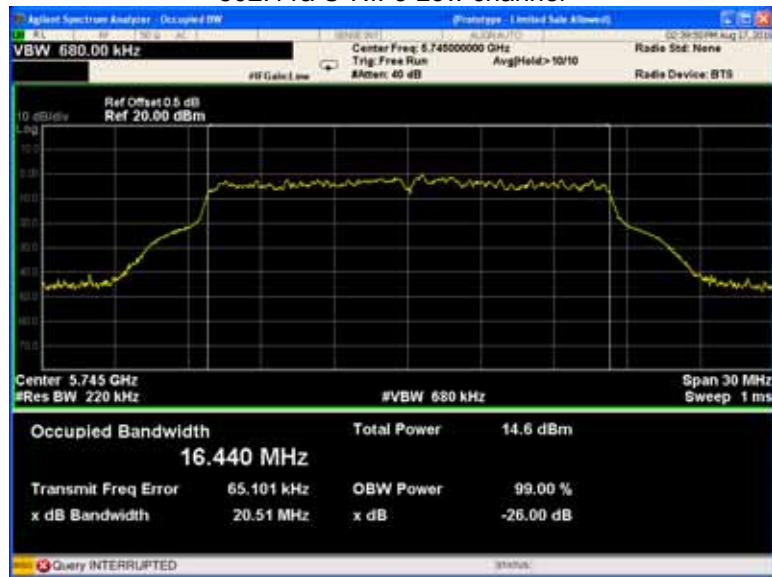


802.11a U-NII-3 Middle channel

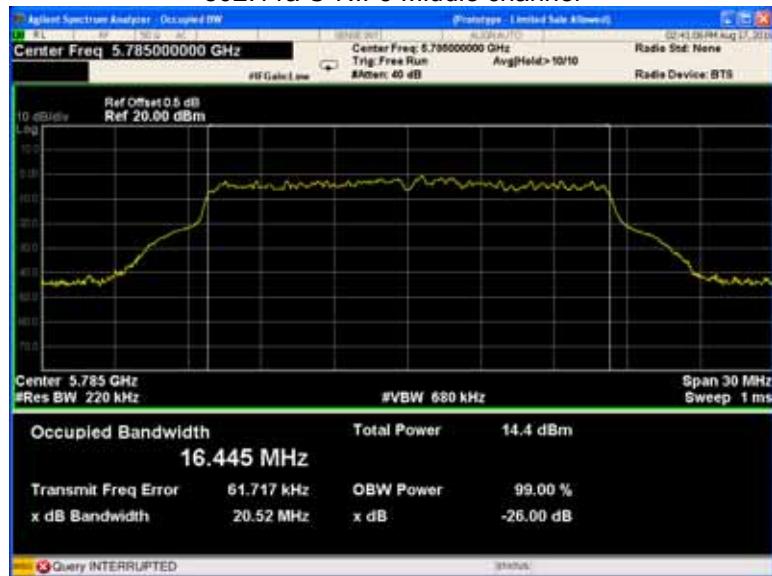

802.11a U-NII-3 High channel

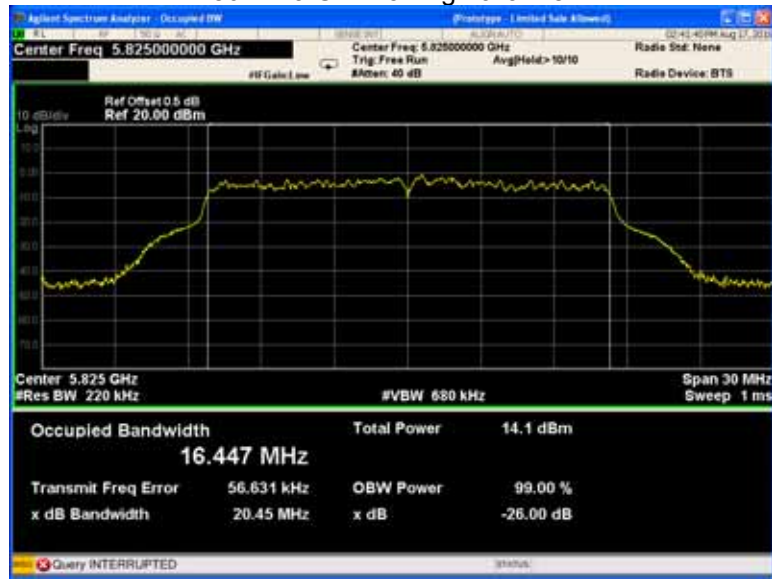


802.11n(HT20) U-NII-3 Low channel

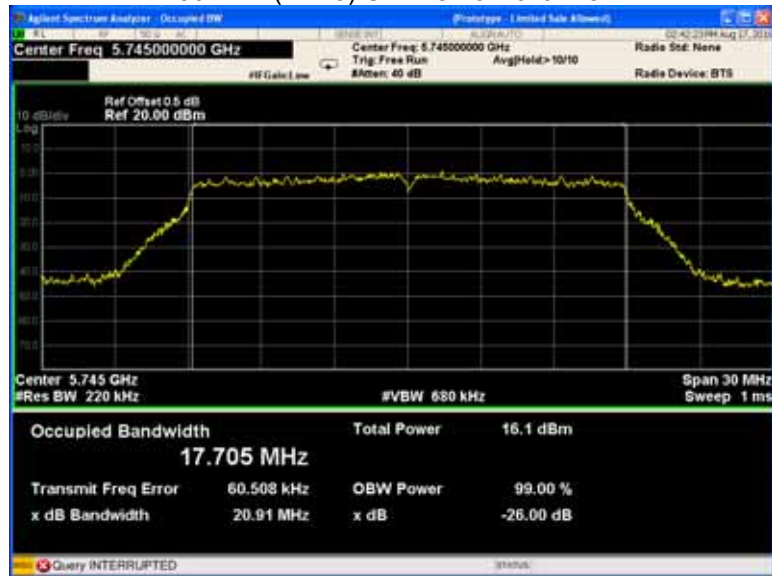




802.11n(HT20) U-NII-3 Middle channel

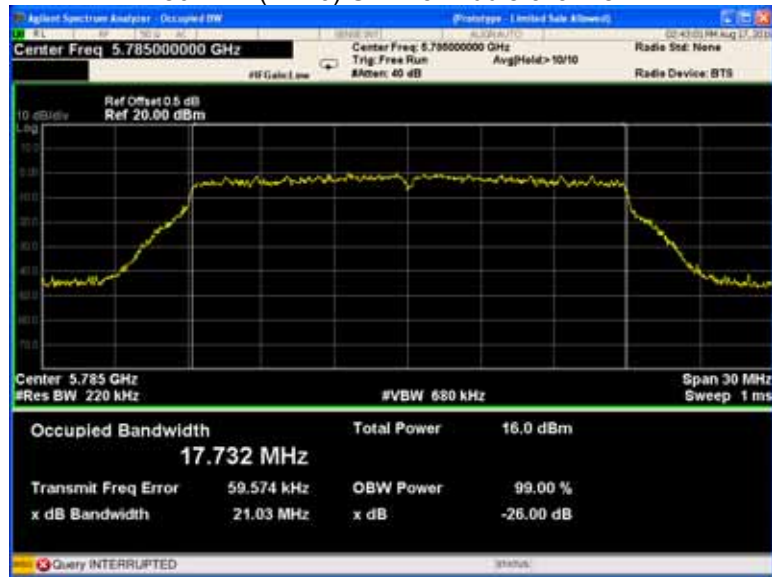


802.11n(HT20) U-NII-3 High channel

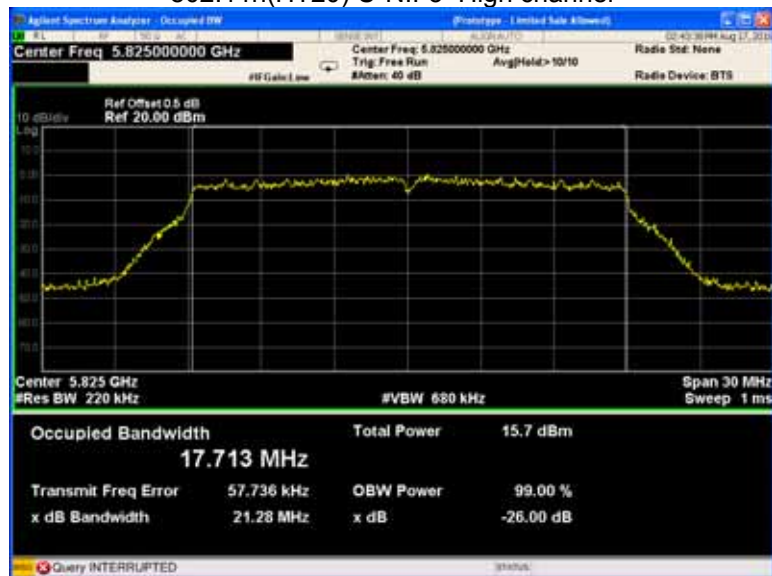




802.11n(HT40) U-NII-3 Low channel

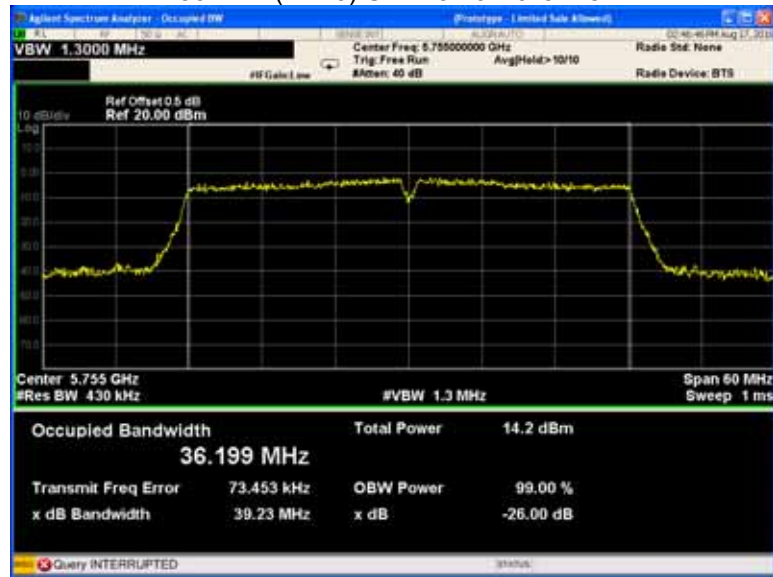

802.11n(HT40) U-NII-3 High channel

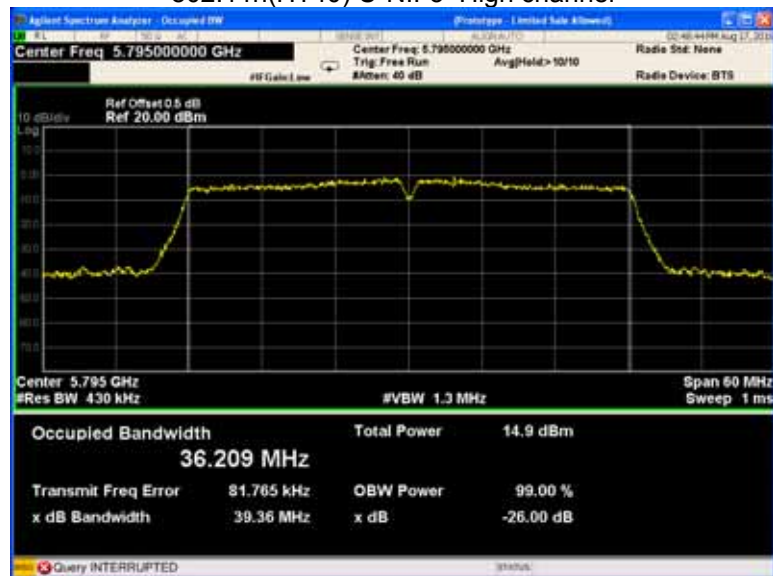


802.11ac(HT20) U-NII-3 Low channel



802.11ac(HT20) U-NII-3 Middle channel




802.11ac(HT20) U-NII-3 High channel

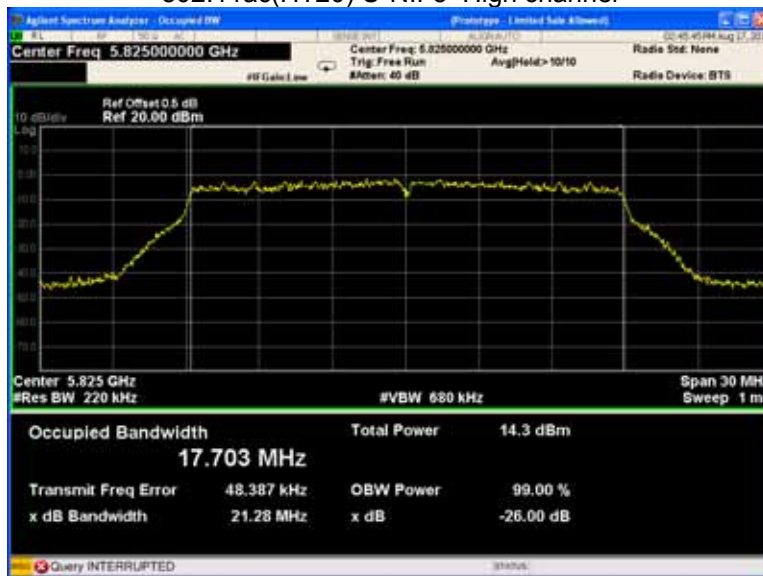

802.11ac(HT40) U-NII-3 Low channel



802.11n(HT40) U-NII-3 High channel

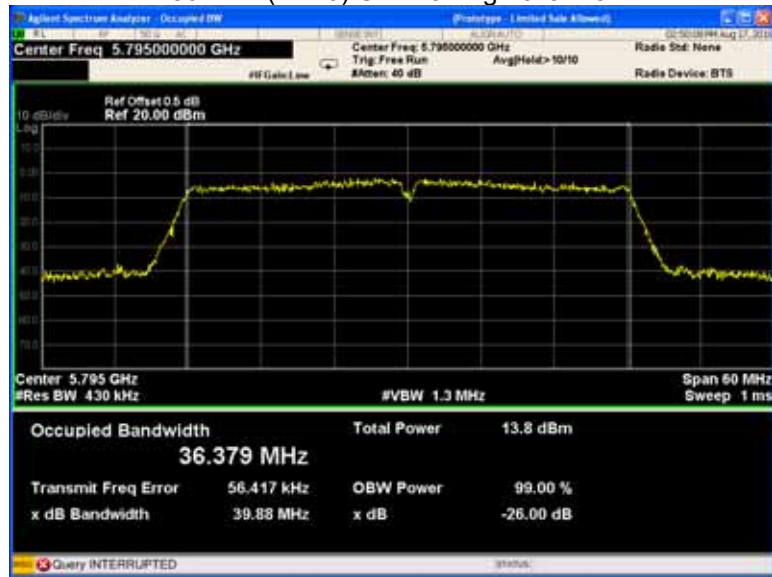

802.11ac(HT80) U-NII-3 Low channel



## 14 Conducted Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB789033 D02 General UNII Test Procedures New Rules
Test Method:	v02r01 Section E
Test Limit:	U-NII-1 250mW(24dBm) U-NII-3 1W(30dBm)
Test Result:	PASS Conducted output power= measurement power+10log(1/x)
Remark:	X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

### 14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

**14.2 Test Result :**

Band	Operation mode	CH	Conducted Output Power (dBm)
U-NII-1	802.11a	Low	15.15
		Middle	15.13
		High	15.12
	802.11n(HT20)	Low	15.35
		Middle	15.63
		High	15.15
	802.11n(HT40)	Low	13.20
		Middle	/
		High	13.12
	802.11ac(HT20)	Low	14.34
		Middle	14.64
		High	14.25
	802.11ac(HT40)	Low	13.33
		Middle	/
		High	13.29
802.11ac(HT80)	Low	12.65	
	Middle	/	
	High	/	
U-NII-3	802.11a	Low	10.49
		Middle	10.33
		High	10.46
	802.11n(HT20)	Low	10.37
		Middle	10.30
		High	10.23
	802.11n(HT40)	Low	10.80
		Middle	/
		High	10.62
	802.11ac(HT20)	Low	10.22
		Middle	10.18
		High	10.10
	802.11ac(HT40)	Low	10.55
		Middle	/
		High	10.37
802.11ac(HT80)	Low	10.26	
	Middle	/	
	High	/	

Test result plots shown as follows:

802.11a U-NII-1 Low channel



802.11a U-NII-1 Middle channel



802.11a U-NII-1 High channel



802.11n(HT20) U-NII-1 Low channel





802.11n(HT20) U-NII-1 Middle channel



802.11n(HT20) U-NII-1 High channel



### 802.11n(HT40) U-NII-1 Low channel



### 802.11n(HT40) U-NII-1 High channel



### 802.11ac(HT20) U-NII-1 Low channel




### 802.11ac(HT20) U-NII-1 Middle channel



### 802.11ac(HT20) U-NII-1 High channel



### 802.11ac(HT40) U-NII-1 Low channel

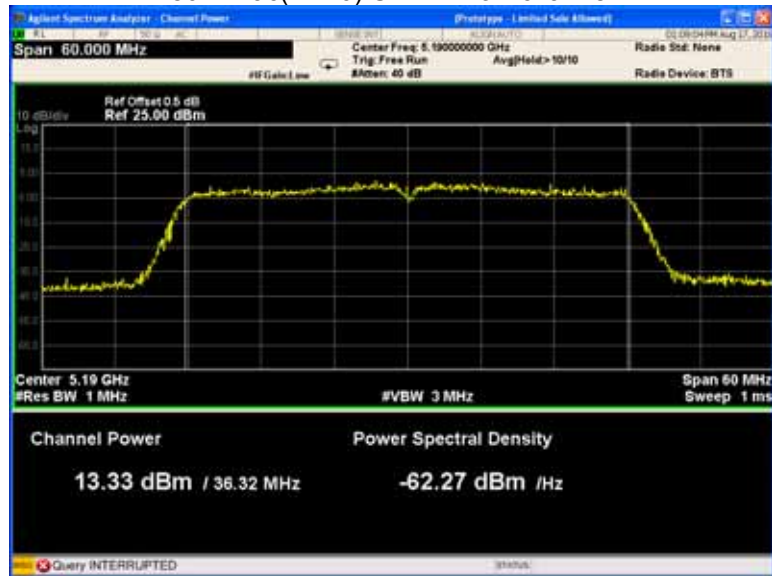

### 802.11n(HT40) U-NII-1 High channel



### 802.11ac(HT80) U-NII-1 Low channel



802.11a U-NII-3 Low channel



802.11a U-NII-3 Middle channel



802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 Low channel





### 802.11n(HT20) U-NII-3 Middle channel



### 802.11n(HT20) U-NII-3 High channel





802.11n(HT40) U-NII-3 Low channel



802.11n(HT40) U-NII-3 High channel



802.11ac(HT20) U-NII-3 Low channel



802.11ac(HT20) U-NII-3 Middle channel



### 802.11ac(HT20) U-NII-3 High channel



### 802.11ac(HT40) U-NII-3 Low channel



### 802.11n(HT40) U-NII-3 High channel



### 802.11ac(HT80) U-NII-3 Low channel



## 15 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 , Section F
Test Limit:	$\leq 11.00\text{dBm/MHz}$ for Operation in the U-NII-1(5150MHz-5250MHz)of mobile device $\leq 30.00\text{dBm}/500\text{KHz}$ for Operation in the U-NII-3(5725MHz- 5850MHz)of device
Test Result:	PASS

### 15.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:  
U-NII-1  
RBW = 1MHz, VBW 3\* RBW Sweep = auto; Detector Function = Peak. Trae = Max hold.  
U-NII-3  
RBW = 510KHz, VBW 3\* RBW Sweep = auto; Detector Function = Peak. Trae = Max hold.
3. Allow the trae to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjaent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

**15.2 Test Result:**

Band	Operation mode	CH	Power Spectral Density (dBm/MHz)	
U-NII-1	802.11a	Low	7.387	
		Middle	7.824	
		High	6.995	
	802.11n(HT20)	Low	6.816	
		Middle	6.850	
		High	7.007	
	802.11n(HT40)	Low	2.380	
		Middle	/	
		High	1.462	
	802.11ac(HT20)	Low	5.440	
		Middle	5.414	
		High	4.887	
	802.11ac(HT40)	Low	2.499	
		Middle	/	
		High	2.259	
	802.11ac(HT80)	Low	-1.264	
		Middle	/	
		High	/	
		Limit	≤11.00dBm/MHz	

Band	Operation mode	CH	Power Spectral Density (dBm/MHz)
<b>U-NII-3</b>	802.11a	Low	-1.947
		Middle	-2.147
		High	-1.616
	802.11n(HT20)	Low	-0.308
		Middle	-0.390
		High	-1.191
	802.11n(HT40)	Low	-3.543
		Middle	/
		High	-4.576
	802.11ac(HT20)	Low	-1.148
		Middle	-2.031
		High	-1.870
	802.11ac(HT40)	Low	-4.417
		Middle	/
		High	-3.393
	802.11ac(HT80)	Low	-5.911
		Middle	/
		High	/
Limit	≤30.00dBm/500KHz		

Test result plots shown as follows:

802.11a U-NII-1 Low channel




802.11a U-NII-1 Middle channel






### 802.11a U-NII-1 High channel

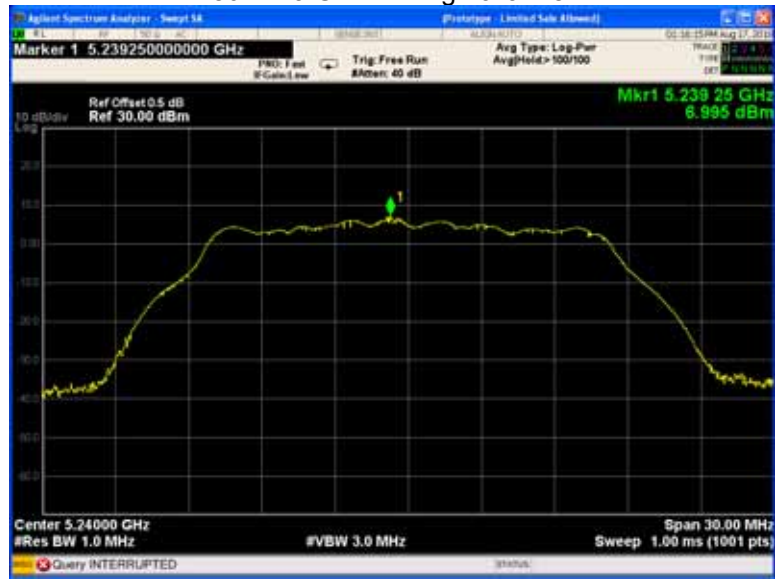

### 802.11n(HT20) U-NII-1 Low channel

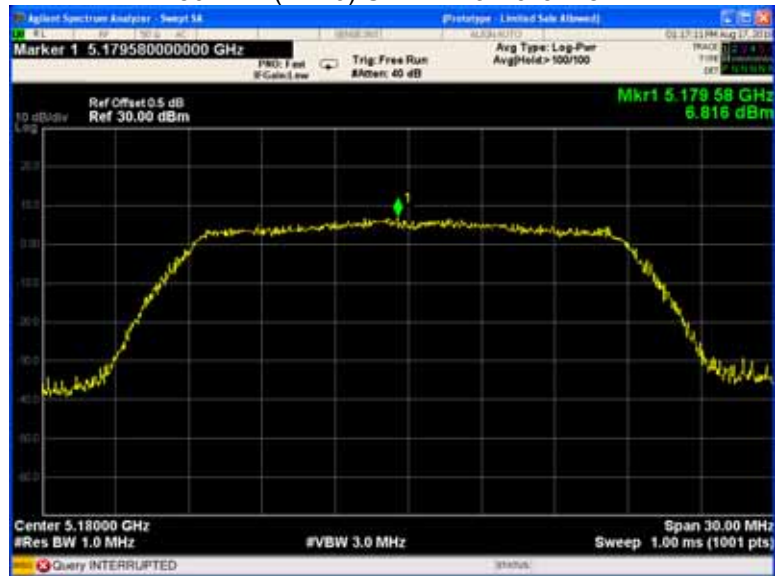


### 802.11n(HT20) U-NII-1 Middle channel



### 802.11n(HT20) U-NII-1 High channel




802.11n(HT40) U-NII-1 Low channel

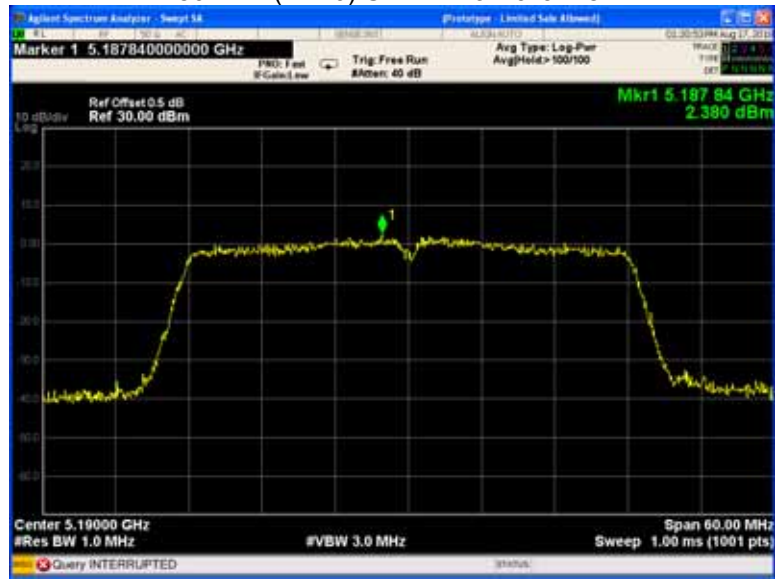

802.11n(HT40) U-NII-1 High channel



802.11ac(HT20) U-NII-1 Low channel

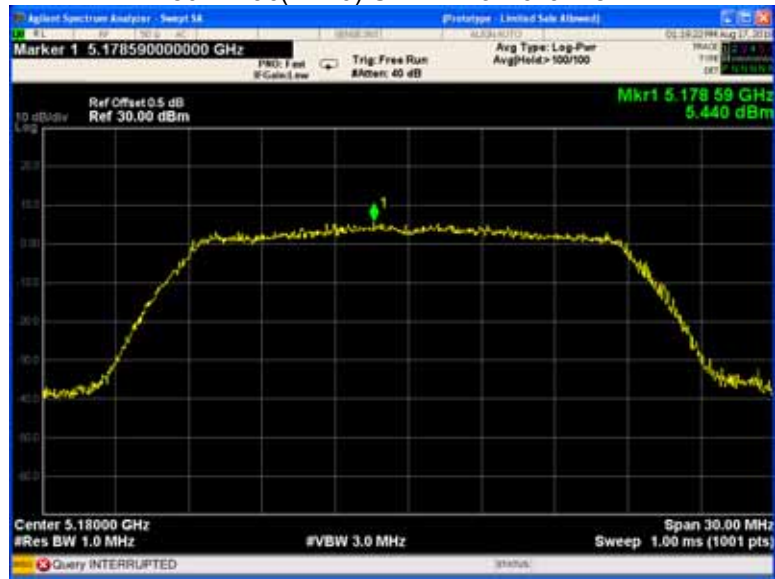

802.11ac(HT20) U-NII-1 Middle channel



802.11ac(HT20) U-NII-1 High channel



802.11ac(HT40) U-NII-1 Low channel



802.11n(HT40) U-NII-1 High channel



802.11ac(HT80) U-NII-1 Low channel



802.11a U-NII-3 Low channel



802.11a U-NII-3 Middle channel






802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 Low channel

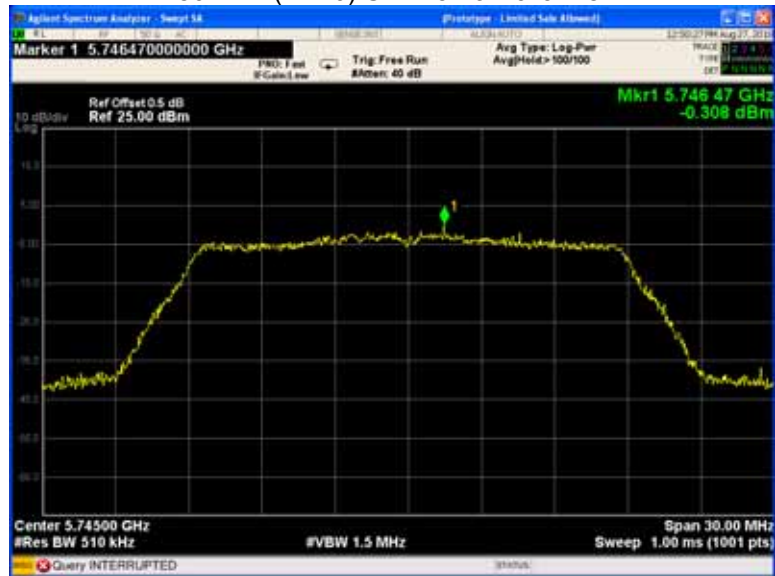





### 802.11n(HT20) U-NII-3 Middle channel



### 802.11n(HT20) U-NII-3 High channel

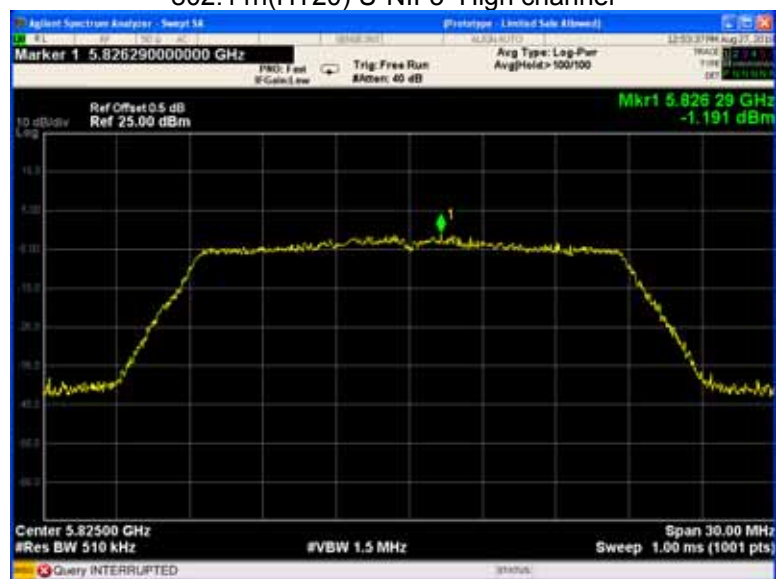


802.11n(HT40) U-NII-3 Low channel

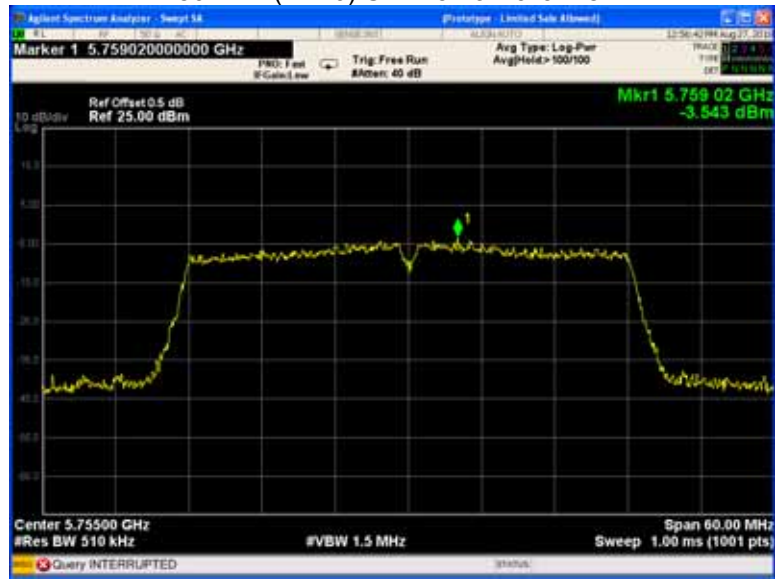

802.11n(HT40) U-NII-3 High channel



802.11ac(HT20) U-NII-3 Low channel

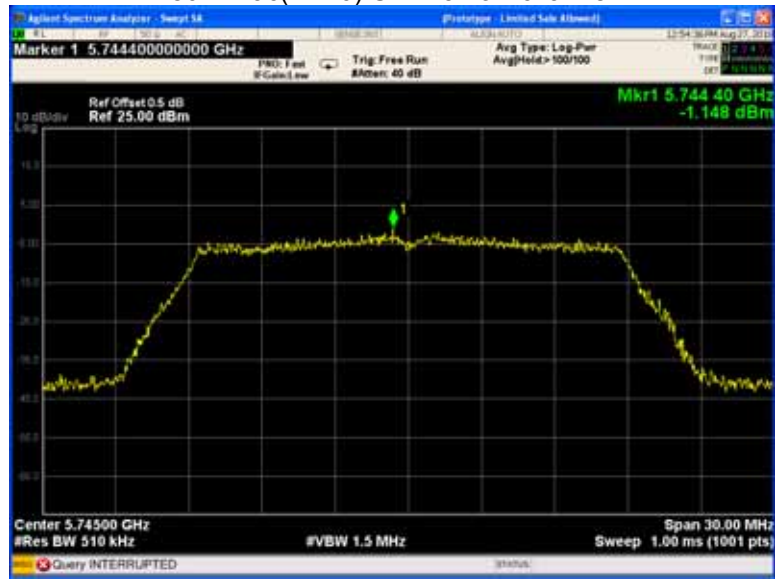

802.11ac(HT20) U-NII-3 Middle channel




802.11ac(HT20) U-NII-3 High channel



802.11ac(HT40) U-NII-3 Low channel



802.11n(HT40) U-NII-3 High channel

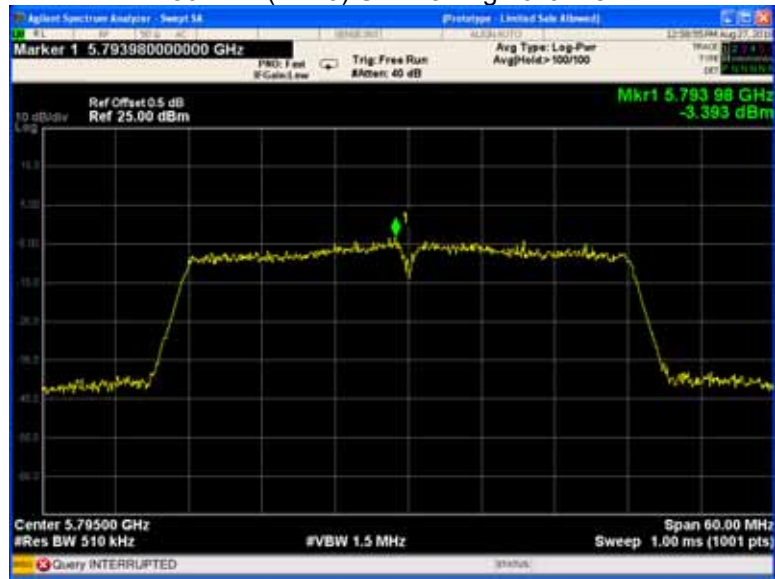

802.11ac(HT80) U-NII-3 Low channel



## 16 Frequency Stability

Test Requirement:	FCC CFR47 Part 15 Section 15.407(g)
Test Method:	ANSI C63.10:2013
Test Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual or 20ppm.
Test Result:	PASS

### 16.1 Test Procedure:

1. The transmitter output (antenna port) was connected to the spectrum analyzer.  
EUT have transmitted absence of unmodulation signal and fixed channelise. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
2. Extreme temperature rule is 0°C~ 35°C.

**16.2 Test Result:**

U-NII-1 Test Frequency:5180MHz				
Temperature ( )	Power Supply (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
35	120	1853	0.3203	20
30		1861	0.3217	20
25		1858	0.3212	20
20		1854	0.3205	20
15		1859	0.3214	20
10		1858	0.3212	20
5		1860	0.3214	20
0		1855	0.3207	20
20		108	1861	0.3217
20	132	1848	0.3194	20

U-NII-3 Test Frequency:5785MHz				
Temperature ( )	Power Supply (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
35	120	1765	0.3052	20
30		1766	0.3053	20
25		1766	0.3053	20
20		1766	0.3053	20
15		1763	0.3047	20
10		1765	0.3051	20
5		1760	0.3043	20
0		1766	0.3052	20
20		108	1769	0.3057
20	132	1766	0.3053	20


## 17 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

This device uses two antennas that use a specified coupling to the intentional radiator. Antenna connectors comply with the requirement.

Result:

The EUT has one Integrated Antenna, meets the requirements of FCC 15.203.

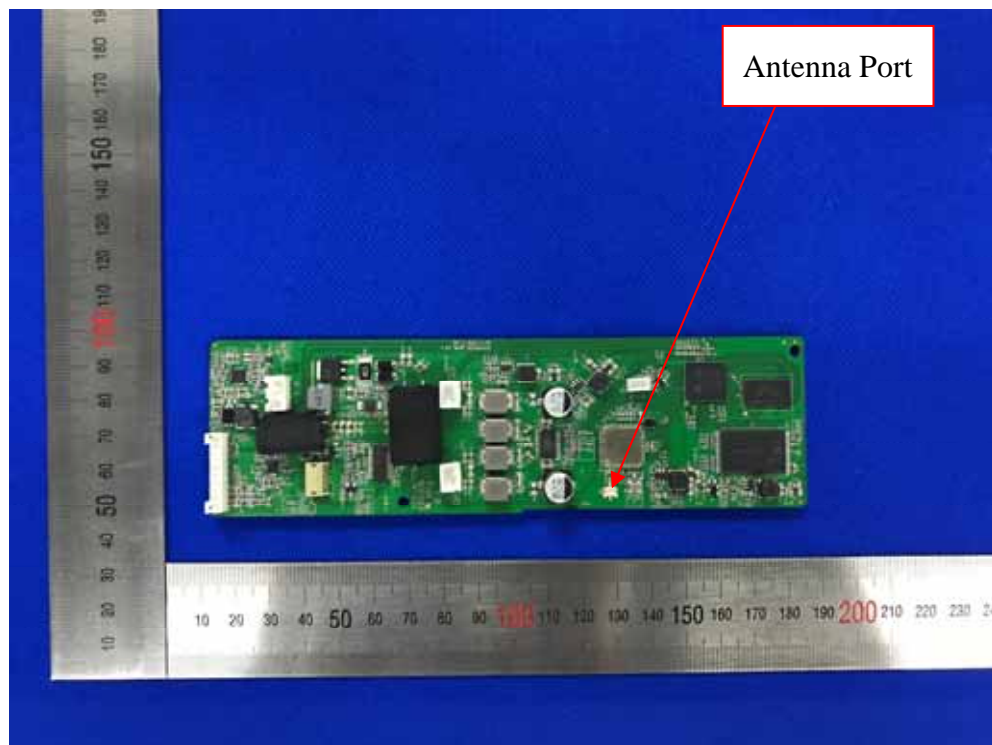



## **18 FCC ID: 2ANOX69092 RF Exposure Report**

Note: Please refer to RF Exposure Report: WTS18S07117356-4W.

## **19 Photographs - Model KYGO B9 800 Test Setup Photos**

Note: Please refer to Photos: KYGO B9 800\_Tsup Photos.

## **20 Photographs - Constructional Details**

### **20.1 Model KYGO B9 800 - External Photos**

Note: Please refer to Photos: KYGO B9 800\_Ext Photos.

### **20.2 Model KYGO B9 800 - Internal Photos**

Note: Please refer to Photos: KYGO B9 800\_Int Photos.

=====**End of Report**=====