




RF TEST REPORT



Report No.: 17071137-FCC-R2

Supersede Report No.: N/A

Applicant	Kygo Life AS	
Product Name	Wireless headphones	
Model No.	A9-600	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	October 28 to November 20, 2017	
Issue Date	November 21, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Leen Yang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17071137-FCC-R2
Page	3 of 67

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	6
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	7
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 ANTENNA REQUIREMENT	10
6.2 CHANNEL SEPARATION	11
6.3 20DB BANDWIDTH	15
6.4 PEAK OUTPUT POWER	19
6.5 NUMBER OF HOPPING CHANNEL	23
6.6 TIME OF OCCUPANCY (DWELL TIME)	25
6.7 BAND EDGE & RESTRICTED BAND	29
6.8 AC POWER LINE CONDUCTED EMISSIONS	37
6.9 RADIATED EMISSIONS & RESTRICTED BAND	43
ANNEX A. TEST INSTRUMENT	50
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	51
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	62
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	66
ANNEX E. DECLARATION OF SIMILARITY	67

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17071137-FCC-R2	NONE	Original	November 21, 2017

2. Customer information

Applicant Name	Kygo Life AS
Applicant Add	Sjoyst Plass 3, 0278 Oslo, Norway
Manufacturer	ASKA Electronics Co., Ltd
Manufacturer Add	3F, building 19#, Road Da Ling Bian, Shahu Community, Tangxia Town, Dongguan, China

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMV(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT:	Wireless headphones
Main Model:	A9-600
Serial Model:	N/A
Date EUT received:	October 27, 2017
Test Date(s):	October 28 to November 20, 2017
Equipment Category :	DSS
Antenna Gain:	Bluetooth/BLE: 0dBi
Antenna Type:	PCB antenna
Type of Modulation:	Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK
RF Operating Frequency (ies):	Bluetooth& BLE: 2402-2480 MHz
Max. Output Power:	9.018dBm
Number of Channels:	Bluetooth: 79CH BLE: 40CH
Port:	USB Port, AUX Port
Input Power:	A Battery Model: 502540 Spec: 3.7V, 450mAh, 1.66Wh



Test Report	17071137-FCC-R2
Page	8 of 67

Trade Name : KYGO

FCC ID: 2AN0XA9

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antenna:

A permanently attached PCB antenna for Bluetooth/BLE the gain is 0dBi for Bluetooth/BLE.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	November 08, 2017
Tested By :	Leen Yang

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Channel Separation measurement result


Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.943	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.935	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.939	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.002	0.819	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.819	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.819	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.869	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.839	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.841	Pass
	Adjacency Channel	2479			

Test Plots


Channel Separation measurement result

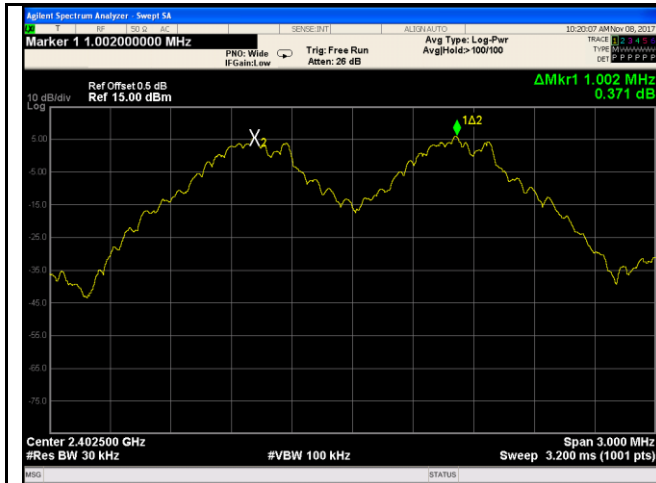


GFSK - Low Channel

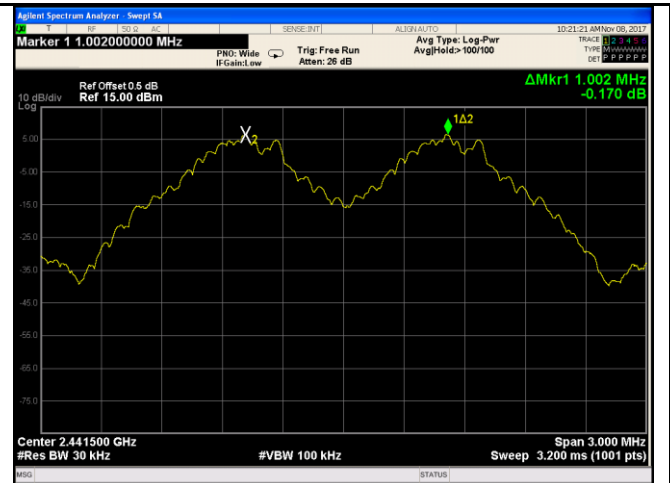


GFSK - Middle Channel

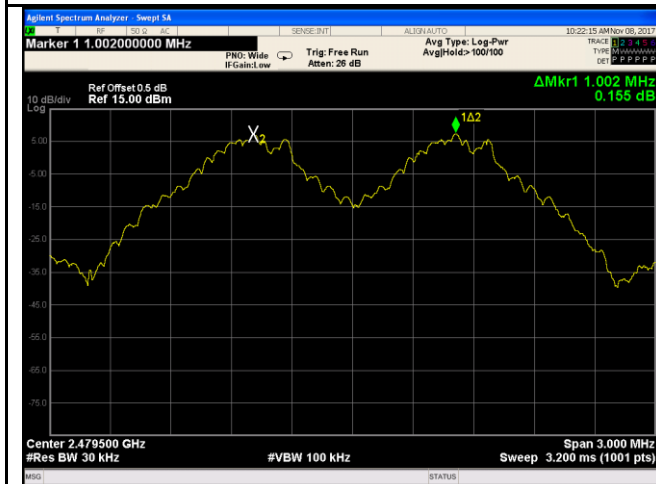


GFSK - High Channel

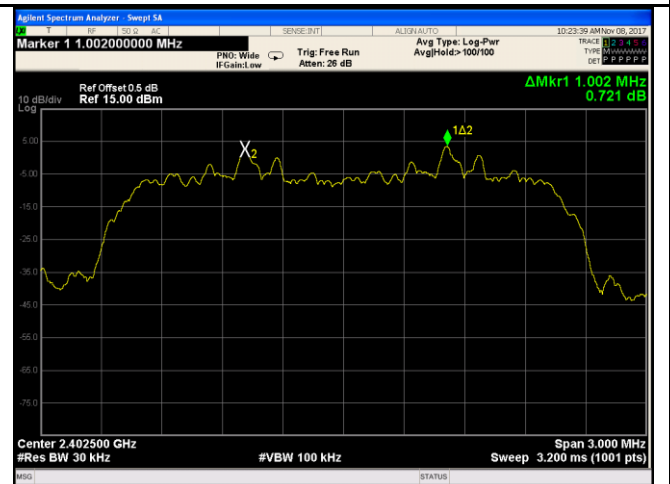


$\pi/4$ DPSK - Low Channel

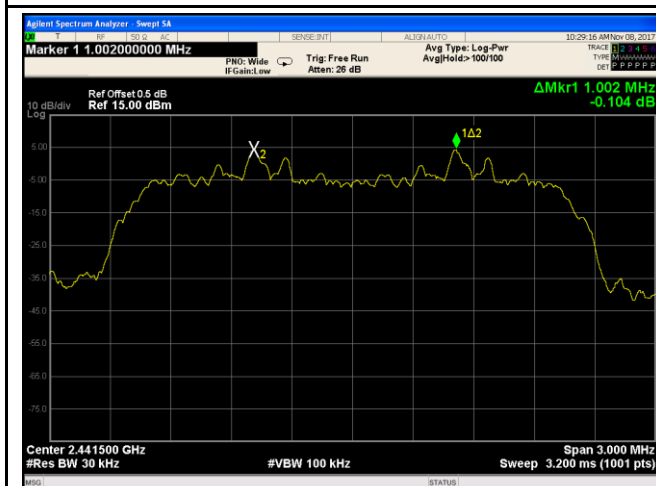


$\pi/4$ DQPSK - Middle Channel

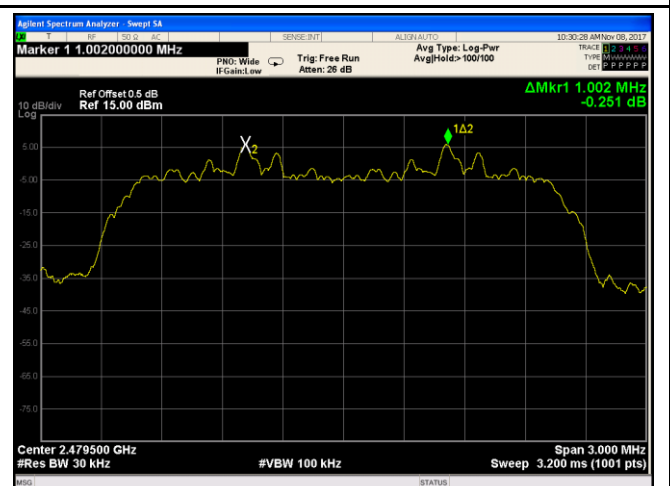


$\pi/4$ DQPSK - High Channel

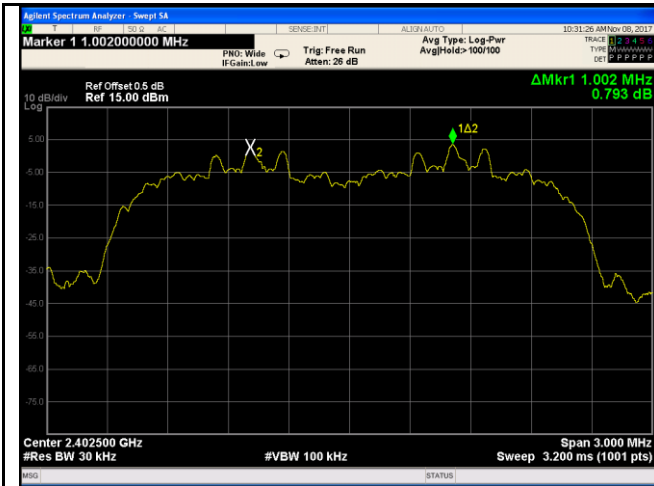


8DPSK - Low Channel

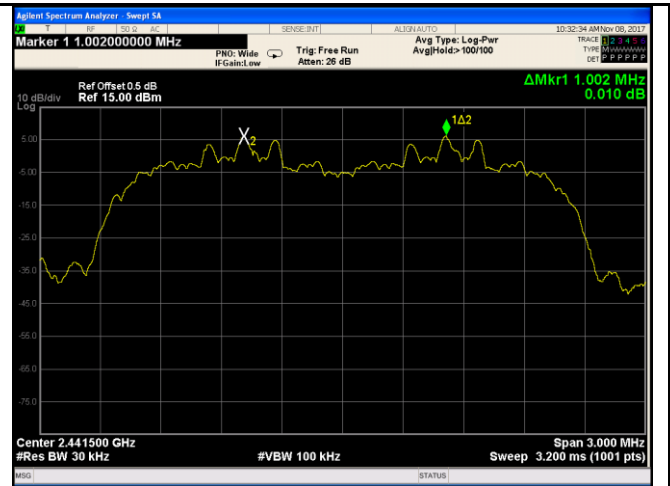

8DPSK - Middle Channel

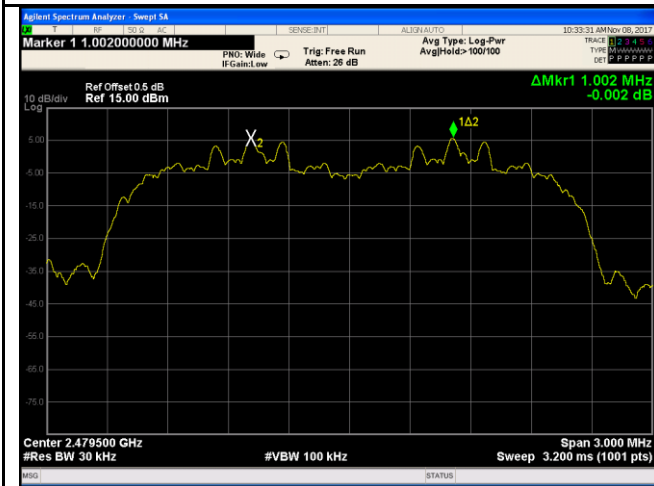

8DPSK - High Channel




6.3 20dB Bandwidth

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	November 08, 2017
Tested By :	Leen Yang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Measurement result


Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.9434	0.8617
	Mid	2441	0.9354	0.8510
	High	2480	0.9391	0.8563
π /4 DQPSK	Low	2402	1.229	1.1611
	Mid	2441	1.228	1.1619
	High	2480	1.228	1.1637
8-DPSK	Low	2402	1.303	1.2055
	Mid	2441	1.258	1.1558
	High	2480	1.262	1.1609

Test Plots


20dB Bandwidth measurement result

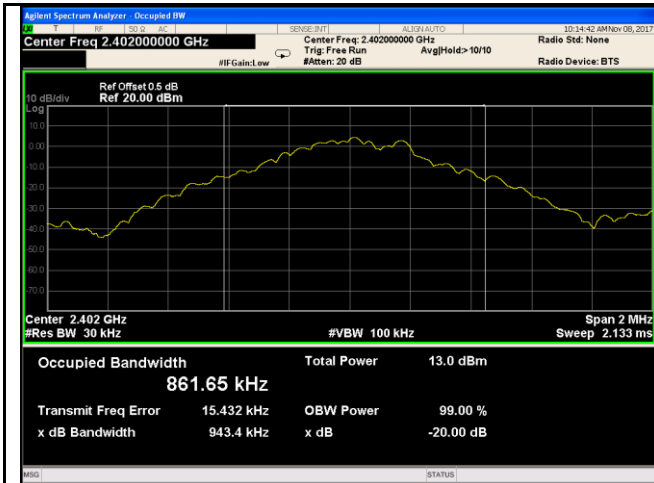


GFSK - Low Channel

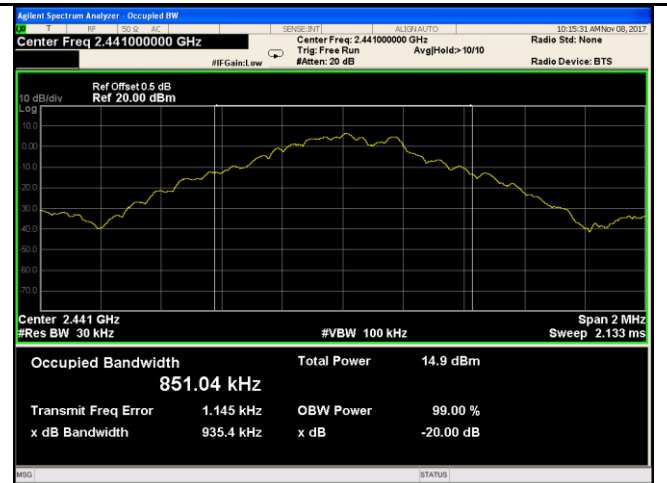


GFSK - Middle Channel

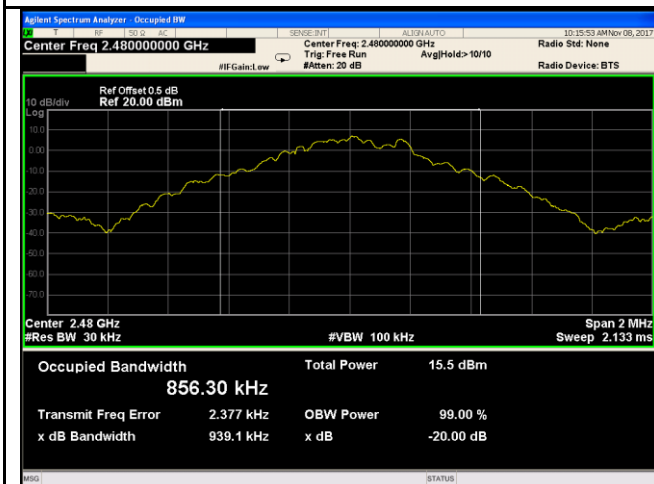


GFSK - High Channel

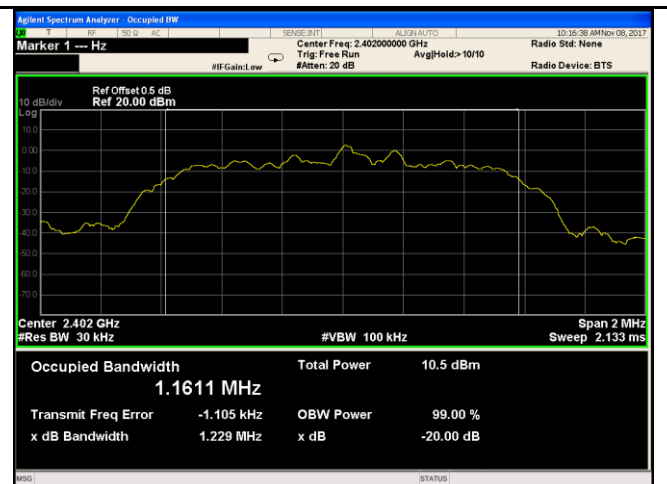


$\pi/4$ DPSK - Low Channel

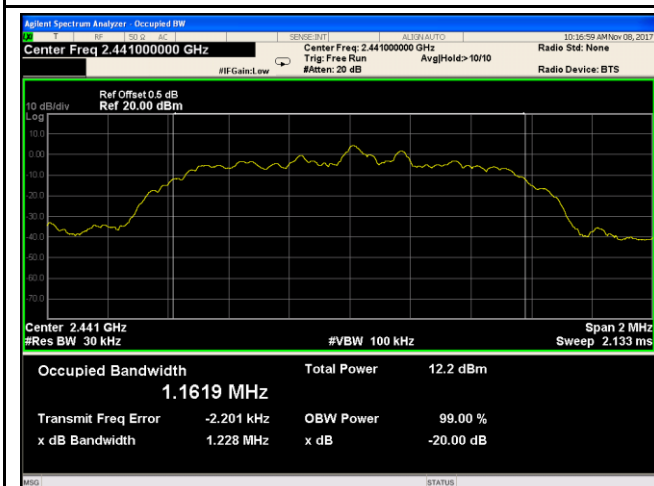


$\pi/4$ DQPSK - Middle Channel

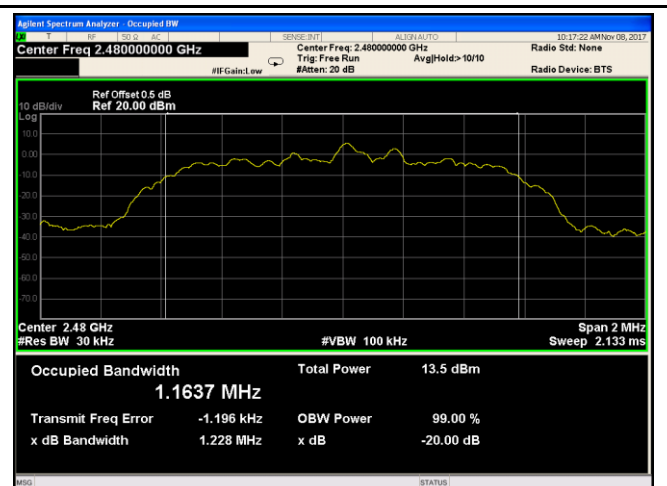


$\pi/4$ DQPSK - High Channel

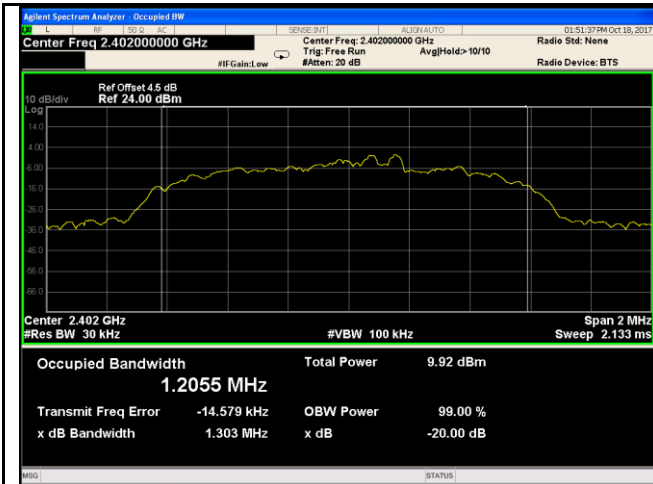

8DPSK - Low Channel

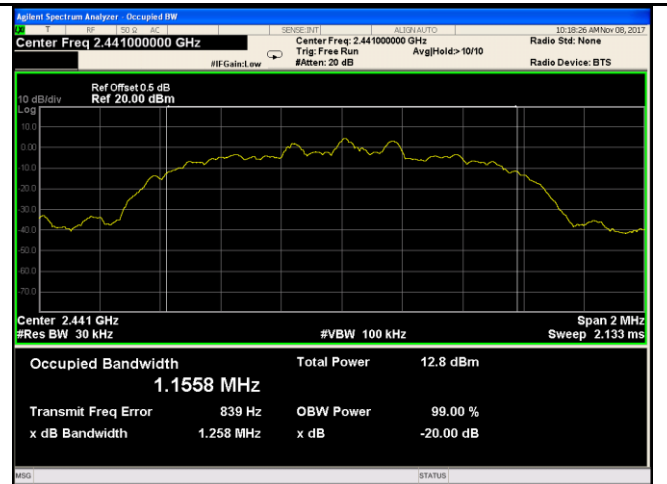

8DPSK - Middle Channel

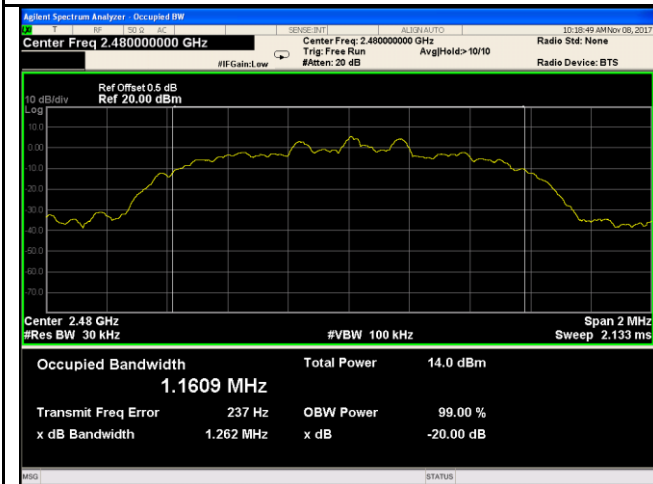


8DPSK - High Channel

6.4 Peak Output Power

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	November 08, 2017
Tested By :	Leen Yang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	<input type="checkbox"/>

Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize.
----------------	--

	<ul style="list-style-type: none"> - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Peak Output Power measurement result


Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	8.286	1000	Pass
		Mid	2441	8.926	1000	Pass
		High	2480	9.018	1000	Pass
	$\pi/4$ DQPSK	Low	2402	6.993	125	Pass
		Mid	2441	7.703	125	Pass
		High	2480	7.573	125	Pass
	8-DPSK	Low	2402	7.247	125	Pass
		Mid	2441	7.957	125	Pass
		High	2480	7.874	125	Pass

Test Plots


Output Power measurement result

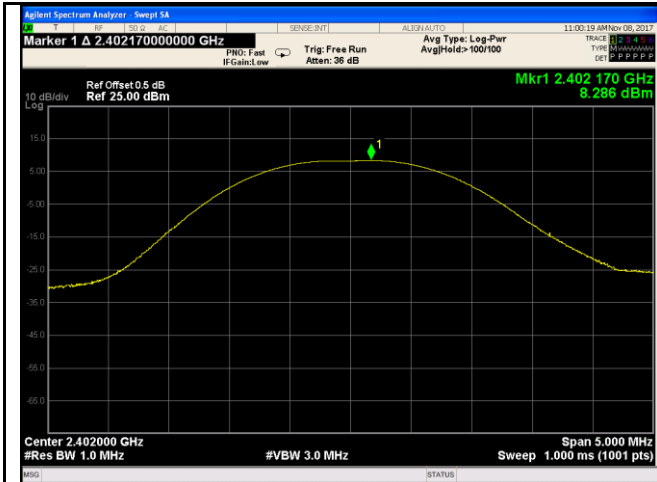


GFSK Output power - Low CH 2402

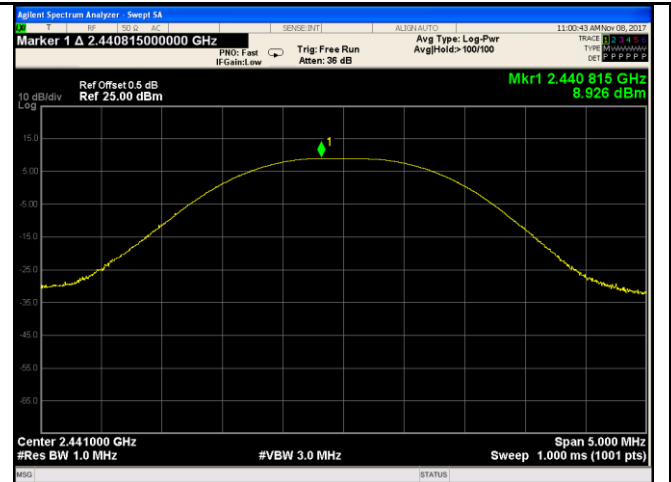


GFSK Output power - Mid CH 2441

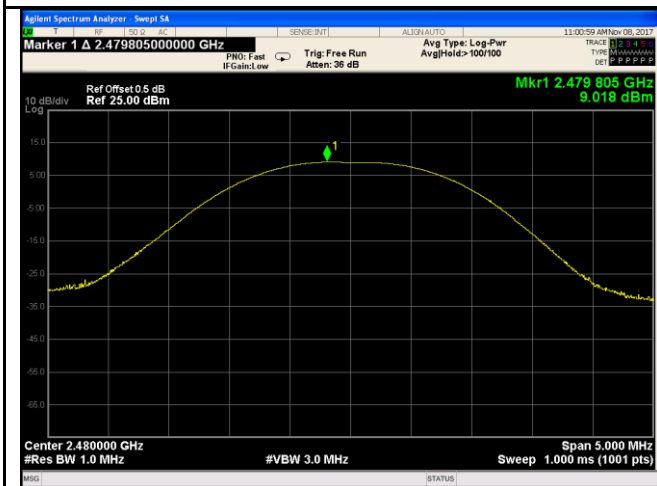


GFSK Output power - High CH 2480

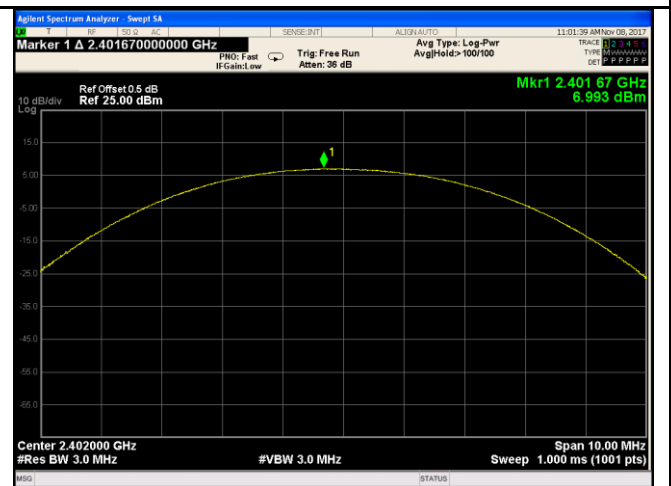


$\pi/4$ DQPSK Output power - Low CH 2402

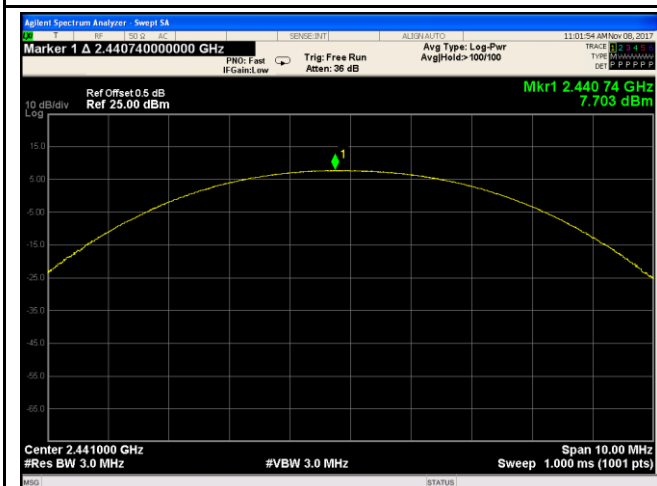


$\pi/4$ DQPSK Output power - Mid CH 2441

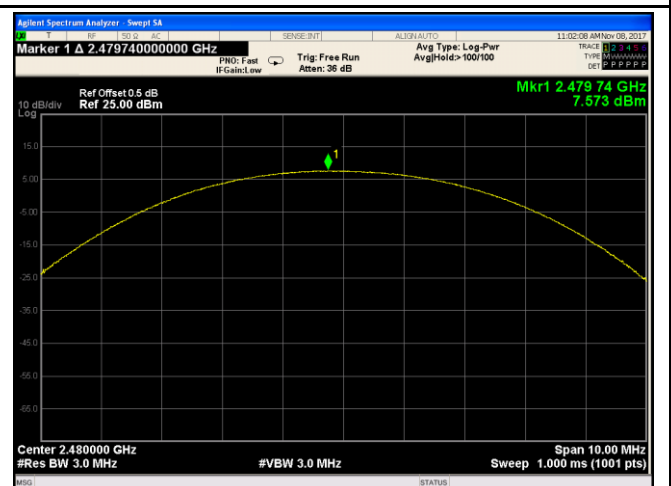


$\pi/4$ DQPSK Output power - High CH 2480

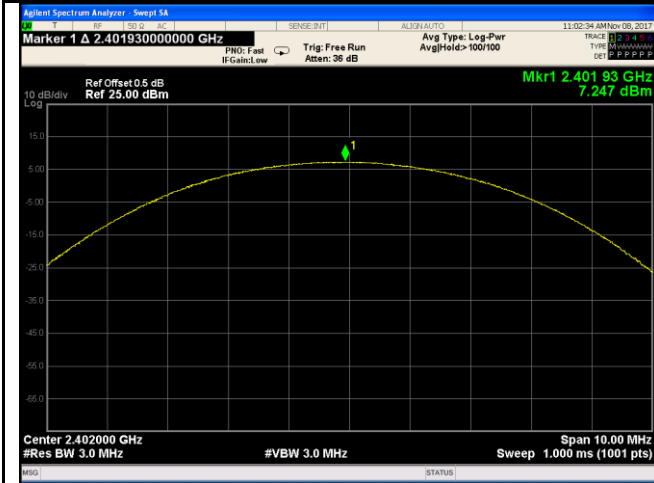


8DPSK Output power - Low CH 2402

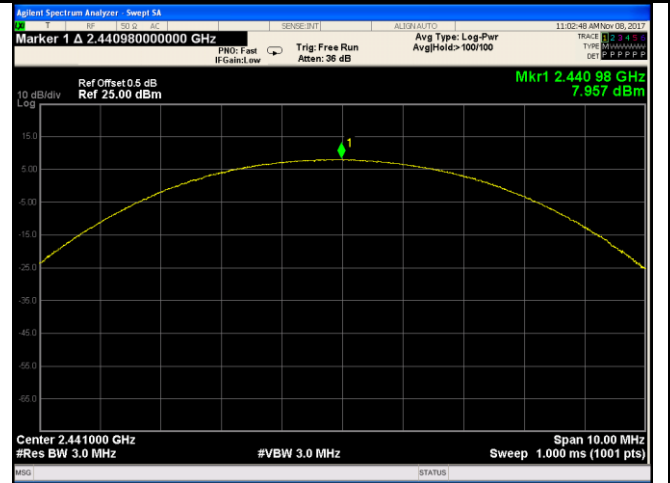

8DPSK Output power - Mid CH 2441

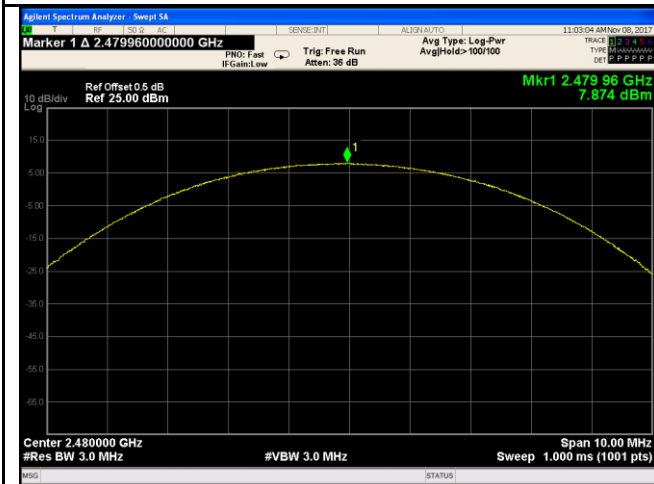


8DPSK Output power - High CH 2480



6.5 Number of Hopping Channel

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	November 08, 2017
Tested By :	Leen Yang

Requirement(s):

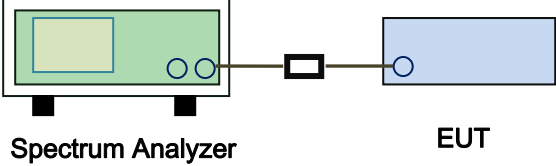Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz \geq 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW \geq 1% of the span - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

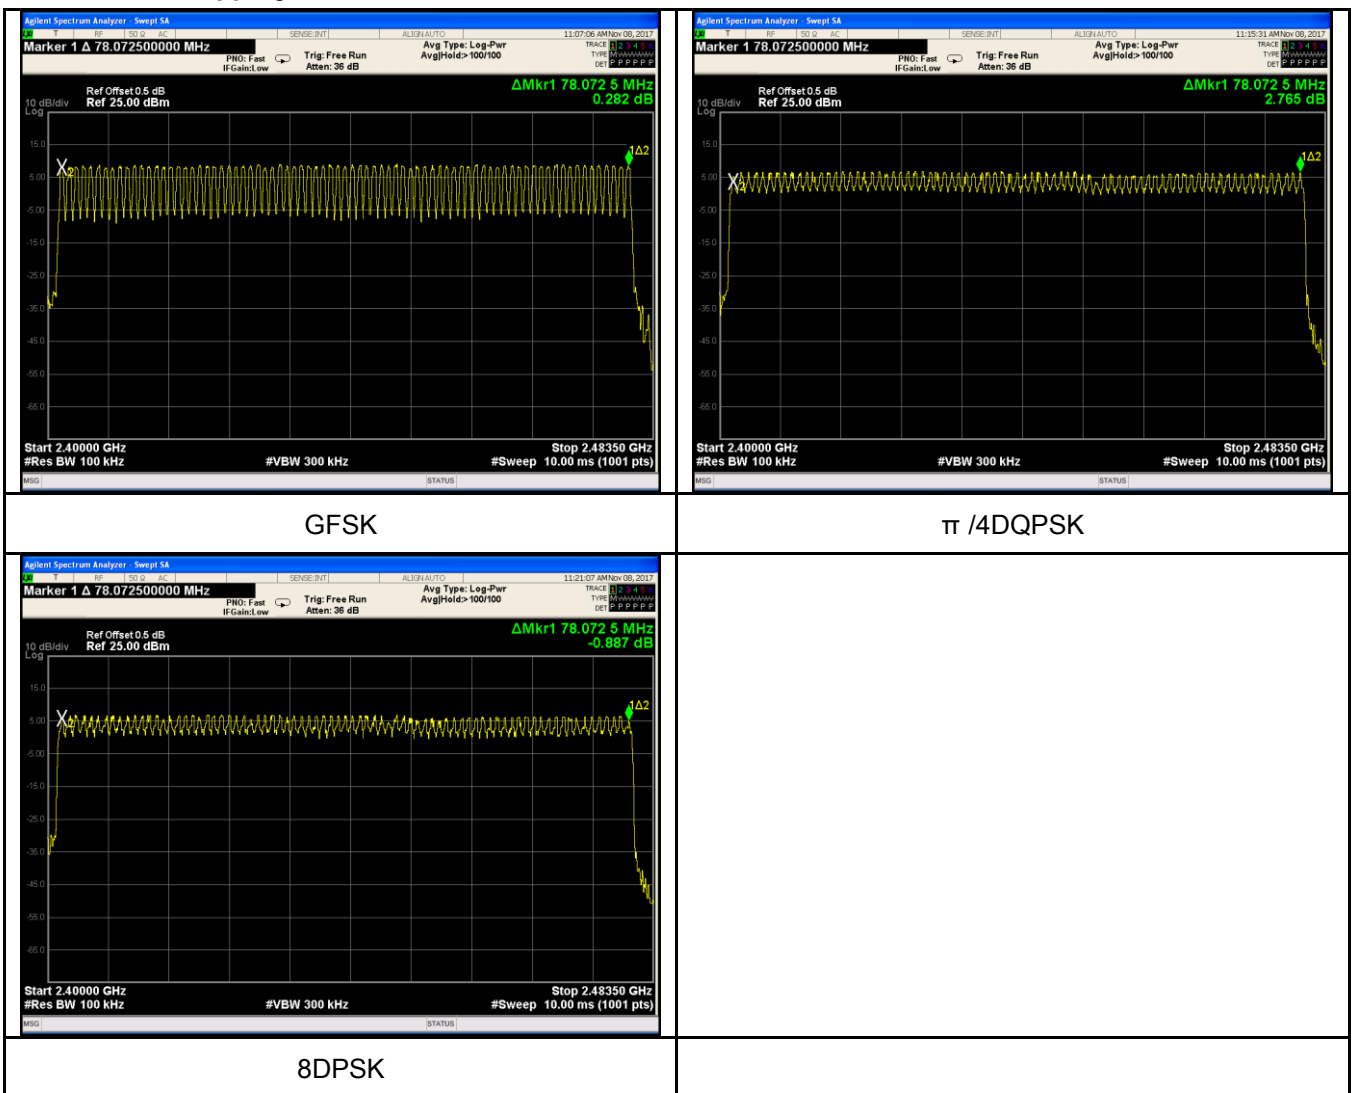

6.6 Time of Occupancy (Dwell Time)

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	November 08, 2017
Tested By :	Leen Yang

Requirement(s):

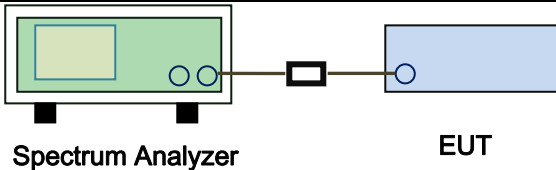Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A


Test Plot Yes (See below) N/A

Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.940	313.600	400	Pass
		Mid	2.940	313.600	400	Pass
		High	2.960	315.733	400	Pass
	π /4 DQPSK	Low	2.950	314.667	400	Pass
		Mid	2.970	316.800	400	Pass
		High	2.960	315.733	400	Pass
	8-DPSK	Low	2.950	314.667	400	Pass
		Mid	2.960	315.733	400	Pass
		High	2.960	315.733	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots


Dwell Time measurement result

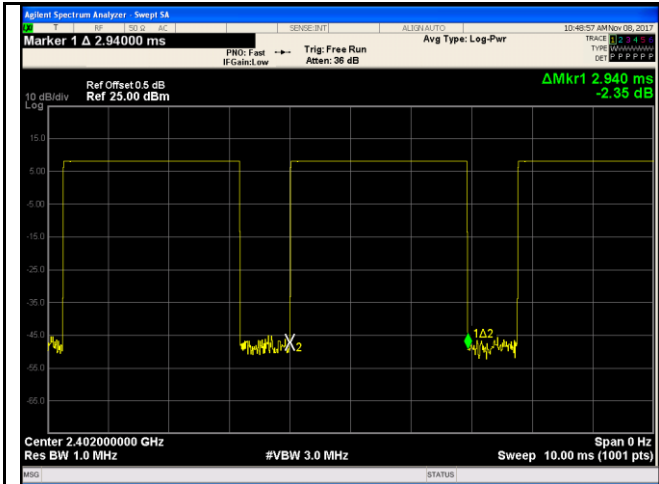


GFSK - Low CH 2402

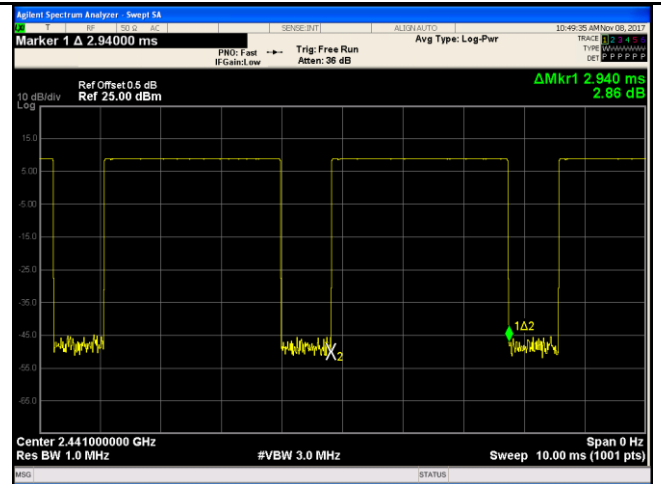


GFSK - Mid CH 2441

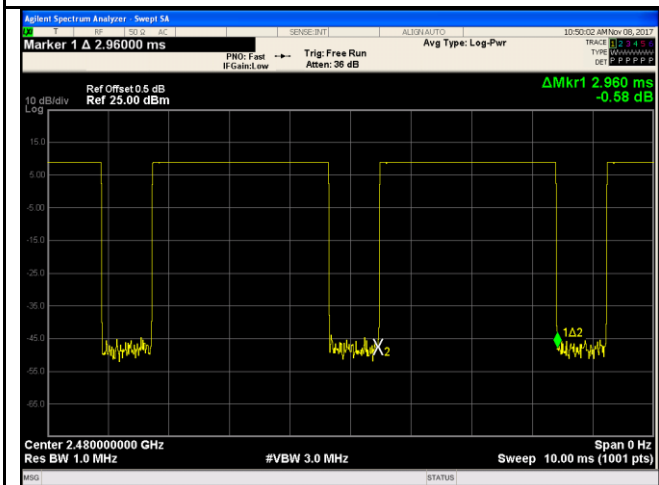


GFDK - High CH 2480

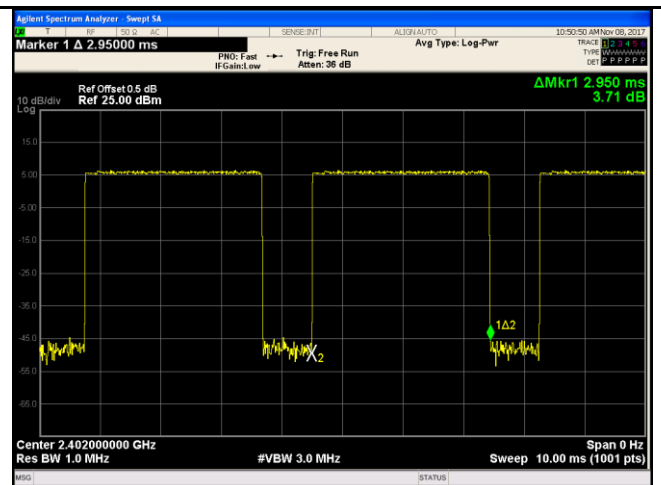


$\pi/4$ DQPSK - Low CH 2402

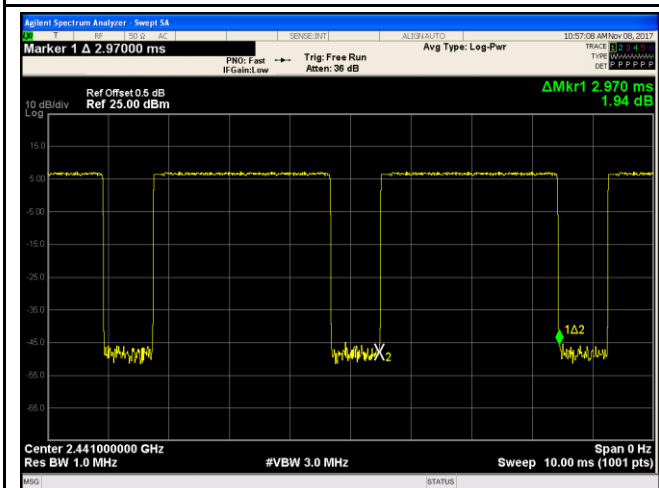


$\pi/4$ DQPSK - Mid CH 2441

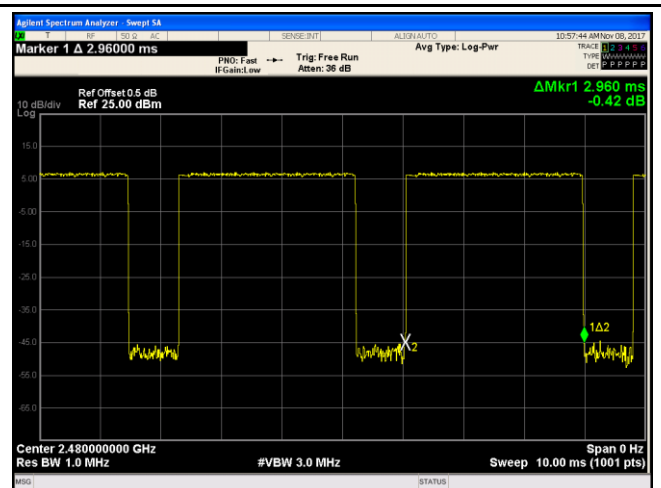

$\pi/4$ DQPSK - High CH 2480

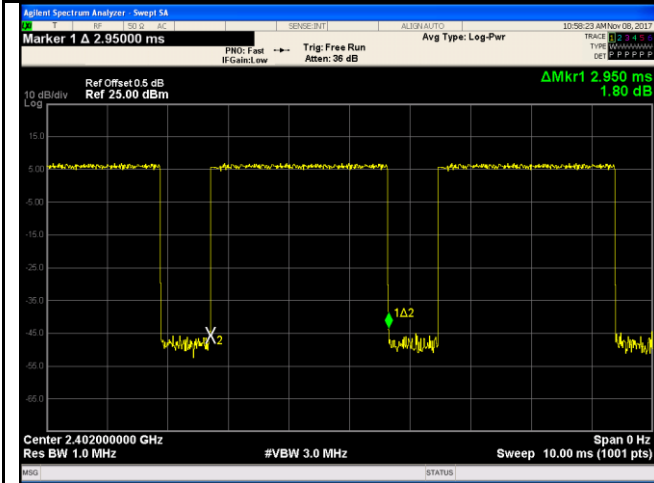


8DPSK - Low CH 2402

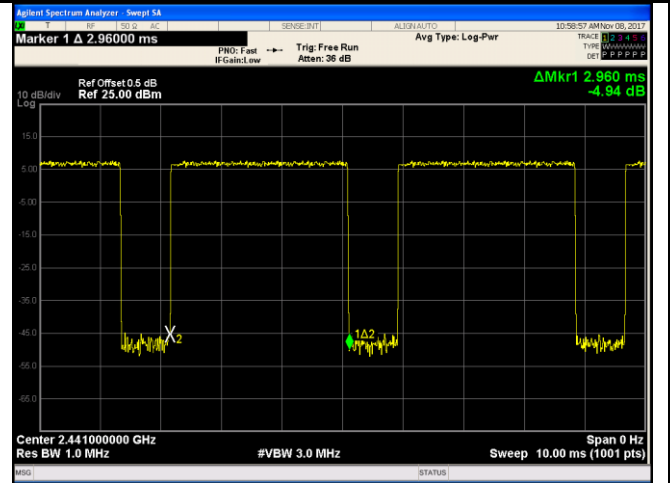

8DPSK - Mid CH 2441



8DPSK - High CH 2480




6.7 Band Edge & Restricted Band

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	November 15&16, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. □	<input checked="" type="checkbox"/>

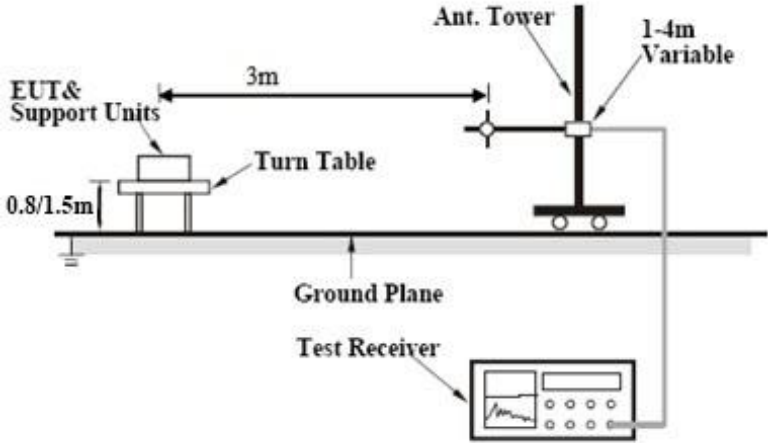Test Setup	
------------	--



Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,
----------------	--

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
Test Plot Yes (See below) N/A

Test Plots


GFSK Mode:

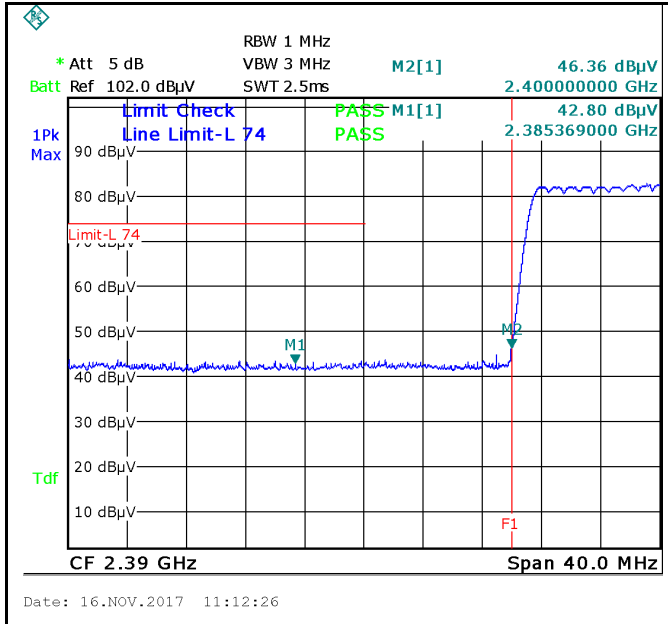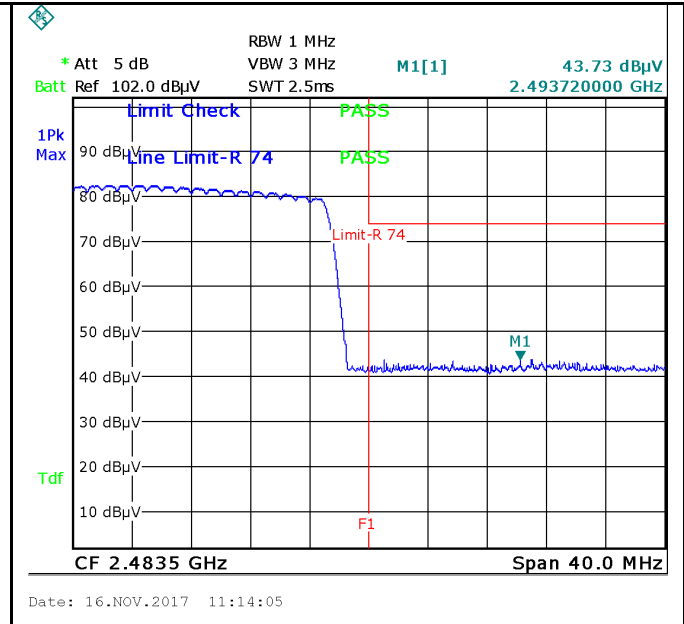	
<p style="text-align: center;">GFSK-Hopping Left Side-PK</p> <p style="text-align: center;">Note: F1 is frequency 2400MHz</p>	<p style="text-align: center;">GFSK-Hopping Right Side-PK</p> <p style="text-align: center;">Note: F1 is frequency 2483.5MHz</p>
<p style="text-align: center;">Note: (no need if PK value less than the AV limit)</p>	<p style="text-align: center;">Note: (no need if PK value less than the AV limit)</p>
<p style="text-align: center;">GFSK-Hopping Left Side-AV</p>	<p style="text-align: center;">GFSK-Hopping Right Side-AV</p>

Note: Both Horizontal and vertical polarities were investigated.

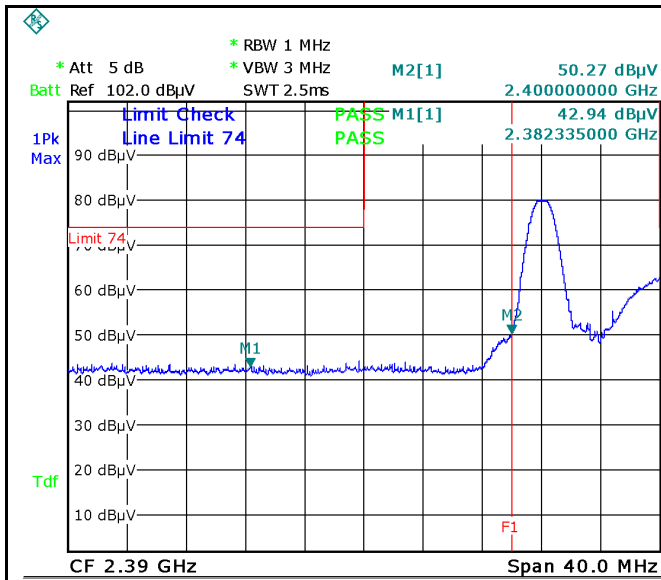

Date: 15.NOV.2017 17:45:16

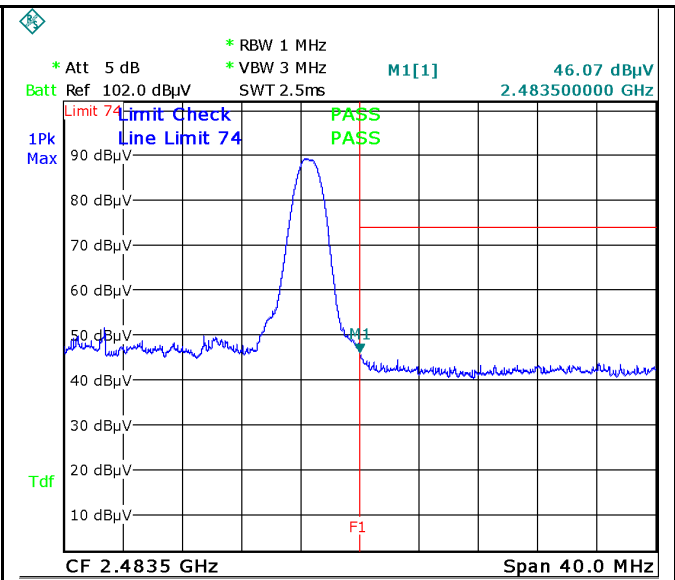

Date: 15.NOV.2017 17:43:22

GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)


Note: (no need if PK value less than the AV limit)

GFSK-Left Side-AV


GFSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

$\pi/4$ DQPSK Mode:

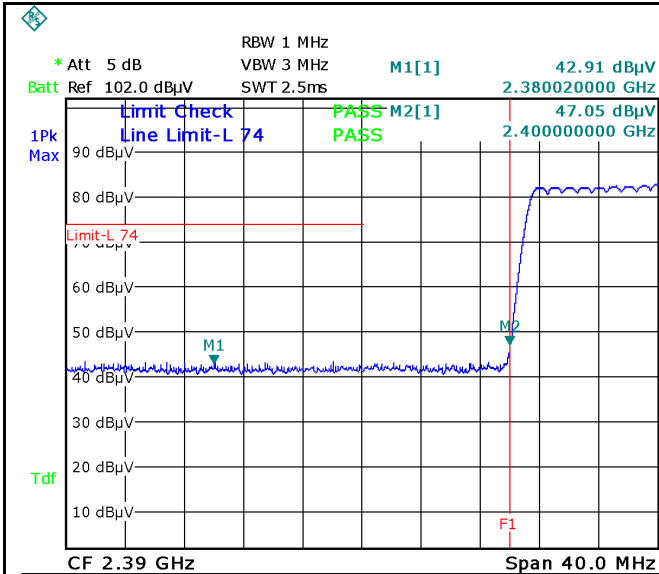

Date: 16.NOV.2017 11:12:48

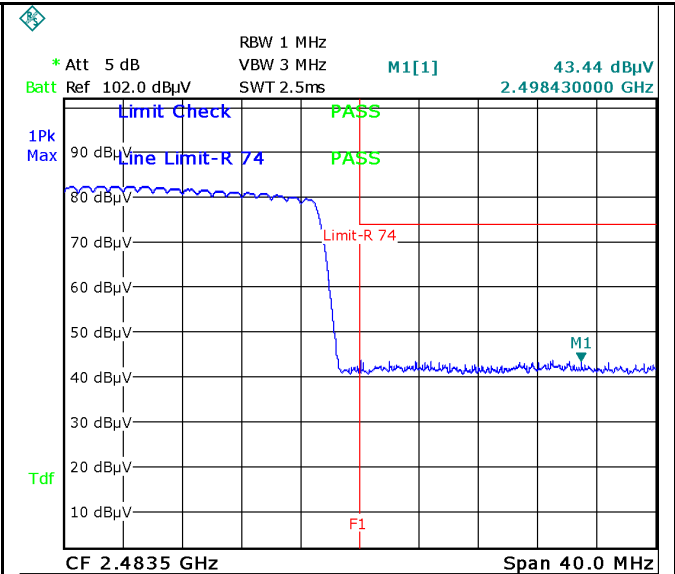

Date: 16.NOV.2017 11:14:23

$\pi/4$ DQPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

$\pi/4$ DQPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz


Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)


$\pi/4$ DQPSK-Hopping Left-AV

$\pi/4$ DQPSK-Hopping Right-AV

Note: Both Horizontal and vertical polarities were investigated.

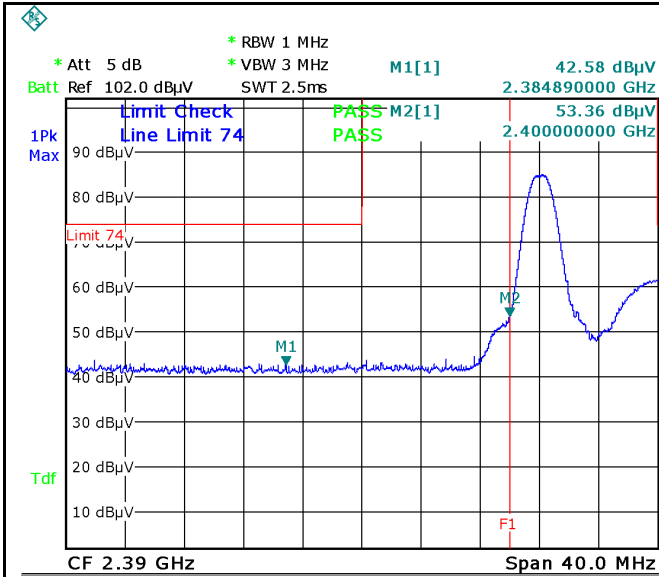

Date: 15.NOV.2017 17:45:30

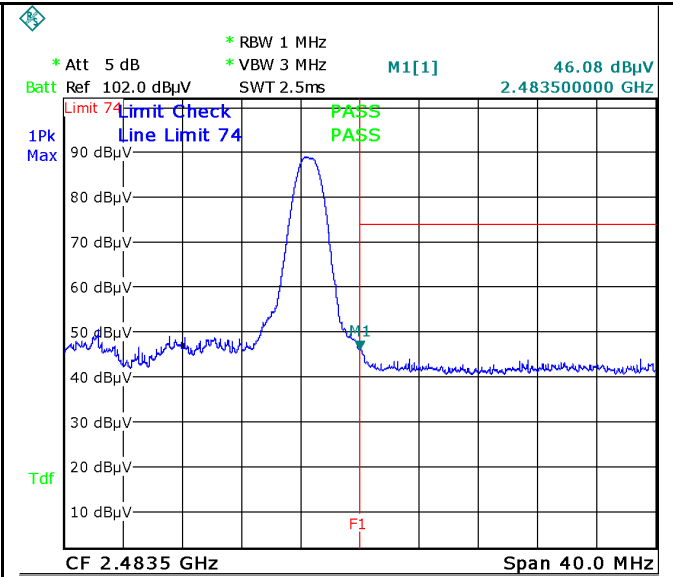

Date: 15.NOV.2017 17:43:32

π /4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

π /4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)


Note: (no need if PK value less than the AV limit)

π /4 DQPSK-Left Side-AV


π /4 DQPSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

8-DPSK Mode:

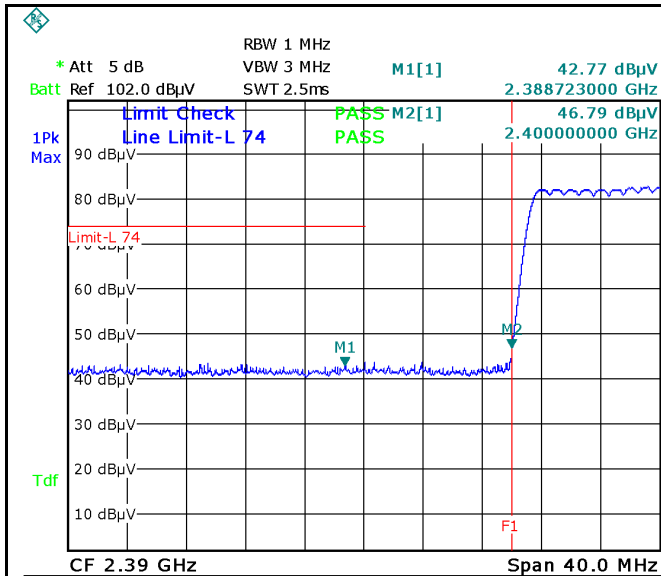

Date: 16.NOV.2017 11:13:03

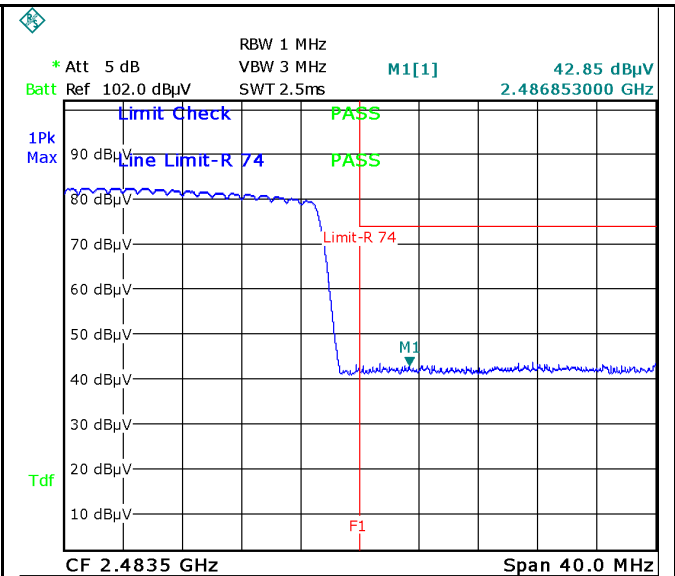

Date: 16.NOV.2017 11:14:52

8DPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz


Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)


8DPSK-Hopping Left-AV

8DPSK-Hopping Right-AV

Note: Both Horizontal and vertical polarities were investigated.

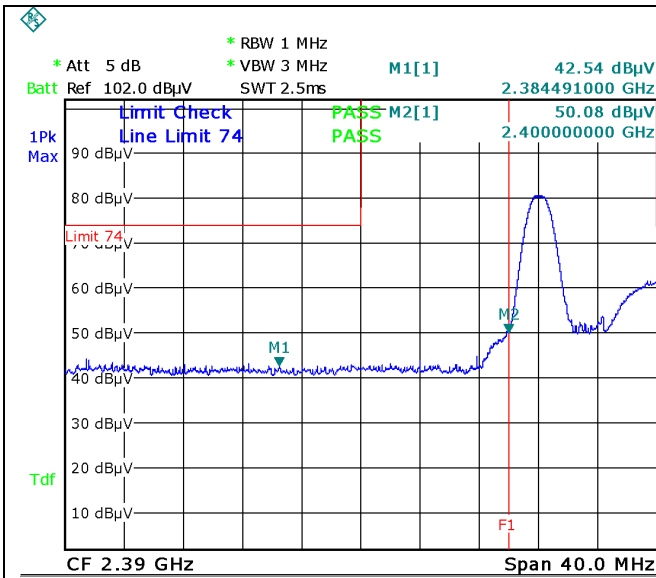

Date: 15.NOV.2017 17:45:56

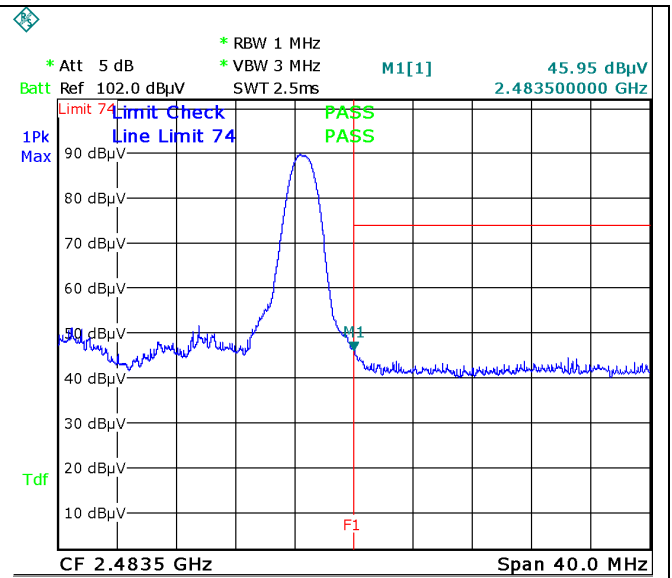

Date: 15.NOV.2017 17:43:45

8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV


Note: Both Horizontal and vertical polarities were investigated.

6.8 AC Power Line Conducted Emissions

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1016mbar
Test date :	November 16, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

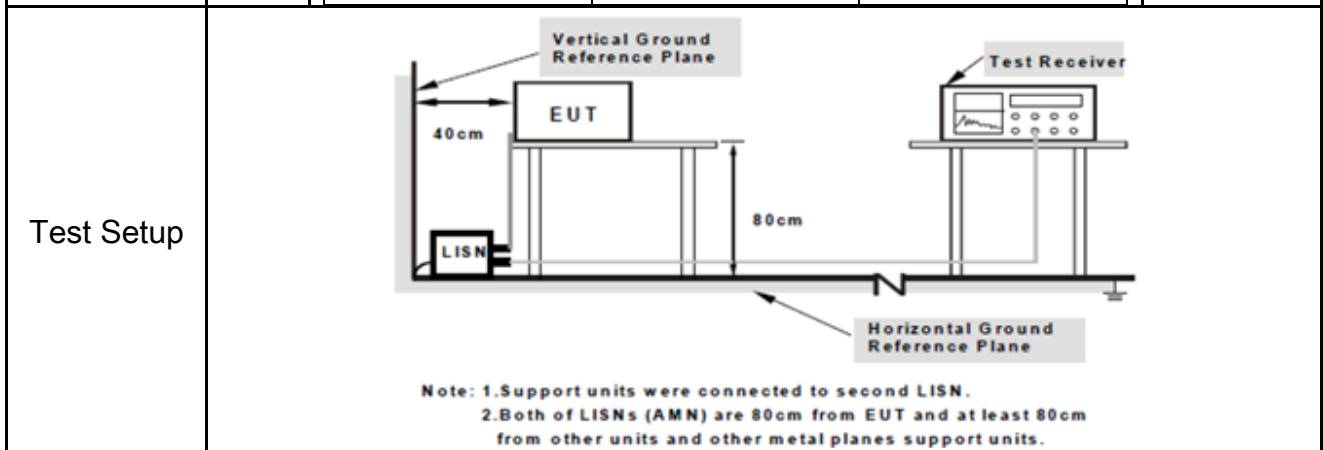

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	---


Test Report	17071137-FCC-R2
Page	38 of 67

	<p>coaxial cable.</p> <ol style="list-style-type: none"> 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	Bluetooth Mode
-------------------	-----------------------

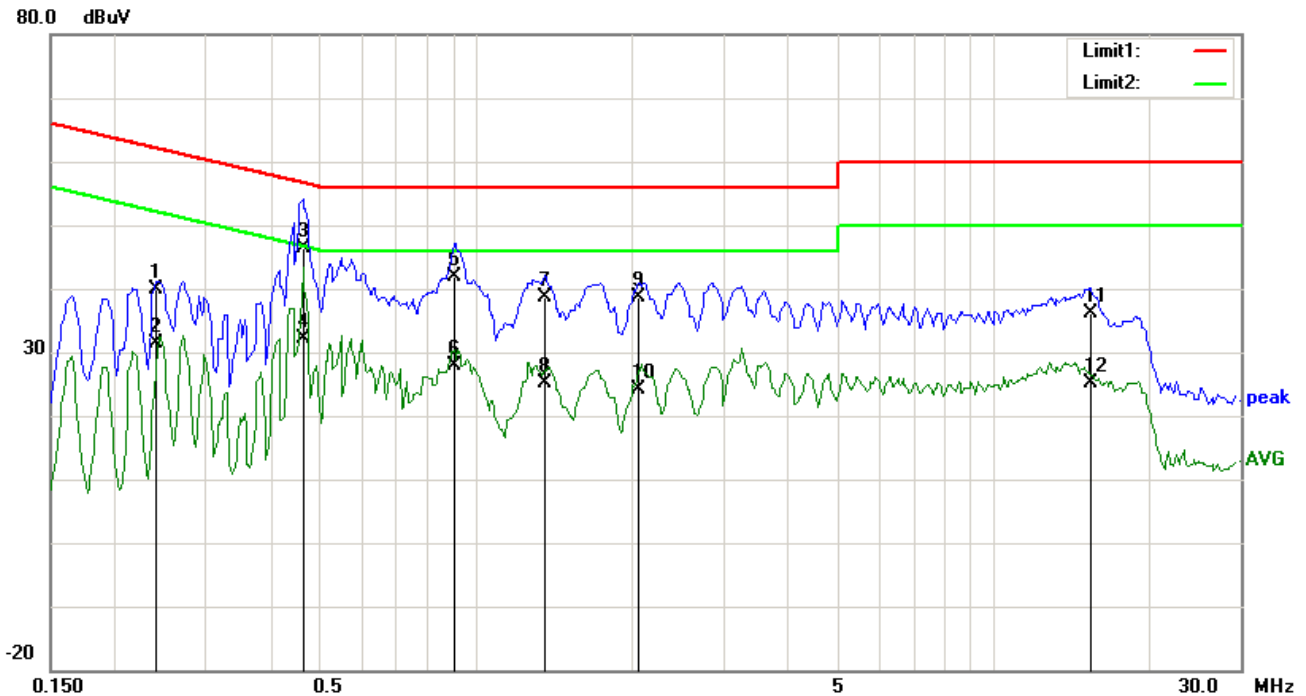


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2397	29.76	QP	10.03	39.79	62.11	-22.32
2	L1	0.2397	21.31	AVG	10.03	31.34	52.11	-20.77
3	L1	0.4620	36.28	QP	10.03	46.31	56.66	-10.35
4	L1	0.4620	22.19	AVG	10.03	32.22	46.66	-14.44
5	L1	0.9066	31.80	QP	10.03	41.83	56.00	-14.17
6	L1	0.9066	17.79	AVG	10.03	27.82	46.00	-18.18
7	L1	1.3551	28.57	QP	10.03	38.60	56.00	-17.40
8	L1	1.3551	15.12	AVG	10.03	25.15	46.00	-20.85
9	L1	2.0649	28.58	QP	10.04	38.62	56.00	-17.38
10	L1	2.0649	14.11	AVG	10.04	24.15	46.00	-21.85
11	L1	15.4332	25.91	QP	10.23	36.14	60.00	-23.86
12	L1	15.4332	14.94	AVG	10.23	25.17	50.00	-24.83

Test Mode:	Bluetooth Mode
-------------------	-----------------------

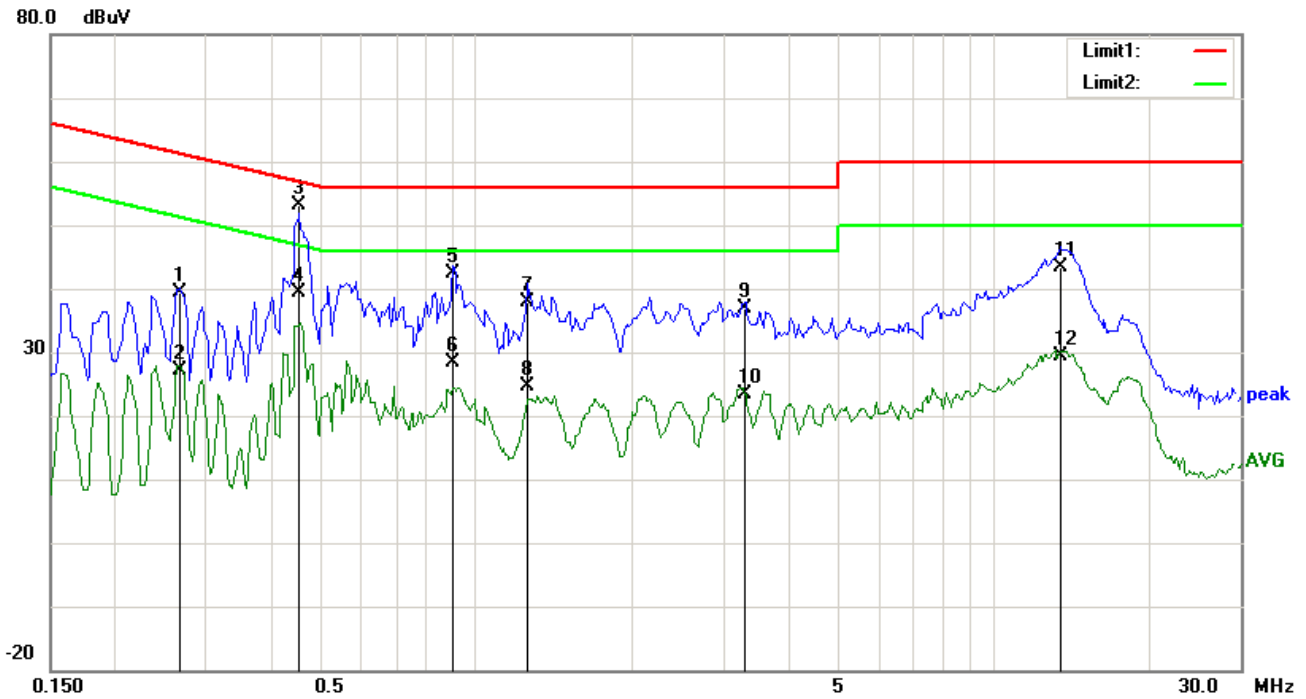


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.2670	29.39	QP	10.03	39.42	61.21	-21.79
2	N	0.2670	17.20	AVG	10.03	27.23	51.21	-23.98
3	N	0.4542	43.16	QP	10.03	53.19	56.80	-3.61
4	N	0.4542	29.36	AVG	10.03	39.39	46.80	-7.41
5	N	0.9027	32.33	QP	10.03	42.36	56.00	-13.64
6	N	0.9027	18.39	AVG	10.03	28.42	46.00	-17.58
7	N	1.2537	27.92	QP	10.03	37.95	56.00	-18.05
8	N	1.2537	14.63	AVG	10.03	24.66	46.00	-21.34
9	N	3.3081	26.83	QP	10.06	36.89	56.00	-19.11
10	N	3.3081	13.24	AVG	10.06	23.30	46.00	-22.70
11	N	13.4364	33.08	QP	10.20	43.28	60.00	-16.72
12	N	13.4364	19.08	AVG	10.20	29.28	50.00	-20.72

Test Mode:	Bluetooth Mode
-------------------	-----------------------

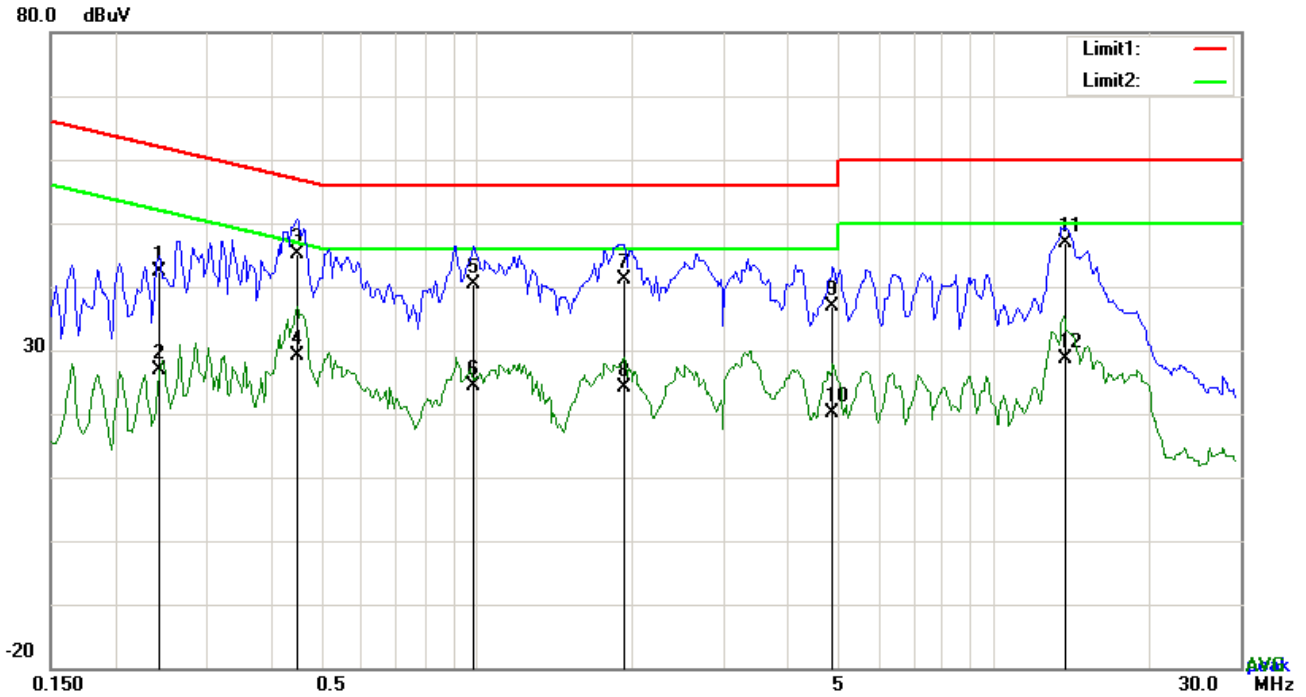


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2436	32.28	QP	10.03	42.31	61.97	-19.66
2	L1	0.2436	16.80	AVG	10.03	26.83	51.97	-25.14
3	L1	0.4503	35.16	QP	10.03	45.19	56.87	-11.68
4	L1	0.4503	19.11	AVG	10.03	29.14	46.87	-17.73
5	L1	0.9885	30.38	QP	10.03	40.41	56.00	-15.59
6	L1	0.9885	14.28	AVG	10.03	24.31	46.00	-21.69
7	L1	1.9323	31.08	QP	10.04	41.12	56.00	-14.88
8	L1	1.9323	13.97	AVG	10.04	24.01	46.00	-21.99
9	L1	4.8915	26.69	QP	10.08	36.77	56.00	-19.23
10	L1	4.8915	10.14	AVG	10.08	20.22	46.00	-25.78
11	L1	13.8030	36.71	QP	10.21	46.92	60.00	-13.08
12	L1	13.8030	18.50	AVG	10.21	28.71	50.00	-21.29

Test Mode:	Bluetooth Mode
-------------------	-----------------------

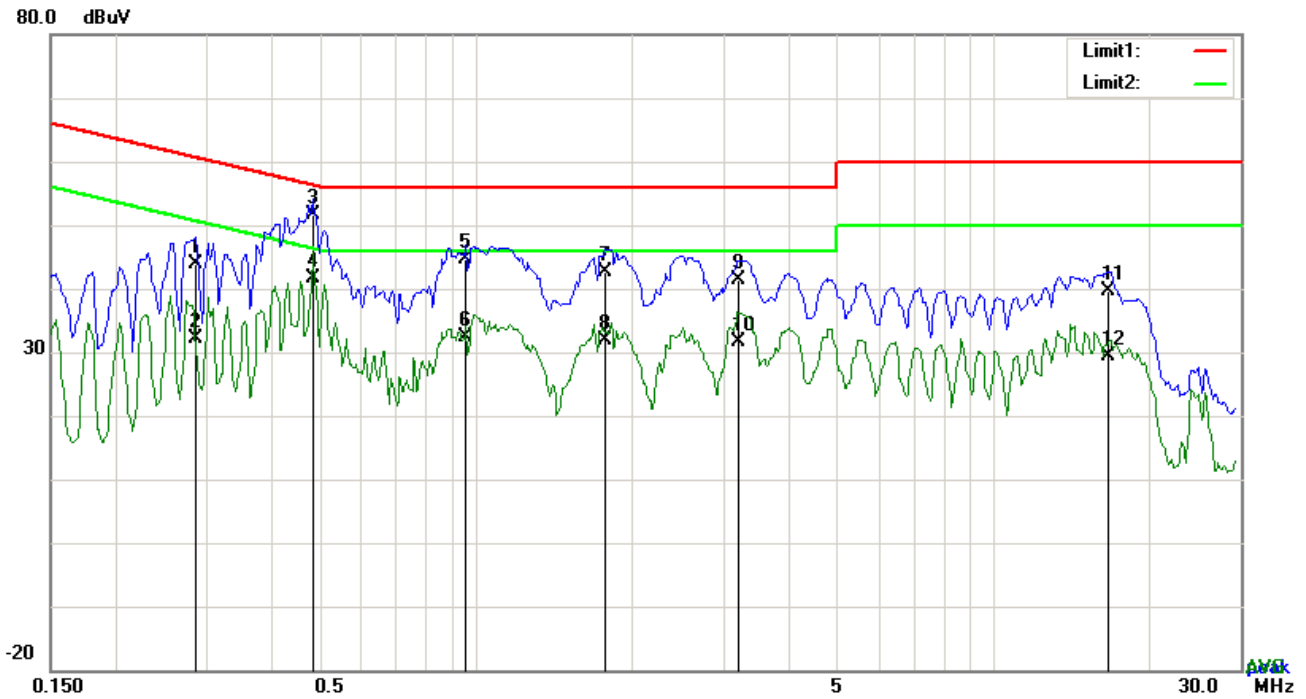

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.2865	33.73	QP	10.03	43.76	60.63	-16.87
2	N	0.2865	21.99	AVG	10.03	32.02	50.63	-18.61
3	N	0.4815	41.52	QP	10.03	51.55	56.31	-4.76
4	N	0.4815	31.52	AVG	10.03	41.55	46.31	-4.76
5	N	0.9573	34.57	QP	10.03	44.60	56.00	-11.40
6	N	0.9573	22.39	AVG	10.03	32.42	46.00	-13.58
7	N	1.7724	32.67	QP	10.04	42.71	56.00	-13.29
8	N	1.7724	21.75	AVG	10.04	31.79	46.00	-14.21
9	N	3.2145	31.27	QP	10.06	41.33	56.00	-14.67
10	N	3.2145	21.49	AVG	10.06	31.55	46.00	-14.45
11	N	16.6734	29.46	QP	10.25	39.71	60.00	-20.29
12	N	16.6734	19.09	AVG	10.25	29.34	50.00	-20.66


6.9 Radiated Emissions & Restricted Band

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1016mbar
Test date :	November 16, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>																
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength ($\mu\text{V}/\text{m}$)</th> </tr> </thead> <tbody> <tr> <td>0.009~0.490</td> <td>2400/F(KHz)</td> </tr> <tr> <td>0.490~1.705</td> <td>24000/F(KHz)</td> </tr> <tr> <td>1.705~30.0</td> <td>30</td> </tr> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength ($\mu\text{V}/\text{m}$)															
		0.009~0.490		2400/F(KHz)															
		0.490~1.705		24000/F(KHz)															
		1.705~30.0		30															
		30 – 88		100															
		88 – 216		150															
216 960	200																		
Above 960	500																		

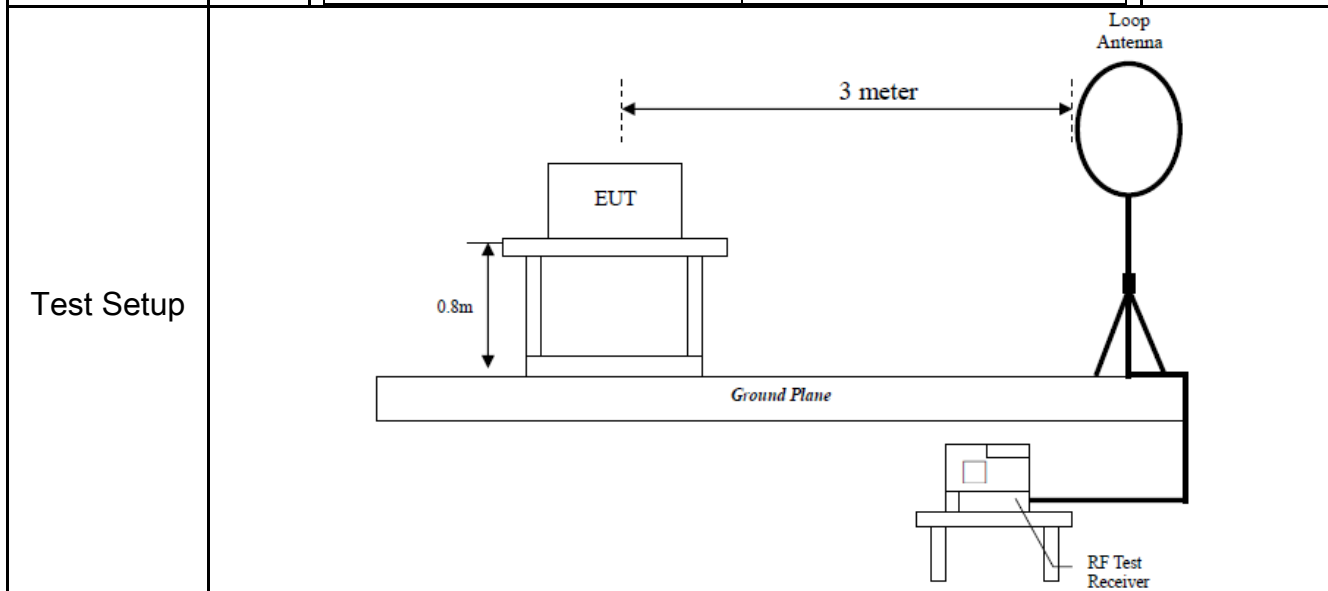

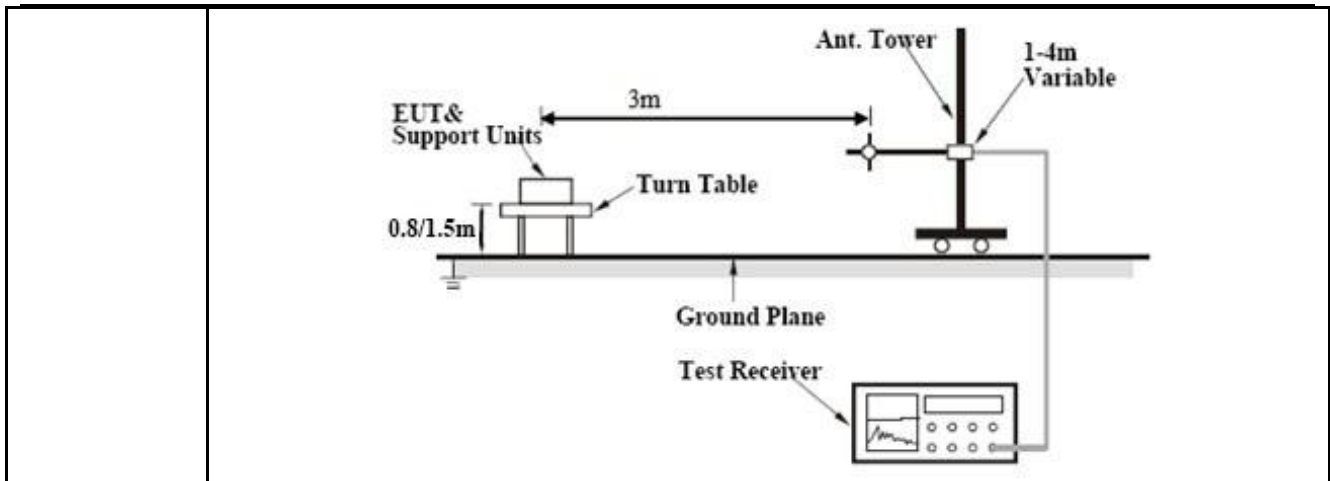

Procedure

- The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - The EUT was then rotated to the direction that gave the maximum emission.
 - Finally, the antenna height was adjusted to the height that gave the maximum emission.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.
The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.
- Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

Remark

Result Pass Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Result:

Test Mode:	Transmitting Mode
-------------------	-------------------

Frequency range: 9KHz - 30MHz

Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Test Mode: Bluetooth Mode

30MHz -1GHz

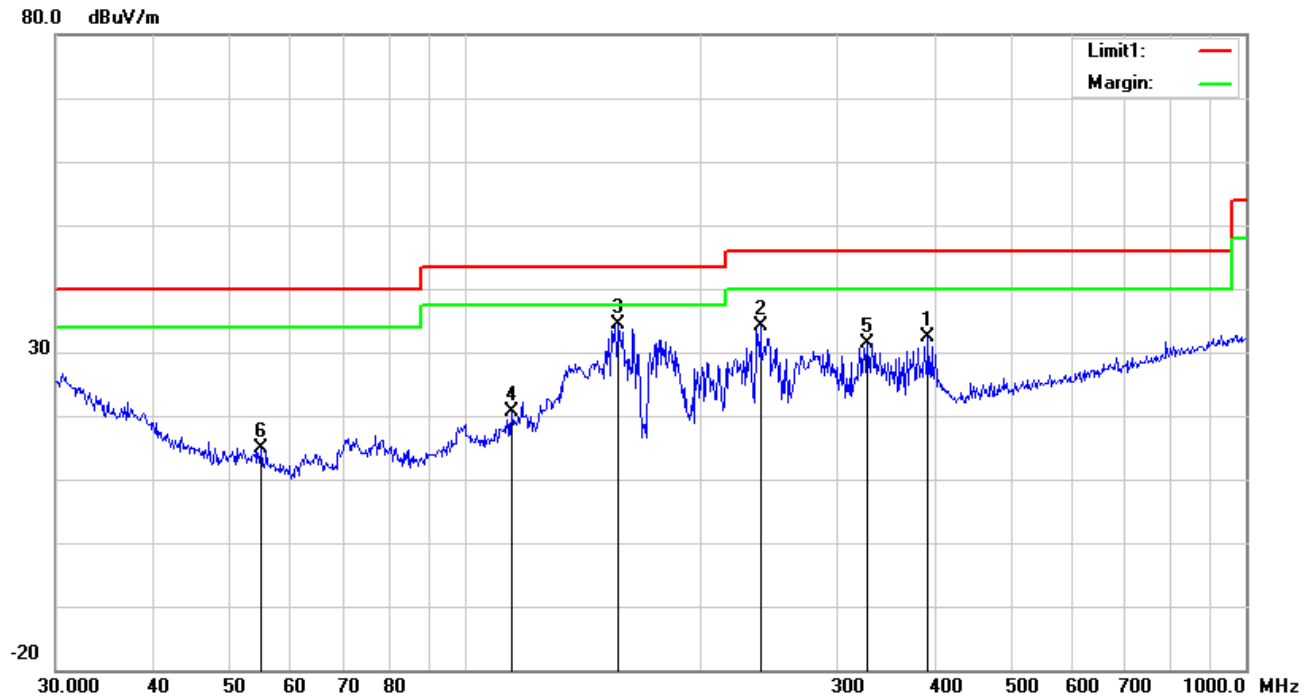


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detect or	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degr ee
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	H	392.0951	36.91	peak	15.53	22.03	2.01	32.42	46.00	-13.58	100	108
2	H	239.1473	43.27	peak	11.55	22.31	1.67	34.18	46.00	-11.82	100	291
3	H	157.5589	42.57	peak	12.60	22.29	1.38	34.26	43.50	-9.24	200	135
4	H	114.9169	28.74	peak	13.01	22.35	1.17	20.57	43.50	-22.93	100	99
5	H	327.8873	37.41	peak	14.19	22.21	1.93	31.32	46.00	-14.68	100	123
6	H	54.8348	28.69	peak	7.87	22.39	0.78	14.95	40.00	-25.05	200	158

30MHz -1GHz

80.0 dBuV/m

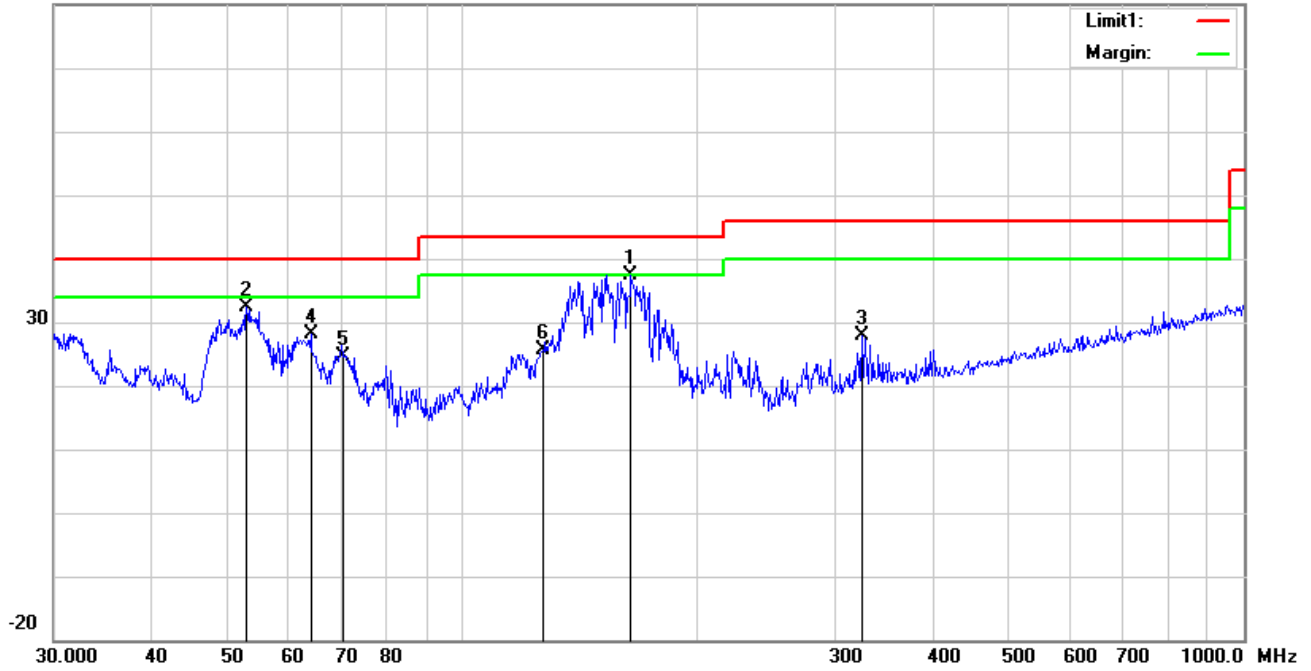

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee ()
1	V	164.3302	46.07	peak	12.25	22.27	1.38	37.43	43.50	-6.07	100	344
2	V	52.9453	46.01	peak	8.08	22.39	0.79	32.49	40.00	-7.51	100	17
3	V	324.4561	34.09	peak	14.11	22.22	1.91	27.89	46.00	-18.11	100	255
4	V	63.9828	42.26	peak	7.50	22.40	0.85	28.21	40.00	-11.79	100	75
5	V	70.3365	38.32	peak	7.79	22.38	0.98	24.71	40.00	-15.29	100	218
6	V	126.7723	33.31	peak	13.46	22.38	1.19	25.58	43.50	-17.92	200	118

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel: GFSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	48.72	AV	V	33.39	7.22	48.46	40.87	54	-13.13
4804	45.03	AV	H	33.39	7.22	48.46	37.18	54	-16.82
4804	66.53	PK	V	33.39	7.22	48.46	58.68	74	-15.32
4804	63.06	PK	H	33.39	7.22	48.46	55.21	74	-18.79
13674	20.45	AV	V	39.76	14.25	47.32	27.14	54	-26.86
13674	18.8	AV	H	39.76	14.25	47.32	25.49	54	-28.51
13674	39.31	PK	V	39.76	14.25	47.32	46	74	-28
13674	42.78	PK	H	39.76	14.25	47.32	49.47	74	-24.53

Middle Channel: GFSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4882	44.18	AV	V	33.62	7.53	48.36	36.97	54	-17.03
4882	46.22	AV	H	33.62	7.53	48.36	39.01	54	-14.99
4882	68.83	PK	V	33.62	7.53	48.36	61.62	74	-12.38
4882	62.13	PK	H	33.62	7.53	48.36	54.92	74	-19.08
8974	28.36	AV	V	38.28	6.48	46.86	26.26	54	-27.74
8974	30.34	AV	H	38.28	6.48	46.86	28.24	54	-25.76
8974	47.87	PK	V	38.28	6.48	46.86	45.77	74	-28.23
4882	44.18	AV	V	33.62	7.53	48.36	36.97	54	-17.03

High Channel: GFSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	48.45	AV	V	33.89	7.86	48.31	41.89	54	-12.11
4960	45.89	AV	H	33.89	7.86	48.31	39.33	54	-14.67
4960	65.97	PK	V	33.89	7.86	48.31	59.41	74	-14.59
4960	67.51	PK	H	33.89	7.86	48.31	60.95	74	-13.05
17757	19.11	AV	V	41.47	18	45.84	32.74	54	-21.26
17757	20.52	AV	H	41.47	18	45.84	34.15	54	-19.85
17757	38.99	PK	V	41.47	18	45.84	52.62	74	-21.38
17757	42.27	PK	H	41.47	18	45.84	55.9	74	-18.1

Note:

- 1, The testing has been conformed to $10 \times 2480 \text{ MHz} = 24,800 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
ISN	ISN T800	34373	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/17/2017	11/16/2018	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Active Antenna (9kHz-30MHz)	AL-130	121031	10/12/2017	10/11/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>