

FCC Part 15C Measurement and Test Report

For

Eggtronic Engineering Srl

Via Giorgio Campagna 8 41126, Modena, Italy

FCC ID: 2ANP7EGGTX010

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>EGGTX010</u>
Tested Model:	<u>S02G01B03</u>
Report No.:	<u>STR17098052I</u>
Tested Date:	<u>2017-09-04 to 2017-09-18</u>
Issued Date:	<u>2017-09-18</u>
Tested By:	<u>Mike Shi / Engineer</u> <i>Mike Shi</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND OPERATION MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE	9
4.2 EVALUATION INFORMATION	9
5. CONDUCTED EMISSIONS	10
5.1 TEST PROCEDURE	10
5.2 BASIC TEST SETUP BLOCK DIAGRAM	10
5.3 ENVIRONMENTAL CONDITIONS	10
5.4 TEST RECEIVER SETUP	11
5.5 SUMMARY OF TEST RESULTS/PLOTS	11
6. FIELD STRENGTH OF SPURIOUS EMISSIONS	14
6.1 STANDARD APPLICABLE	14
6.2 TEST PROCEDURE	14
6.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
6.4 ENVIRONMENTAL CONDITIONS	15
6. REFERENCE MEASUREMENT AT OPEN FIELD SITE	16
6.5 SUMMARY OF TEST RESULTS/PLOTS	16
7. OCCUPIED BANDWIDTH	20
7.1 STANDARD APPLICABLE	20
7.2 TEST PROCEDURE	20
7.3 ENVIRONMENTAL CONDITIONS	20
7.4 SUMMARY OF TEST RESULTS/PLOTS	20

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Eggtronic Engineering Srl
Address of applicant: Via Giorgio Campagna 8 41126, Modena, Italy

Manufacturer: Cyzon PCB Solutions
Address of manufacturer: Xinhua Road, Xinan Street, BaoAn District, Shenzhen, China

General Description of EUT	
Product Name:	EGGTX010
Trade Name:	Eggtronic
Model No.:	S02G01B03
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	112~205KHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Rated Voltage:	DC 5V (Wireless output)
Rated Current:	≤ 1A (Wireless output)
Rated Power:	≤ 5W (Wireless output)

1.2 Test Standards

The following report is prepared on behalf of the Eggtronic Engineering Srl in accordance with Part 15.207, 15.209, RSS-Gen Issue 4 and RSS-216 Issue 2 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.207, 15.209 and RSS-Gen Issue 4 and RSS-216 Issue 2 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging	Wireless Output

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	Dell Inc.	PSAI10R-050Q	/

Accessories Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.45	Shielded	Without Core

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2017-06-12	2018-06-11
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-12	2018-06-11
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11
Loop Antenna	ETS-LINDGREN	6502	00071730	2017-06-08	2018-06-07
Receiver	R&S	ESCI	100435	2017-06-08	2018-06-07
Spectrum Analyzer	R&S	FSP40	100416	2017-06-08	2018-06-07

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§ 15.207(a) Conducted Emission	Compliant
§ 15.209(a) Radiated Emission	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a Coil antenna, fulfill the requirement of this section.


5. Conducted Emissions

5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

5.2 Basic Test Setup Block Diagram

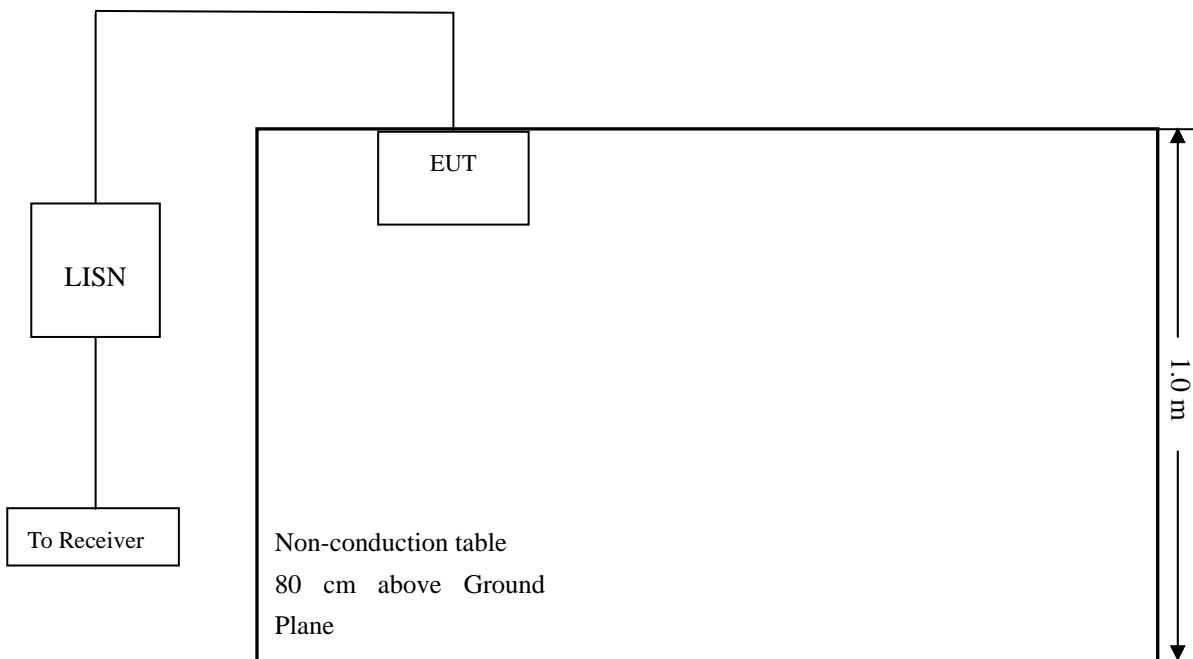

5.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

5.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

5.5 Summary of Test Results/Plots

According to the data in section 12.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

-6.21 dB at **0.3940 MHz** in the **Neutral, AVG** detector, 0.15-30MHz

Plot of Conducted Emissions Test Data


EUT: EGGTX010

Tested Model: S02G01B03

Operating Condition: TMI


Comment: DC 5V

Test Specification: Neutral

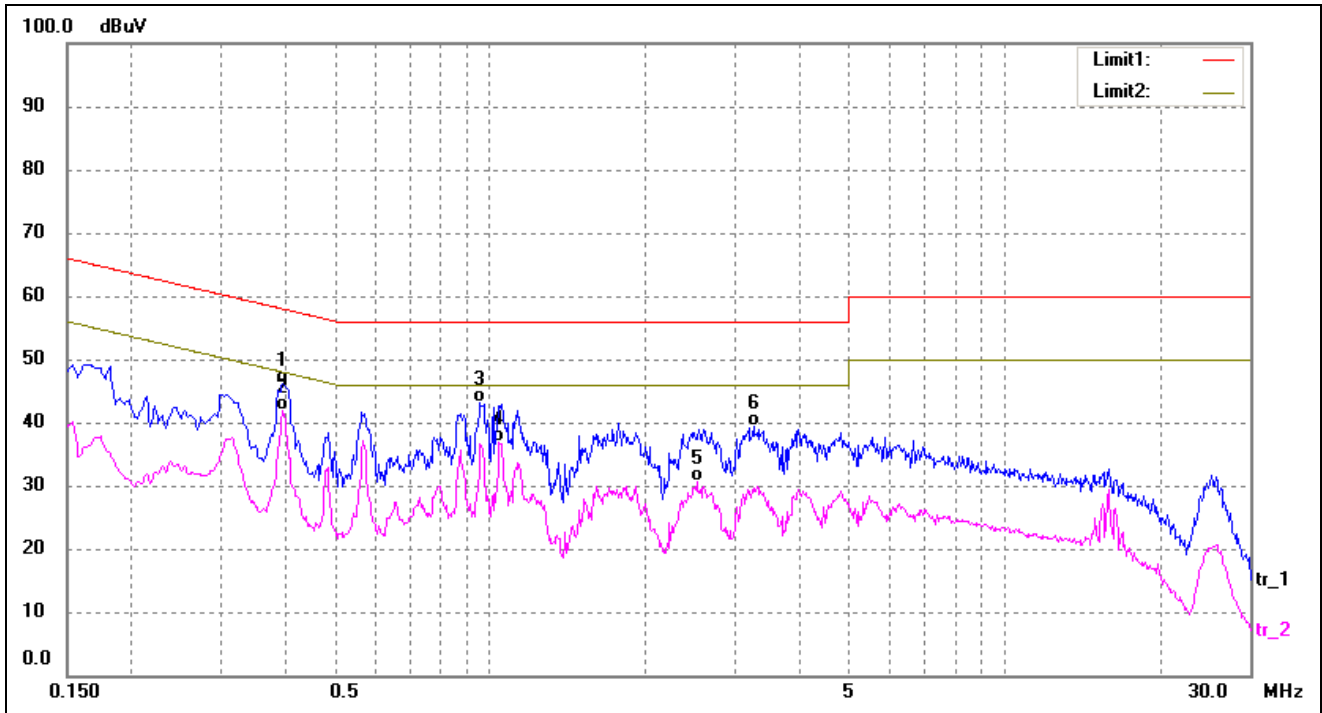

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3940	36.45	9.80	46.25	57.98	-11.73	QP
2*	0.3940	31.97	9.80	41.77	47.98	-6.21	AVG
3	0.9580	33.28	9.76	43.04	56.00	-12.96	QP
4	1.0420	27.10	9.76	36.86	46.00	-9.14	AVG
5	2.5180	20.89	9.72	30.61	46.00	-15.39	AVG
6	3.2500	29.63	9.70	39.33	56.00	-16.67	QP

Test Specification: Line

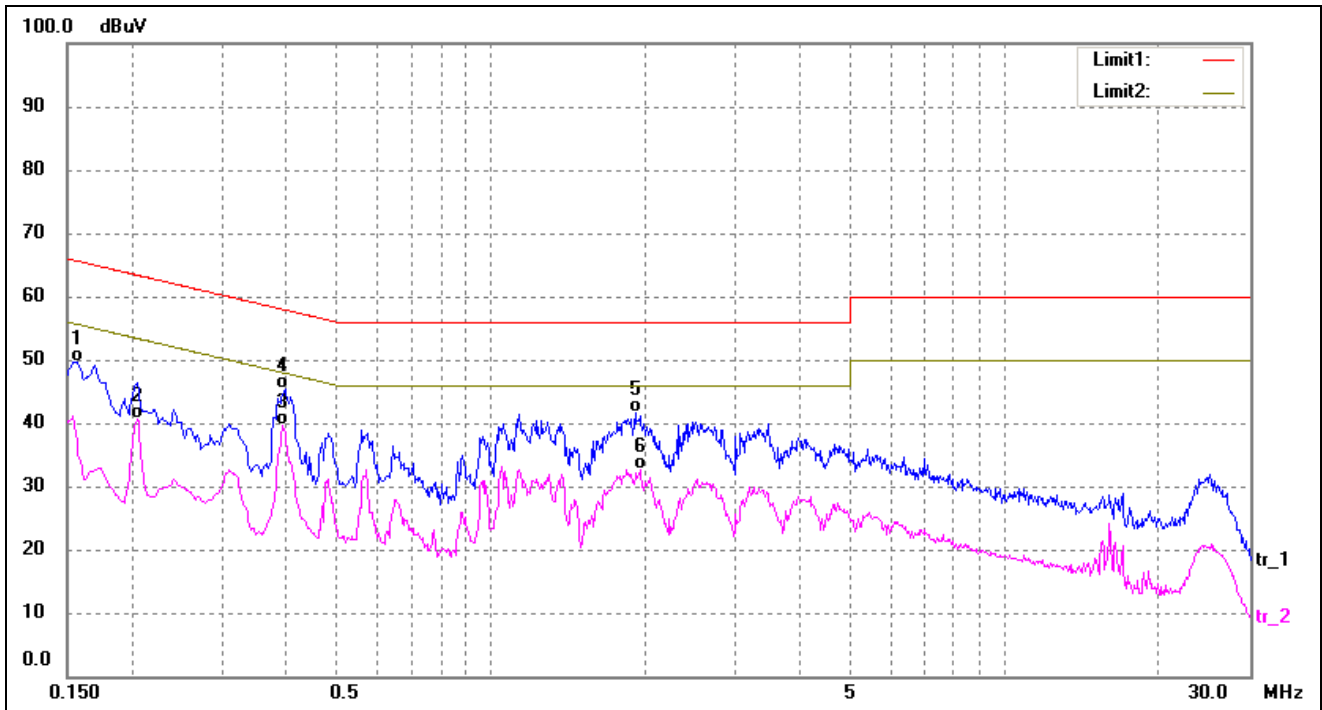

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	39.85	9.84	49.69	65.57	-15.88	QP
2	0.2060	30.76	9.80	40.56	53.37	-12.81	AVG
3*	0.3940	29.83	9.80	39.63	47.98	-8.35	AVG
4	0.3980	35.56	9.80	45.36	57.90	-12.54	QP
5	1.9180	31.89	9.74	41.63	56.00	-14.37	QP
6	1.9580	22.98	9.74	32.72	46.00	-13.28	AVG

6. Field Strength of Spurious Emissions

6.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

6.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

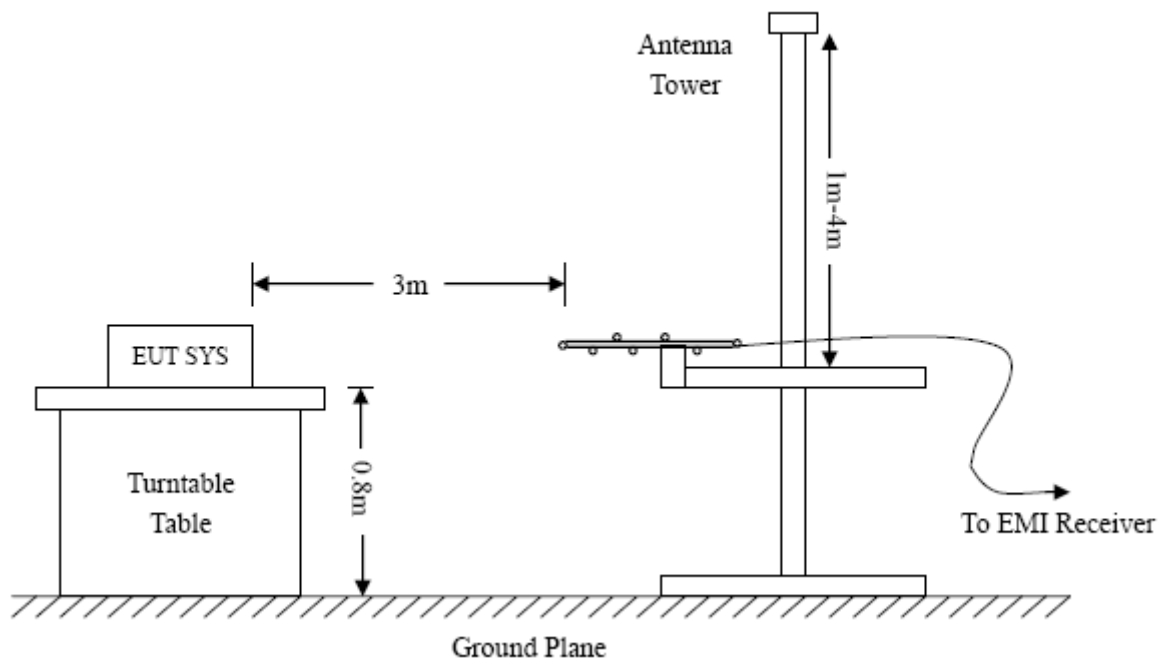

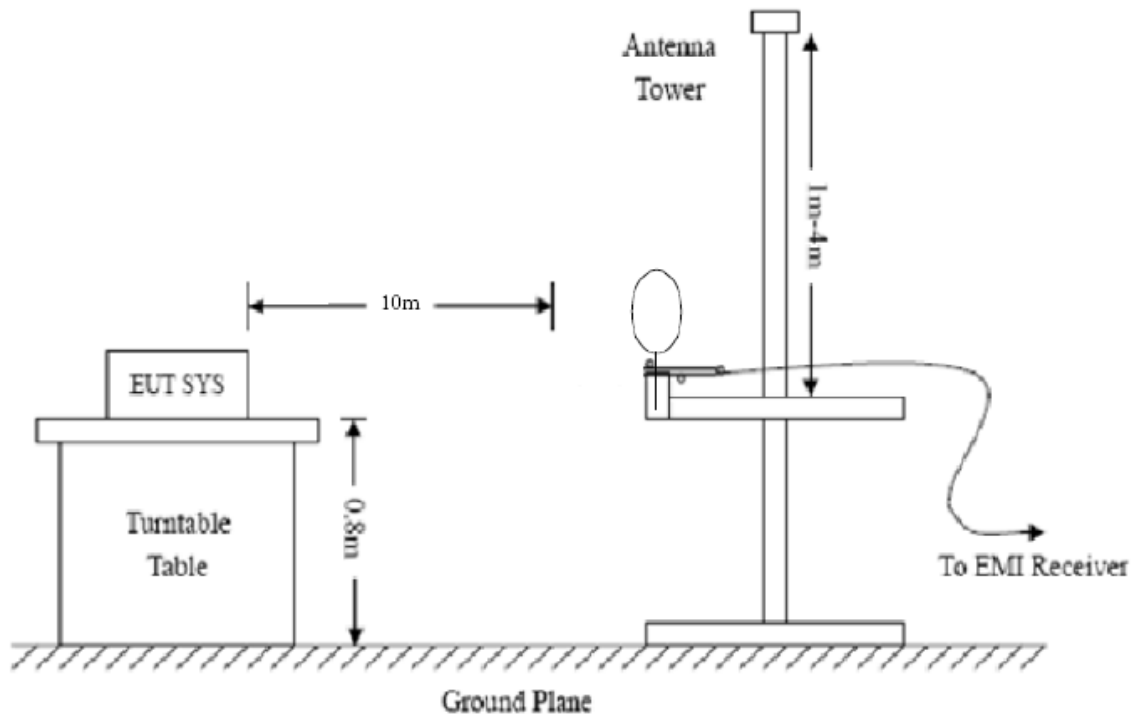

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

6.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

6.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

6. Reference Measurement at open field site

The measurement was performed with set-up consisting of a single turn loop antenna with a diameter of 0.15 m, feeded by a signal generator. The loop dimension was chosen to simulate the EUT as far as possible. The signal generator was set to a fixed output level with an unmodulated 10 kHz and 14 kHz sinusoidal signal.

The radiated H fieldstrength at 10 kHz and 14 kHz generated by this set-up was measured with the same test setup as used in the SAC in 3 m distance first, and then repeated at the open field site in 3 m and 10 m distance

6.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.209(a) standards, and had the worst cases:

-14.58 dB at 36.1272 MHz in the Vertical polarization QP detector, 9kHz to 1 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data


EUT: EGGTX010

Tested Model: S02G01B03

Operating Condition: TM1


Comment: DC 5V

Test Specification: Horizontal

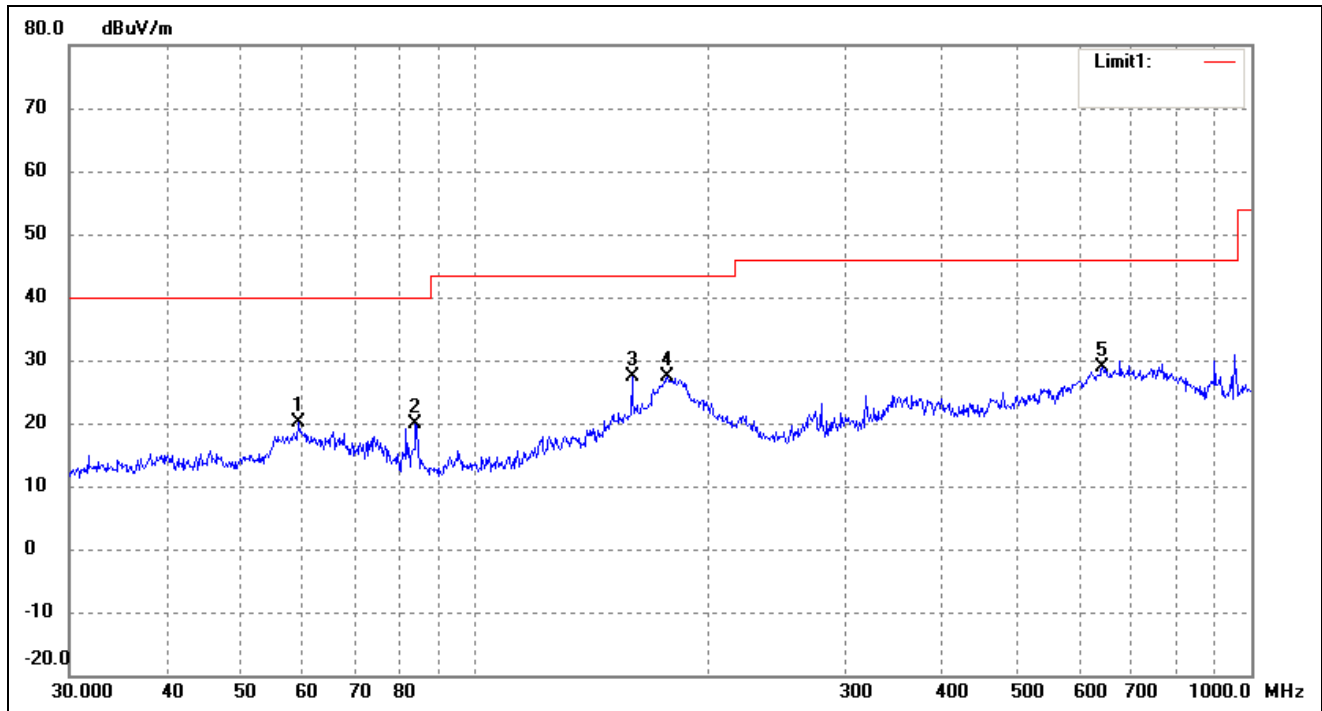


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.2325	36.67	-16.52	20.15	40.00	-19.85	295	100	QP
2	83.8156	39.04	-19.16	19.88	40.00	-20.12	97	100	QP
3	159.2251	46.51	-19.08	27.43	43.50	-16.07	96	100	QP
4	176.8878	46.41	-19.07	27.34	43.50	-16.16	115	100	QP
5	642.8613	29.92	-1.08	28.84	46.00	-17.16	208	100	QP

Test Specification: Vertical

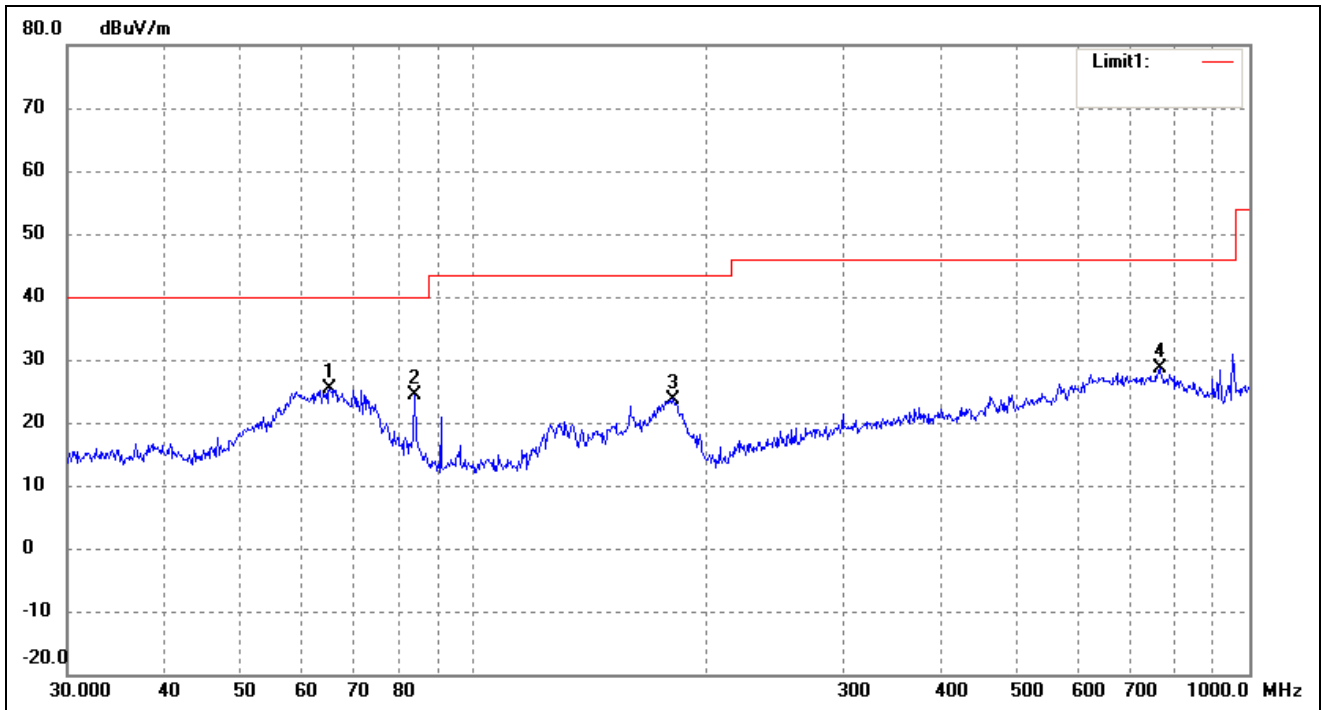

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	65.3432	43.09	-17.67	25.42	40.00	-14.58	70	100	QP
2	84.1100	43.58	-19.11	24.47	40.00	-15.53	203	100	QP
3	181.2834	42.77	-19.02	23.75	43.50	-19.75	69	100	QP
4	766.0572	29.48	-0.93	28.55	46.00	-17.45	133	100	QP

Radiated Emissions 9kHz to 30MHz:

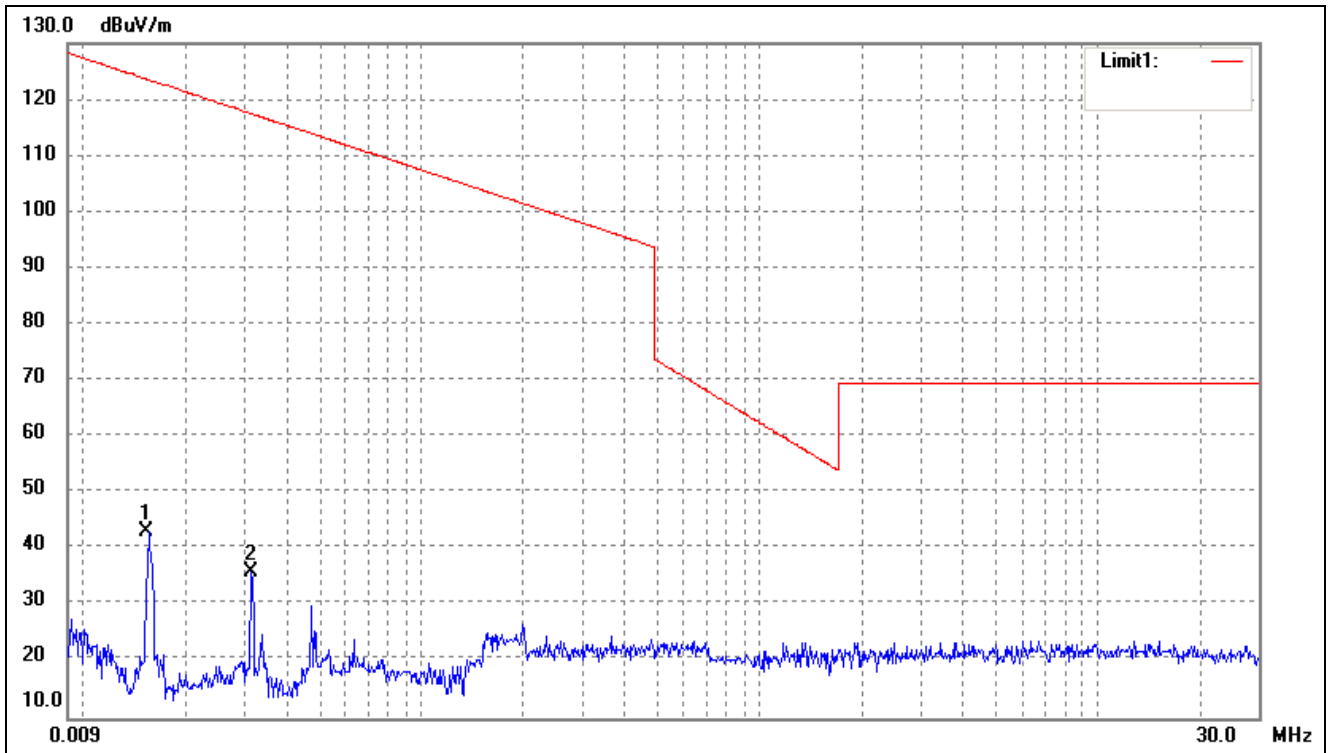

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	0.0154	43.11	0.00	43.11	123.67	-80.56	12	100	QP
2	0.0313	35.90	0.00	35.90	117.55	-81.65	134	100	QP

7. Occupied Bandwidth

7.1 Standard Applicable

According to 15.205, 99% emission bandwidth.

7.2 Test Procedure


- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

7.4 Summary of Test Results/Plots

Test Channel(kHz)	99% Bandwidth(kHz)
150	31.1977

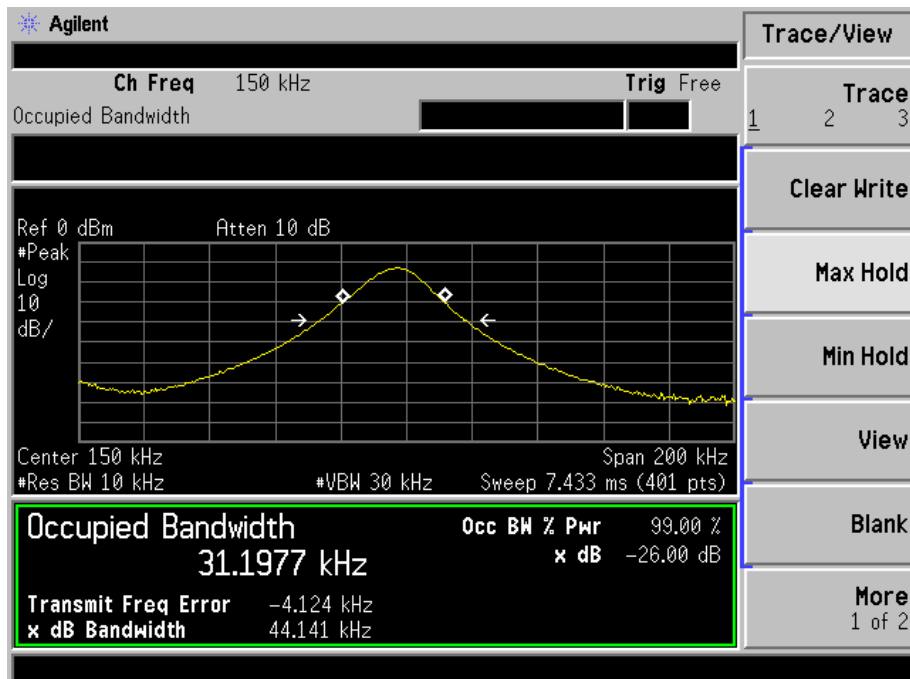

***** END OF REPORT *****