


TEST REPORT

Report No..... : **KS2105S1457E**
 FCC ID..... : **2ANPB-RBT100L**
 Applicant..... : **RNG International Inc.**
 Address..... : 17534 Von Kaman Avenue, Irvine, CA 92614 – 6208, USA
 Manufacturer..... : HENGYANG RICH POWER CO.,LTD
 Address..... : NO.1 Huagong Road Songmu Industrial Zone, Hengyang Hunan, China
 Factory : HENGYANG RICH POWER CO.,LTD
 Address..... : NO.1 Huagong Road Songmu Industrial Zone, Hengyang Hunan, China
 Product Name..... : **12.8V 100Ah Lithium Iron Phosphate Battery w/ Bluetooth**
 Trade Mark..... : 
 Model/Type reference : RBT100LFP12-BT
 Listed Model(s) : N/A
 Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
 Date of Receipt : May 29,2021
 Date of Test Date : May 29,2021~June 22,2021
 Date of issue : June 22,2021
 Test result : **Pass**

Compiled by:
 (Printed name+signature) Rory Huang
 Supervised by:
 (Printed name+signature) Eder Zhan
 Approved by:
 (Printed name+signature) Neil Wan



Testing Laboratory Name..... : **KSIGN(Guangdong) Testing Co., Ltd.**
 Address..... : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

TABLE OF CONTENTS

Page

| | |
|--|-----------|
| 1. TEST SUMMARY | 3 |
| 1.1. TEST STANDARDS | 3 |
| 1.2. REPORT VERSION | 3 |
| 1.3. TEST DESCRIPTION | 4 |
| 1.4. TEST FACILITY..... | 5 |
| 1.5. MEASUREMENT UNCERTAINTY | 6 |
| 1.6. ENVIRONMENTAL CONDITIONS..... | 6 |
| 2. GENERAL INFORMATION | 7 |
| 2.1. GENERAL DESCRIPTION OF EUT..... | 7 |
| 2.2. OPERATION STATE | 8 |
| 2.3. MEASUREMENT INSTRUMENTS LIST..... | 9 |
| 2.4. TEST SOFTWARE | 10 |
| 3. TEST ITEM AND RESULTS | 11 |
| 3.1. ANTENNA REQUIREMENT..... | 11 |
| 3.2. PEAK OUTPUT POWER | 12 |
| 3.3. POWER SPECTRAL DENSITY | 15 |
| 3.4. 6dB BANDWIDTH | 18 |
| 3.5. BAND EDGE AND SPURIOUS EMISSION (CONDUCTED) | 22 |
| 3.6. BAND EDGE EMISSIONS(RADIATED)..... | 25 |
| 3.7. SPURIOUS EMISSION (RADIATED) | 30 |
| 3.8. CONDUCTED EMISSION | 41 |
| 4. EUT TEST PHOTOS | 42 |
| 5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL | 44 |

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

KDB 558074 D01 : The measurement guidance provided herein is applicable only to Digital Transmission System (DTS) devices operating in the 902-928 MHz, 2400-2483.5 MHz and/or 5725-5850 MHz bands under §15.247 of the FCC rules (Title 47 of the Code of Federal Regulations)

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

| Revised No. | Date of issue | Description |
|-------------|---------------|-------------|
| 01 | June 22, 2021 | Original |

1.3. Test Description

| FCC Part 15 Subpart C(15.247) | | | |
|--------------------------------|------------------|--------|---------------|
| Test Item | Standard Section | Result | Test Engineer |
| | FCC | | |
| Antenna Requirement | 15.203 | Pass | Rory Huang |
| Conducted Emission | 15.207 | N/A | N/A |
| Restricted Bands | 15.205 | Pass | Rory Huang |
| Peak Output Power | 15.247(b) | Pass | Rory Huang |
| Band Edge Emissions | 15.247(d) | Pass | Rory Huang |
| Power Spectral Density | 15.247(e) | Pass | Rory Huang |
| Radiated Emission | 15.205&15.209 | Pass | Rory Huang |
| 6dB Bandwidth | 15.247(a)(2) | Pass | Rory Huang |
| Spurious RF Conducted Emission | 15.247(d) | Pass | Rory Huang |

Note:

The measurement uncertainty is not included in the test result.

1.4. Test Facility

Address of the report laboratory

KSIGN(Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L13261

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: CN0096

The 3m alternate test site of KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: CN0096

FCC-Registration No.: CN1272

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01” Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 “ and is documented in the KSIGN(Guangdong) Testing Co., Ltd. system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for KSIGN(Guangdong) Testing Co., Ltd.

| Test Items | Measurement Uncertainty | Notes |
|---|-------------------------|-------|
| Transmitter power conducted | 0.42 dB | (1) |
| Transmitter power Radiated | 2.14 dB | (1) |
| Conducted spurious emissions 9kHz~40GHz | 1.60 dB | (1) |
| Radiated spurious emissions 9kHz~40GHz | 2.20 dB | (1) |
| Conducted Emissions 9kHz~30MHz | 3.20 dB | (1) |
| Radiated Emissions 30~1000MHz | 4.70 dB | (1) |
| Radiated Emissions 1~18GHz | 5.00 dB | (1) |
| Radiated Emissions 18~40GHz | 5.54 dB | (1) |
| Occupied Bandwidth | 2.80 dB | (1) |

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.


1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|--------------------|-------------|
| Temperature: | 15~35°C |
| Relative Humidity: | 30~60 % |
| Air Pressure: | 950~1050mba |

2. GENERAL INFORMATION

2.1. General Description of EUT

| | |
|-------------------------|---|
| Test Sample Number 1: | 1-1-1(Normal Sample),1-1-2(Engineering Sample) |
| Product Name: | 12.8V 100Ah Lithium Iron Phosphate Battery w/ Bluetooth |
| Trade Mark: |  |
| Model/Type reference: | RBT100LFP12-BT |
| Listed Model(s): | N/A |
| Model Difference: | N/A |
| Power Source: | N/A |
| Power supply (Battery): | DC 12.8V, 100Ah, 1280Wh |
| Hardware version: | V1.0 |
| Software version: | V1.0.0 |
| Bluetooth V5.0 | |
| Modulation: | GFSK |
| Operation frequency: | 2402MHz~2480MHz |
| Max Peak Output Power: | -0.41dBm |
| Channel number: | 40 |
| Channel separation: | 2MHz |
| Antenna type: | PCB Antenna |
| Antenna gain: | 1.72 dBi |

2.2. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BLE, 40 channels are provided to the EUT. Channels 00/19/39 were selected for testing.

Operation Frequency List:

| Channel | Frequency (MHz) |
|-----------|-----------------|
| 00 | 2402 |
| 01 | 2404 |
| ⋮ | ⋮ |
| 19 | 2440 |
| 20 | 2442 |
| 21 | 2444 |
| ⋮ | ⋮ |
| 38 | 2478 |
| 39 | 2480 |

Note: The display in grey were the channel selected for testing.

Test mode

| NO. | TEST MODE DESCRIPTION |
|-----|-----------------------------|
| 1 | Low channel TX (2402MHz) |
| 2 | Middle channel TX (2440MHz) |
| 3 | High channel TX (2480MHz) |

Note:

1. Only the result of the worst case was recorded in the report, if no other cases..
2. The test software is the SecureCRTSecure_V7.0.0.326 which can set the EUT into the individual test modes.

2.3. Measurement Instruments List

| Tonscend JS0806-2 Test system | | | | | |
|-------------------------------|-------------------------------------|--------------|-----------|------------|------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Until |
| 1 | Spectrum Analyzer | R&S | FSV40-N | 101798 | 03/22/2022 |
| 2 | Vector Signal Generator | Agilent | N5182A | MY50142520 | 03/18/2022 |
| 3 | Analog Signal Generator | HP | 83752A | 3344A00337 | 03/18/2022 |
| 4 | Power Sensor | Agilent | E9304A | MY50390009 | 03/18/2022 |
| 5 | Power Sensor | Agilent | E9300A | MY41498315 | 03/18/2022 |
| 6 | Wideband Radio Communication Tester | R&S | CMW500 | 157282 | 03/18/2022 |
| 7 | Climate Chamber | Angul | AGNH80L | 1903042120 | 03/18/2022 |
| 8 | Dual Output DC Power Supply | Agilent | E3646A | MY40009992 | 03/18/2022 |
| 9 | RF Control Unit | Tonscend | JS0806-2 | / | 03/18/2022 |

| Transmitter spurious emissions & Receiver spurious emissions | | | | | |
|--|--|---------------------|--------------|------------|------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Until |
| 1 | EMI Test Receiver | R&S | ESR | 102525 | 03/18/2022 |
| 2 | High Pass Filter | Chengdu E-Microwave | OHF-3-18-S | 0E01901038 | 03/22/2022 |
| 3 | High Pass Filter | Chengdu E-Microwave | OHF-6.5-18-S | 0E01901039 | 03/22/2022 |
| 4 | Spectrum Analyzer | HP | 8593E | 3831U02087 | 03/22/2022 |
| 5 | Ultra-Broadband logarithmic period Antenna | Schwarzbeck | VULB 9163 | 01230 | 03/29/2023 |
| 6 | Loop Antenna | Beijin ZHINAN | ZN30900C | 18050 | 03/27/2022 |
| 7 | Spectrum Analyzer | R&S | FSV40-N | 101798 | 03/22/2022 |
| 8 | Horn Antenna | Schwarzbeck | BBHA 9120 D | 2023 | 03/29/2023 |
| 9 | Pre-Amplifier | Schwarzbeck | BBV 9745 | 9745#129 | 03/22/2022 |
| 10 | Pre-Amplifier | EMCI | EMC051835SE | 980662 | 03/22/2022 |

| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Until |
|------|-------------------|--------------|-----------|--------------|------------|
| 1 | LISN | R&S | ENV432 | 1326.6105.02 | 03/18/2022 |
| 2 | EMI Test Receiver | R&S | ESR | 102524 | 03/18/2022 |
| 3 | Manual RF Switch | JS TOYO | / | MSW-01/002 | 03/18/2022 |

Note:

1)The Cal. Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

2.4. Test Software

| Software name | Model | Version |
|---|----------|---------------|
| Conducted emission Measurement Software | EZ-EMC | EMC-Con 3A1.1 |
| Radiated emission Measurement Software | EZ-EMC | FA-03A.2.RE |
| Bluetooth and WIFI Test System | JS1120-3 | 2.5.77.0418 |

3. TEST ITEM AND RESULTS

3.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.


Note: The antenna is permanently fixed to the EUT

3.2. Peak Output Power

Limit

| Test Item | Limit | Frequency Range(MHz) |
|-------------------|------------------|----------------------|
| Peak Output Power | 1 Watt or 30 dBm | 2400~2483.5 |

Test Configuration

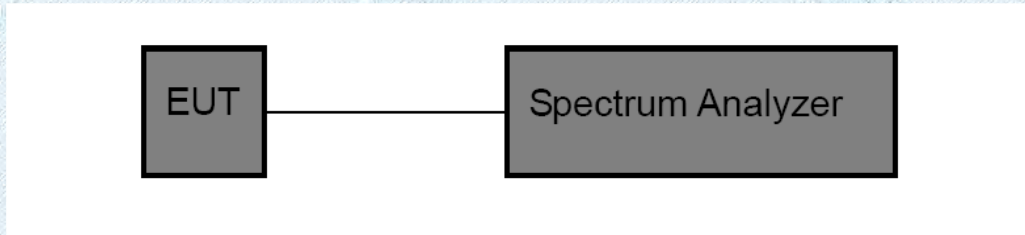

Test Procedure

1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator..
2. Spectrum Setting:
 Peak Detector: $RBW \geq DTS$ Bandwidth, $VBW \geq 3 * RBW$.
 Sweep time=Auto.
 Detector= Peak.
 Trace mode= Maxhold.
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.2.


Test Result

GFSK_1M



| Test Mode: | BLE Mode | |
|-------------------------|-------------------|-------------|
| Channel frequency (MHz) | Test Result (dBm) | Limit (dBm) |
| 2402 | -0.41 | 30 |
| 2440 | -0.56 | |
| 2480 | -2.26 | |

BLE Mode

2402 MHz

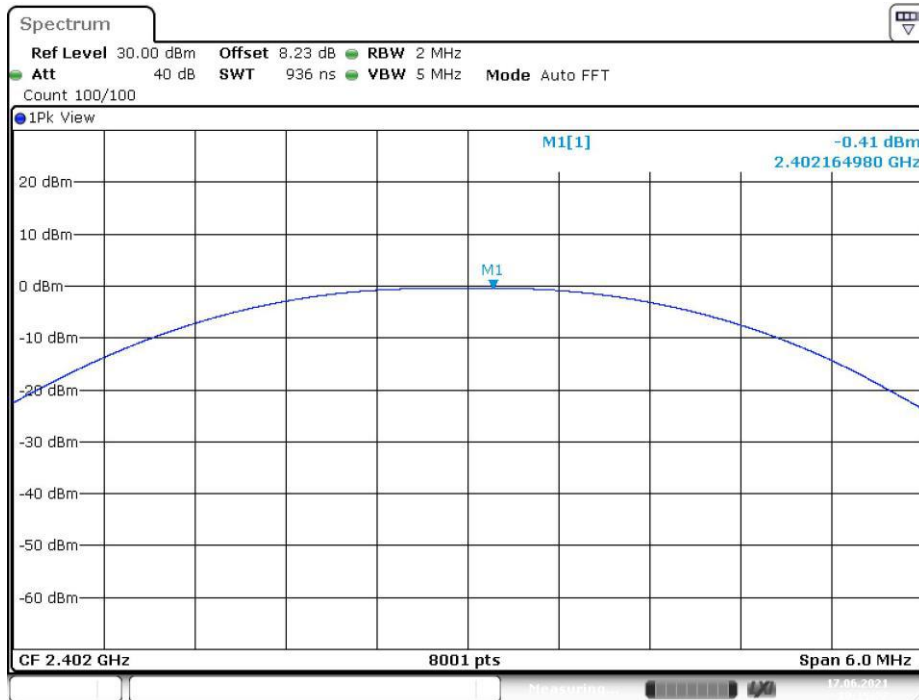

Date: 17.JUN.2021 10:15:27

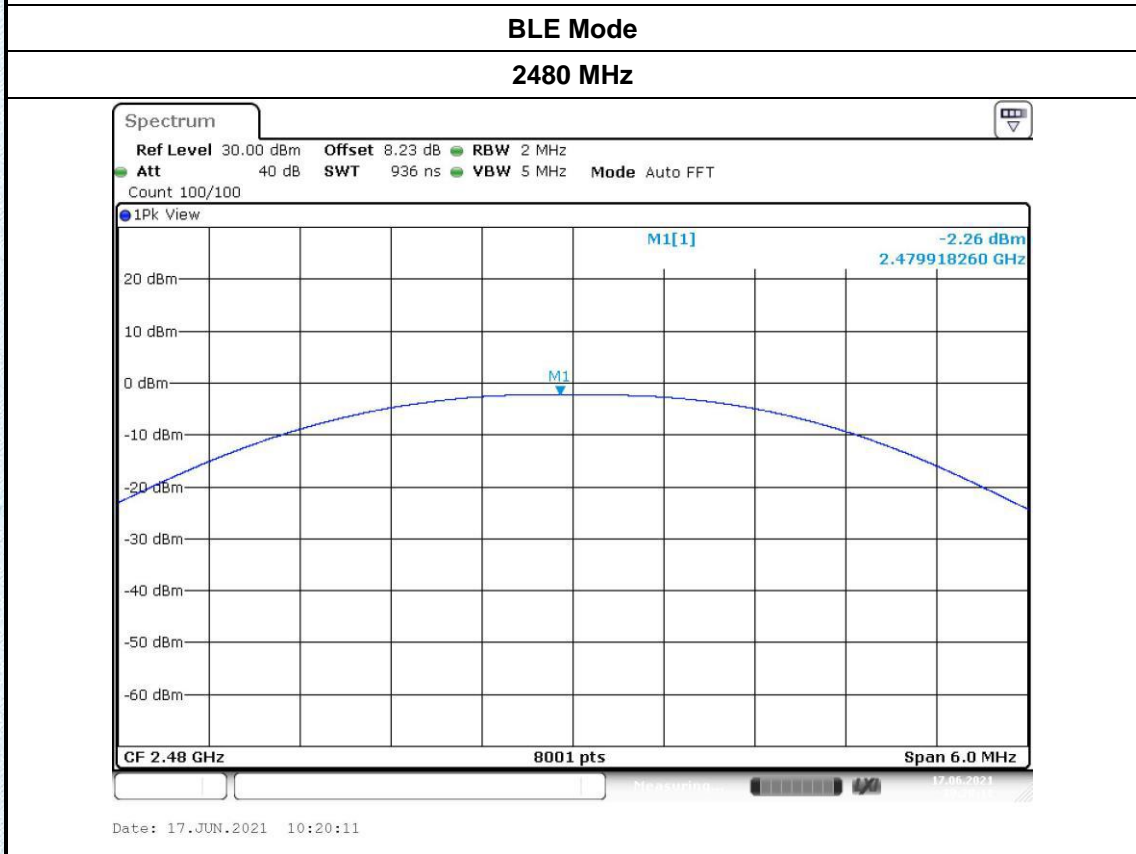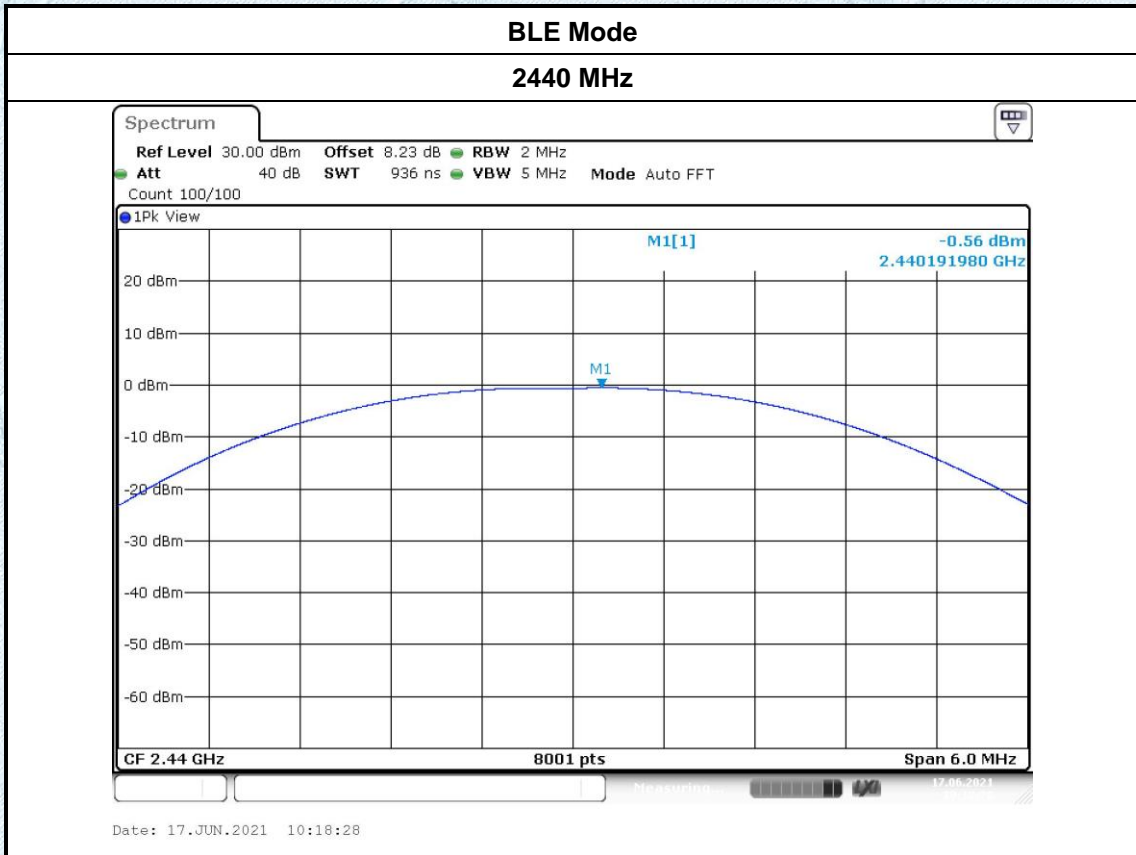


3.3. Power Spectral Density

Limit

| FCC Part 15 Subpart C(15.247) | | |
|-------------------------------|--------------------|----------------------|
| Test Item | Limit | Frequency Range(MHz) |
| Power Spectral Density | 8dBm(in any 3 kHz) | 2400~2483.5 |

Test Configuration

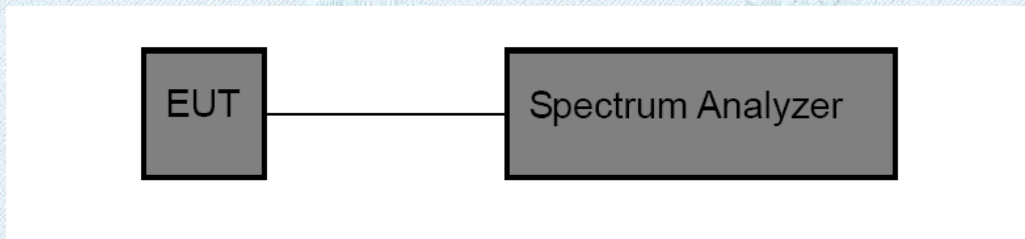

Test Procedure

1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.b-6.ii of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
 - Set analyser center frequency to DTS channel center frequency.
 - Set the span to 1.5 times the DTS bandwidth.
 - Set the RBW to: 10 kHz
 - Set the VBW to: 30 kHz
 - Detector: peak
 - Sweep time: auto
 - Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.2.

Test Result

Note:


$$\text{Power Density(dBm/3kHz)} = \text{Power Density(dBm/10kHz)} - 10 \cdot \log(10/3)$$

GFSK_1M



| Test Mode: | BLE Mode | | |
|-------------------------|---------------------------|--------------------------|-------------|
| Channel Frequency (MHz) | Power Density (dBm/10kHz) | Power Density (dBm/3kHz) | Limit (dBm) |
| 2402 | -10.72 | -15.95 | 8dBm/3kHz |
| 2440 | -10.88 | -16.11 | |
| 2480 | -12.79 | -18.02 | |

BLE Mode

2402 MHz

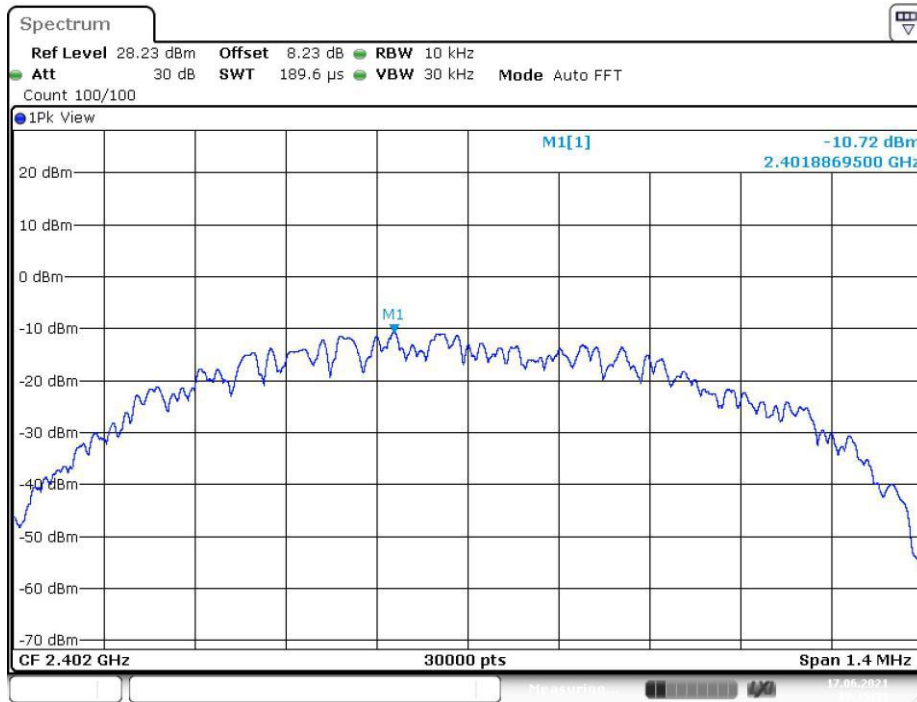

Date: 17.JUN.2021 10:15:33

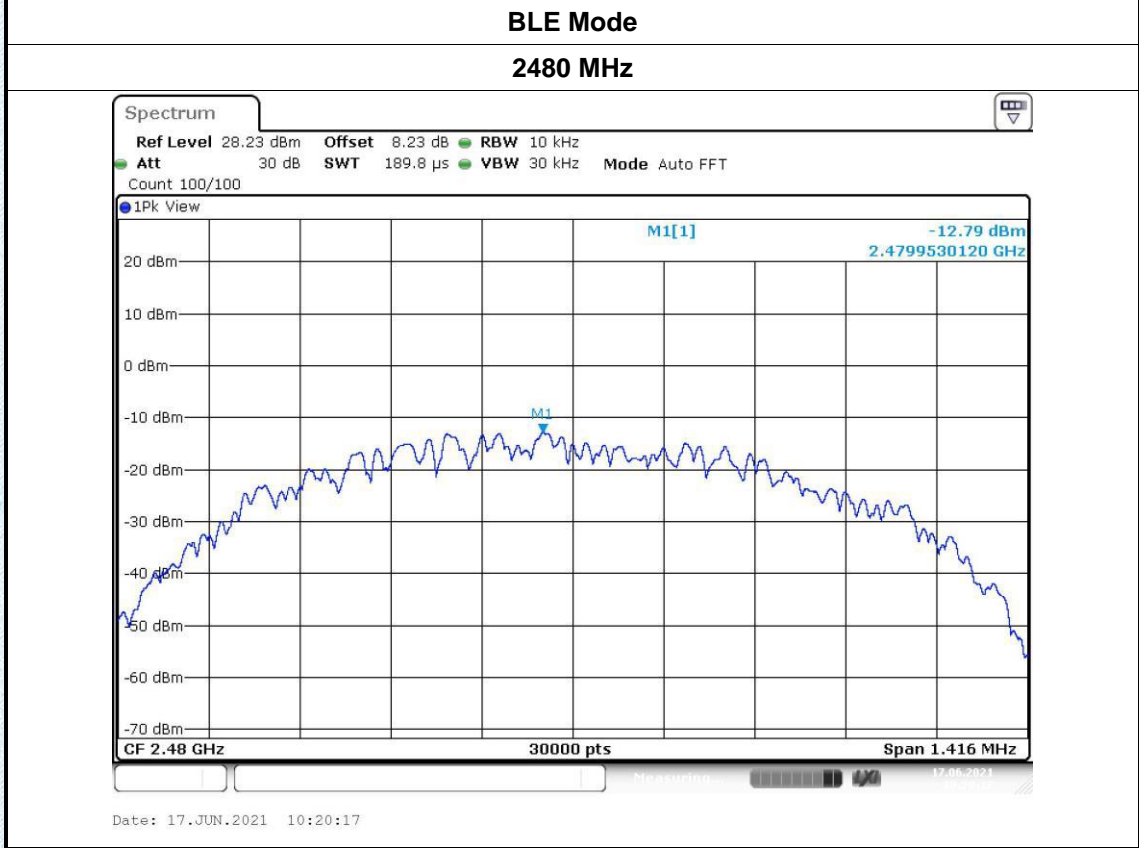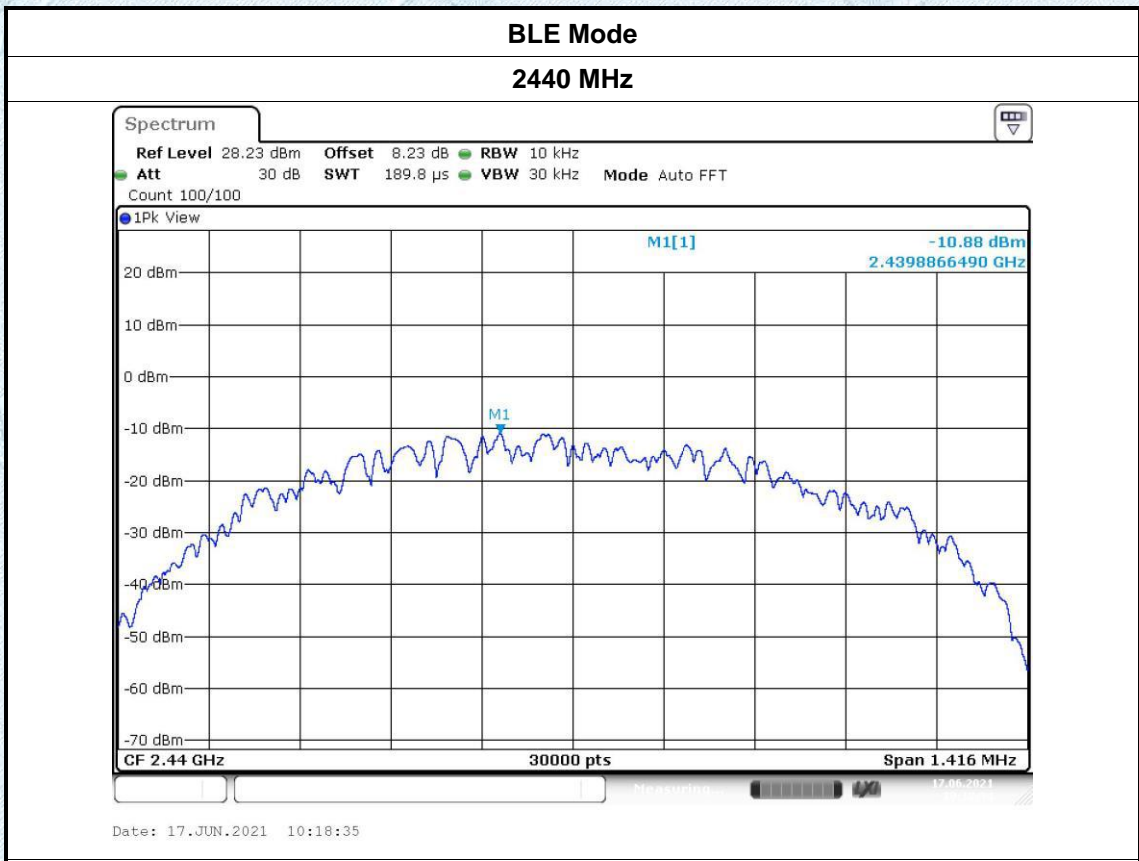


3.4. 6dB Bandwidth

Limit

| Test Item | Limit | Frequency Range(MHz) |
|-----------|-----------------------------------|----------------------|
| Bandwidth | ≥ 500 KHz (6dB bandwidth) | 2400~2483.5 |

Test Configuration

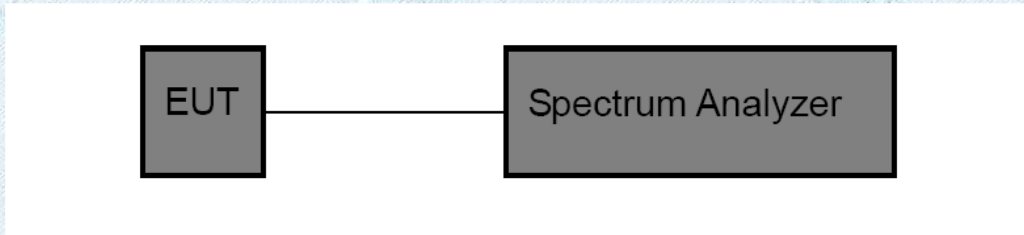

Test Procedure

1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator.
2. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.
3. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.
4. Spectrum Setting:
6dB bandwidth:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - (6) Allow the trace to stabilize.
- (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode


Please refer to the clause 2.2.

Test Results

GFSK_1M

| Test Mode: | BLE Mode | | |
|-------------------------|---------------------|--------------------|-------------|
| Channel frequency (MHz) | 6dB Bandwidth (MHz) | 99%Bandwidth (MHz) | Limit (MHz) |
| 2402 | 0.700 | 1.039 | ≥0.5 |
| 2440 | 0.708 | 1.035 | |
| 2480 | 0.708 | 1.035 | |

**2402 MHz
6dB Bandwidth**

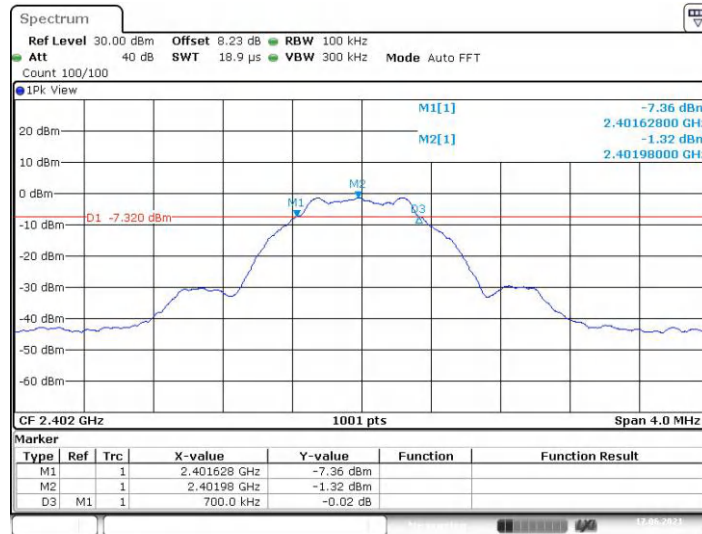



Date: 17.JUN.2021 10:15:09

99%Bandwidth



Date: 17.JUN.2021 10:15:20

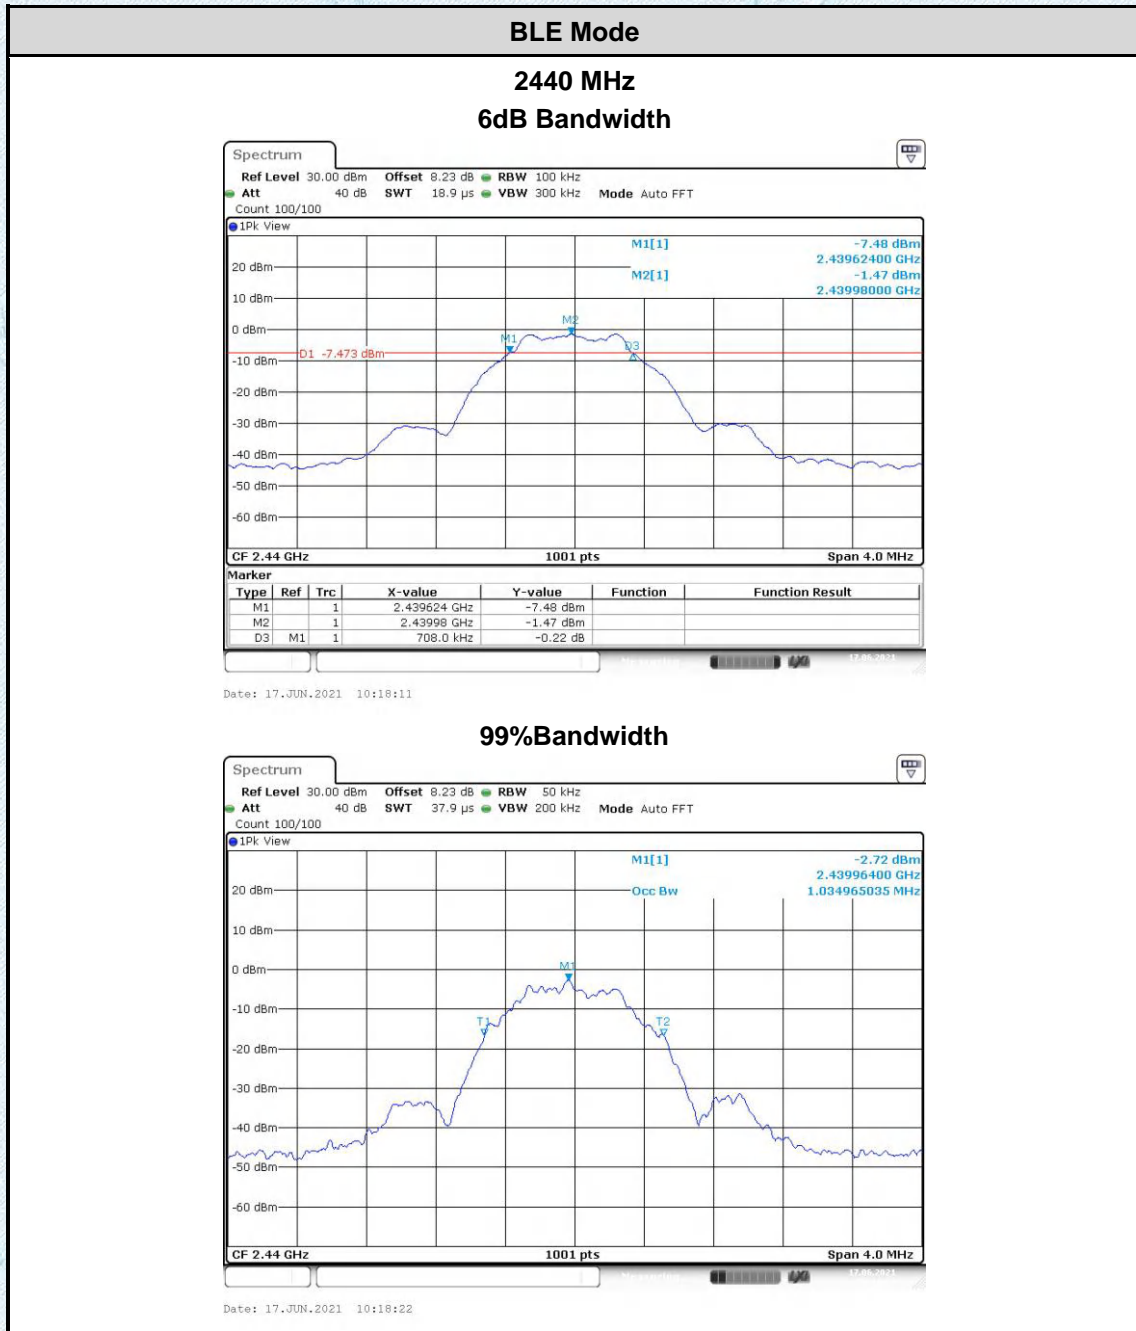

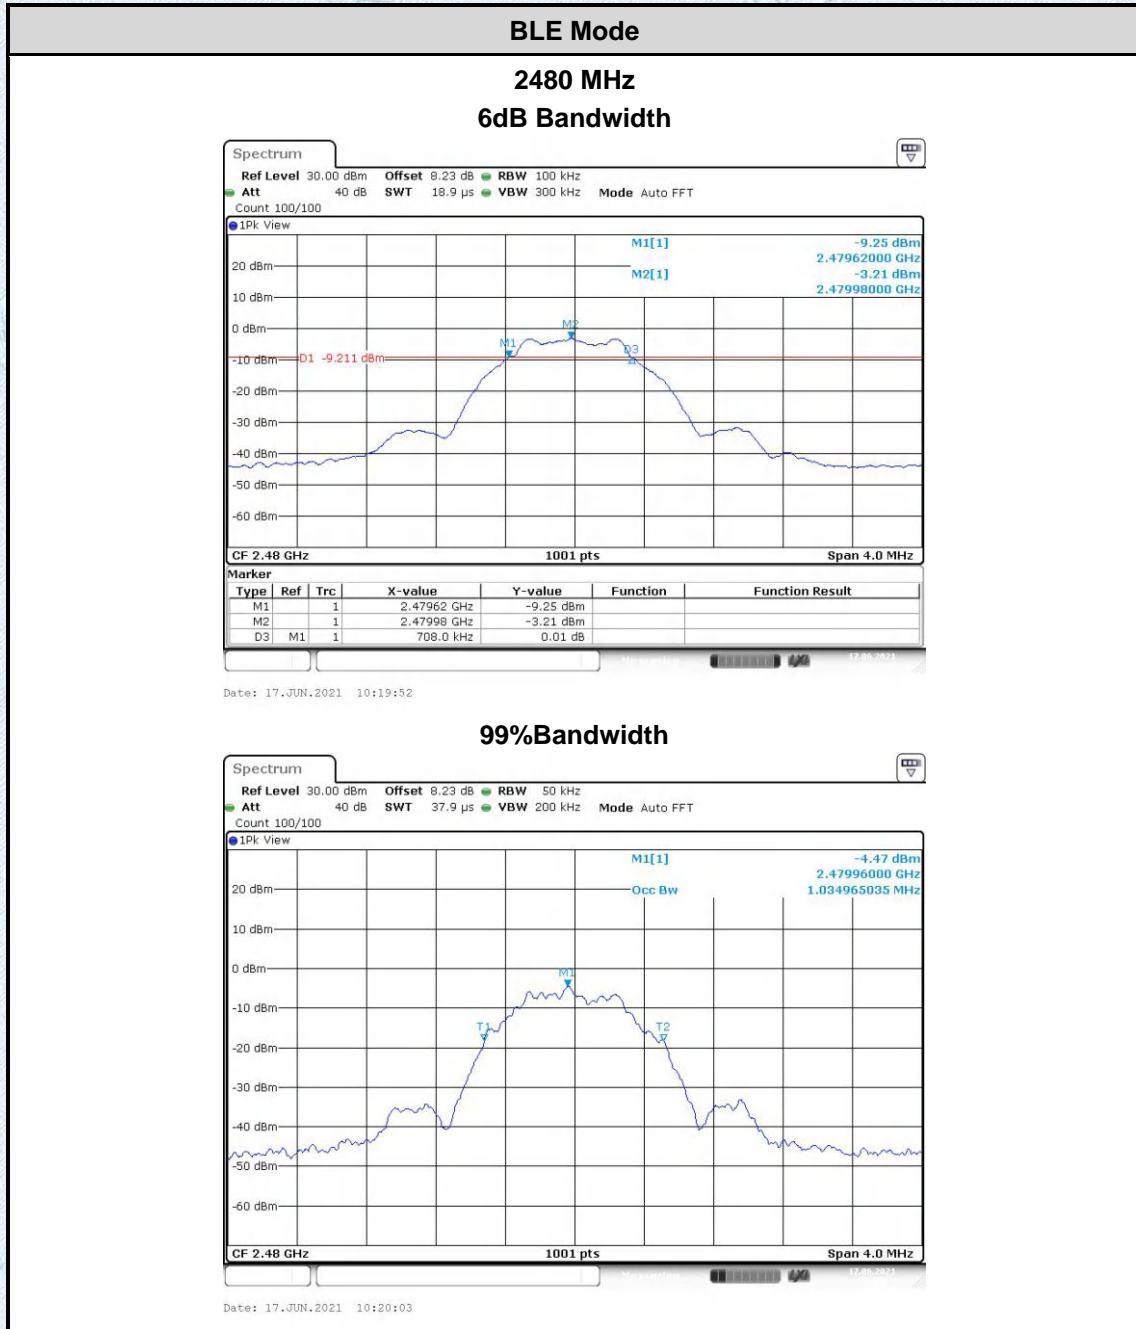


3.5. Band edge and Spurious Emission (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration

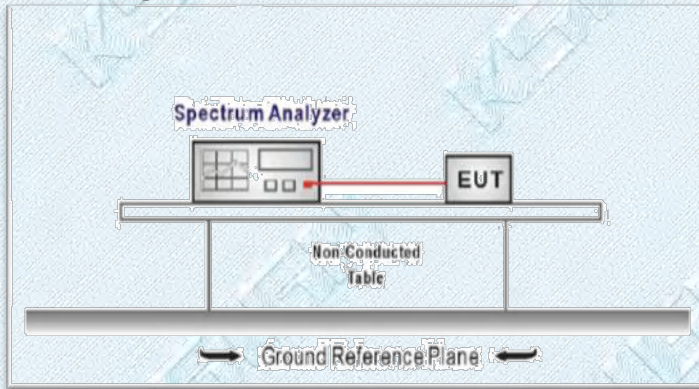

Test Procedure



1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - RBW=100KHz
 - VBW=300KHz.
 - Detector function: Peak.
 - Trace: Max hold.
 - Sweep = Auto couple.

Allow the trace to stabilize.

Test Mode

Please refer to the clause 2.2.

Test Results

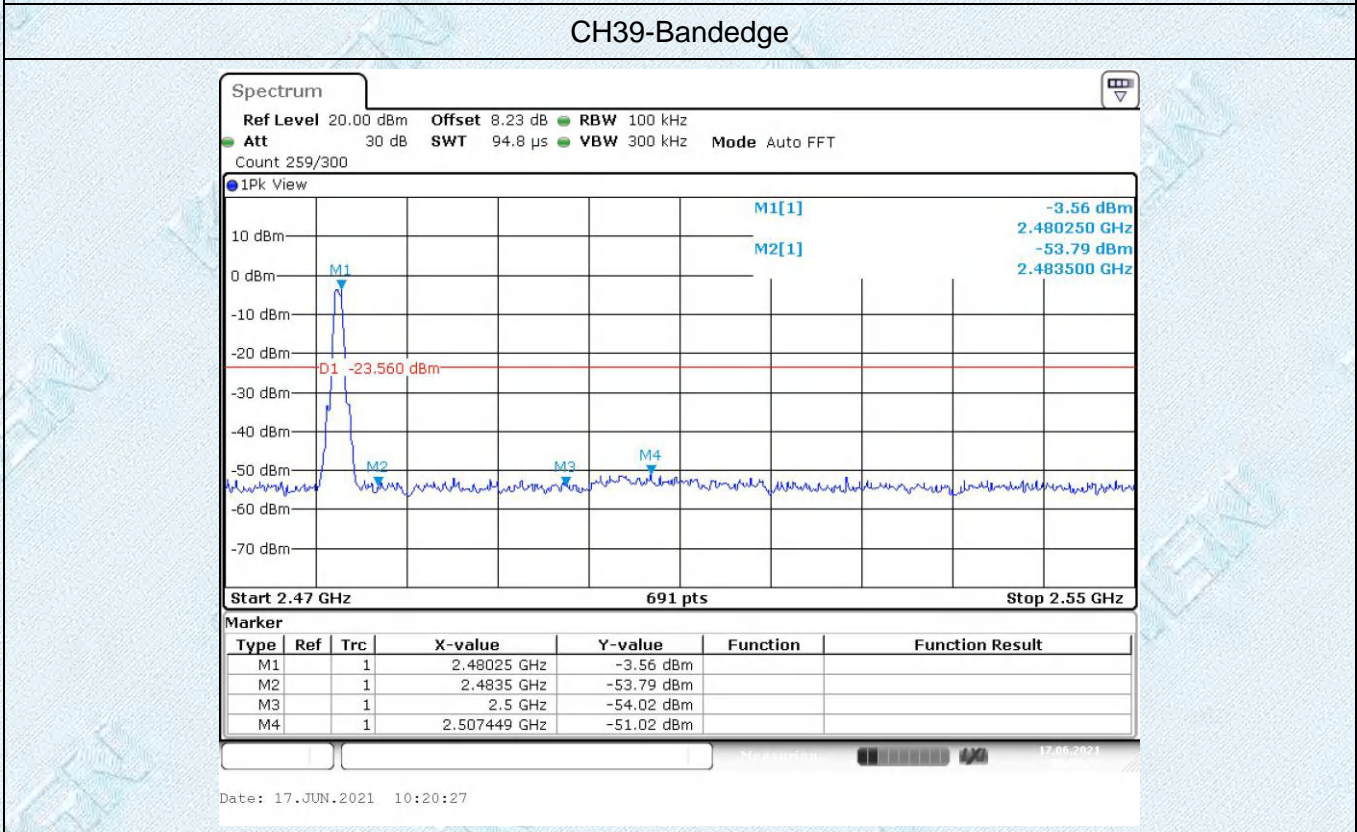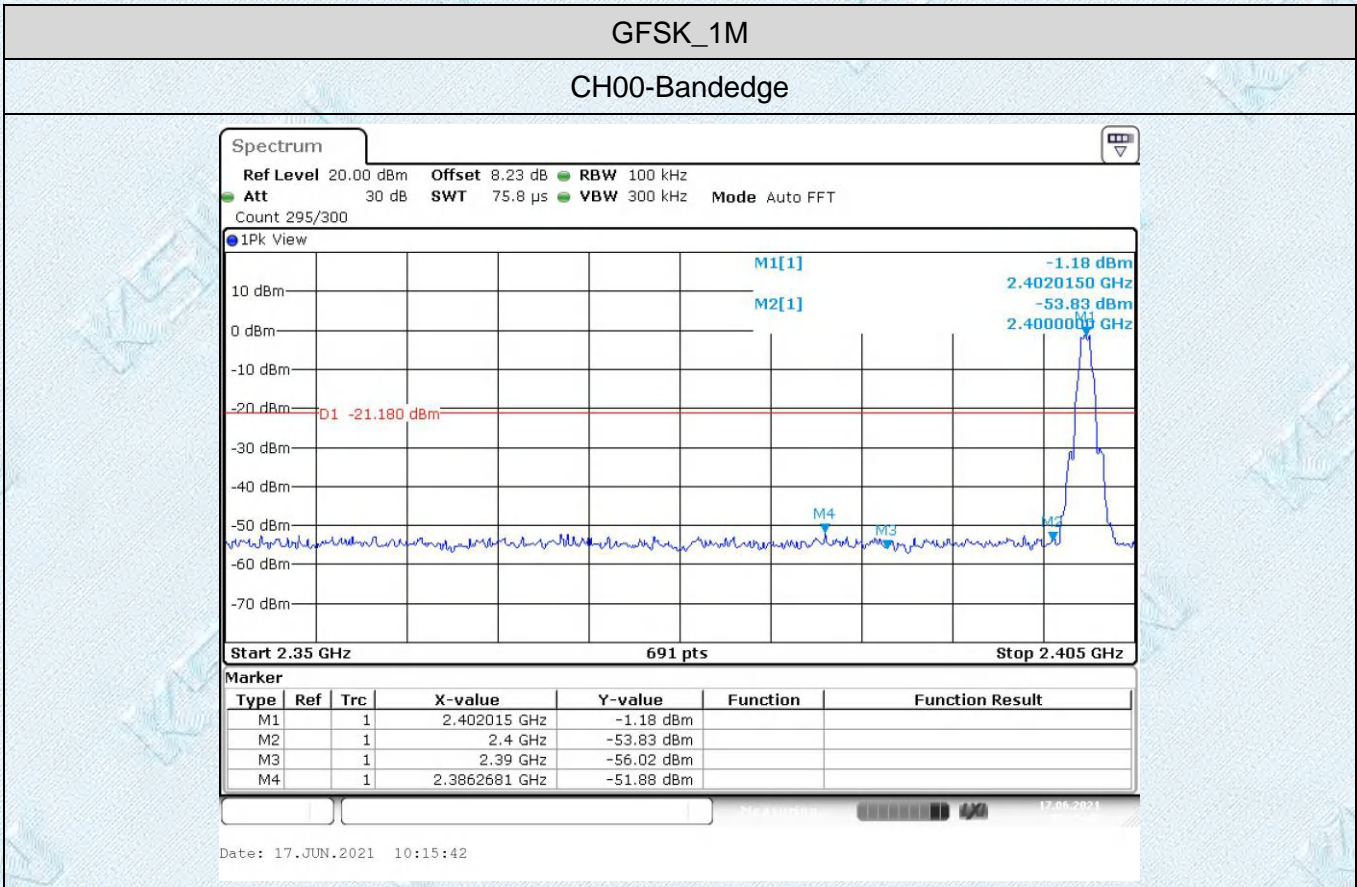



TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

GFSK_1M



CH00-SE

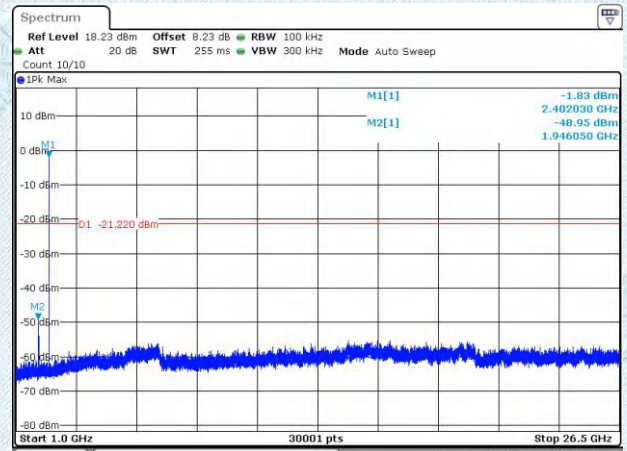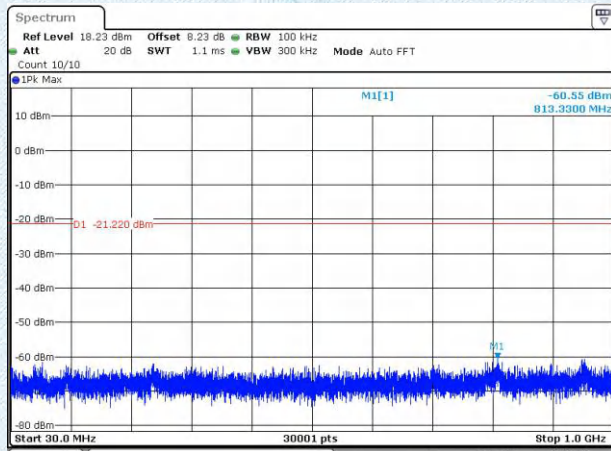

Date: 17 JUN 2021 10:16:46

Date: 17 JUN 2021 10:17:09



CH19-SE

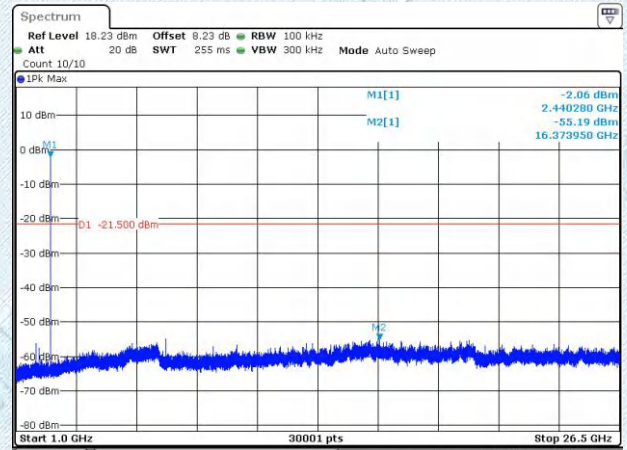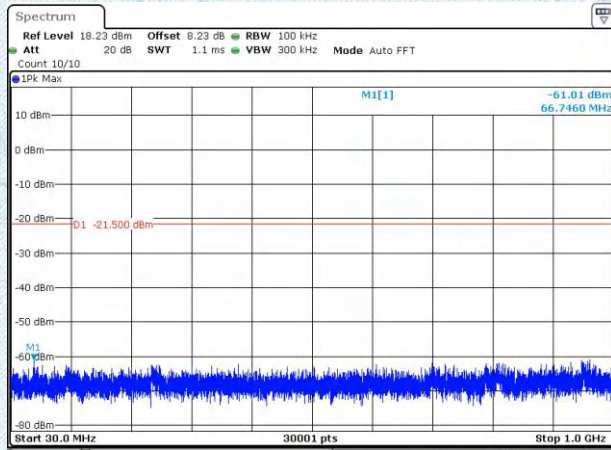

Date: 17 JUN 2021 10:18:46

Date: 17 JUN 2021 10:19:09

CH39-SE

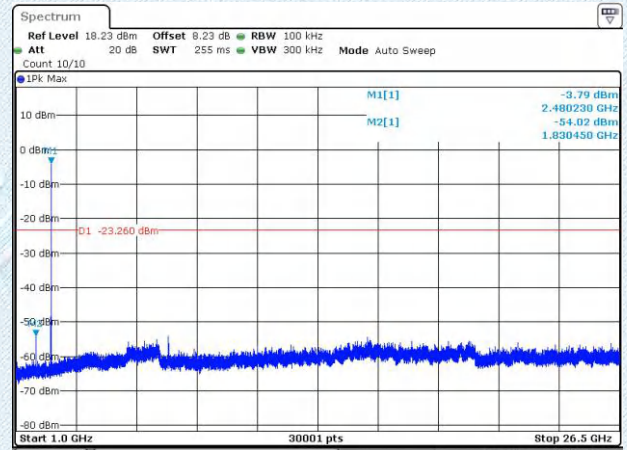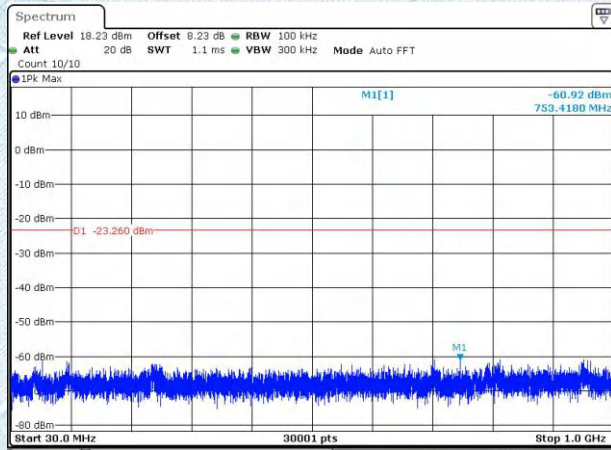

Date: 17 JUN 2021 10:21:30

Date: 17 JUN 2021 10:21:53

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gksign.cn Web: www.gksign.com


3.6. Band Edge Emissions(Radiated)

Limit

| Restricted Frequency Band (MHz) | (dBuV/m)(at 3m) | |
|---------------------------------|-----------------|---------|
| | Peak | Average |
| 2310 ~2390 | 74 | 54 |
| 2483.5 ~2500 | 74 | 54 |

Note: All restriction bands have been tested, only the worst case is reported.

Test Configuration

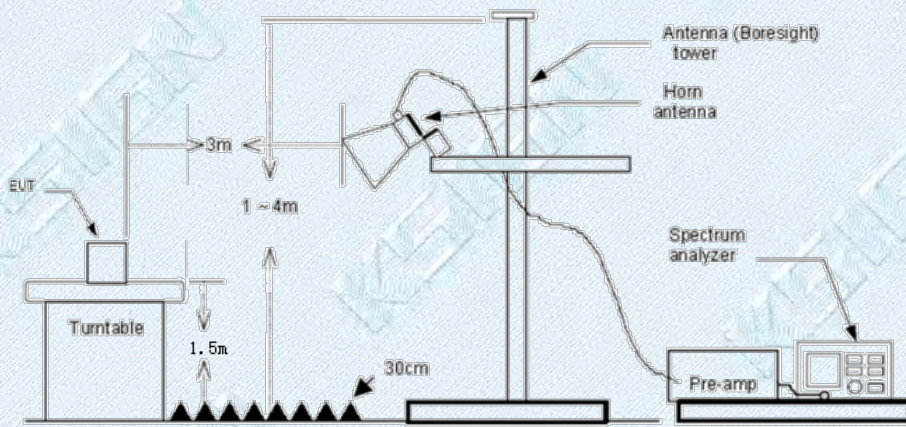

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
 RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.

Test Mode

Please refer to the clause 2.2.

Test Results

Note:


- (1) Measurement = Reading level + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss - Preamplifier Factor
- (3) All modulation modes were tested, and only the worst data of GFSK_1M was recorded in the report.

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com


| | |
|---------------------|---------------------|
| Test Voltage | DC 12.8V |
| Ant. Pol.: | Horizontal |
| Test Mode: | TX BLE Mode 2402MHz |

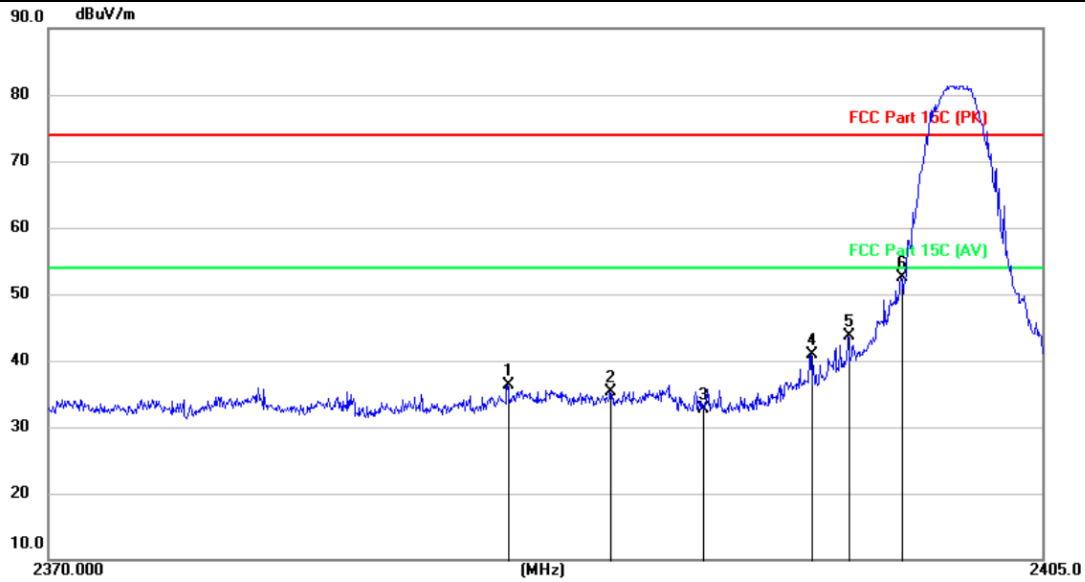


| No. | Mk. | Freq. MHz | Reading Level (dBuV) | Correct Factor (dB/m) | Measure- ment (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector |
|-----|-----|--------------|----------------------------|-----------------------------|------------------------------|-------------------|--------------|----------|
| 1 | | 2386.139 | 47.16 | -10.92 | 36.24 | 74.00 | -37.76 | peak |
| 2 | | 2389.729 | 46.27 | -10.92 | 35.35 | 74.00 | -38.65 | peak |
| 3 | | 2393.000 | 43.60 | -10.92 | 32.68 | 74.00 | -41.32 | peak |
| 4 | | 2396.803 | 51.80 | -10.92 | 40.88 | 74.00 | -33.12 | peak |
| 5 | | 2398.140 | 54.56 | -10.92 | 43.64 | 74.00 | -30.36 | peak |
| 6 | * | 2400.000 | 63.46 | -10.92 | 52.54 | 74.00 | -21.46 | peak |

Emission Level= Read Level+ Correct Factor

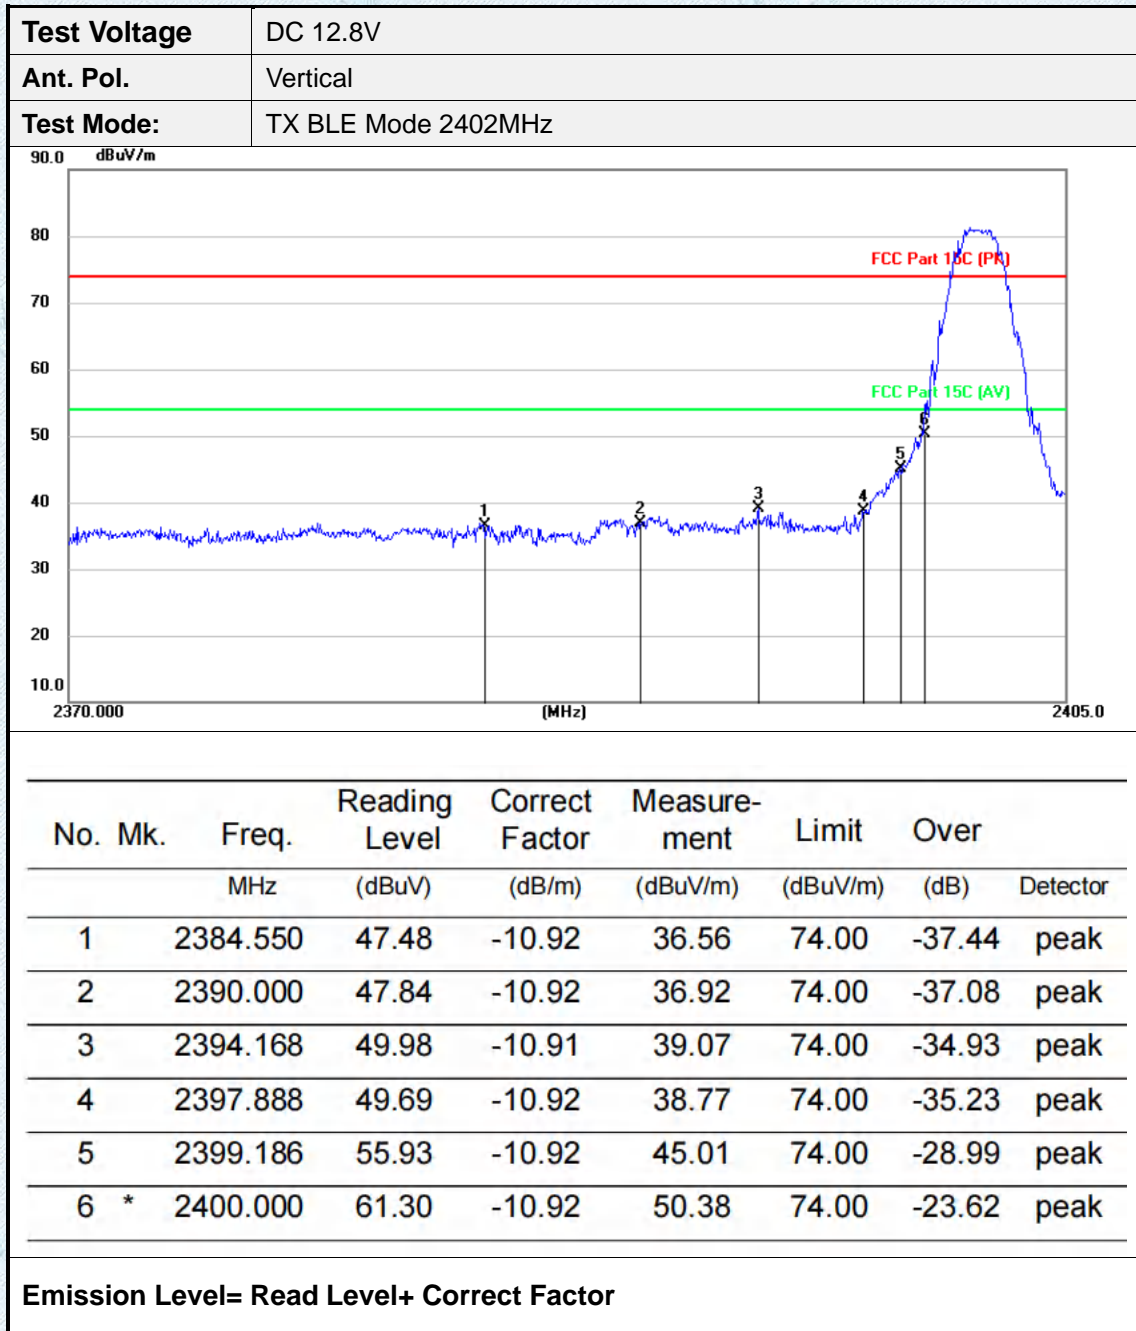

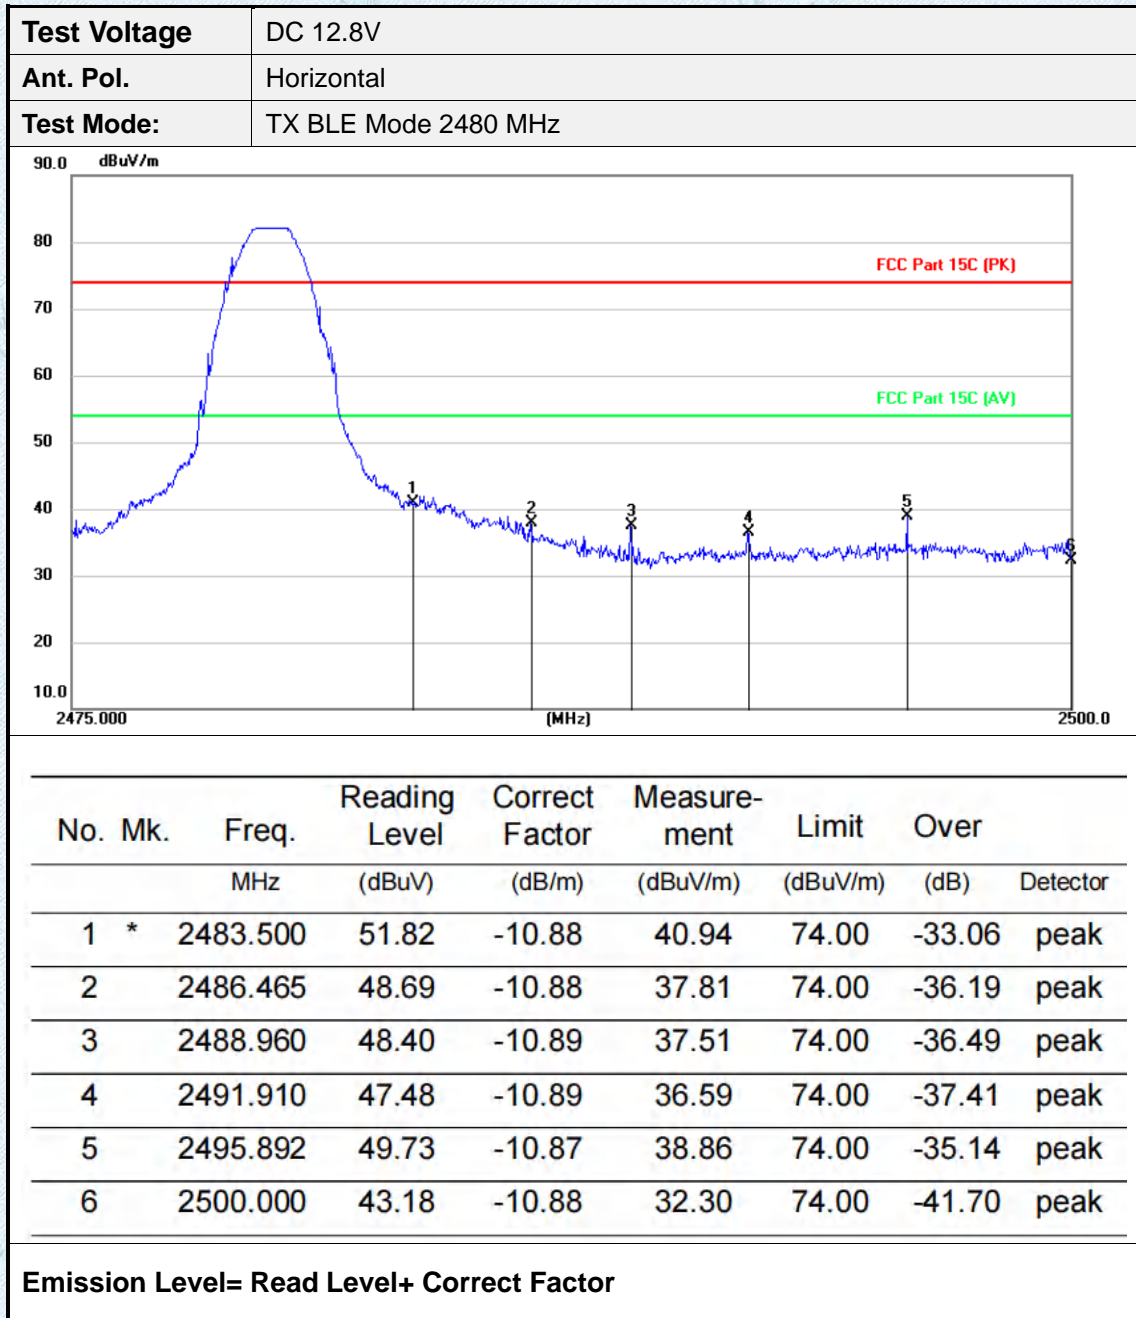

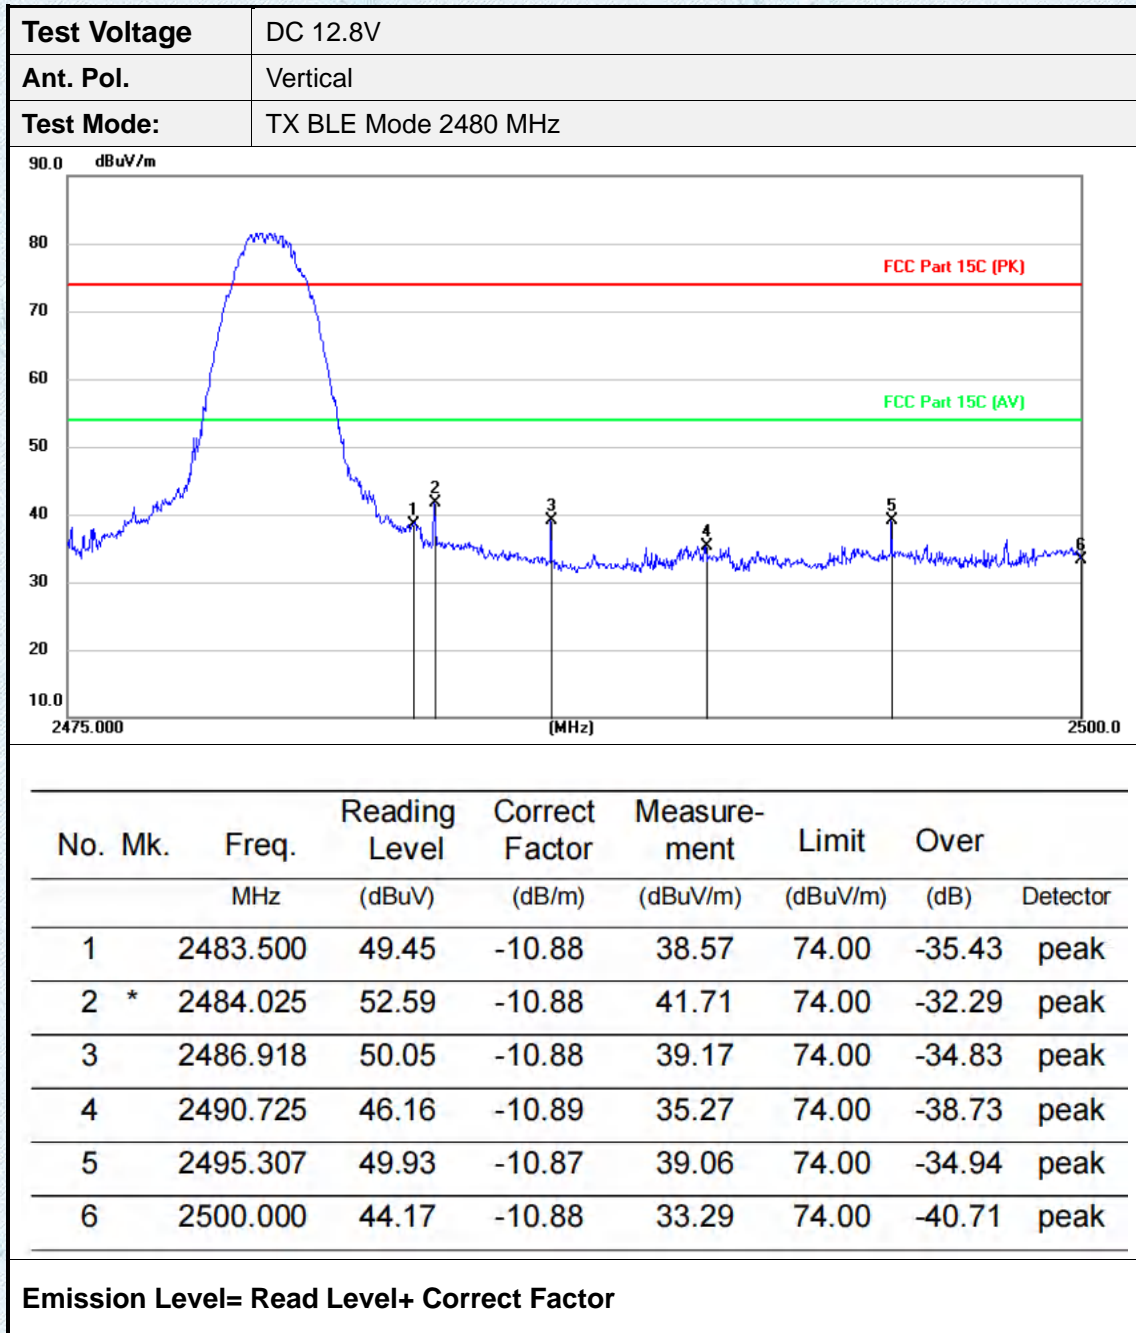

3.7. Spurious Emission (Radiated)

Limit

Radiated Emission Limits (9 kHz~1000 MHz)

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |


Radiated Emission Limit (Above 1000MHz)

| Frequency (MHz) | Distance Meters(at 3m) | |
|-----------------|------------------------|---------|
| | Peak | Average |
| Above 1000 | 74 | 54 |


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

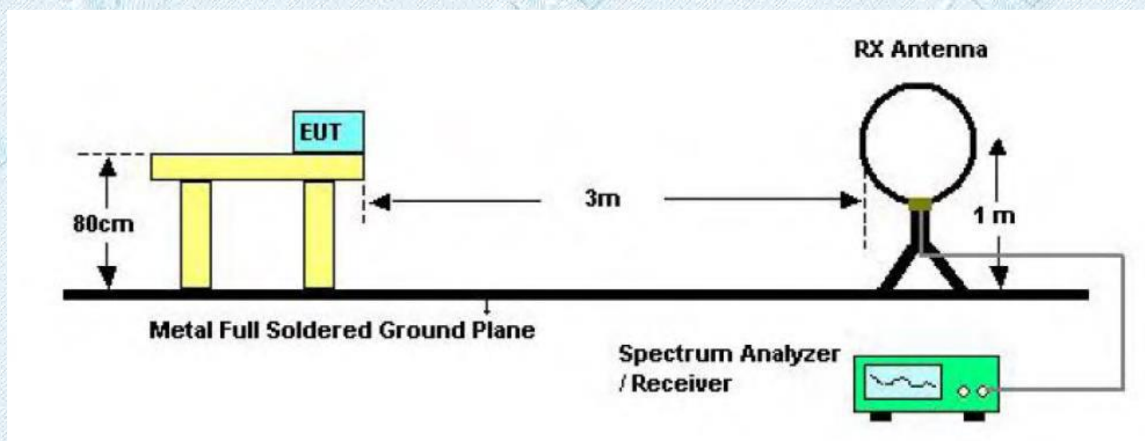

Below 30MHz Test Setup

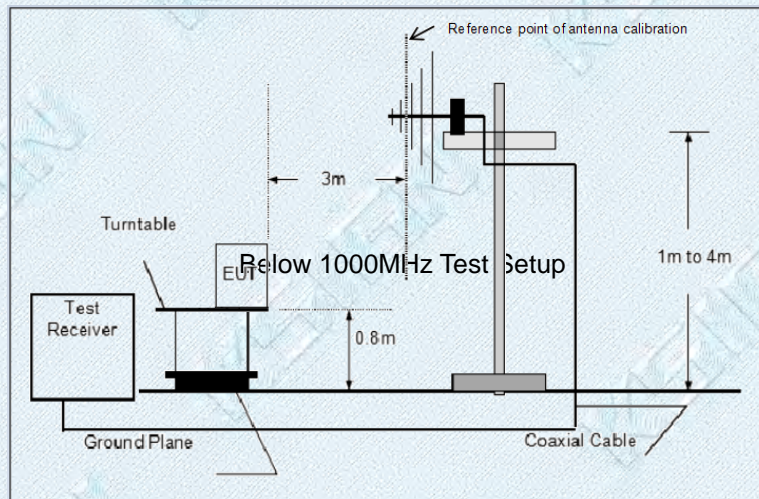

Below 1000MHz Test Setup

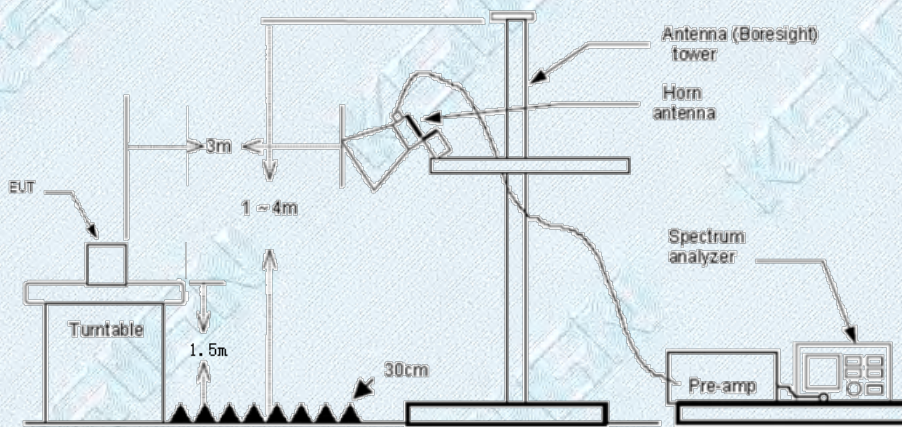

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

- (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=10Hz Peak detector for Peak value.

Test Mode

Please refer to the clause 2.2.

Test Result**9 KHz~30 MHz and 18GHz~25GHz**

From 9 KHz~30 MHz and 18GHz~25GHz: Conclusion: PASS


Note:


- 1) Measurement = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5) Pre-scan CH00, CH19 and CH39 modulation, and found the GFSK_1M_CH00 which it is worse case for 30MHz-1GHz , So only show the test data for worse case.

BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

30MHz-1GHz

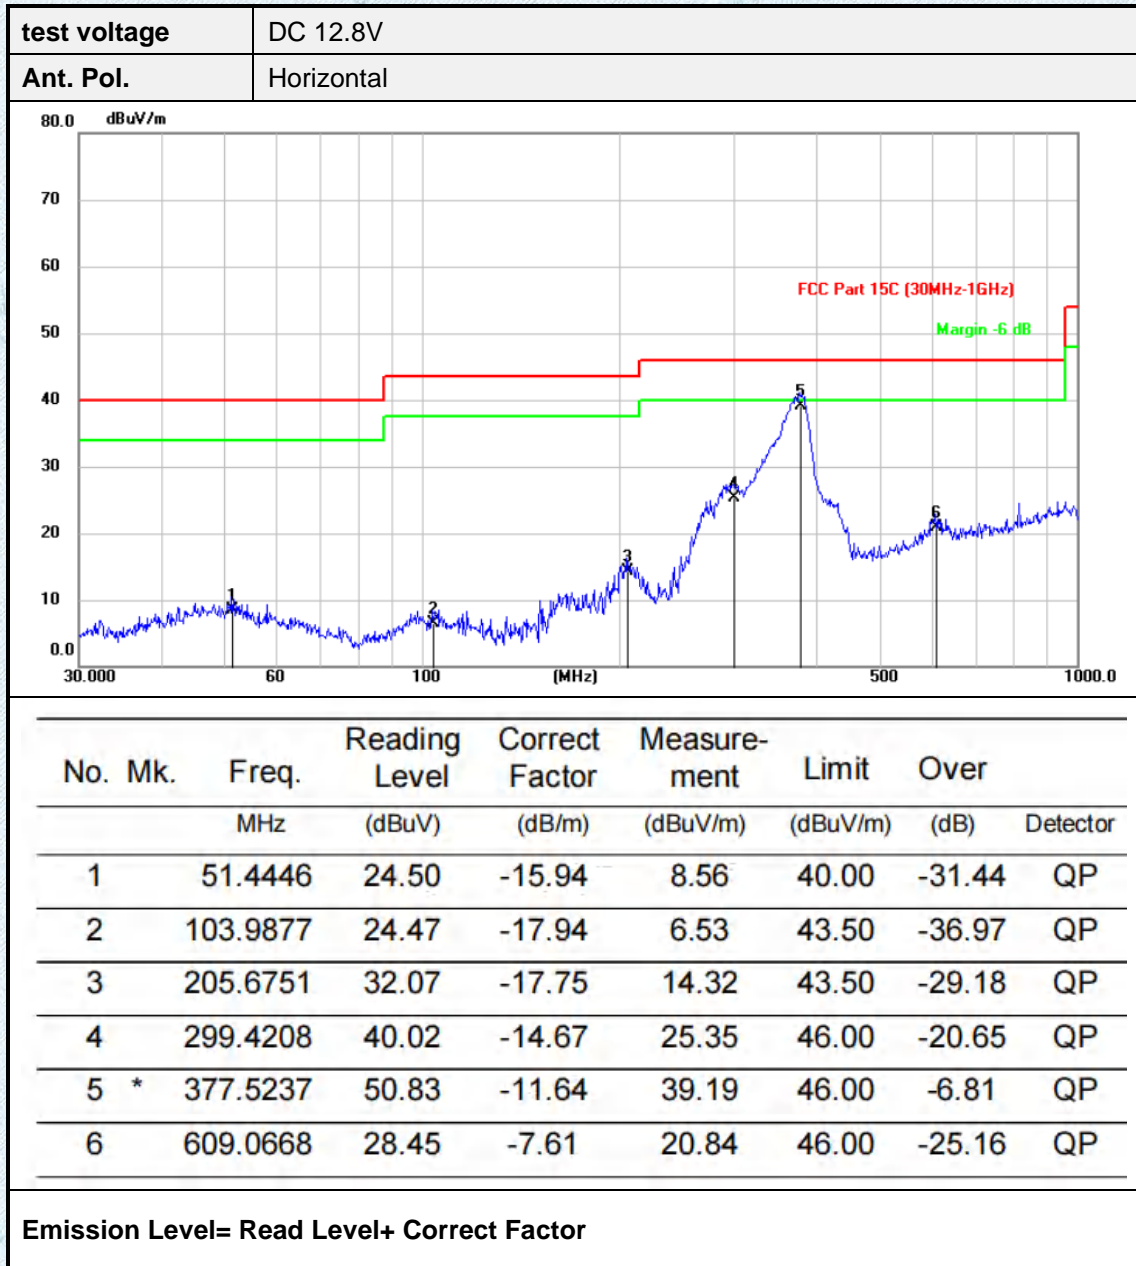

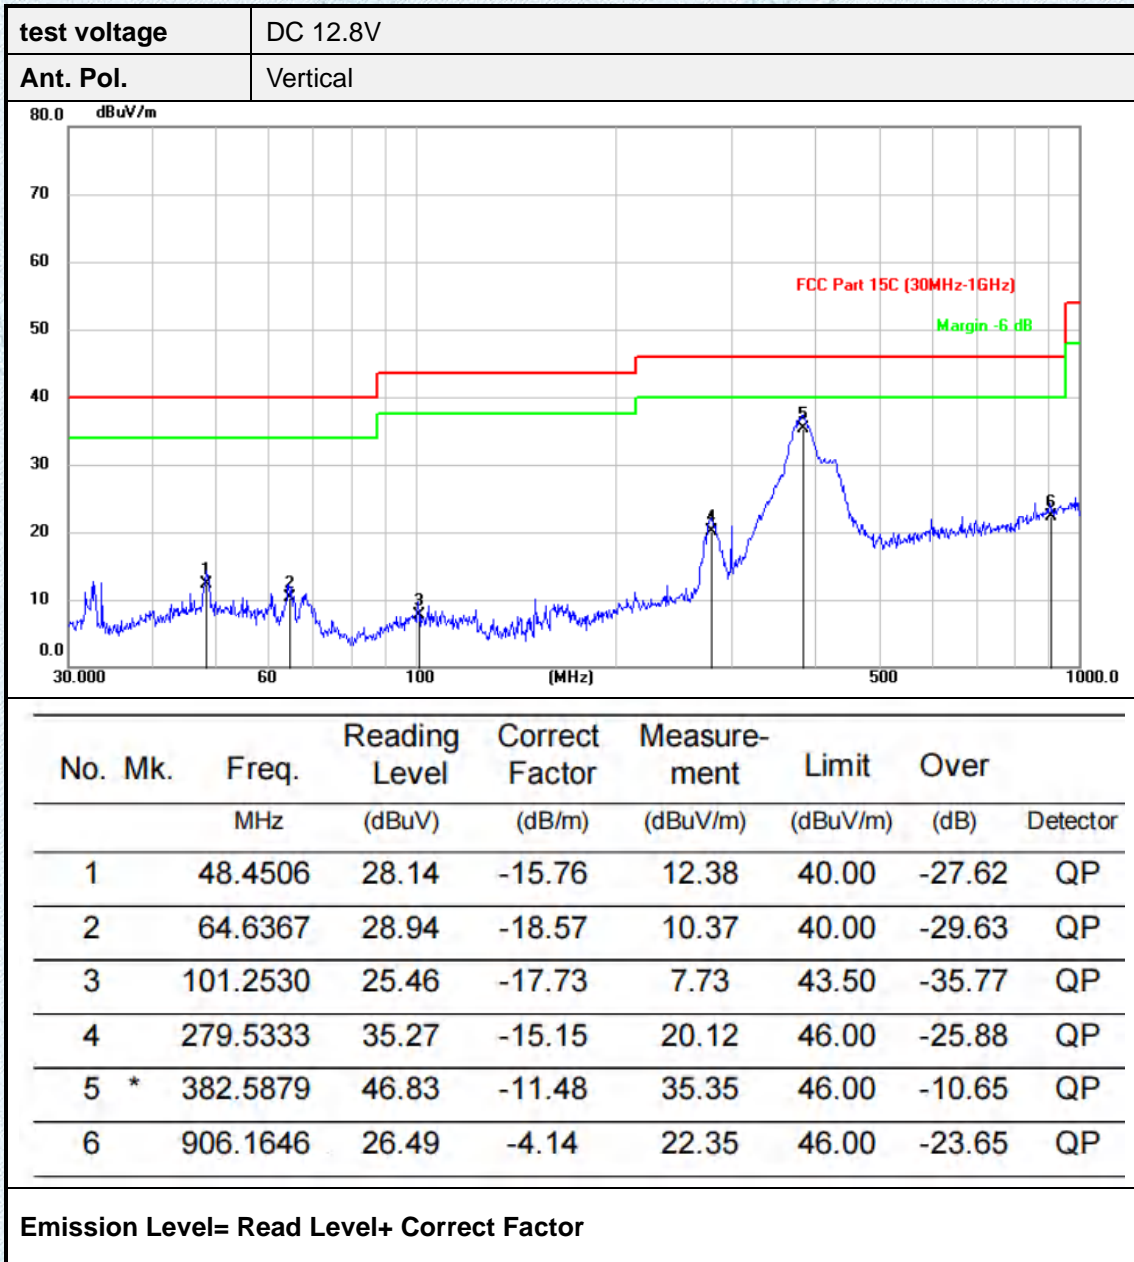


TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gksign.cn Web: www.gksign.com


Adobe 1GHz


| | |
|--------------|---------------------|
| test voltage | DC 12.8V |
| Ant. Pol. | Horizontal |
| Test Mode: | TX BLE Mode 2402MHz |

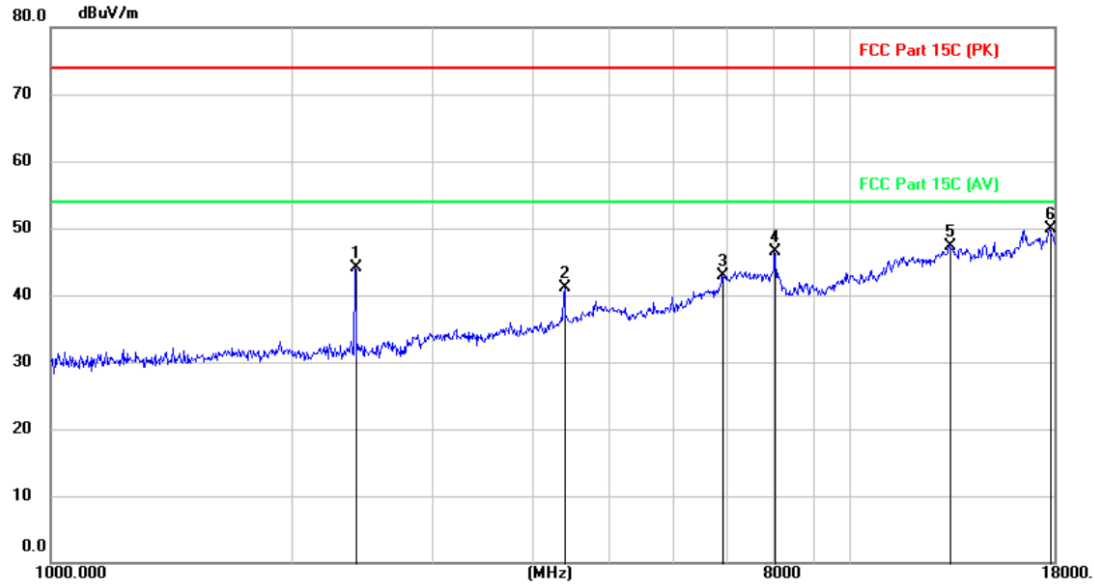



| No. | Mk. | Freq. MHz | Reading Level (dBuV) | Correct Factor (dB/m) | Measure- ment (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector |
|-----|-----|--------------|----------------------------|-----------------------------|------------------------------|-------------------|--------------|----------|
| 1 | | 2402.500 | 54.99 | -10.91 | 44.08 | 74.00 | -29.92 | peak |
| 2 | | 4396.600 | 48.14 | -7.10 | 41.04 | 74.00 | -32.96 | peak |
| 3 | | 6927.900 | 43.89 | -0.92 | 42.97 | 74.00 | -31.03 | peak |
| 4 | | 8049.900 | 44.40 | 2.06 | 46.46 | 74.00 | -27.54 | peak |
| 5 | | 13321.600 | 37.03 | 10.37 | 47.40 | 74.00 | -26.60 | peak |
| 6 | * | 17784.100 | 36.37 | 13.52 | 49.89 | 74.00 | -24.11 | peak |


Emission Level= Read Level+ Correct Factor

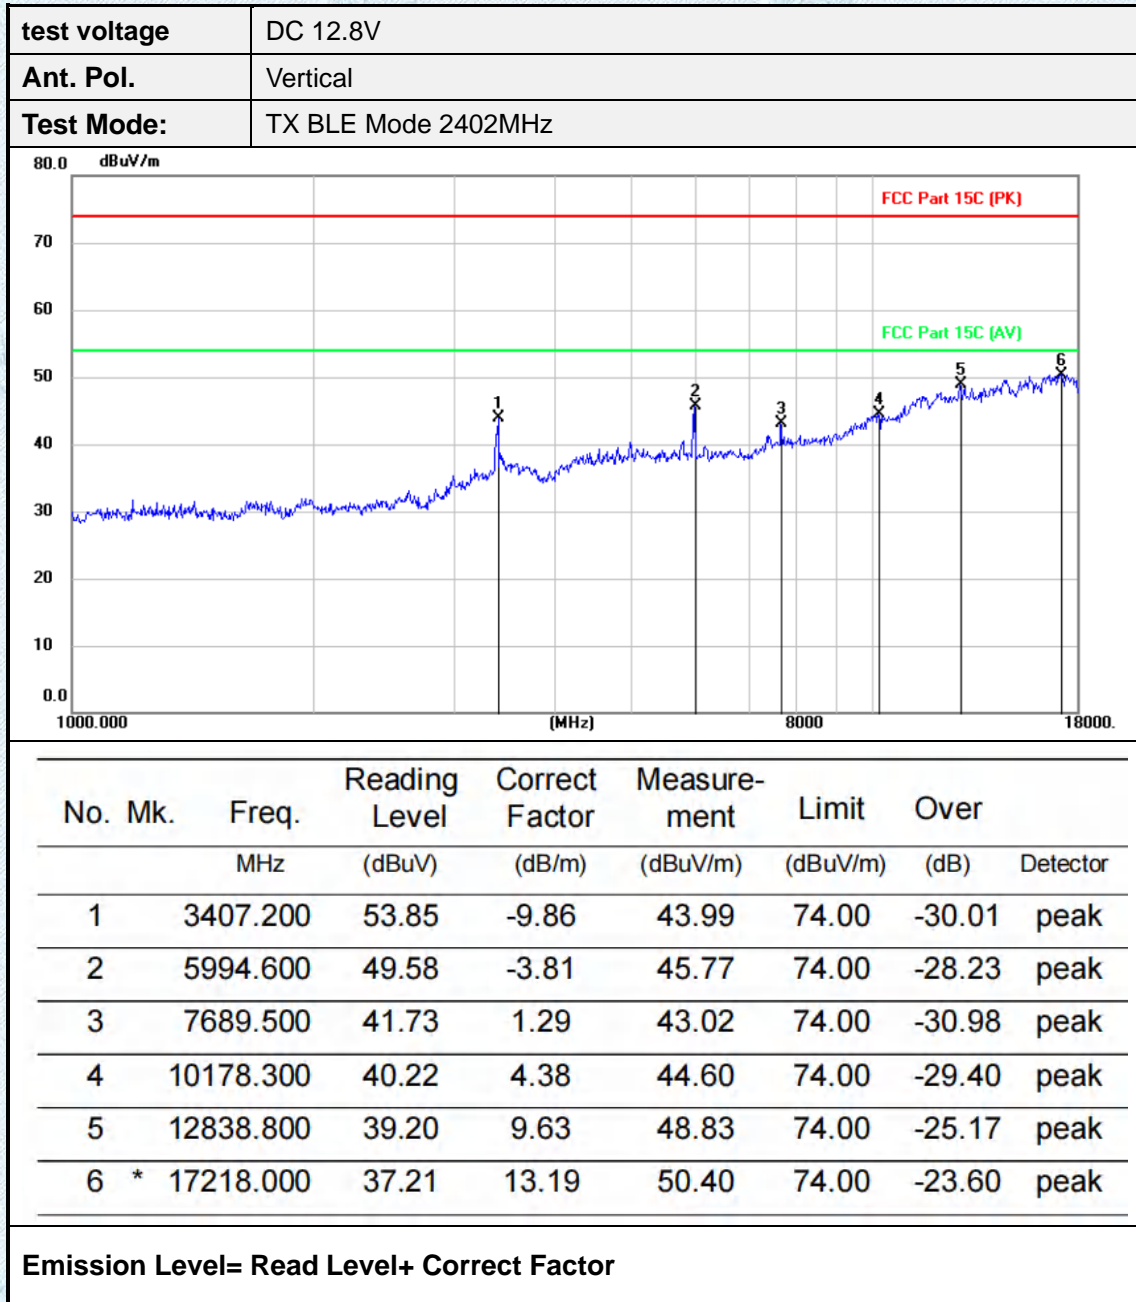

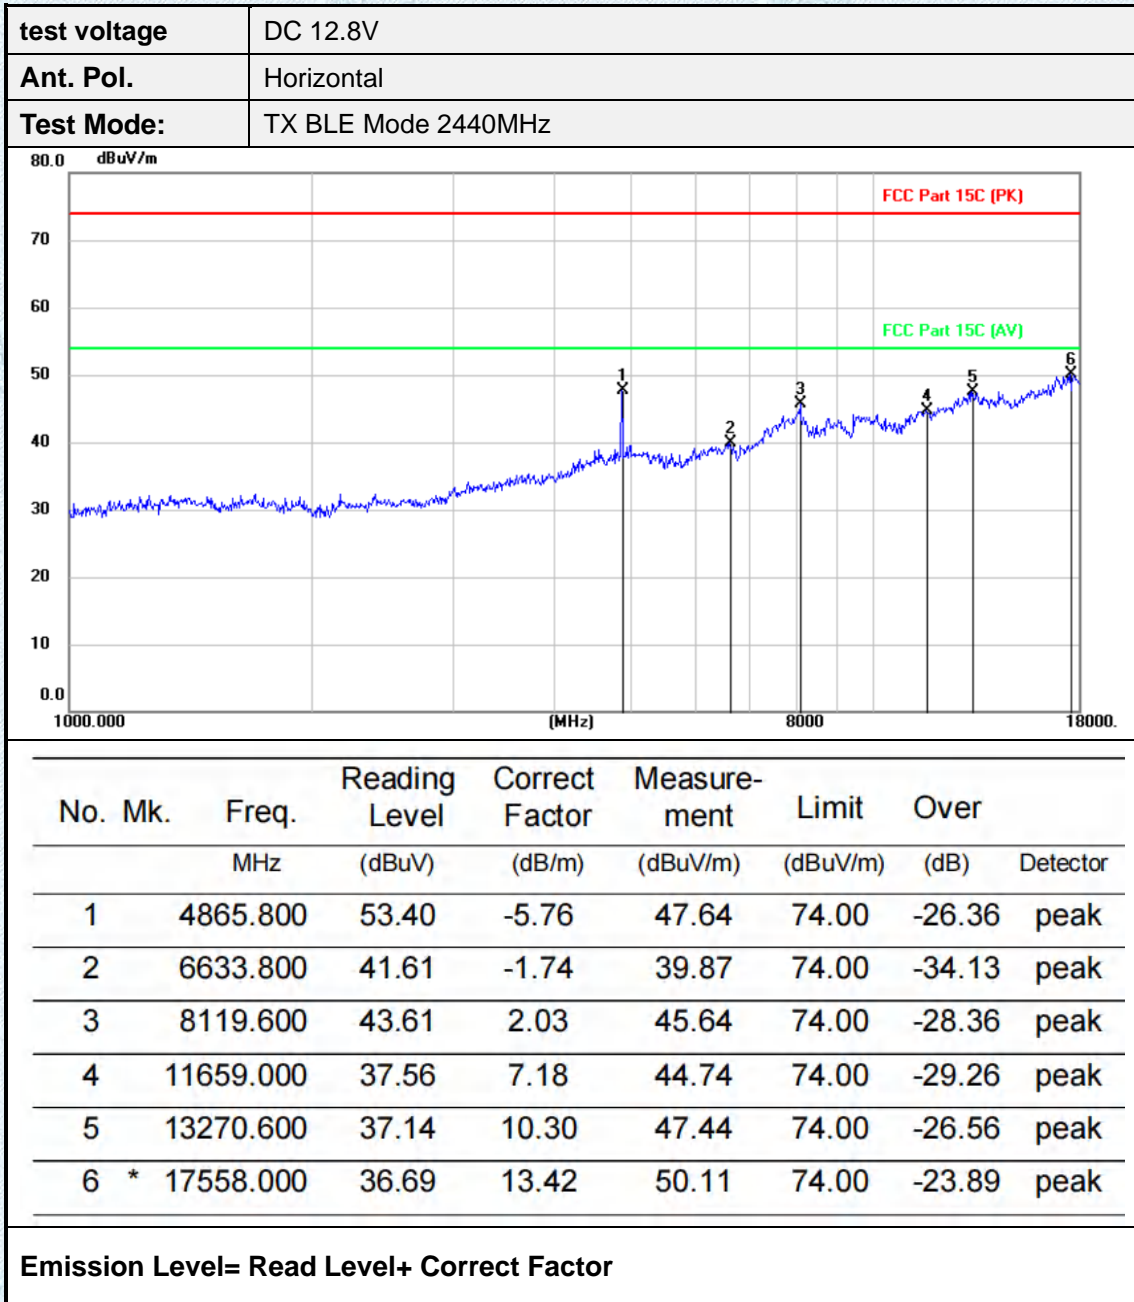

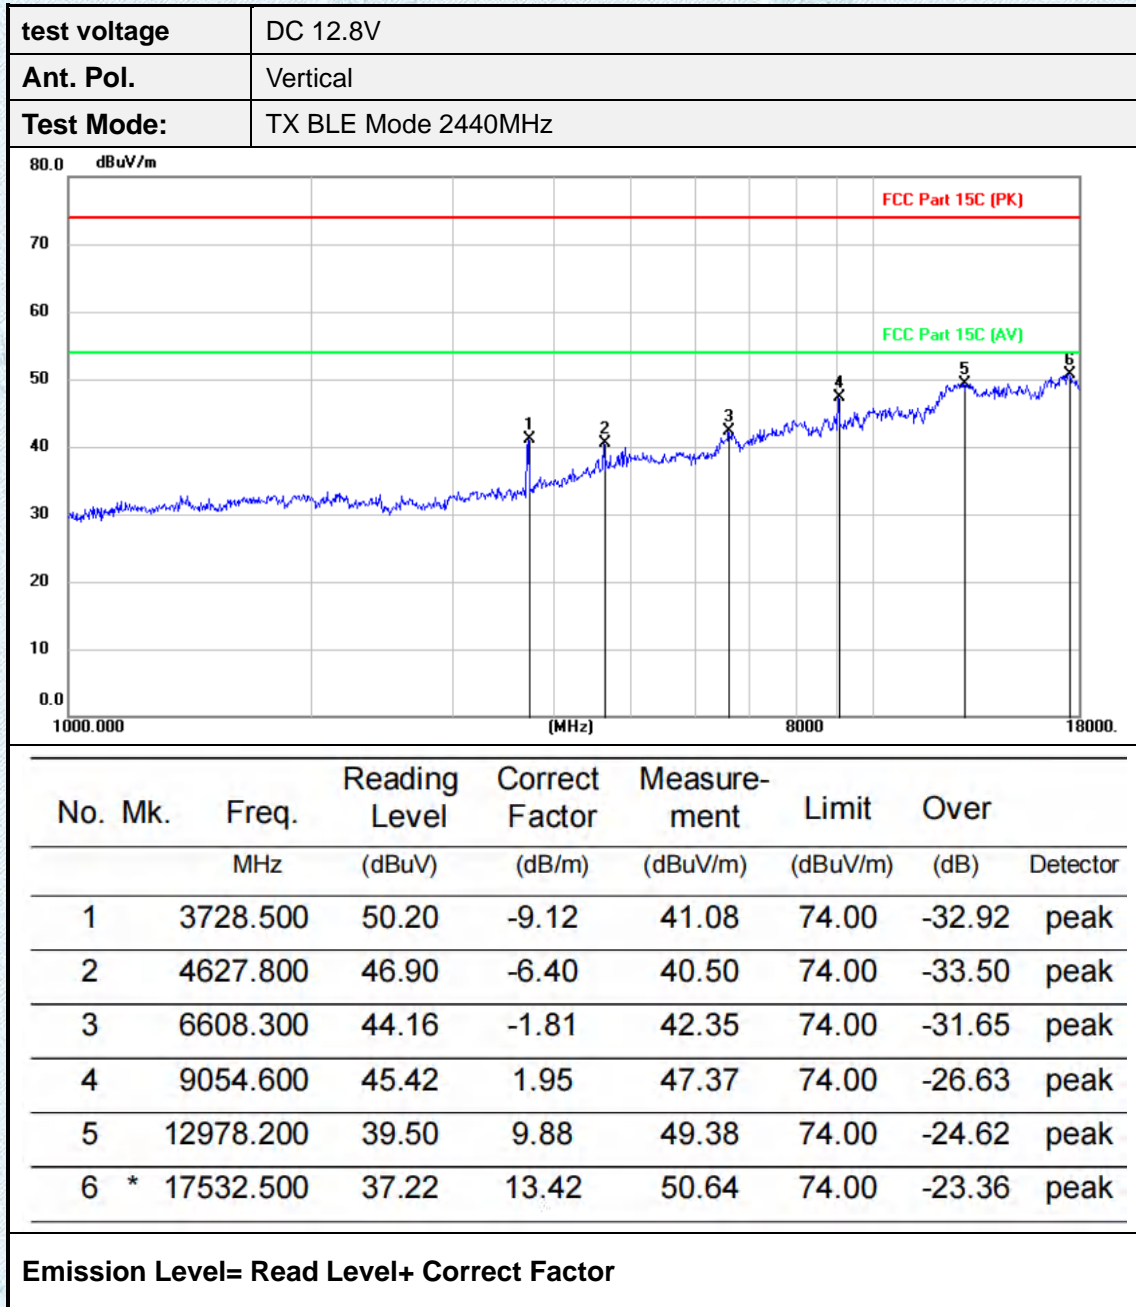

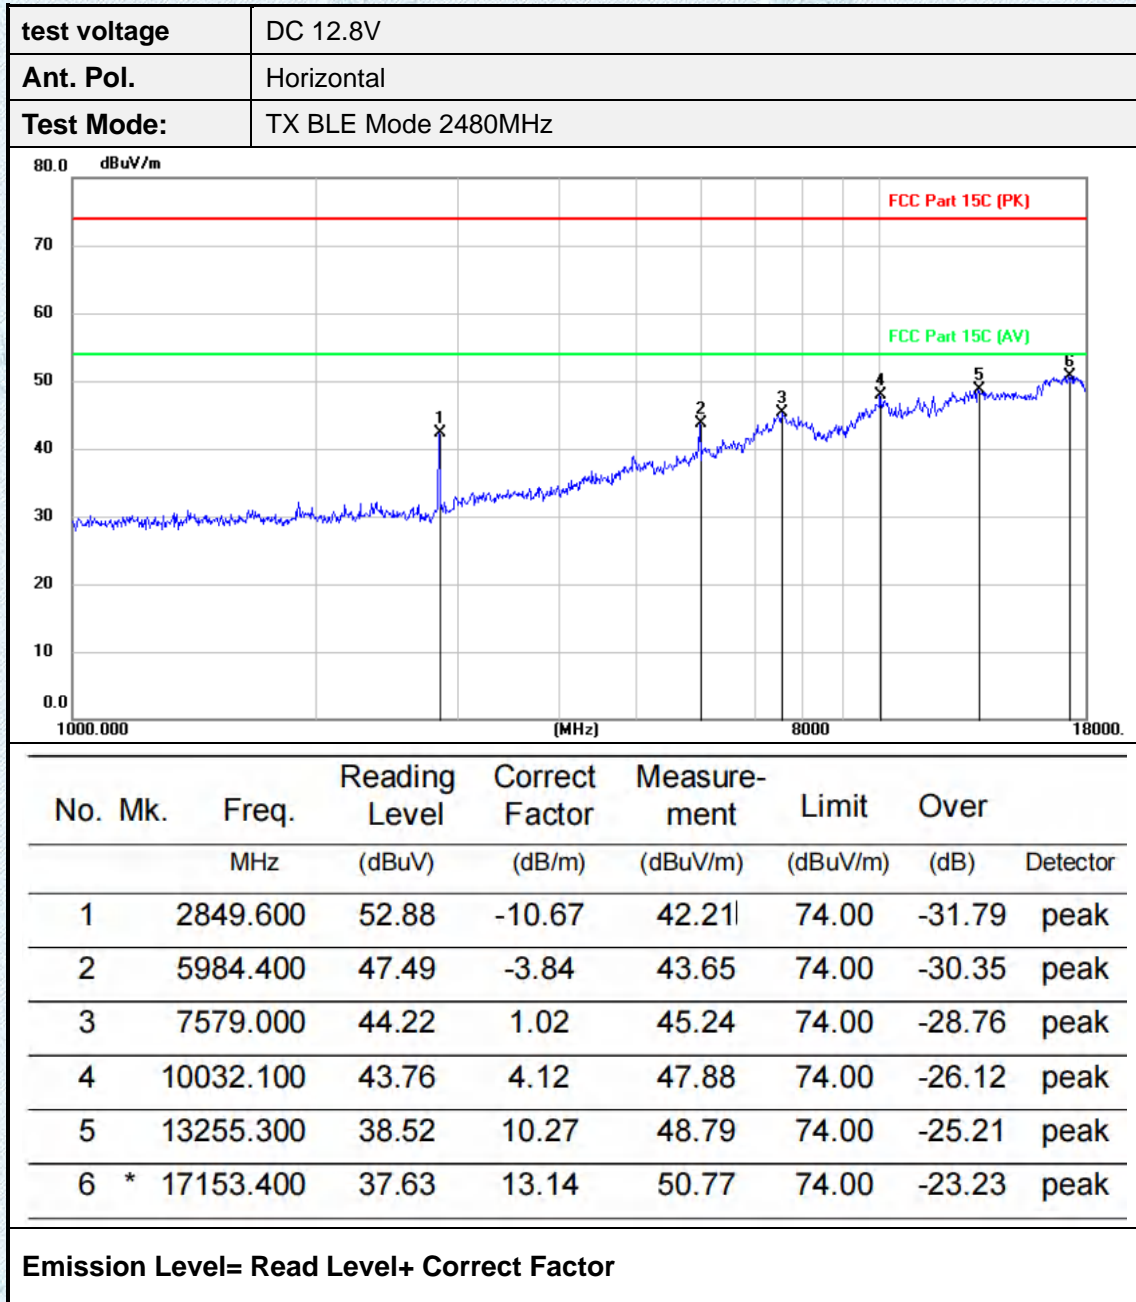

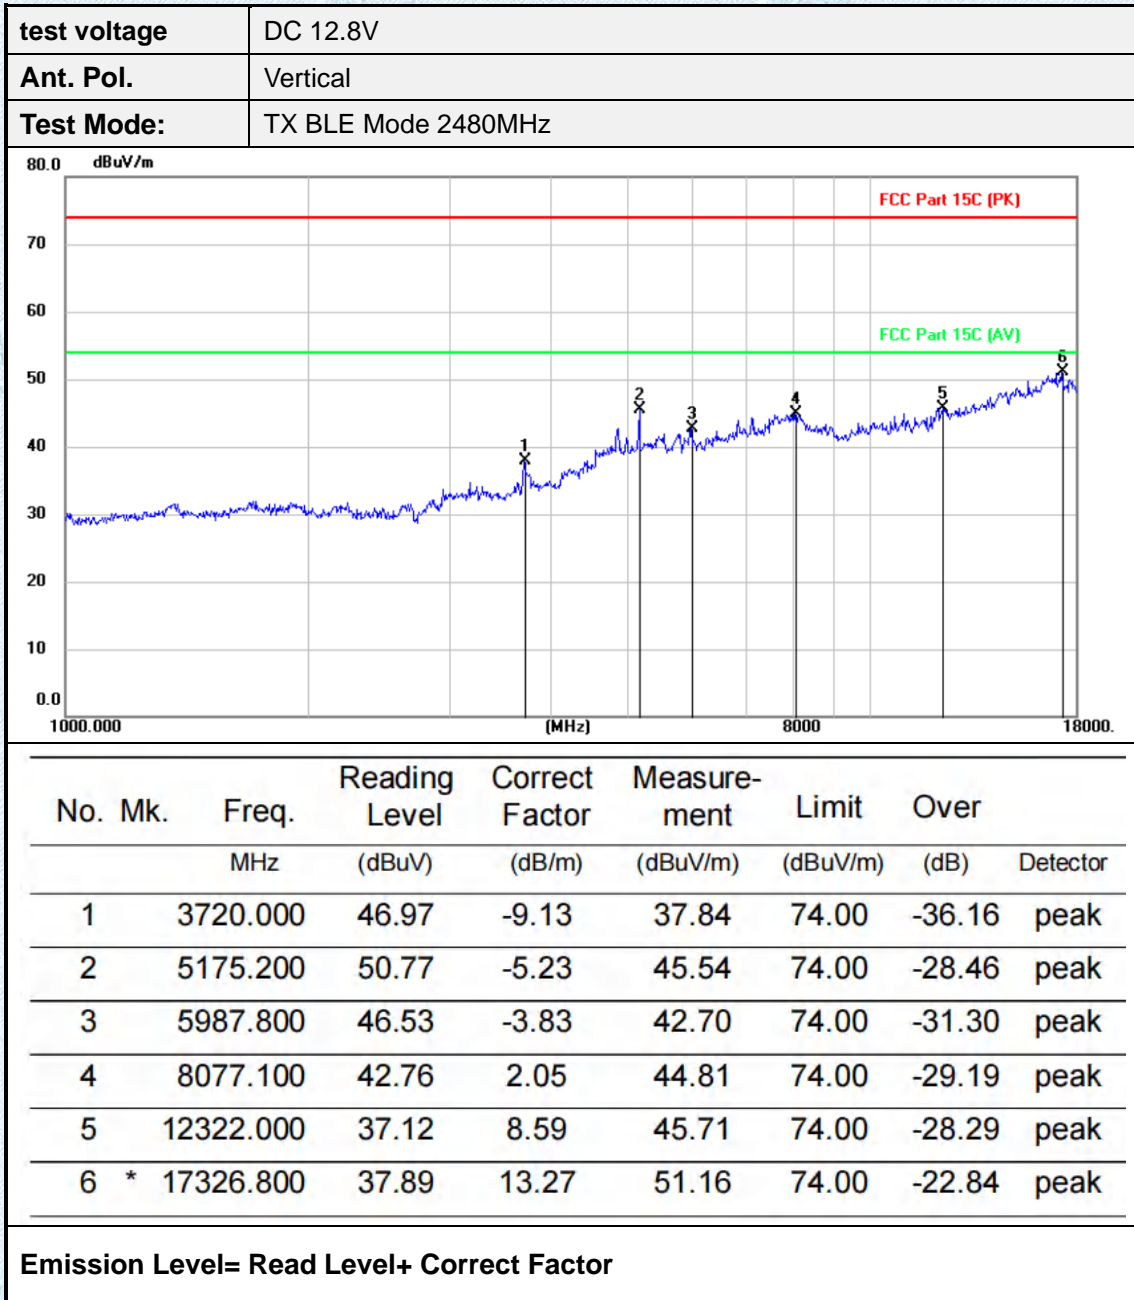

3.8. Conducted Emission

Limit


Conducted Emission Test Limit

| Frequency | Maximum RF Line Voltage (dB μ V) | |
|---------------|--------------------------------------|---------------|
| | Quasi-peak Level | Average Level |
| 150kHz~500kHz | 66 ~ 56 * | 56 ~ 46 * |
| 500kHz~5MHz | 56 | 46 |
| 5MHz~30MHz | 60 | 50 |

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

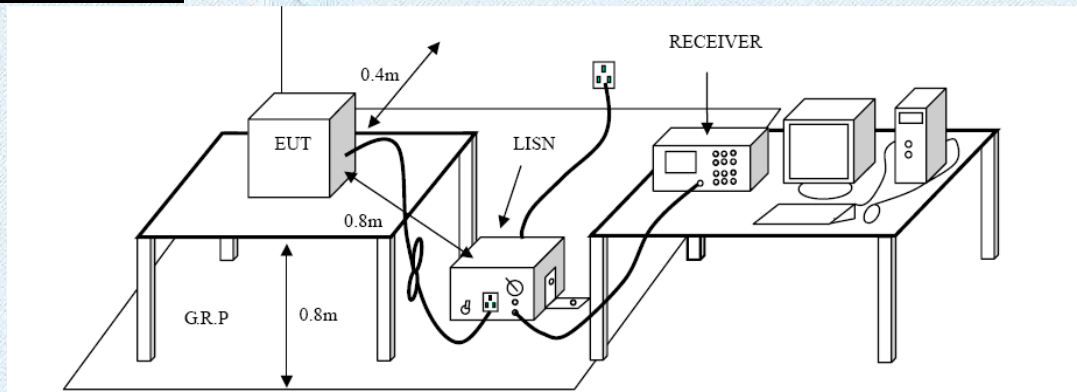

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode:

Please refer to the clause 2.2.

Test Results

N/A


The product is dry battery power supply

4.EUT TEST PHOTOS



Radiated Measurement (Below 1GHz)



Radiated Measurement (Above 1GHz)

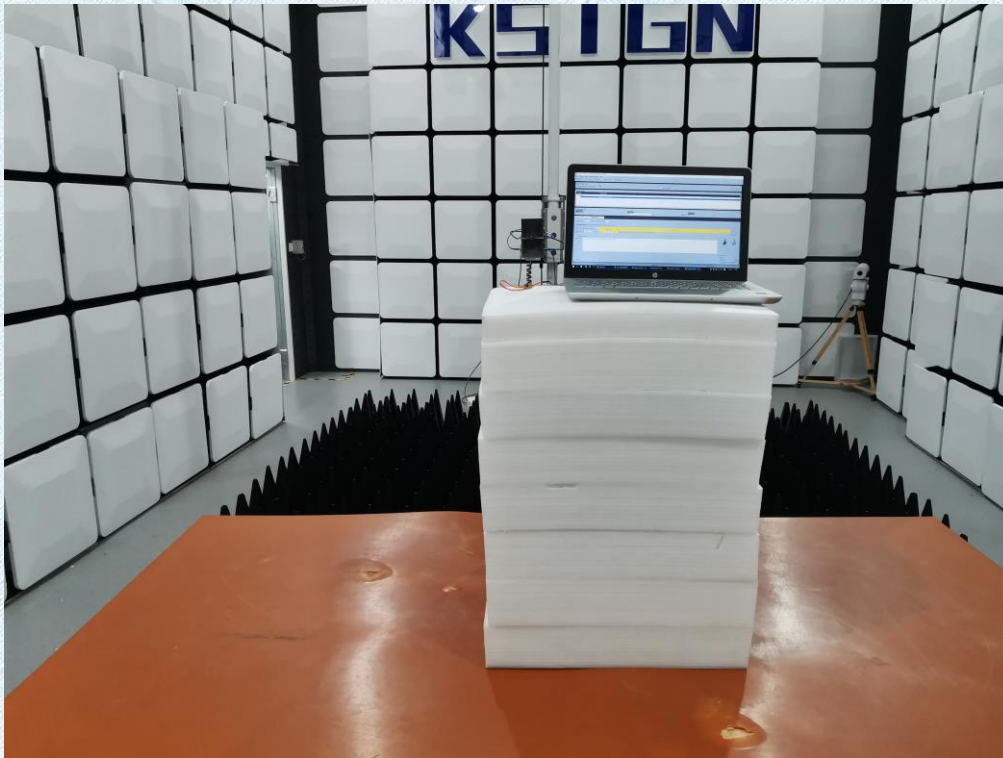




RF Conducted

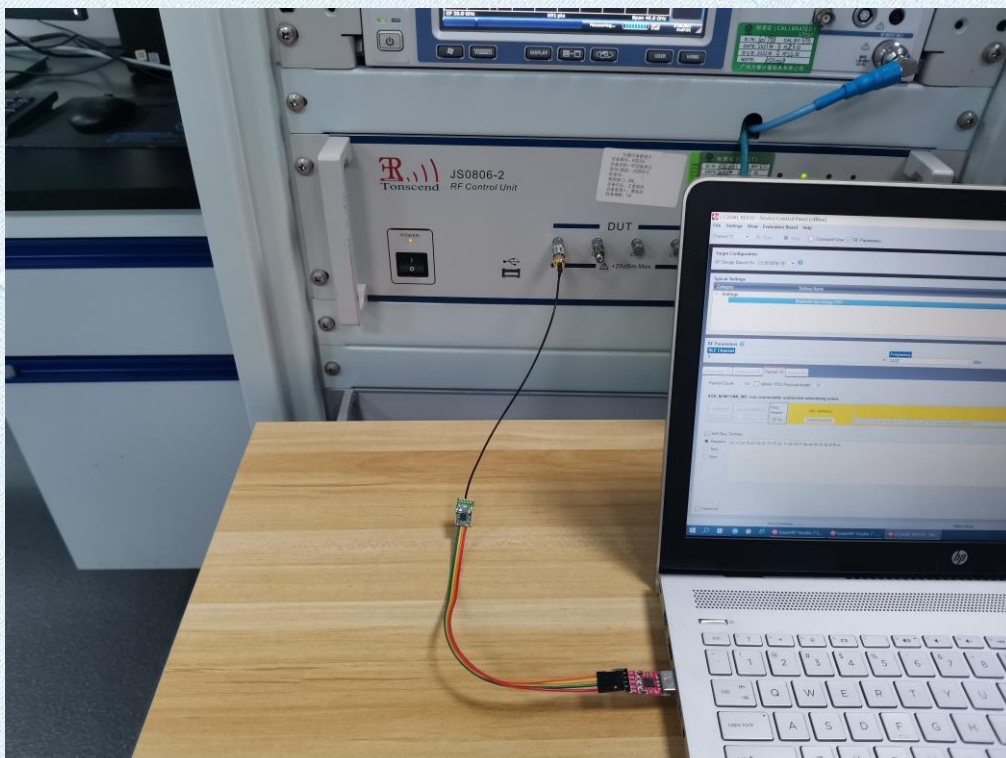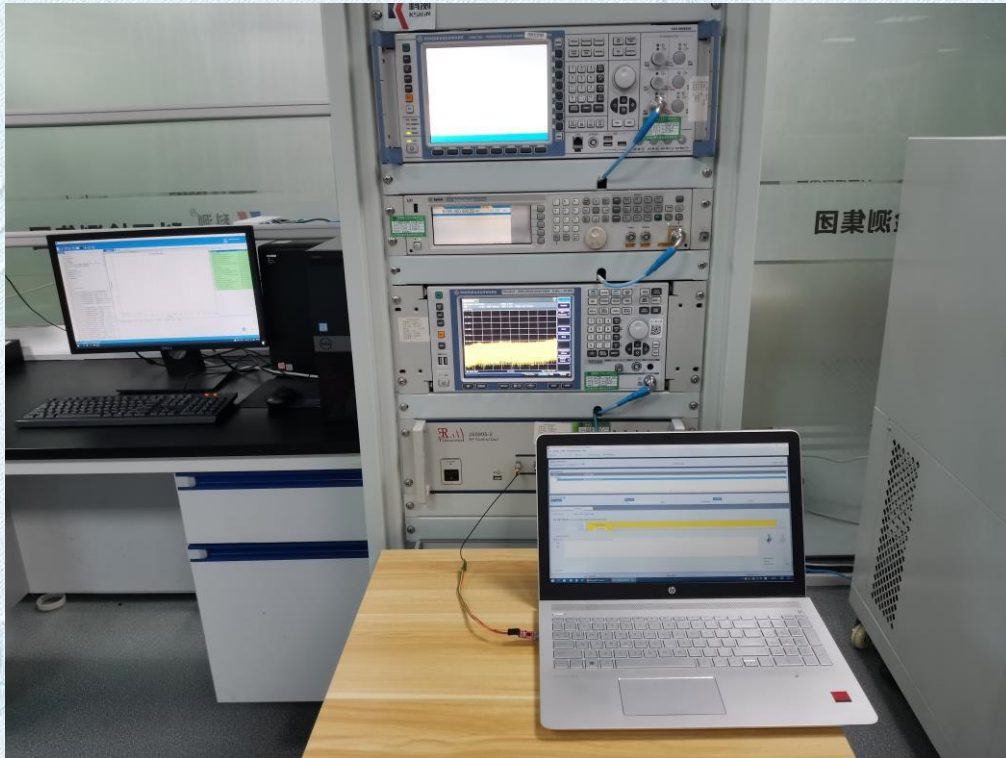

5.PHOTOGRAPHS OF EUT CONSTRUCTIONAL

External Photographs

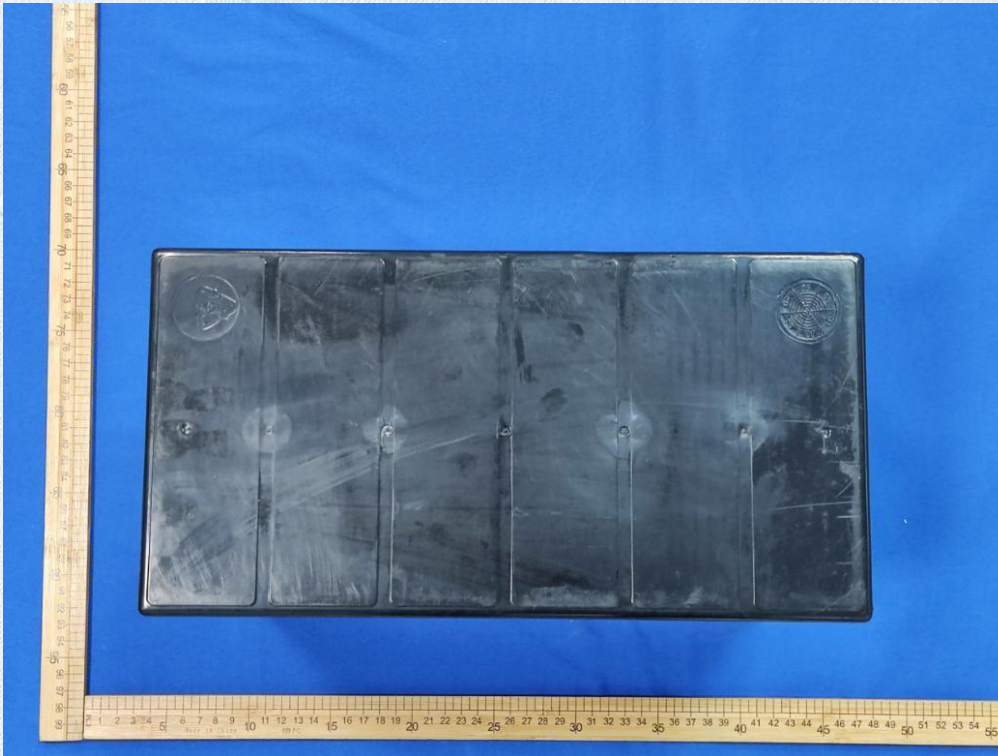

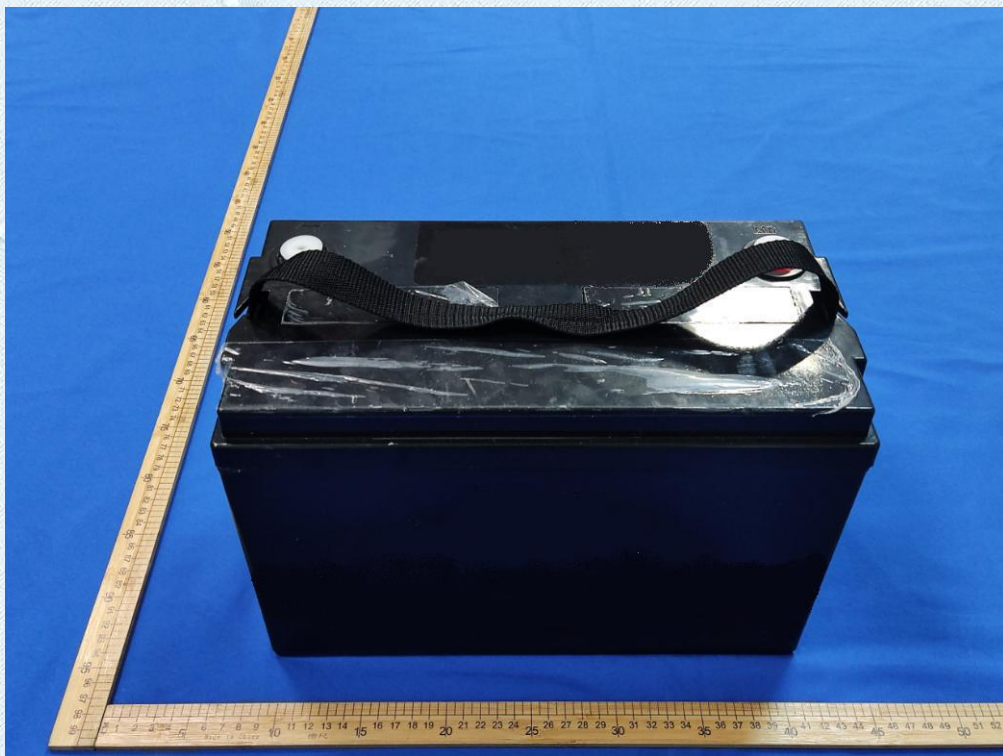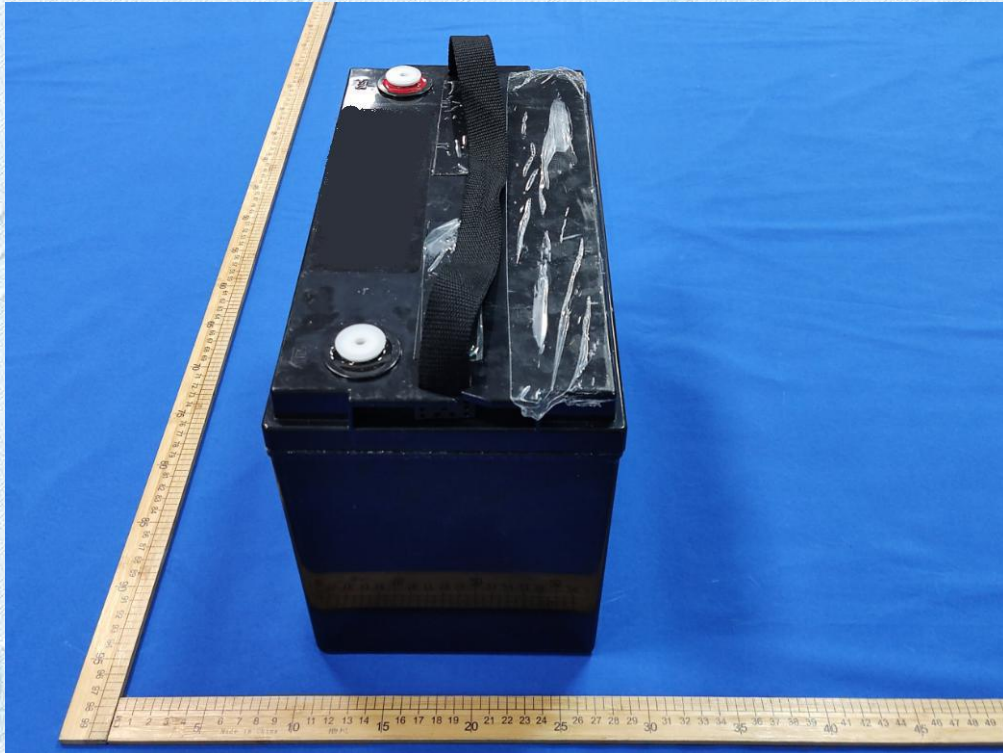

TRF No. FCC Part 15.247_R1



Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gksign.cn Web: www.gksign.com






Internal photos



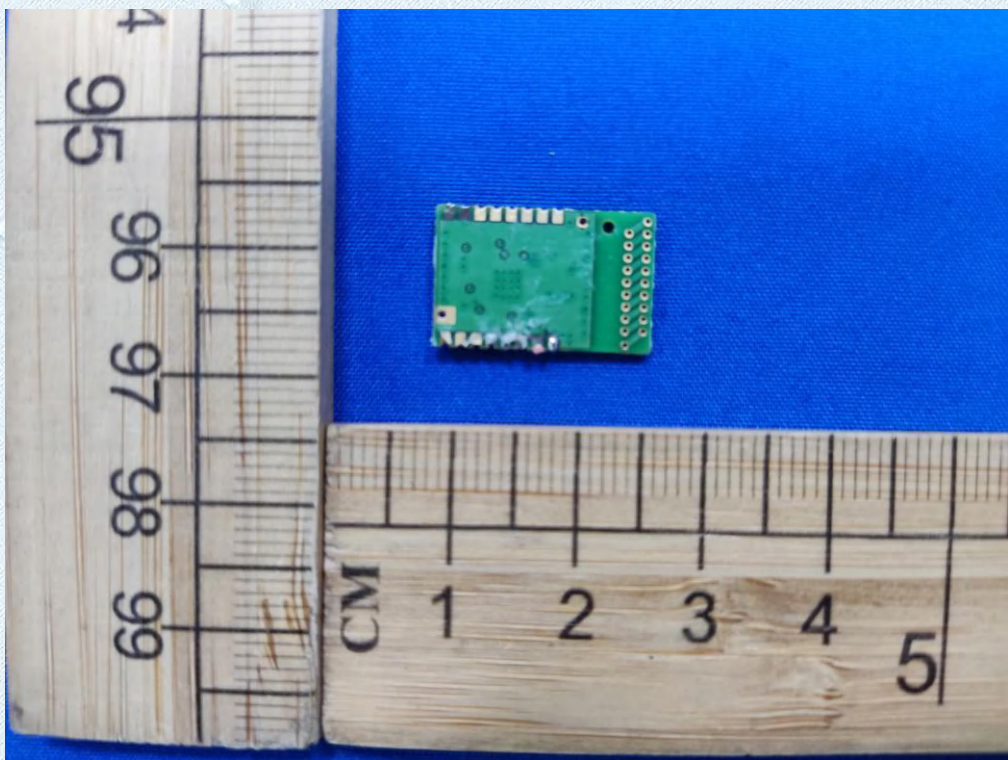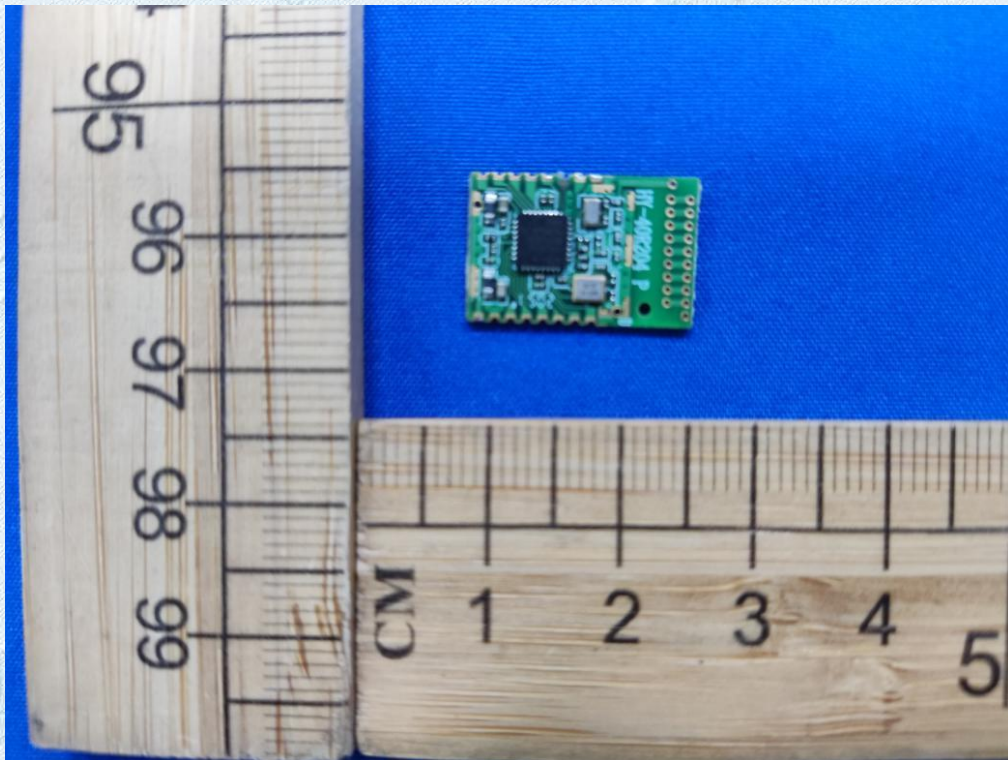

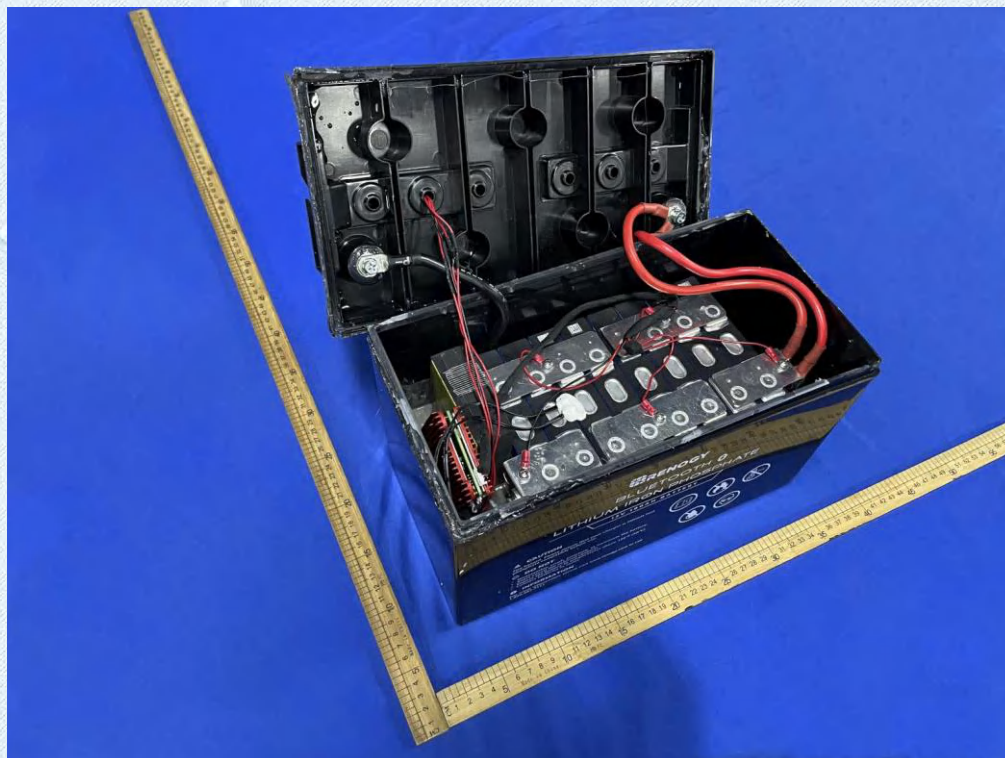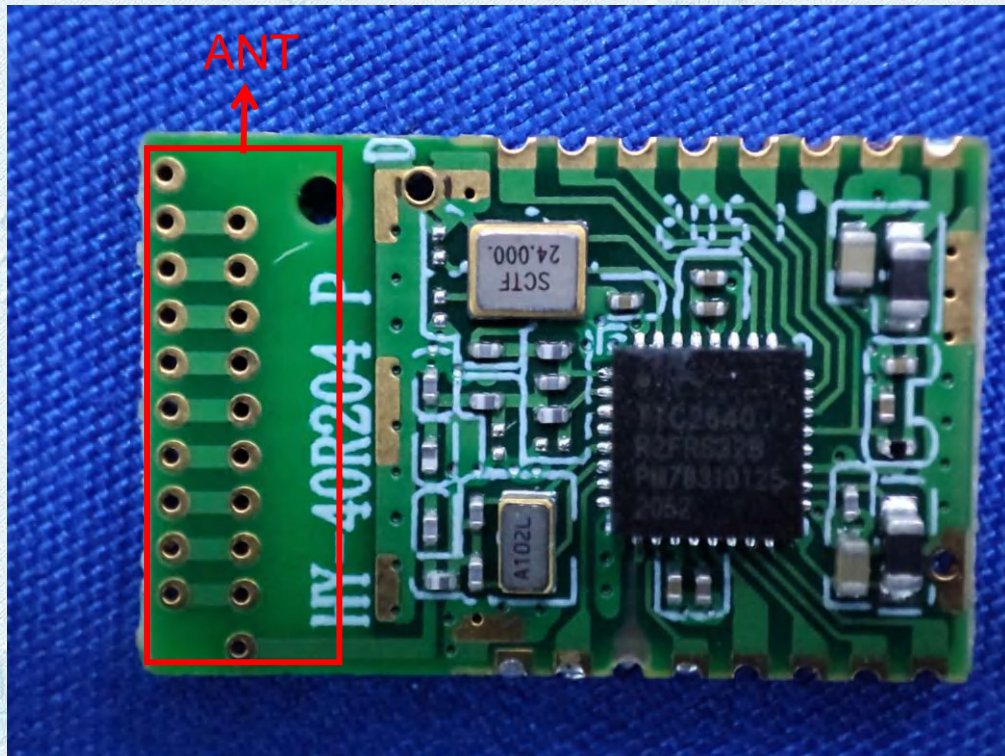

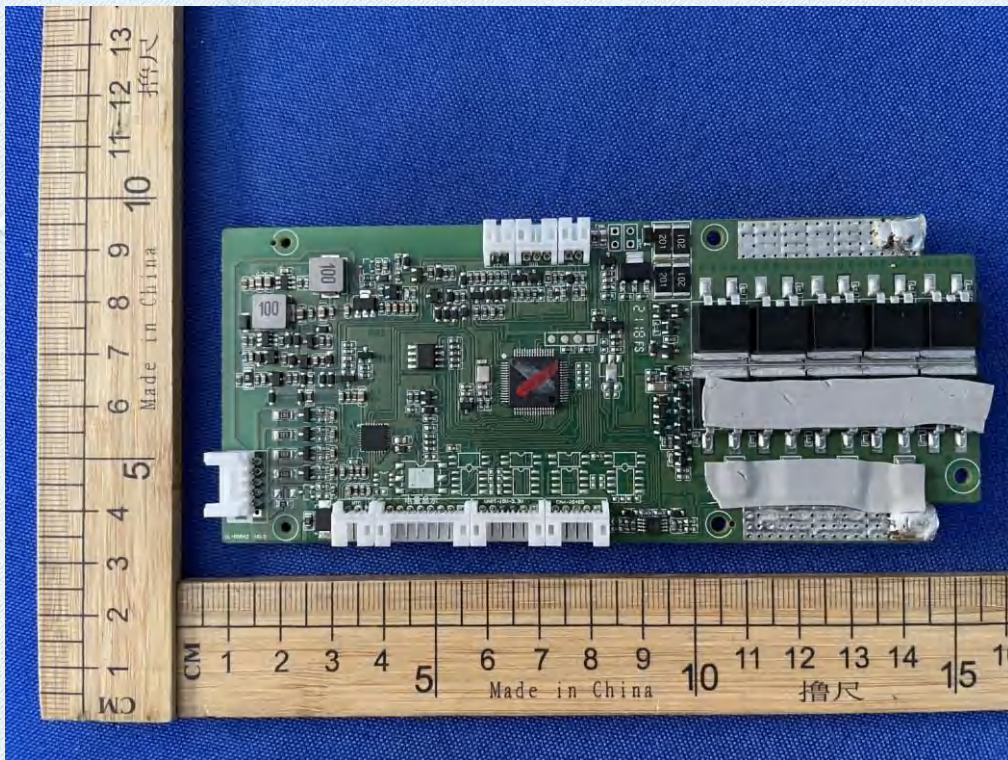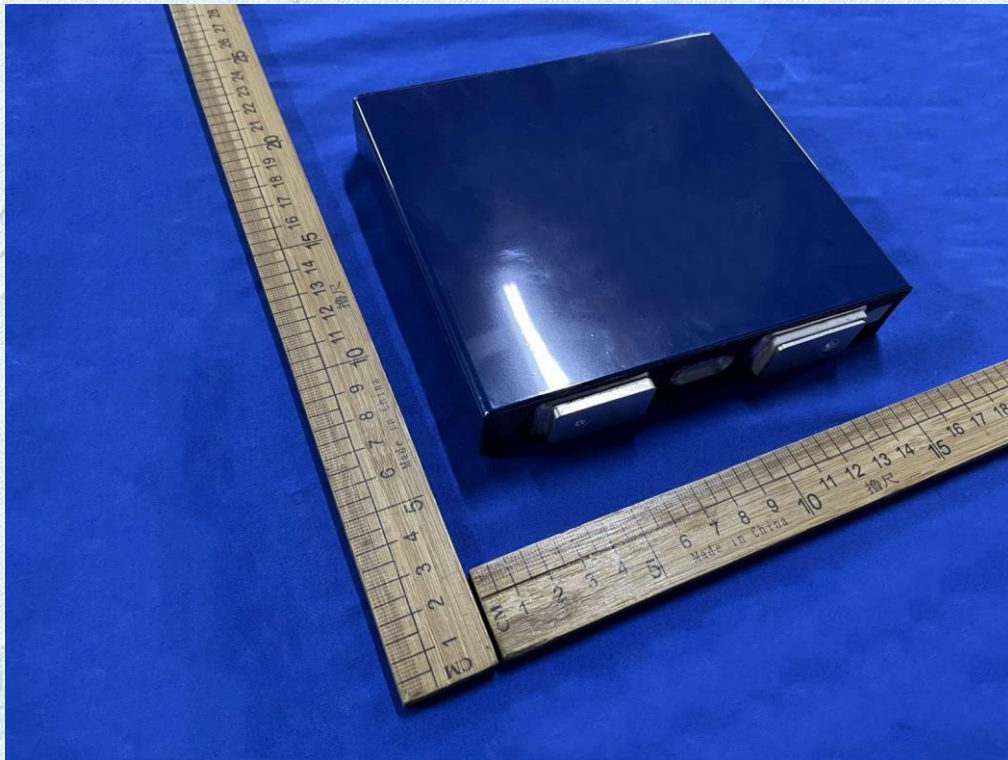

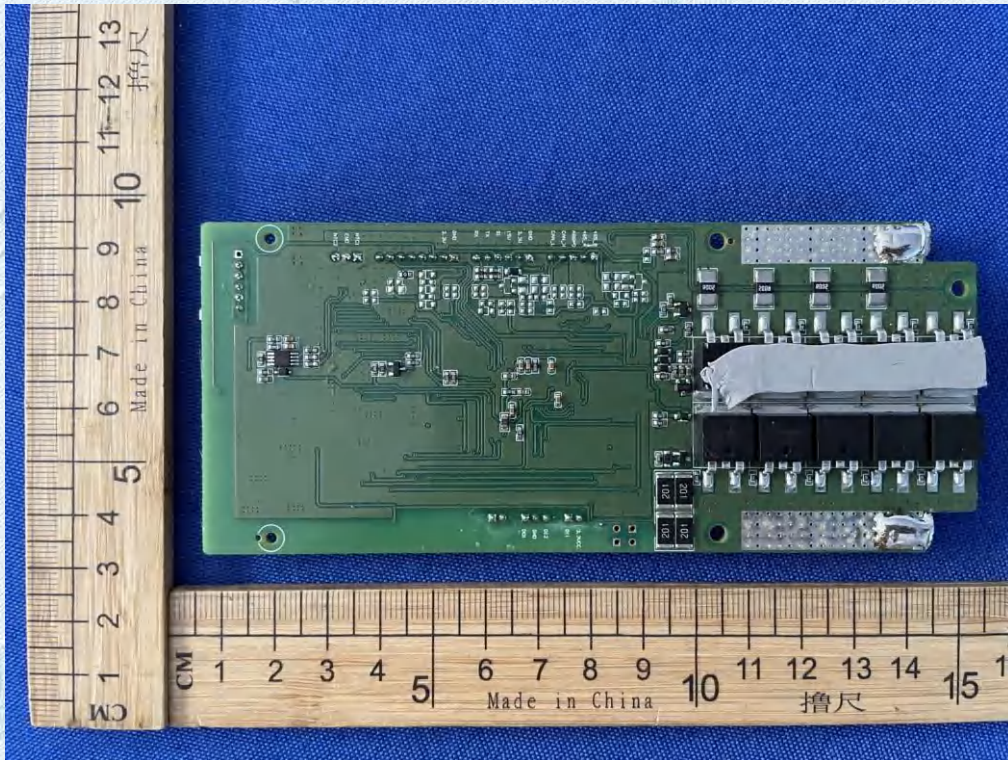



--THE END--