



Test report No:
 NIE: 64610RRF.003A2

Partial Test report
REFERENCE STANDARD:
USA FCC Part 22, Part 90
CANADA IC RSS-132, RSS-140

(*) Identification of item tested	nRF9160 IOT Module
(*) Trademark	nRF91
(*) Model and /or type reference tested	nRF9160
Other identification of the product	SW version: mfw_nrf9160_1.1.2-148 HW version: nRF9160-SICA-B1A FCC ID: 2ANPO00NRF9160 IC: 24529-NRF9160 IMEI TAC: 35265610
(*) Features	LTE Cat-M1, LTE-NB1, GPS
Applicant	NORDIC SEMICONDUCTOR ASA Otto Nielsens Vel 12, 7052 Trondheim, Norway
Test method requested. standard	USA FCC Part 22 10-1-19 Edition. USA FCC Part 90 10-1-19 Edition. CANADA IC RSS-132 Issue 3, Jan. 2013. CANADA IC RSS-140 Issue 1, Apr. 2018. ANSI C63.26 – 2015 KDB 971168 D01 Power Meas License Digital Systems v03r01, April. 2018.
Date of issue	Rafael López Martín EMC Consumer & RF Lab. Manager
Report template No	2020-08-31
(*) Identification of item tested	FDT08_22 (*) "Data provided by the client"

Index

Competences and guarantees	3
General conditions	3
Uncertainty.....	3
Data provided by the client	3
Usage of samples	4
Test sample description.....	4
Identification of the client	6
Testing period and place	6
Document history.....	6
Environmental conditions	7
Remarks and comments.....	7
Testing verdicts.....	8
Summary	8
Appendix A: Test results for FCC Part 22 & 90 / RSS-132	10

Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

Uncertainty

Uncertainty (factor k=2) was calculated according to the DEKRA Testing and Certification internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of nRF9160 IOT Module.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: the client.

Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
64610D/002	nRF9160 IOT Module	nRF9160	IMEI: 352656102628230	2020/04/14

1. Sample S/01 has undergone the following test(s):

All tests indicated in appendix A for GEN2 device.

Auxiliary sample S/02 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
59965/011	nRF9160 IOT Module	nRF9160	IMEI: 352656100158248	2019/03/25

1. Sample S/02 has undergone the following test(s):

Auxiliary sample to perform measurements for GEN1 device for conducted RF output power comparison indicated in appendix A.

Test sample description

Ports..... :	Port name and description	Cable				
		Specified length [m]	Attached during test	Shielded		
	LTE RF	2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
	GPS	2	<input type="checkbox"/>	<input type="checkbox"/>		
	BTLE		<input type="checkbox"/>	<input type="checkbox"/>		
Supplementary information to the ports..... :	N/A					
Rated power supply	Voltage and Frequency	Reference poles				
		L1	L2	L3	N	PE
	<input type="checkbox"/> AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/> DC: 3.0-5.5V						
Rated Power	1W					
Clock frequencies.....	32kHz, 32MHz					
Other parameters	--					
Software version	mfw_nrf9160_1.1.2_148					
Hardware version	nRF9160-SICA-B1A					

Dimensions in cm (L x W x D).....:	11x16x1.1mm		
Mounting position	<input type="checkbox"/>	Table top equipment	
	<input type="checkbox"/>	Wall/Ceiling mounted equipment	
	<input type="checkbox"/>	Floor standing equipment	
	<input type="checkbox"/>	Hand-held equipment	
	<input checked="" type="checkbox"/>	Other: SMD Module	
Modules/parts.....:	Module/parts of test item	Type	Manufacturer
	N/A		
Accessories (not part of the test item)	Description	Type	Manufacturer
	N/A		
Documents as provided by the applicant	Description	File name	Issue date
	User manual	4418_1315-v1.2 /2020-04-30- nRF9160_Objective_ Product_Spec	30-Apr-2020
	Cover markings	nRF9160_SiP marking	15-Jun-2020

Copy of marking plate:



Identification of the client

NORDIC SEMICONDUCTOR ASA
Otto Nielsens Vei 12, 7052 Trondheim, NORWAY

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2020-05-11
Date (finish)	2020-05-18

Document history

Report number	Date	Description
64610RRF.003	2020-07-09	First release.
64610RRF.003A1	2020-08-03	Second release: The RF output power and Radiated emissions results of LTE Cat M1 band 14 were added. This modification test report cancels and replaces the test report 64610RRF.003
64610RRF.003A2	2020-08-31	Third release: modification of sw and hw version and DC voltage range declared by manufacturer in "Test sample description". Correction on Vnom voltage value in "Test conditions". Inclusion of conducted RF output power comparison between GEN2 and GEN1 devices. This modification test report cancels and replaces the test report 64610RRF.001A1

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 35 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

Remarks and comments

The tests have been performed by the technical personnel: José Manuel Jimenez, Cristina Calle and Nicolás Salguero.

Used instrumentation:

Conducted Measurements

	Last Cal. date	Cal. due date
1. DC power supply R&S NGPE 40/40	2018/02	2021/02
2. Universal Radio communication Tester ROHDE AND SCHWARZ CMW50	2020/04	2021/04

Radiated Measurements

	Last Cal. date	Cal. due date
1. Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2. Hibrid Bilog antenna SUNOL SCIENCES CORPORATION JB6	2017/09	2020/09
3. Broadband Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2019/11	2022/11
4. Signal and Spectrum Analyser ROHDE AND SCHWARZ FSV40	2019/09	2021/09
5. EMI Test Receiver 9kHz – 7GHz ROHDE AND SCHWARZ ESR7	2019/10	2021/10
6. RF pre-amplifier, G>40dB, 1-18 GHz BONN ELEKTRONIK BLMA 0118-1M	2020/05	2021/05
7. Universal Radio communication Tester ROHDE AND SCHWARZ CMW50	2020/04	2021/04

Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

Summary

1. LTE cat Band 26

FCC PART 22/IC RSS-132 PARAGRAPH		
Requirement – Test case	Verdict	Remark
Clause 22.913/RSS-132 Clause 5.4: RF output power	P	(2)
Clause 2.1047/RSS-132 Clause 5.2: Modulation characteristics	NM	(1)
Clause 22.355/RSS-132 Clause 5.3: Frequency stability	NM	(1)
Clause 2.1049: Occupied Bandwidth	NM	(1)
Clause 22.917/RSS-132 Clause 5.5: Spurious emissions at antenna terminals	NM	(1)
Clause 22.917/RSS-132 Clause 5.5: Radiated emissions	P	(2)
<u>Supplementary information and remarks:</u>		
(1) Test not requested. (2) Peak-to-average power ratio (PAPR) was not tested. Only RF Output Power and Radiated emissions tests were tested in the worst case		

FCC PART 90 PARAGRAPH		
Requirement – Test case	Verdict	Remark
Clause 90.635 (b): RF output power	P	(2)
Clause 2.1047: Modulation characteristics	NM	(1)
Clause 90.213 Frequency stability	NM	(1)
Clause 2.1049: Occupied Bandwidth	NM	(1)
Clause 90.691 Spurious emissions at antenna terminals (Emission mask requirements for EA-based systems)	NM	(1)
Clause 90.691: Radiated emissions	P	(2)
<u>Supplementary information and remarks:</u>		
(1) Test not requested. (2) Only RF Output Power and Radiated emissions tests were tested in the worst case.		

2. LTE cat Band 14

FCC PART 90 /IC RSS-140 PARAGRAPH		
Requirement – Test case	Verdict	Remark
Clause 90.542 (a) (7) RSS-140 Clause 4.3: RF output power	P	(2)
Clause 2.1047/RSS-140 Clause 4.1: Modulation characteristics	NM	(1)
Clause 90.213/RSS-140 Clause 4.2: Frequency stability	NM	(1)
Clause 2.1049: Occupied Bandwidth	NM	(1)
Clause 90.543 (e) (2) (3) & (5) /RSS-140 Clause 4.4: Spurious emissions at antenna terminals	NM	(1)
Clause 90.543 (e) (2) (3) & (f)/RSS-140 Clause 4.4: Radiated emissions	P	(2)
<u>Supplementary information and remarks:</u>		
(1) Test not requested.		
(2) Only RF Output Power and Radiated emissions tests were tested in the worst case.		

Appendix A: Test results for FCC Part 22 & 90 / RSS-132 & RSS-140

INDEX

TEST CONDITIONS	12
RF Output Power	14
Radiated emissions	19

TEST CONDITIONS

Power supply (V):

Vnominal = 3.8 Vdc

Type of power supply = DC Voltage from external power supply

Type of antenna = Integral antenna.

Declared Gain for antenna = +2.6 dBi.

TEST FREQUENCIES:

788-798MHz Band:

LTE Band 14. QPSK, 16QAM MODULATIONS:

	Channel (Frequency, MHz)	
	BW = 5 MHz	BW = 10 MHz
Lowest	23305 (790.5)	N/A
Middle	23330 (793)	23330 (793)
Highest	23355 (795.5)	N/A

814-824MHz Band:

LTE. QPSK AND 16QAM MODULATION (BAND 26)

	Channel (Frequency, MHz)				
	BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz
Lowest	26697 (814.70)	26705 (815.5)	26715 (816.5)	---	---
Middle	26740 (819)	26740 (819)	26740 (819)	26740 (819)	---
Highest	26783 (823.30)	26775 (822.50)	26765 (821.50)	---	---

Cross-rule channel (824MHz):

LTE. QPSK AND 16QAM MODULATION (BAND 26)

Channel (Frequency, MHz)				
BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz
26790 (824)	26790 (824)	26790 (824)	26790 (824)	26790 (824)

824-849MHz Band:

LTE. QPSK AND 16QAM MODULATION (BAND 5)

	Channel (Frequency, MHz)			
	BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz
Lowest	20407 (824.70)	20415 (825.50)	20425 (826.50)	20450 (829.00)
Middle	20525 (836.50)	20525 (836.50)	20525 (836.50)	20525 (836.50)
Highest	20643 (848.30)	20635 (847.50)	20625 (846.50)	20600 (844.00)

LTE. QPSK AND 16QAM MODULATION (BAND 26)

	Channel (Frequency, MHz)				
	BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz
Lowest	26797 (824.70)	26805 (825.50)	26815 (826.50)	26840 (829.00)	26865 (831.50)
Middle	26915 (836.50)	26915 (836.50)	26915 (836.50)	26915 (836.50)	26915 (836.50)
Highest	27033 (848.30)	27025 (847.50)	27015 (846.50)	26990 (844.00)	26965 (841.50)

NOTE: Band 26 is completely included in band 5, so the channels of band 5 were tested to give conformity to the assigned block.

RF Output Power

SPECIFICATION

FCC §90.542 (a) (6) (7):

(a)(6) Control stations and mobile stations transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 30 watts ERP.

(a)(7) Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

RSS-140. Clause 4.3. The equivalent radiated power (e.r.p.) for control and mobile equipment shall not exceed 30 W. The e.r.p. for portable equipment including handheld devices shall not exceed 3 W.

FCC §2.1046 and §22.913. The Effective Radiated Power (E.R.P.) of mobile transmitter and auxiliary test transmitter must not exceed 7 Watts (38.45 dBm E.R.P.).

RSS-132. Clause 5.4. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts (38.45 dBm E.R.P.).

FCC §90.635. The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using the power meter of the Universal Radio Communication tester R&S CMU200 and CMW500, selecting maximum transmission power of the EUT and different modes of modulation.


The maximum equivalent isotropically radiated power (e.i.r.p.) is calculated by adding the declared maximum antenna gain (dBi).

The maximum effective radiated power e.r.p. is calculated from the maximum equivalent isotropically radiated power (e.i.r.p.) by subtracting 2.15 dB:

$$E.R.P. = E.I.R.P. - 2.15 \text{ dB}$$

TEST SETUP

Conducted average power.

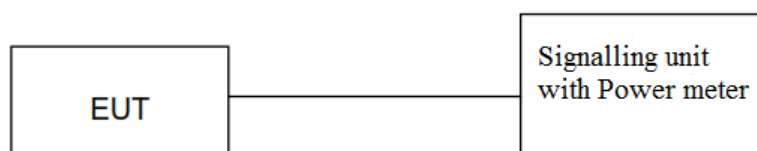

RESULTS

MAXIMUM OUTPUT POWER (CONDUCTED).

788-798 MHz Band:

Preliminary measurements determined the narrow band = 1 and nominal bandwidth of 5 MHz as the worst case. The results in the next tables shows the results for this configuration.

Narrow band = 1

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)	Maximum effective radiated power E.I.R.P. (dBm)	Maximum effective radiated power E.R.P. (dBm)
5	23305	790.5	QPSK	1	5	23.23	25.83	23.68
			16-QAM	1	5	22.65	25.25	23.10
	23330	793	QPSK	1	5	23.26	25.86	23.71
			16-QAM	1	5	22.73	25.33	23.18
	23355	795.5	QPSK	1	5	23.23	25.83	23.68
			16-QAM	1	5	22.80	25.40	23.25

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Verdict: PASS

LTE. BAND 788-798 MHz.

The results in the next table shows the maximum difference between GEN2 and GEN1 devices for conducted output power measurements.

Maximum conducted output power difference between GEN2 and GEN1 (dB)	0.23
---	------

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

814-824 MHz Band:

Preliminary measurements determined the narrow band = 1 and nominal bandwidth of 5 MHz as the worst case. The results in the next tables shows the results for this configuration.

Narrow band = 1

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)	Maximum effective radiated power E.I.R.P. (dBm)	Maximum effective radiated power E.R.P. (dBm)
5	26715	816.5	QPSK	1	2	23.19	25.79	23.64
			16-QAM	1	2	22.31	26.71	24.56
	26740	819	QPSK	1	2	23.23	25.83	23.68
			16-QAM	1	2	22.35	26.75	24.60
	26765	821.5	QPSK	1	2	23.38	25.98	23.83
			16-QAM	1	2	22.32	26.72	24.57

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Verdict: PASS

GEN2 AND GEN1 OUTPUT POWER COMPARISON (CONDUCTED).

LTE. BAND 814-824 MHz.

The results in the next table shows the maximum difference between GEN2 and GEN1 devices for conducted output power measurements.

Maximum conducted output power difference between GEN2 and GEN1 (dB)	0.50
---	------

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Cross-rule channel (824MHz):

Preliminary measurements determined the narrow band = 1 and nominal bandwidth of 10 MHz as the worst case. The results in the next tables shows the results for this configuration.

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)	Maximum effective radiated power E.I.R.P. (dBm)	Maximum effective radiated power E.R.P. (dBm)
10	26790	824	QPSK	1	2	23.22	25.82	23.67
			16-QAM	1	2	22.36	24.96	22.81

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Verdict: PASS

GEN2 AND GEN1 OUTPUT POWER COMPARISON (CONDUCTED).

LTE. Cross-rule channel (824 MHz)

The results in the next table shows the maximum difference between GEN2 and GEN1 devices for conducted output power measurements.

Maximum conducted output power difference between GEN2 and GEN1 (dB)	0.50
---	------

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

824-849MHz Band:

Preliminary measurements determined the narrow band = 1 and nominal bandwidth of 5 MHz as the worst case. The results in the next tables shows the results for this configuration.

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)	Maximum effective radiated power E.I.R.P. (dBm)	Maximum effective radiated power E.R.P. (dBm)
5	20425	826.5	QPSK	1	2	23.12	25.72	23.57
			16-QAM	1	2	22.36	24.96	22.81
	20525	836.5	QPSK	1	2	23.08	25.68	23.53
			16-QAM	1	2	22.16	24.76	22.61
	20625	846.5	QPSK	1	2	23.02	25.62	23.47
			16-QAM	1	2	21.99	24.59	22.44

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Verdict: PASS

GEN2 AND GEN1 OUTPUT POWER COMPARISON (CONDUCTED).

LTE. BAND 824 - 849 MHz

The results in the next table shows the maximum difference between GEN2 and GEN1 devices for conducted output power measurements.

Maximum conducted output power difference between GEN2 and GEN1 (dB)	0.50
---	------

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Radiated emissions

SPECIFICATION

FCC §90.543 (e) (2) (3) (5) (& (f):

(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

RSS-140. Clause 4.4.

The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

- a. For any frequency between 769-775 MHz and 799-806 MHz:
 - $76 + 10 \log (p)$, dB in a 6.25 kHz band for fixed and base station equipment
 - $65 + 10 \log (p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment
- b. For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log (p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559-1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

FCC § 22.917

RSS-132. Clause 5.5.

FCC §2.1051, §90.691

Emission mask requirements for EA-based systems.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum field strength (dB μ V/m) is measured and recorded.

The maximum field strength (dB μ V/m) of each detected emission at less than 20 dB respect to the limit is converted to an equivalent EIRP level (dBm) according to ANSI C63.26 with the formula:

$EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m. D = 3 m

Measurement Limit:


According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power. the specified minimum attenuation becomes $43+10\log (P_o)$. and the level in dBm relative P_o becomes:


$P_o (dBm) - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$

TEST SETUP

Radiated measurements below 1 GHz.

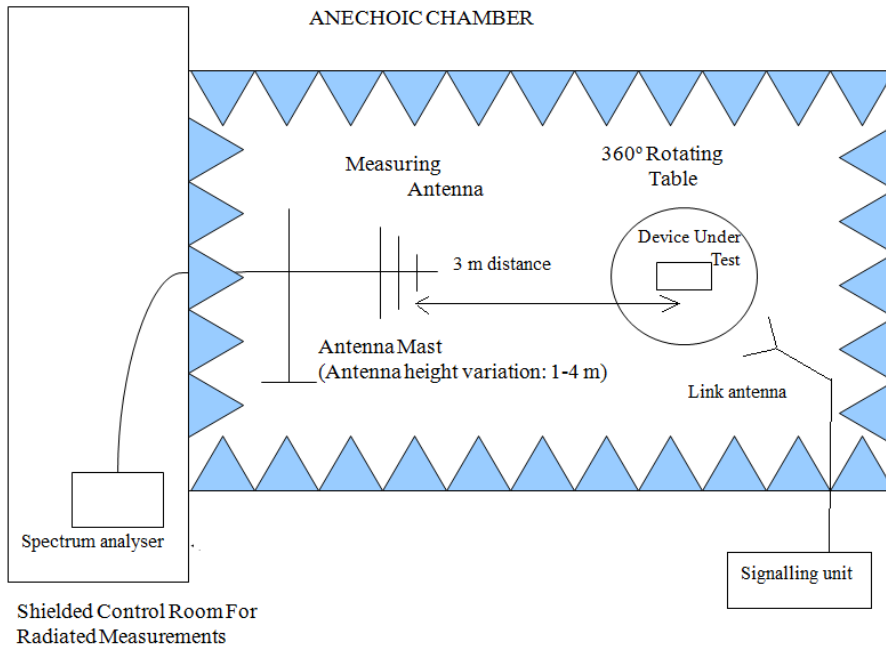

Radiated measurements above 1 GHz.

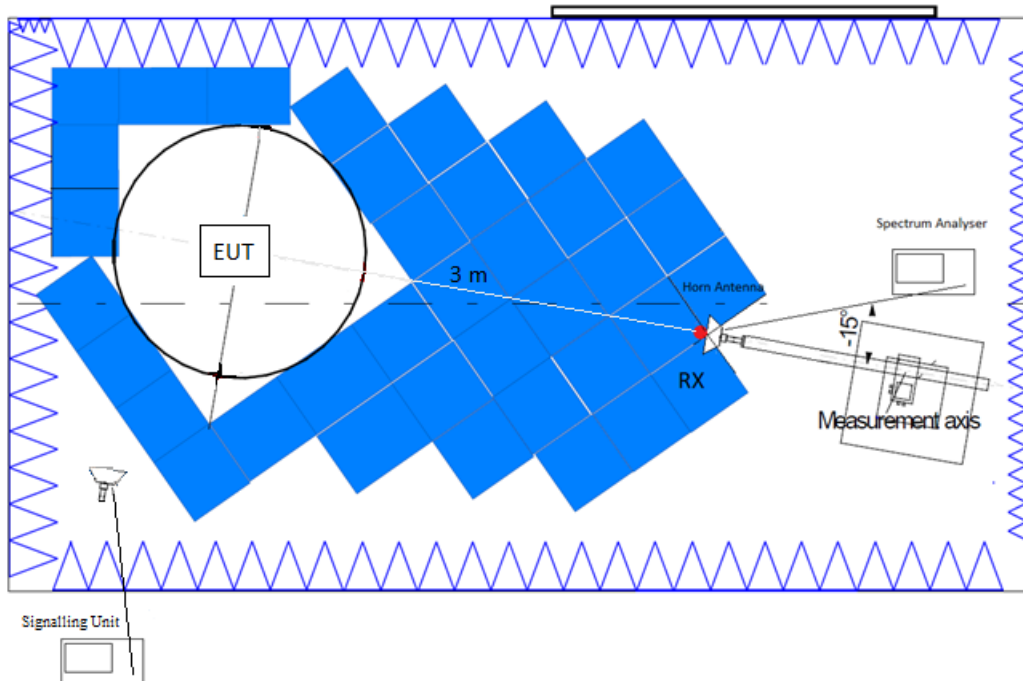

RESULTS

LTE Band 14:

LTE QPSK AND 16QAM MODULATION. BW = 5 MHz, 10 MHz.

A preliminary scan determined the QPSK modulation with 5 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following tables and plots show the results for this configuration.

LTE Band 14. QPSK MODULATION. BW = 5 MHz.

Frequency range 9 KHz - 8 GHz:

1. CHANNEL: LOWEST

Spurious frequency (MHz)	Detector	E.R.P. (dBm)	Polarization
787.43125	Peak	-17.86	H
787.97445	Peak	-20.08	H
787.98234	Peak	-20.07	H

2. CHANNEL: MIDDLE

No spurious frequencies detected at less than 20 dB below the limit in all the range.

3. CHANNEL: HIGHEST

No spurious frequencies detected at less than 20 dB below the limit in all the range.

Frequency range 769 - 775 MHz:

1. CHANNEL: LOWEST

No spurious frequencies detected at less than 20 dB below the limit in all the range.

2. CHANNEL: MIDDLE

No spurious frequencies detected at less than 20 dB below the limit in all the range.

3. CHANNEL: HIGHEST

No spurious frequencies detected at less than 20 dB below the limit in all the range.

Frequency range 799 - 806 MHz:

1. CHANNEL: LOWEST

No spurious frequencies detected at less than 20 dB below the limit in all the range.

2. CHANNEL: MIDDLE

No spurious frequencies detected at less than 20 dB below the limit in all the range.

3. CHANNEL: HIGHEST

No spurious frequencies detected at less than 20 dB below the limit in all the range.

Frequency range 1559 - 1610 MHz:

1. CHANNEL: LOWEST

Spurious frequency (MHz)	Detector	E.R.P. (dBm)	Polarization
1578.12	Peak	-57.81	H
1585.01	Peak	-59.89	H

2. CHANNEL: MIDDLE

Spurious frequency (MHz)	Detector	E.R.P. (dBm)	Polarization
1581.95	Peak	-57.25	H
1590.11	Peak	-57.45	H

3. CHANNEL: HIGHEST

Spurious frequency (MHz)	Detector	E.R.P. (dBm)	Polarization
1595.46	Peak	-57.09	H

Measurement uncertainty (dB)	<±4.65 for f < 1GHz <±4.98 for f ≥ 1 GHz up to 10 GHz
------------------------------	--

Verdict: PASS

LTE Band 26:

814-824MHz Band:

LTE QPSK AND 16QAM MODULATION. BW = 1.4 MHz, 3 MHz, 5 MHz, 10 MHz.

A preliminary scan determined the QPSK modulation with 5 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following tables and plots show the results for this configuration.

1. CHANNEL: LOWEST

Frequency range 30 MHz-1000 MHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Frequency range 1 GHz-10 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

2. CHANNEL: MIDDLE

Frequency range 30 MHz-1000 MHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Frequency range 1 GHz-10 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

3. CHANNEL: HIGHEST

Frequency range 30 MHz-1000 MHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Frequency range 1 GHz-10 GHz.

Spurious frequency (GHz)	Detector	E.I.R.P. (dBm)	Polarization
3.27895	Peak	-32.72	H

Measurement uncertainty (dB)	<±4.65 for f < 1GHz <±4.98 for f ≥ 1 GHz up to 10 GHz
------------------------------	--

Verdict: PASS

LTE Band 5:

824-849MHz Band:

LTE QPSK AND 16QAM MODULATION. BW = 1.4 MHz, 3 MHz, 5 MHz, 10 MHz and 15MHz.

A preliminary scan determined the QPSK modulation with 5 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following tables and plots show the results for this configuration.

1. CHANNEL: LOWEST

Frequency range 30 MHz-1000 MHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Frequency range 1 GHz-10 GHz.

Spurious frequency (GHz)	Detector	E.I.R.P. (dBm)	Polarization
3.29878	Peak	-32.65	H

2. CHANNEL: MIDDLE

Frequency range 30 MHz-1000 MHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Frequency range 1 GHz-10 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

3. CHANNEL: HIGHEST

Frequency range 30 MHz-1000 MHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.


Frequency range 1 GHz-10 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.


Measurement uncertainty (dB)	<±4.65 for f < 1GHz <±4.98 for f ≥ 1 GHz up to 10 GHz
------------------------------	--

Verdict: PASS


LTE Band 14:
FREQUENCY RANGE 30 MHz - 1 GHz
CHANNEL LOWEST:

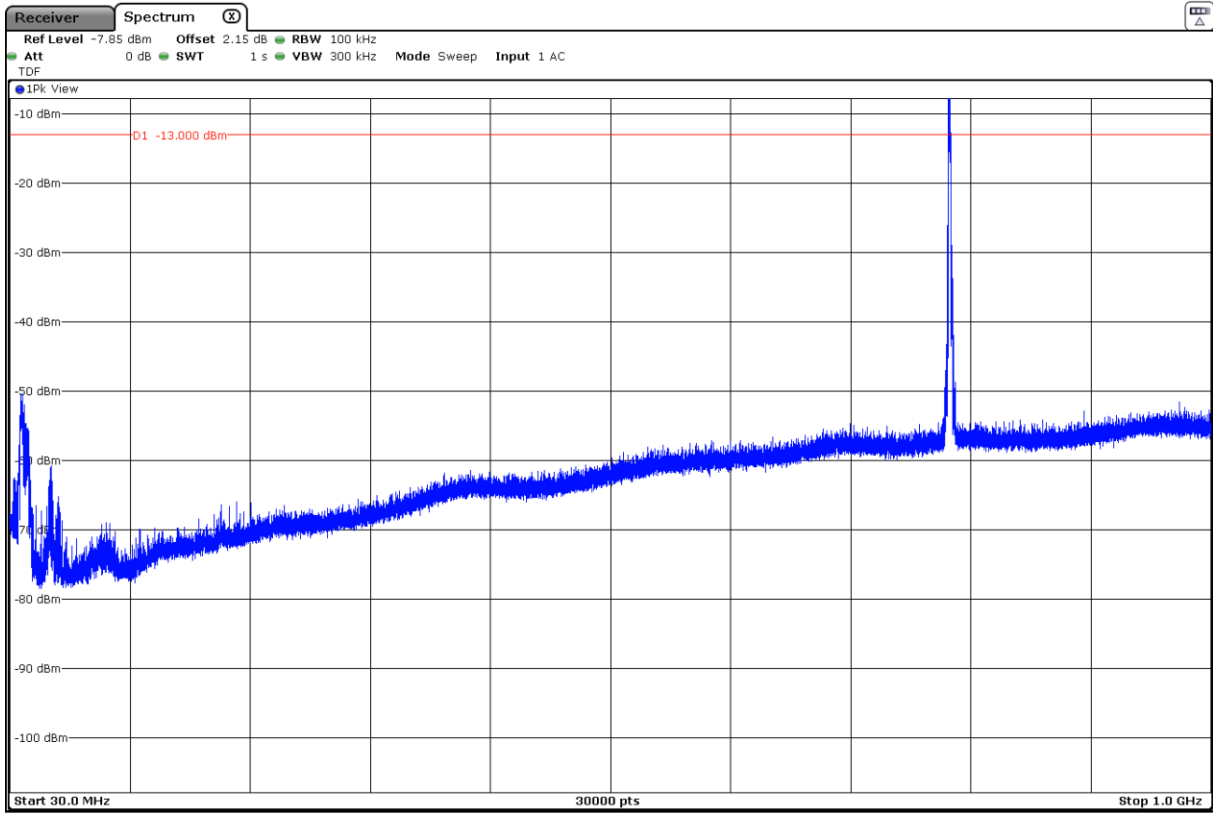

CHANNEL MIDDLE:

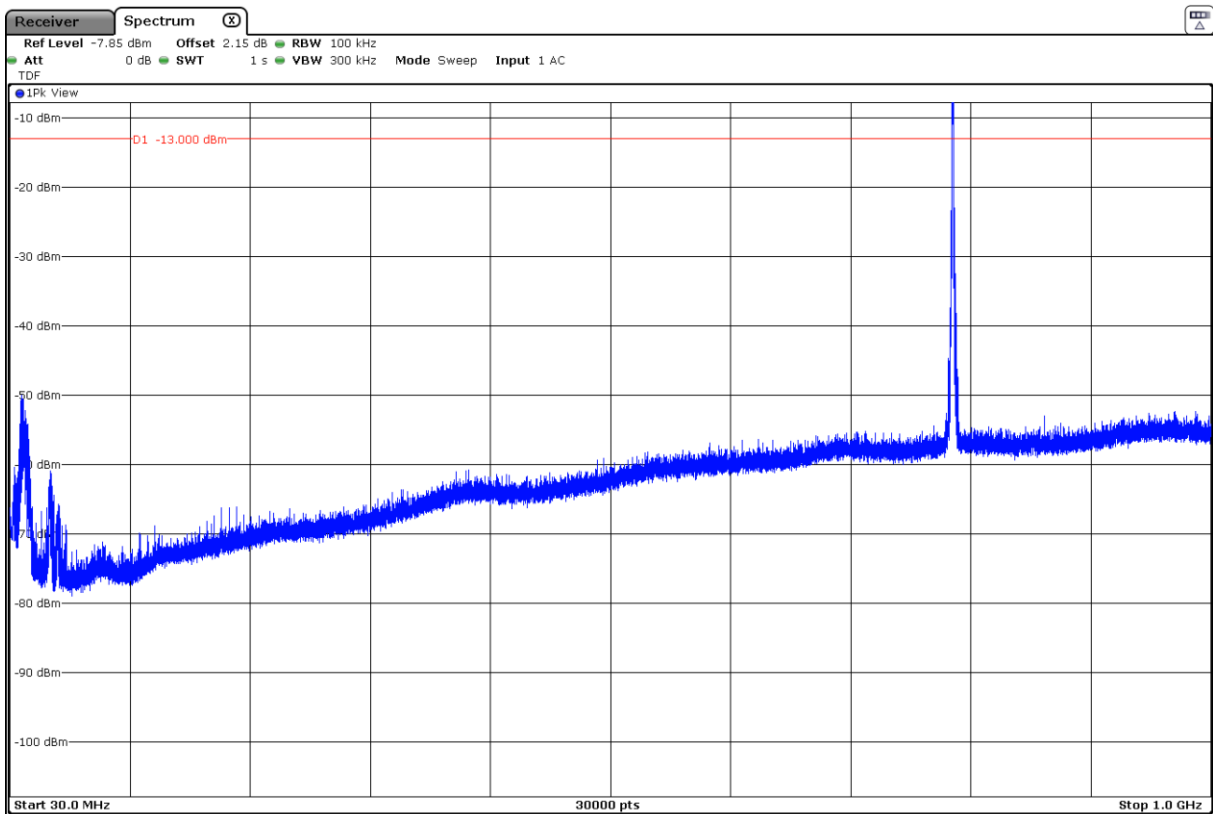


CHANNEL HIGHEST:

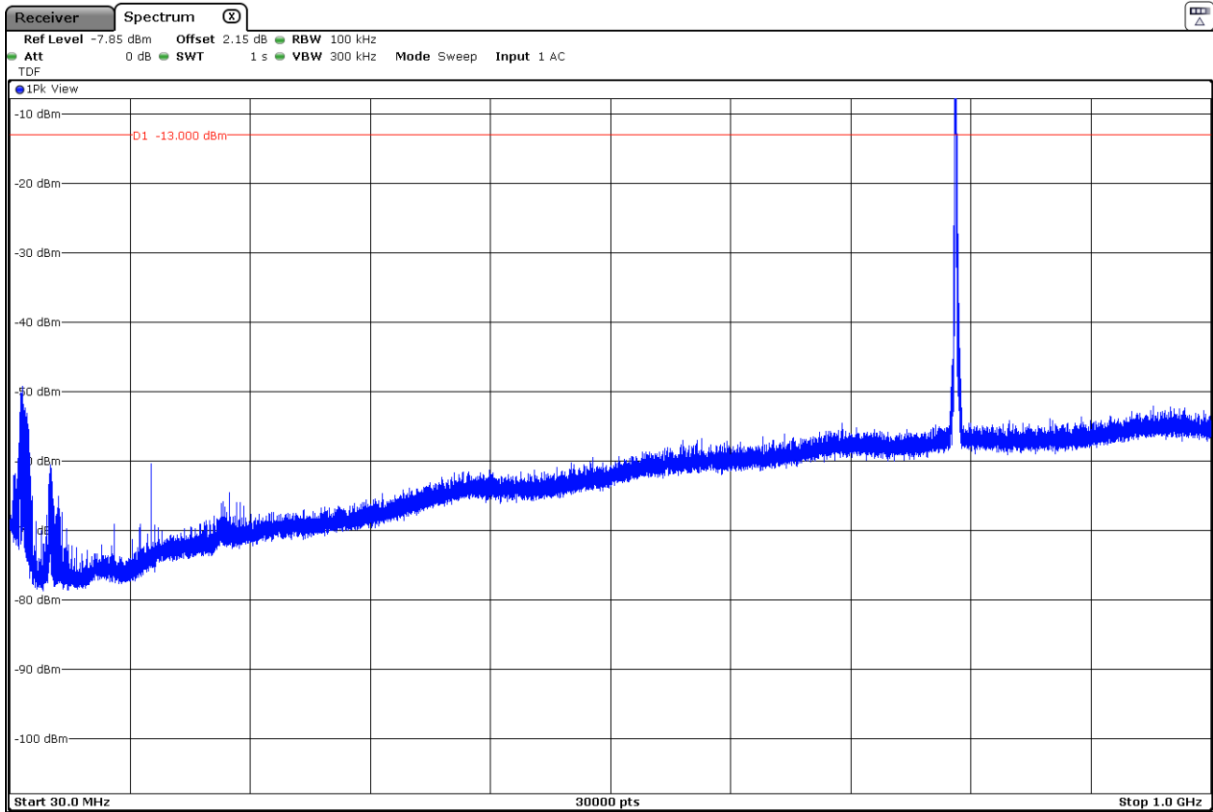


FREQUENCY RANGE 769 - 775 MHz


CHANNEL LOWEST:

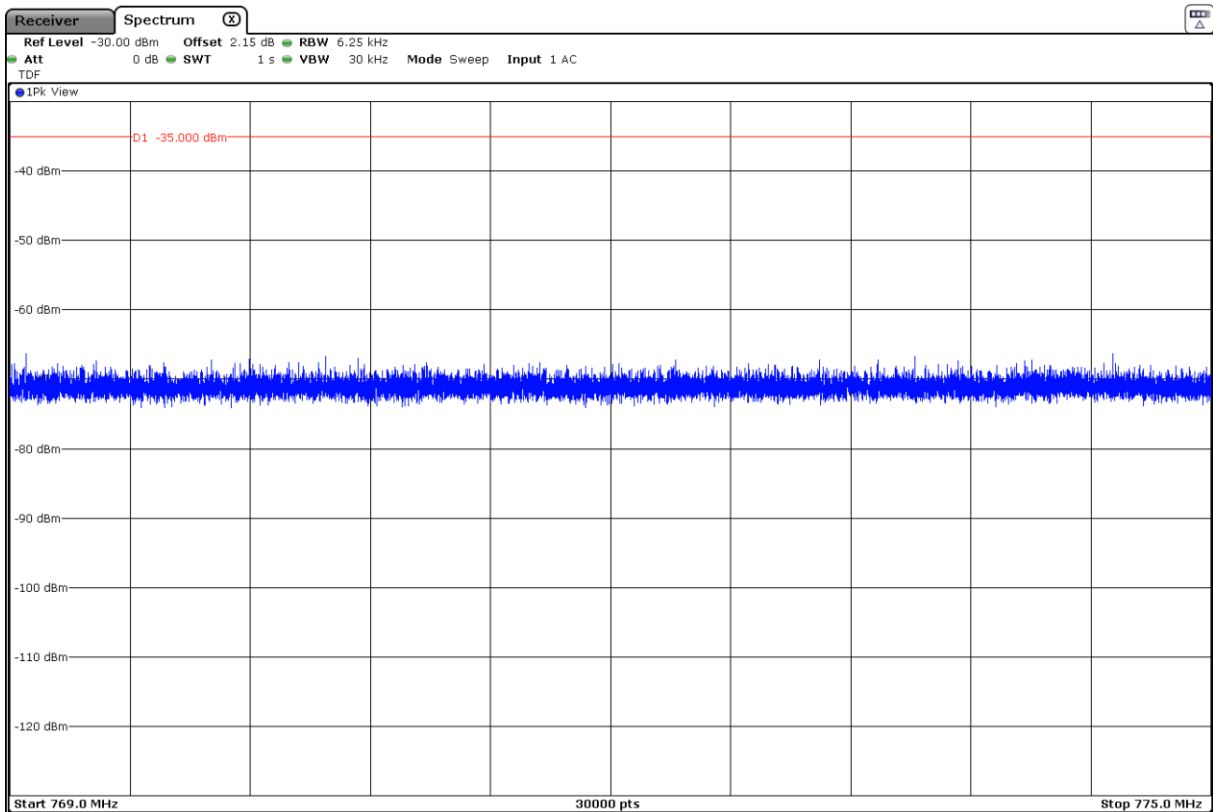

CHANNEL MIDDLE:


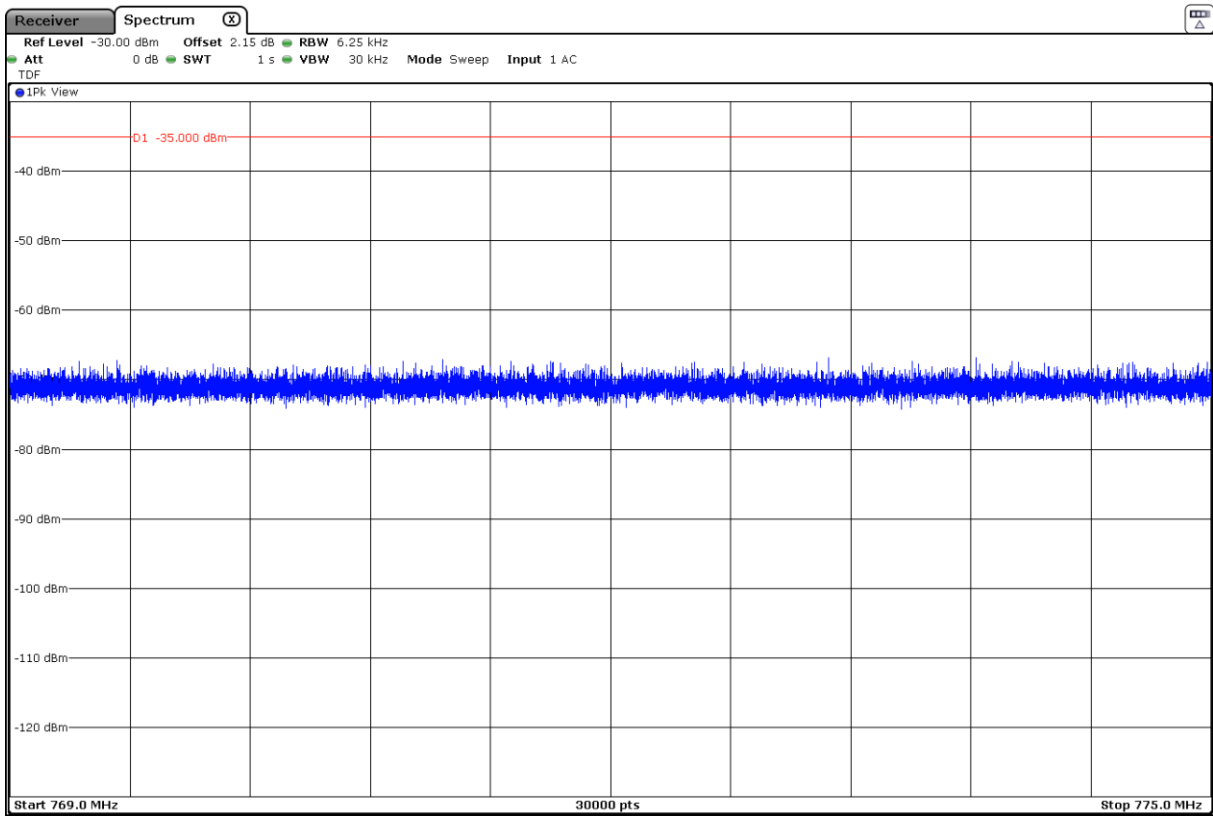


CHANNEL HIGHEST:

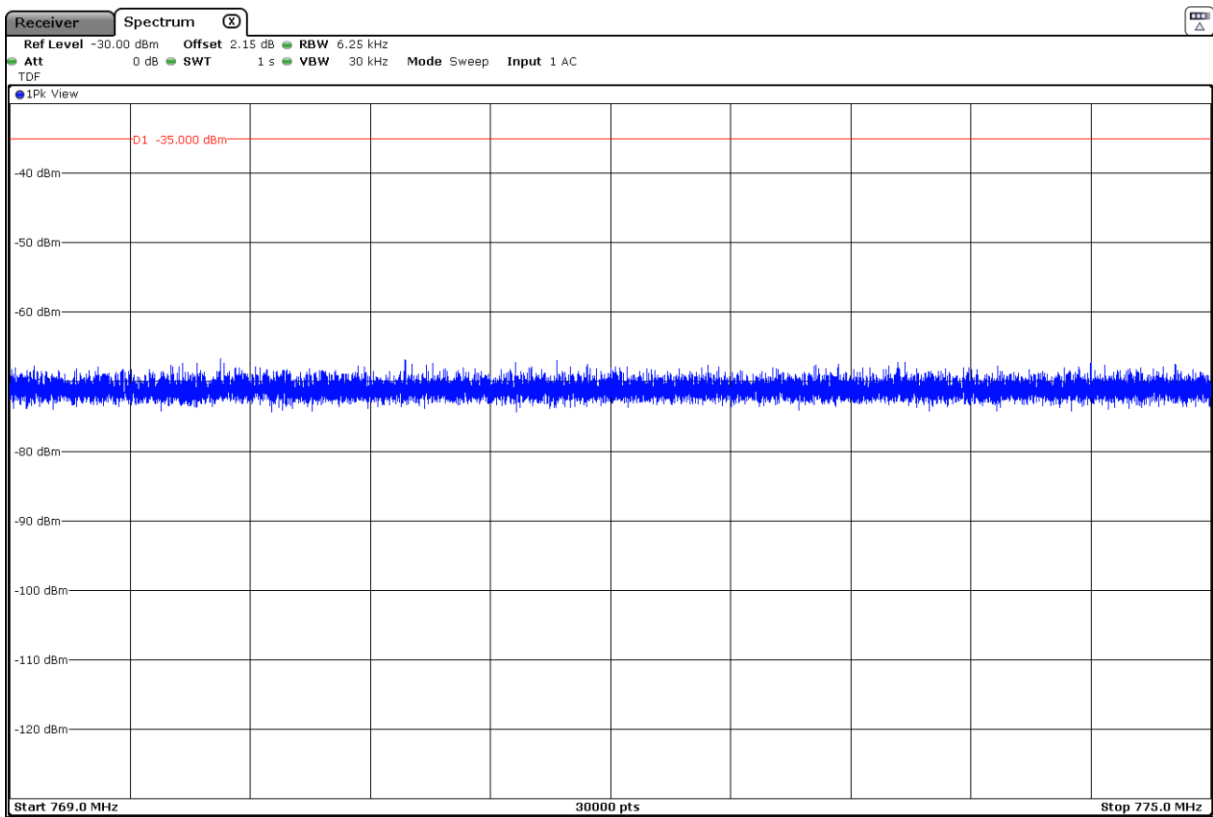


FREQUENCY RANGE 775 - 788 MHz

CHANNEL LOWEST:

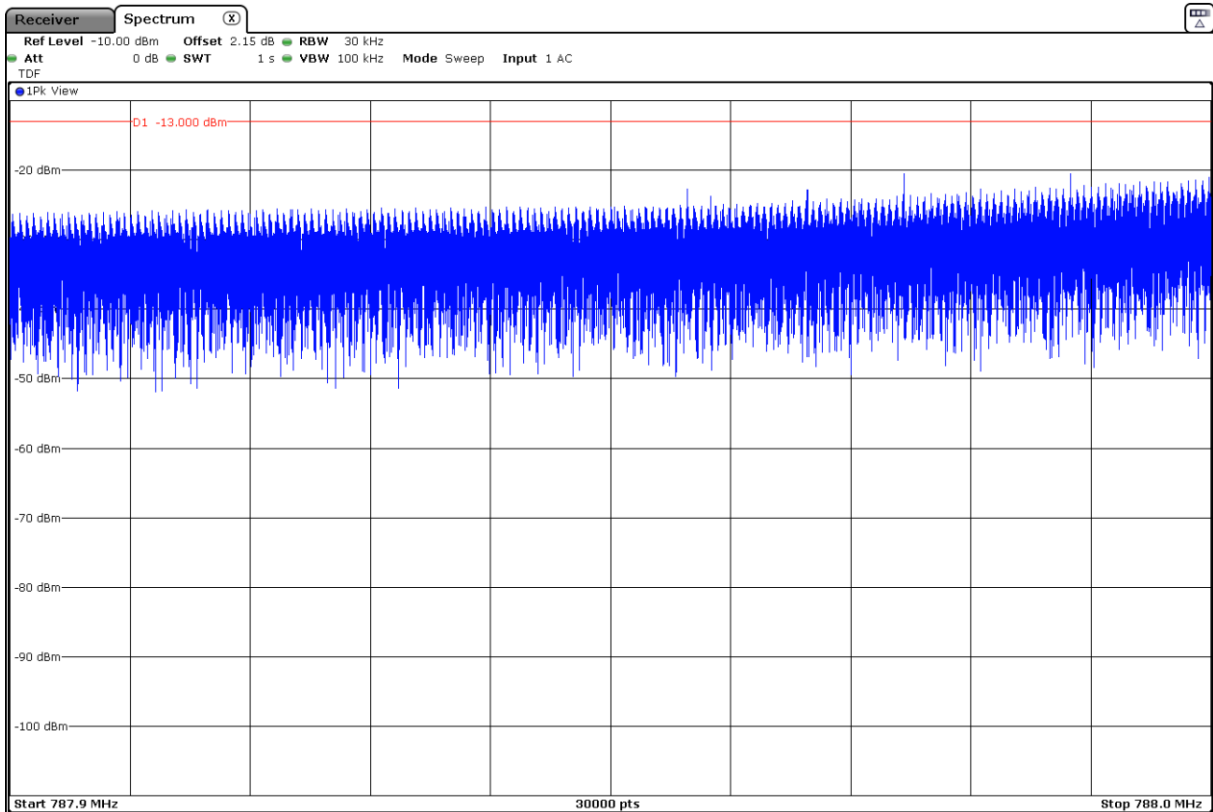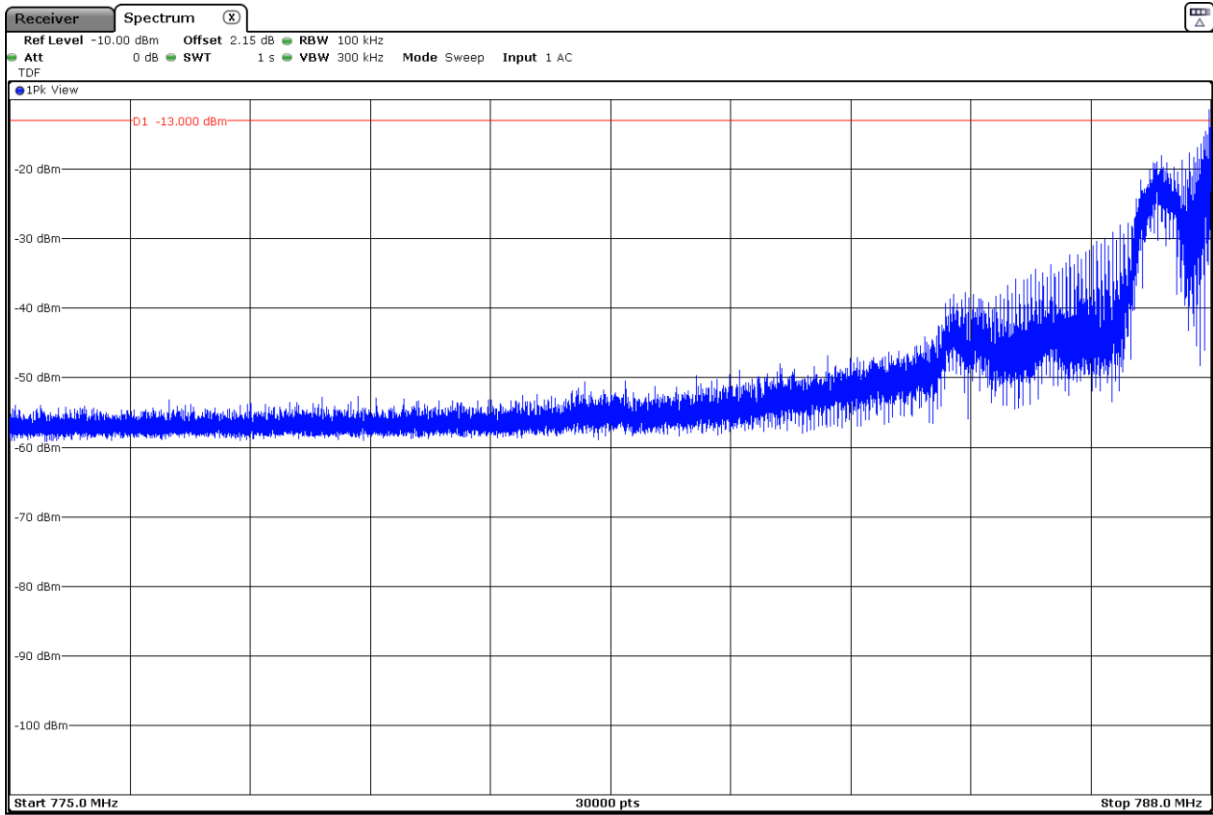


NOTE: In the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

CHANNEL MIDDLE:

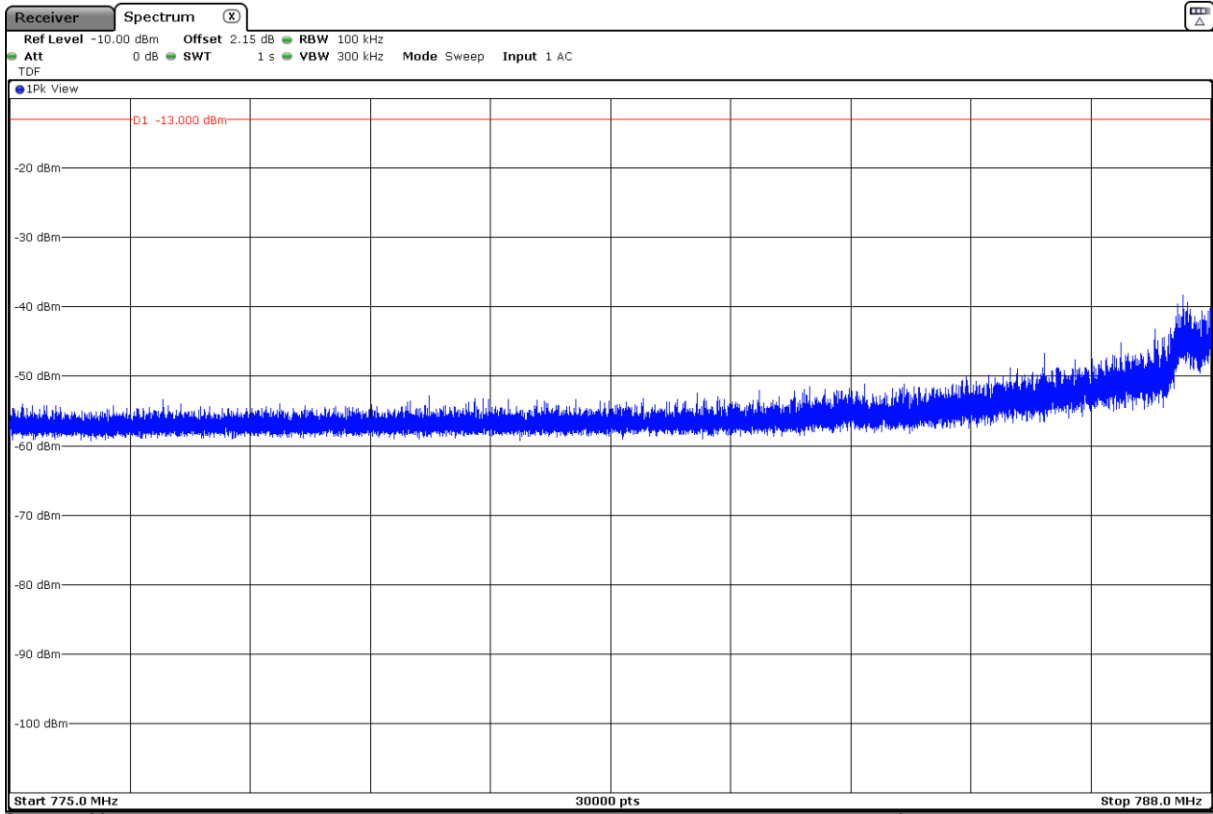


CHANNEL HIGHEST:

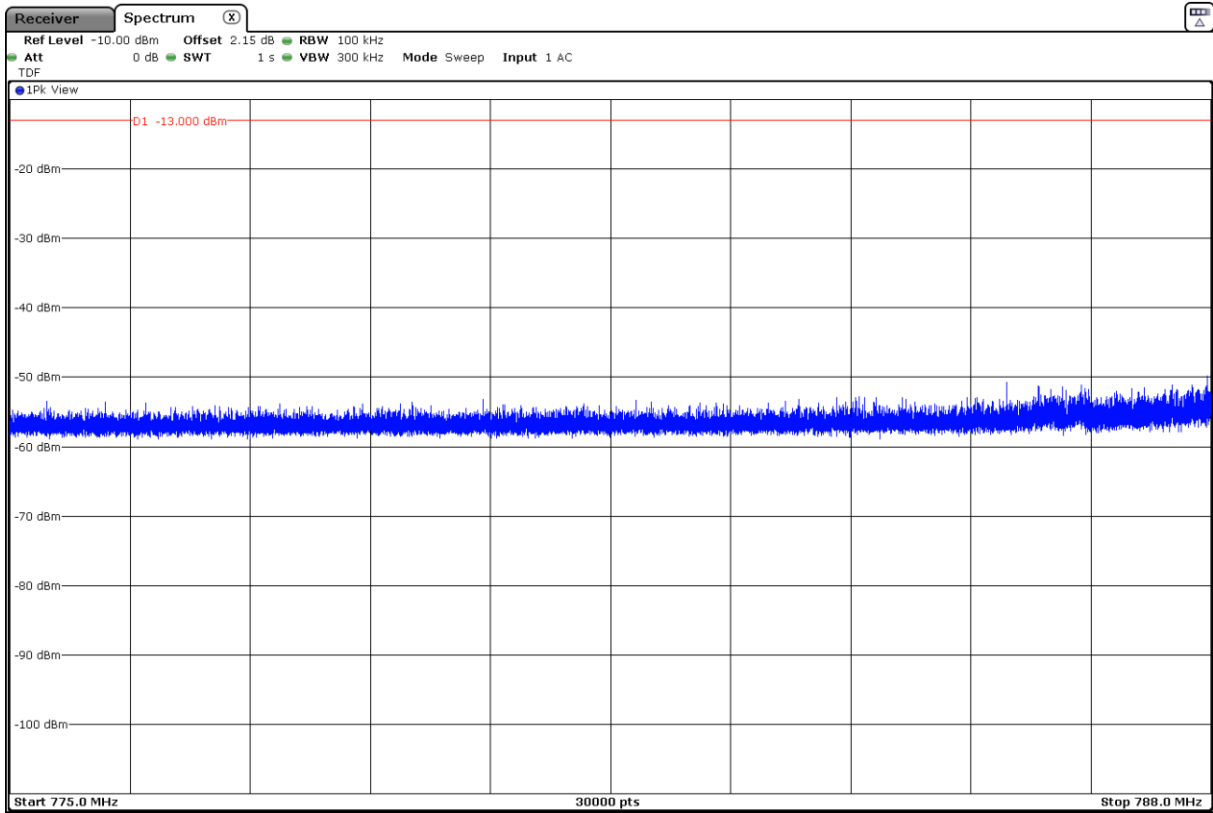


FREQUENCY RANGE 799 - 806 MHz


CHANNEL LOWEST:

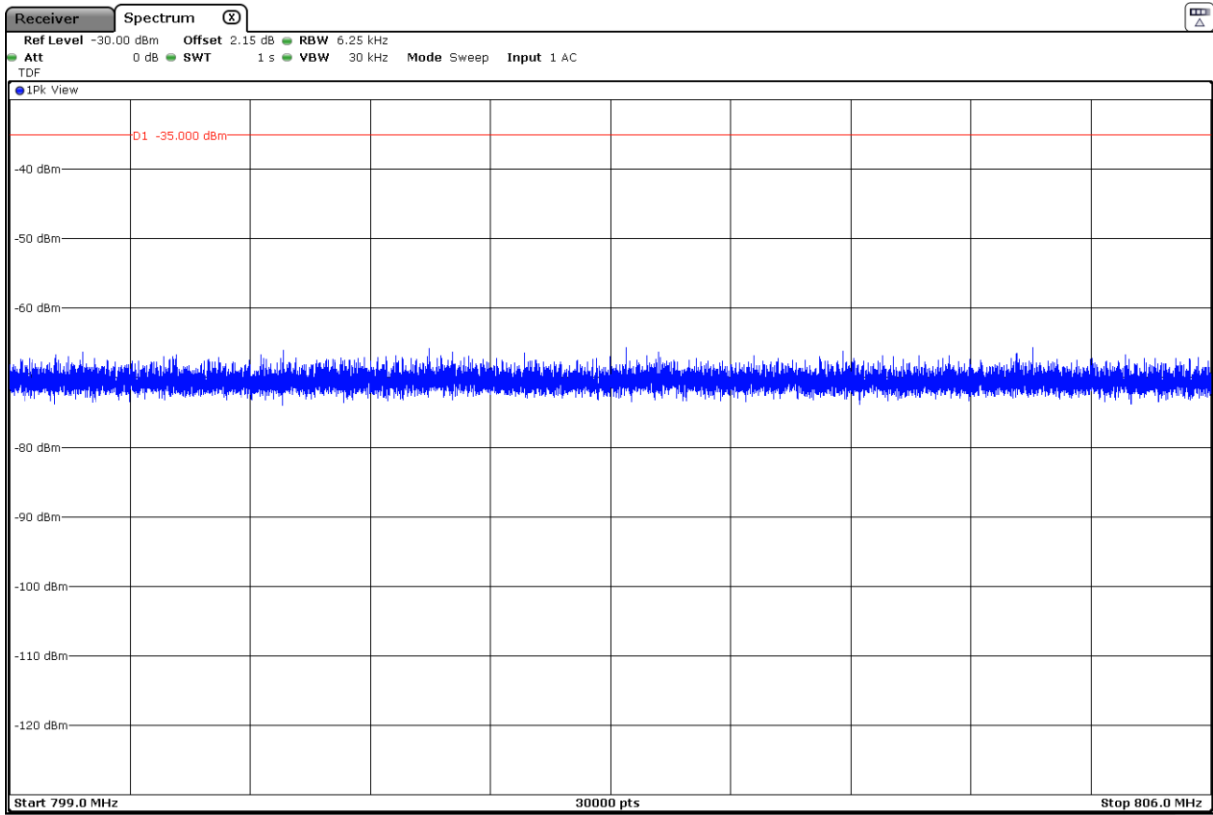

CHANNEL MIDDLE:


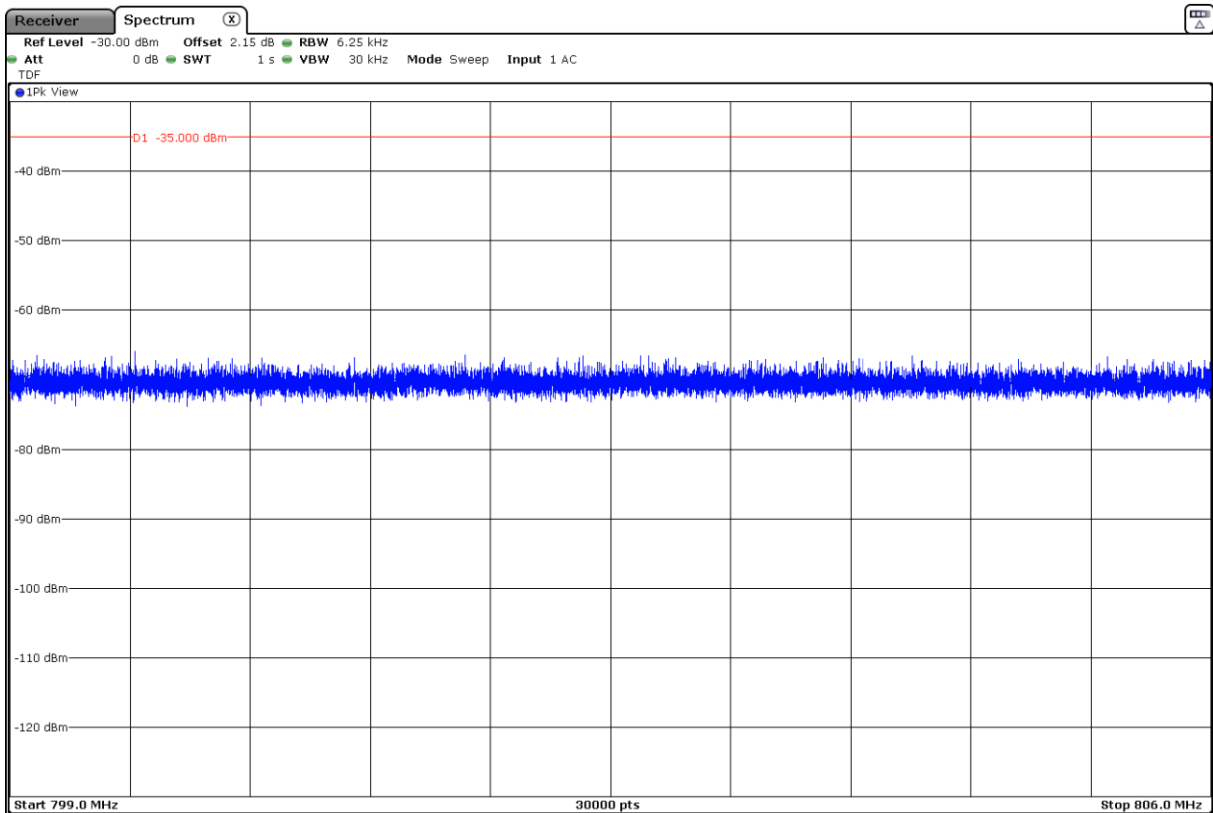


CHANNEL HIGHEST:


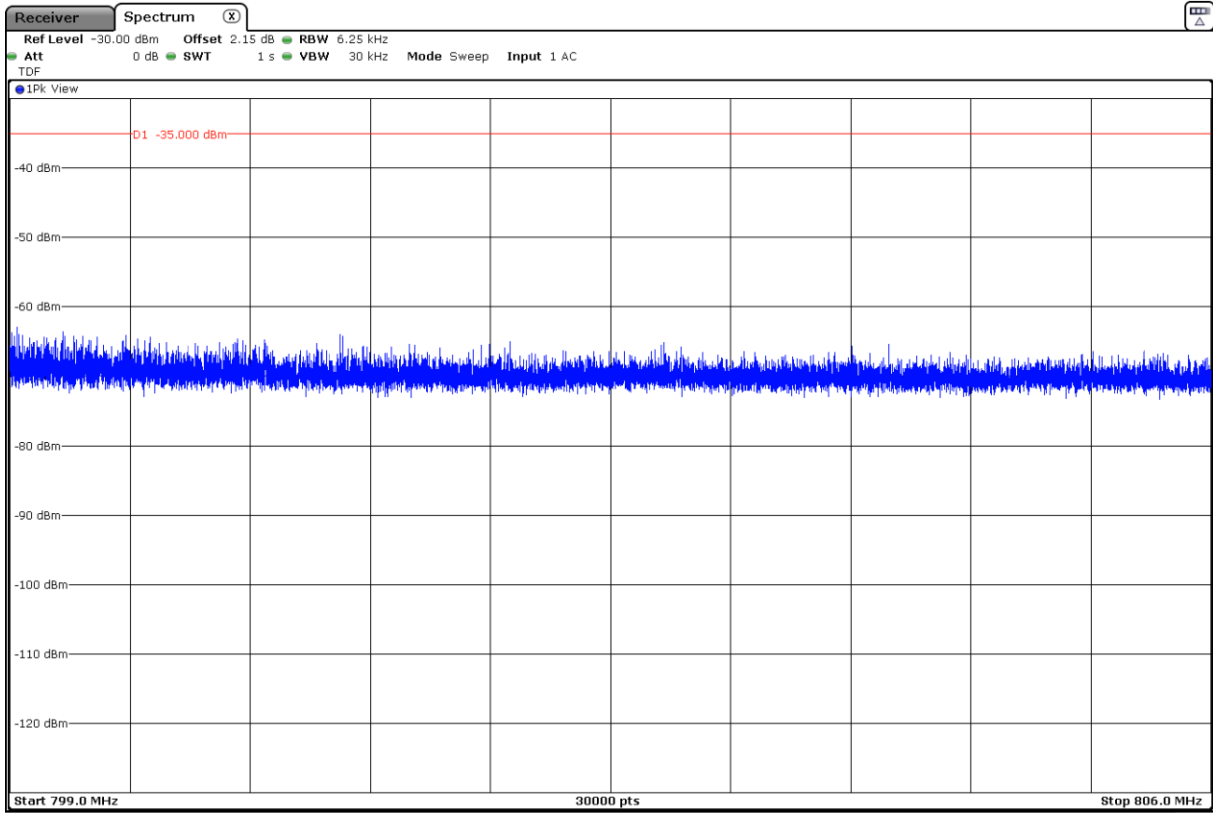


FREQUENCY RANGE 1 - 8 GHz



CHANNEL LOWEST:

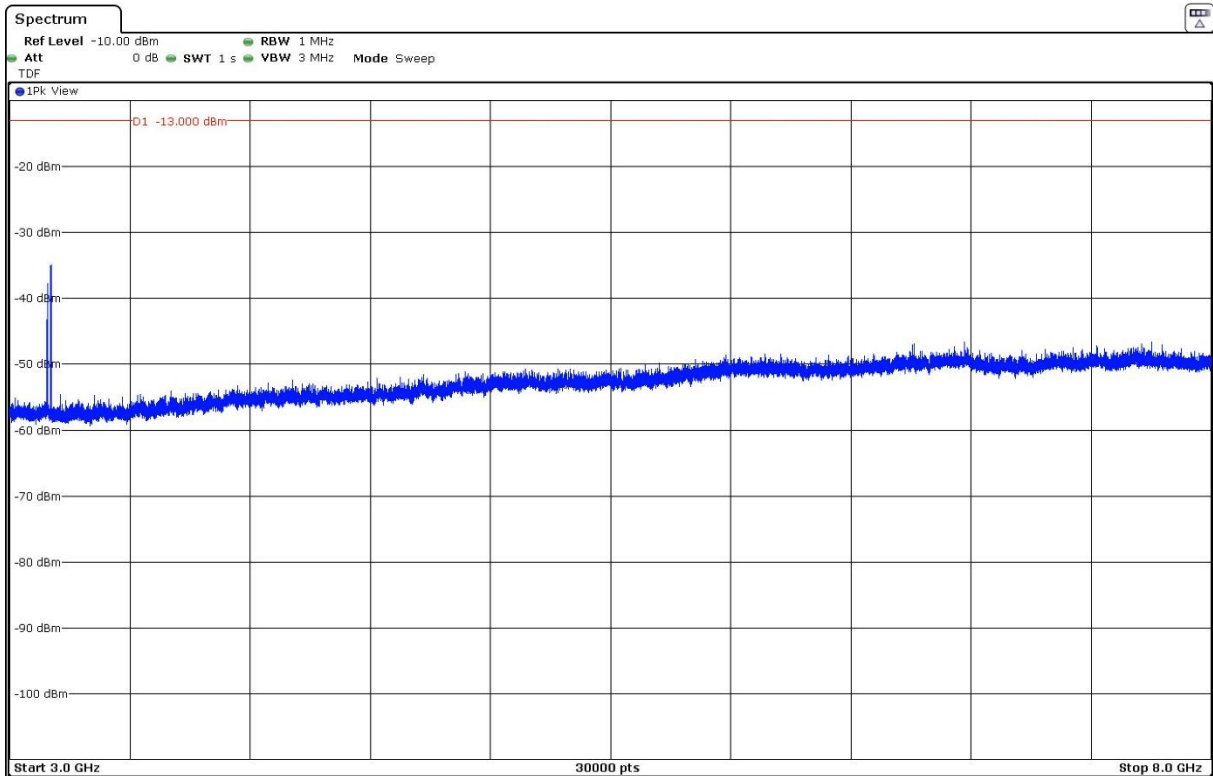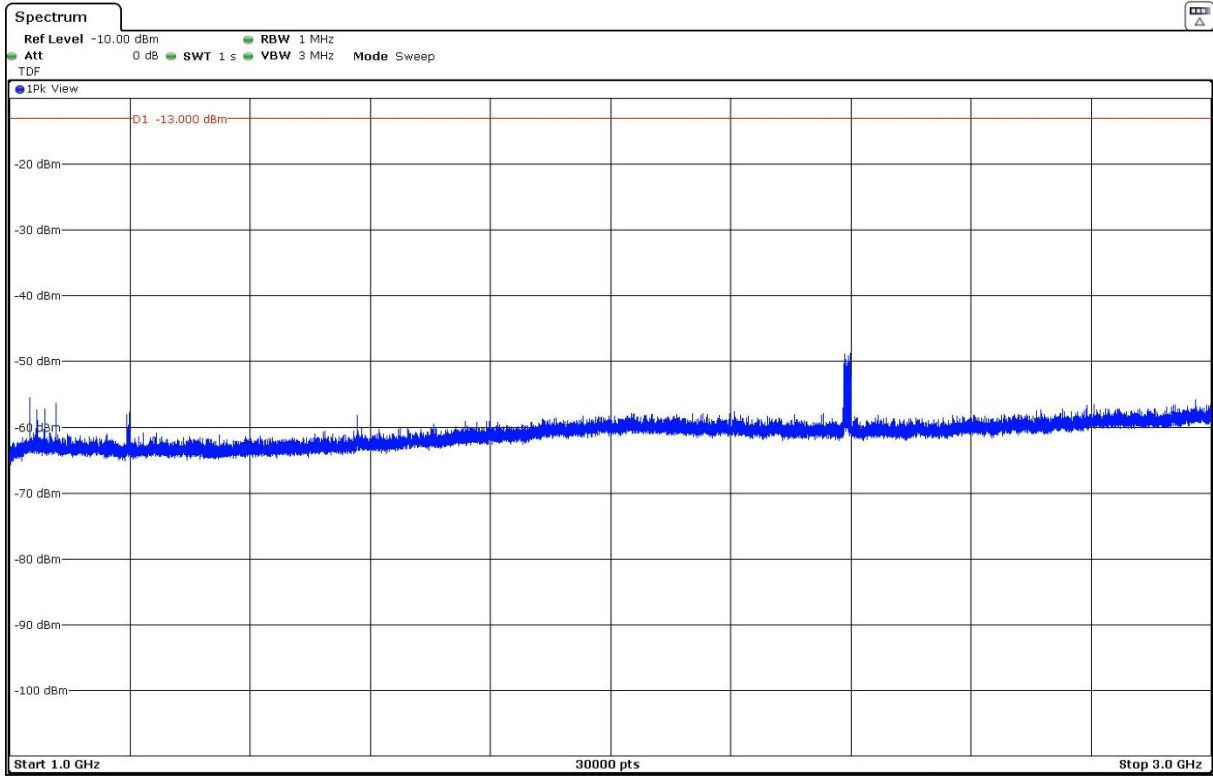

CHANNEL MIDDLE:

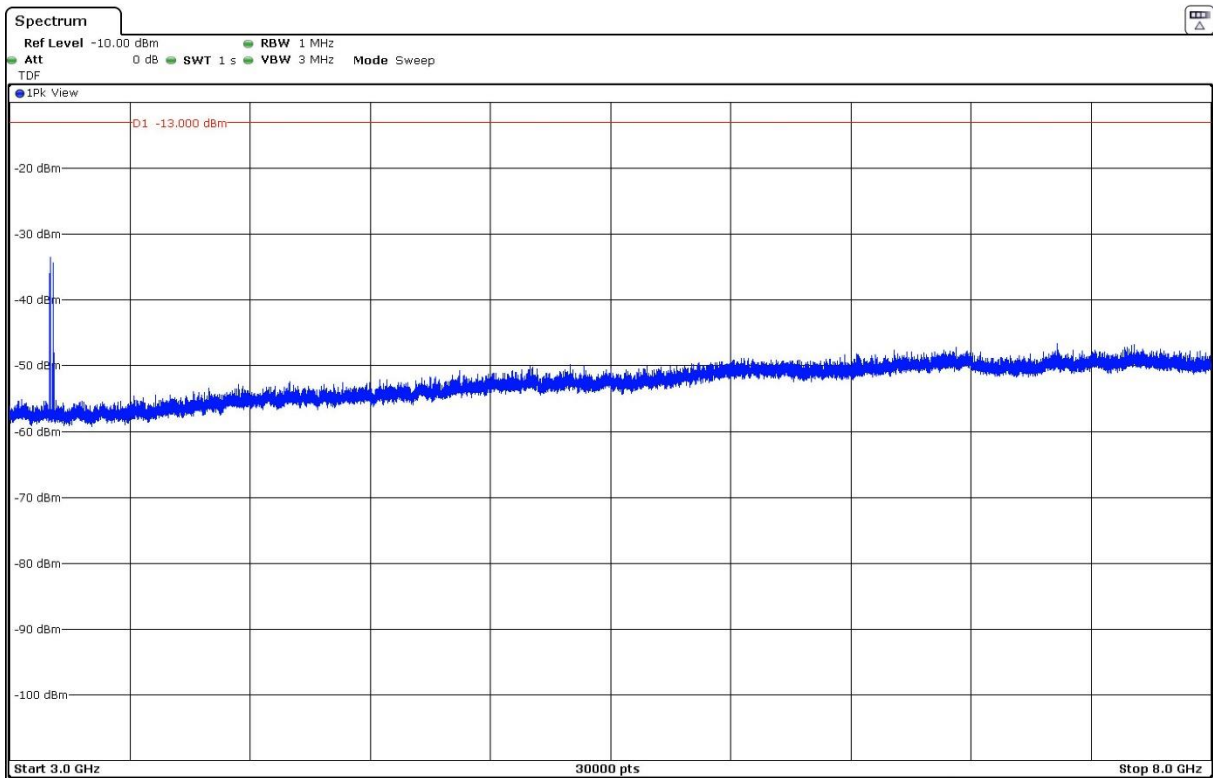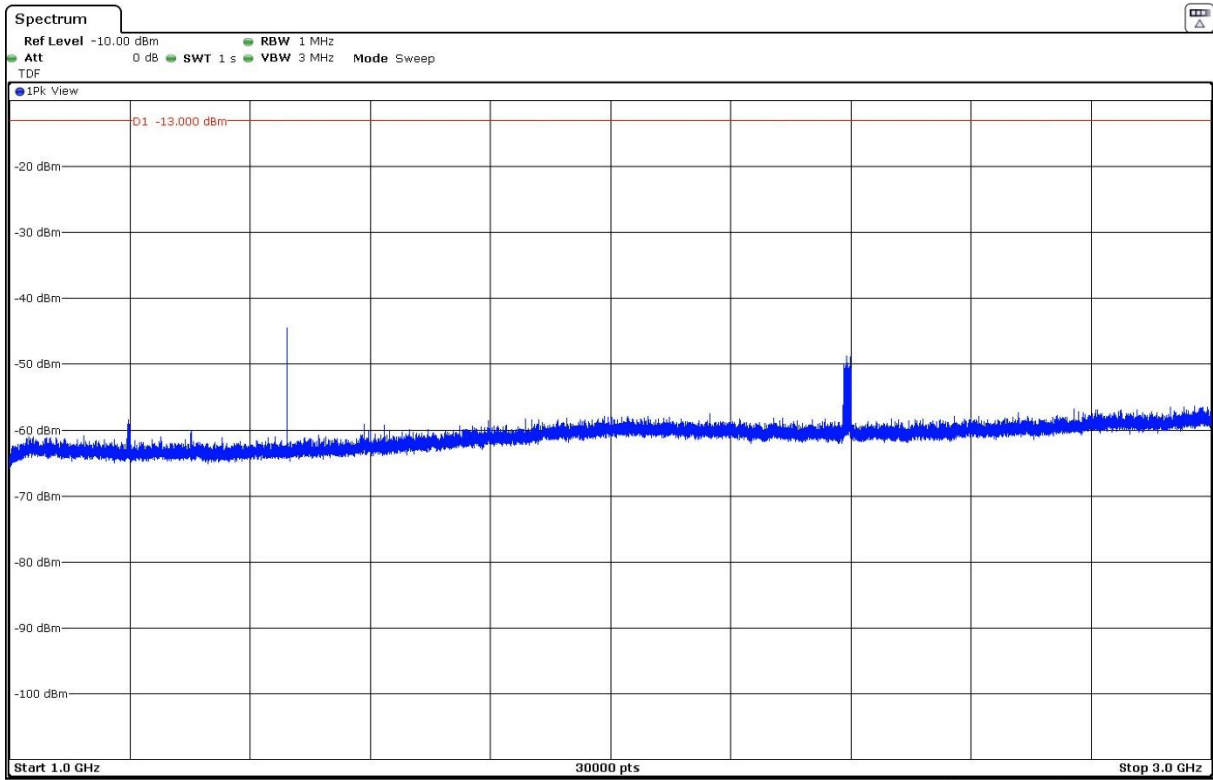


CHANNEL HIGHEST:

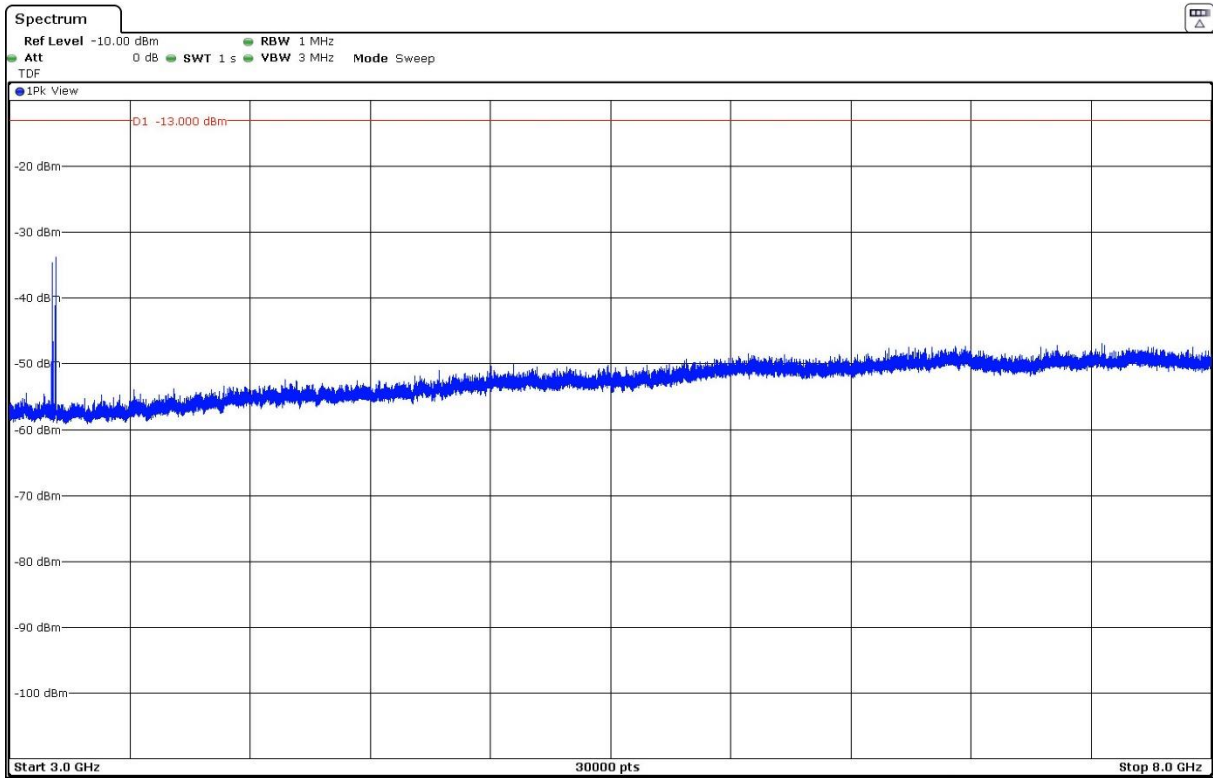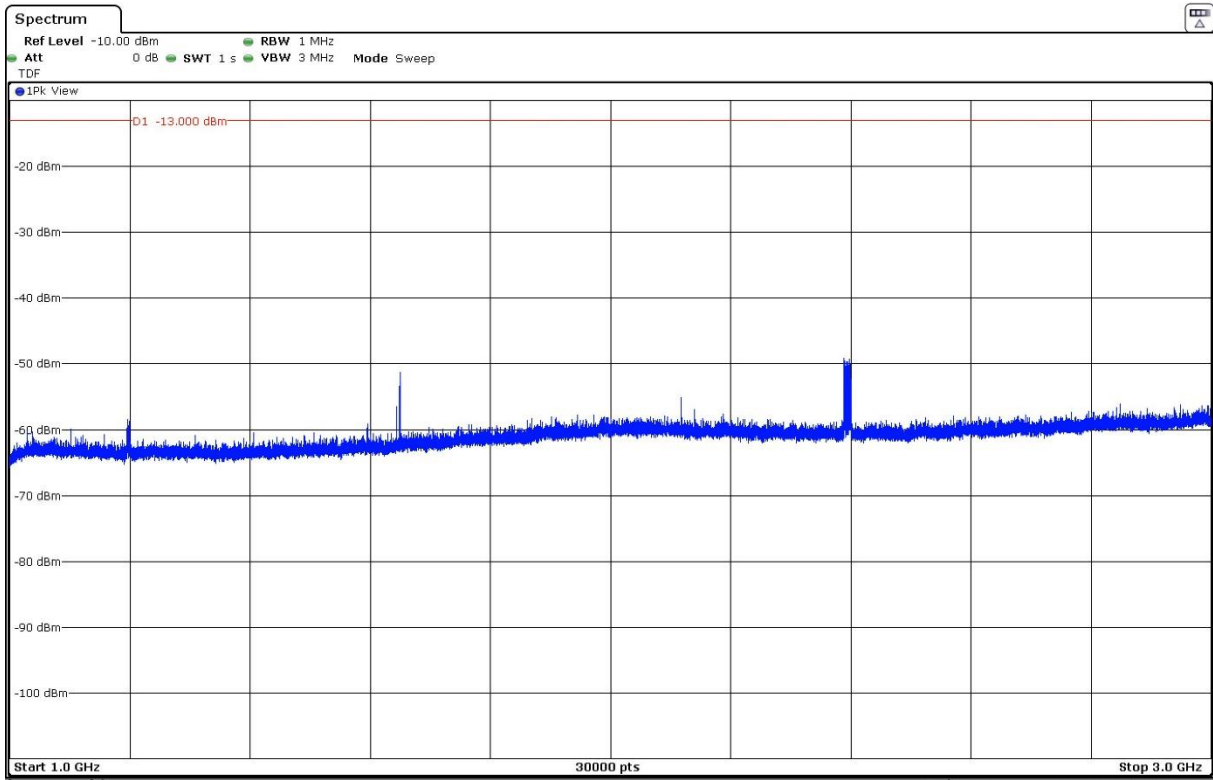


FREQUENCY RANGE 1559 - 1610 MHz


CHANNEL LOWEST:

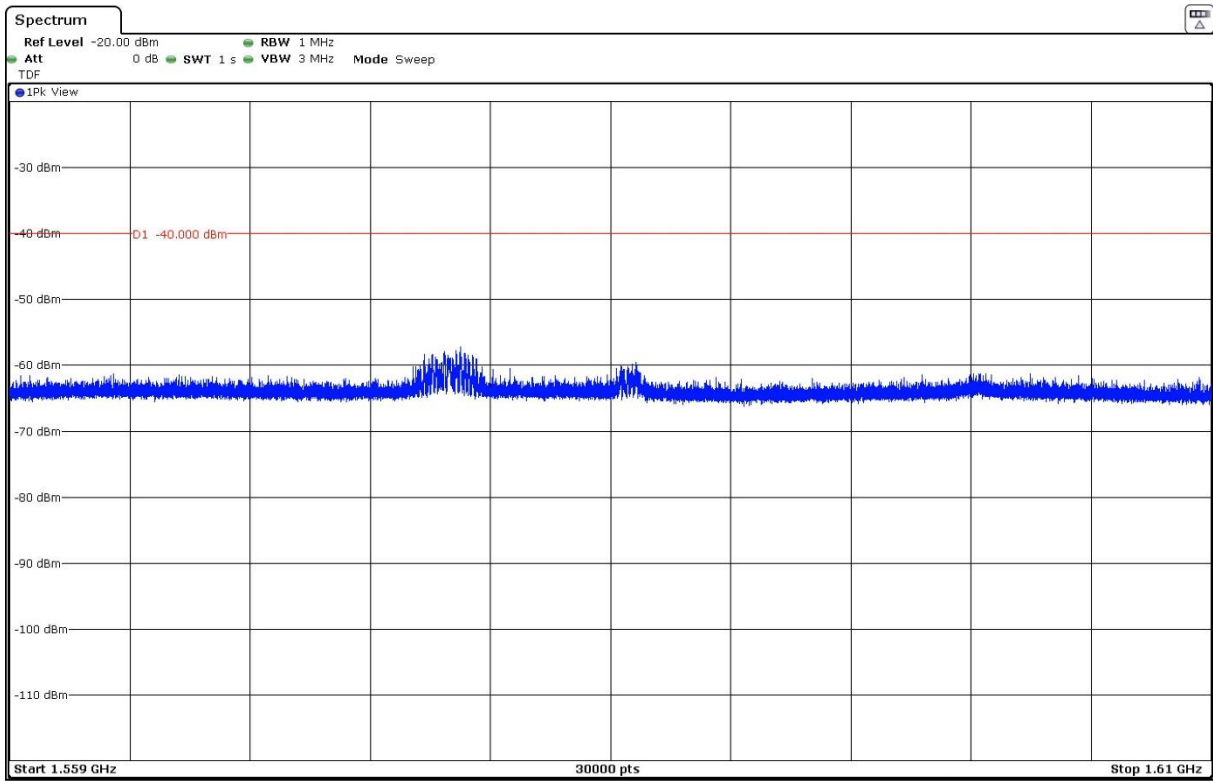

CHANNEL MIDDLE:

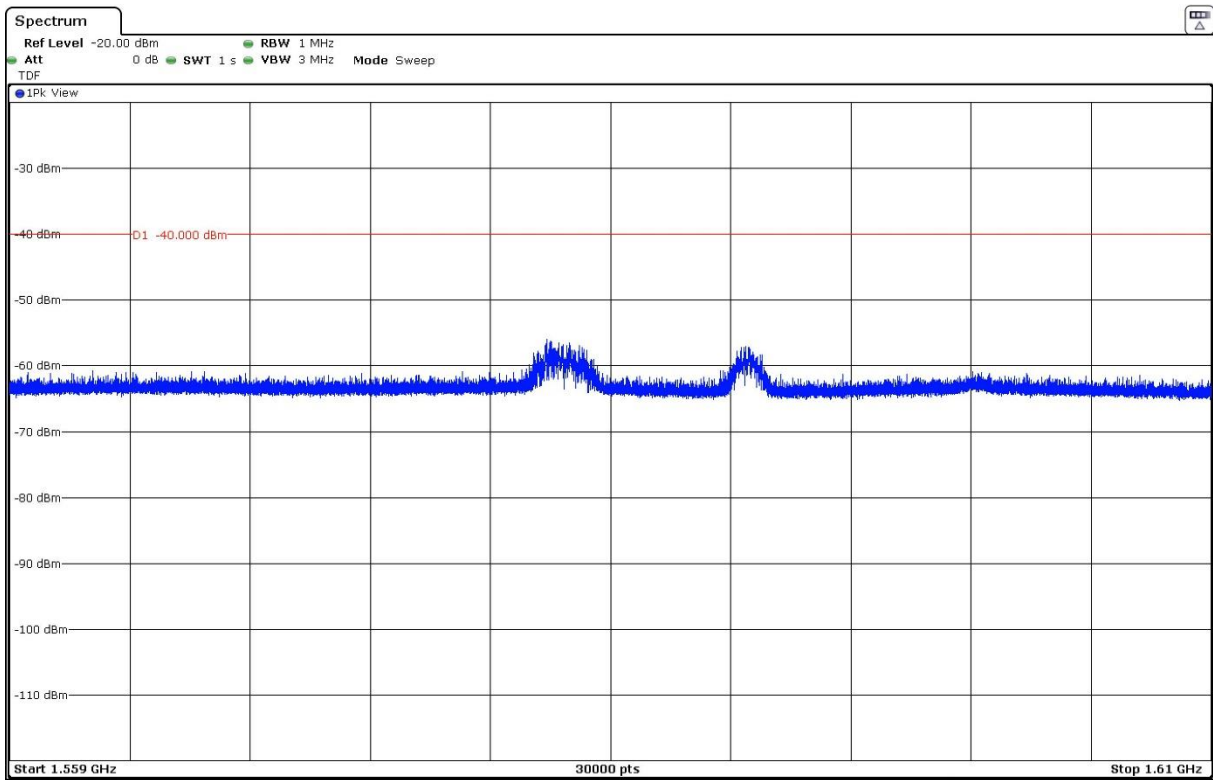

CHANNEL HIGHEST:

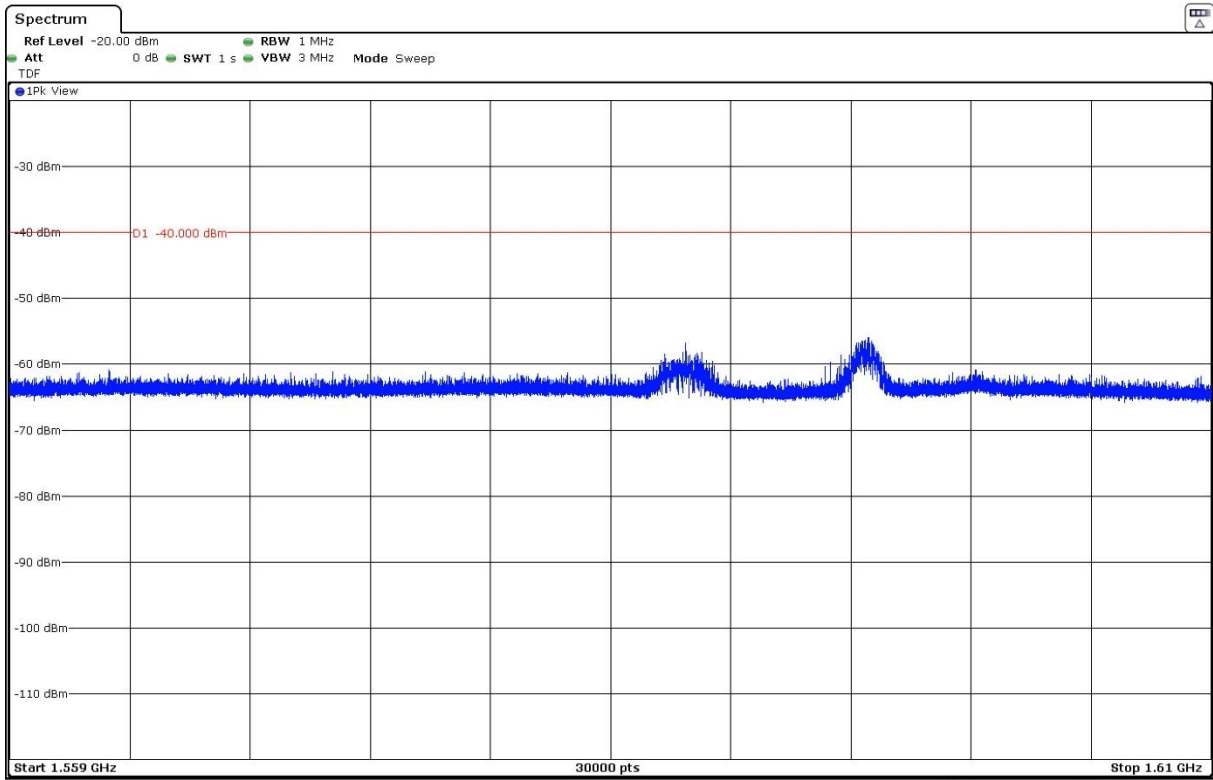


LTE Band 26:

814-824MHz Band:


FREQUENCY RANGE 30 MHz-1000 MHz.

CHANNEL: LOWEST

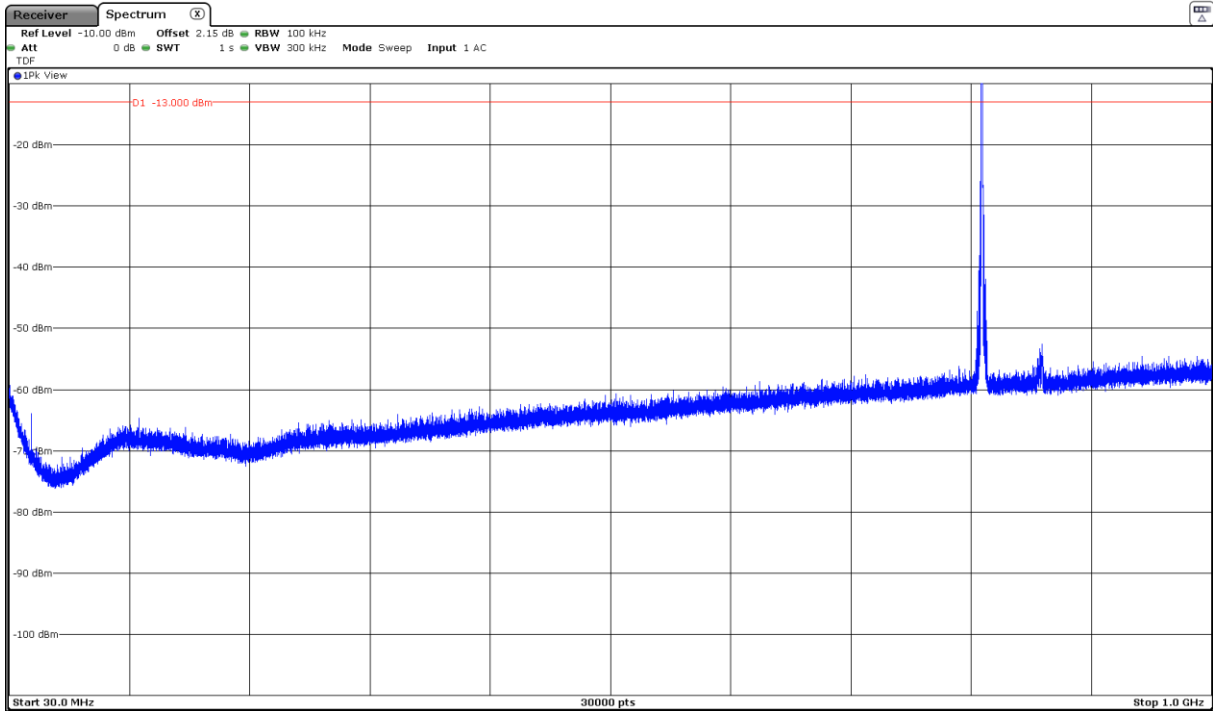


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

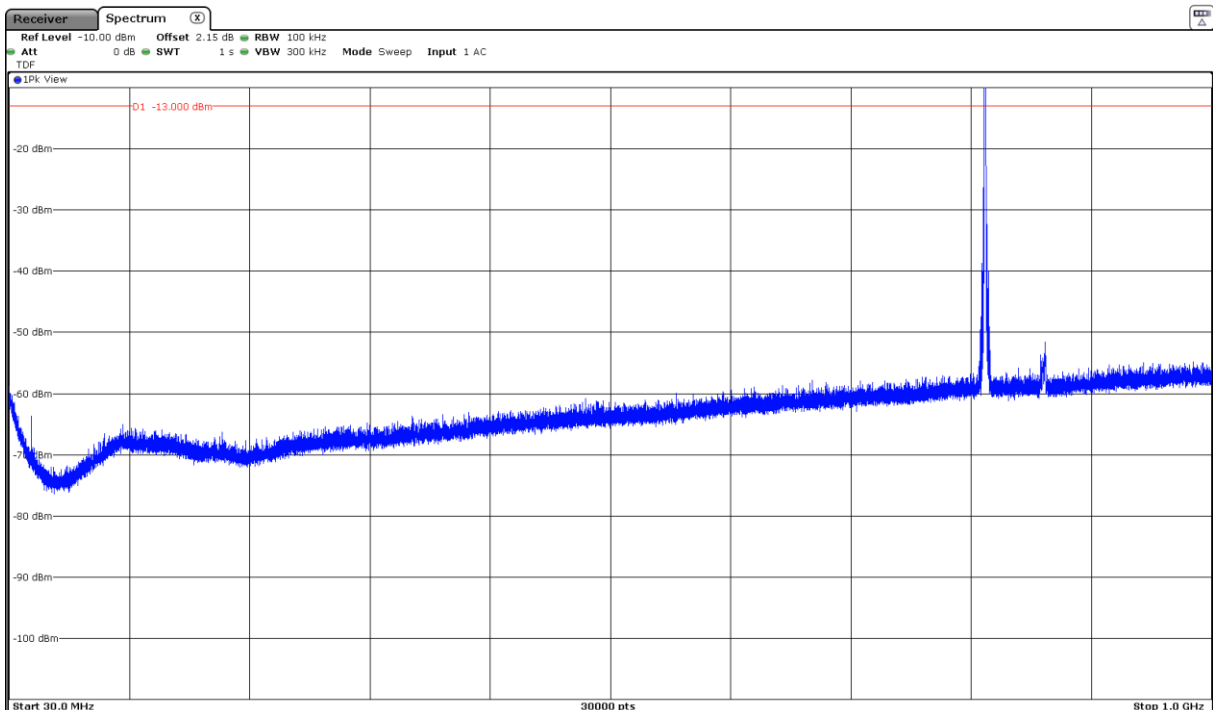

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

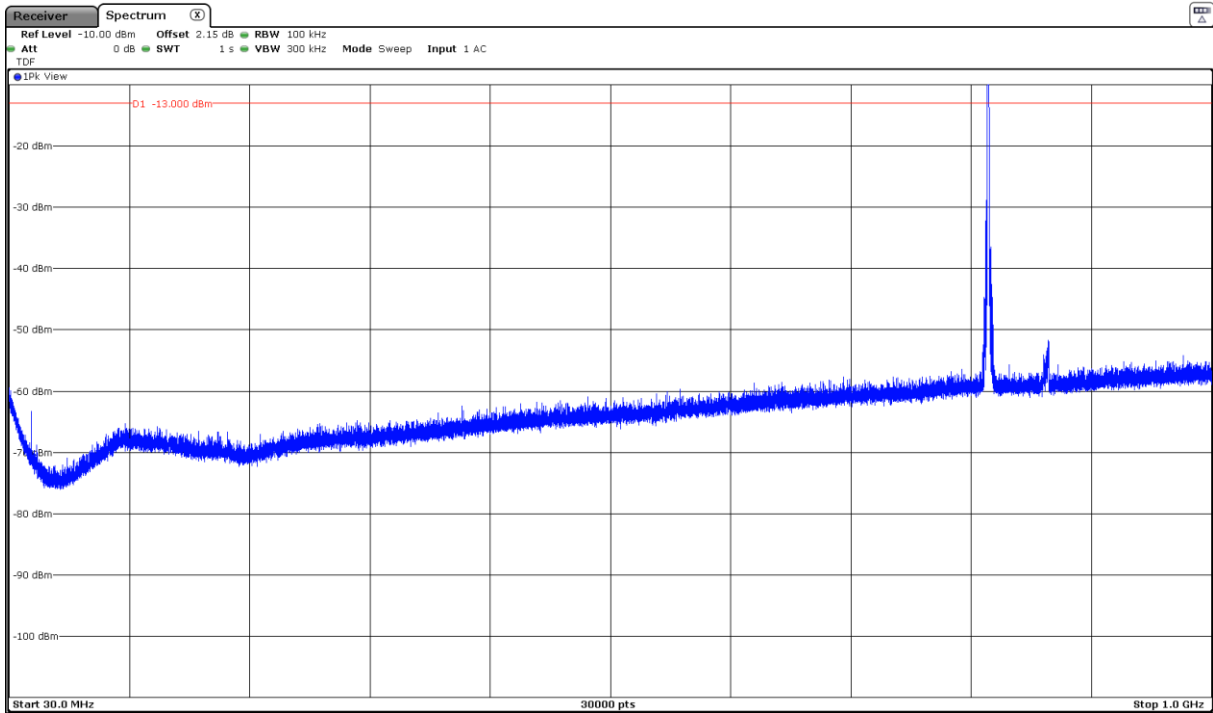


Note: The peak above the limit is the carrier frequency.

FREQUENCY RANGE 1 GHz to 3 GHz.


CHANNEL: LOWEST

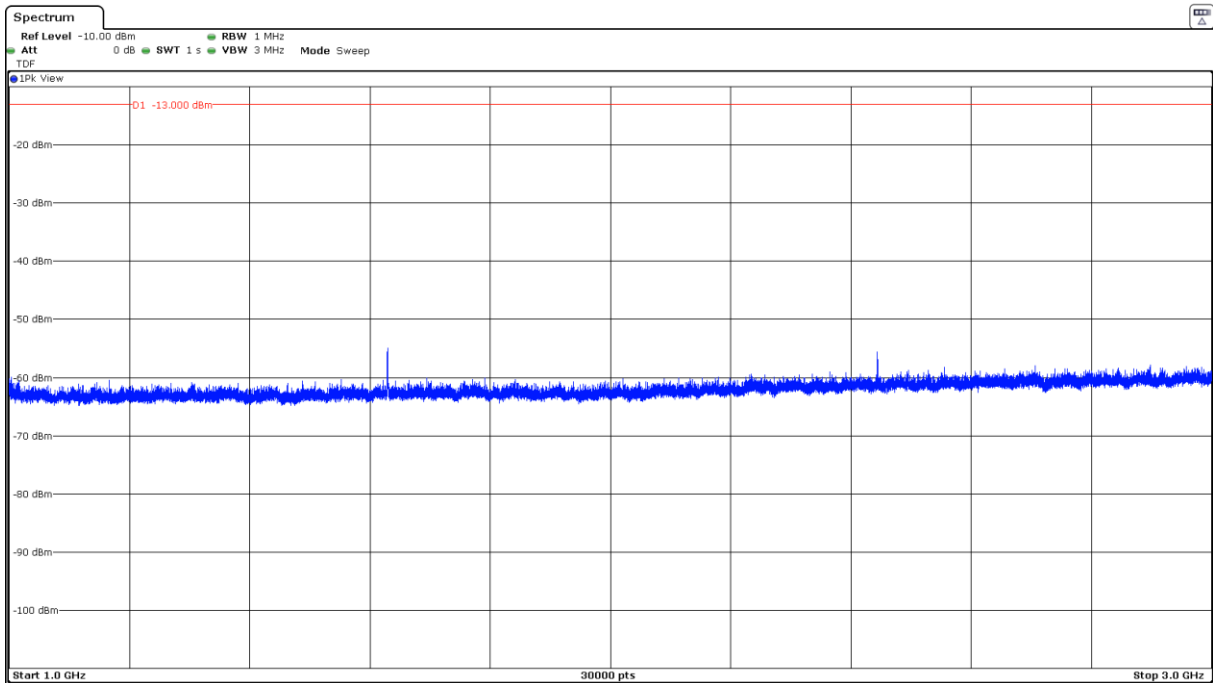

CHANNEL: MIDDLE

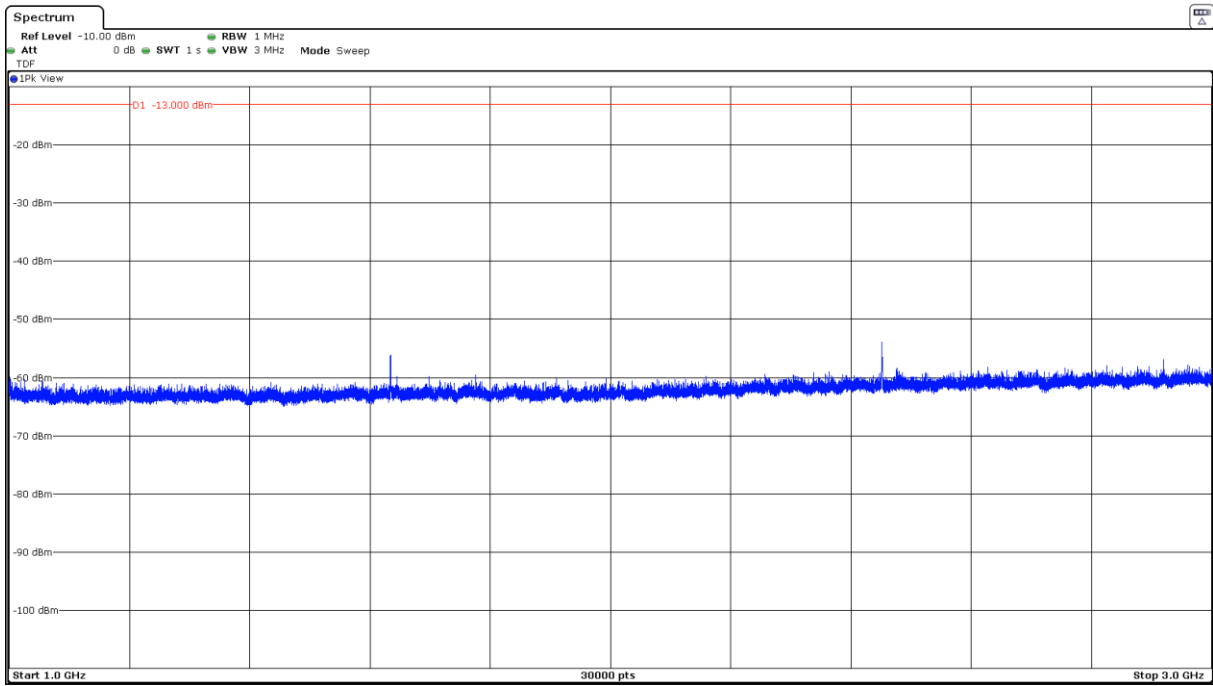


CHANNEL: HIGHEST

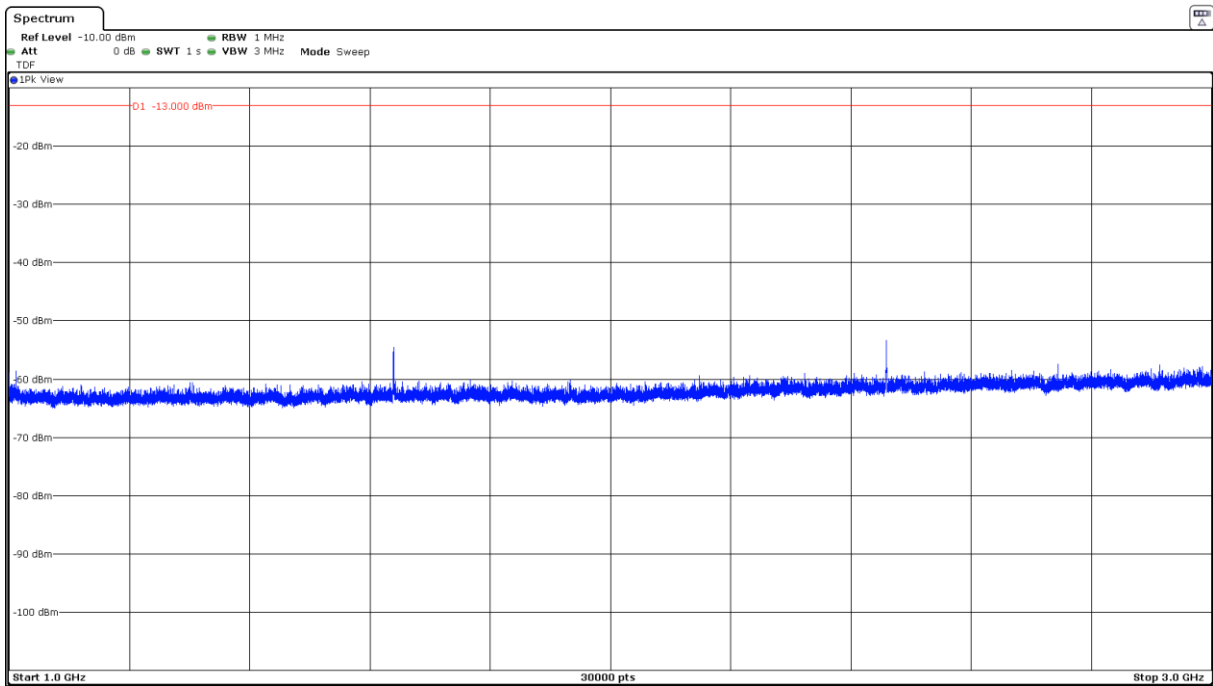


FREQUENCY RANGE 3 GHz to 10 GHz.


CHANNEL: LOWEST

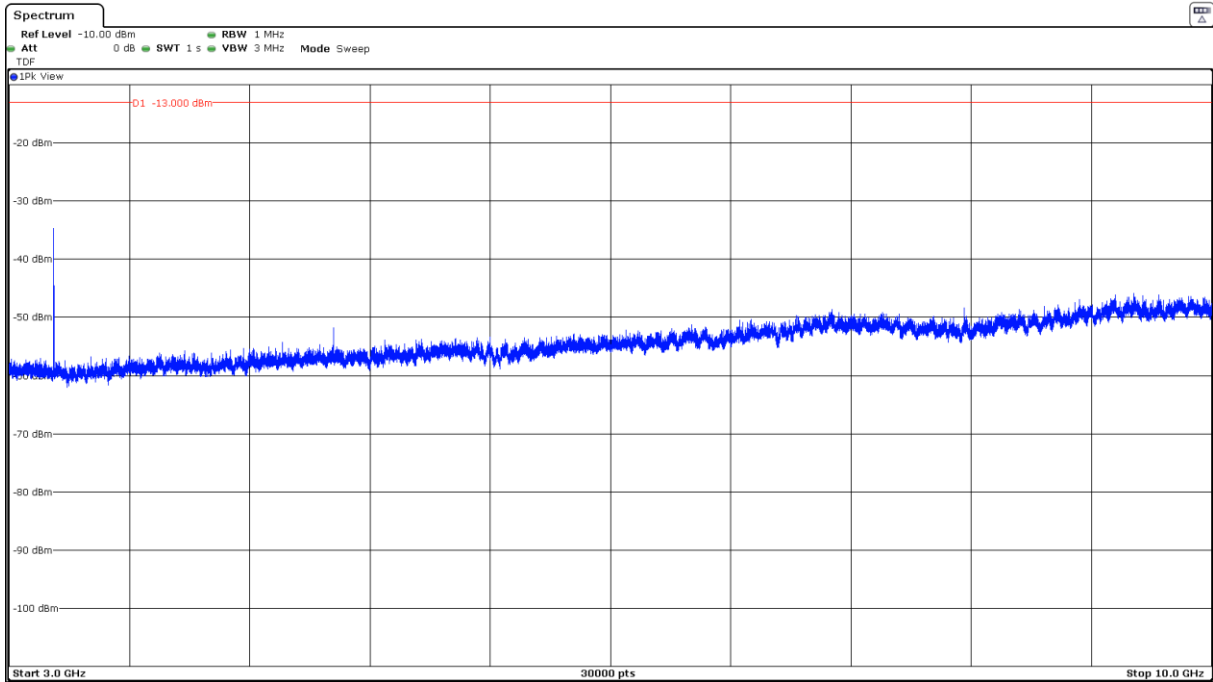

CHANNEL: MIDDLE

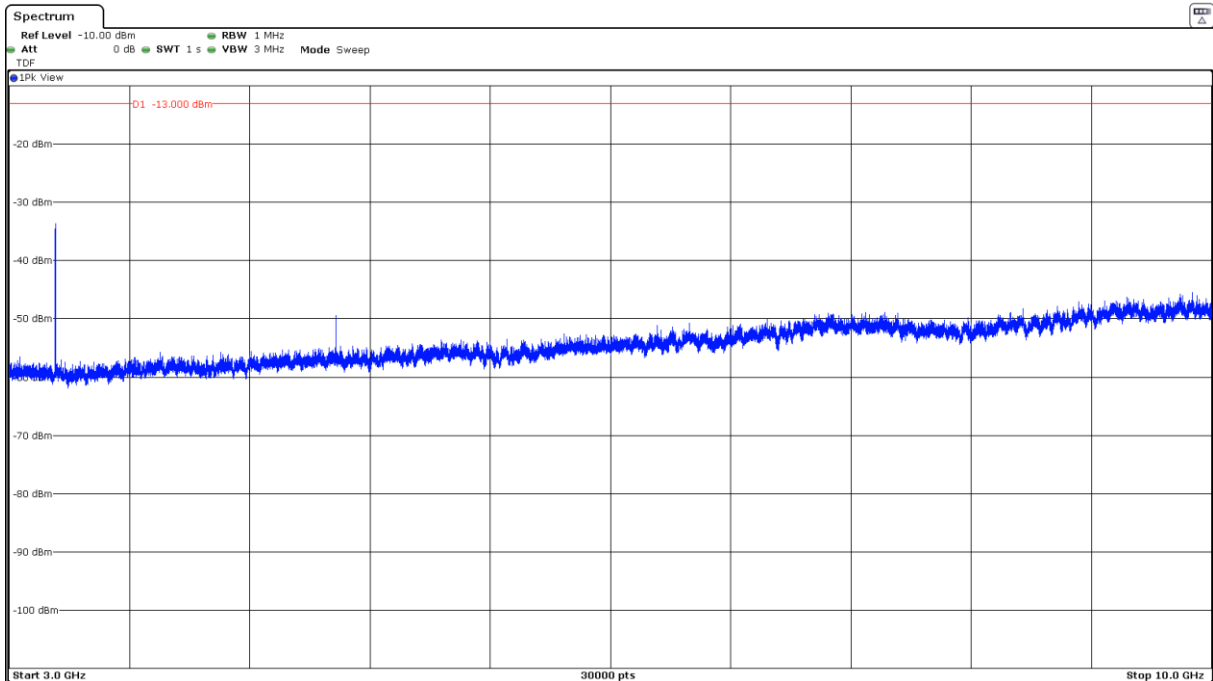

CHANNEL: HIGHEST

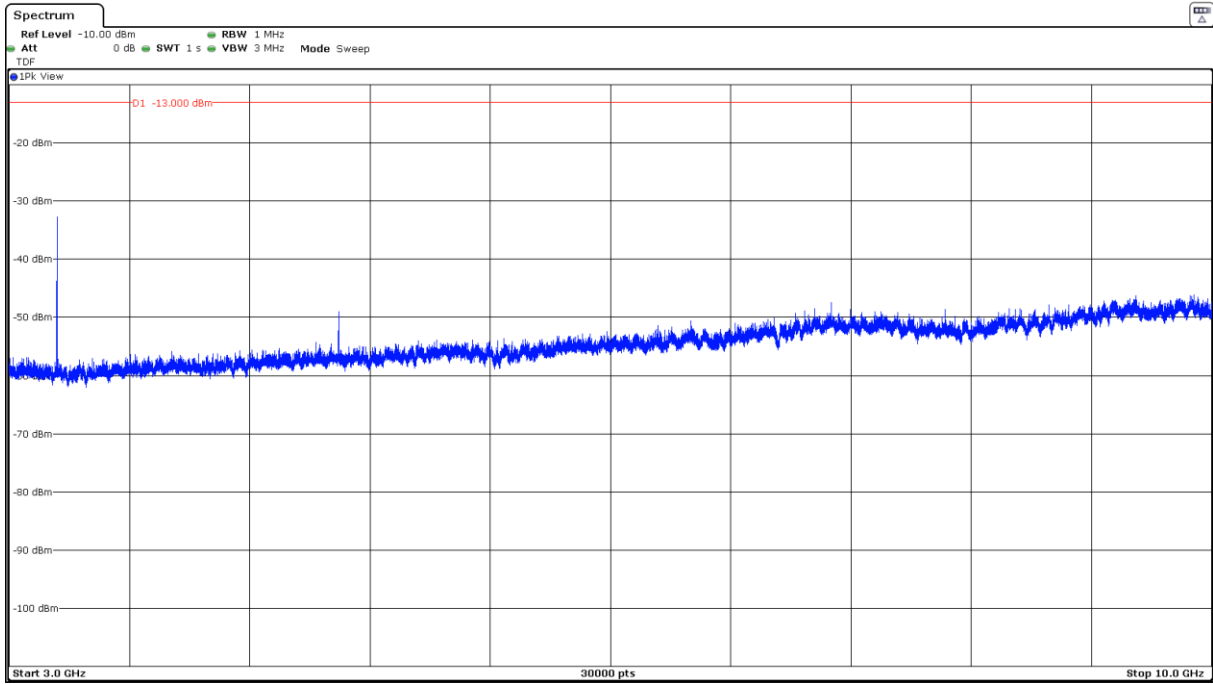


LTE Band 5:

824-849MHz Band:


FREQUENCY RANGE 30 MHz-1000 MHz.

CHANNEL: LOWEST

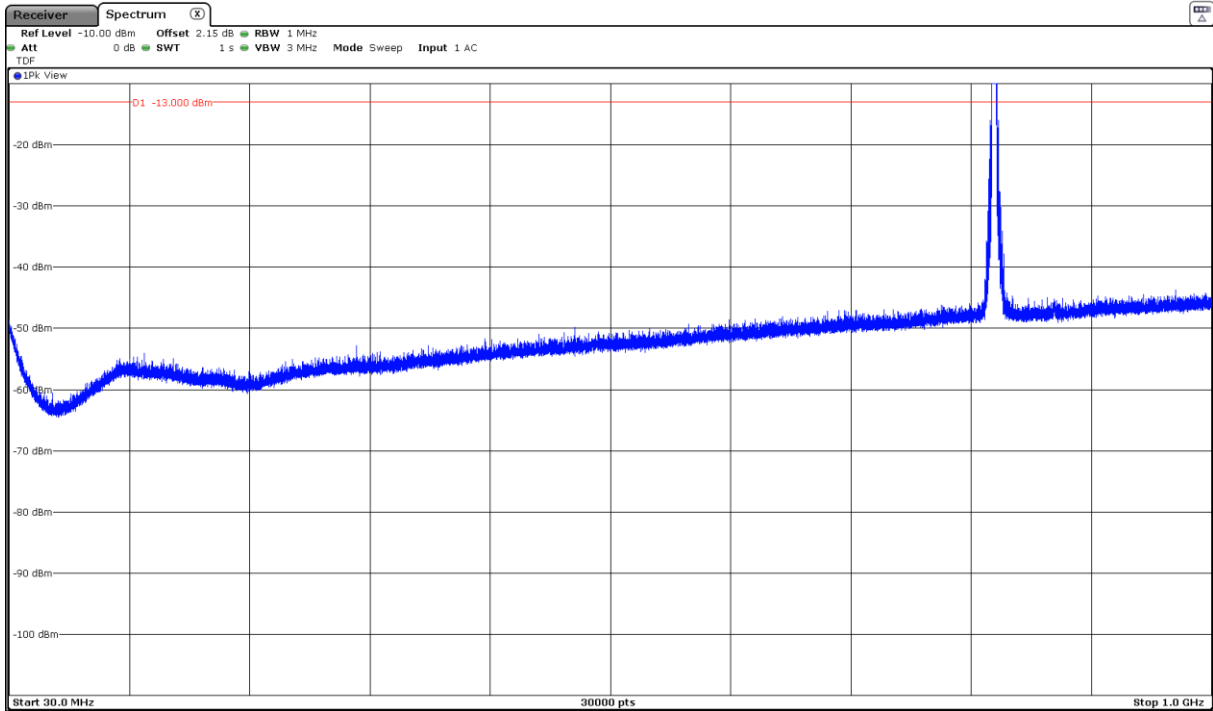


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

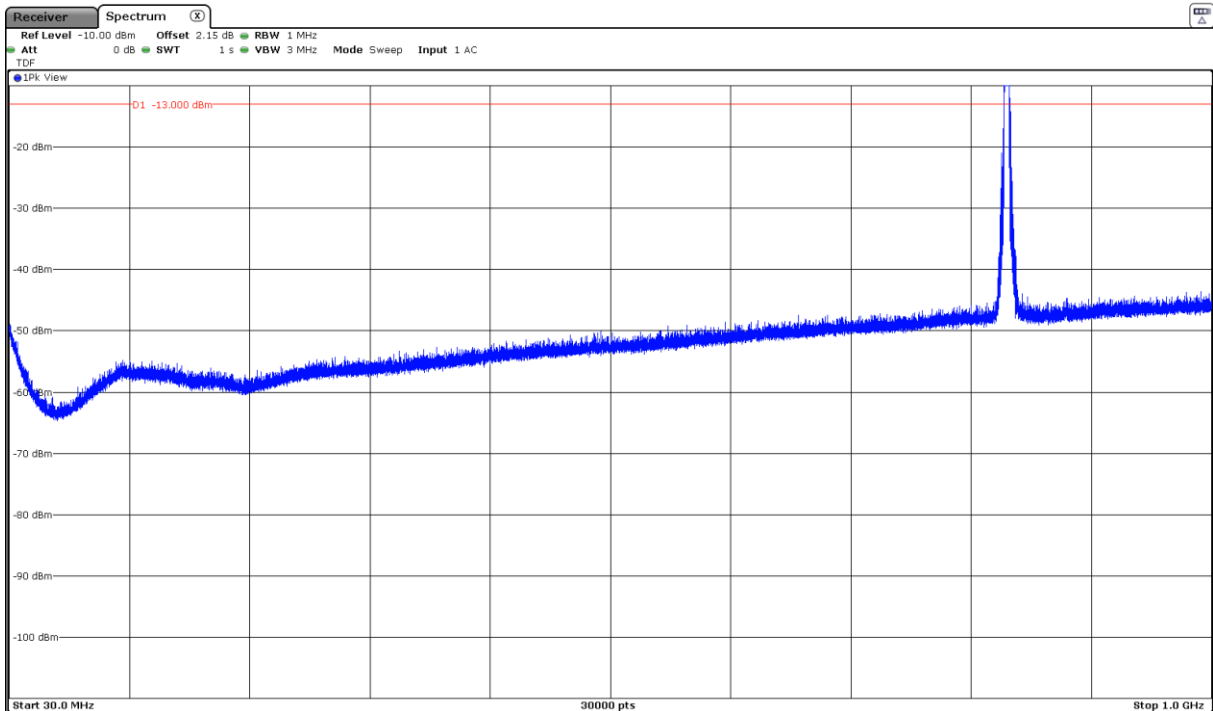

Note: The peak above the limit is the carrier frequency.

CHANNEL: HIGHEST

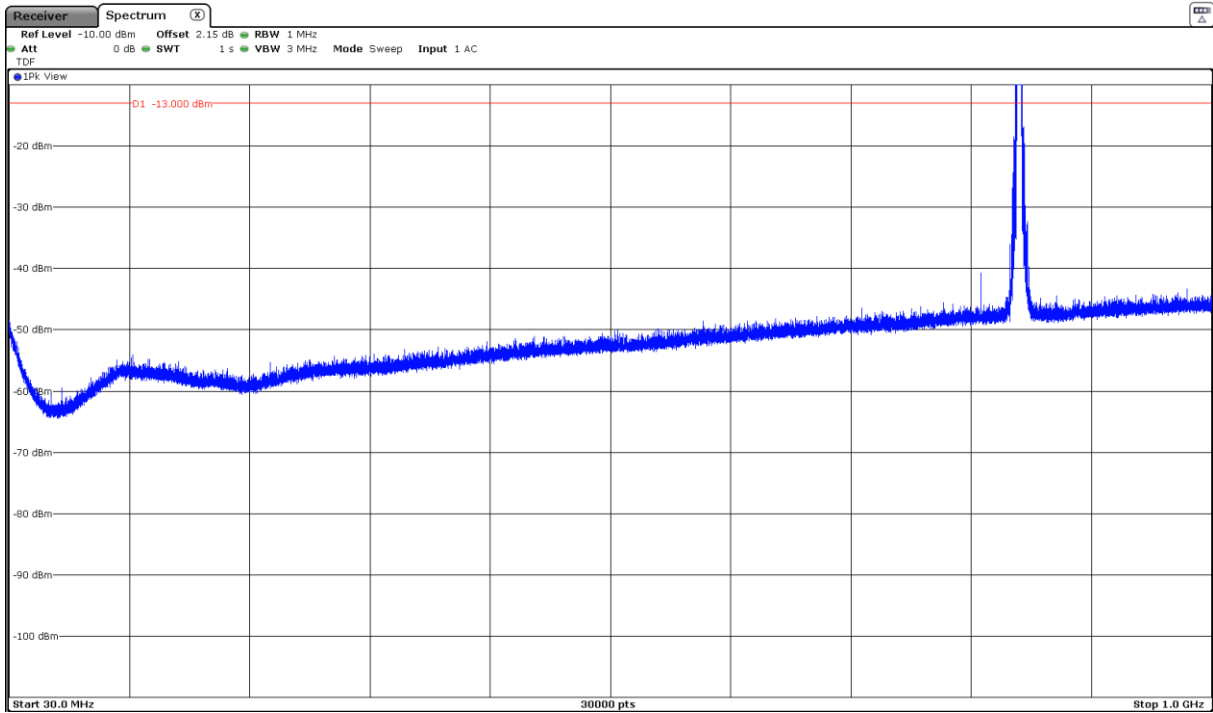


Note: The peak above the limit is the carrier frequency.


FREQUENCY RANGE 1 GHz to 3 GHz.

LTE QPSK MODULATION. BW=5 MHz


CHANNEL: LOWEST

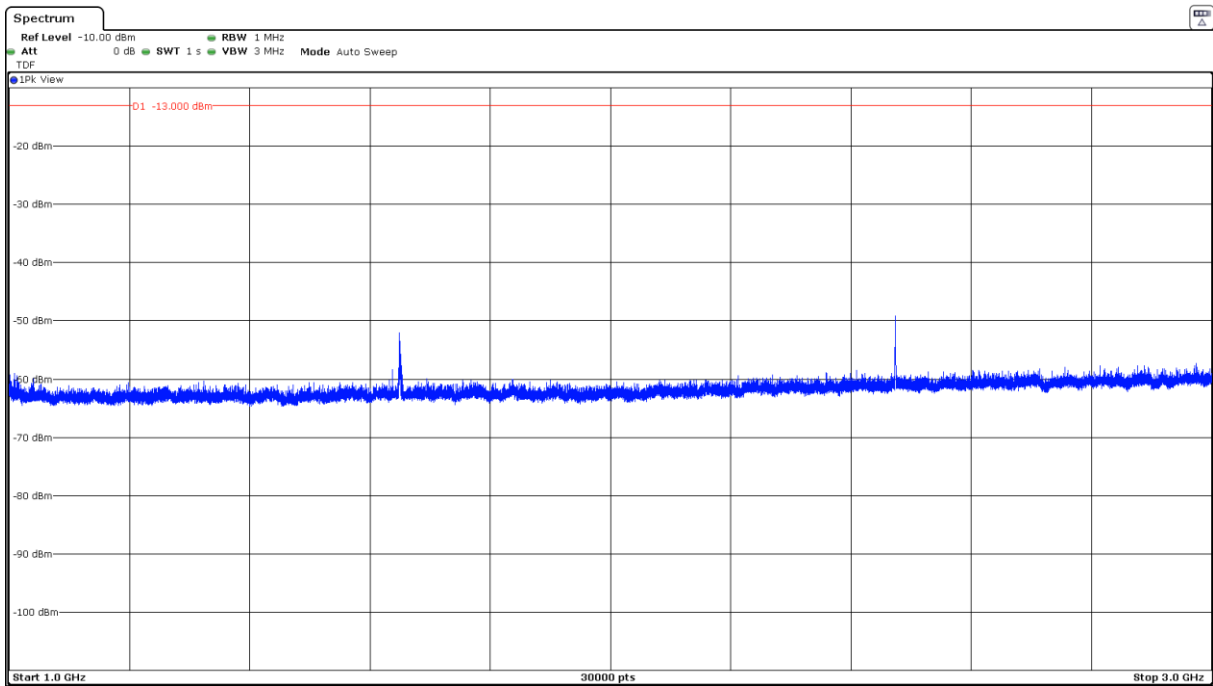

CHANNEL: MIDDLE

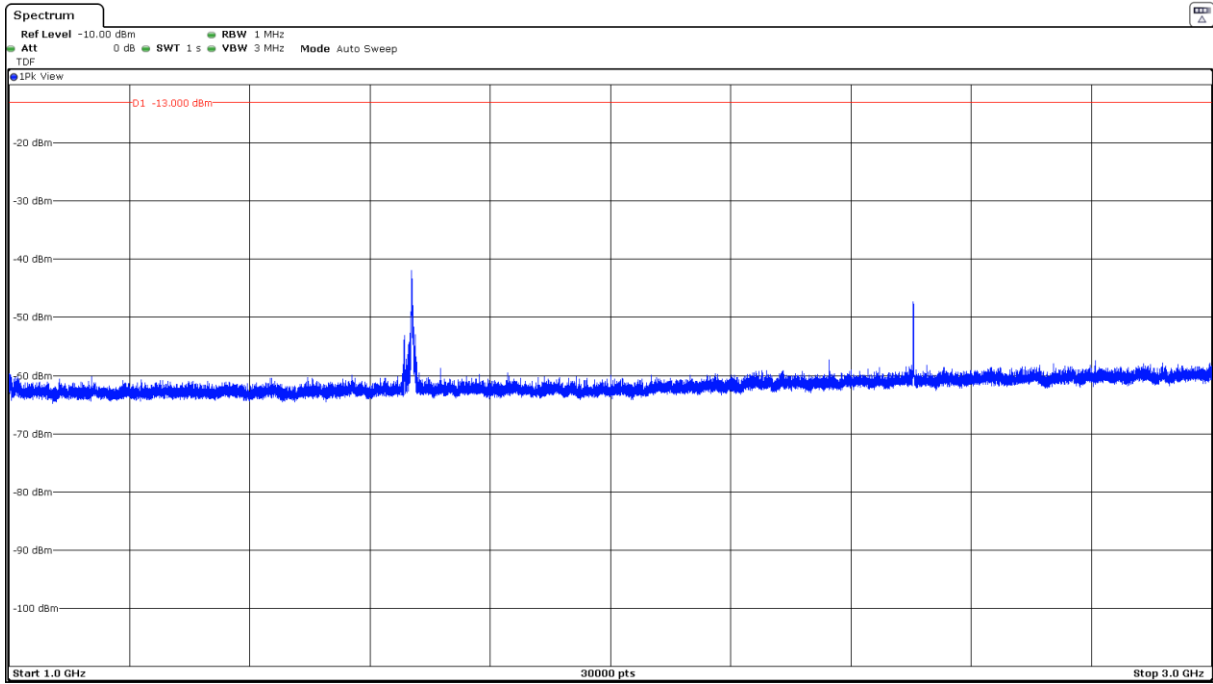


CHANNEL: HIGHEST

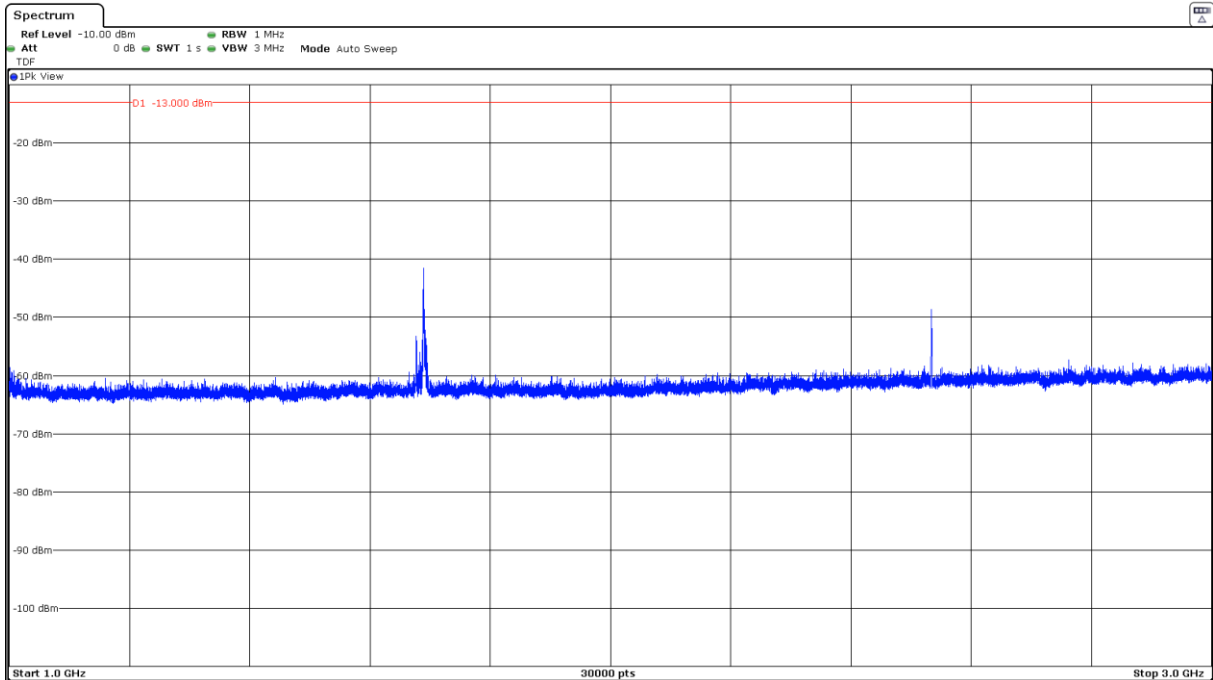


FREQUENCY RANGE 3 GHz to 10 GHz.

CHANNEL: LOWEST

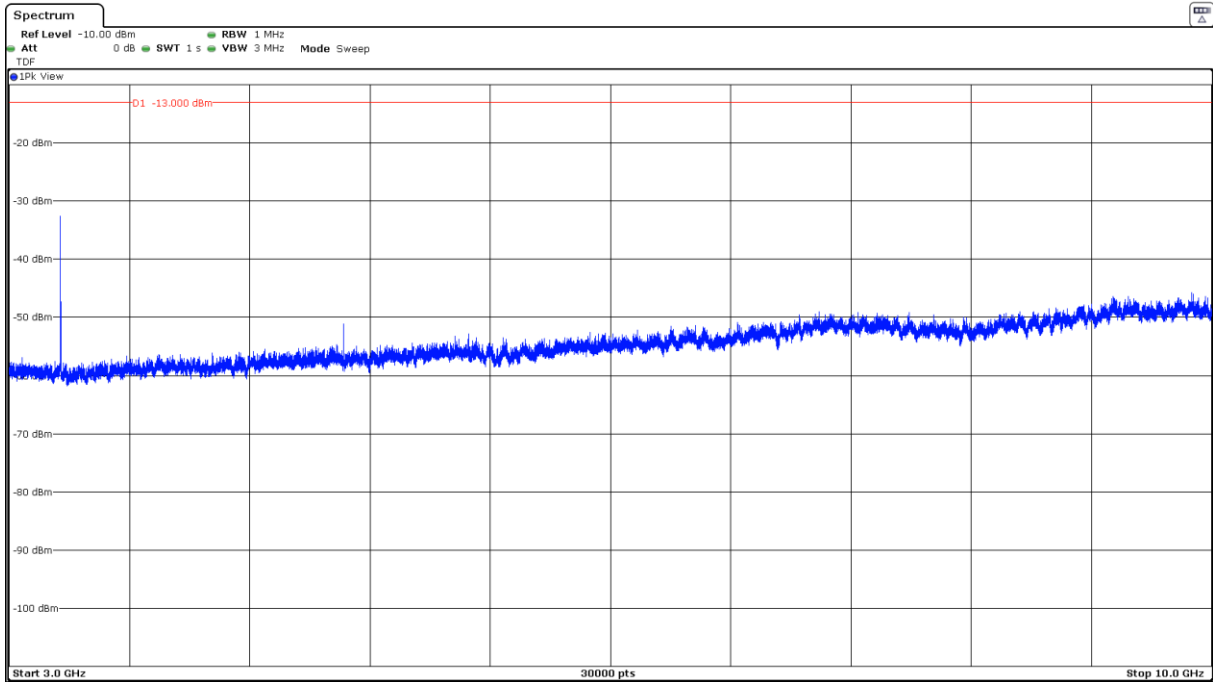

CHANNEL: MIDDLE

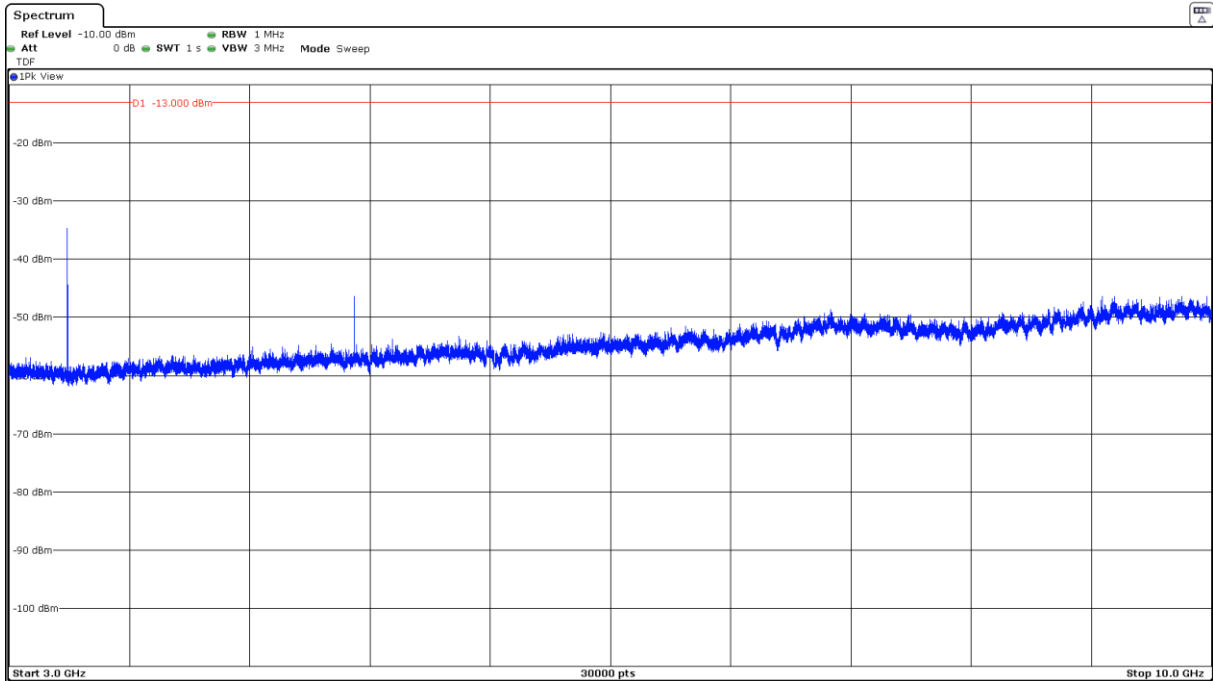

CHANNEL: HIGHEST

