


TEST REPORT

Applicant: MEIZU TECHNOLOGY CO., LTD.
Address: MEIZU Tech Bldg, Technology & Innovation Coast,
Zhuhai, 519085, Guangdong, China
Equipment Type: Mobile Phone
Model Name: M411H
Brand Name: MEIZU
FCC ID: 2ANQ6-M411H
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Apr. 25, 2024
Test Date: May 13, 2024 - May 15, 2024
Date of Issue: Jun. 19, 2024

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Xiong Chong**Checked by:** Xia Long**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jun. 19, 2024</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information	4
2.2	Manufacturer Information	4
2.3	General Description for Equipment under Test (EUT)	4
2.4	Ancillary Equipment	5
2.5	Technical Information	5
3	SUMMARY OF TEST RESULTS	6
3.1	Test Standards	6
3.2	Verdict	6
3.3	Test Uncertainty	6
4	GENERAL TEST CONFIGURATIONS	7
4.1	Test Enclosure List	7
4.2	Test Configurations	7
4.3	Test Setups	8
5	TEST ITEMS	10
5.1	Emission Tests	10
ANNEX A	TEST RESULTS	15
A.1	Radiated Emission	15
A.2	Conducted Emission, AC Ports	22
ANNEX B	TEST SETUP PHOTOS	25
ANNEX C	EUT EXTERNAL PHOTOS	25
ANNEX D	EUT INTERNAL PHOTOS	25

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	MEIZU TECHNOLOGY CO., LTD.
Address	MEIZU Tech Bldg, Technology & Innovation Coast, Zhuhai, 519085, Guangdong, China

2.2 Manufacturer Information

Manufacturer	MEIZU TECHNOLOGY CO., LTD.
Address	MEIZU Tech Bldg, Technology & Innovation Coast, Zhuhai, 519085, Guangdong, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	M411H
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V1.0
Software Version	Android 14
Dimensions (Approx.)	167.8*77.4*9.1mm
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	BA411
	Serial No.	N/A
	Capacity	Rated: 5850mAh/22.64Wh Typical: 6000mAh/23.22Wh
	Rated Voltage	3.87 V
	Limit Charge Voltage	4.45 V
	Manufacturer	Guangdong Fenghua New Energy Co., Ltd.
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	ES166D-US-1200150 (US Plug)
	Serial No.	N/A
	Rated Input	100-240V~, 50/60Hz, 0.6A
	Rated Output	5.0V $\overline{=}$ 3.0A, 15.0W or 9.0V $\overline{=}$ 2.0A, 18.0W or 12.0V $\overline{=}$ 1.5A, 18.0W
	Manufacturer	SHENZHEN EAST SUN ELECTRONIC CO., LTD
Ancillary Equipment 3	Type-C Cable	
	Model No.	S0610U
	Length (Approx.)	1.0 m
	Manufacturer	HEYUAN HENGYUE COMMUNICATION TECHNOLOGY CO., LTD.

2.5 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7/12/17/26/66 LTE TDD Band 38/41 Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) 5G WIFI 802.11a, 802.11n(HT20/40) and 802.11ac(VHT20/40/80) U-NII-1/2A/2C/3, GPS, GLONASS, Galileo, BDS, FM Receiver
Classification of equipment	Class B
The highest internal frequency of EUT	5.85 GHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.2 dB
Radiated emissions (30 MHz-1 GHz)-966#2	4.4 dB
Radiated emissions (1 GHz-18 GHz)-966#2	5.0 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Laptop	HONOR	KPRC-W10	N/A	N/A	N/A	☒
Earphone	OPPO	N/A	N/A	1m	N/A	☒
SD Card	Kingston	SDG3/64GB	N/A	N/A	N/A	☒

4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Video Playback Test Mode</u> EUT + Battery + Type-C Cable + Adapter + SD Card + Earphone
Mode 2	<u>The Camera Test Mode</u> EUT + Battery + Type-C Cable + Adapter + SD Card + Earphone
Mode 3	<u>The FM RX Test Mode</u> EUT + Battery + Type-C Cable + Adapter + SD Card + Earphone + FM RX
Mode 4	<u>The Video Playback Test Mode(Without Earphone)</u> EUT + Battery + Type-C Cable + Adapter + SD Card
Mode 5	<u>The Data Transmission Test Mode</u> EUT + Battery + Type-C Cable + SD Card + Earphone + Laptop

Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 5	5
Conducted Emission, AC Ports	Mode 1~Mode 5	1


Note: All operation modes were tested, but only test data of the worst mode was presented in this report.

4.3 Test Setups


Test Setup 1

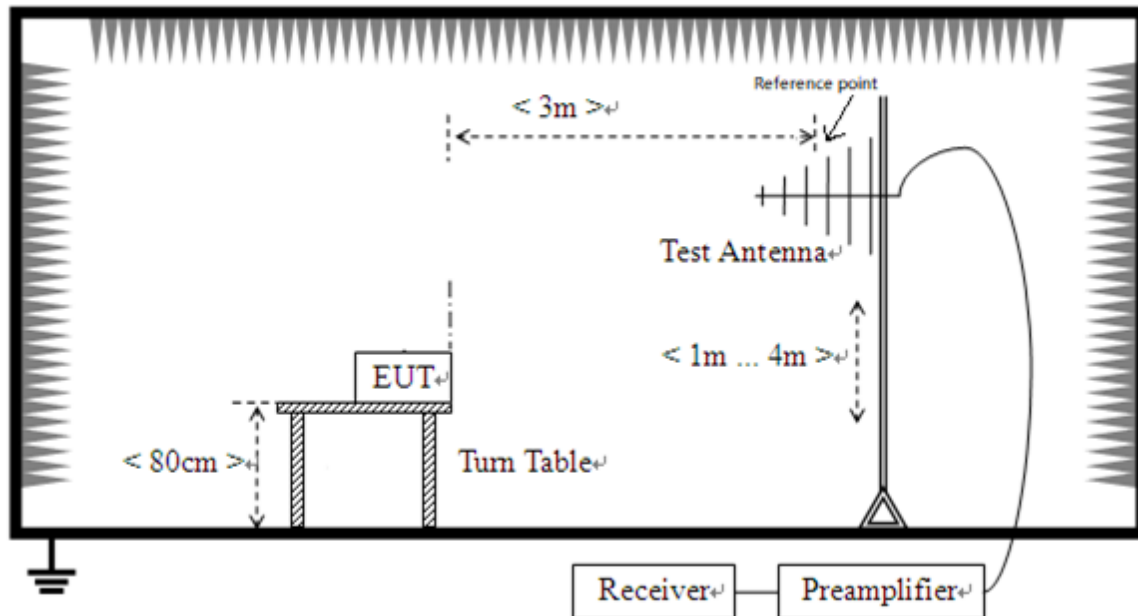

Radiated Emission (30 MHz-1 GHz)

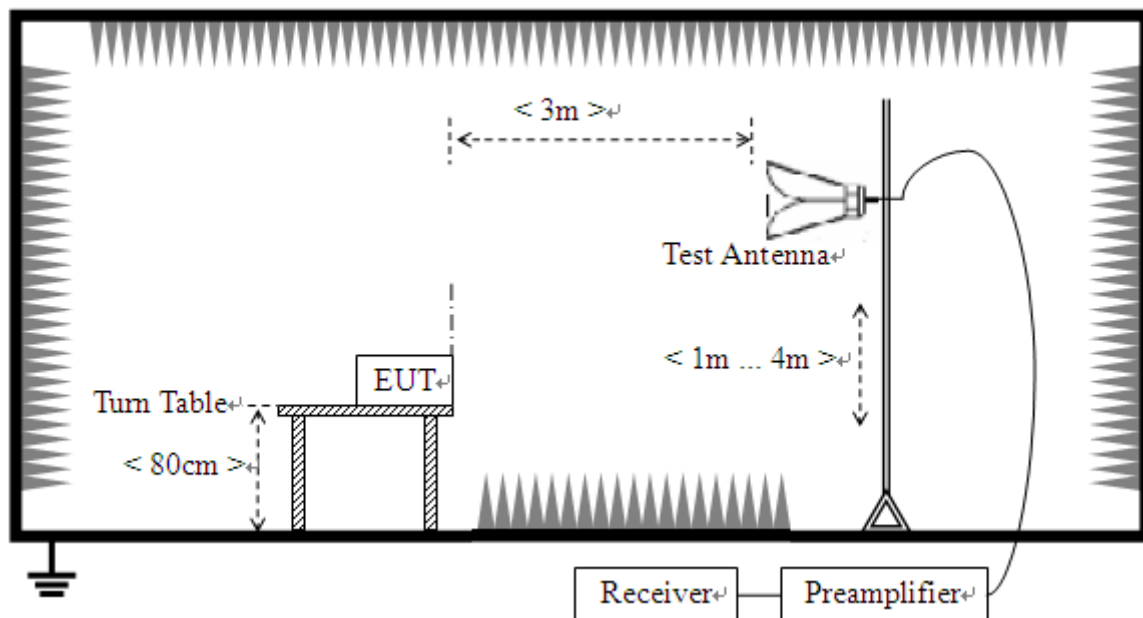

Radiated Emission (above 1 GHz)

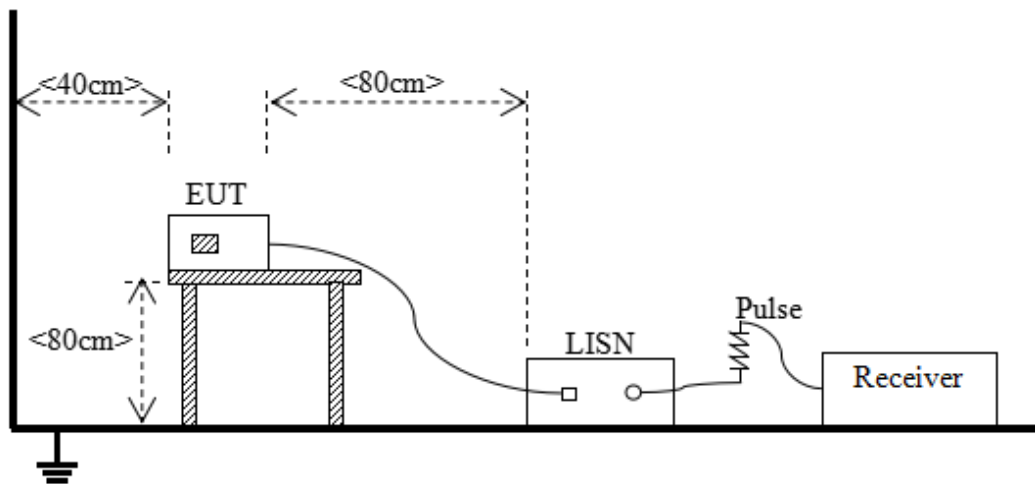Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60
NOTE: 1) Field Strength (dB $\mu\text{V/m}$) = $20 \times \log [\text{Field Strength } (\mu\text{V/m})]$. 2) In the emission tables above, the tighter limit applies at the band edges. 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.			

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80
Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table. Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula: $L_{3m} = L_{10m} + 20 \times \log(d_{10m}/d_{3m})$ Where: L_{3m} is Average Class A limit at 3m; L_{10m} is Average Class A limit at 10m; d_{10m} is Measurement distance in 10m; d_{3m} is Measurement distance in 3m. For this case: $L_{3m} = 49.5 + 20 \times \log(10/3) = 60$ (dB $\mu\text{V/m}$).					

Highest internal frequency (F_x)	Highest measurement frequency (F_M)
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_x \leq 1 \text{ GHz}$	5 GHz
$F_x \geq 1 \text{ GHz}$	5 * F_x or 40 GHz, whichever is lower.
Note: F_x is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit - Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit - Results

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The Radiated Emission is required to be investigated to the upper frequency of 5th harmonic of the highest internal frequency of EUT or 40 GHz, whichever is lower. The test results above 18GHz are only noise and are not recorded in the report.

Sample No.	S12	Temperature	21.5°C-22.6°C
Humidity	54%RH-56%RH	Pressure	101kPa
Test Engineer	He Shichang, Chen Jingran	Test Date	2024.05.13-2024.05.15


Test Mode 5

1) Test Antenna Vertical, 30 MHz – 1 GHz

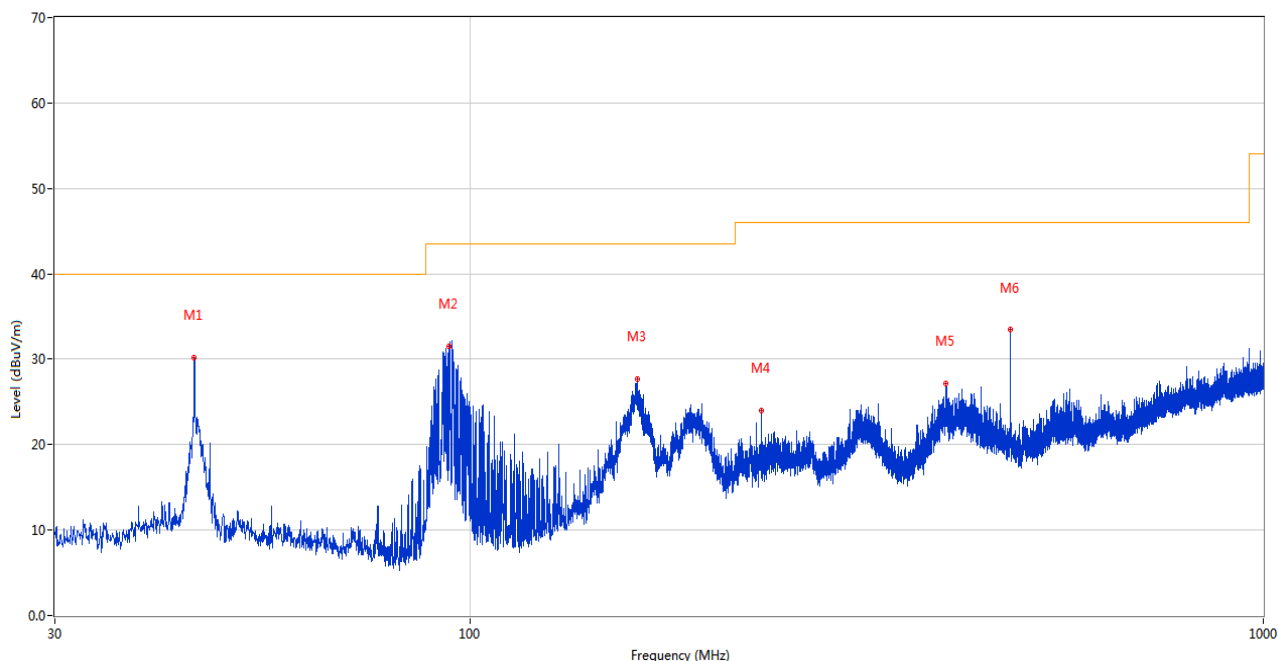

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	44.938	30.22	-26.51	40.0	9.78	Peak	280.00	100	Vertical	Pass
2	94.117	31.57	-30.72	43.5	11.93	Peak	356.00	200	Vertical	Pass
3	162.648	27.66	-25.29	43.5	15.84	Peak	302.00	100	Vertical	Pass
4	233.021	23.94	-27.95	46.0	22.06	Peak	205.00	200	Vertical	Pass
5	398.600	27.11	-21.30	46.0	18.89	Peak	202.00	100	Vertical	Pass
6	480.031	33.42	-19.48	46.0	12.58	Peak	158.00	200	Vertical	Pass


2) Test Antenna Horizontal, 30 MHz – 1 GHz

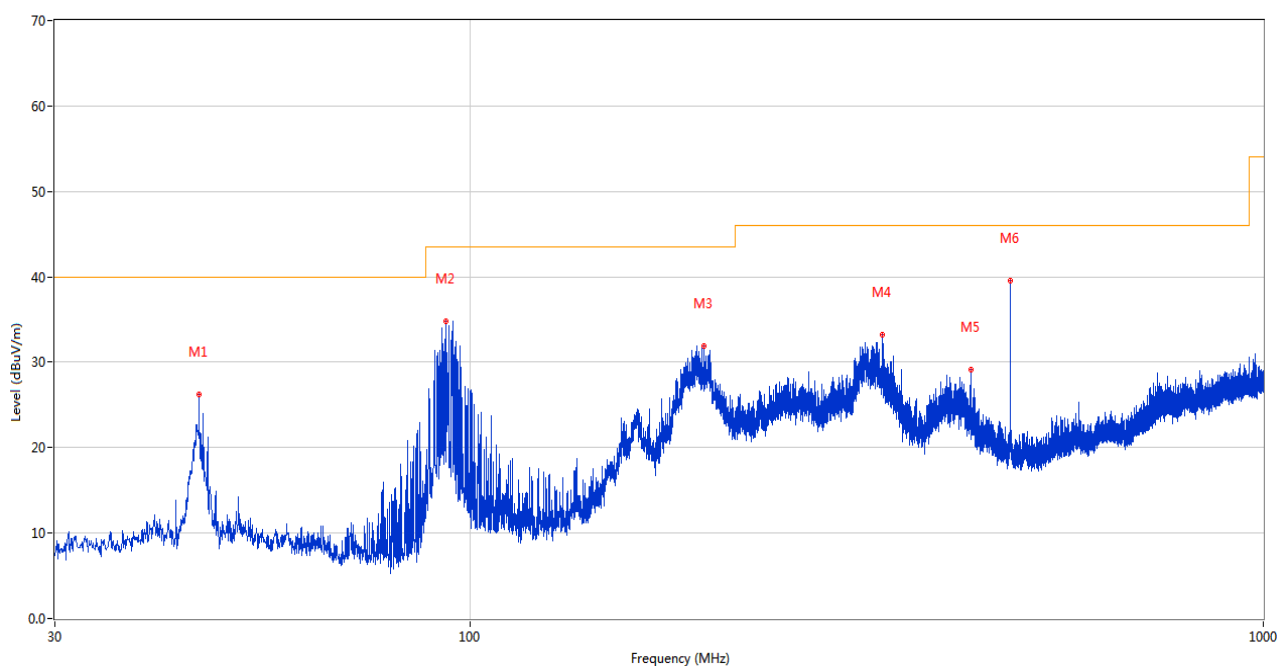

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	45.569	26.24	-26.71	40.0	13.76	Peak	2.00	200	Horizontal	Pass
2	93.341	34.85	-30.69	43.5	8.65	Peak	79.00	200	Horizontal	Pass
3	197.228	31.89	-28.60	43.5	11.61	Peak	94.00	100	Horizontal	Pass
4	331.282	33.17	-23.65	46.0	12.83	Peak	128.00	100	Horizontal	Pass
5	428.039	29.11	-20.57	46.0	16.89	Peak	310.00	100	Horizontal	Pass
6	480.031	39.55	-19.48	46.0	6.45	Peak	91.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2023.09.05	2024.09.04	☒
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2017119081	2023.12.05	2024.12.04	☒
Test Antenna- Bi-Log	SCHWARZB ECK	VULB 9168	9168-00867	2022.04.12	2025.04.11	☒
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

3) Test Antenna Vertical, 1 GHz – 18 GHz

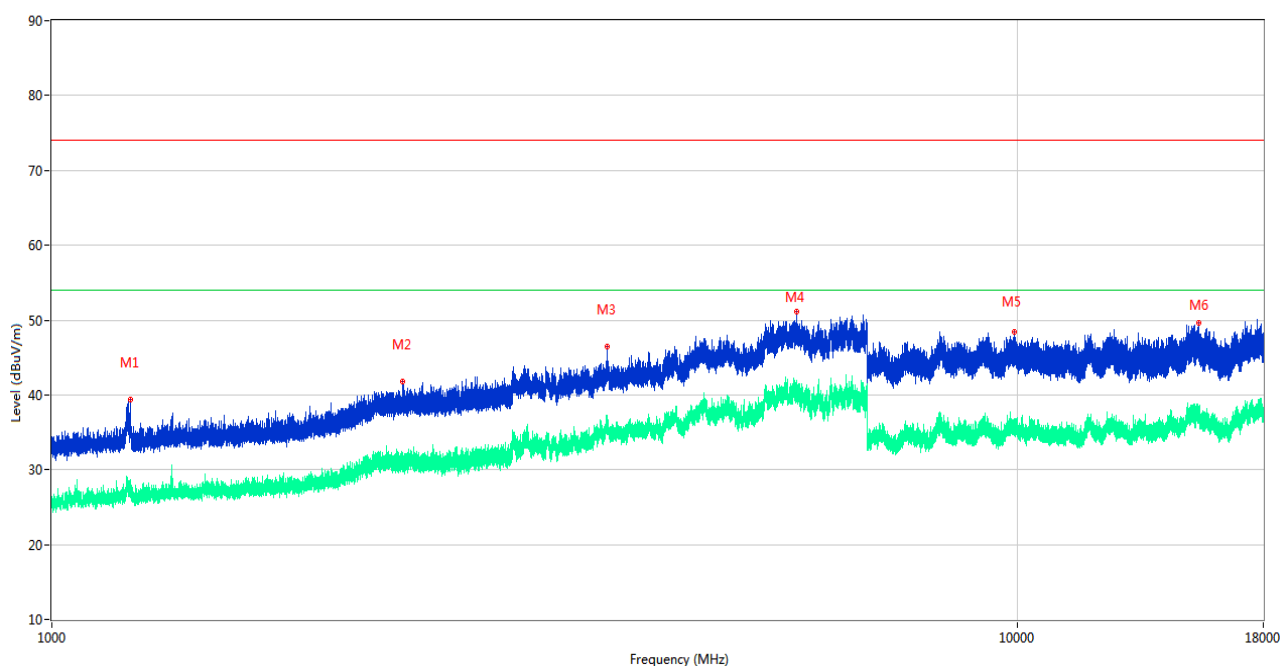

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1205.500	39.38	-16.93	74.0	34.62	Peak	11.00	200	Vertical	Pass
1**	1205.500	26.44	-16.93	54.0	27.56	AV	11.00	200	Vertical	Pass
2	2311.300	41.76	-11.11	74.0	32.24	Peak	204.00	100	Vertical	Pass
2**	2311.300	31.78	-11.11	54.0	22.22	AV	204.00	100	Vertical	Pass
3	3763.200	46.44	-5.92	74.0	27.56	Peak	316.00	100	Vertical	Pass
3**	3763.200	36.01	-5.92	54.0	17.99	AV	316.00	100	Vertical	Pass
4	5909.600	51.14	0.69	74.0	22.86	Peak	15.00	200	Vertical	Pass
4**	5909.600	41.99	0.69	54.0	12.01	AV	15.00	200	Vertical	Pass
5	9940.263	48.35	16.20	74.0	25.65	Peak	93.00	100	Vertical	Pass
5**	9940.263	36.33	16.20	54.0	17.67	AV	93.00	100	Vertical	Pass
6	15429.075	49.68	17.01	74.0	24.32	Peak	85.00	200	Vertical	Pass
6**	15429.075	37.46	17.01	54.0	16.54	AV	85.00	200	Vertical	Pass

4) Test Antenna Horizontal, 1 GHz – 18 GHz

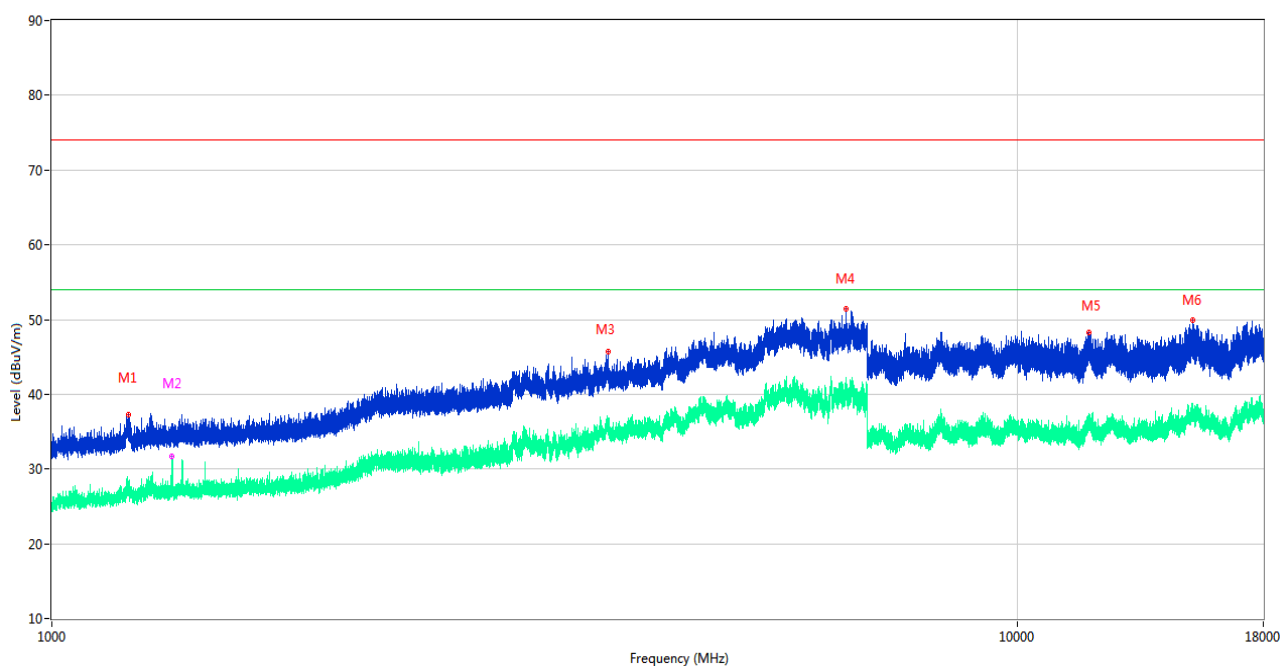

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1201.300	37.26	-16.68	74.0	36.74	Peak	158.00	200	Horizontal	Pass
1**	1201.300	28.04	-16.68	54.0	25.96	AV	158.00	200	Horizontal	Pass
2	1331.600	35.37	-16.18	74.0	38.63	Peak	105.00	100	Horizontal	Pass
2**	1331.600	31.67	-16.18	54.0	22.33	AV	105.00	100	Horizontal	Pass
3	3766.800	45.68	-5.85	74.0	28.32	Peak	61.00	100	Horizontal	Pass
3**	3766.800	35.29	-5.85	54.0	18.71	AV	61.00	100	Horizontal	Pass
4	6651.000	51.41	2.10	74.0	22.59	Peak	282.00	100	Horizontal	Pass
4**	6651.000	40.19	2.10	54.0	13.81	AV	282.00	100	Horizontal	Pass
5	11870.825	48.30	16.53	74.0	25.70	Peak	181.00	200	Horizontal	Pass
5**	11870.825	37.00	16.53	54.0	17.00	AV	181.00	200	Horizontal	Pass
6	15229.050	49.89	16.35	74.0	24.11	Peak	193.00	100	Horizontal	Pass
6**	15229.050	37.45	16.35	54.0	16.55	AV	193.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2023.09.05	2024.09.04	☒
EMI Receiver	R&S	FSV-40	101544	2023.12.27	2024.12.26	☒
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2023.12.05	2024.12.04	☒
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2023.12.05	2024.12.04	☒
Amplifier (18-40GHz)	COM-MV	KA_LNA18- 40G-01	18050001	2021.07.02	2024.07.01	☒
Test Antenna- Horn	SCHWARZB ECK	BBHA 9120D	01917	2022.06.09	2025.06.08	☒
Test Antenna- Horn	A-INFOMW	LB-180400KF	J211060273	2021.07.02	2024.07.01	☒
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒


A.2 Conducted Emission, AC Ports

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (240 VAC, 50 Hz) shown here.

Sample No.	S12	Temperature	25.2℃
Humidity	58%RH	Pressure	101kPa
Test Engineer	Yang Yang	Test Date	2024.05.14


Test Mode 1

1) AC Ports - L Phase

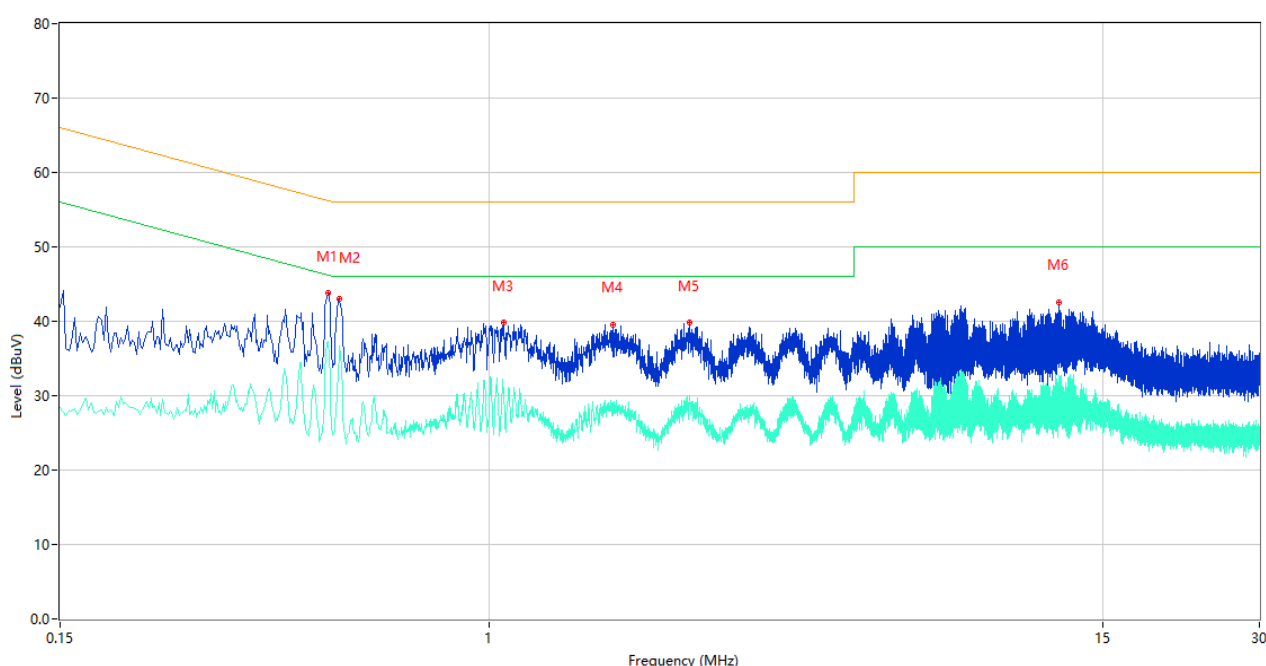

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.490	43.79	9.99	56.17	12.38	Peak	L	Pass
1**	0.490	37.23	9.99	46.17	8.94	AV	L	Pass
2	0.516	43.06	10.00	56.00	12.94	Peak	L	Pass
2**	0.516	36.70	10.00	46.00	9.30	AV	L	Pass
3	1.064	39.81	10.12	56.00	16.19	Peak	L	Pass
3**	1.064	31.14	10.12	46.00	14.86	AV	L	Pass
4	1.726	39.57	10.17	56.00	16.43	Peak	L	Pass
4**	1.726	28.10	10.17	46.00	17.90	AV	L	Pass
5	2.424	39.79	10.24	56.00	16.21	Peak	L	Pass
5**	2.424	30.03	10.24	46.00	15.97	AV	L	Pass
6	12.390	42.60	10.78	60.00	17.40	Peak	L	Pass
6**	12.390	25.89	10.78	50.00	24.11	AV	L	Pass

2) AC Ports - N Phase

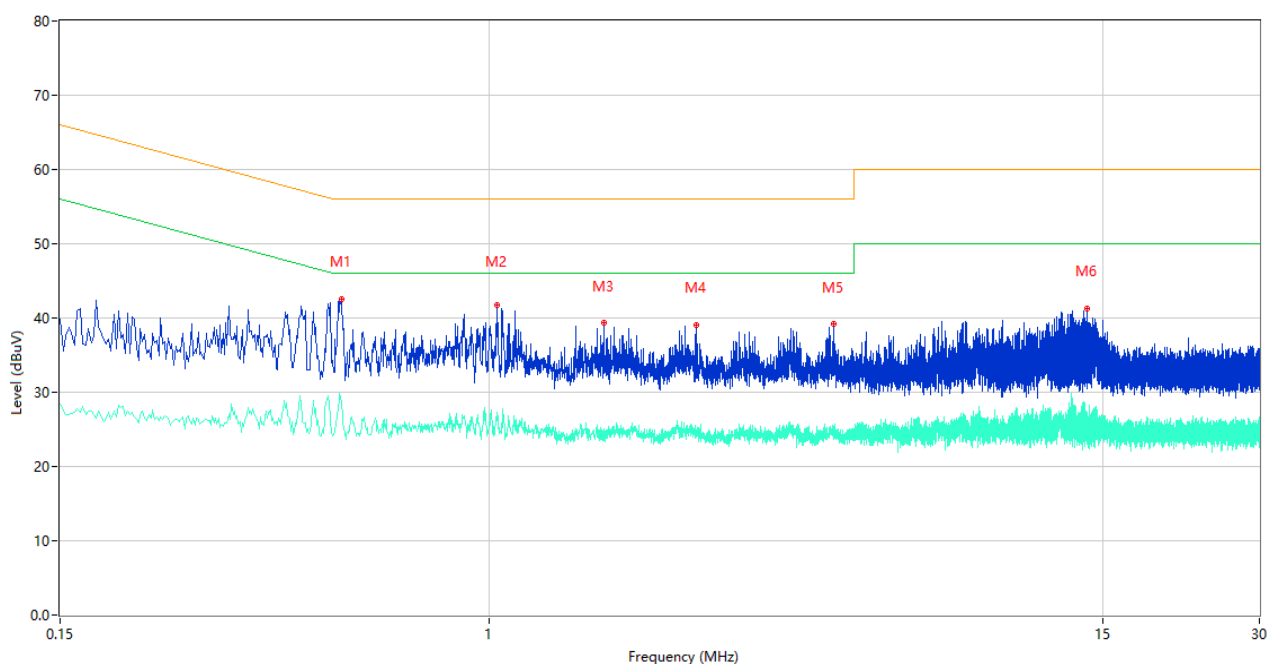

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.520	42.55	10.00	56.00	13.45	Peak	N	Pass
1**	0.520	28.67	10.00	46.00	17.33	AV	N	Pass
2	1.036	41.74	10.12	56.00	14.26	Peak	N	Pass
2**	1.036	27.28	10.12	46.00	18.72	AV	N	Pass
3	1.658	39.29	9.97	56.00	16.71	Peak	N	Pass
3**	1.658	24.61	9.97	46.00	21.39	AV	N	Pass
4	2.494	39.13	10.17	56.00	16.87	Peak	N	Pass
4**	2.494	24.76	10.17	46.00	21.24	AV	N	Pass
5	4.566	39.21	10.48	56.00	16.79	Peak	N	Pass
5**	4.566	25.16	10.48	46.00	20.84	AV	N	Pass
6	14.006	41.34	10.60	60.00	18.66	Peak	N	Pass
6**	14.006	26.39	10.60	50.00	23.61	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2023.09.05	2024.09.04	☒
LISN	SCHWARZB ECK	NSLK 8127	8127-687	2023.05.16 2024.05.09	2024.05.15 2025.05.08	☒
Shielded Room	YiHeng Electronic Co., Ltd	3.5m*3.1m*2. 8m	112	2022.02.19	2025.02.18	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2441239-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2441239-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2441239-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--