

# FCC Part 15C

## Measurement and Test Report



For

Zhuhai HiVi Technology Co., Ltd.

NO.1, South Dongcheng Road, Liangang Industrial Zone, Zhuhai,

Guangdong, P.R.China

**FCC ID: 2ANSM-M3A**

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>High Fidelity Active Speaker</u>
Tested Model:	<u>HiVi M3A</u>
Report No.:	<u>STR18048045I-1</u>
Sample Receipt Date:	<u>2018-03-29</u>
Tested Date:	<u>2018-03-30 to 2018-05-03</u>
Issued Date:	<u>2018-05-03</u>
Tested By:	<u>Long Tang/ Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	<p><b>Shenzhen SEM Test Technology Co., Ltd.</b> 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a></p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM Test Technology Co., Ltd.

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND TEST MODE .....	5
1.6 MEASUREMENT UNCERTAINTY .....	5
1.7 TEST EQUIPMENT LIST AND DETAILS .....	6
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>3. RF EXPOSURE .....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. ANTENNA REQUIREMENT .....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION .....	9
<b>5. POWER SPECTRAL DENSITY .....</b>	<b>10</b>
5.1 STANDARD APPLICABLE.....	10
5.2 TEST PROCEDURE.....	10
5.3 ENVIRONMENTAL CONDITIONS .....	10
5.4 SUMMARY OF TEST RESULTS/PLOTS .....	11
<b>6. 6DB BANDWIDTH .....</b>	<b>24</b>
6.1 STANDARD APPLICABLE.....	24
6.2 TEST PROCEDURE.....	24
6.3 ENVIRONMENTAL CONDITIONS .....	24
6.4 SUMMARY OF TEST RESULTS/PLOTS .....	24
<b>7. RF OUTPUT POWER .....</b>	<b>38</b>
7.1 STANDARD APPLICABLE.....	38
7.2 TEST PROCEDURE.....	38
7.3 ENVIRONMENTAL CONDITIONS .....	38
7.4 SUMMARY OF TEST RESULTS/PLOTS .....	39
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS .....</b>	<b>52</b>
8.1 MEASUREMENT UNCERTAINTY .....	52
8.2 STANDARD APPLICABLE.....	52
8.3 TEST PROCEDURE.....	52
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	54
8.5 ENVIRONMENTAL CONDITIONS .....	54
8.6 SUMMARY OF TEST RESULTS/PLOTS .....	54
<b>9. OUT OF BAND EMISSIONS.....</b>	<b>62</b>
9.1 STANDARD APPLICABLE.....	62
9.2 TEST PROCEDURE.....	62
9.3 ENVIRONMENTAL CONDITIONS .....	63
9.4 SUMMARY OF TEST RESULTS/PLOTS .....	63
<b>10. CONDUCTED EMISSIONS .....</b>	<b>99</b>
10.1 MEASUREMENT UNCERTAINTY .....	99
10.2 TEST PROCEDURE.....	99
10.3 BASIC TEST SETUP BLOCK DIAGRAM.....	99
10.4 ENVIRONMENTAL CONDITIONS .....	99
10.5 TEST RECEIVER SETUP .....	100
10.6 SUMMARY OF TEST RESULTS/PLOTS .....	100
10.7 CONDUCTED EMISSIONS TEST DATA.....	100

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Zuhai HiVi Technology Co., Ltd.  
Address of applicant: NO.1, South Dongcheng Road, Liangang Industrial Zone, Zhuhai, Guangdong, P.R.China

Manufacturer: Zuhai HiVi Technology Co., Ltd.  
Address of manufacturer: NO.1, South Dongcheng Road, Liangang Industrial Zone, Zhuhai, Guangdong, P.R.China

General Description of EUT	
Product Name:	High Fidelity Active Speaker
Trade Name:	
Model No.:	HiVi M3A
Adding Model(s):	HiVi M3AMKII, HiVi M1A
Rated Voltage:	AC 120V/60Hz
Power Adapter Model:	/
Software Version:	/
Hardware Version:	XHK7628MB-V22
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model HiVi M3A but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	26.55dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral
Antenna Gain:	Antenna 1/2: 5dBi
Lowest Internal Frequency	26MHz

## 1.2 Test Standards

The following report is prepared on behalf of the Zhuhai HiVi Technology Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V04 for digital transmission systems and KDB 662911 D01 Multiple Transmitter Output v02r01 shall be performed also.

## 1.4 Test Facility

### FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2017-06-12	2018-06-11
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2017-08-01	2020-07-31
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2017-08-15	2018-08-14
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2017-08-15	2018-08-14
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2017-06-12	2018-06-11
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2017-06-12	2018-06-11
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2017-06-12	2018-06-11
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2017-06-12	2018-06-11
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable



### 3. RF Exposure

---

#### 3.1 Standard Applicable

According to § 1.1307 and § 2.1091, the mobile transmitter must comply the RF exposure requirements.

#### 3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## 4. Antenna Requirement

---

### 4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### 4.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

## 5. Power Spectral Density

---

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 V04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 5.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


## 5.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Power Spectral Density dBm/100kHz			Limit dBm/3kHz
		Chain 1	Chain 2	Total	
802.11b	2412	-18.00	-18.73	/	8
	2437	-17.06	-17.10	/	8
	2462	-16.93	-17.84	/	8
802.11g	2412	-19.33	-20.63	/	8
	2437	-18.75	-19.42	/	8
	2462	-16.52	-19.95	/	8
802.11n HT20	2412	-21.55	-20.72	-18.10	8
	2437	-21.08	-19.99	-17.49	8
	2462	-20.80	-20.42	-17.60	8
802.11n HT40	2422	-23.95	-22.21	-19.98	8
	2437	-20.03	-22.00	-17.89	8
	2452	-23.66	-21.98	-19.73	8


Please refer to the following test plots:

## Antenna 1


802.11b-Low Channel

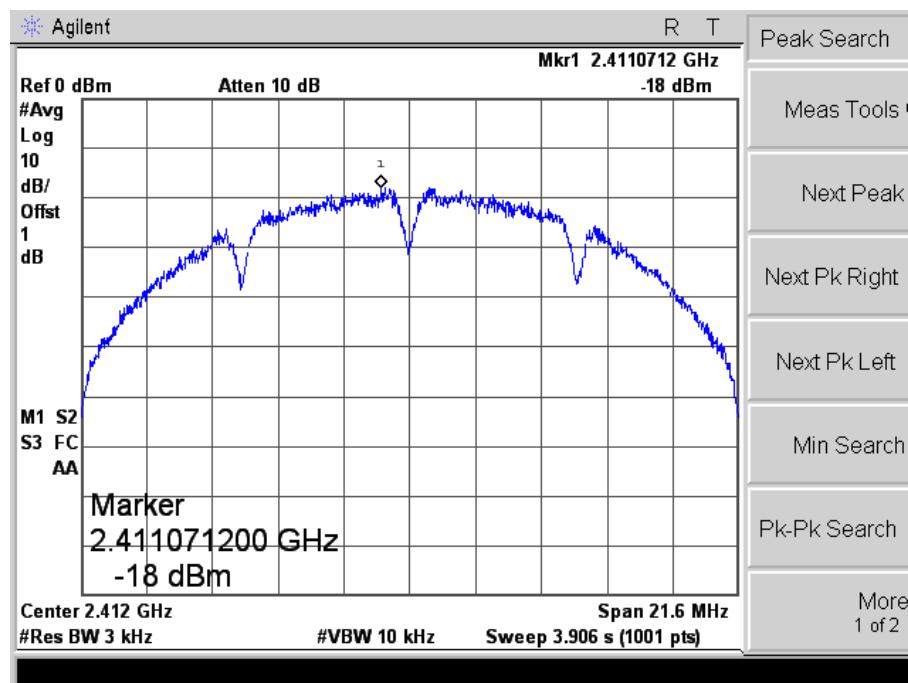


802.11b-Middle Channel

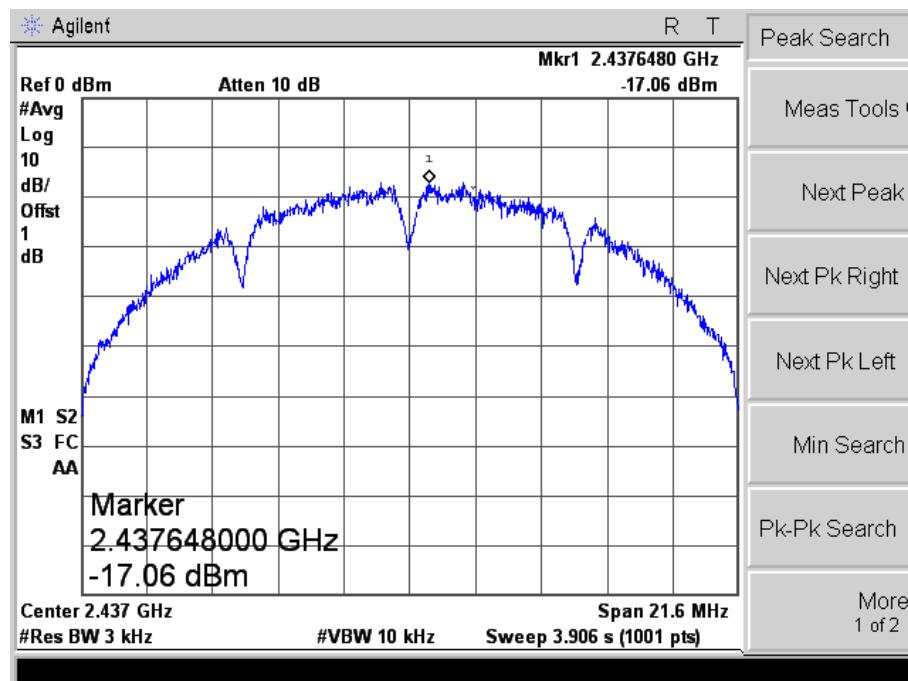


## 802.11b-High Channel

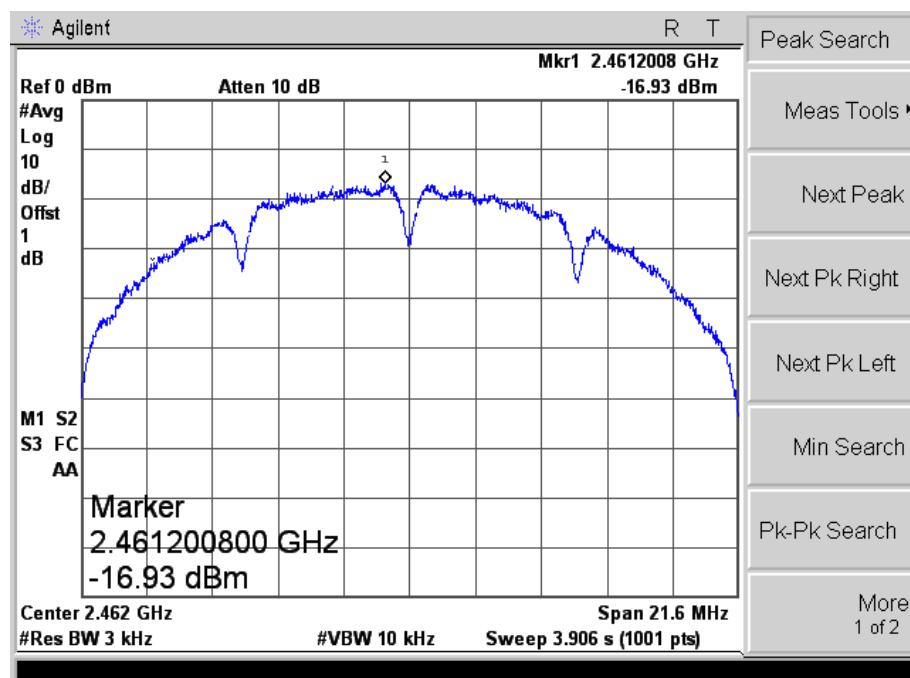


## 802.11g-Low Channel

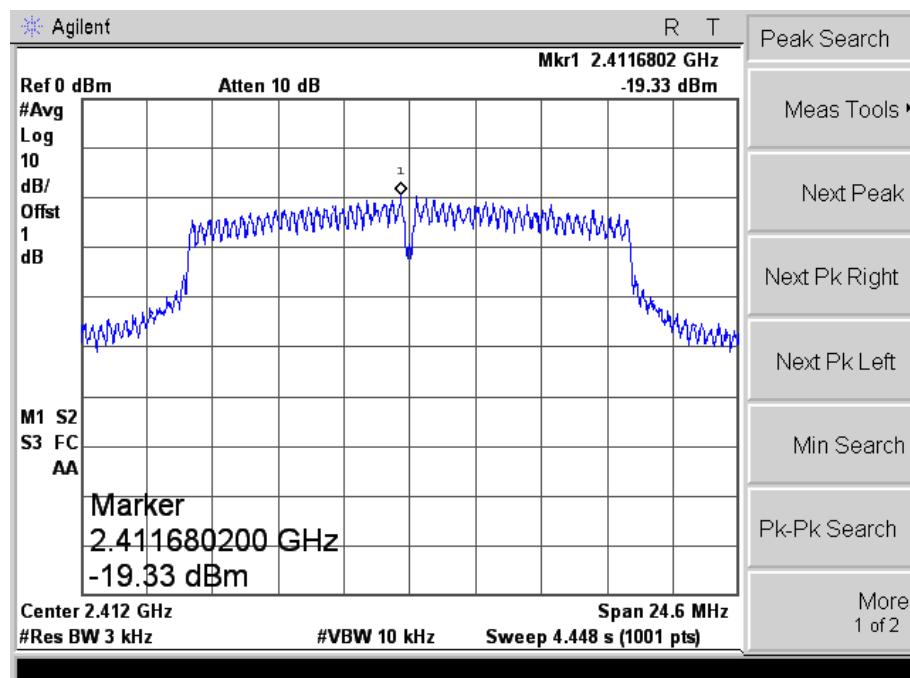


## 802.11g-Middle Channel

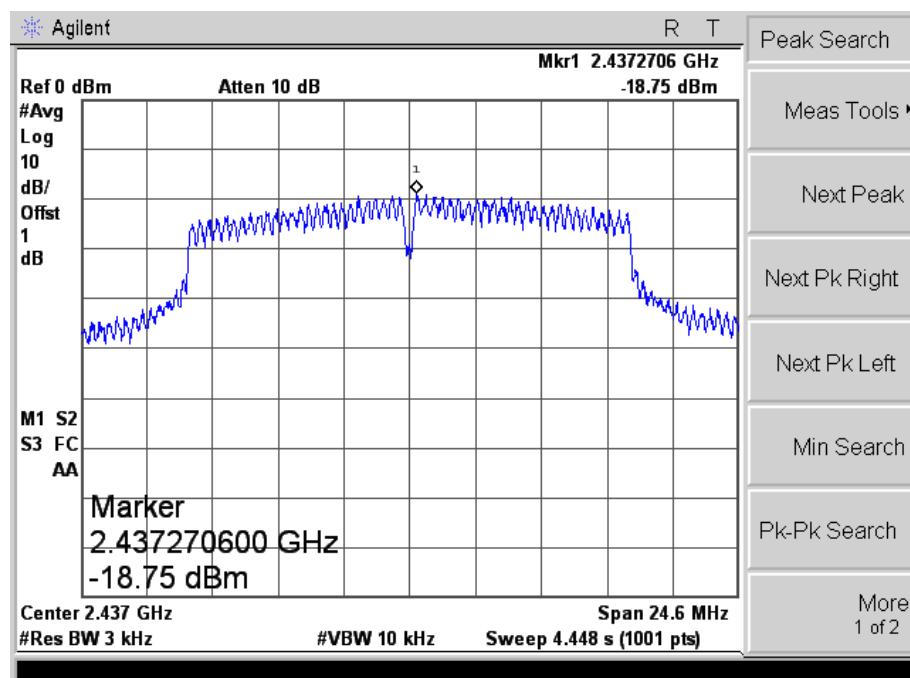


## 802.11g-High Channel

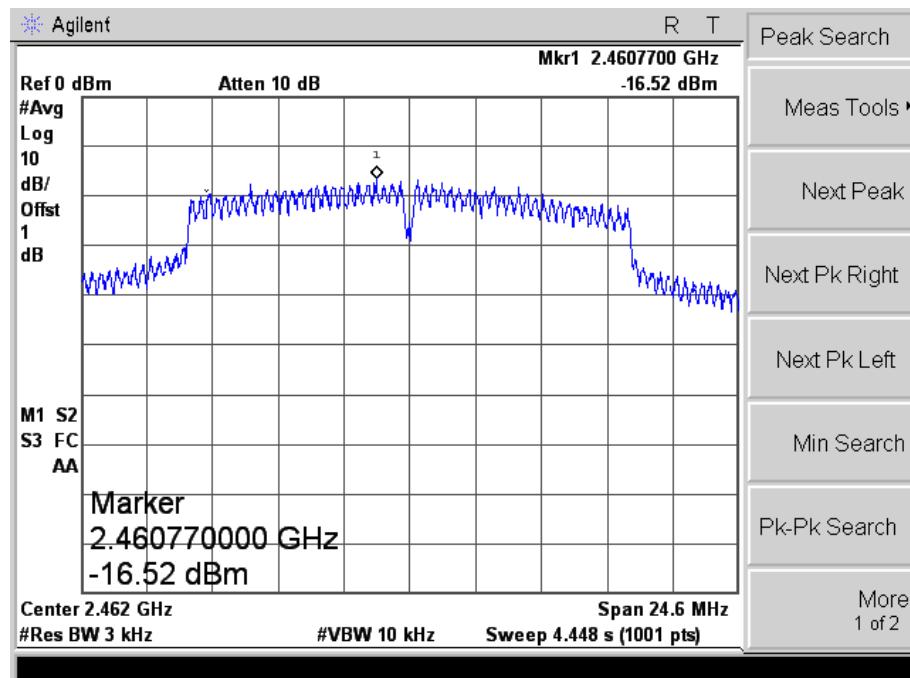


## 802.11n-HT20-Low Channel

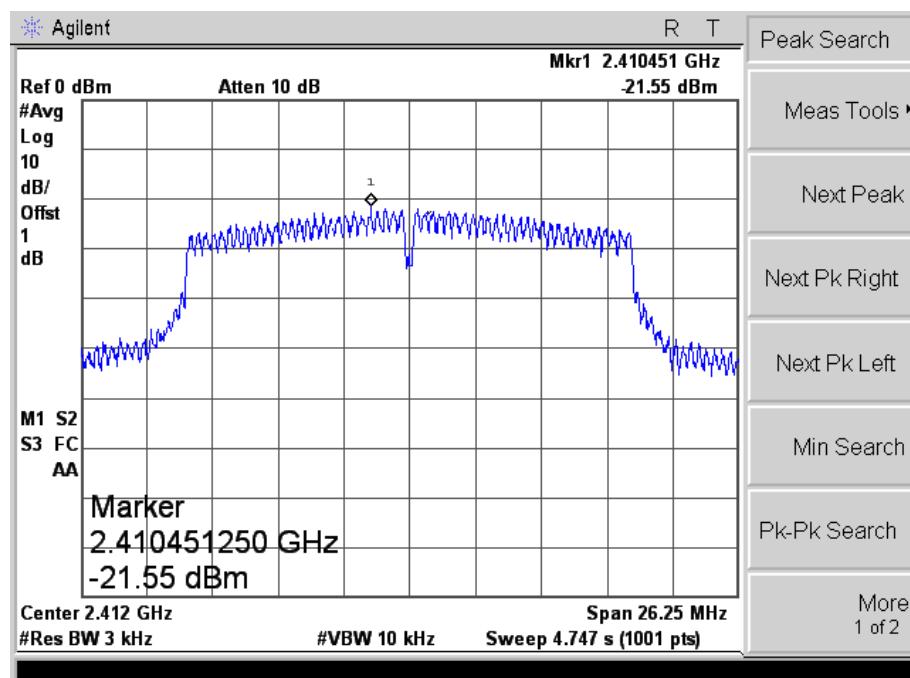


## 802.11n-HT20-Middle Channel

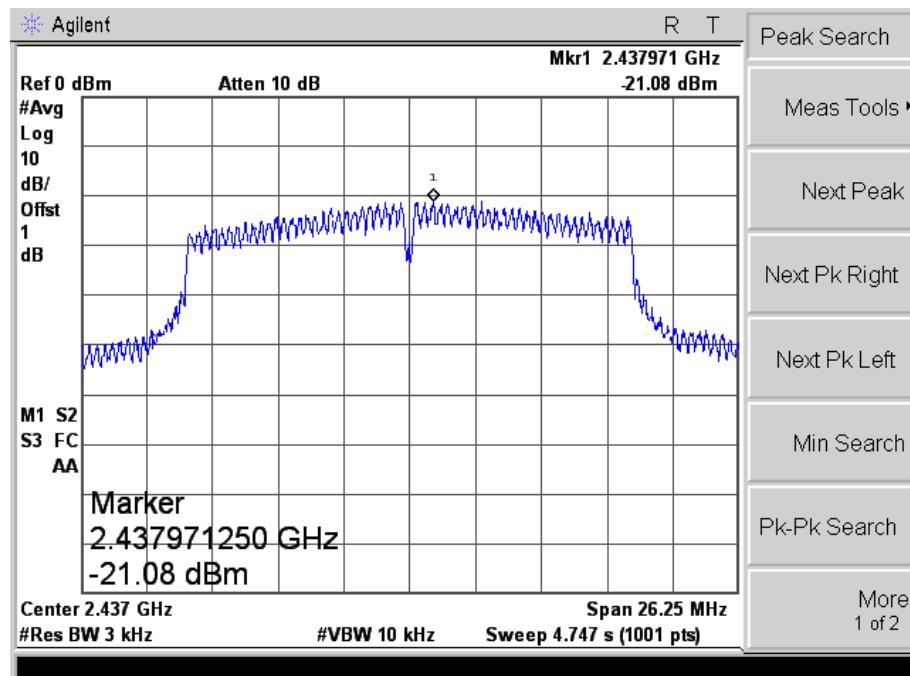


## 802.11n-HT20-High Channel

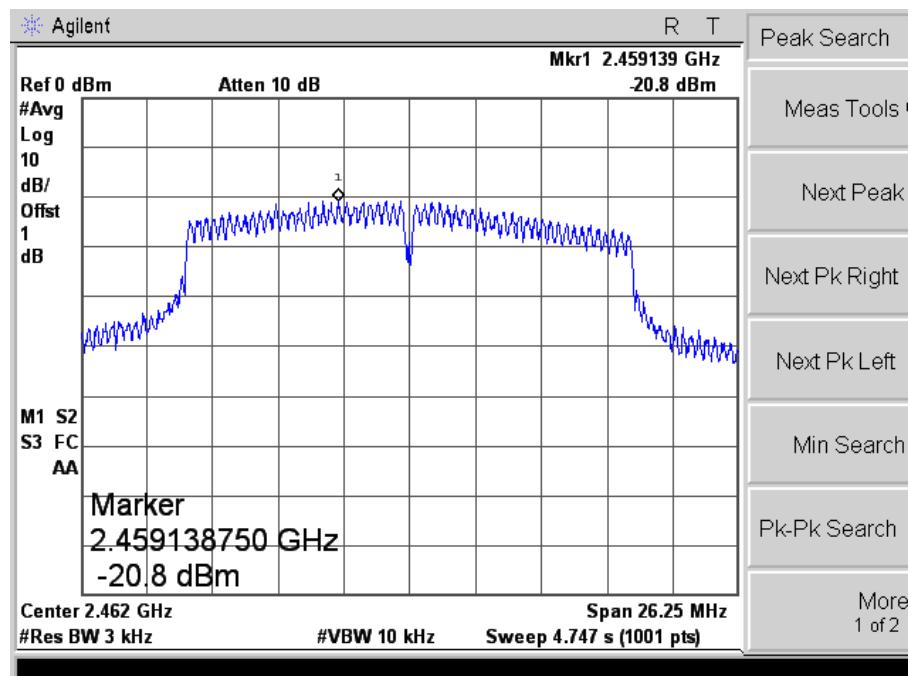


## 802.11n-HT40-Low Channel

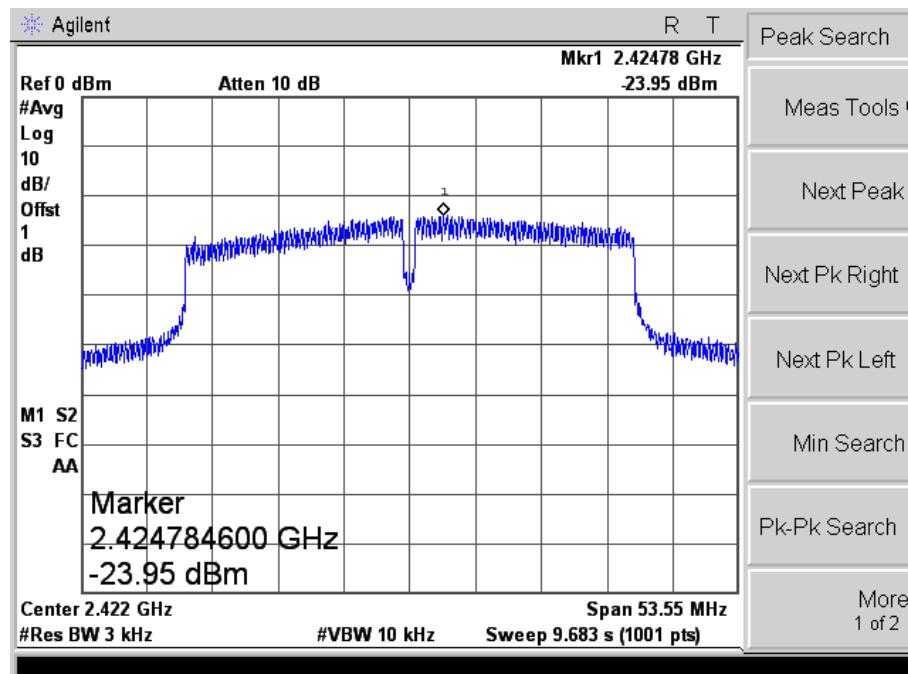

## 802.11n-HT40-Middle Channel

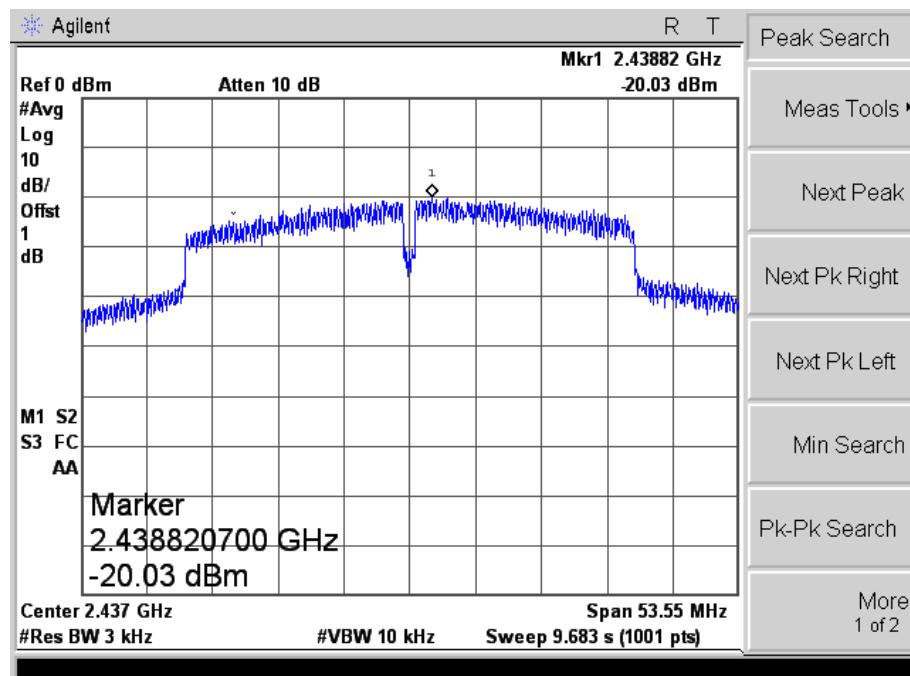


## 802.11n-HT40-High Channel

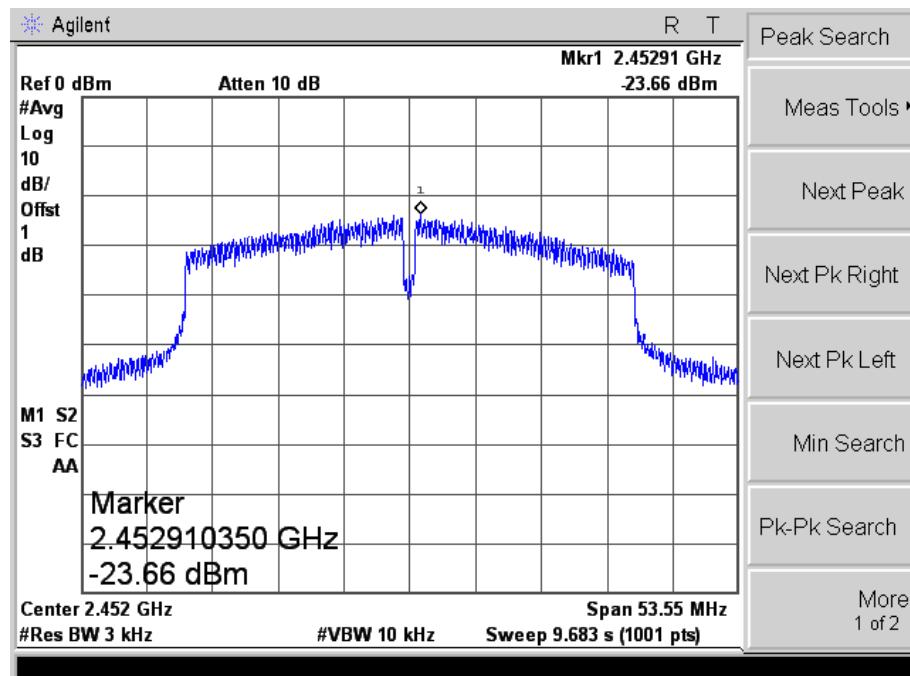


## Antenna 2


802.11b-Low Channel

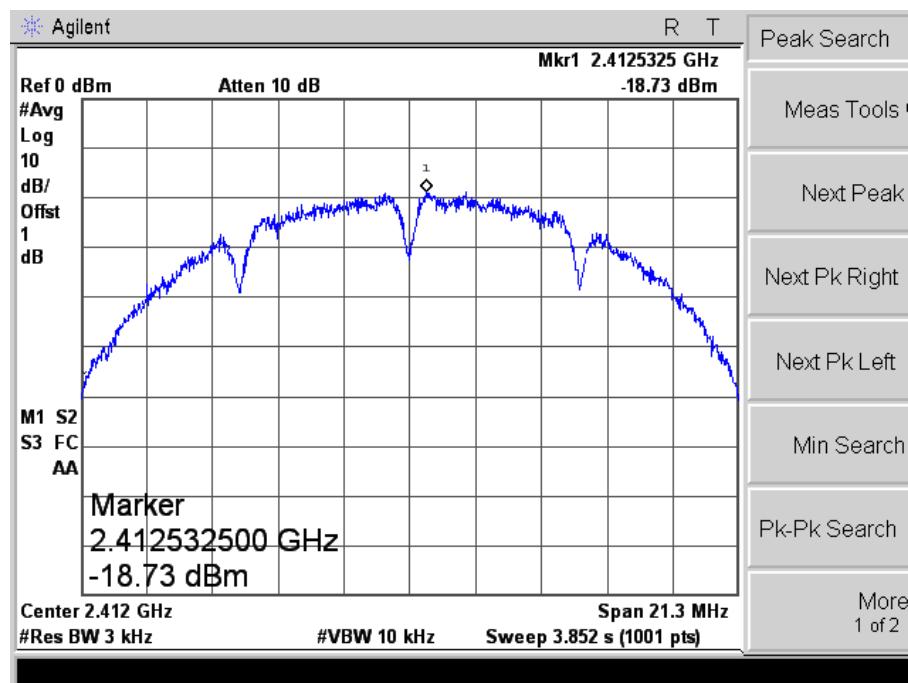


802.11b-Middle Channel

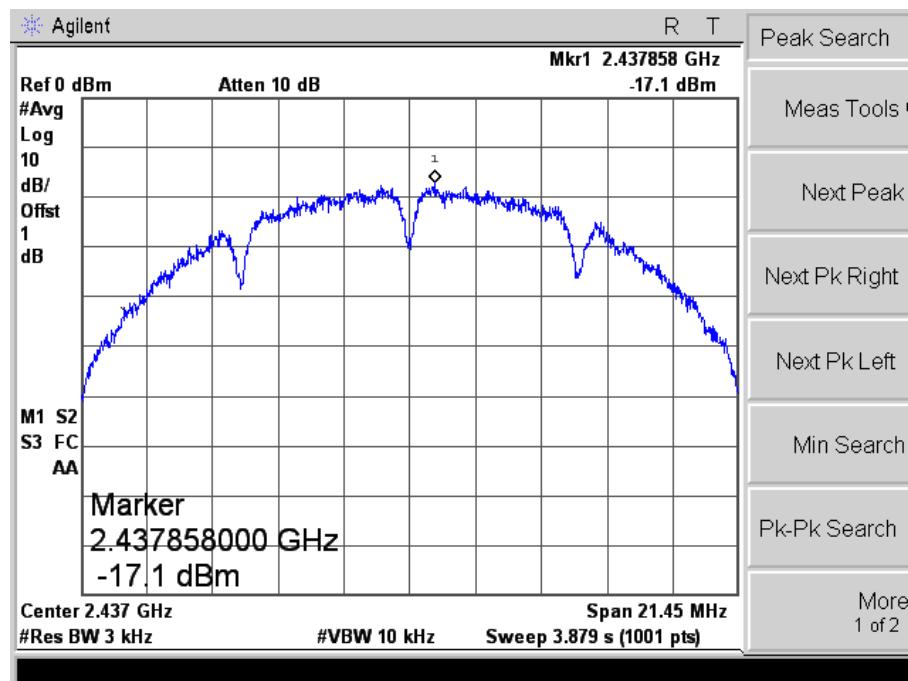


## 802.11b-High Channel

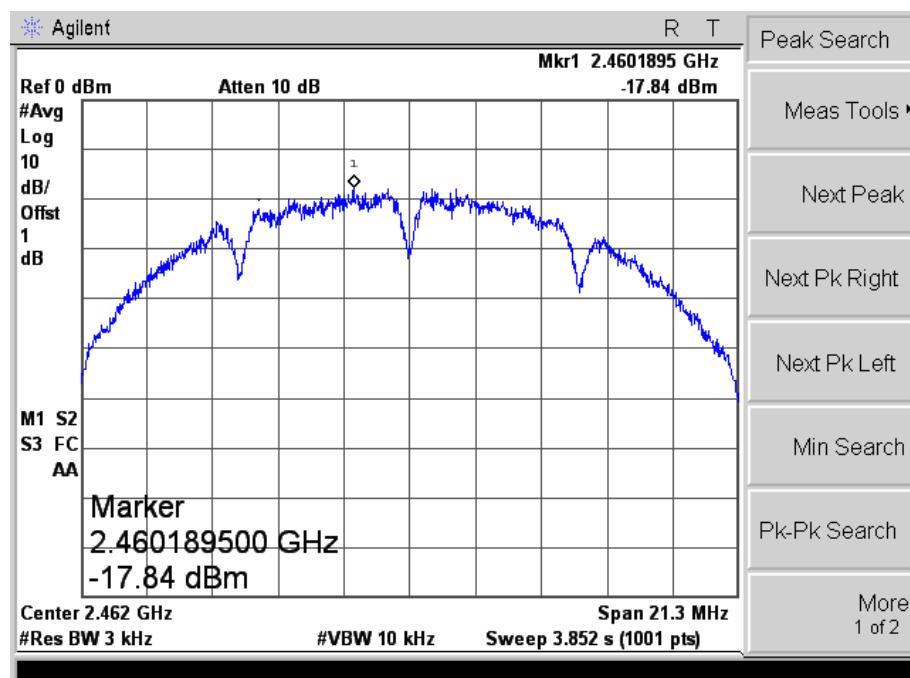


## 802.11g-Low Channel

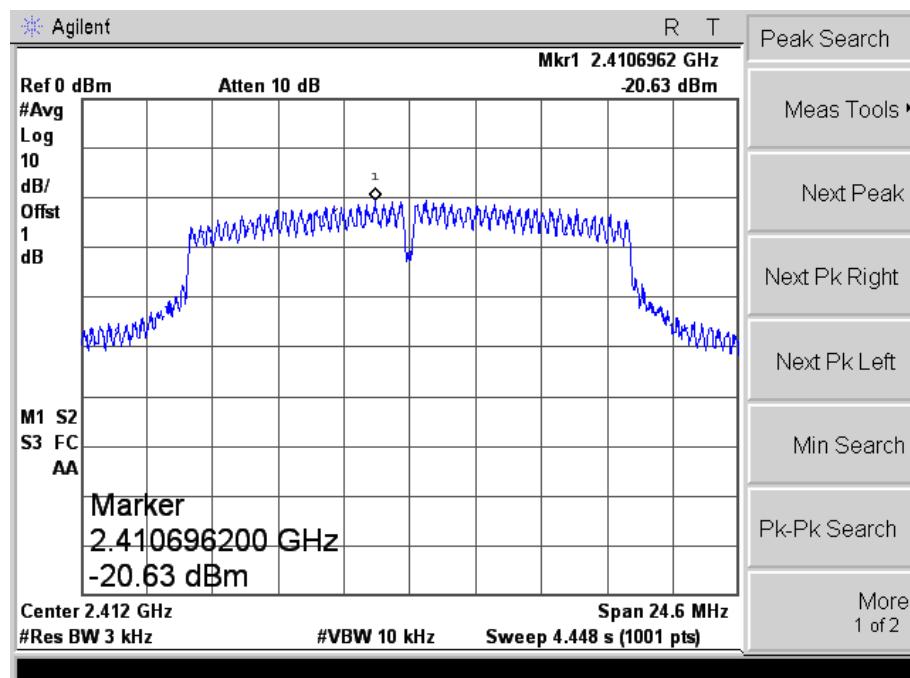


## 802.11g-Middle Channel

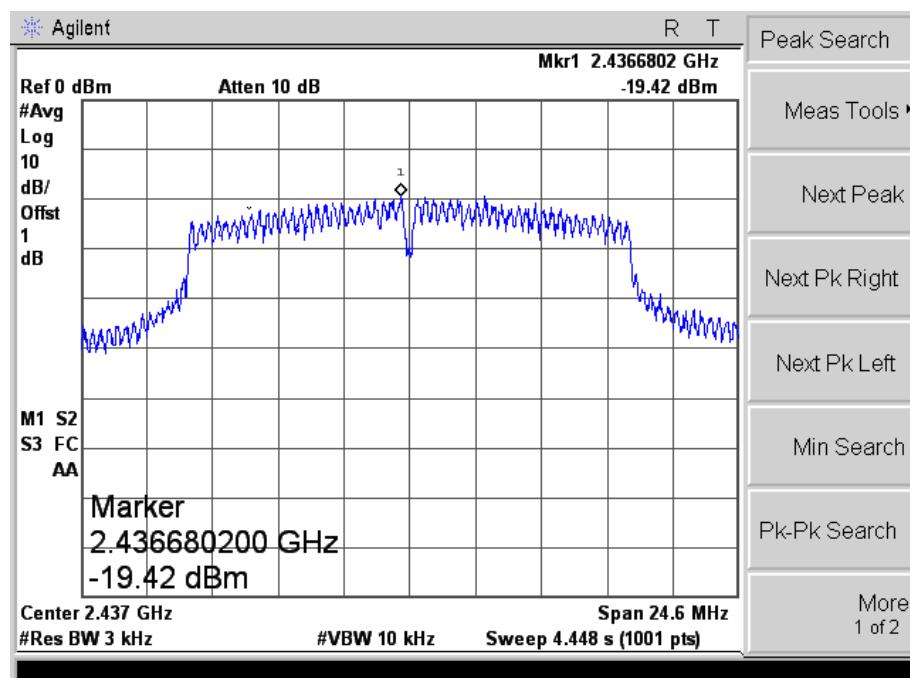


## 802.11g-High Channel

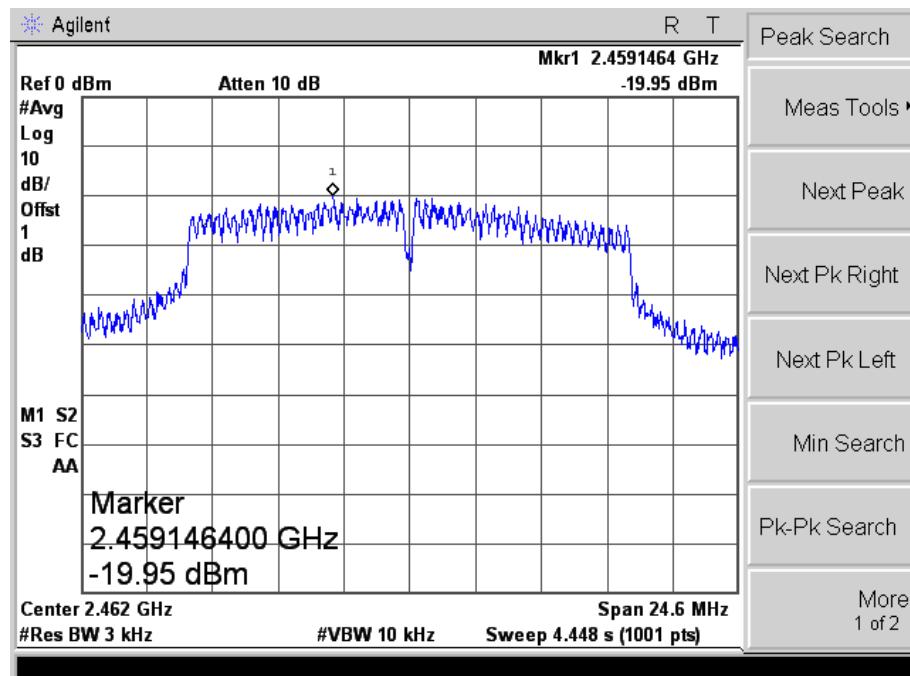


## 802.11n-HT20-Low Channel

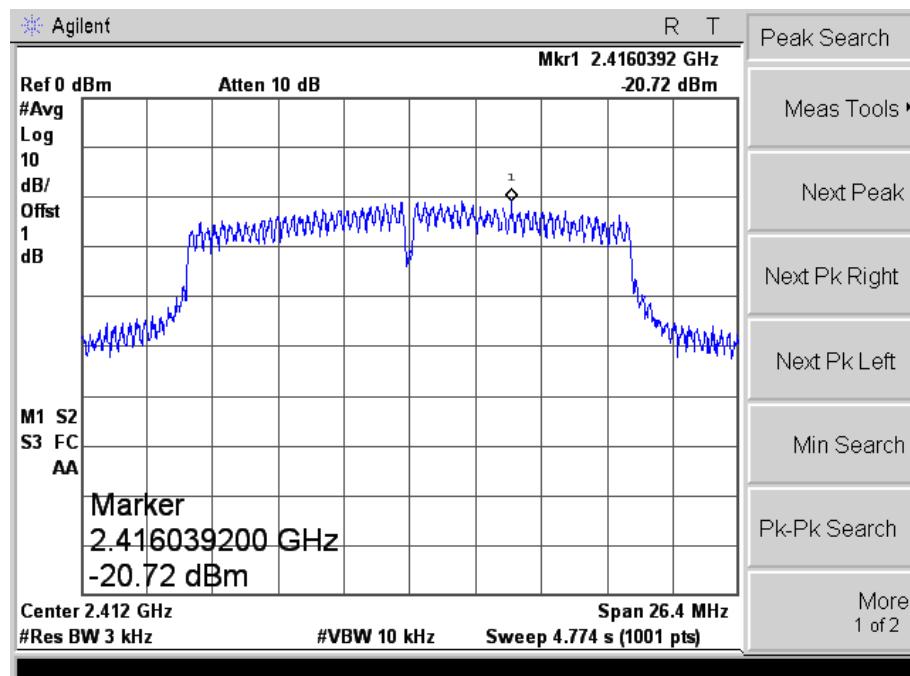


## 802.11n-HT20-Middle Channel

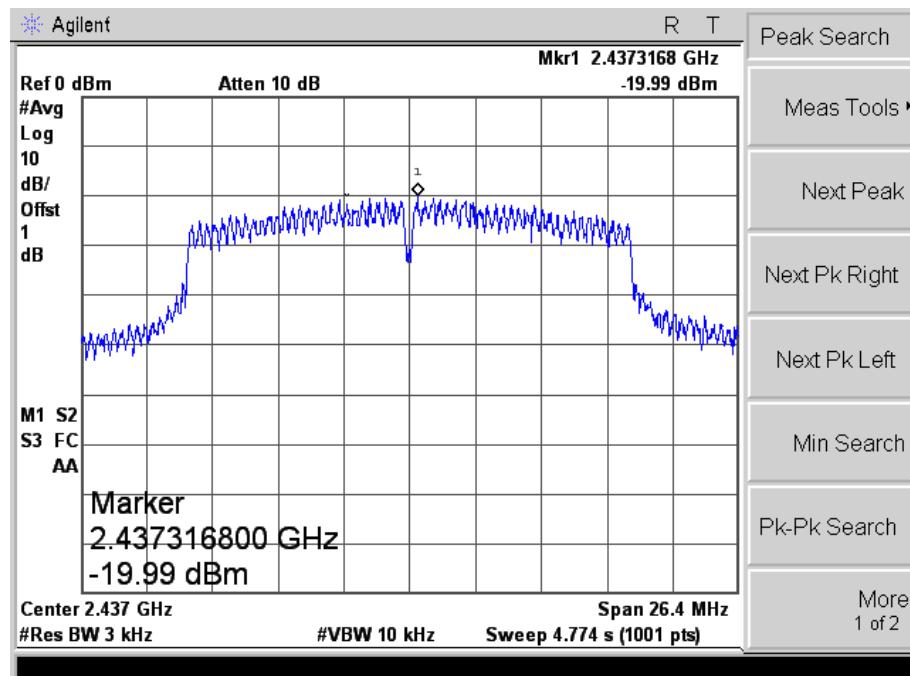


## 802.11n-HT20-High Channel

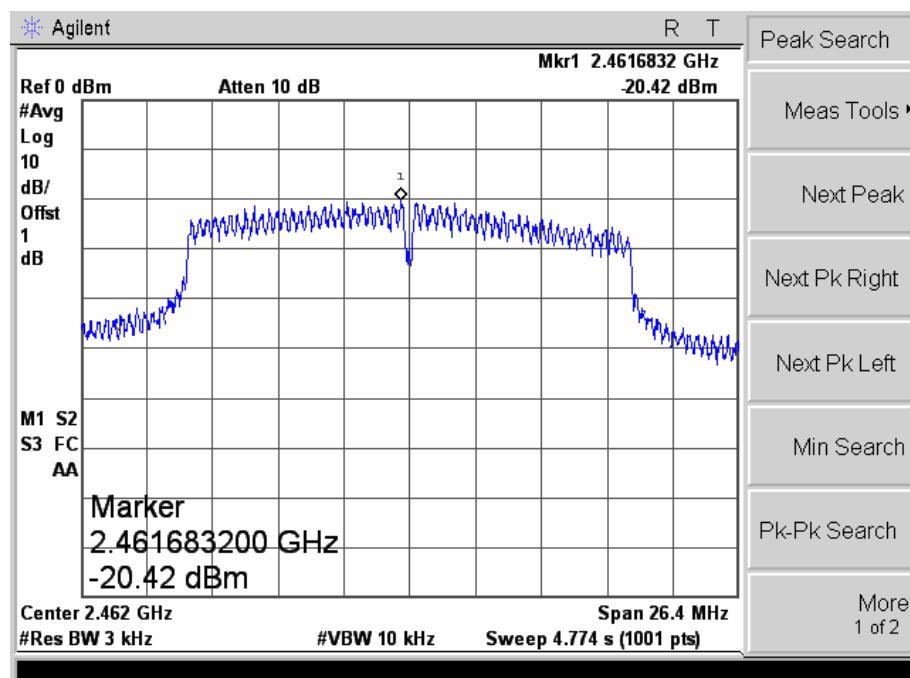


## 802.11n-HT40-Low Channel

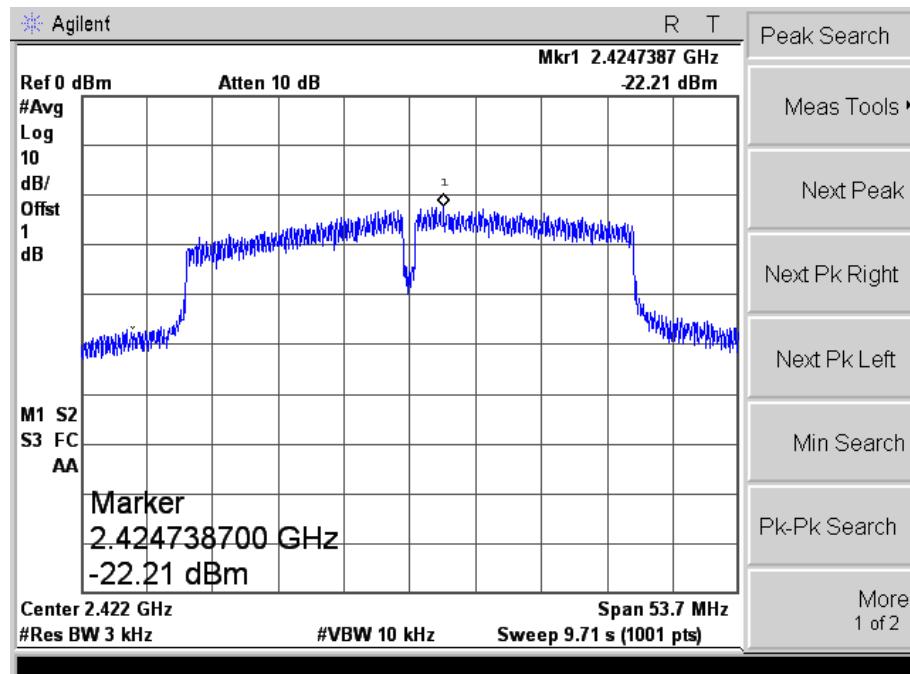

## 802.11n-HT40-Middle Channel

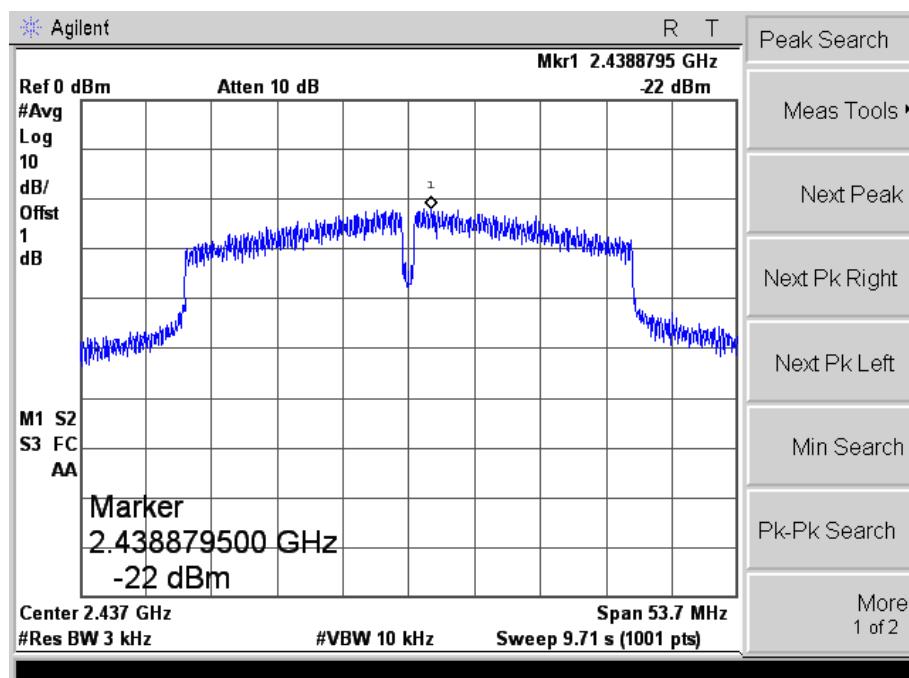

## 802.11n-HT40-High Channel

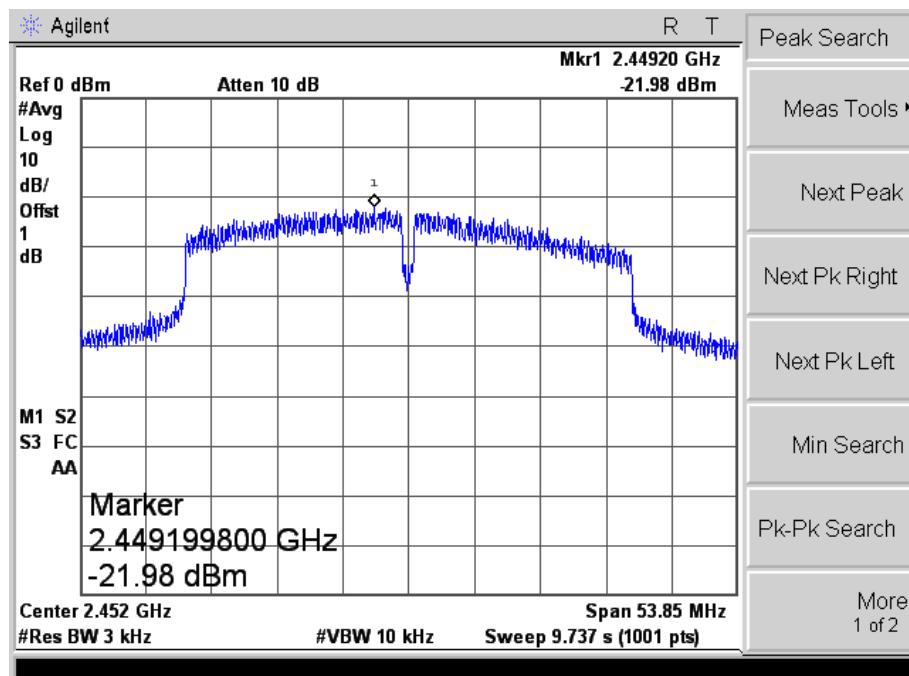

## 6. 6dB Bandwidth

---

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Environmental Conditions

Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.4 Summary of Test Results/Plots

**Antenna 1**

<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>6 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>Limit kHz</b>
802.11b	2412	10.029	14.3091	≥500
	2437	9.583	14.3085	≥500
	2462	10.027	14.3152	≥500
802.11g	2412	15.037	16.3117	≥500
	2437	15.125	16.3154	≥500
	2462	15.111	16.3045	≥500
802.11n-HT20	2412	15.153	17.4891	≥500
	2437	15.069	17.4849	≥500
	2462	15.065	17.4896	≥500
802.11n-HT40	2422	33.826	35.6506	≥500
	2437	33.816	35.6779	≥500
	2452	33.882	35.6987	≥500


**Antenna 2**

<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>6 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>Limit kHz</b>
802.11b	2412	9.075	14.1802	≥500
	2437	10.001	14.2244	≥500
	2462	9.543	14.1525	≥500
802.11g	2412	16.319	16.3061	≥500
	2437	16.304	16.3009	≥500
	2462	15.853	16.3058	≥500
802.11n-HT20	2412	17.530	17.5007	≥500
	2437	16.539	17.5063	≥500
	2462	17.566	17.5196	≥500
802.11n-HT40	2422	35.042	35.7729	≥500
	2437	33.803	35.7768	≥500
	2452	35.742	35.8388	≥500


Please refer to the following test plots:

## Antenna 1


802.11b-Low Channel

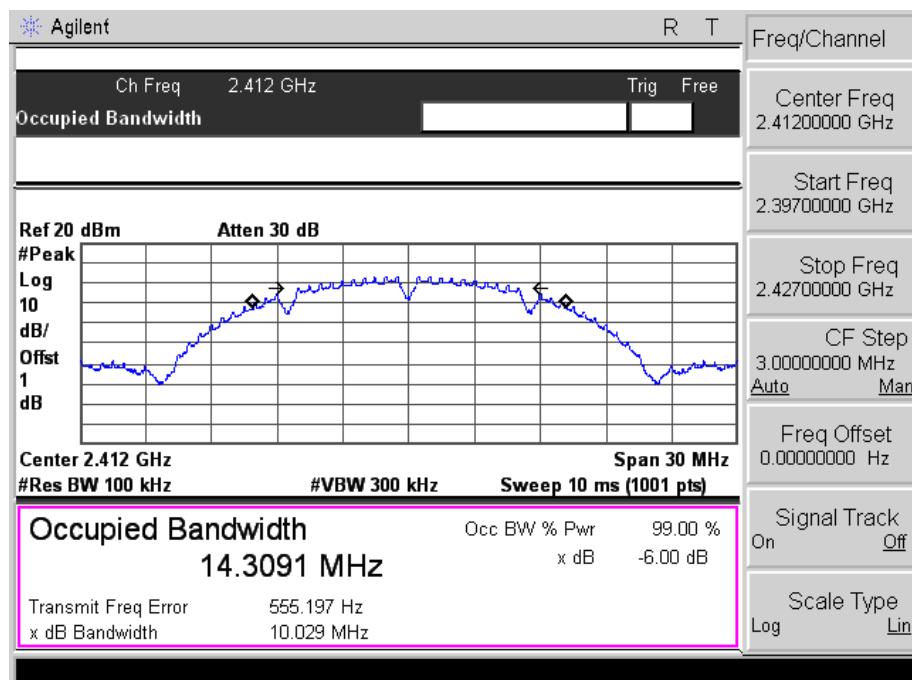


802.11b-Middle Channel

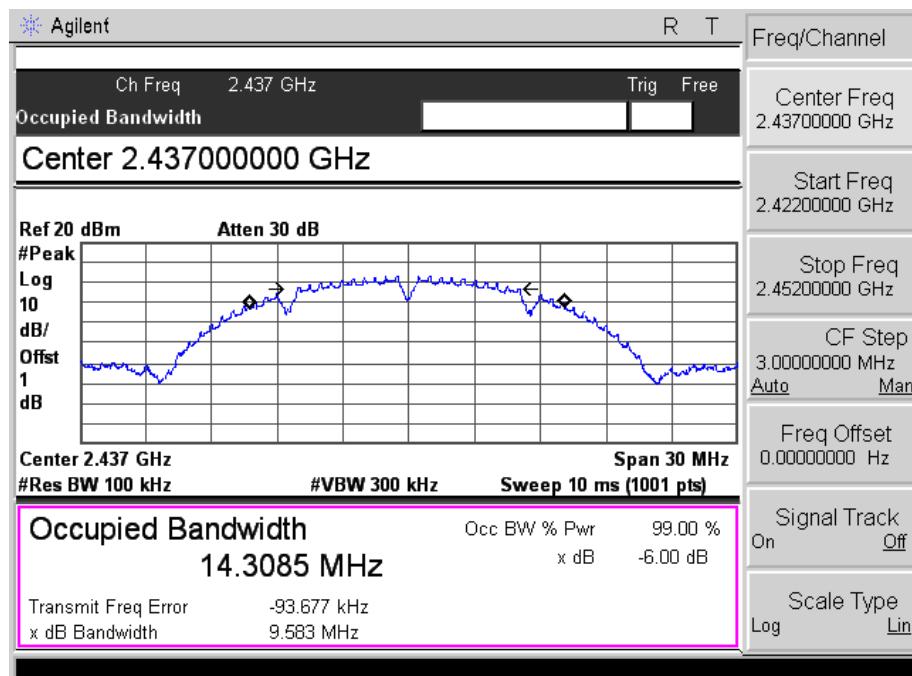


## 802.11b-High Channel

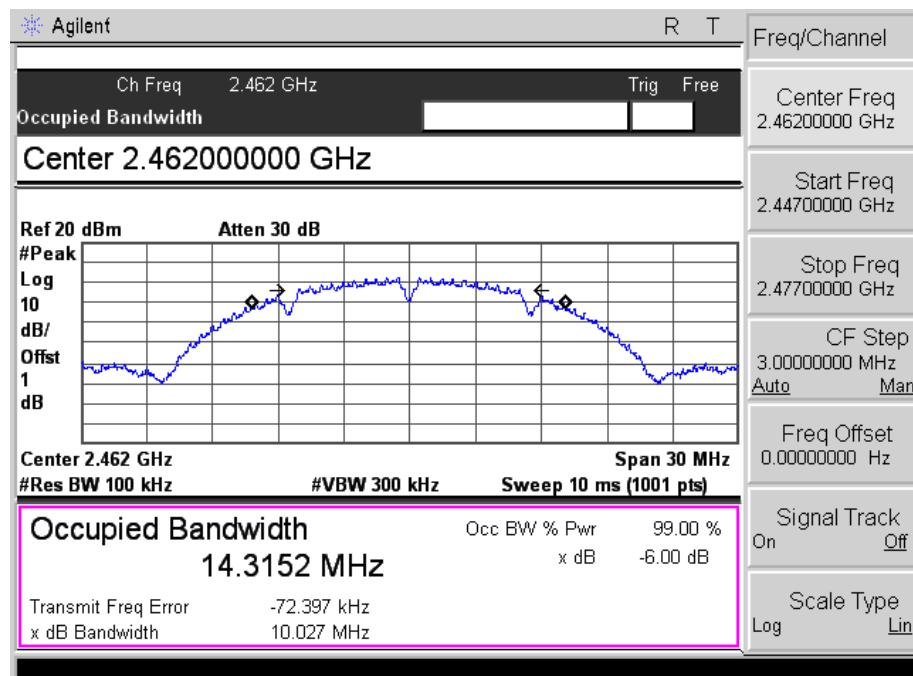


## 802.11g-Low Channel

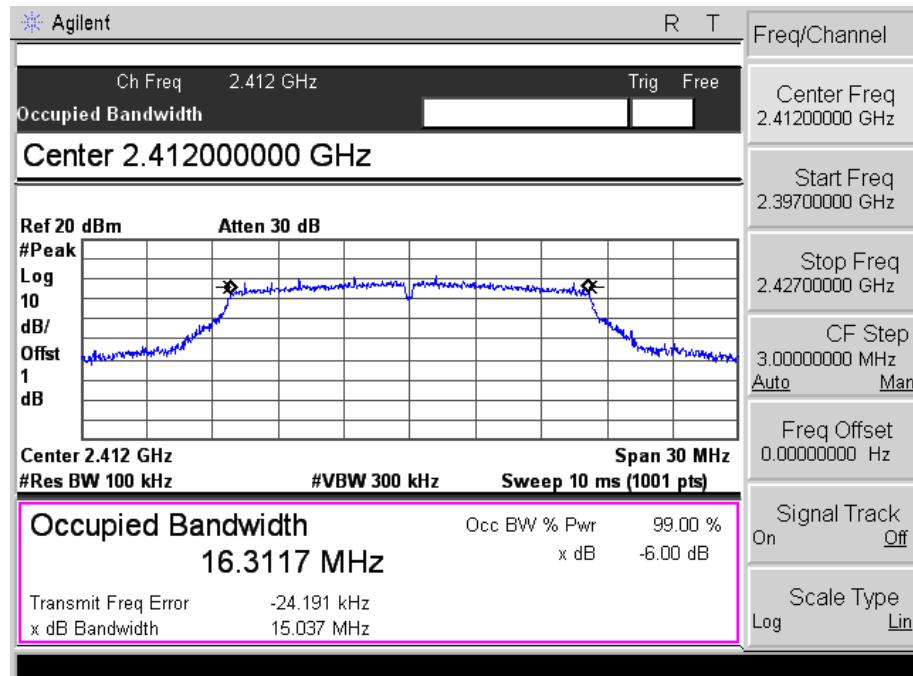


## 802.11g-Middle Channel

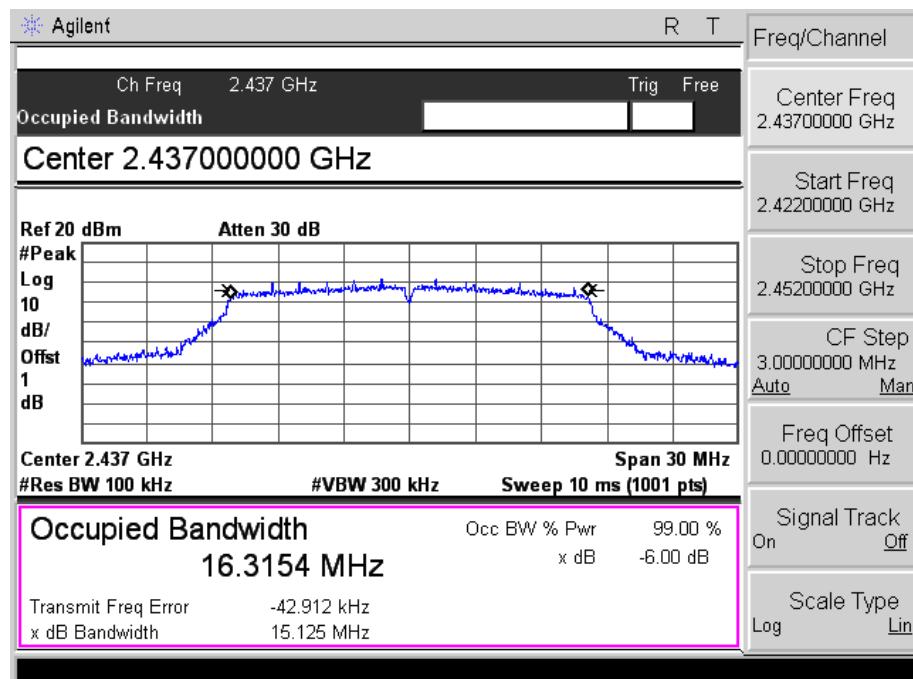


## 802.11g-High Channel

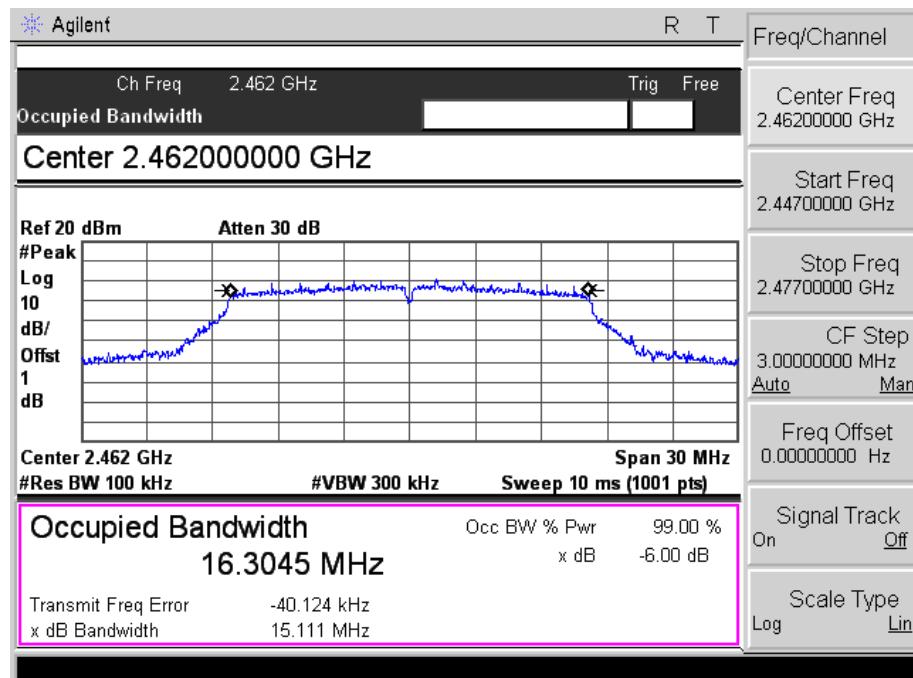


## 802.11n-HT20-Low Channel

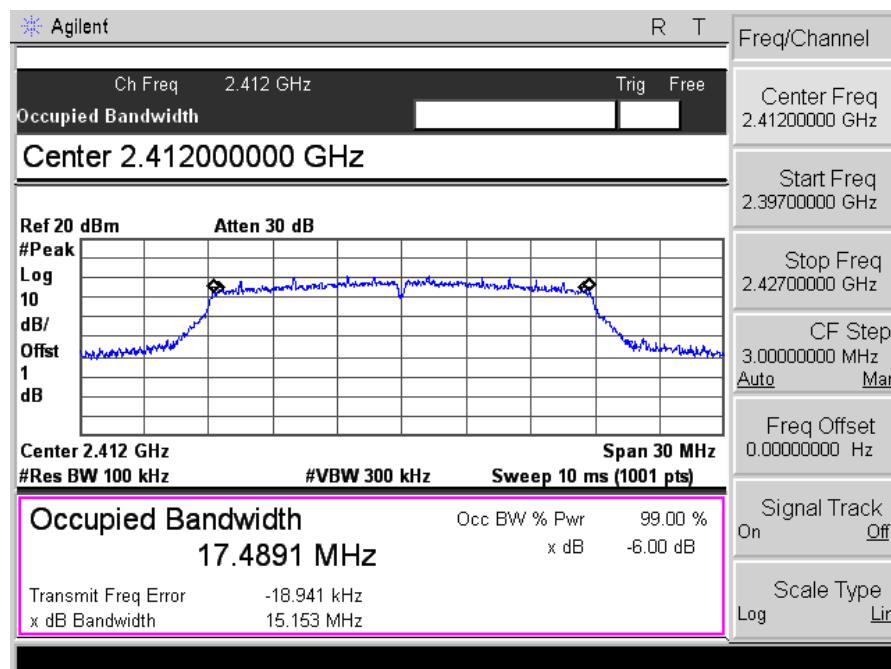


## 802.11n-HT20-Middle Channel

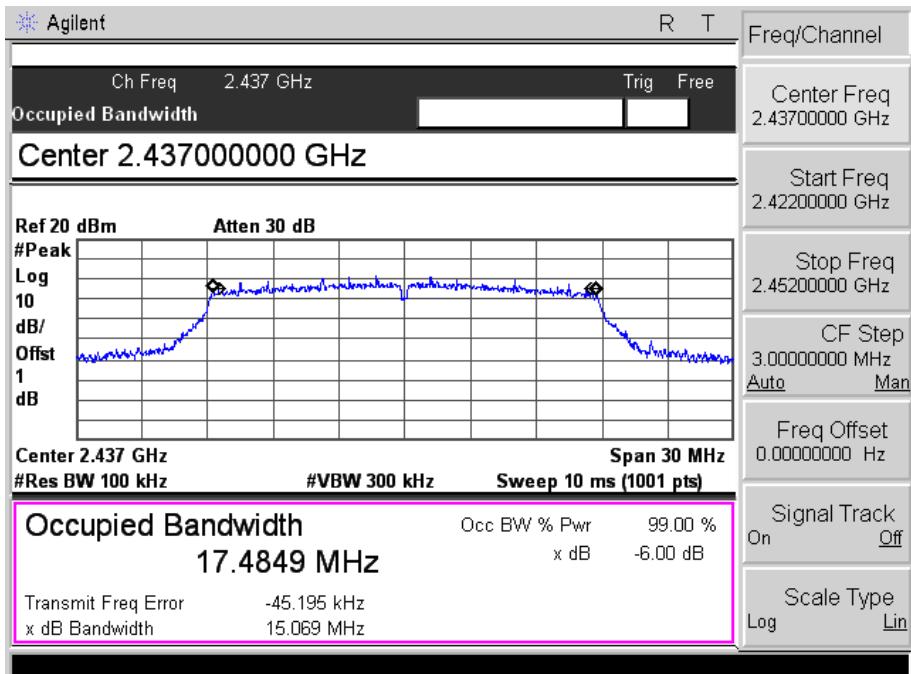


## 802.11n-HT20-High Channel

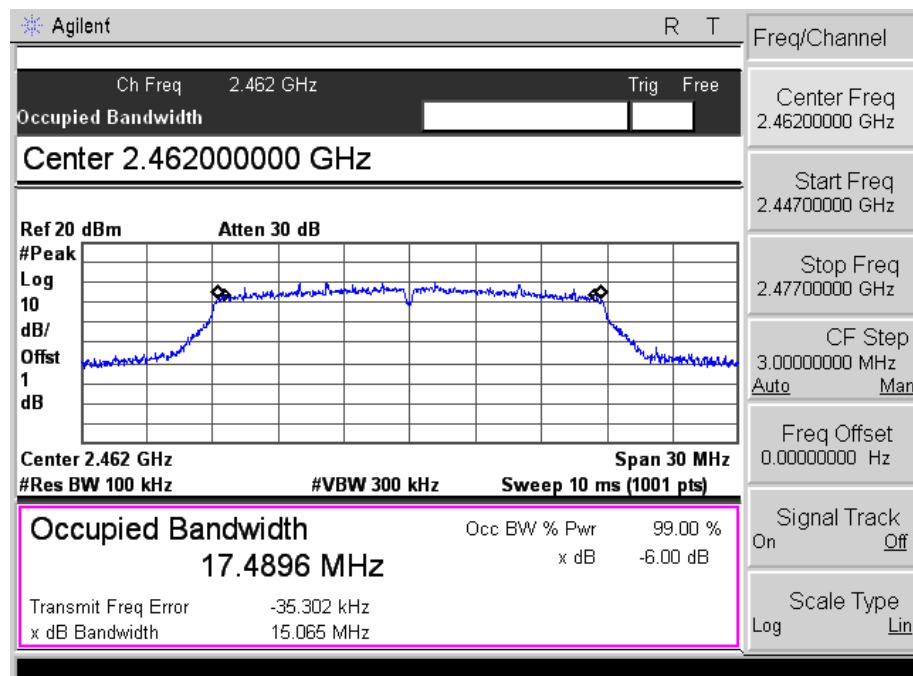


## 802.11n-HT40-Low Channel

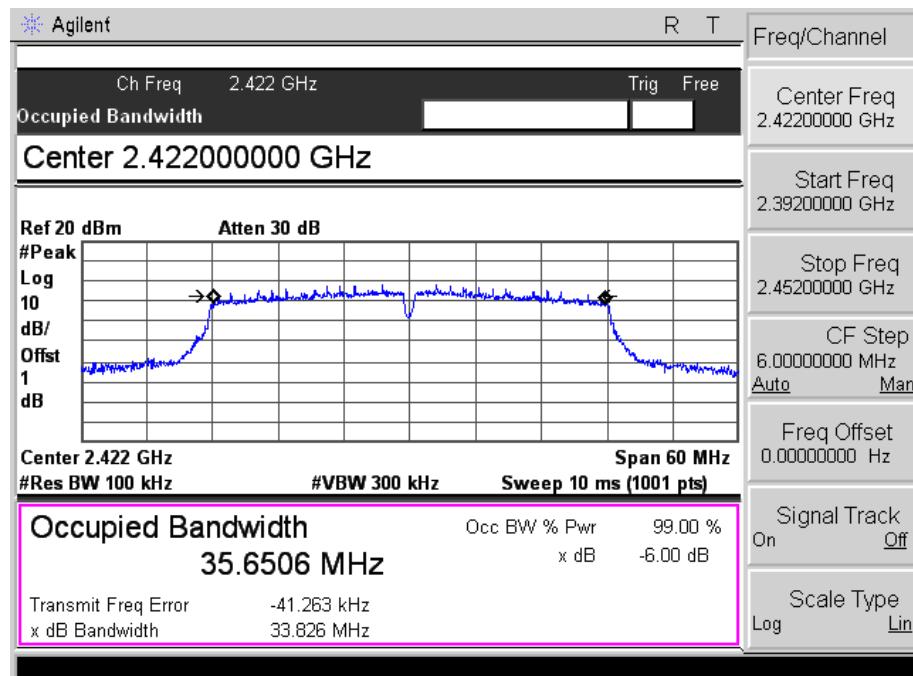

## 802.11n-HT40-Middle Channel

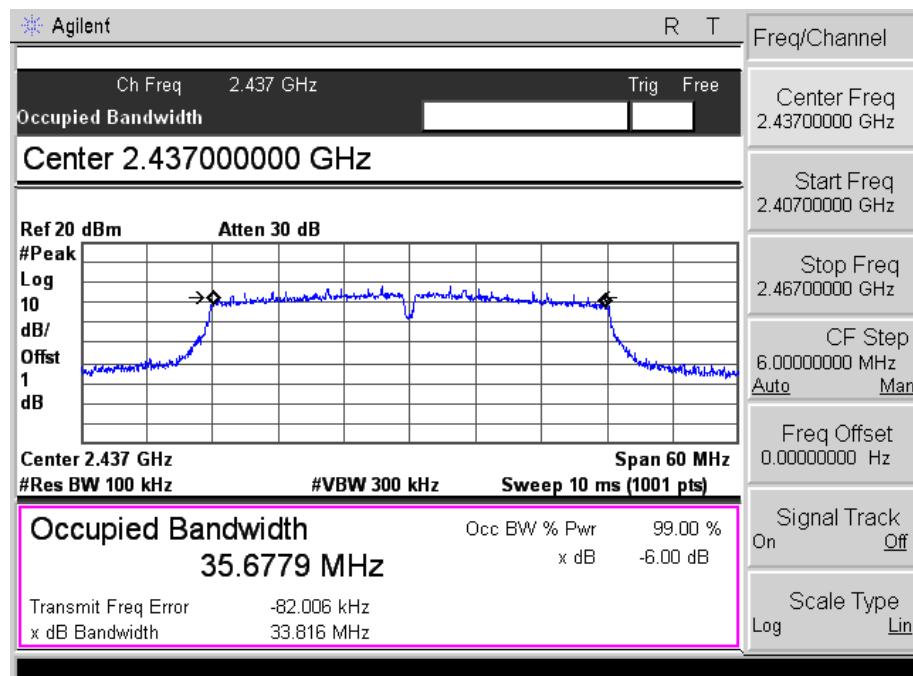


## 802.11n-HT40-High Channel

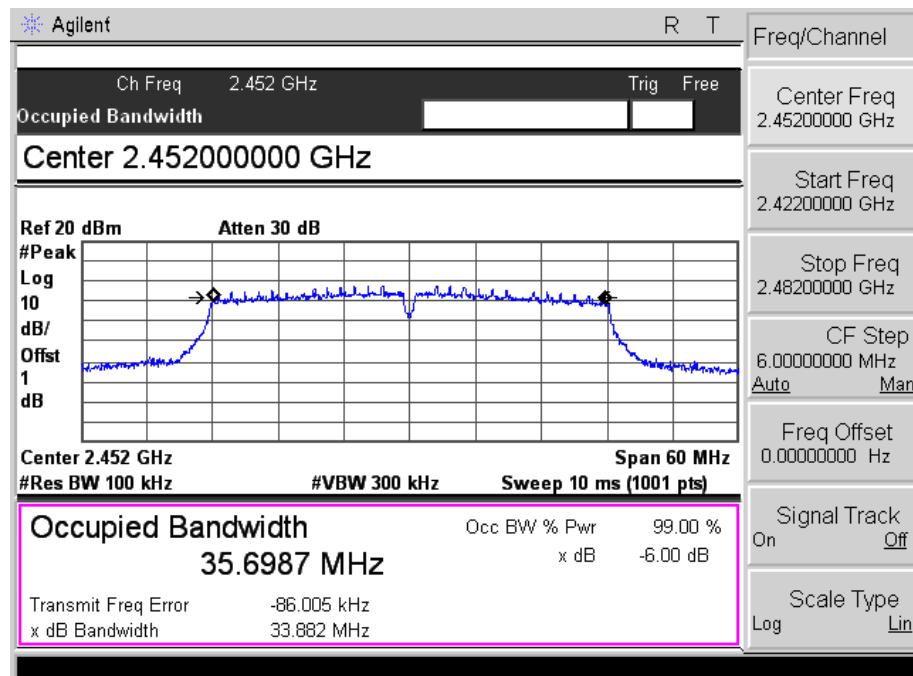


## Antenna 2


802.11b-Low Channel

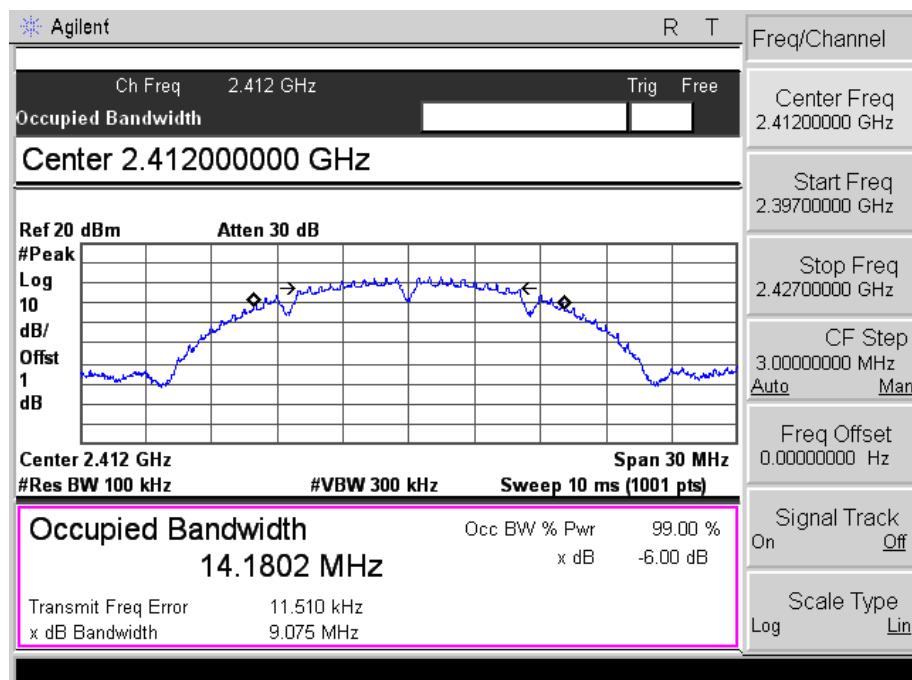


802.11b-Middle Channel

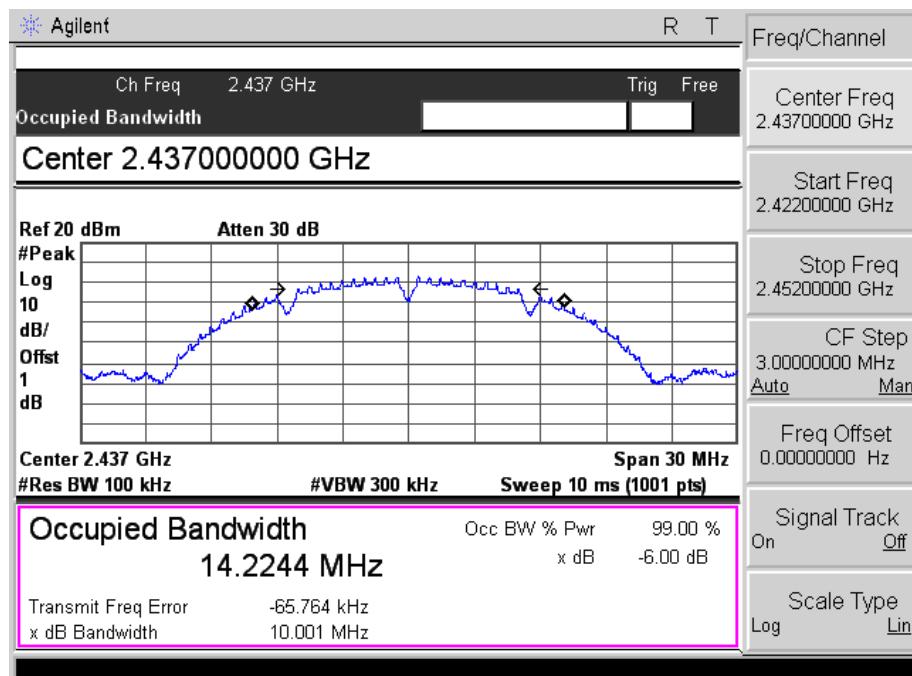


## 802.11b-High Channel

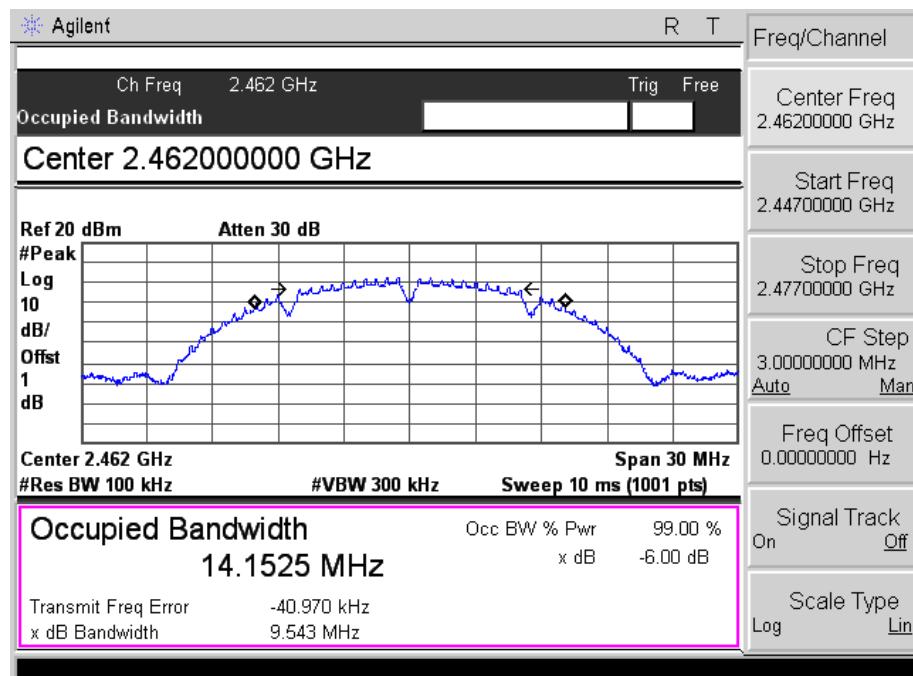


## 802.11g-Low Channel

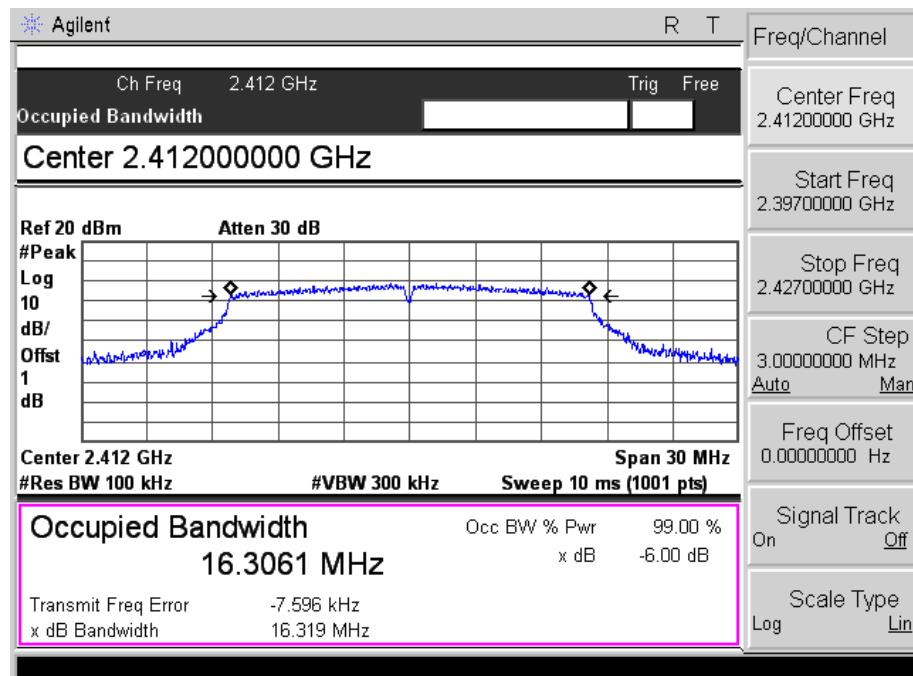


## 802.11g-Middle Channel

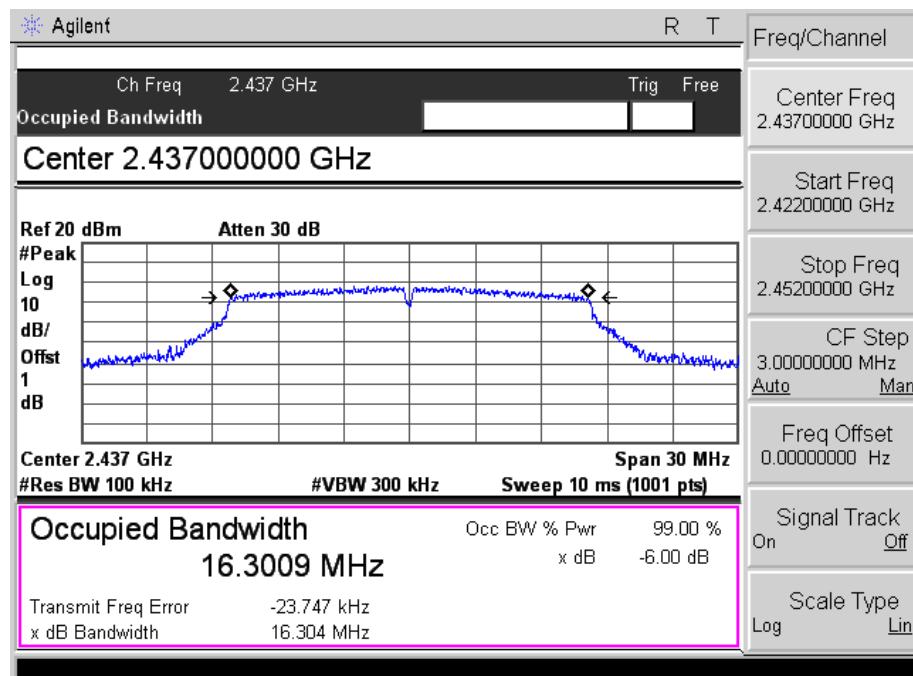


## 802.11g-High Channel

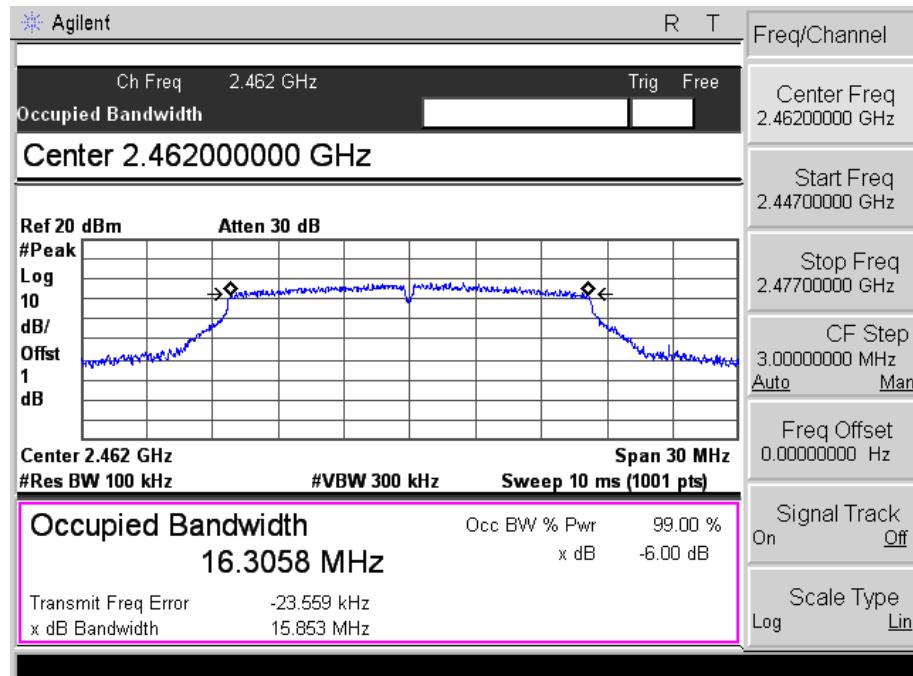


## 802.11n-HT20-Low Channel

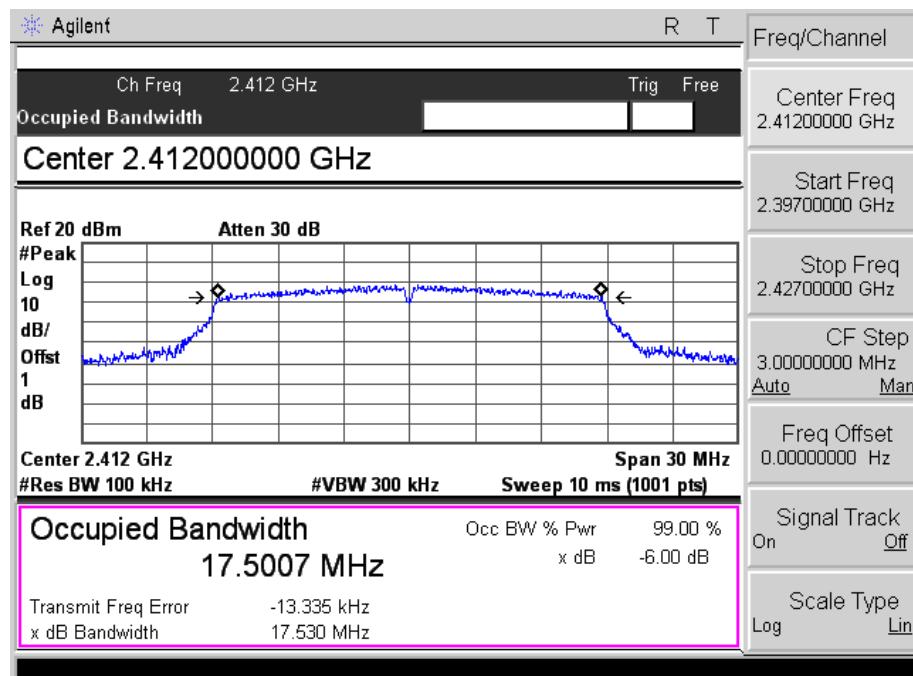


## 802.11n-HT20-Middle Channel

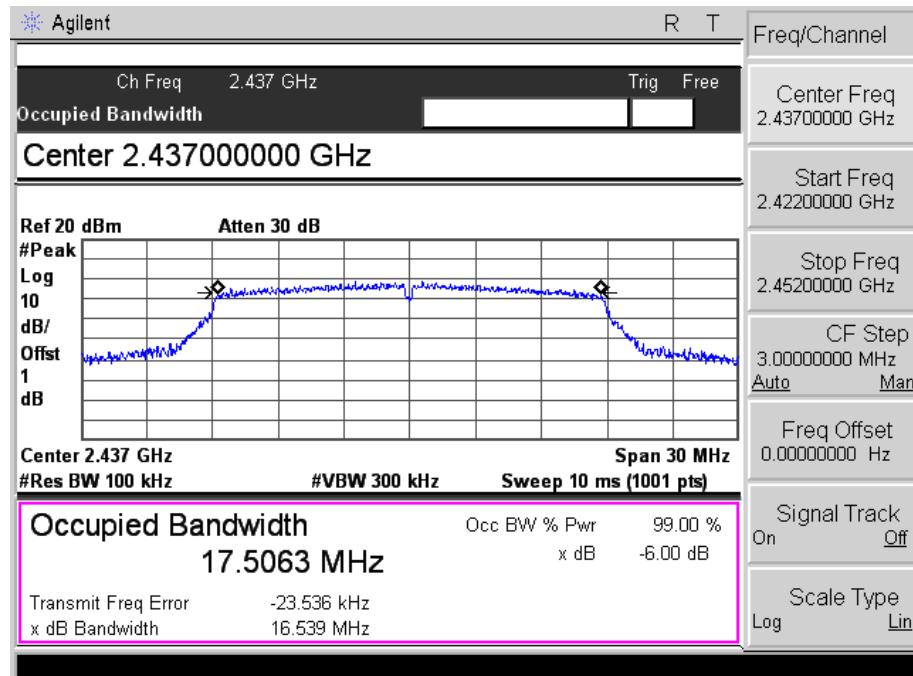


## 802.11n-HT20-High Channel

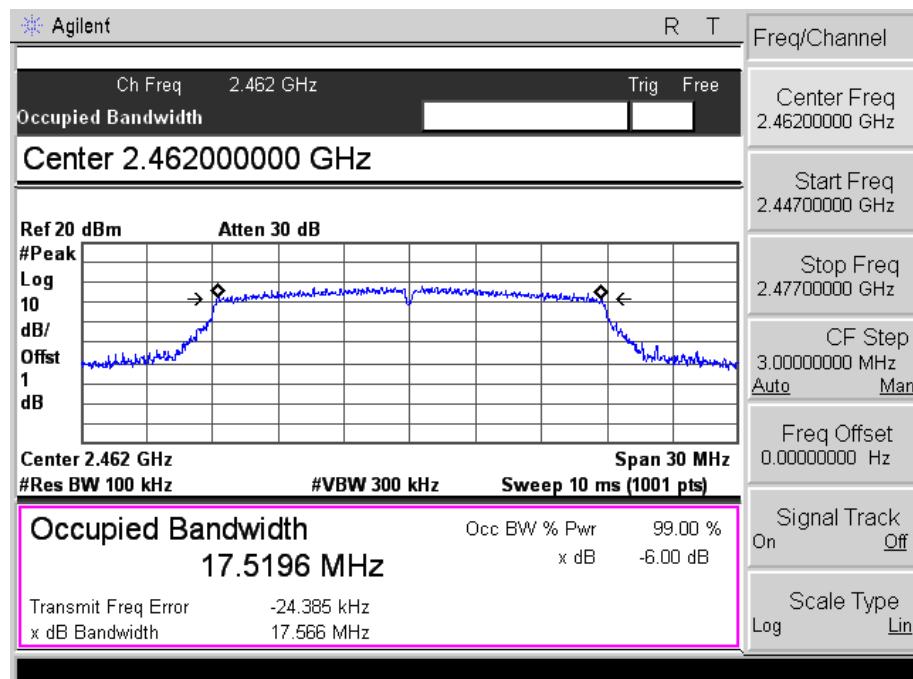


## 802.11n-HT40-Low Channel

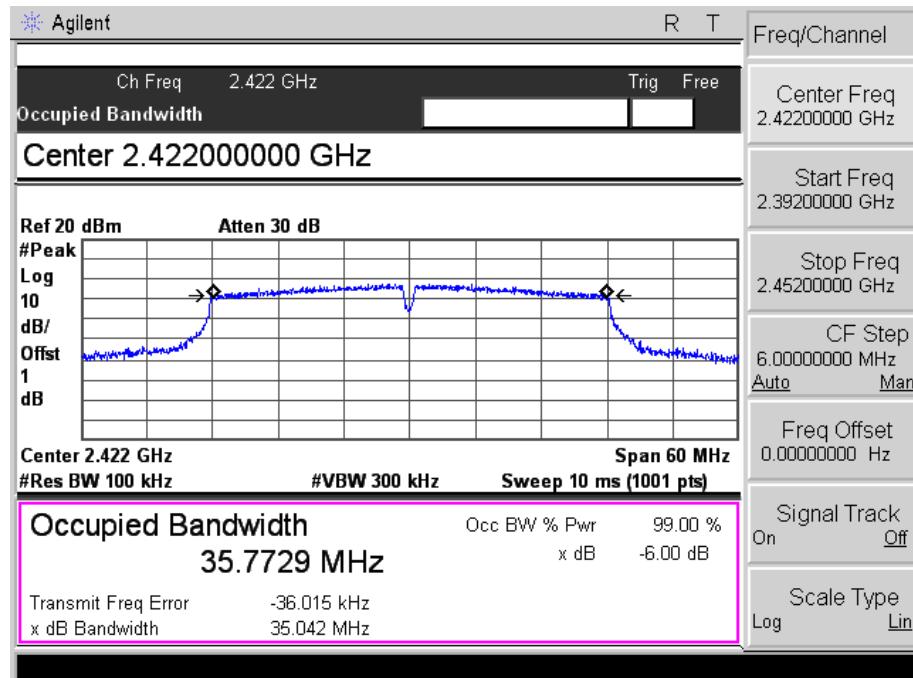

## 802.11n-HT40-Middle Channel

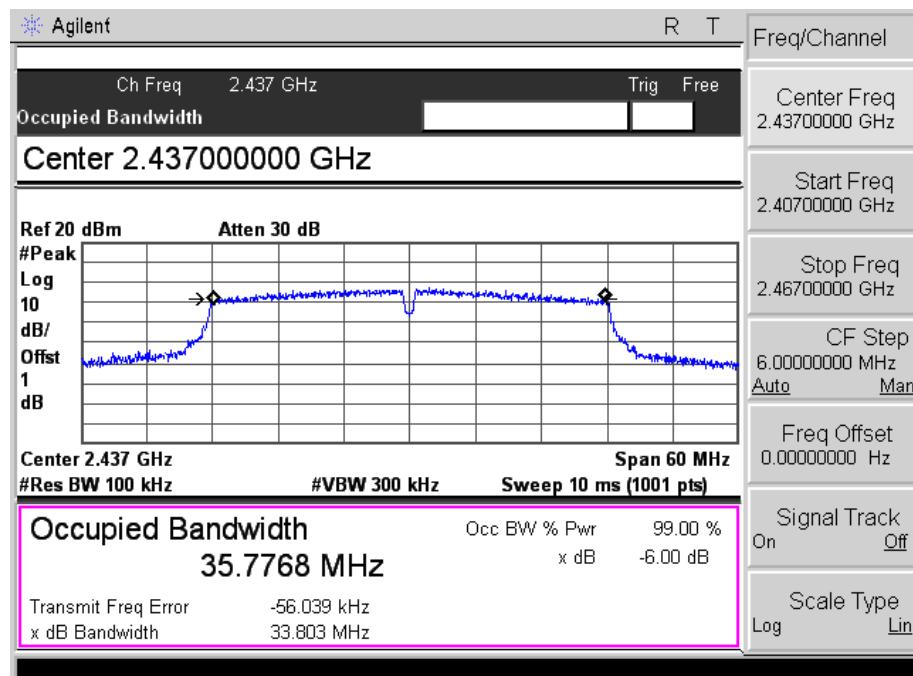

## 802.11n-HT40-High Channel

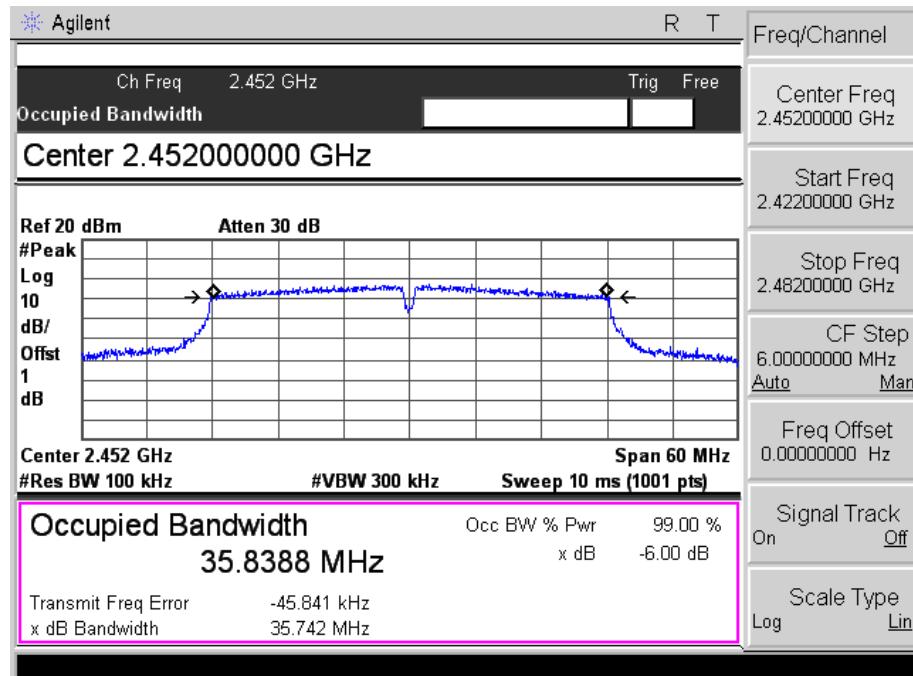

## 7. RF Output Power

---

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to KDB-558074 D01 V04, (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar


## 7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Power 1 dBm	Power 2 dBm	Power 1 mW	Power 2 mW	Total Power dBm	Output Power mW	Limit mW
802.11b _11Mbps	2412	14.24	13.89	26.55	24.49	/	/	1000
	2437	14.24	13.60	26.55	22.91	/	/	1000
	2462	13.64	13.46	23.12	22.18	/	/	1000
802.11g _54Mbps	2412	13.42	12.63	21.98	18.32	/	/	1000
	2437	13.07	12.52	20.28	17.86	/	/	1000
	2462	13.03	12.02	20.09	15.92	/	/	1000
802.11n HT20_MCS7	2412	12.03	11.54	15.96	14.26	14.80	30.22	1000
	2437	12.02	11.14	15.92	13.00	14.61	28.92	1000
	2462	11.69	11.64	14.76	14.59	14.68	29.35	1000
802.11n HT40_MCS7	2422	12.27	11.73	16.87	14.89	15.02	31.76	1000
	2437	12.08	11.60	16.14	14.45	14.86	30.60	1000
	2452	11.93	11.10	15.60	12.88	14.55	28.48	1000


Please refer to the following test plots:

## Antenna 1


802.11b-11Mbps-Low Channel

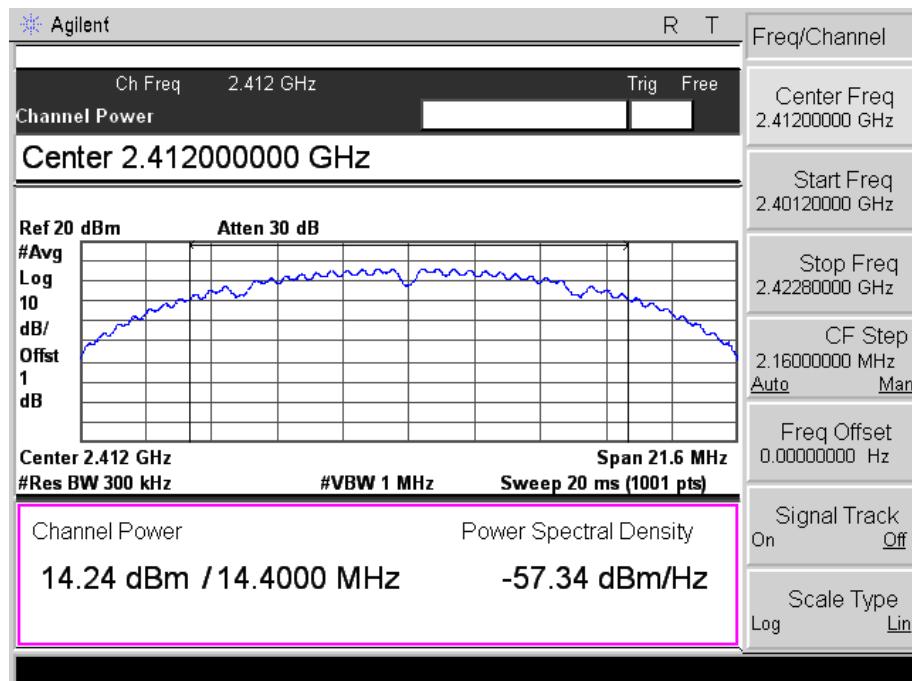


802.11b -11Mbps-Middle Channel

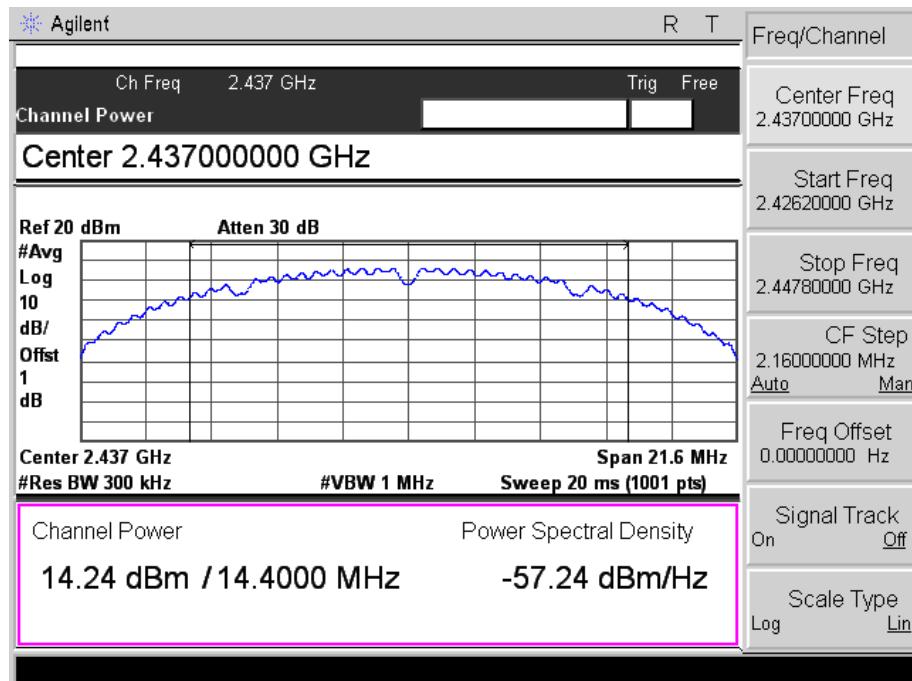


## 802.11b -11Mbps-High Channel

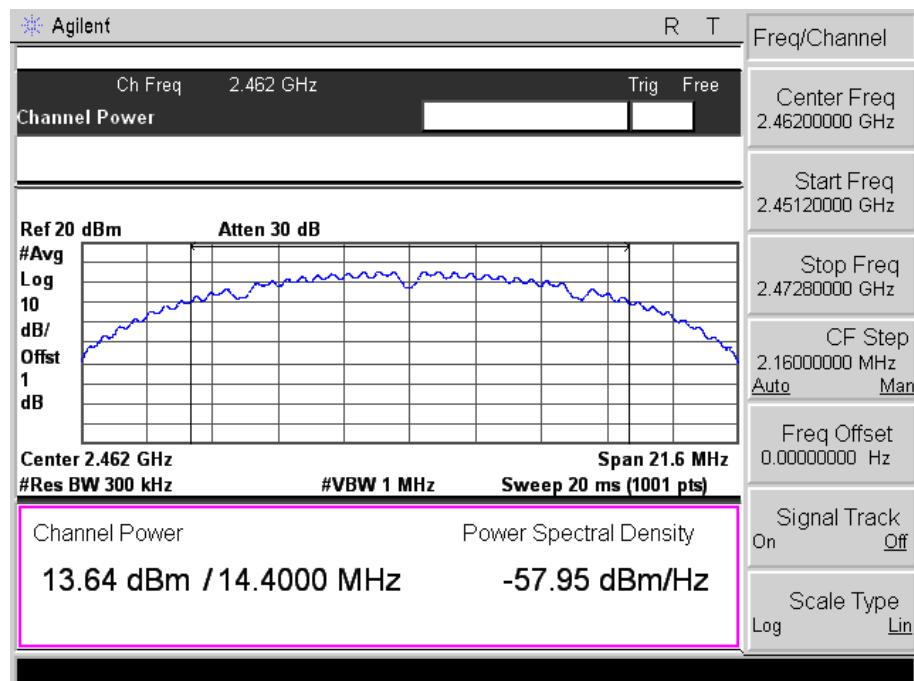


## 802.11g-54Mbps-Low Channel

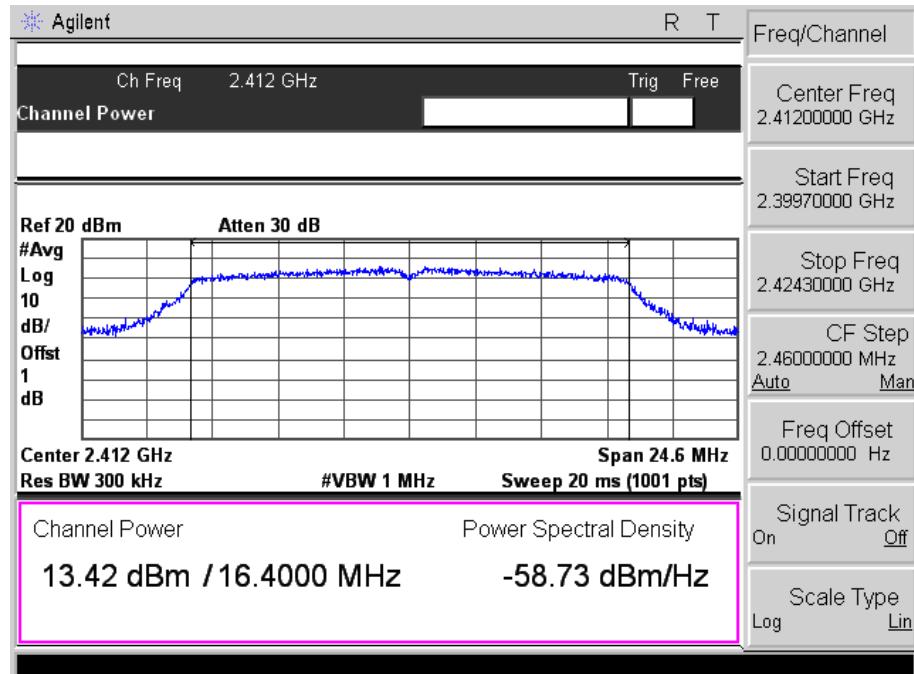


## 802.11g-54Mbps-Middle Channel

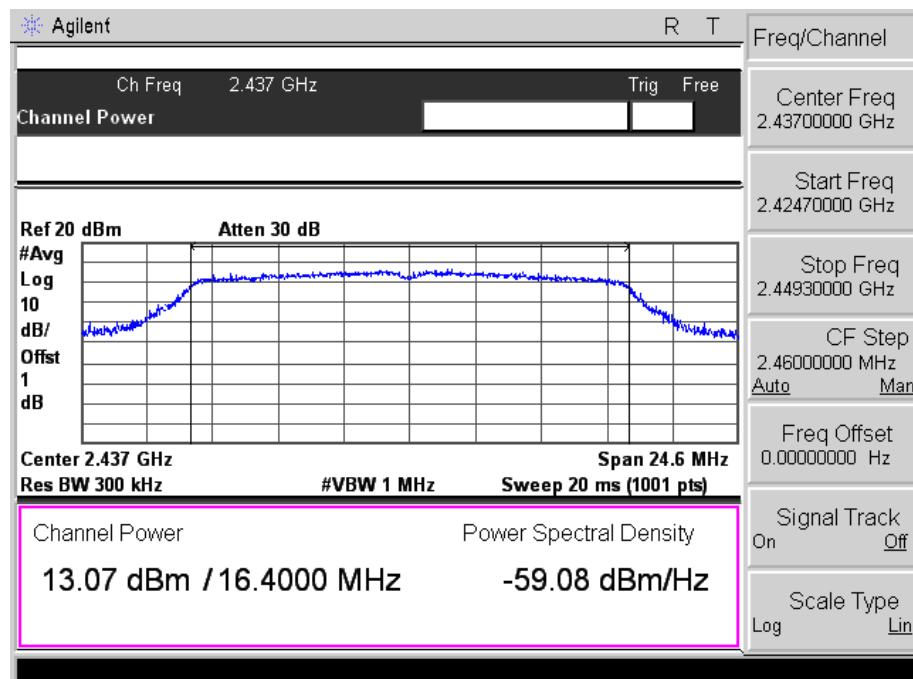


## 802.11g-54Mbps-High Channel

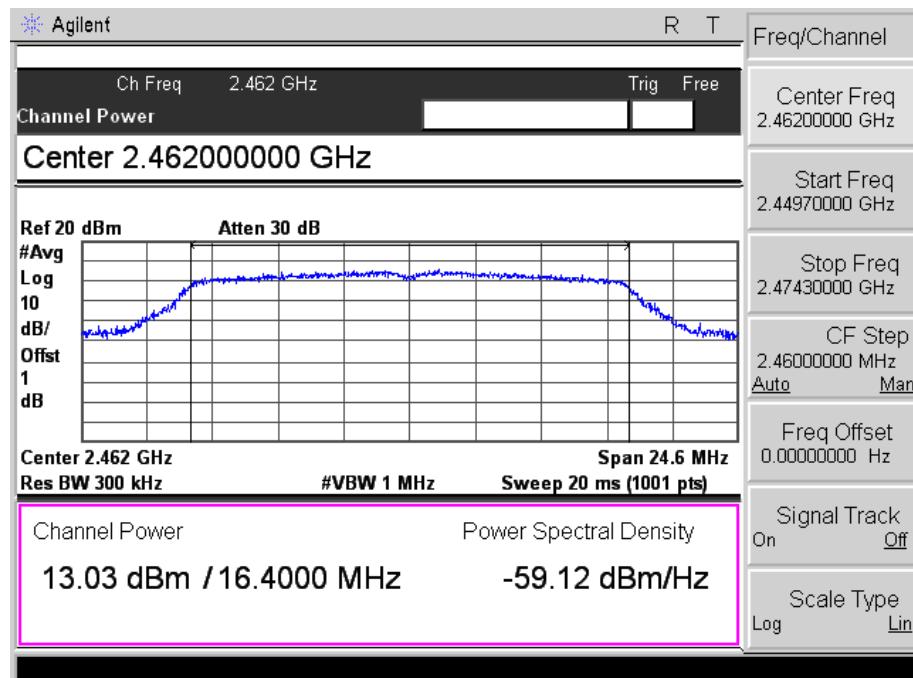


## 802.11n-HT20-MCS7-Low Channel

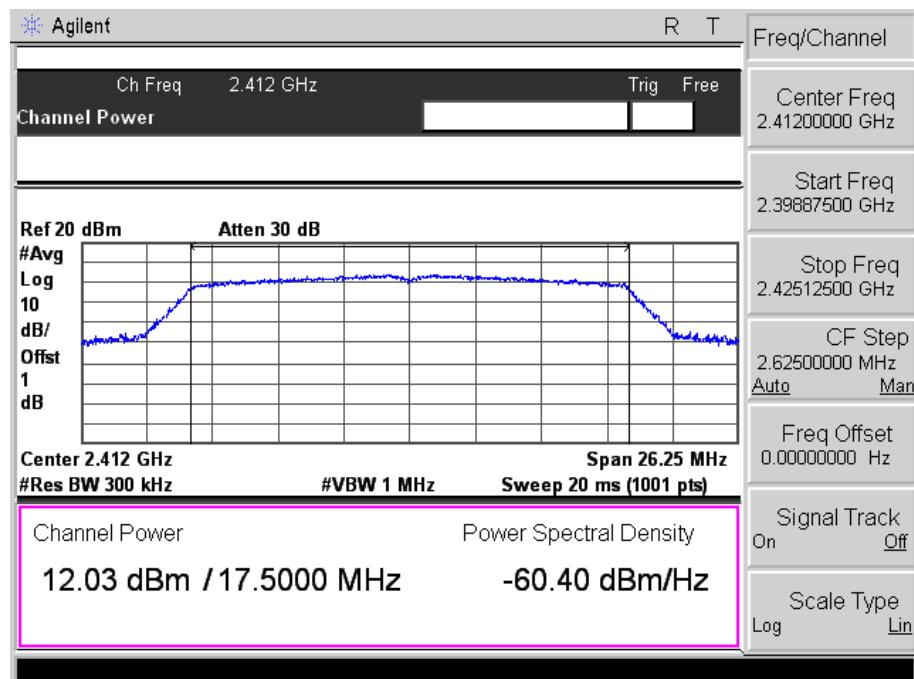


## 802.11n-HT20-MCS7-Middle Channel

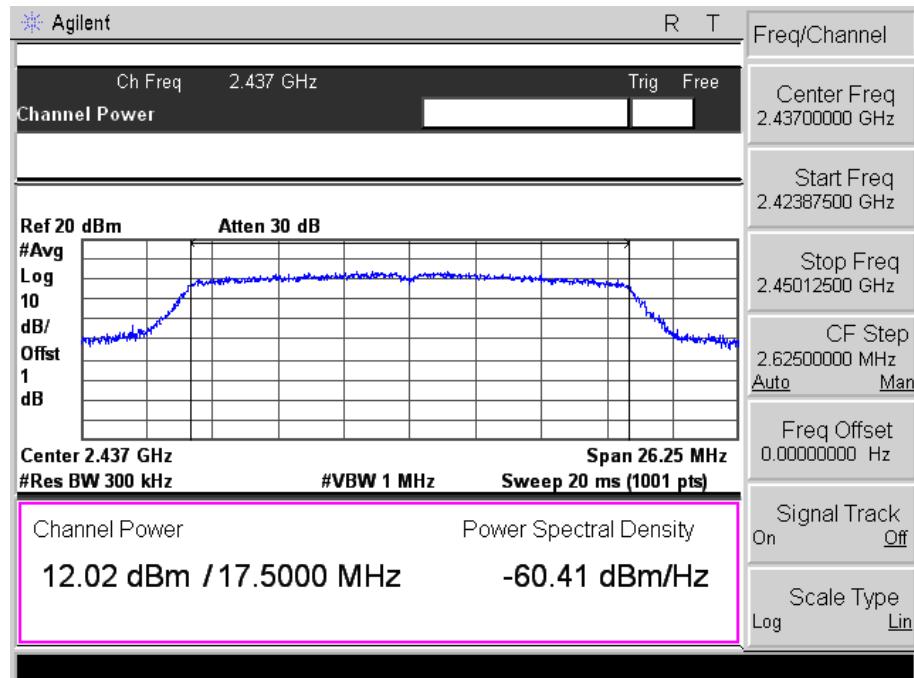


## 802.11n-HT20-MCS7-High Channel

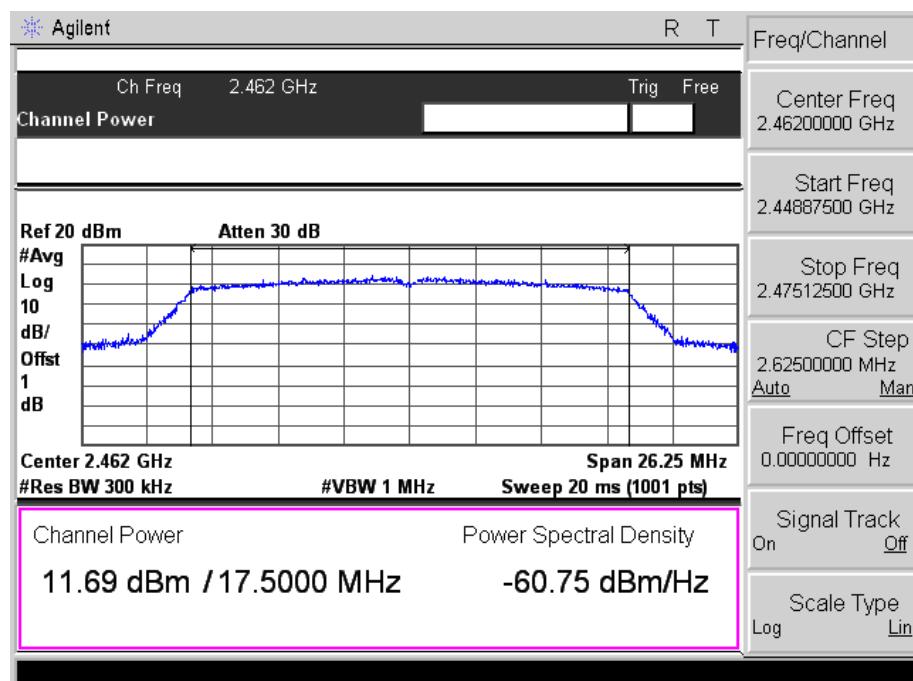


## 802.11n-HT40-MCS7-Low Channel

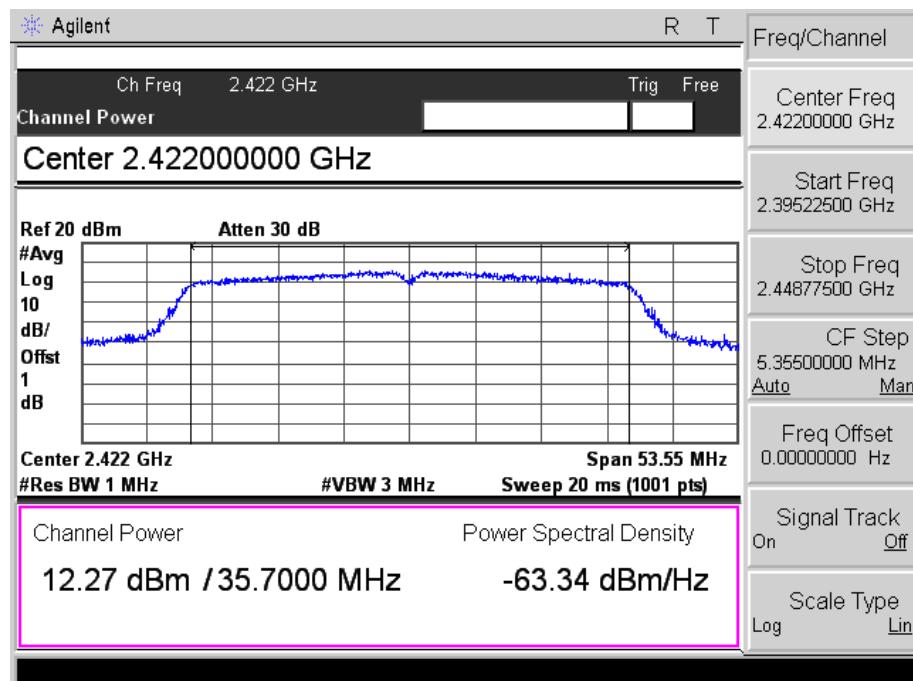

## 802.11n-HT40-MCS7-Middle Channel

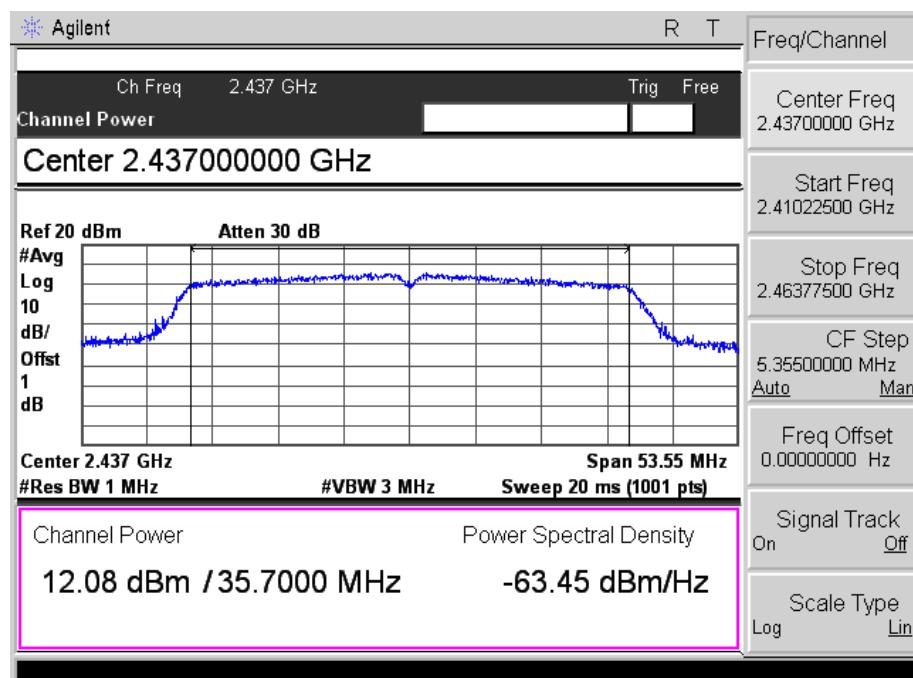


## 802.11n-HT40-MCS7-High Channel

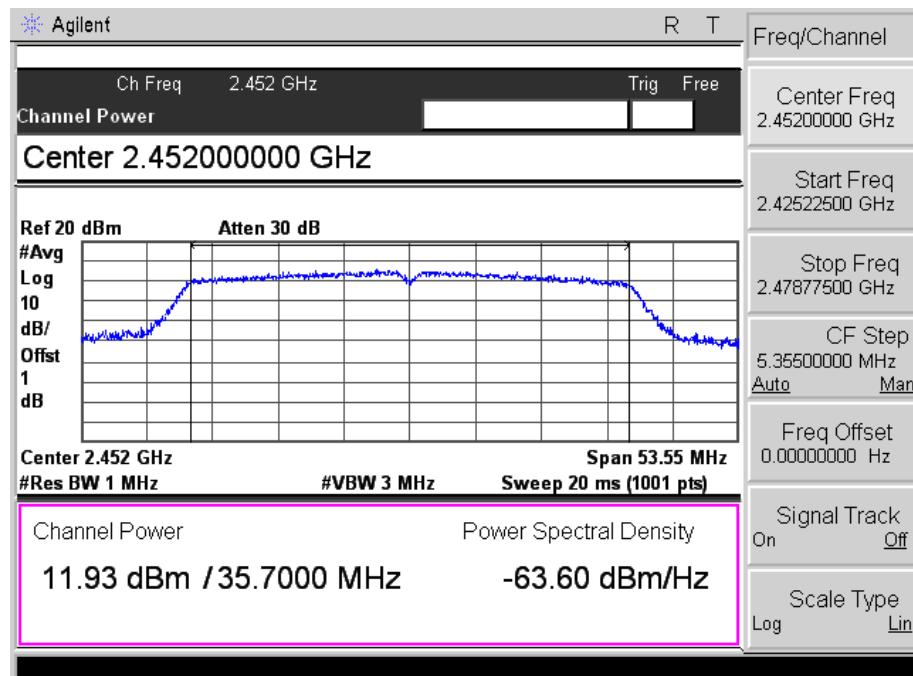


## Antenna 2


802.11b-11Mbps-Low Channel

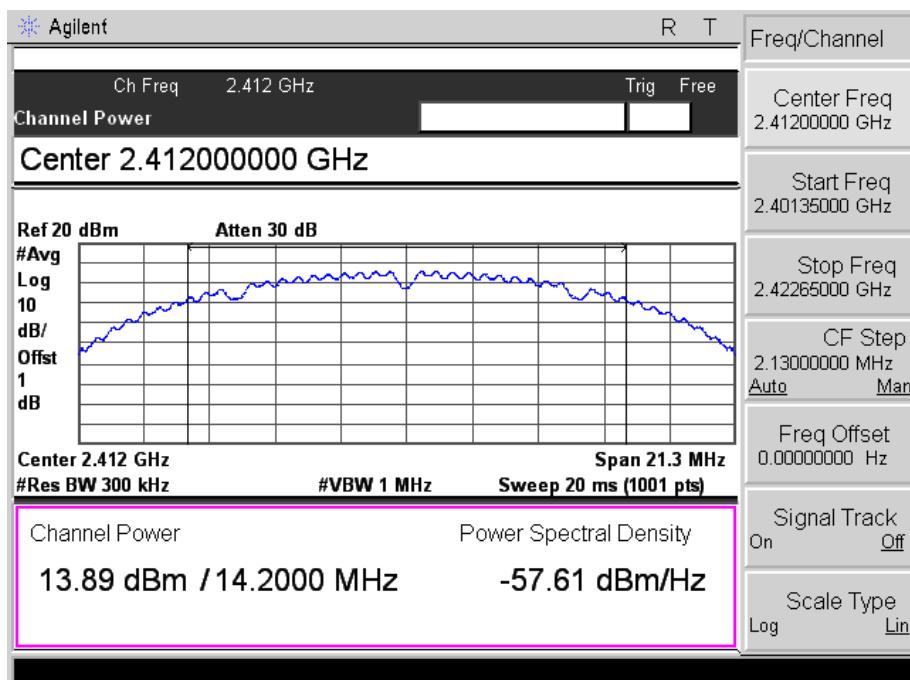


802.11b -11Mbps-Middle Channel

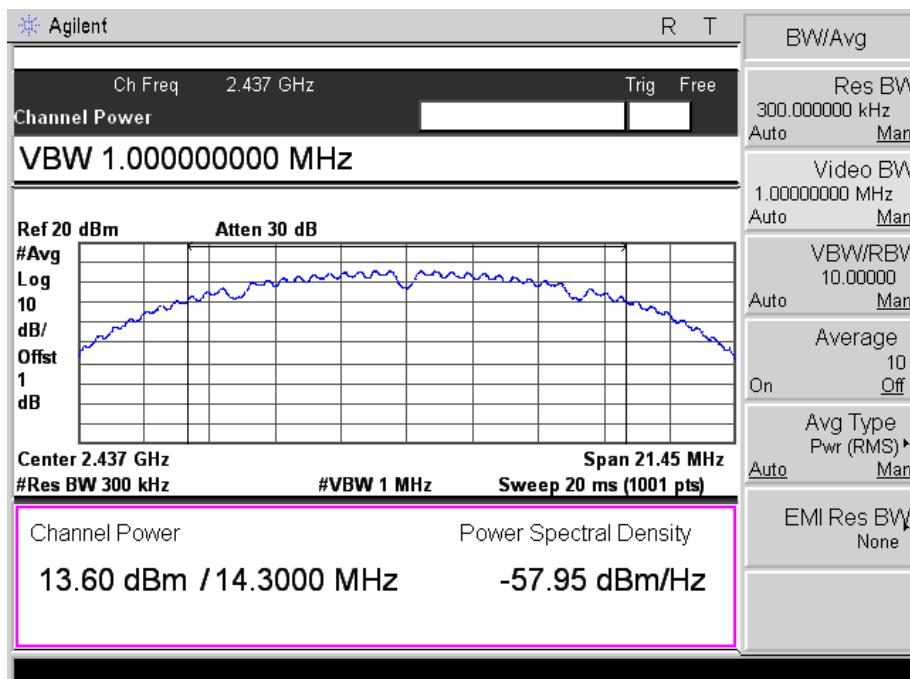


## 802.11b -11Mbps-High Channel

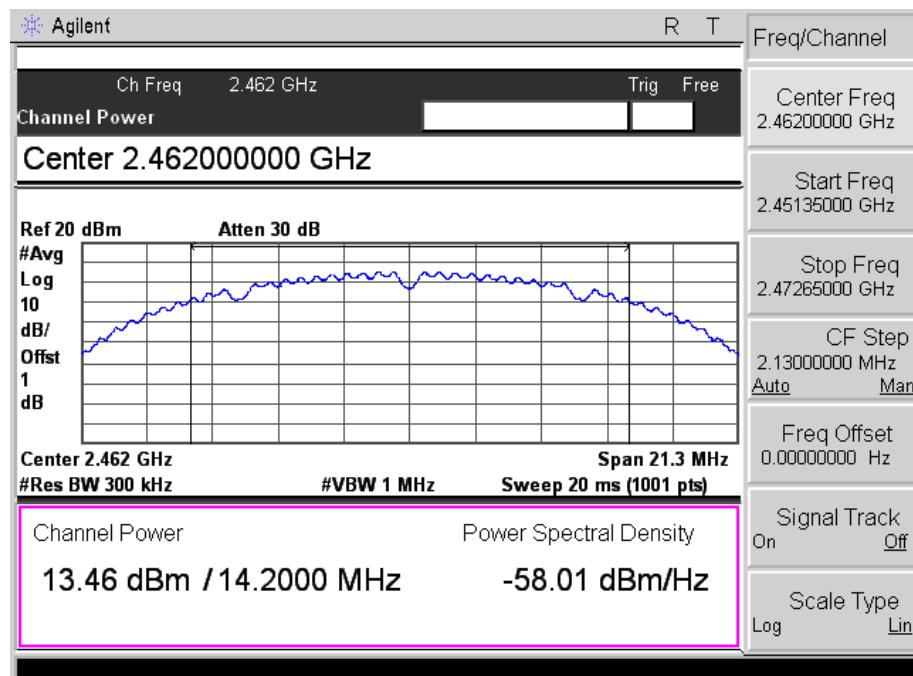


## 802.11g-54Mbps-Low Channel

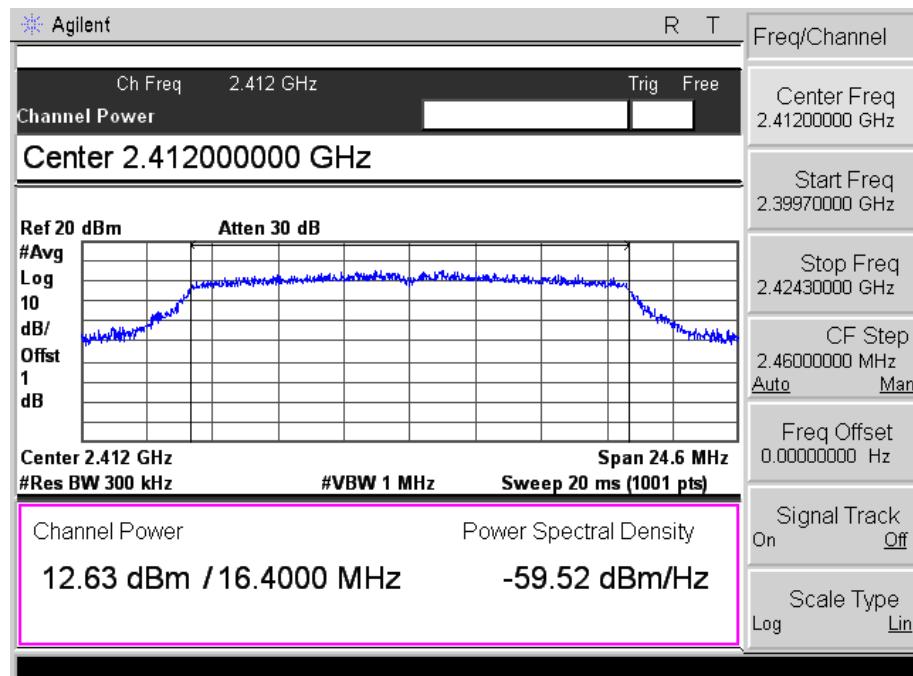


## 802.11g-54Mbps-Middle Channel

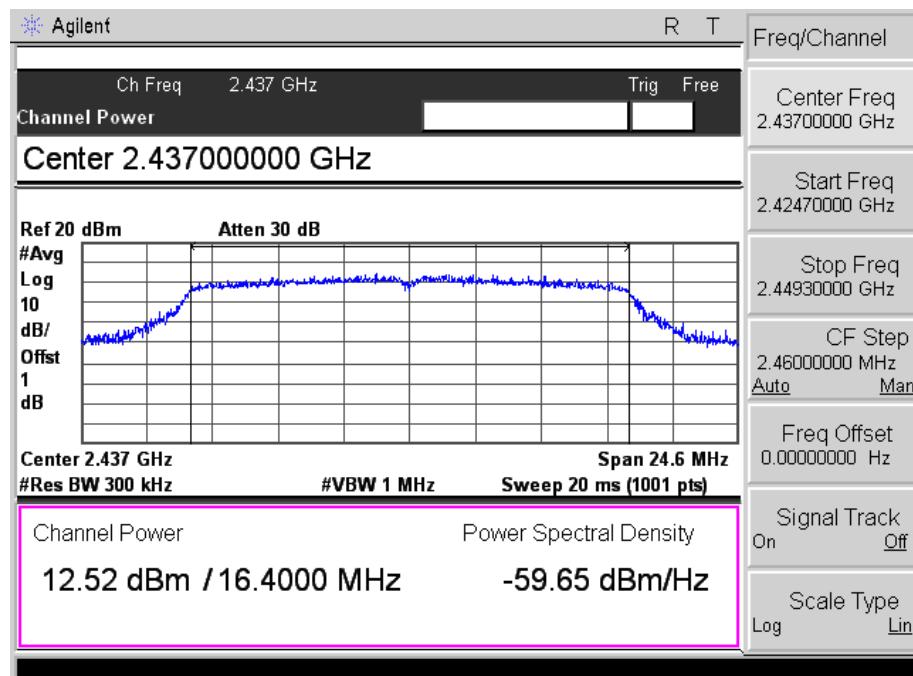


## 802.11g-54Mbps-High Channel

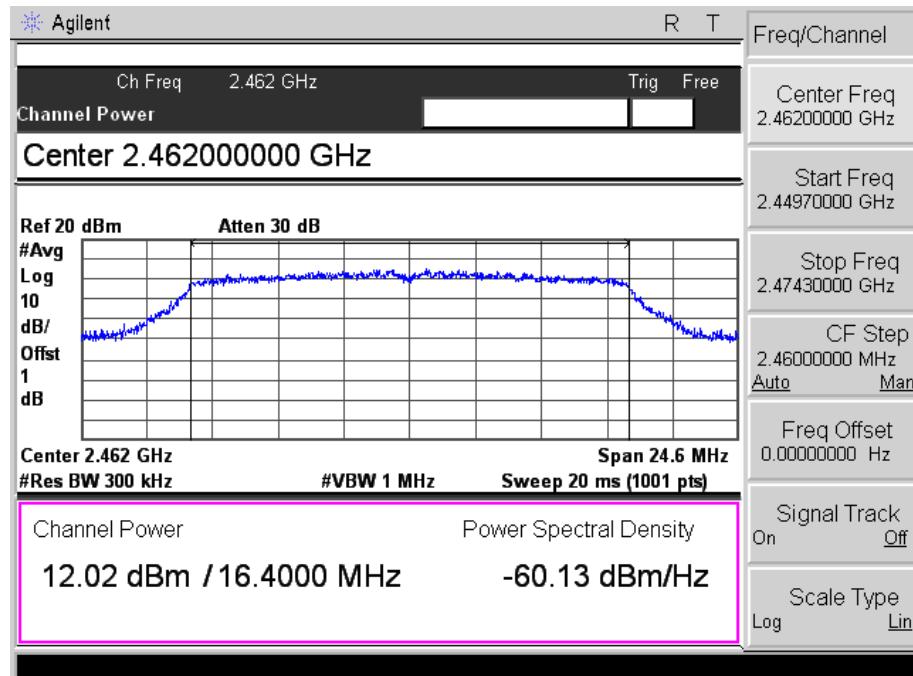


## 802.11n-HT20-MCS7-Low Channel

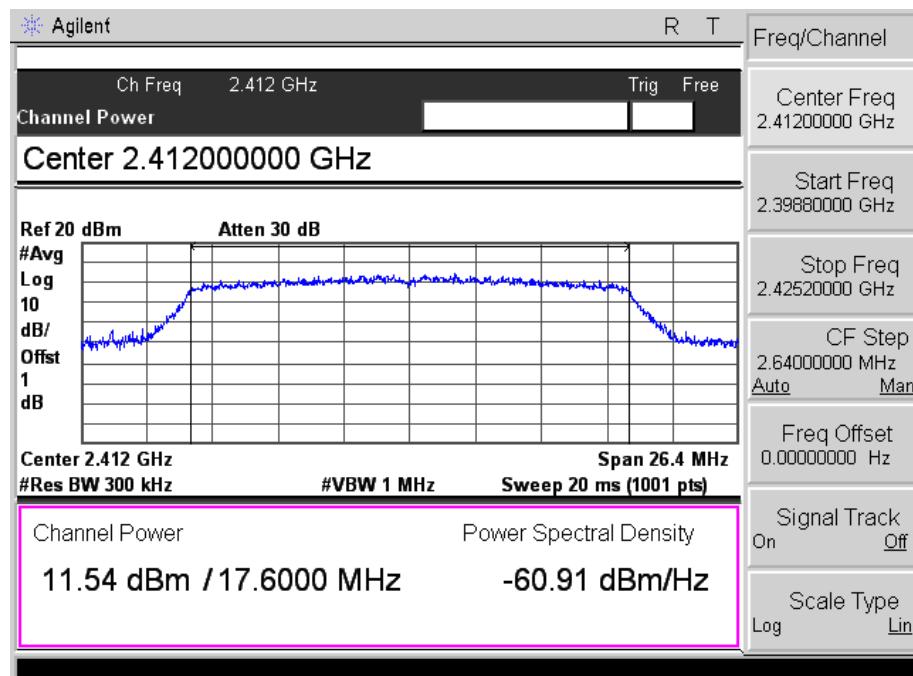


## 802.11n-HT20-MCS7-Middle Channel

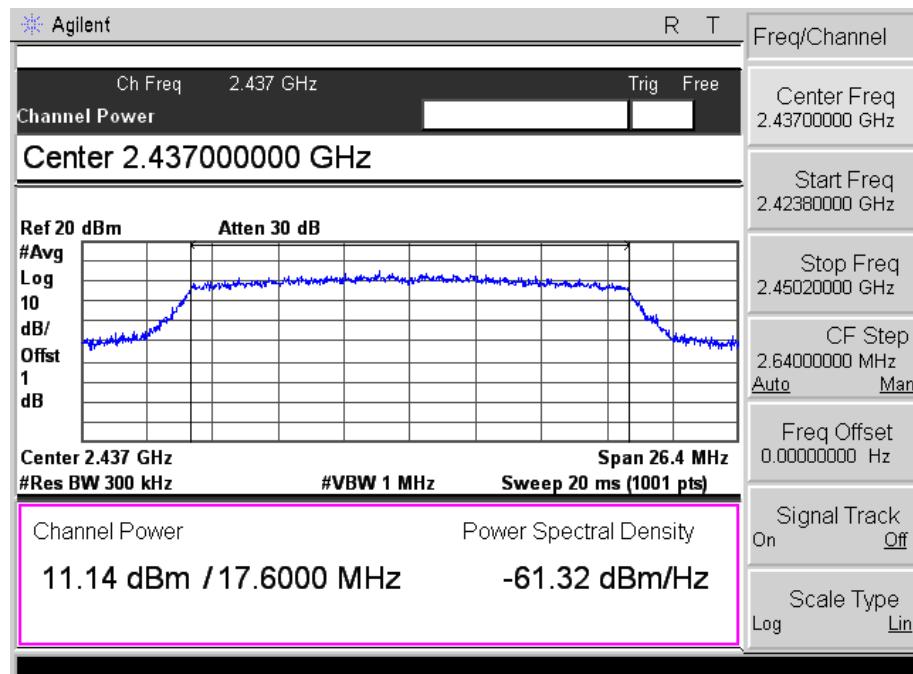


## 802.11n-HT20-MCS7-High Channel

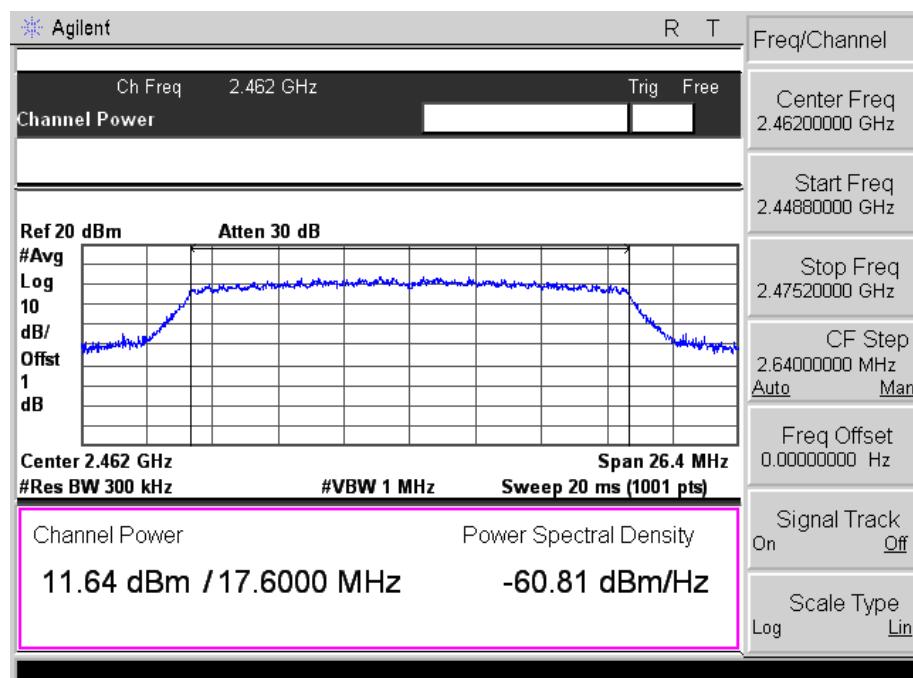


## 802.11n-HT40-MCS7-Low Channel

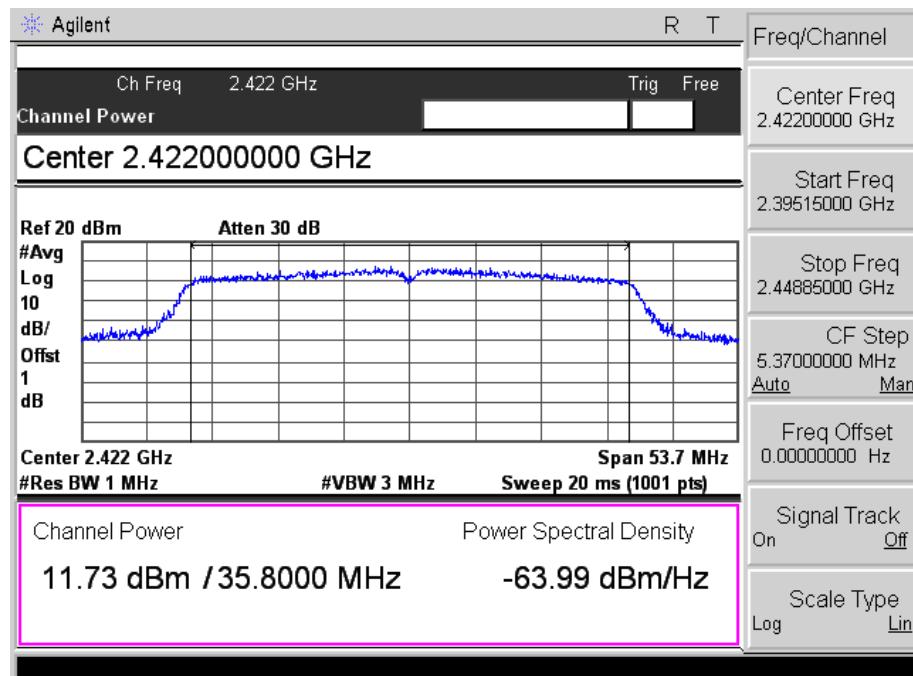

## 802.11n-HT40-MCS7-Middle Channel

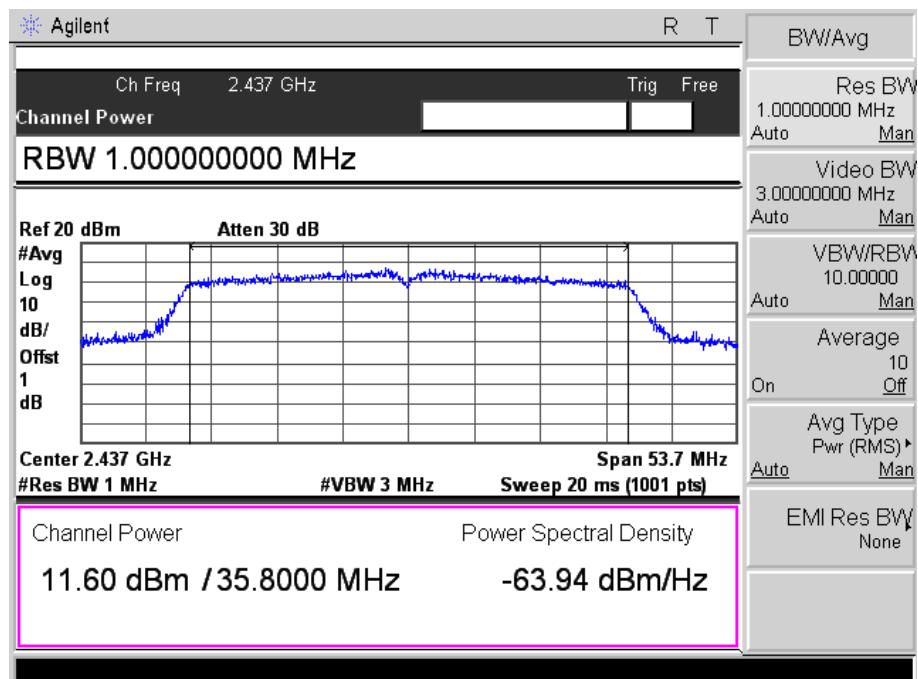

## 802.11n-HT40-MCS7-High Channel

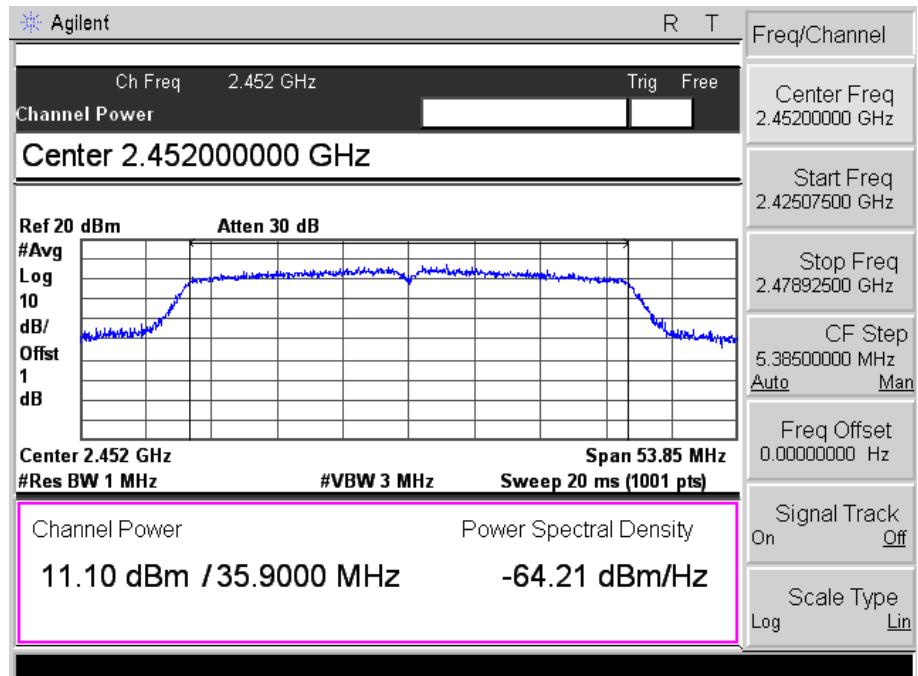

## 8. Field Strength of Spurious Emissions

---

### 8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 8.2 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.3 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

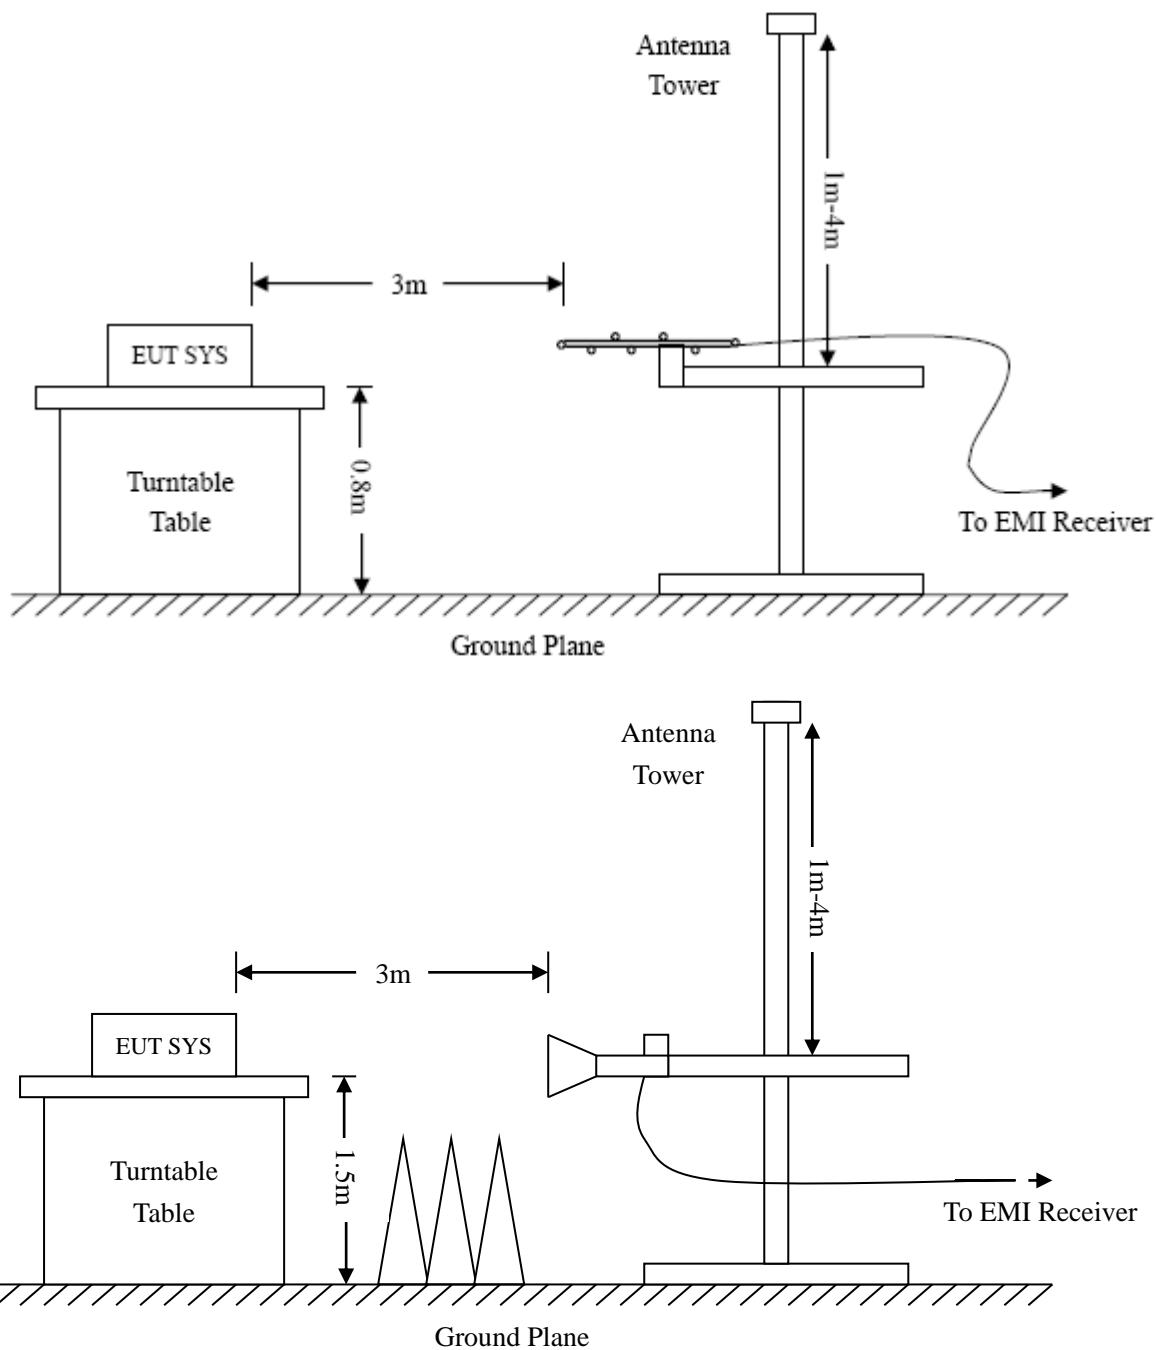

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

## 8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

## 8.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 8.6 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


*EUT:* High Fidelity Active Speaker

*Tested Model:* HiVi M3A

*Operating Condition:* 802.11n HT20MIMO Transmitting Low Channel-2412MHz(worst case)


*Comment:* AC 120V/60Hz

*Test Specification:* Horizontal

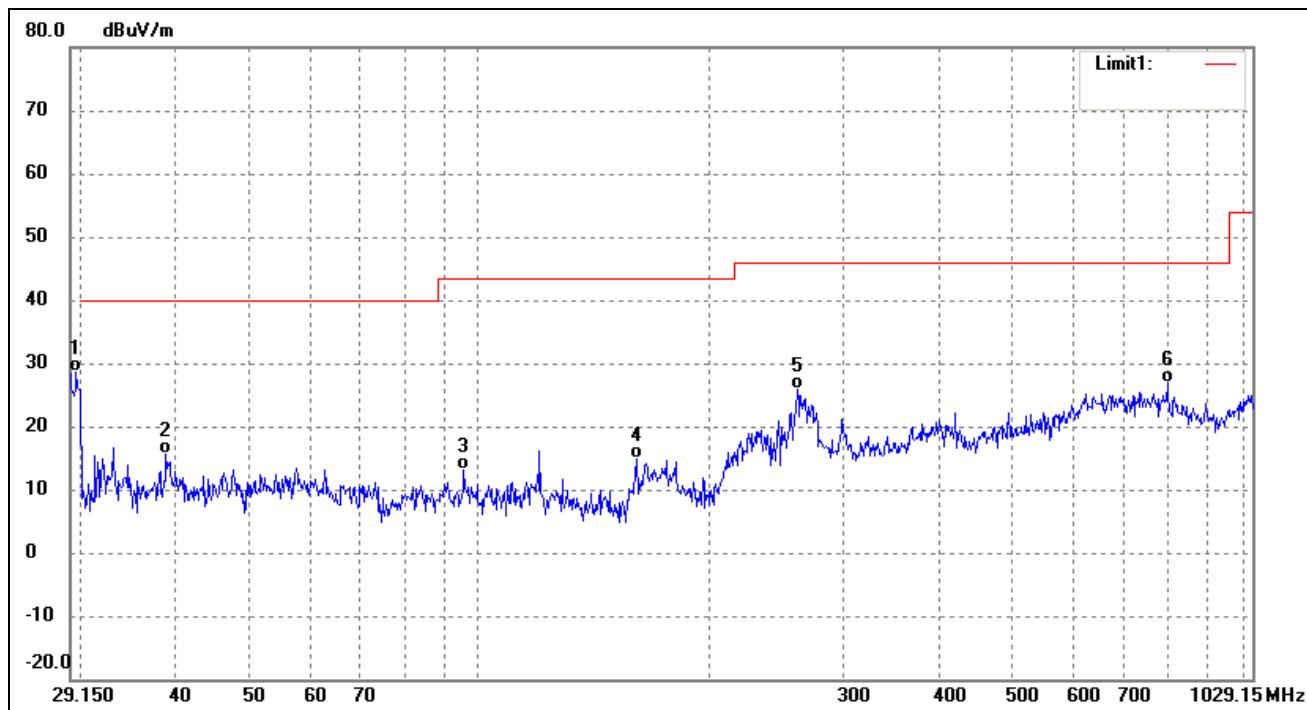

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	29.6743	49.65	-21.06	28.59	40.00	-11.41	254	100	peak
2	38.9061	32.23	-16.70	15.53	40.00	-24.47	100	100	peak
3	95.5151	30.22	-17.21	13.01	43.50	-30.49	284	100	peak
4	160.7149	33.96	-19.10	14.86	43.50	-28.64	280	100	peak
5	260.9526	37.62	-11.71	25.91	46.00	-20.09	92	100	peak
6	796.2227	29.08	-2.13	26.95	46.00	-19.05	331	100	peak

Test Specification: Vertical

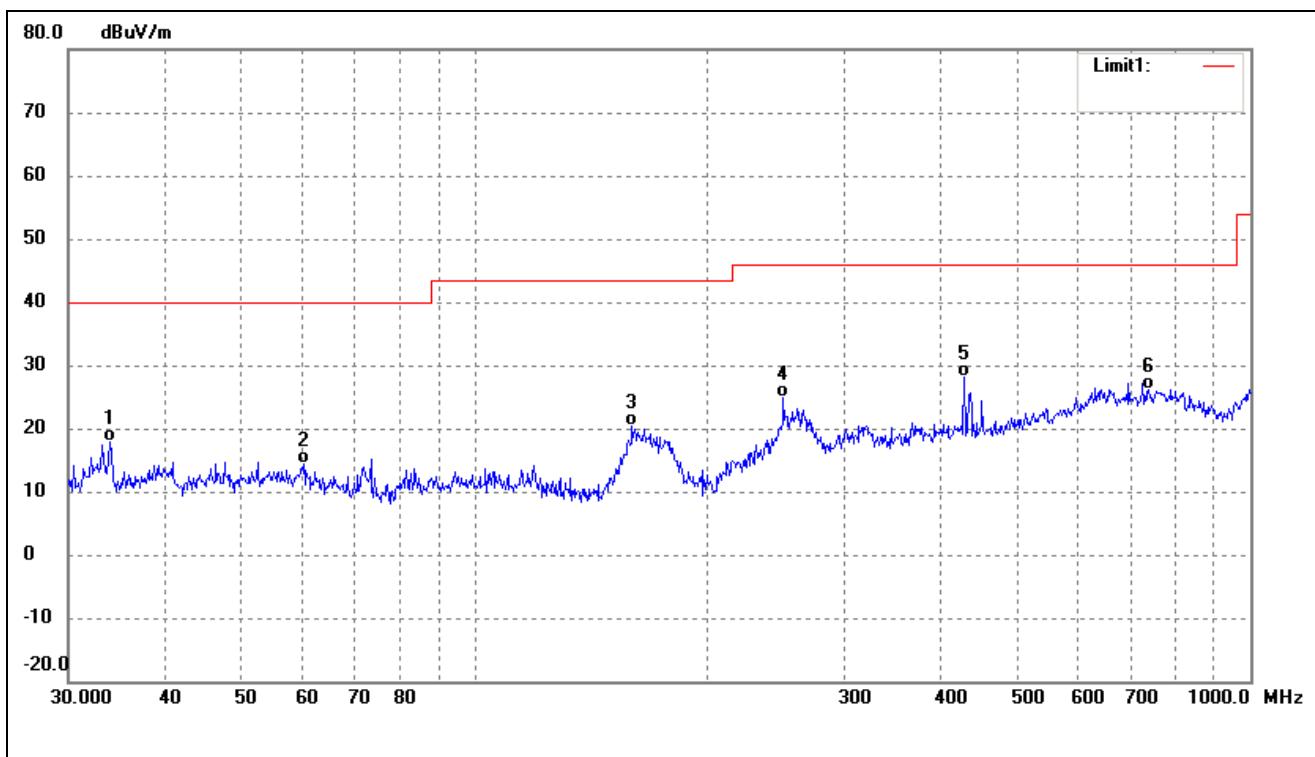


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	33.9174	35.26	-17.50	17.76	40.00	-22.24	98	100	peak
2	60.2800	30.92	-16.56	14.36	40.00	-25.64	158	100	peak
3	159.7844	39.41	-19.09	20.32	43.50	-23.18	84	100	peak
4	250.3011	37.00	-12.13	24.87	46.00	-21.13	135	100	peak
5	428.0192	36.16	-8.00	28.16	46.00	-17.84	343	100	peak
6	739.6604	25.98	0.15	26.13	46.00	-19.87	342	100	peak

*Operating Condition:* 802.11n HT20MIMO Transmitting Middle Channel-2437MHz(worst case)


*Comment:* AC 120V/60Hz

*Test Specification:* Horizontal

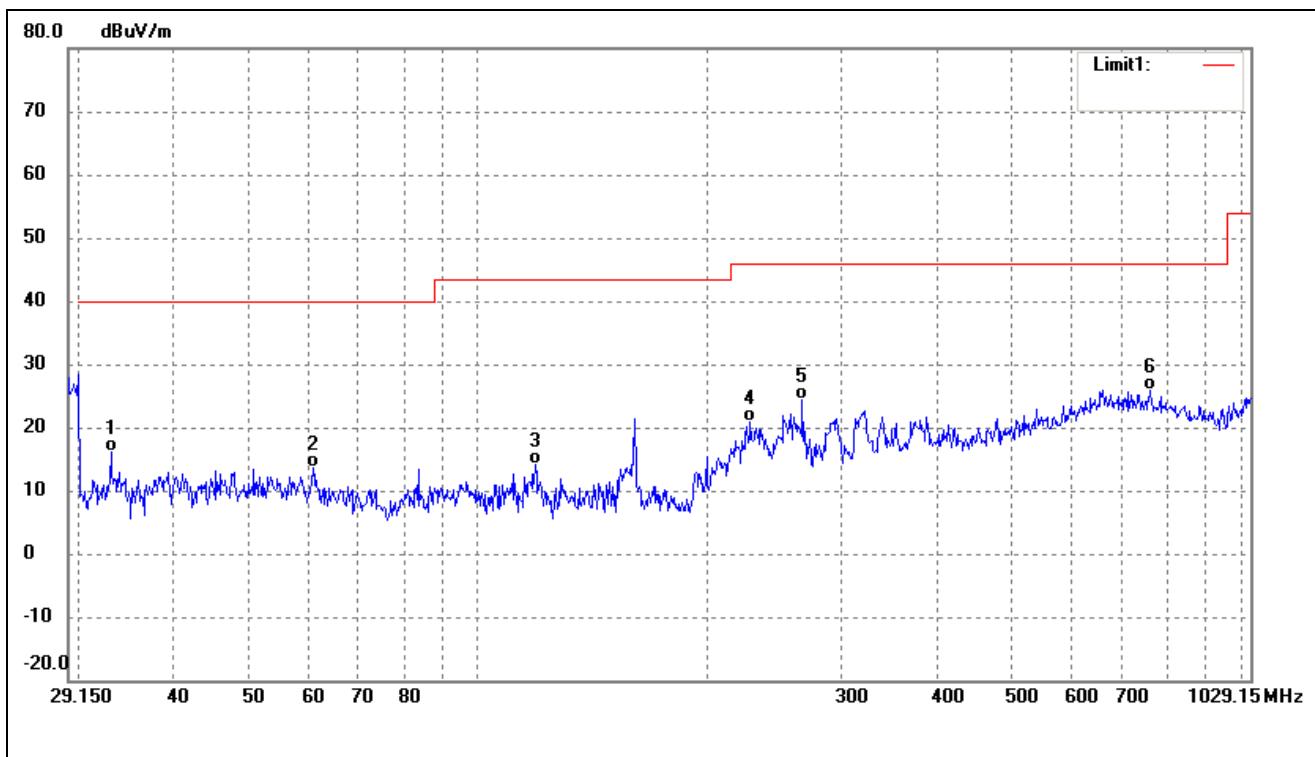

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	33.1409	33.78	-17.63	16.15	40.00	-23.85	243	100	peak
2	60.9598	30.42	-16.71	13.71	40.00	-26.29	230	100	peak
3	119.1346	30.84	-16.67	14.17	43.50	-29.33	92	100	peak
4	227.8997	34.19	-13.35	20.84	46.00	-25.16	197	100	peak
5	266.5930	35.65	-11.31	24.34	46.00	-21.66	104	100	peak
6	760.1734	26.38	-0.62	25.76	46.00	-20.24	300	100	peak

Test Specification: Vertical

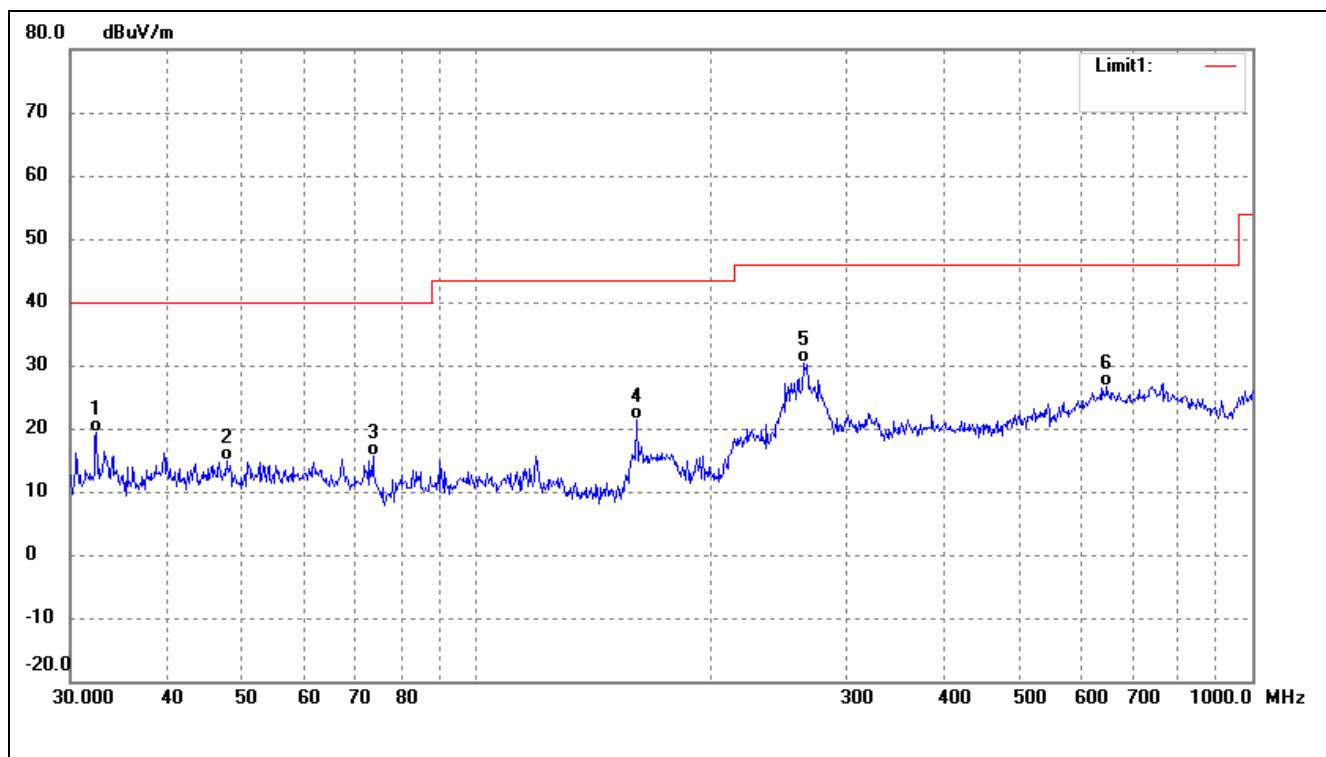


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	32.4059	37.13	-17.77	19.36	40.00	-20.64	239	100	peak
2	47.6585	31.38	-16.52	14.86	40.00	-25.14	119	100	peak
3	73.6170	34.83	-19.13	15.70	40.00	-24.30	132	100	peak
4	160.9088	40.49	-19.09	21.40	43.50	-22.10	115	100	peak
5	263.8190	41.90	-11.51	30.39	46.00	-15.61	64	100	peak
6	649.6597	27.77	-1.26	26.51	46.00	-19.49	145	100	peak

*Operating Condition:* 802.11n HT20MIMO Transmitting High Channel-2462MHz(worst case)


*Comment:* AC 120V/60Hz

*Test Specification:* Horizontal

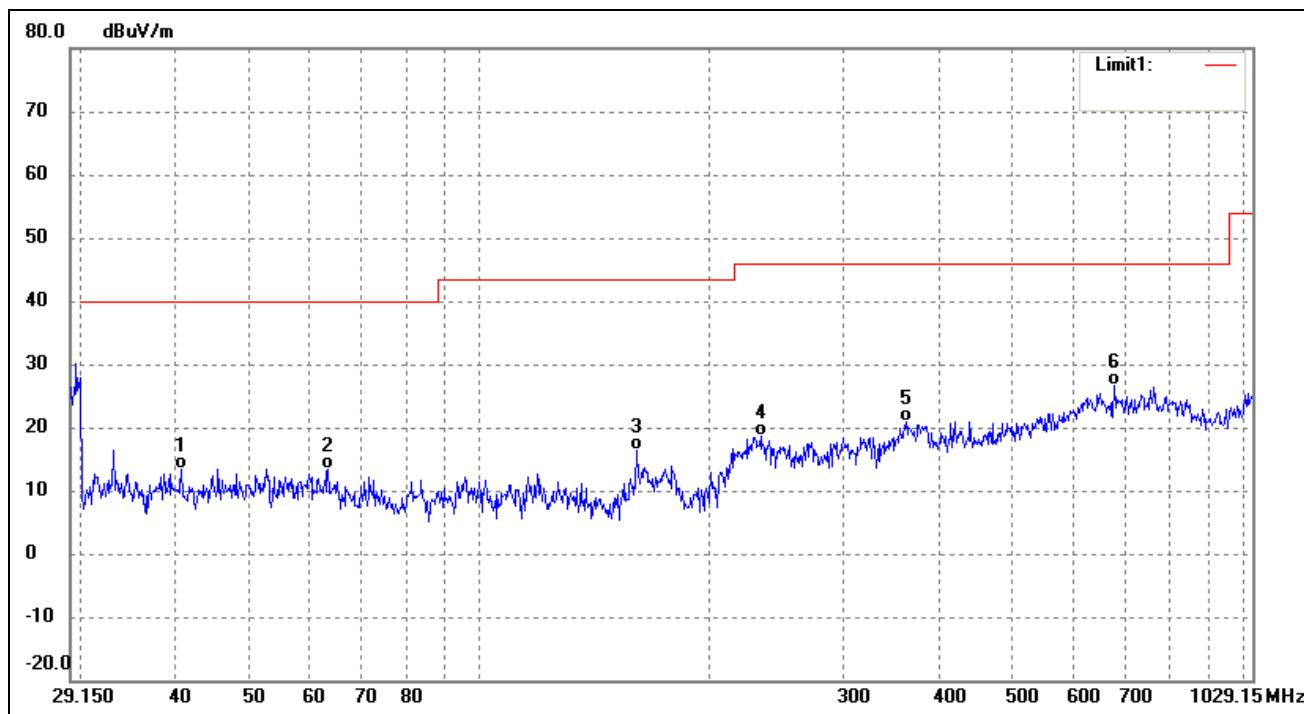

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	40.7511	29.87	-16.52	13.35	40.00	-26.65	119	100	peak
2	63.3973	30.52	-17.23	13.29	40.00	-26.71	204	100	peak
3	160.7149	35.36	-19.10	16.26	43.50	-27.24	56	100	peak
4	233.6570	31.55	-12.96	18.59	46.00	-27.41	332	100	peak
5	362.2119	29.87	-8.91	20.96	46.00	-25.04	92	100	peak
6	678.2377	27.17	-0.47	26.70	46.00	-19.30	290	100	peak

Test Specification: Vertical

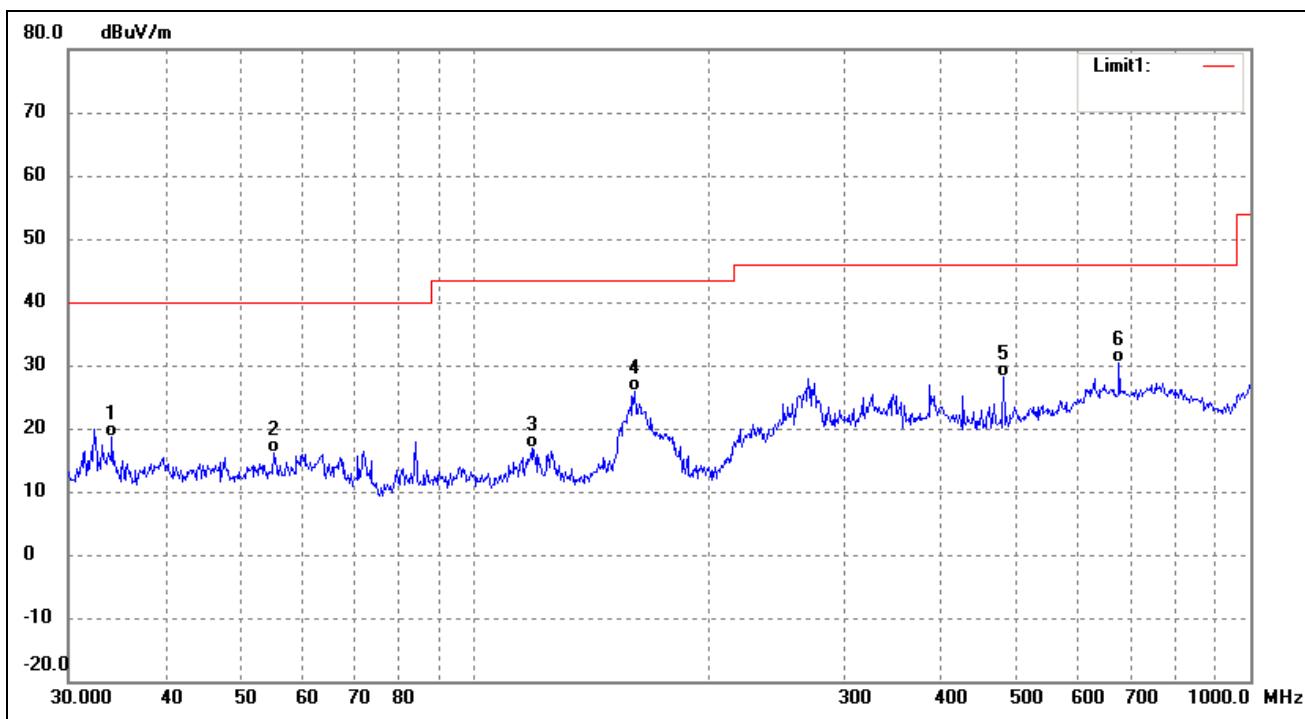

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	34.1561	36.01	-17.47	18.54	40.00	-21.46	283	100	peak
2	55.2207	32.58	-16.51	16.07	40.00	-23.93	94	100	peak
3	118.6013	33.62	-16.67	16.95	43.50	-26.55	211	100	peak
4	160.9088	45.09	-19.09	26.00	43.50	-17.50	114	100	peak
5	480.5276	34.91	-6.84	28.07	46.00	-17.93	109	100	peak
6	677.5797	30.89	-0.50	30.39	46.00	-15.61	235	100	peak

*Spurious Emissions Above 1GHz*
*Test Mode: 802.11n HT20MIMO (worst case)*

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824	58.23	-3.87	54.36	74	-19.64	H	PK
4824	42.26	-3.87	38.39	54	-15.61	H	AV
7236	52.52	1.14	53.66	74	-20.34	H	PK
7236	39.64	1.19	40.83	54	-13.17	H	AV
4824	58.06	-3.86	54.2	74	-19.8	V	PK
4824	41.1	-3.86	37.24	54	-16.76	V	AV
7236	53.02	1.1	54.12	74	-19.88	V	PK
7236	38.07	1.1	39.17	54	-14.83	V	AV
Middle Channel-2437MHz(802.11b)							
4874	60.03	-3.74	56.29	74	-17.71	H	PK
4874	43.33	-3.74	39.59	54	-14.41	H	AV
7311	52.07	1.47	53.54	74	-20.46	H	PK
7311	38.28	1.47	39.75	54	-14.25	H	AV
4874	58.31	-3.74	54.57	74	-19.43	V	PK
4874	41.1	-3.74	37.36	54	-16.64	V	AV
7311	54.07	1.47	55.54	74	-18.46	V	PK
7311	38.6	1.47	40.07	54	-13.93	V	AV
High Channel-2462MHz(802.11b)							
4924	58.43	-3.59	54.84	74	-19.16	H	PK
4924	43.25	-3.59	39.66	54	-14.34	H	AV
7386	53.86	1.79	55.65	74	-18.35	H	PK
7386	40.03	1.79	41.82	54	-12.18	H	AV
4924	59.74	-3.59	56.15	74	-17.85	V	PK
4924	41.1	-3.59	37.51	54	-16.49	V	AV
7386	53.92	1.79	55.71	74	-18.29	V	PK
7386	39.3	1.79	41.09	54	-12.91	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 9.3 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 9.4 Summary of Test Results/Plots

Antenna 1:

802.11b-Lowest Bandedge


Vertical (Worst case)

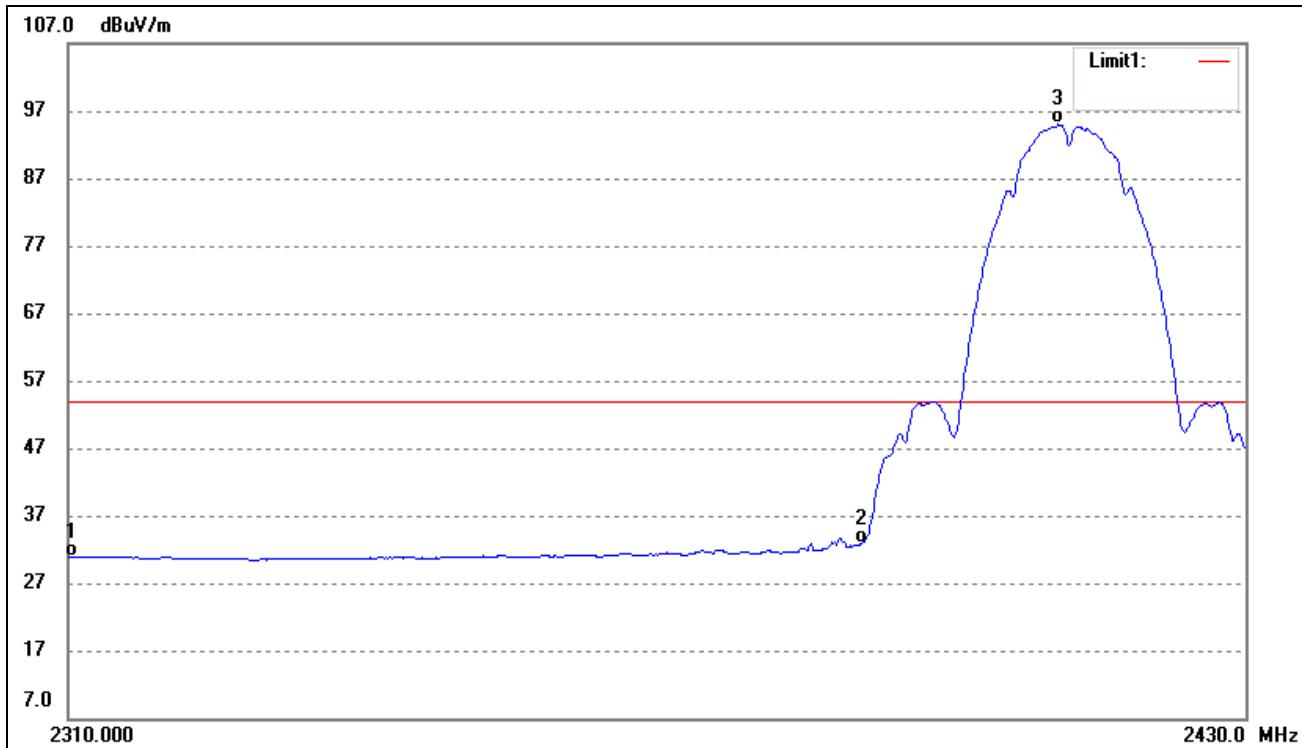

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.31	-6.38	30.93	54.00	-23.07	Average Detector
	2310.000	48.04	-6.38	41.66	74.00	-32.34	Peak Detector
2	2390.000	39.15	-7.26	31.89	54.00	-22.11	Average Detector
	2390.000	48.92	-7.26	41.66	74.00	-32.34	Peak Detector
3	2410.919	102.52	-7.41	95.11	/	/	Average Detector
	2410.515	107.00	-7.41	99.59	/	/	Peak Detector

802.11b-Highest Bandedge


Vertical (Worst case)

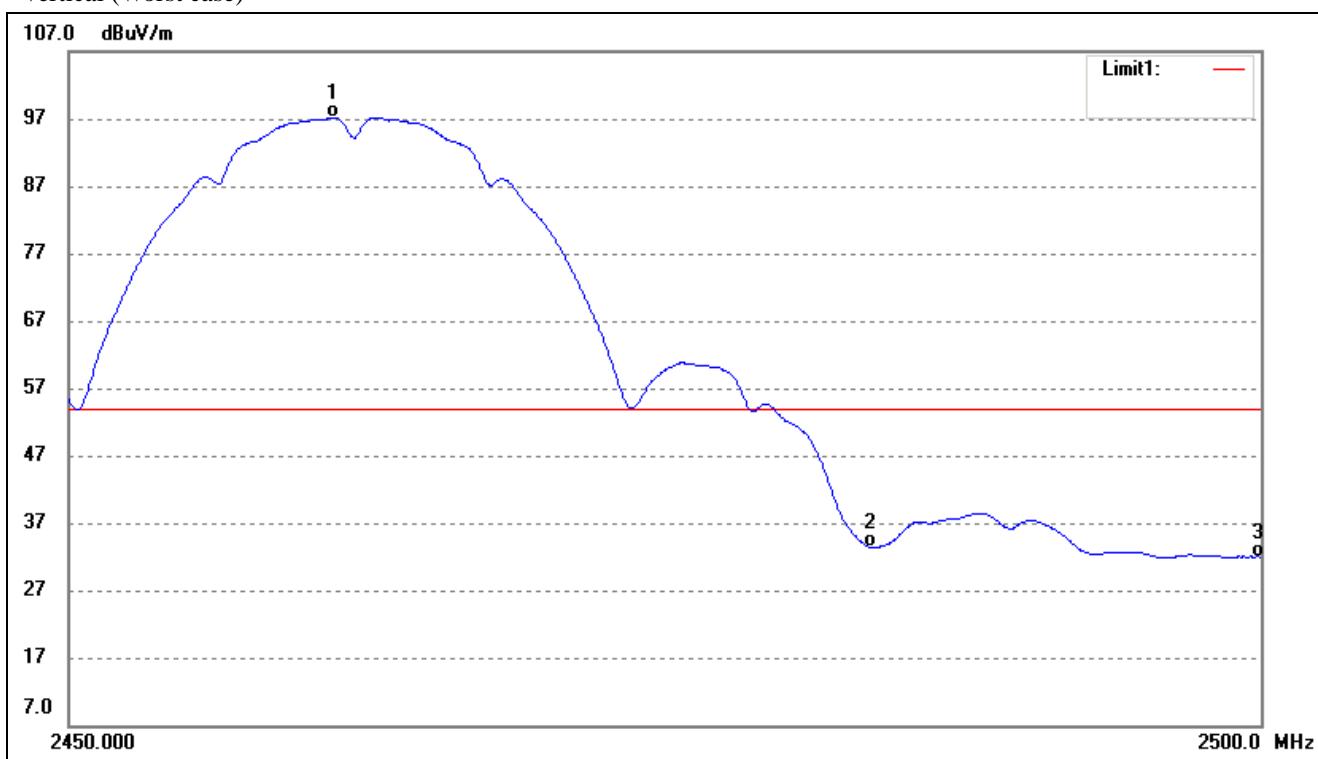

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.013	104.48	-7.32	97.16	/	/	Average Detector
	2463.152	107.87	-7.31	100.56	/	/	Peak Detector
2	2483.500	40.67	-7.28	33.39	54.00	-20.61	Average Detector
	2483.500	51.93	-7.28	44.65	74.00	-29.35	Peak Detector
3	2500.000	39.02	-7.25	31.77	54.00	-22.23	Average Detector
	2500.000	50.59	-7.25	43.34	74.00	-30.66	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

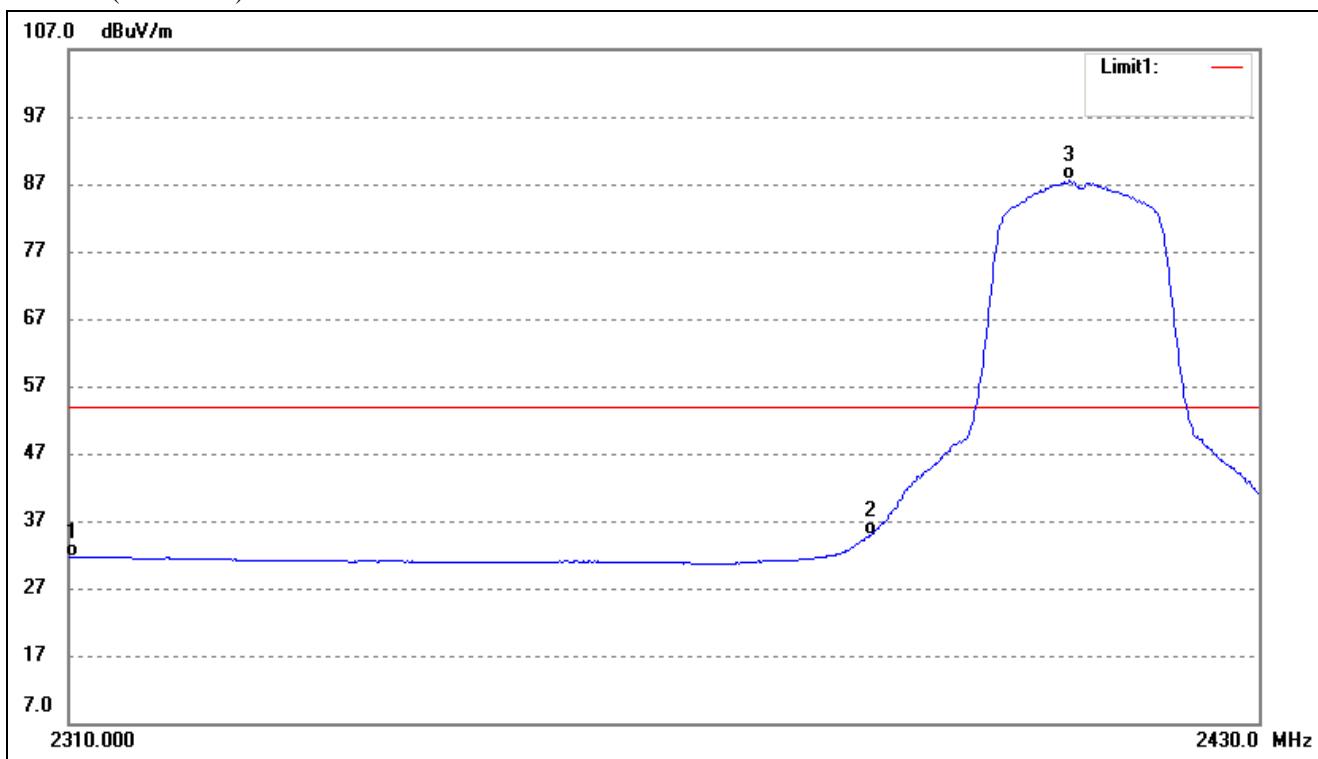

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.92	-6.38	31.54	54.00	-22.46	Average Detector
	2310.000	49.05	-6.38	42.67	74.00	-31.33	Peak Detector
2	2390.000	47.89	-7.26	40.63	54.00	-13.37	Average Detector
	2390.000	60.69	-7.26	53.43	74.00	-20.57	Peak Detector
3	2410.511	94.93	-7.41	87.52	/	/	Average Detector
	2410.023	104.62	-7.41	97.21	/	/	Peak Detector

802.11g-Highest Bandedge

Vertical (Worst case)

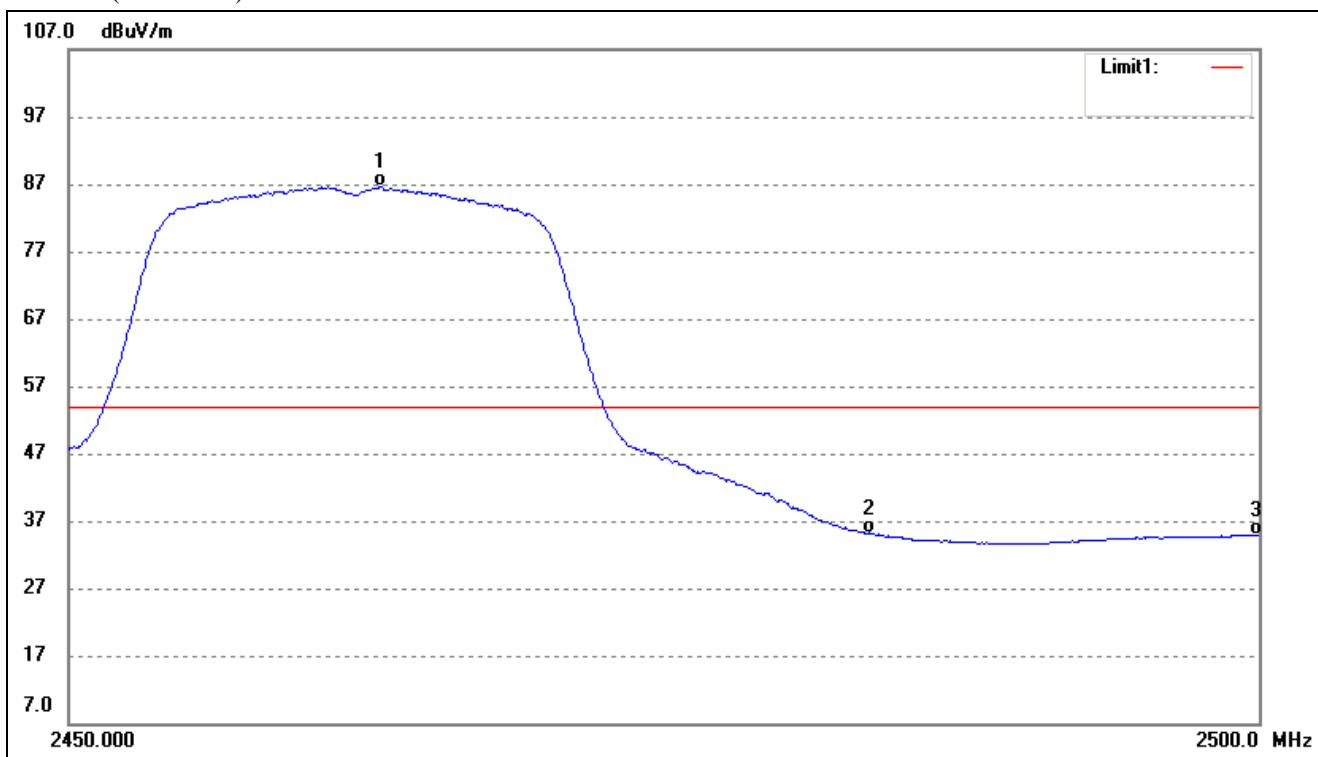


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.003	93.90	-7.31	86.59	/	/	Average Detector
	2457.087	106.40	-7.33	99.07	/	/	Peak Detector
2	2483.500	43.20	-7.28	35.92	54.00	-18.08	Average Detector
	2483.500	55.92	-7.28	48.64	74.00	-25.36	Peak Detector
3	2500.000	42.19	-7.25	34.94	54.00	-19.06	Average Detector
	2500.000	53.65	-7.25	46.40	74.00	-27.60	Peak Detector

Antenna 2:

802.11b-Lowest Bandedge


Vertical (Worst case)

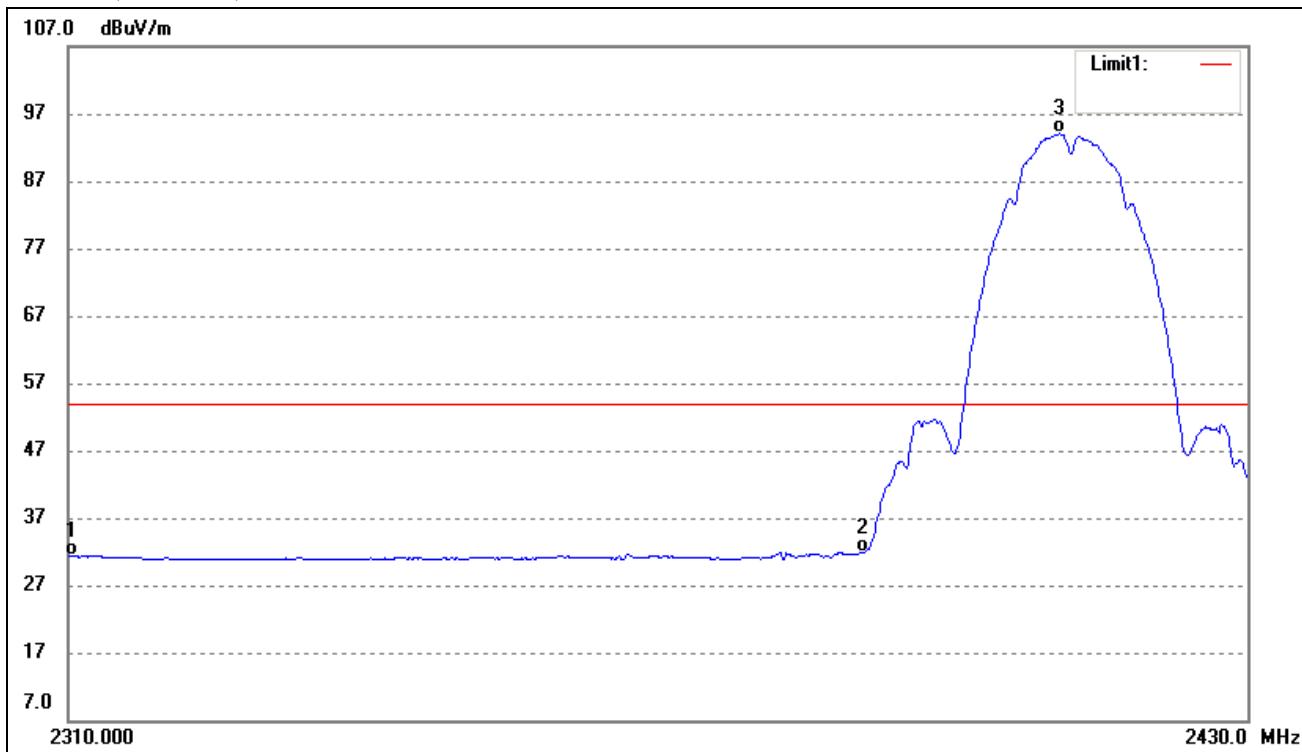

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.70	-6.38	31.32	54.00	-22.68	Average Detector
	2310.000	53.75	-6.38	47.37	74.00	-26.63	Peak Detector
1	2390.000	40.65	-7.26	33.39	54.00	-20.61	Average Detector
	2390.000	51.51	-7.26	44.25	74.00	-29.75	Peak Detector
2	2410.818	99.72	-7.41	92.31	/	/	Average Detector
	2411.324	107.71	-7.41	100.30	/	/	Peak Detector

802.11b-Highest Bandedge


Vertical (Worst case)

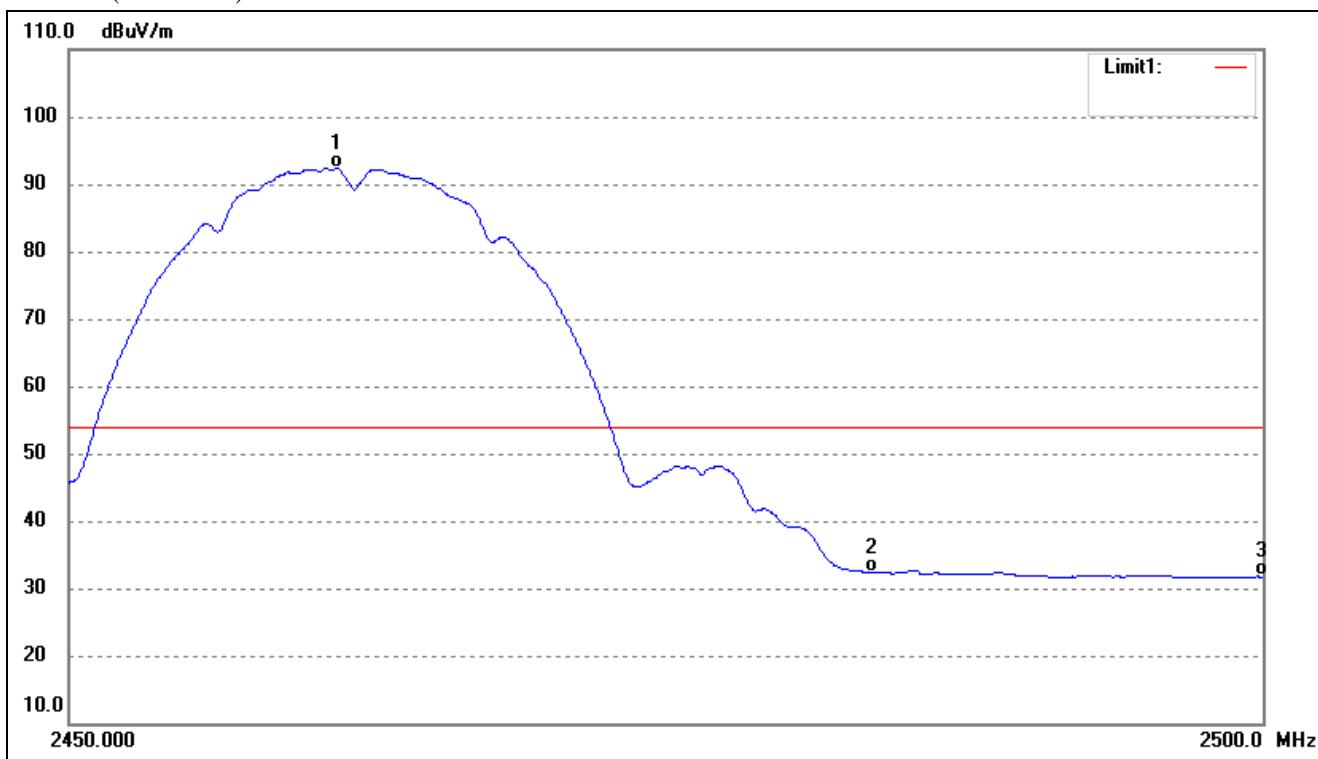

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.866	100.35	-7.32	93.03	/	/	Average Detector
	2461.459	108.25	-7.32	100.93	/	/	Peak Detector
2	2483.500	39.46	-7.28	32.18	54.00	-21.82	Average Detector
	2483.500	48.51	-7.28	41.23	74.00	-32.77	Peak Detector
3	2500.000	39.01	-7.25	31.76	54.00	-22.24	Average Detector
	2500.000	51.03	-7.25	43.78	74.00	-30.22	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

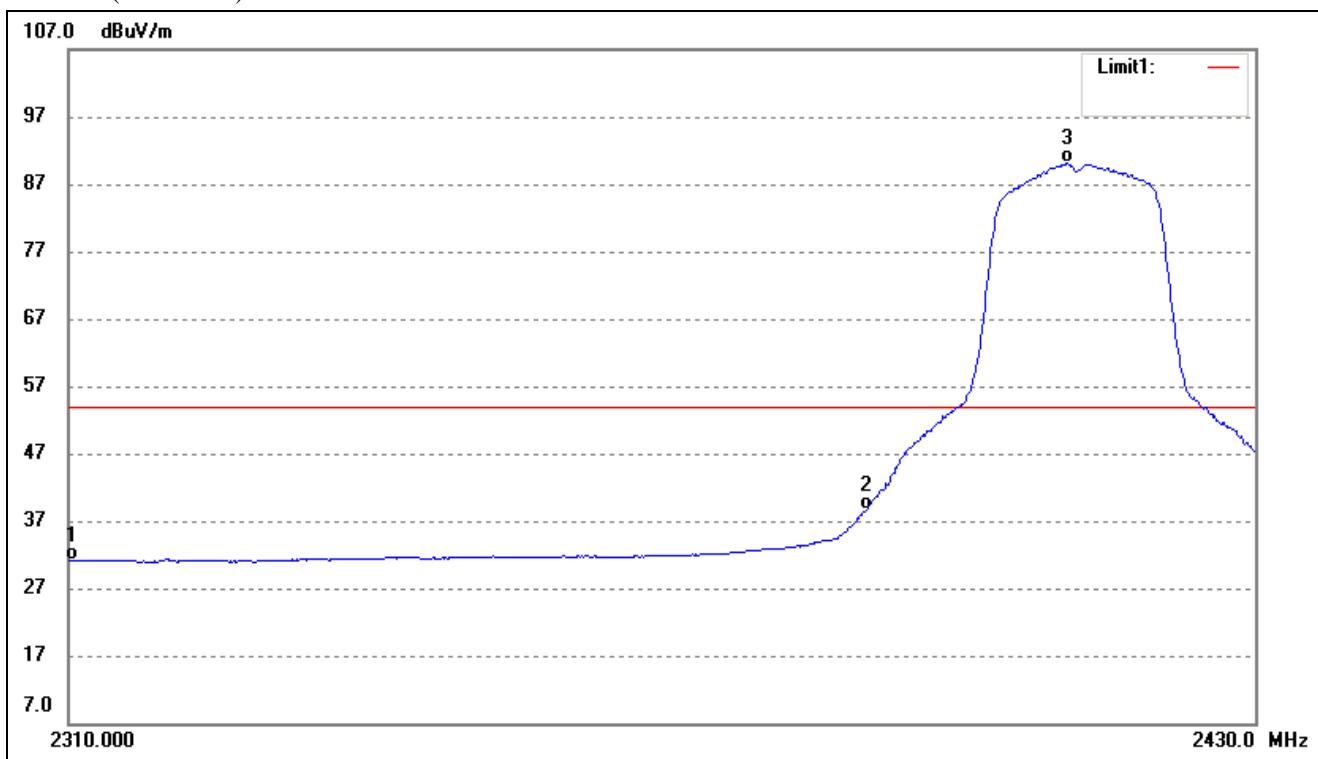

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.42	-6.38	31.04	54.00	-22.96	Average Detector
	2310.000	49.70	-6.38	43.32	74.00	-30.68	Peak Detector
1	2390.000	46.82	-7.26	39.56	54.00	-14.44	Average Detector
	2390.000	58.20	-7.26	50.94	74.00	-23.06	Peak Detector
2	2410.515	97.18	-7.41	89.77	/	/	Average Detector
	2410.212	106.68	-7.41	99.27	/	/	Peak Detector

802.11g-Highest Bandedge

Vertical (Worst case)

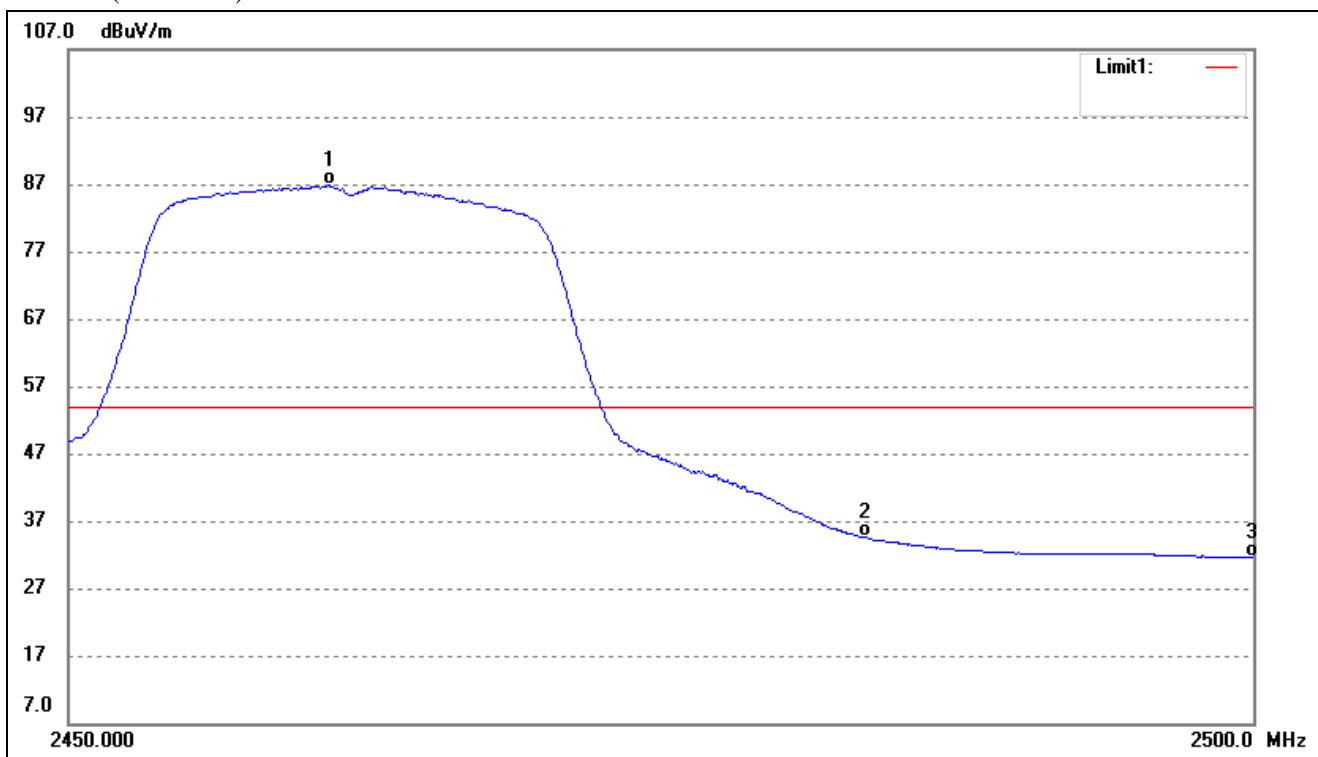


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.914	94.19	-7.32	86.87	/	/	Average Detector
	2457.237	104.79	-7.33	97.46	/	/	Peak Detector
2	2483.500	41.83	-7.28	34.55	54.00	-19.45	Average Detector
	2483.500	53.80	-7.28	46.52	74.00	-27.48	Peak Detector
3	2500.000	38.96	-7.25	31.71	54.00	-22.29	Average Detector
	2500.000	50.42	-7.25	43.17	74.00	-30.83	Peak Detector

Antenna MIMO:

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

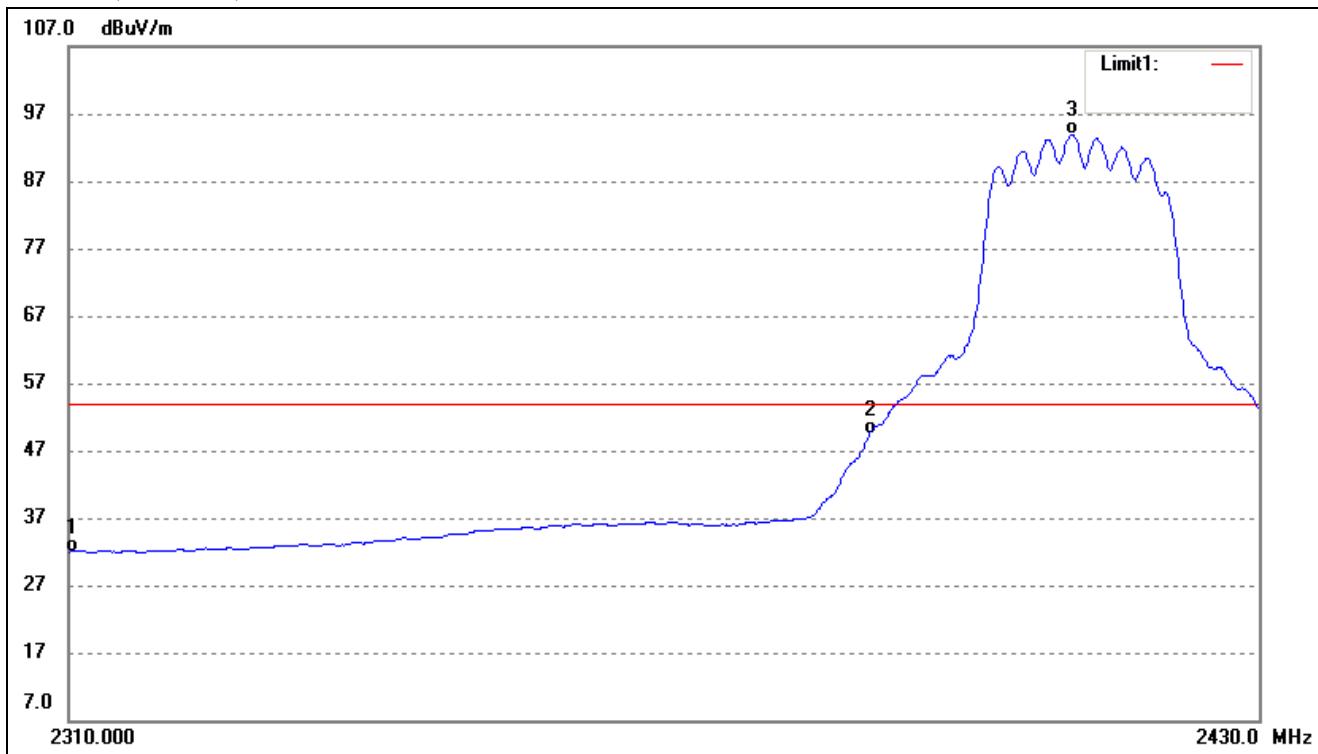

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.32	-6.38	31.94	54.00	-22.06	Average Detector
	2310.000	49.58	-6.38	43.20	74.00	-30.80	Peak Detector
2	2390.000	56.69	-7.26	49.43	54.00	-4.57	Average Detector
	2390.000	76.01	-7.26	68.75	74.00	-5.25	Peak Detector
3	2410.756	101.36	-7.41	93.95	/	/	Average Detector
	2410.145	110.94	-7.41	103.53	/	/	Peak Detector

802.11n-HT20-Highest Bandedge


Vertical (Worst case)

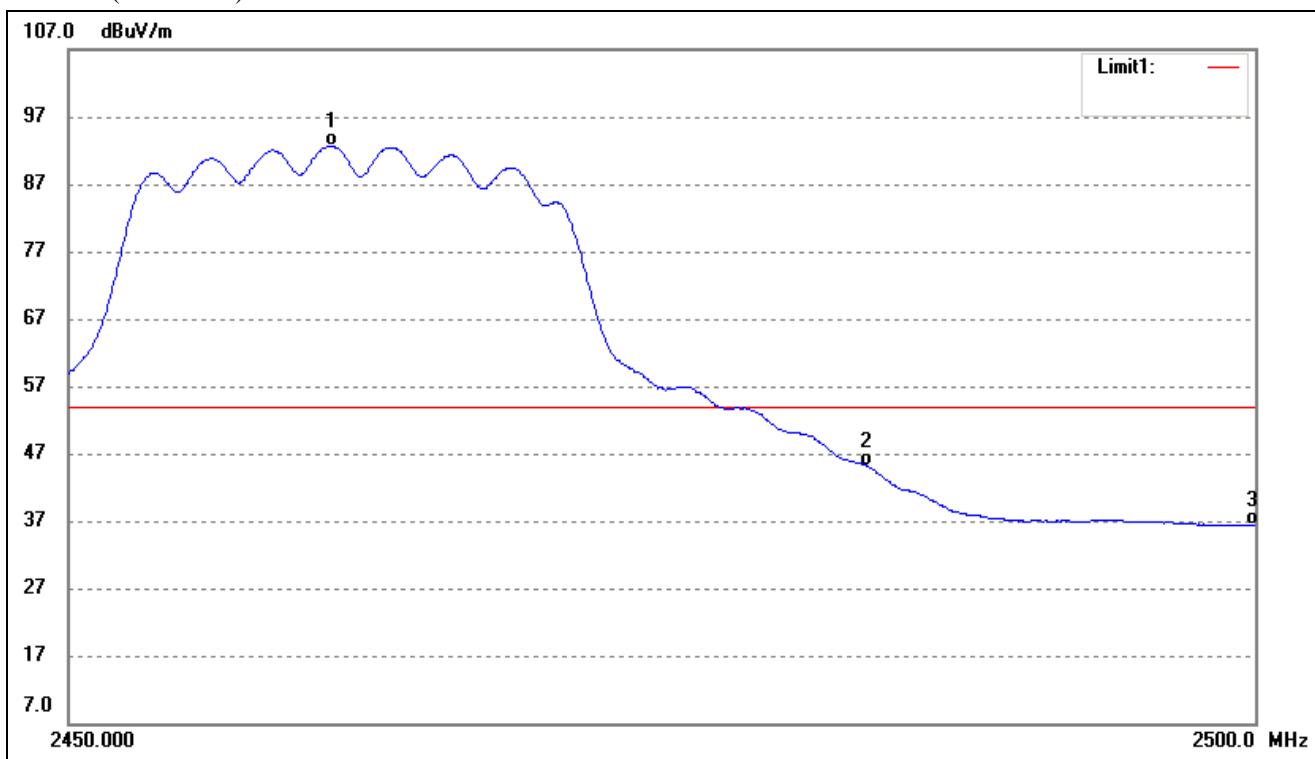

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2459.199	97.62	-7.33	90.29	/	/	Average Detector
	2459.250	106.83	-7.33	99.50	/	/	Peak Detector
2	2483.500	52.46	-7.28	45.18	54.00	-8.82	Average Detector
	2483.500	70.49	-7.28	63.21	74.00	-10.79	Peak Detector
3	2500.000	43.58	-7.25	36.33	54.00	-17.67	Average Detector
	2500.000	54.85	-7.25	47.60	74.00	-26.40	Peak Detector

802.11n-HT40-Lowest Bandedge


Vertical (Worst case)

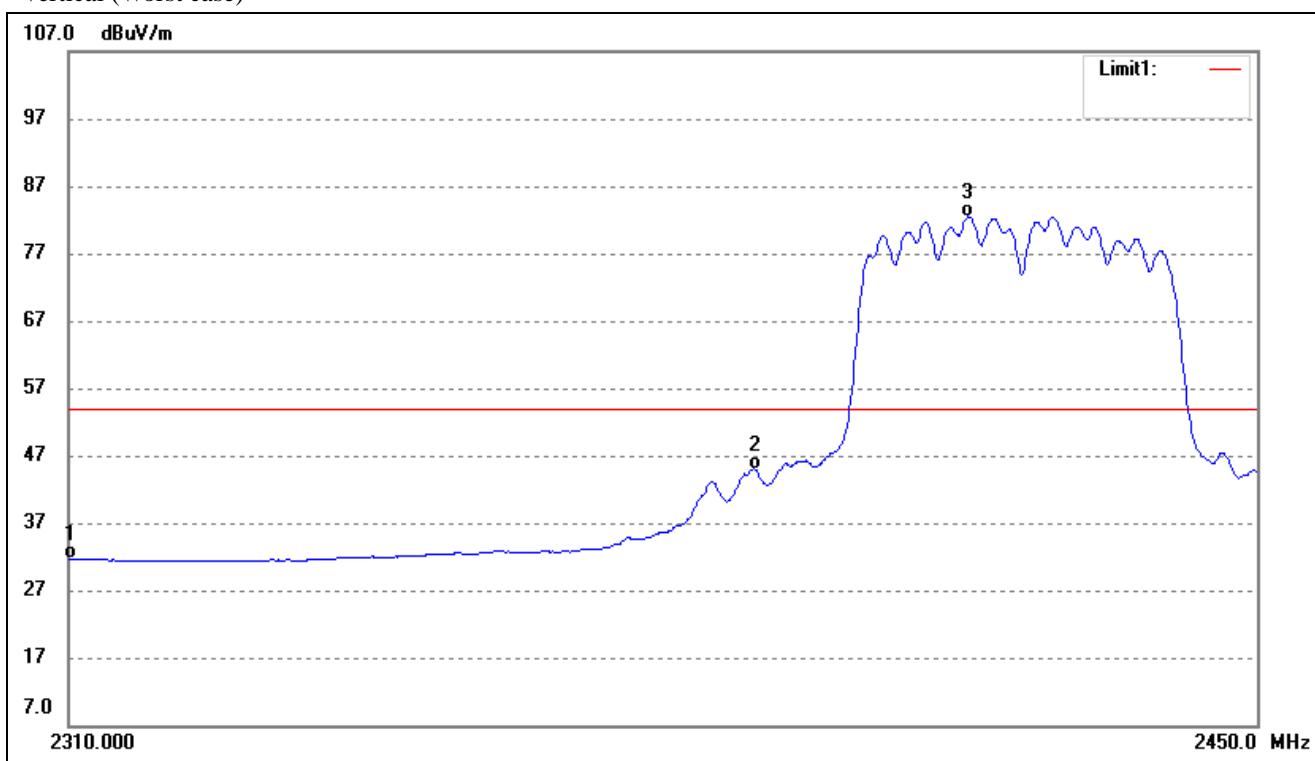

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.01	-6.38	31.63	54.00	-22.37	Average Detector
	2310.000	49.46	-6.38	43.08	74.00	-30.92	Peak Detector
2	2390.000	52.06	-7.26	44.80	54.00	-9.20	Average Detector
	2390.000	69.71	-7.26	62.45	74.00	-11.55	Peak Detector
2	2415.219	89.90	-7.40	82.50	/	/	Average Detector
	2423.047	105.24	-7.38	97.86	/	/	Peak Detector

802.11n-HT40-Highest Bandedge

Vertical (Worst case)

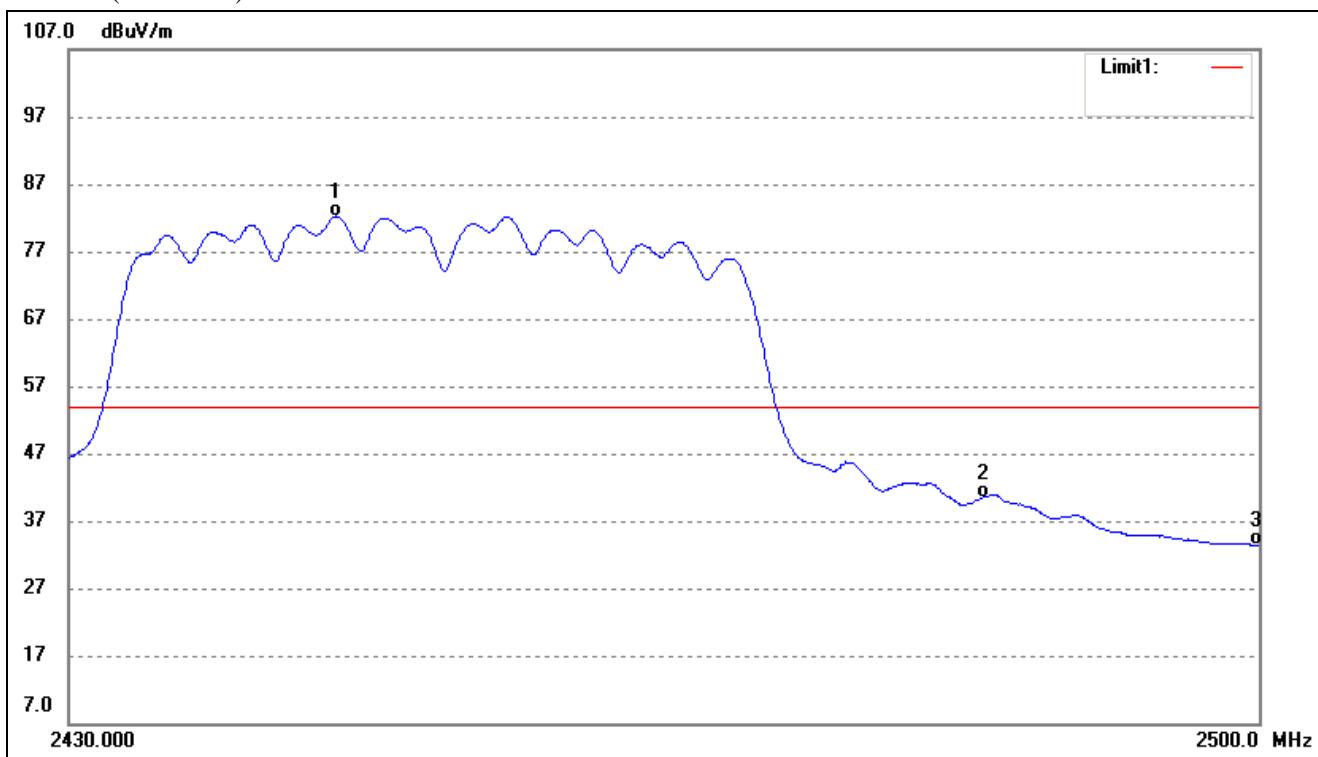



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2446.643	87.77	-7.35	80.42	/	/	Average Detector
	2454.470	102.20	-7.33	94.87	/	/	Peak Detector
2	2483.500	47.75	-7.28	40.47	54.00	-13.53	Average Detector
	2483.500	64.86	-7.28	57.58	74.00	-16.42	Peak Detector
3	2500.000	40.56	-7.25	33.31	54.00	-20.69	Average Detector
	2500.000	53.84	-7.25	46.59	74.00	-27.41	Peak Detector

Ant. 1



Out-of-Band and Spurious Emission (Conducted)

802.11b



Low Channel

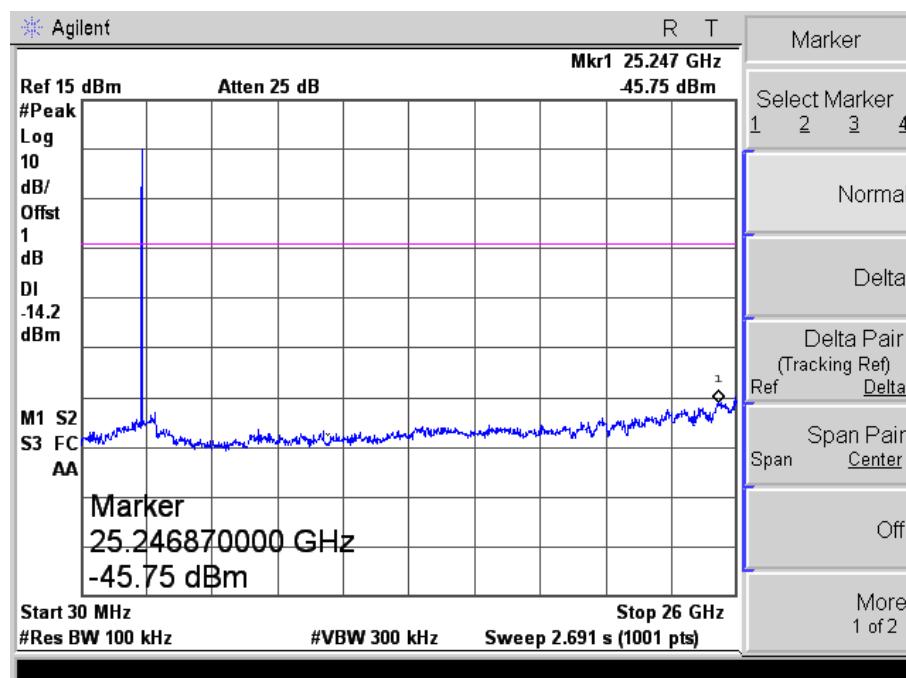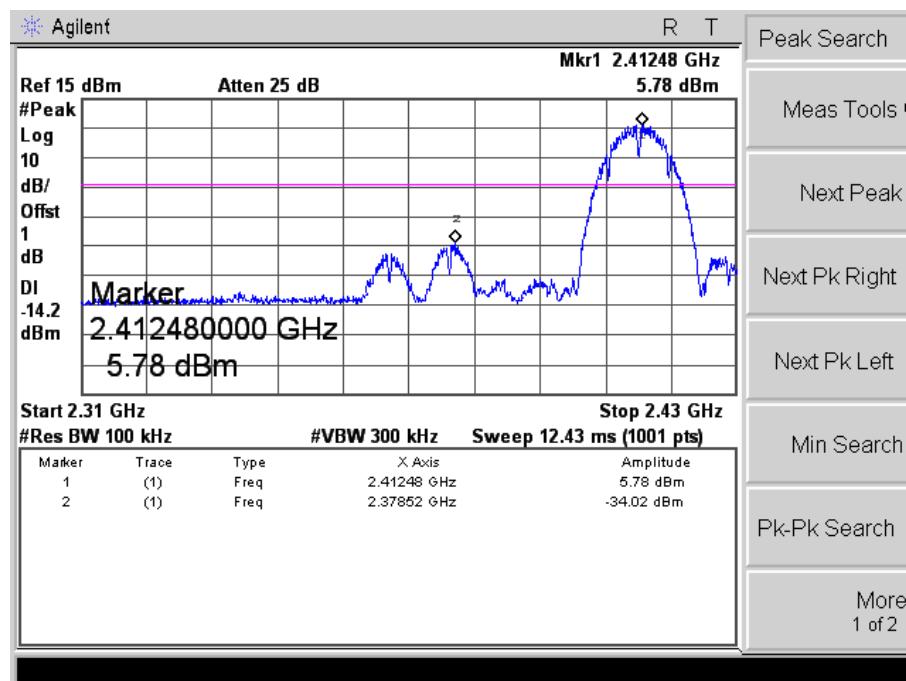



## Middle Channel

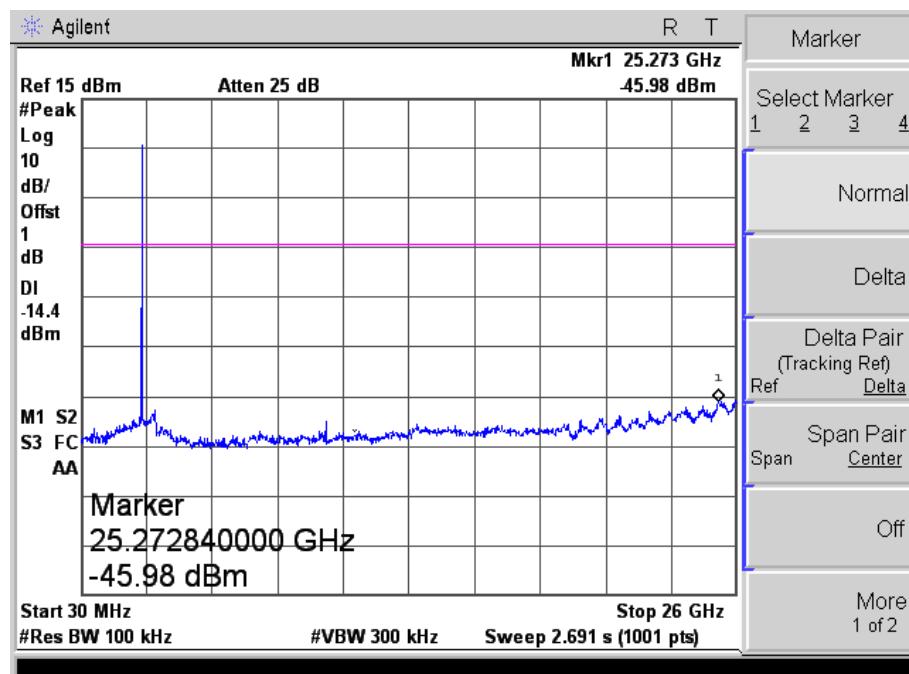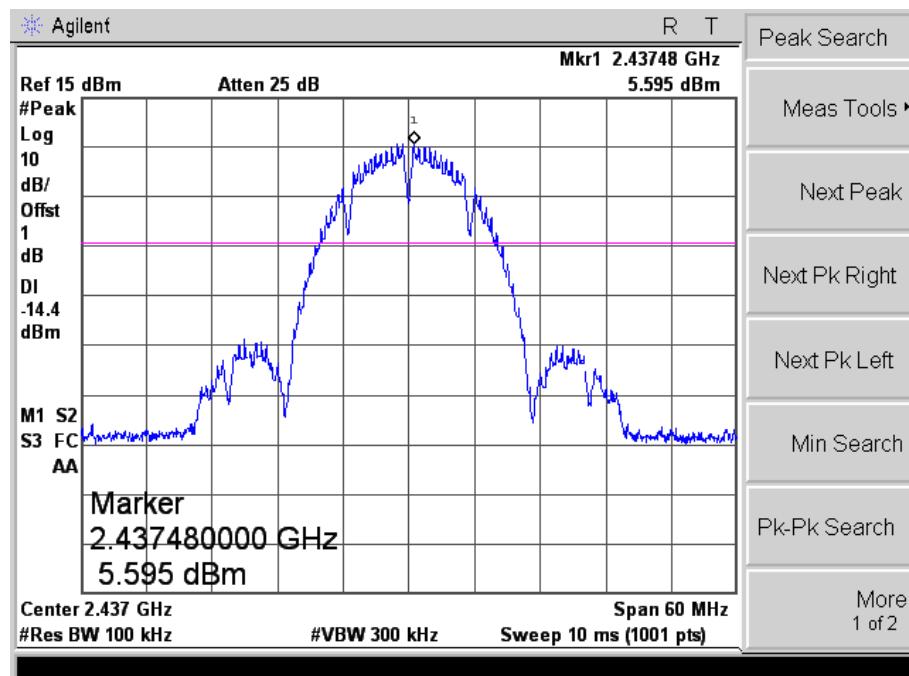



## High Channel

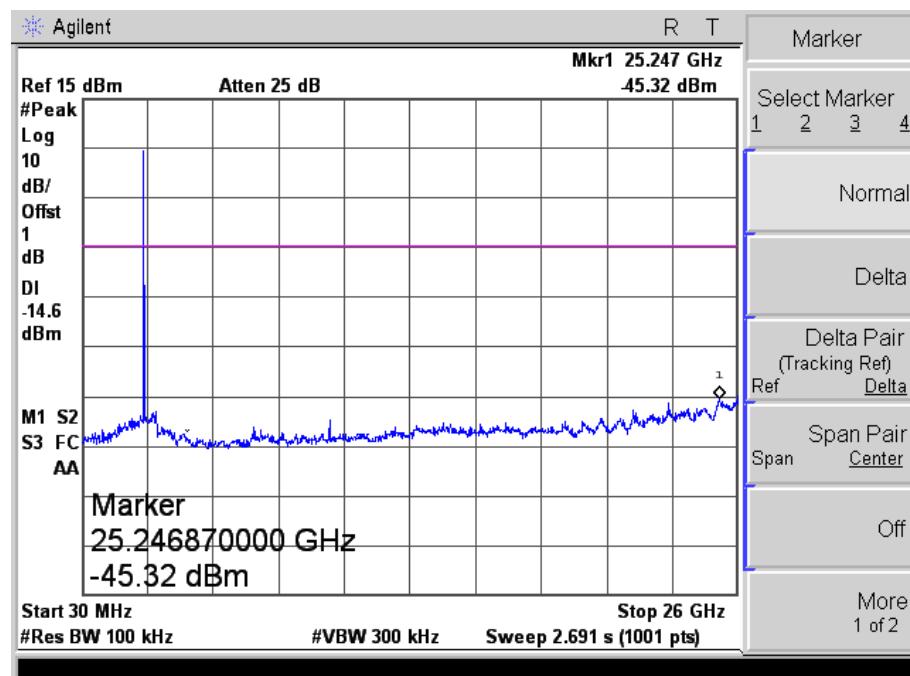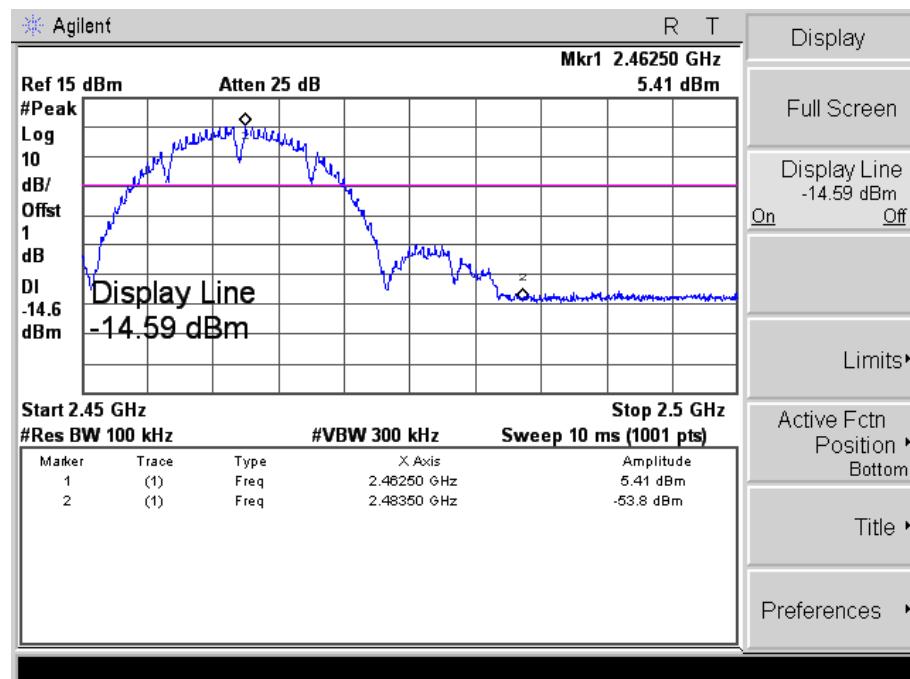



802.11g  
Low Channel

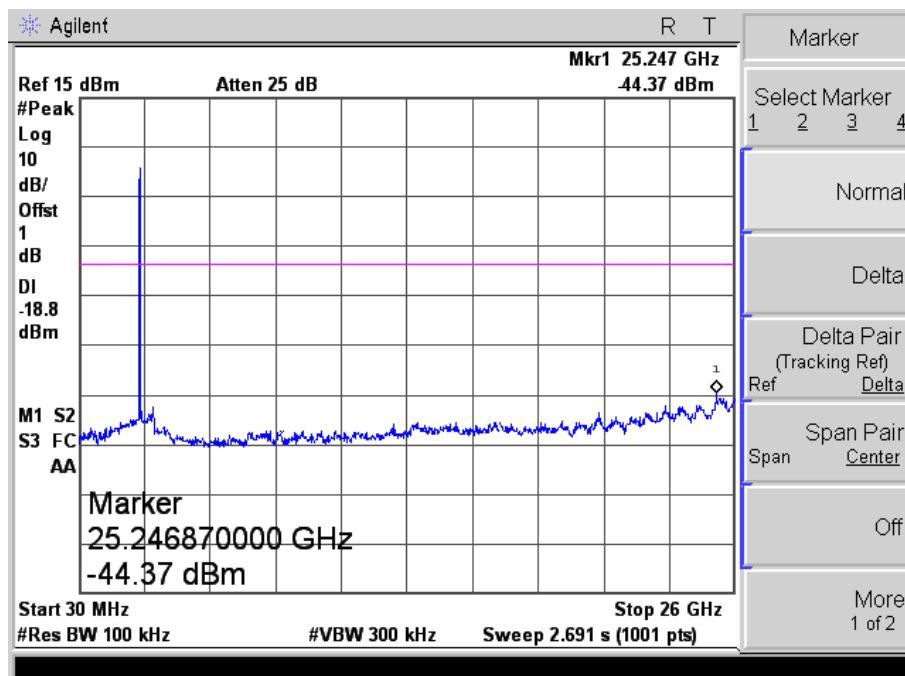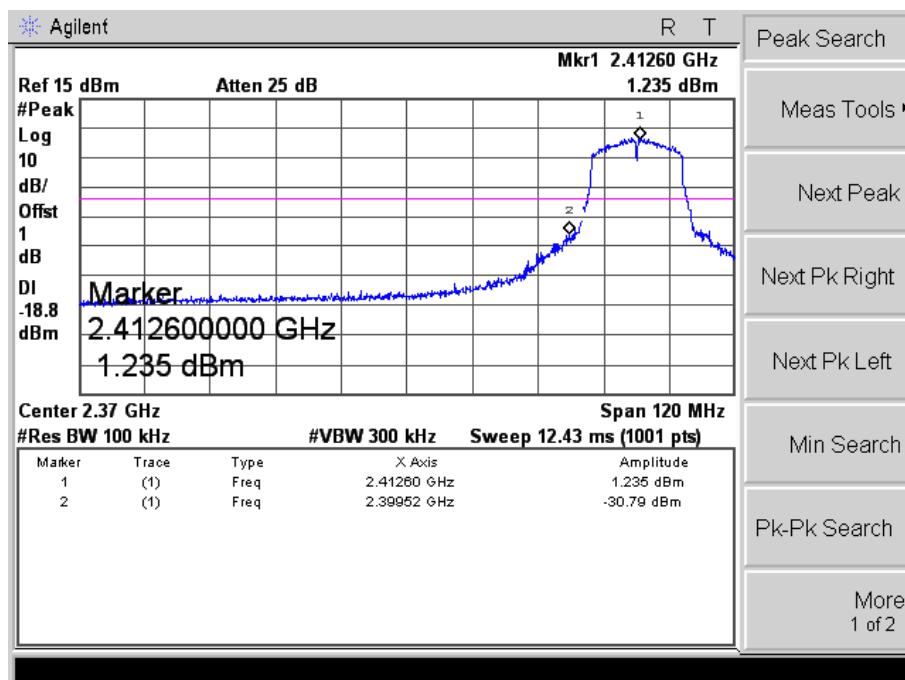



## Middle Channel

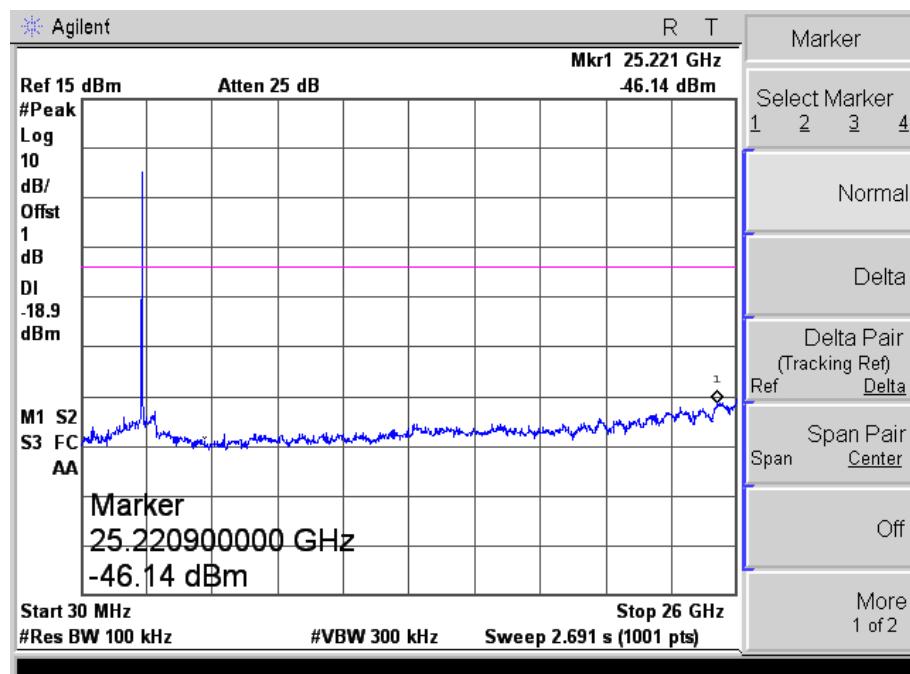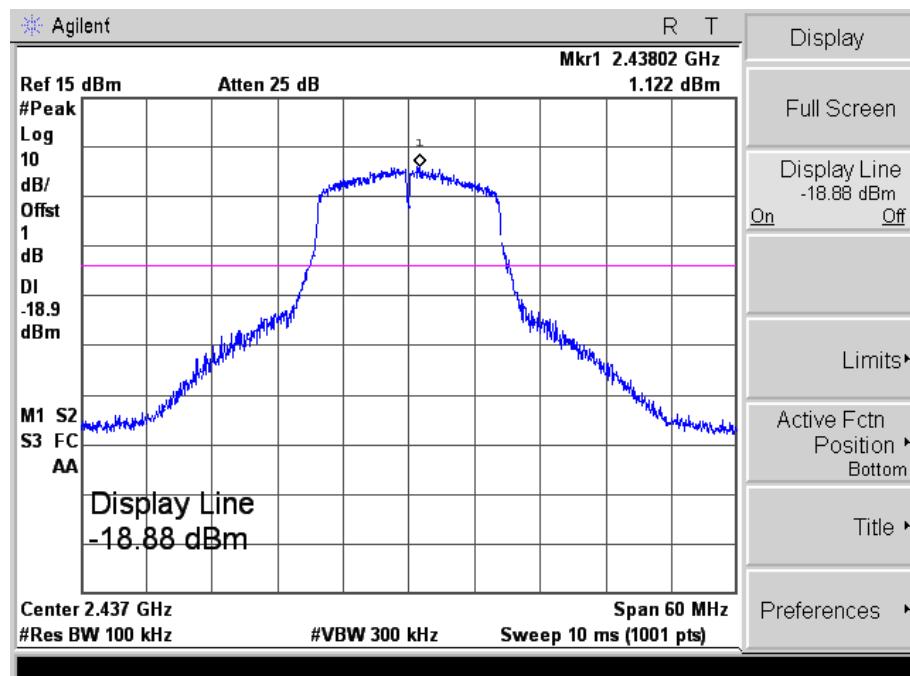



## High Channel

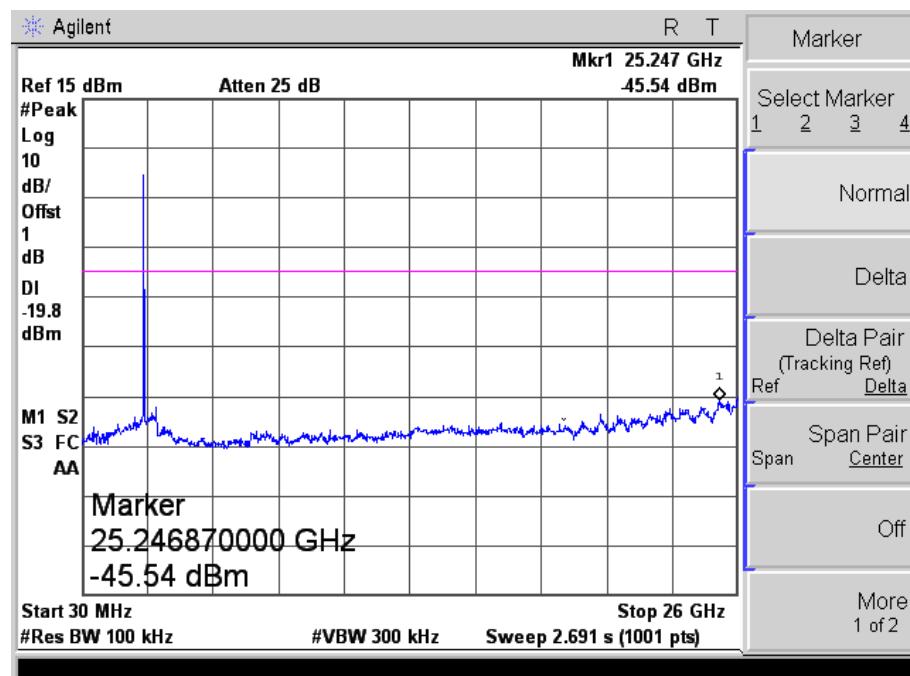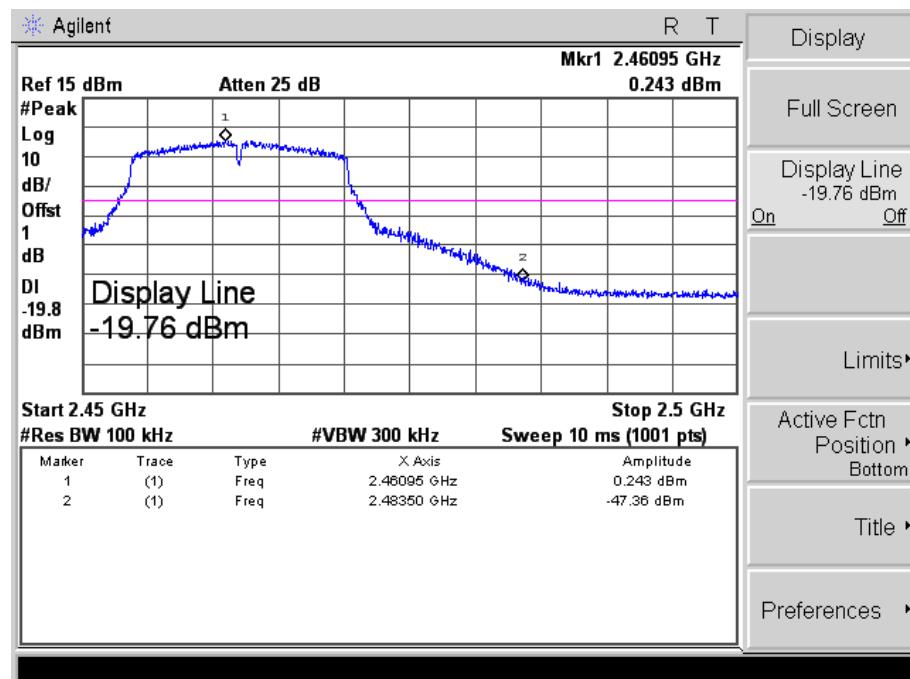



11n-HT20  
Low Channel

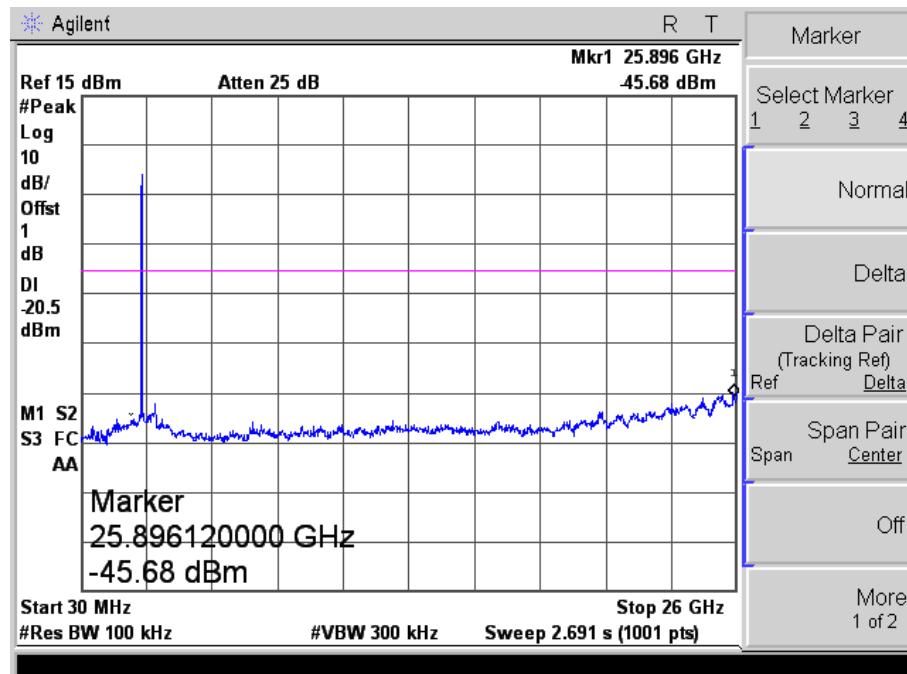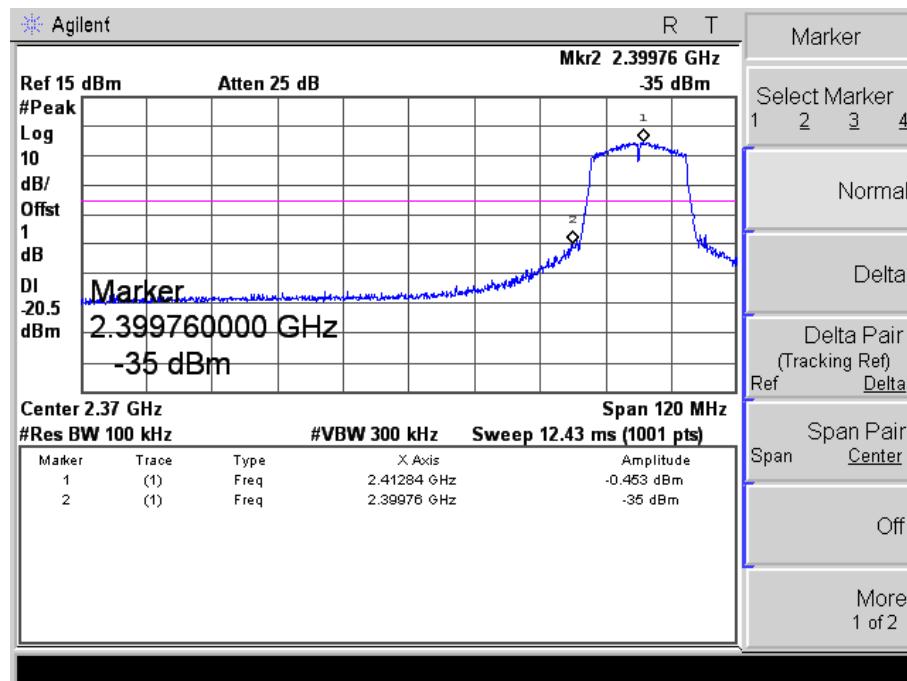



## Middle Channel

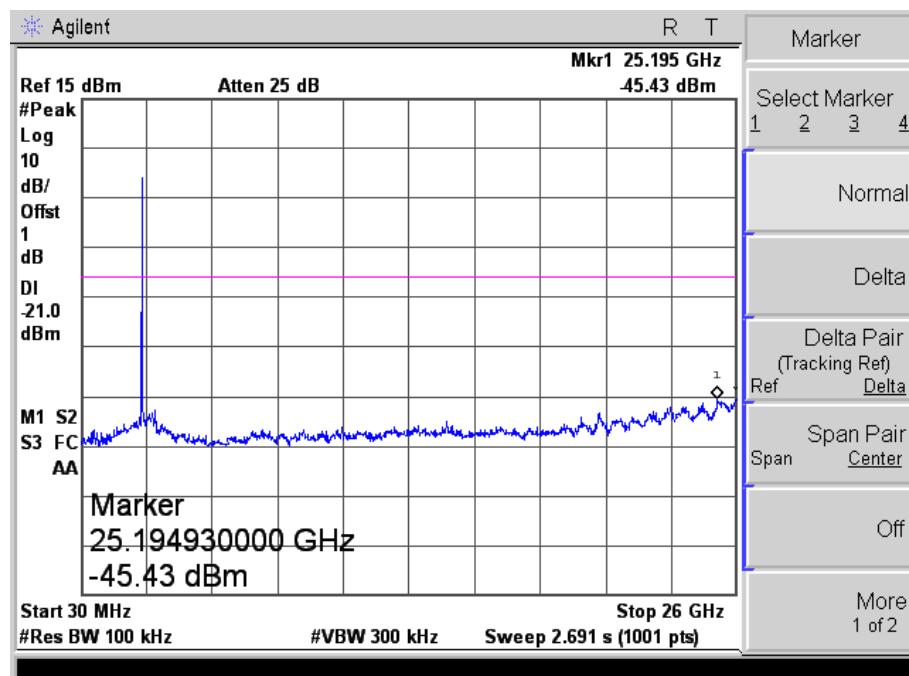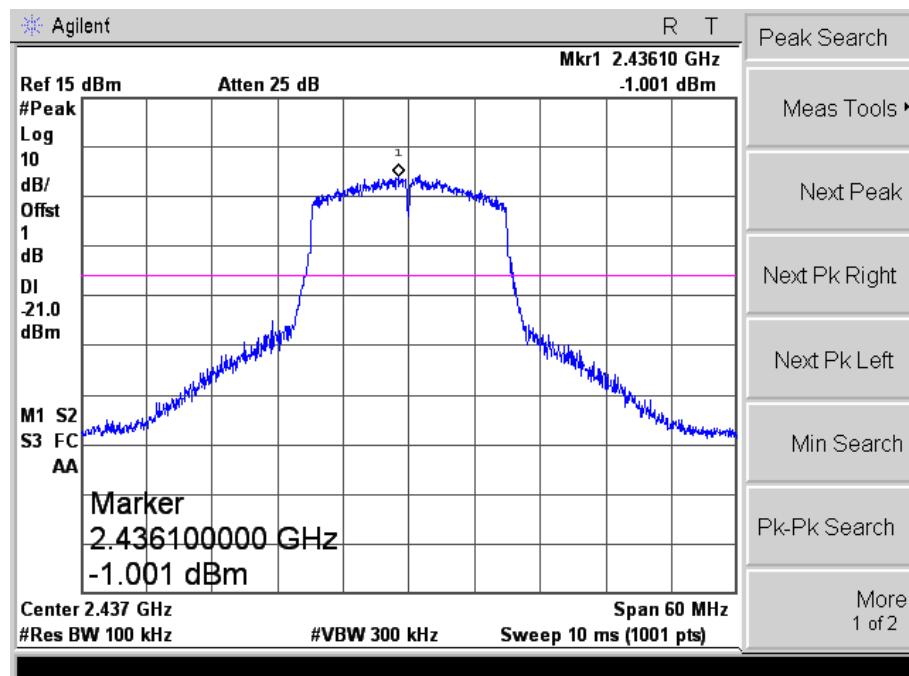



## High Channel

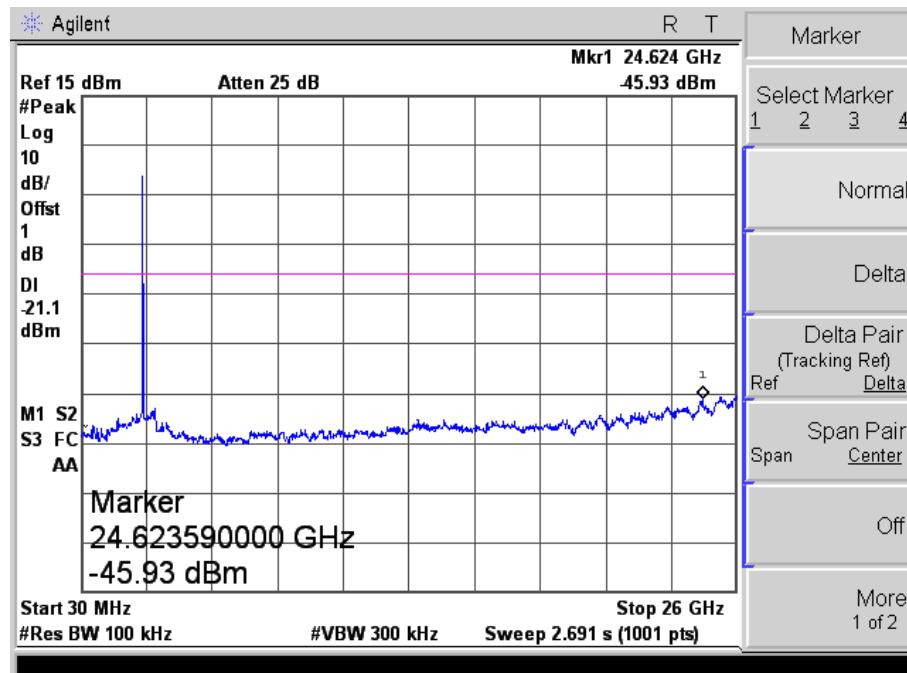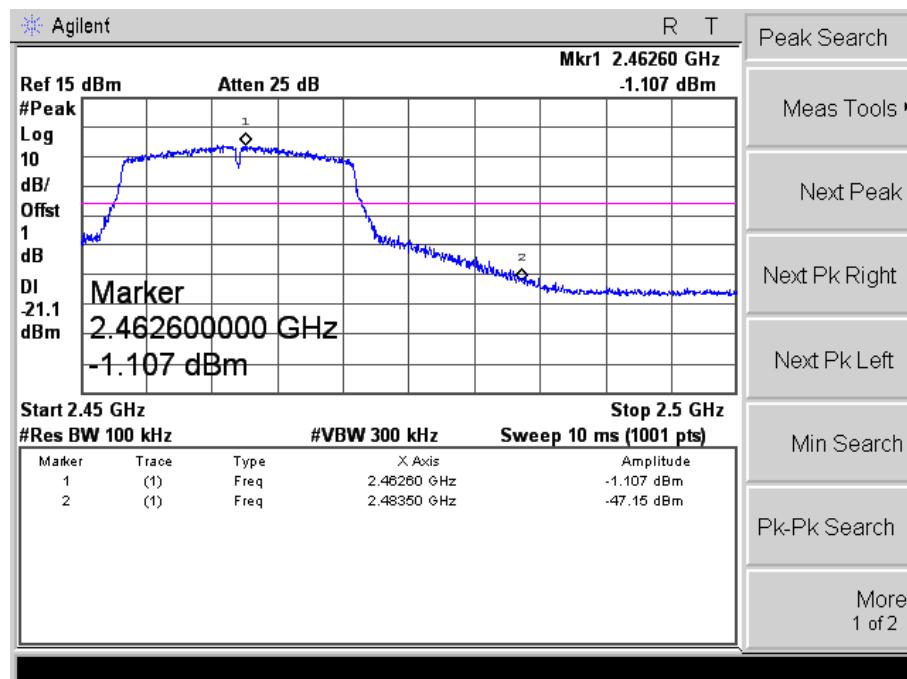



11n-HT40  
Low Channel

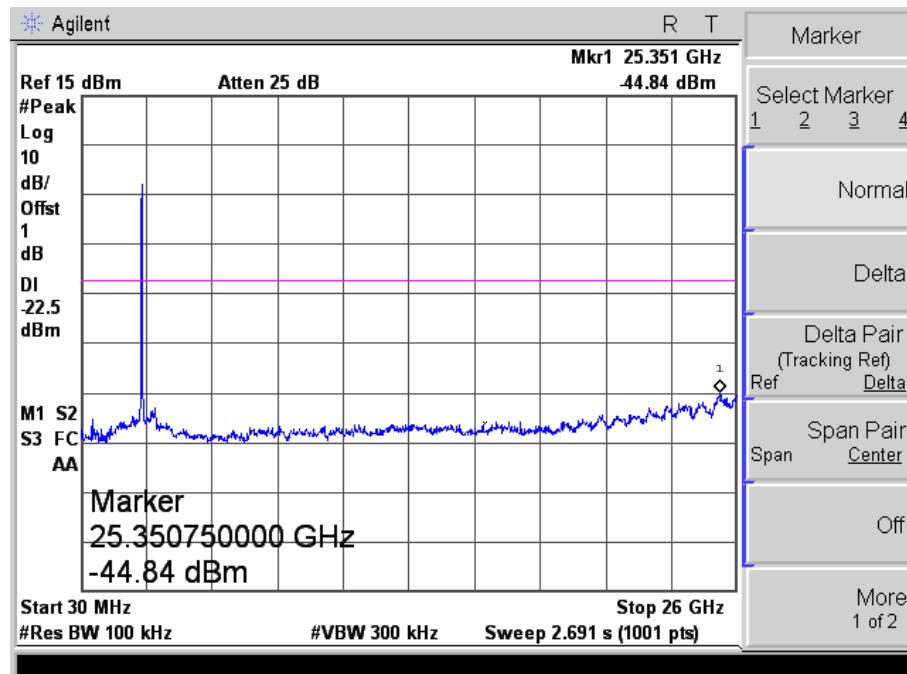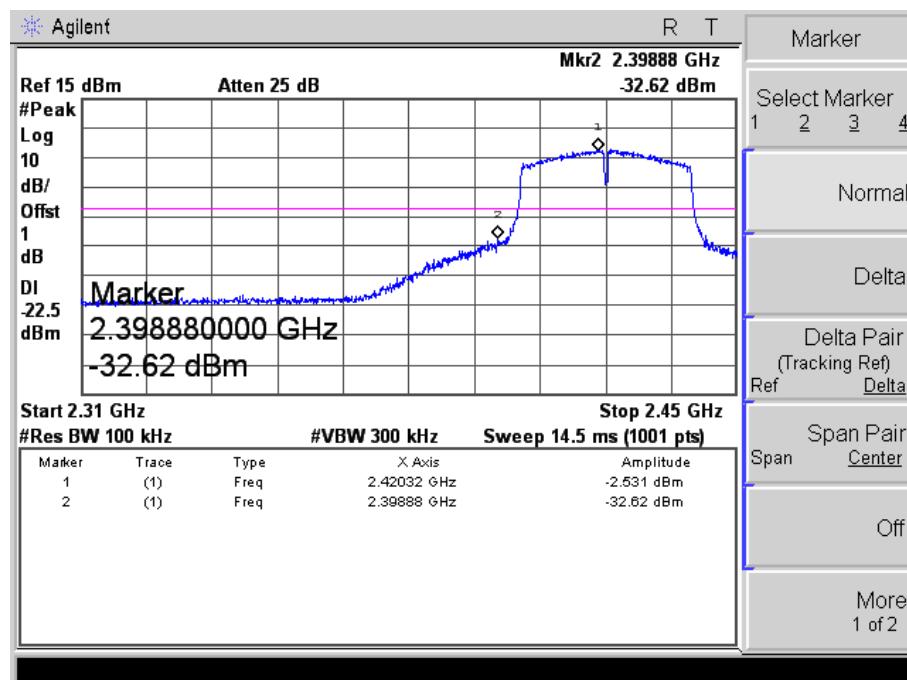



## Middle Channel

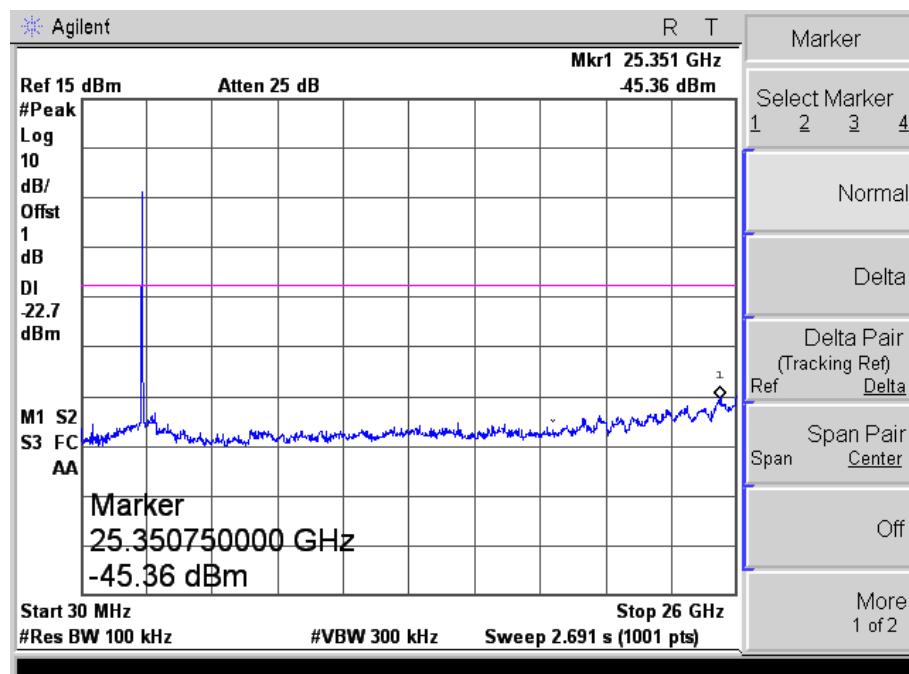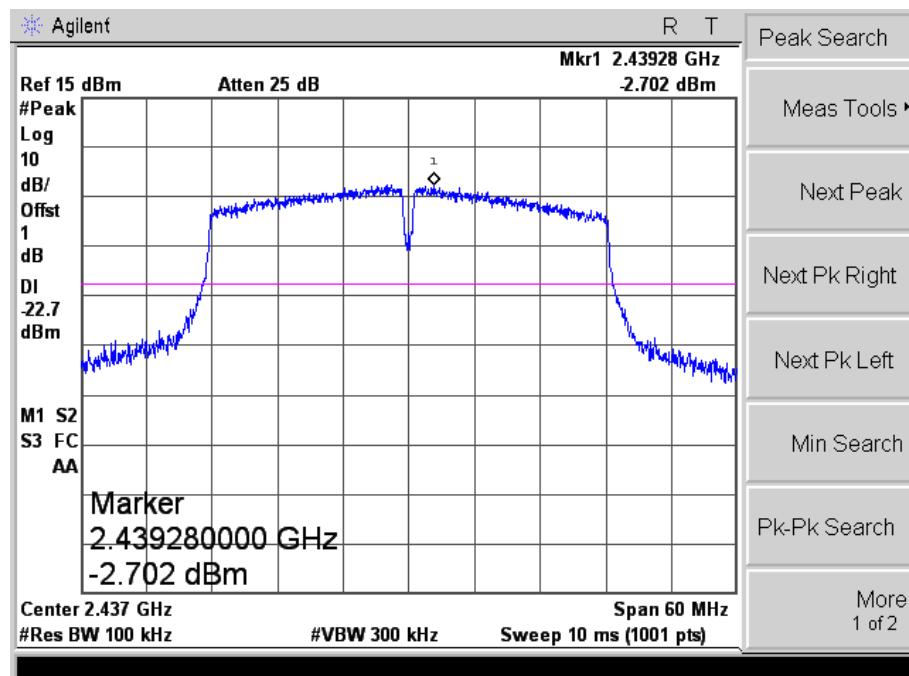



## High Channel

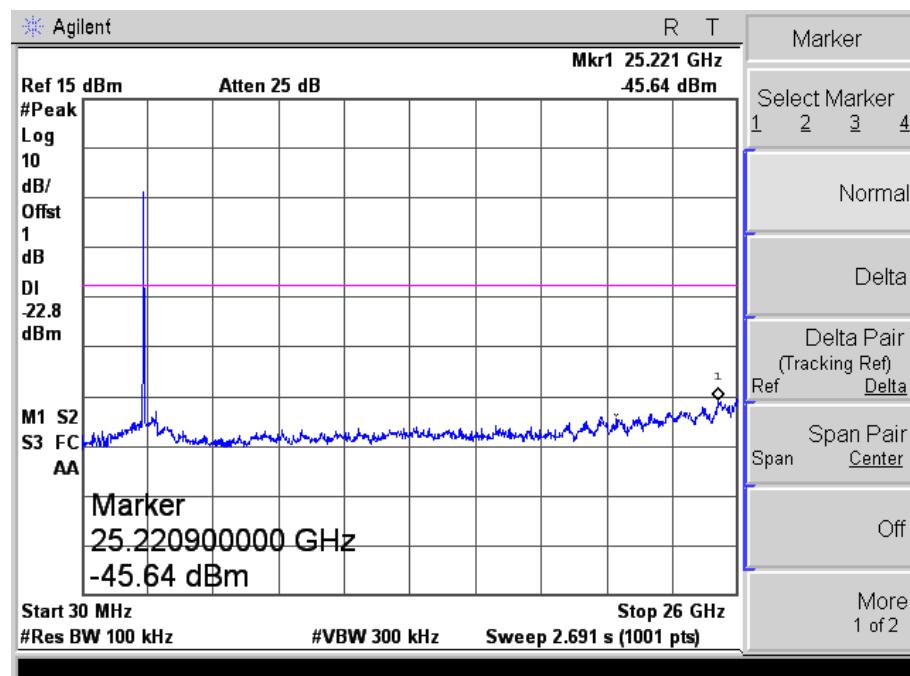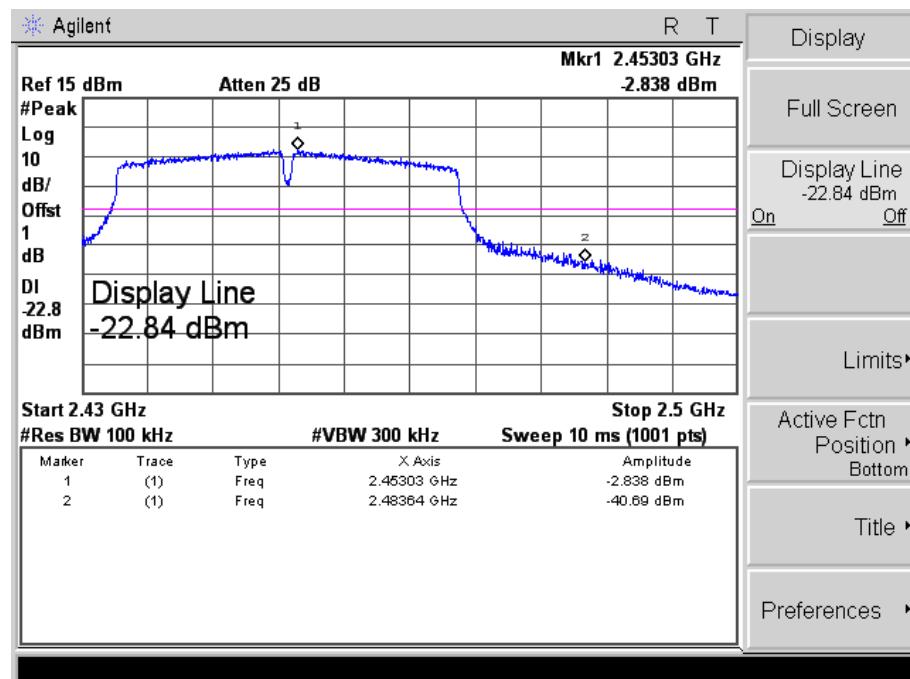



Ant. 2  
802.11b  
Low Channel

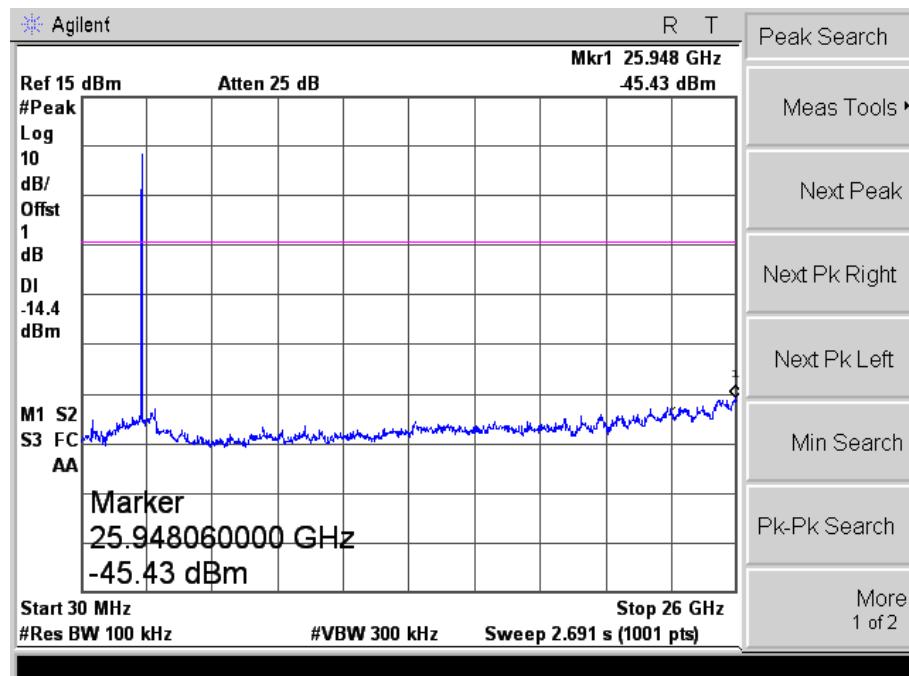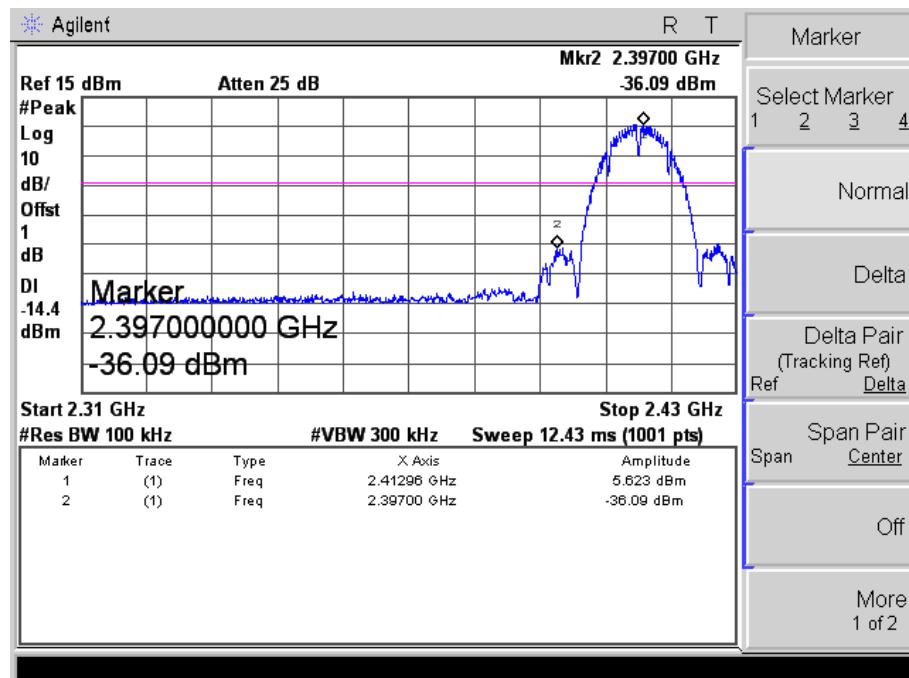



## Middle Channel

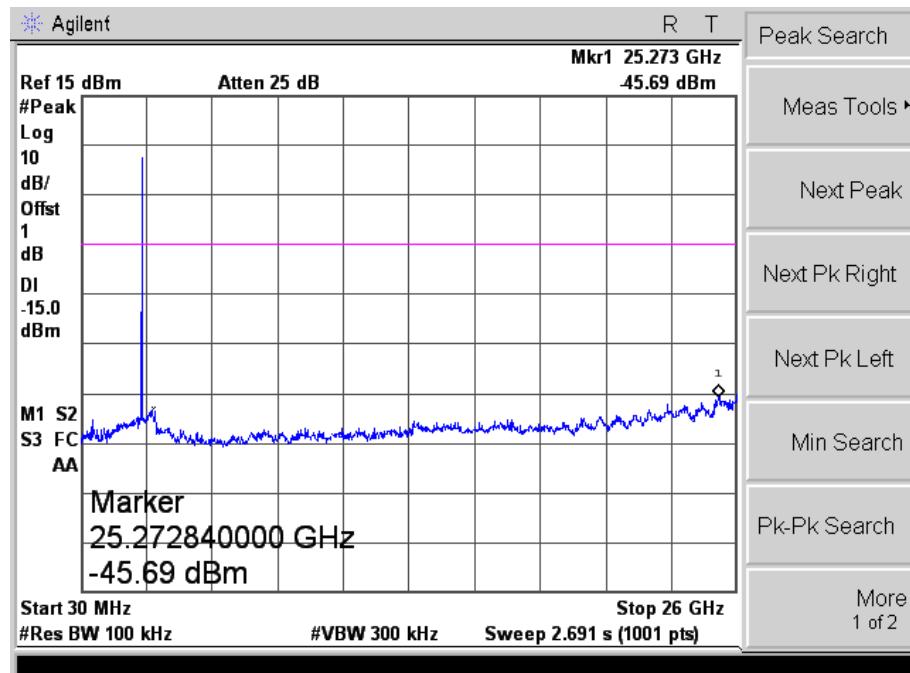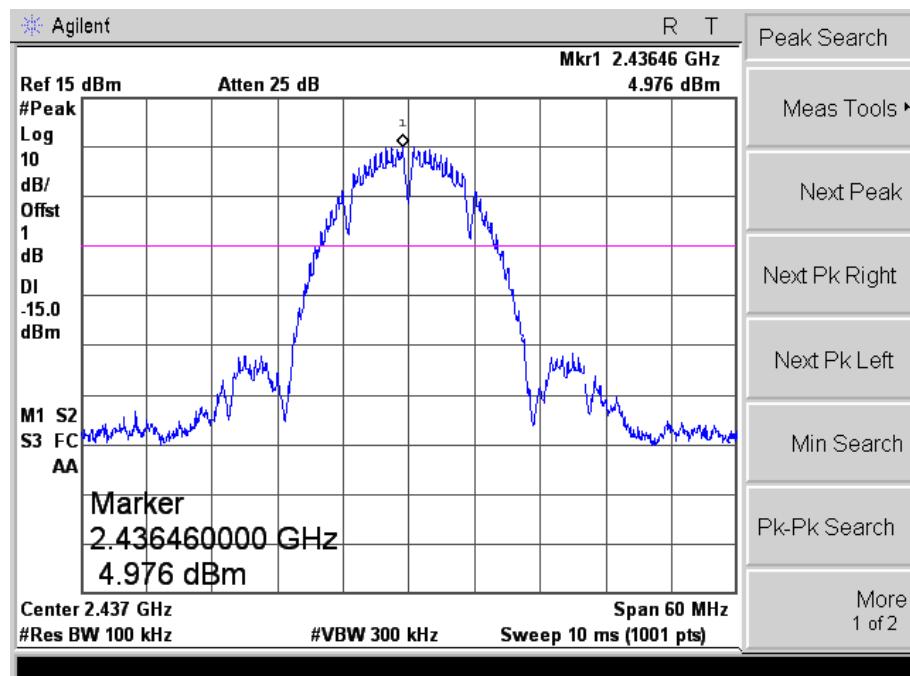



## High Channel

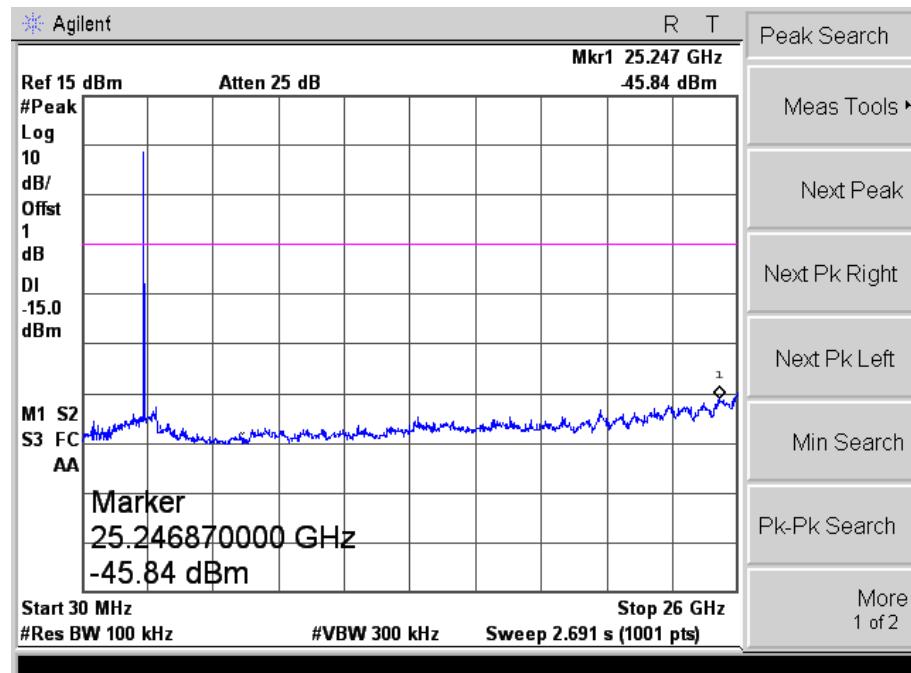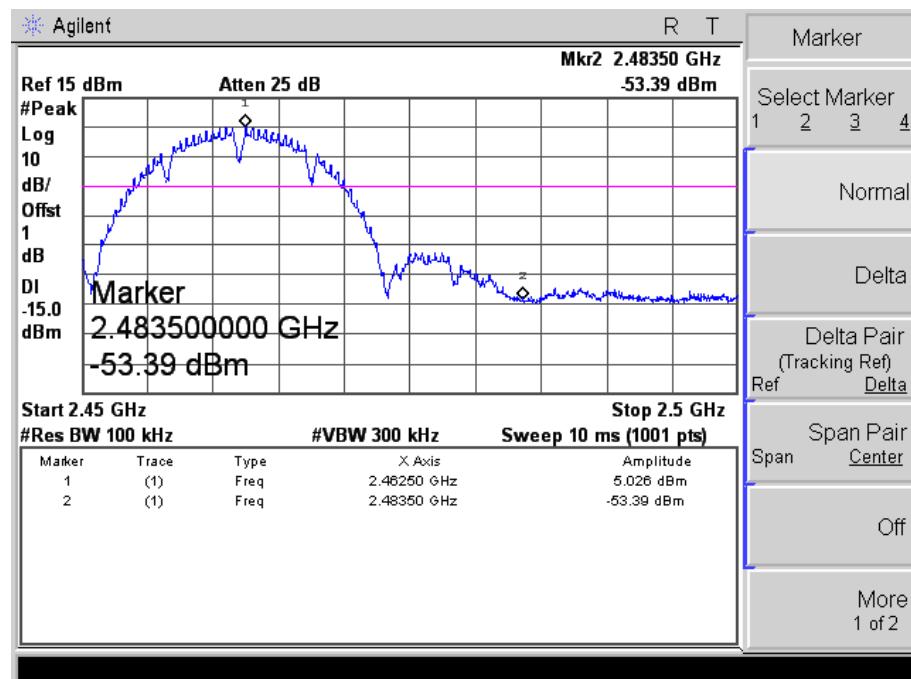



802.11g  
Low Channel

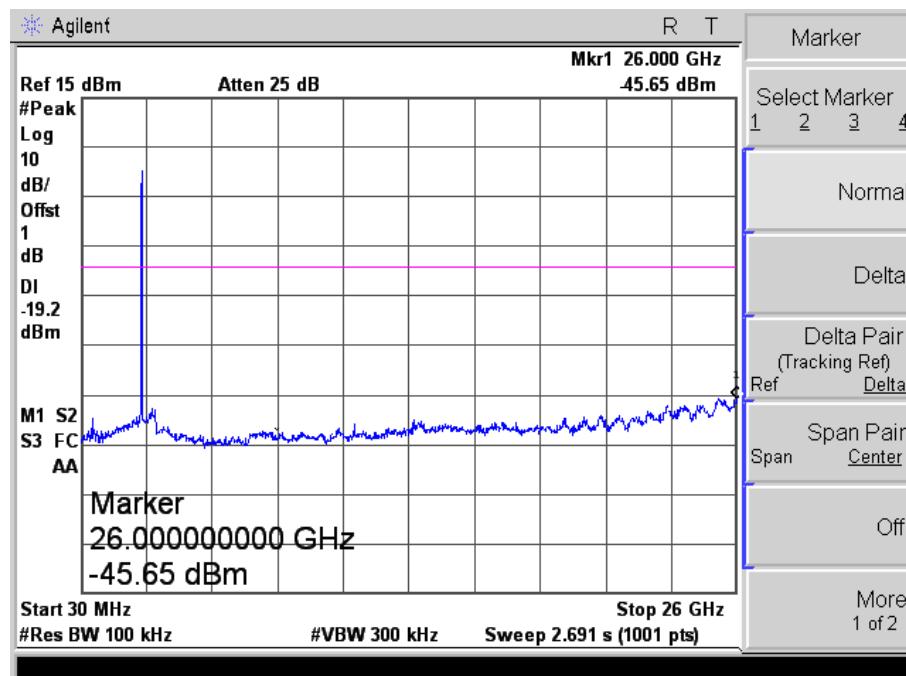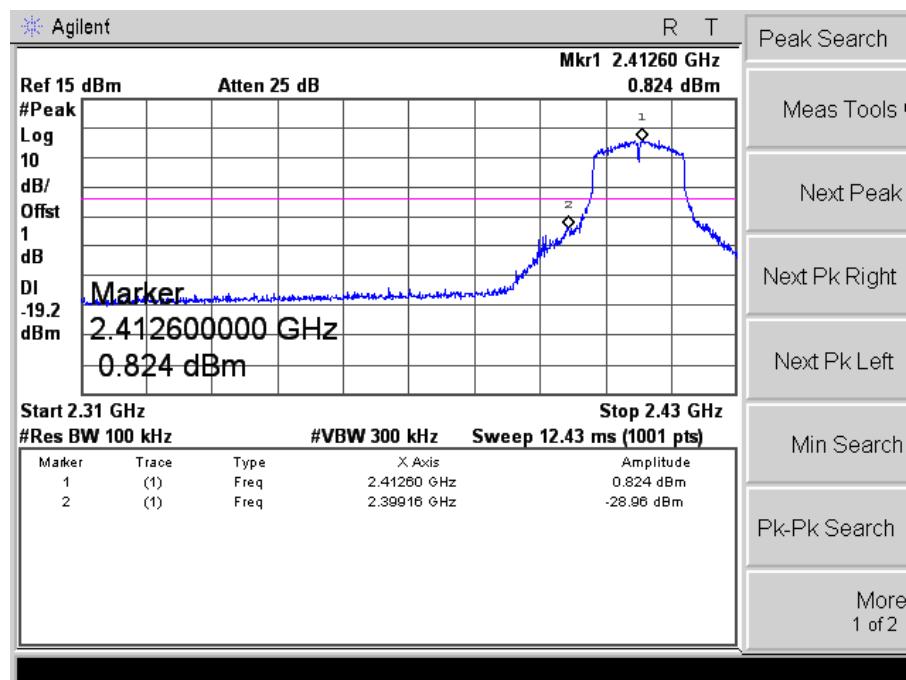



## Middle Channel

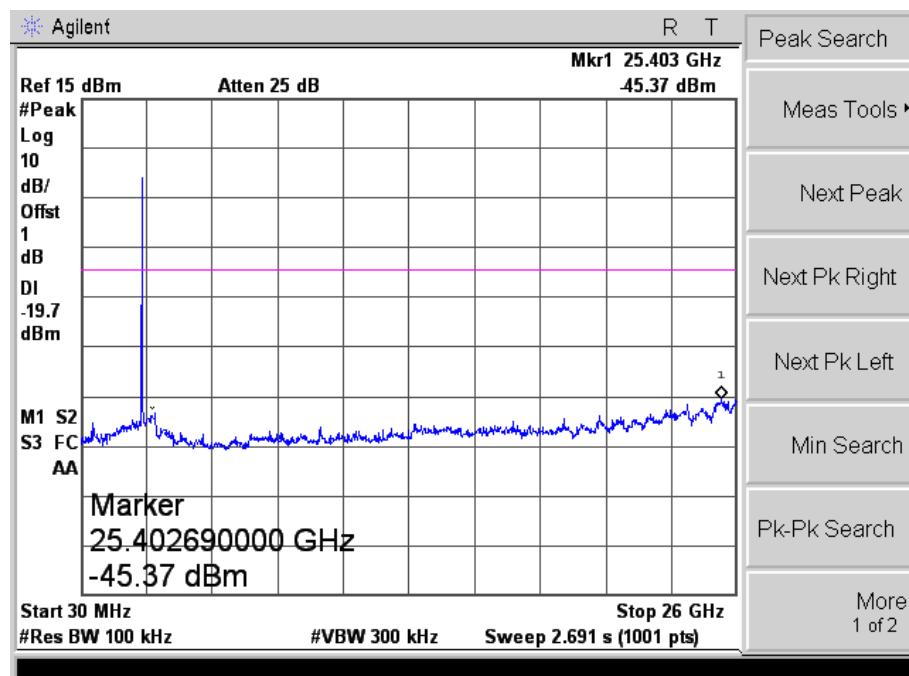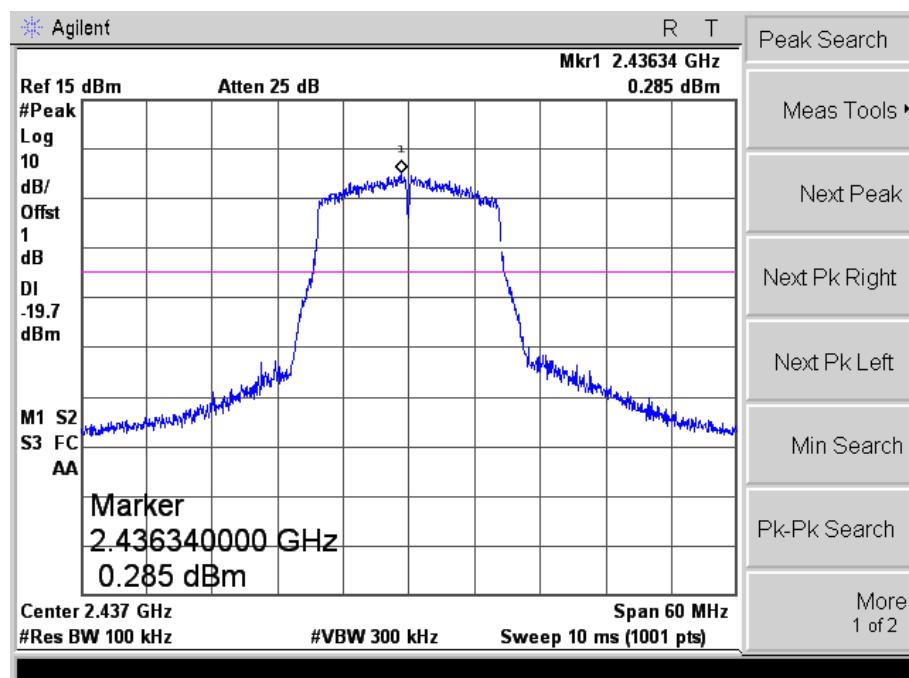



## High Channel

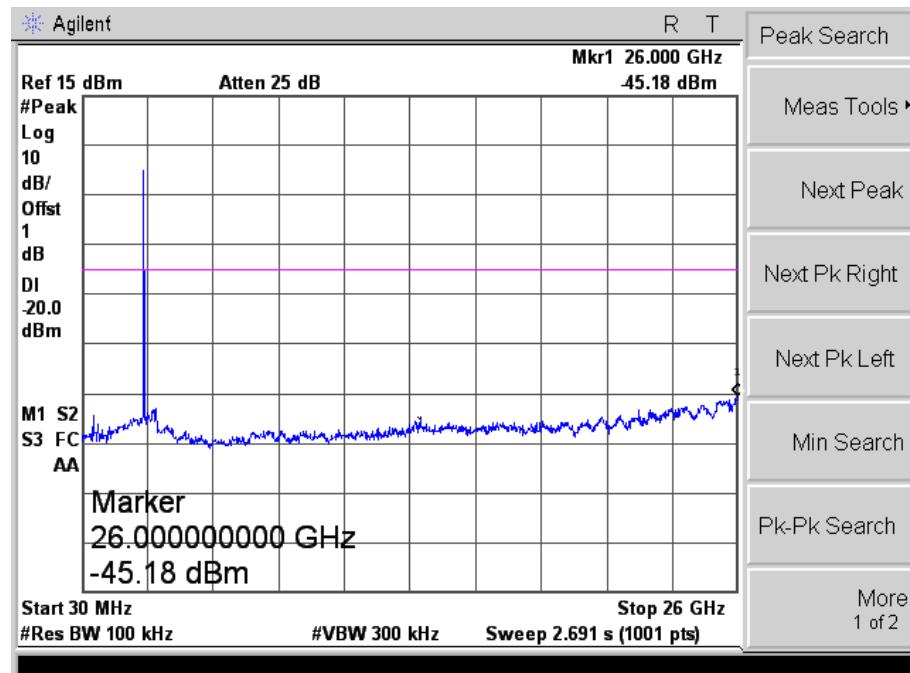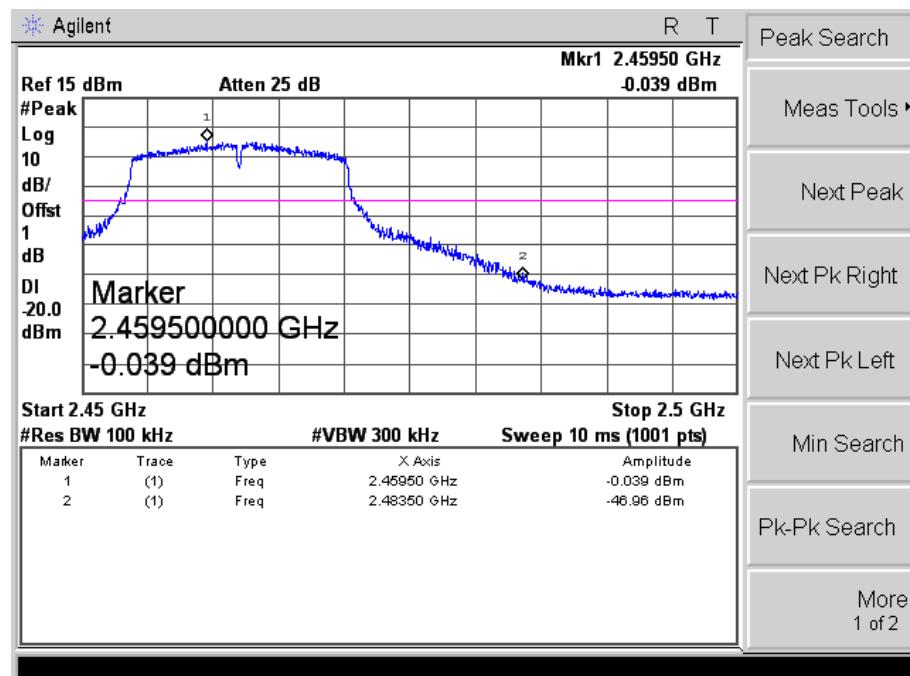



802.11n-HT20  
Low Channel

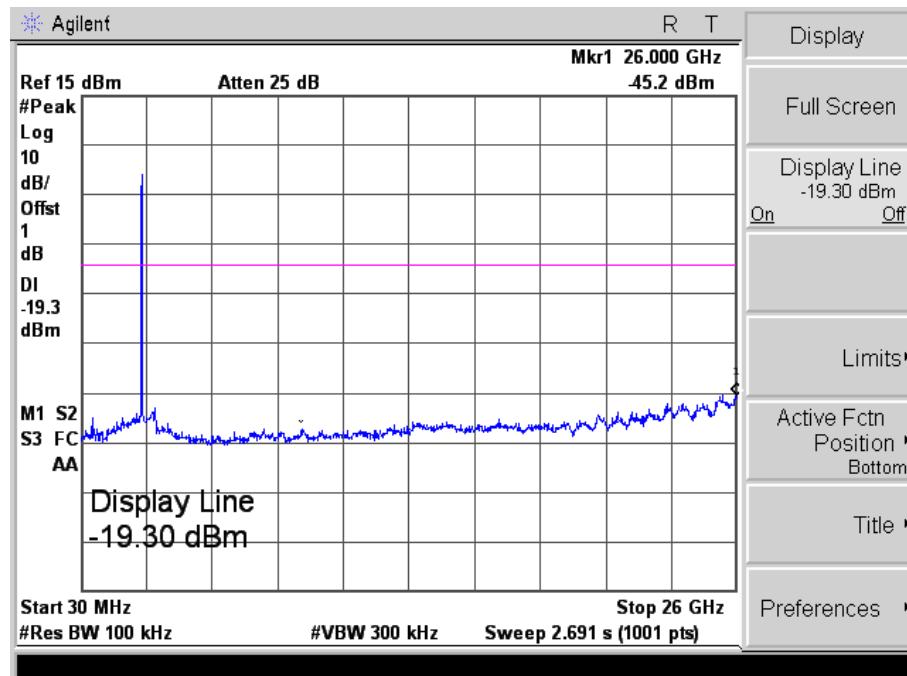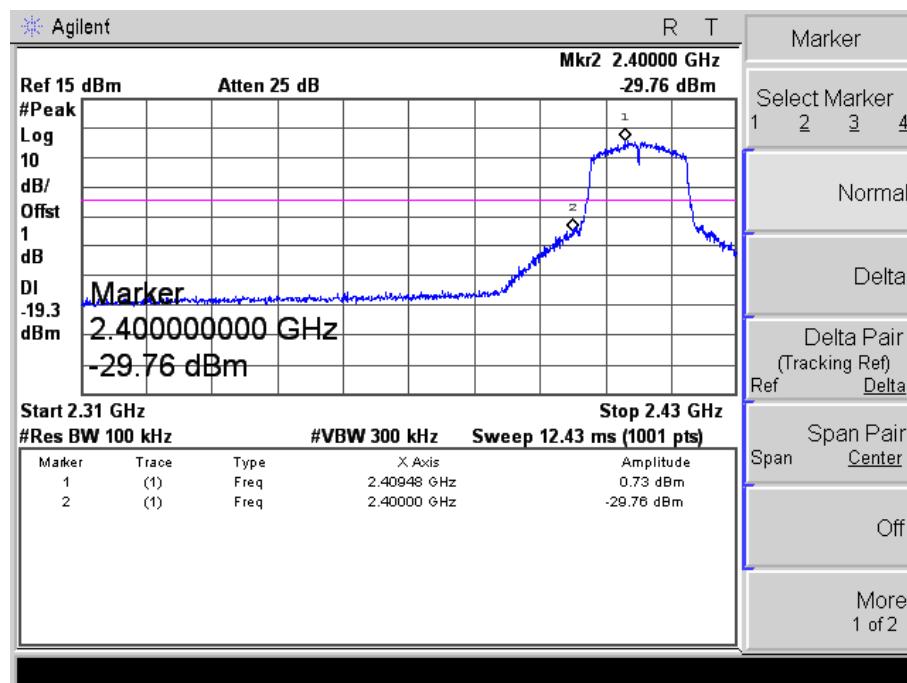



## Middle Channel

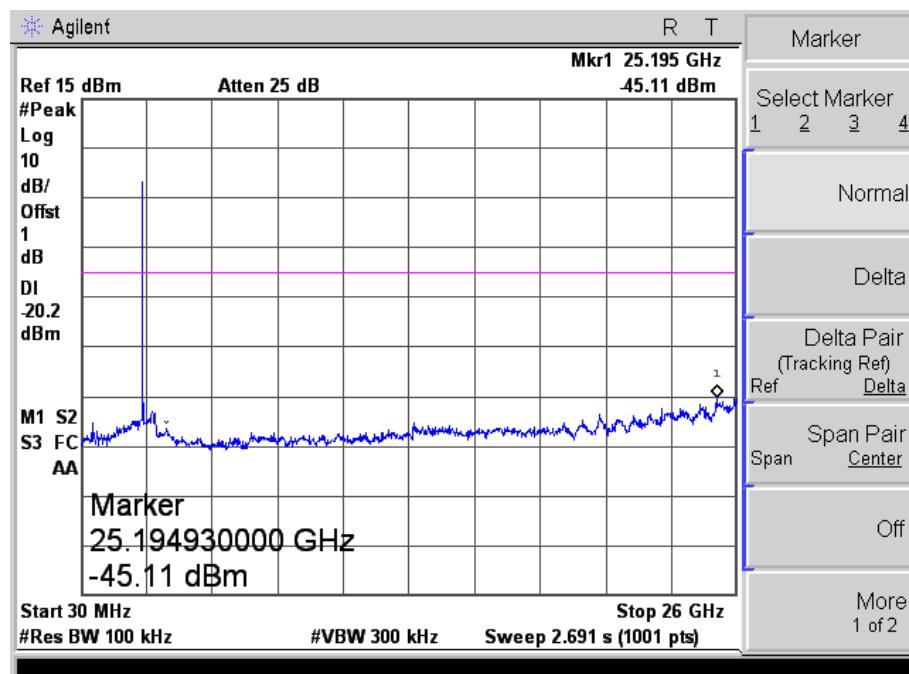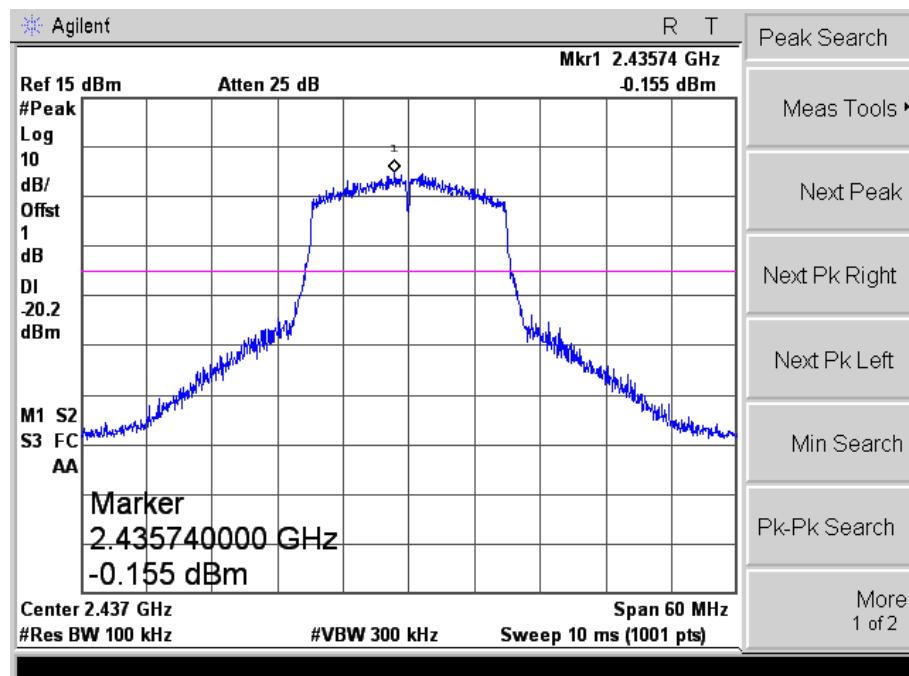



## High Channel

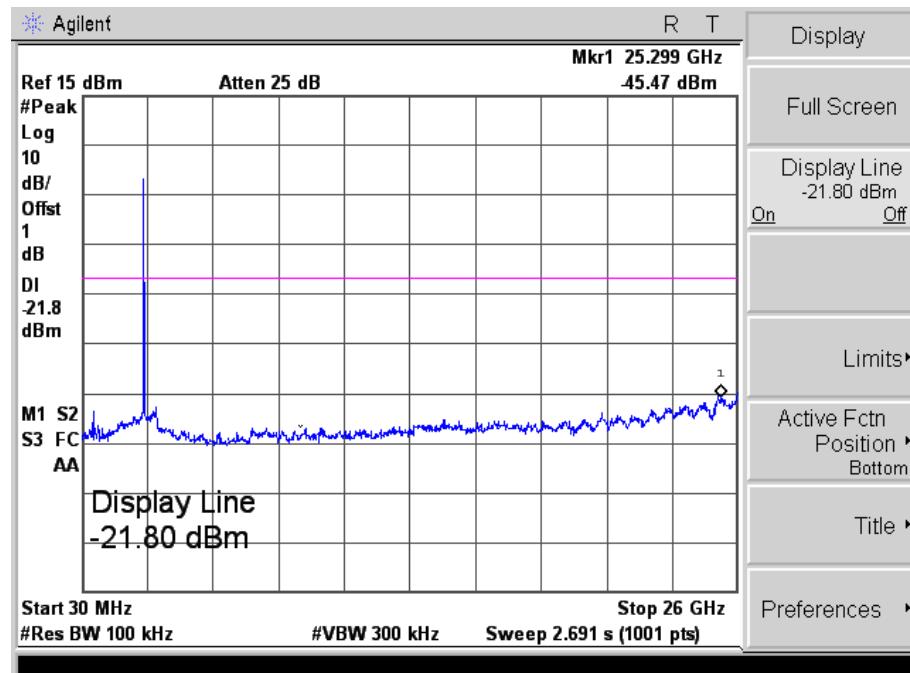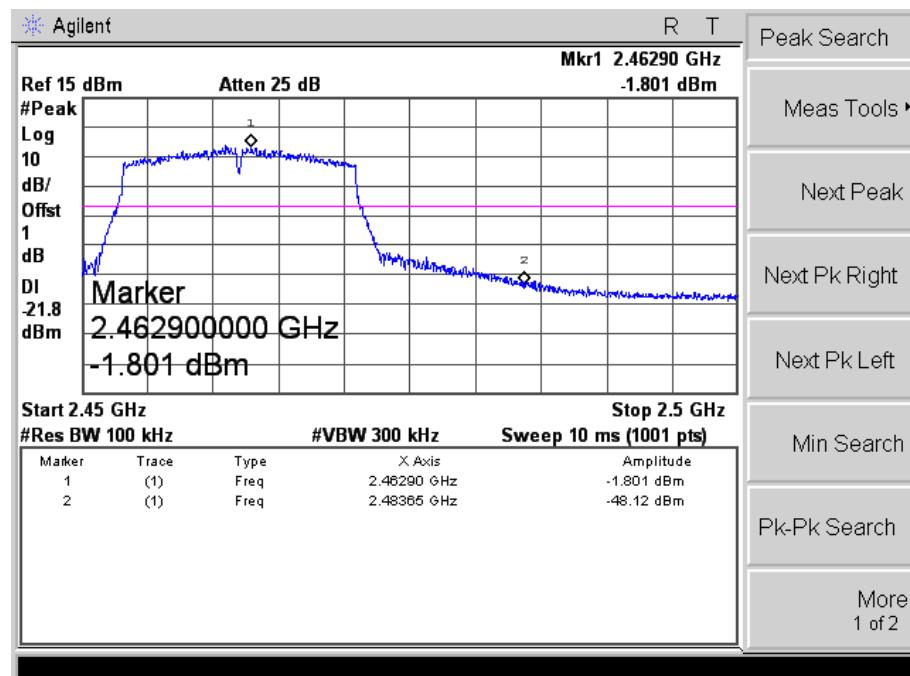



802.11n-HT40  
Low Channel

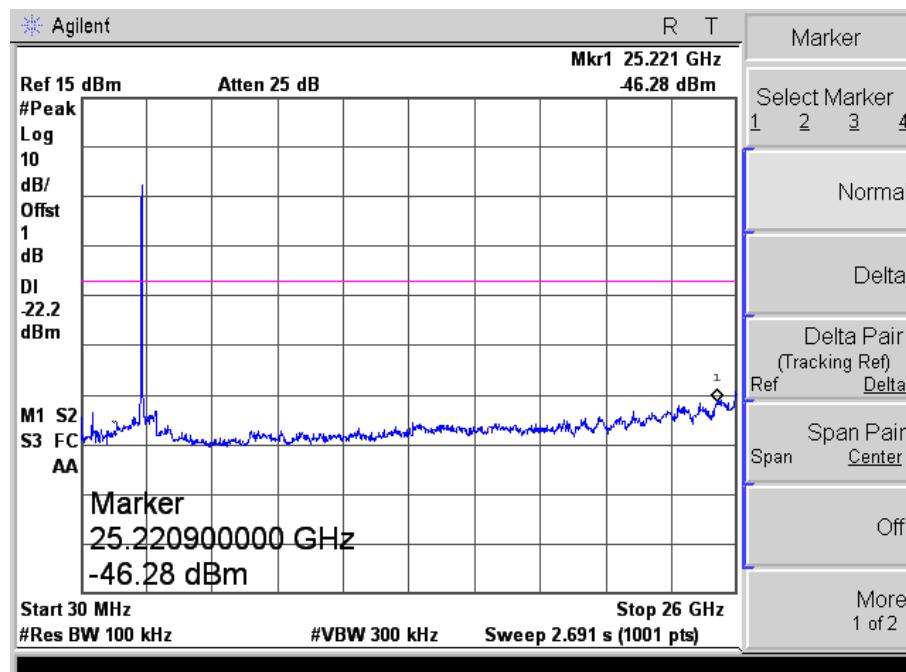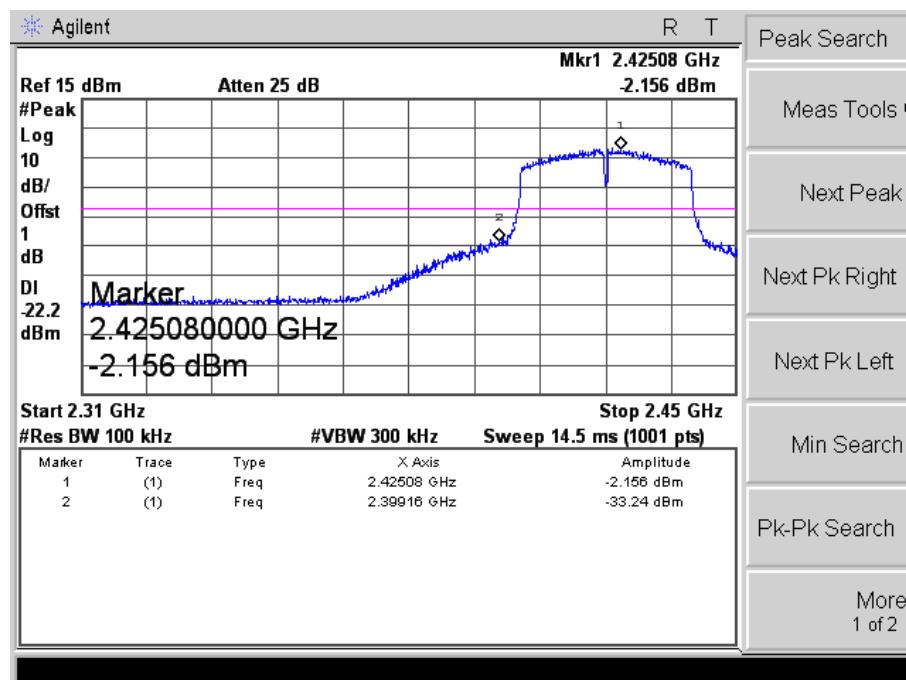

## Middle Channel

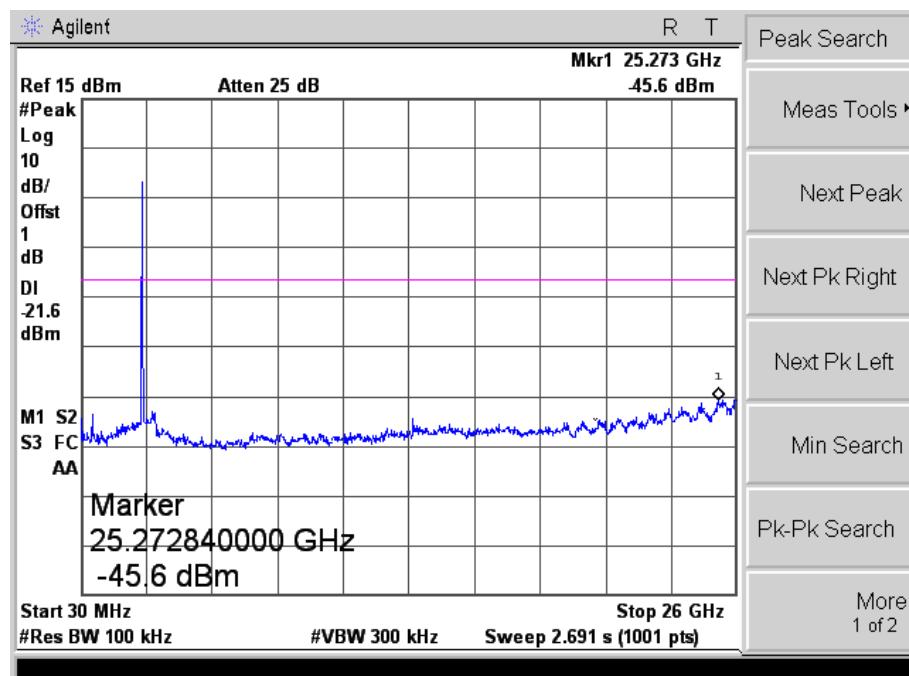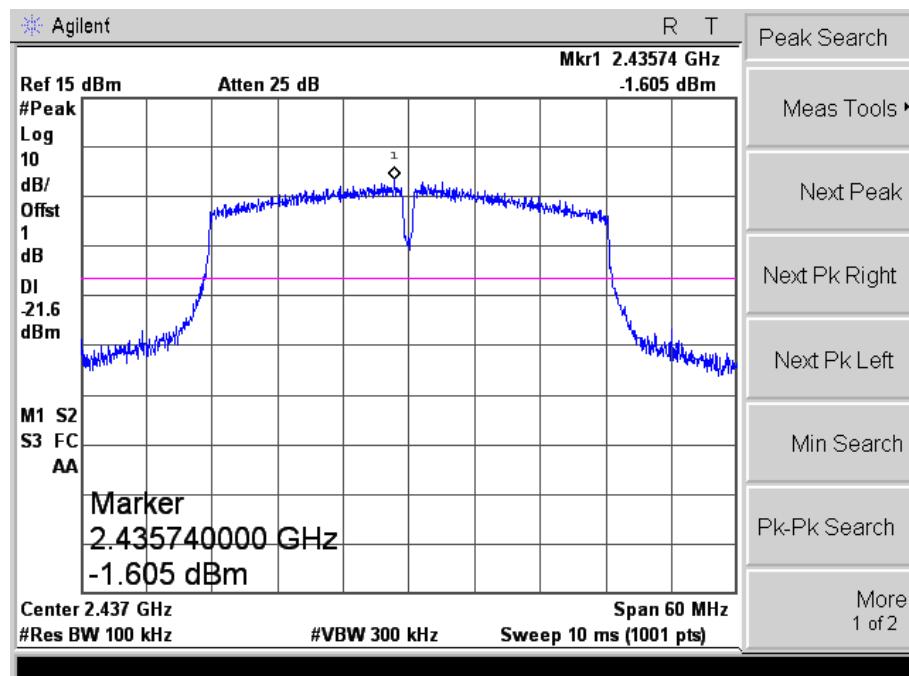

## High Channel

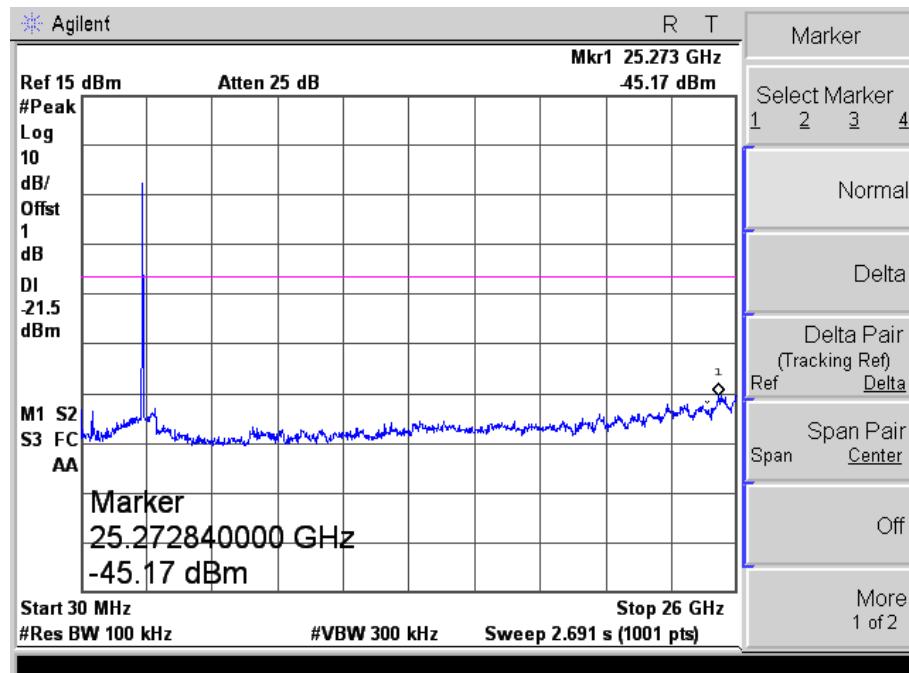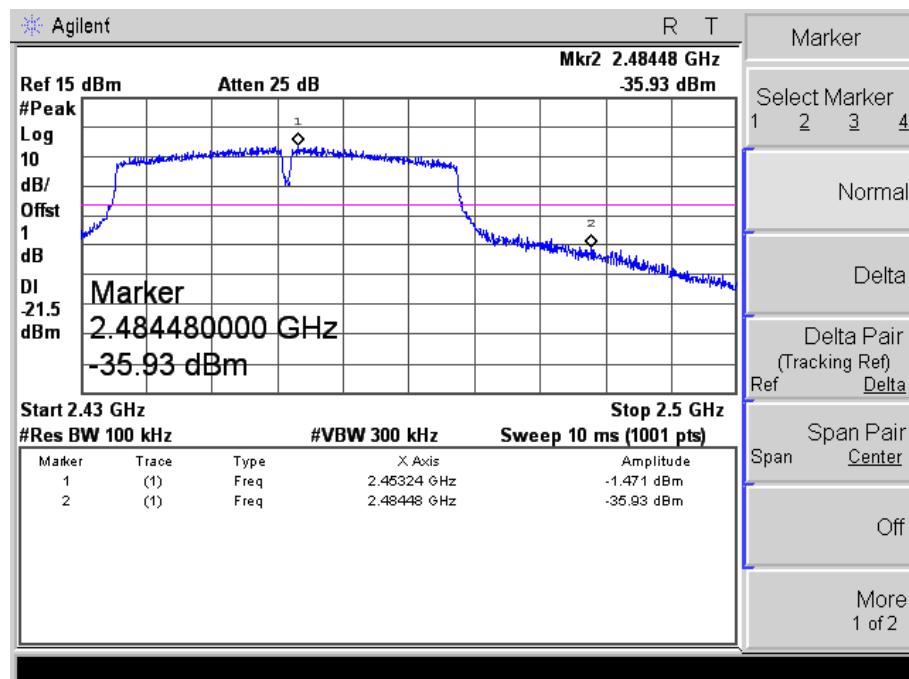

## 10. Conducted Emissions

### 10.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

### 10.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.3 Basic Test Setup Block Diagram

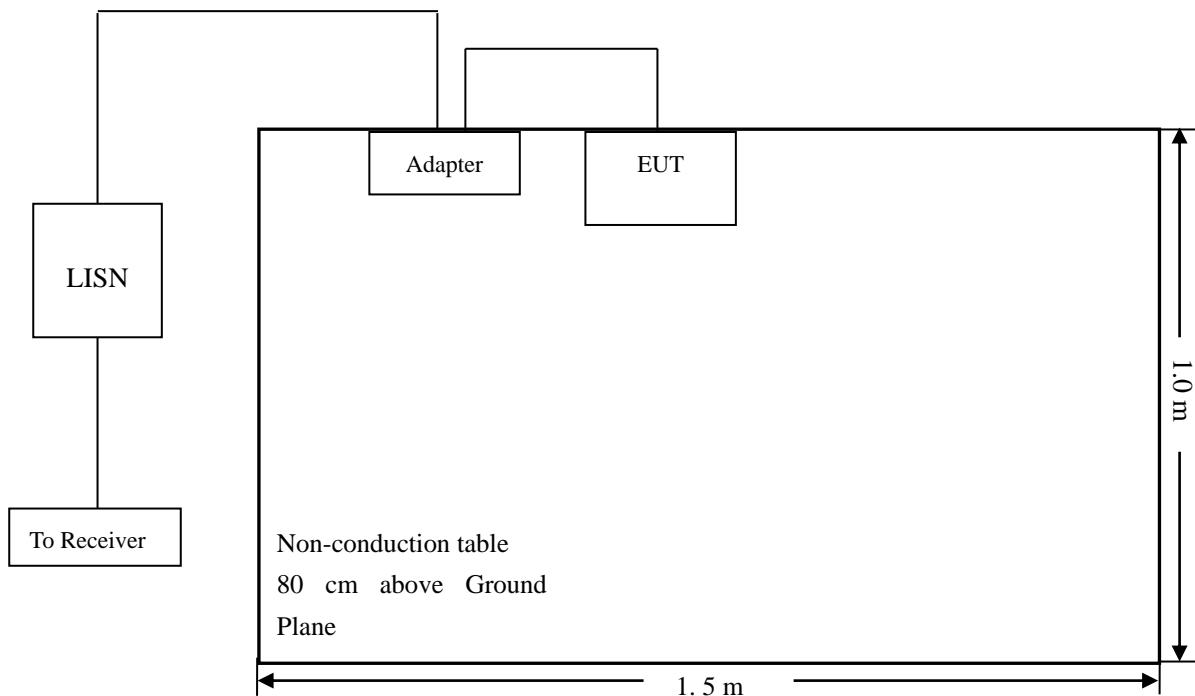

### 10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 10.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal

## 10.6 Summary of Test Results/Plots

According to the data in section 10.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

**-18.47 dB at 1.1540MHz in the Neutral mode, QP detector, 0.15-30MHz**

## 10.7 Conducted Emissions Test Data

**Plot of Conducted Emissions Test Data**


*EUT:* High Fidelity Active Speaker

*Tested Model:* HiVi M3A

*Operating Condition:* Transmitting(Wi-Fi)


*Comment:* AC 120V/60Hz

*Test Specification:* Neutral

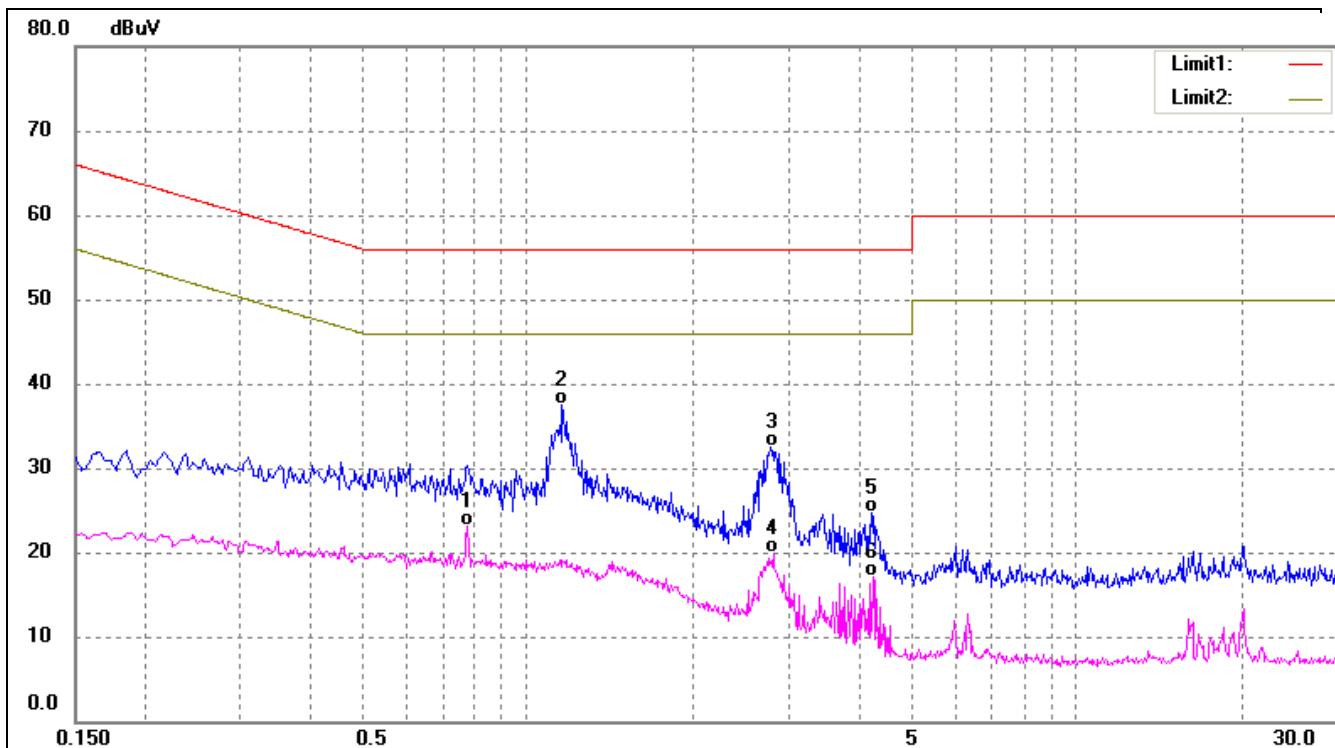

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.7780	13.38	9.78	23.16	46.00	-22.84	AVG
2*	1.1540	27.77	9.76	37.53	56.00	-18.47	QP
3	2.7780	22.79	9.72	32.51	56.00	-23.49	QP
4	2.7980	10.12	9.72	19.84	46.00	-26.16	AVG
5	4.2460	15.04	9.68	24.72	56.00	-31.28	QP
6	4.2540	7.40	9.68	17.08	46.00	-28.92	AVG

Test Specification: Line

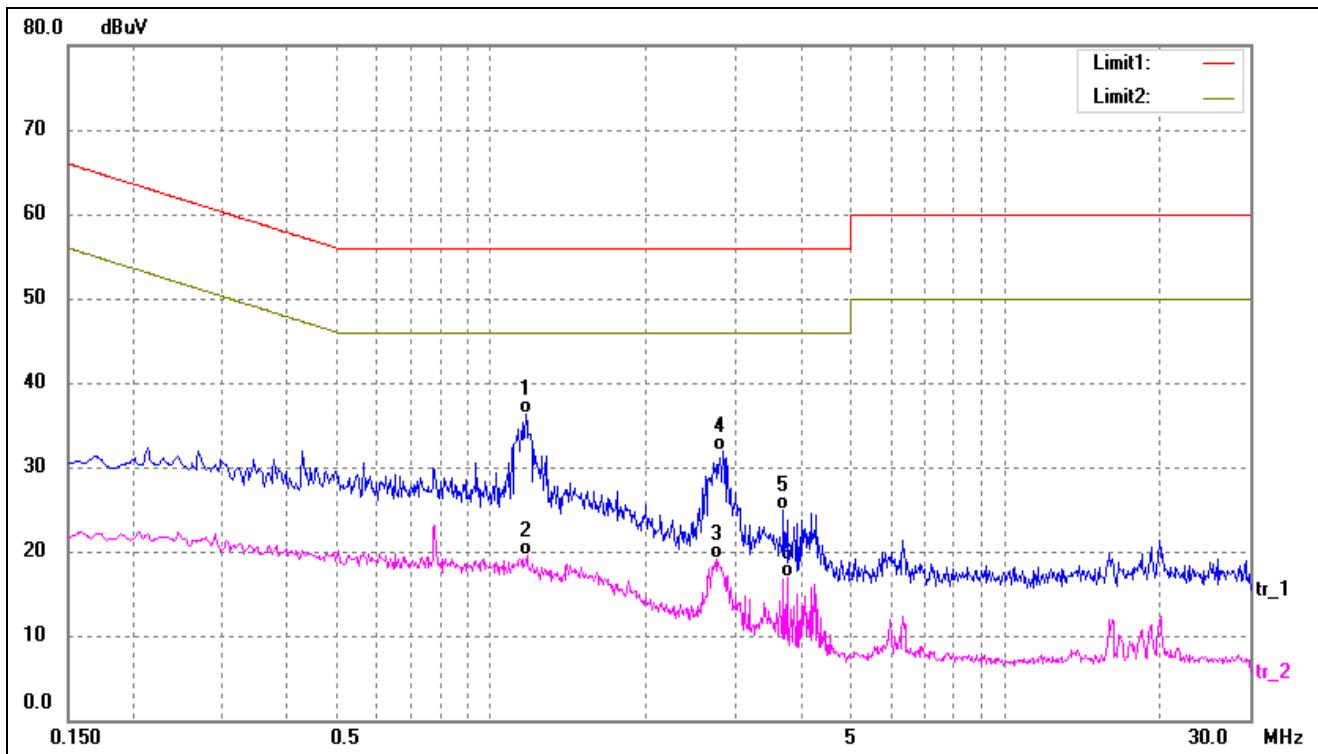

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	1.1700	26.50	9.76	36.26	56.00	-19.74	QP
2	1.1780	9.76	9.76	19.52	46.00	-26.48	AVG
3	2.7540	9.35	9.72	19.07	46.00	-26.93	AVG
4	2.8260	22.17	9.71	31.88	56.00	-24.12	QP
5	3.7140	15.17	9.69	24.86	56.00	-31.14	QP
6	3.7740	7.28	9.69	16.97	46.00	-29.03	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*