

FCC Test Report

Report No.: AGC06662240307FR01

FCC ID : 2ANTC-C188

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Wireless IP Camera

BRAND NAME : N/A

MODEL NAME : C188

APPLICANT: Ansjer Electronics Co., Ltd

DATE OF ISSUE : May 14, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation of Global Conclance (Shenzhen) Co., Ltd



Page 2 of 137


Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	May 14, 2024	Valid	Initial Release	




Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	8
2.4 IEEE 802.11ax Modulation Scheme	9
2.5 Related Submittal(S) / Grant (S)	11
2.6 Test Methodology	11
2.7 Special Accessories	11
2.8 Equipment Modifications	11
2.9 Antenna Requirement	11
2.10 Description of Available Antennas	12
2.11 Description of Test Software	13
3. Test Environment	14
3.1 Address of The Test Laboratory	14
3.2 Test Facility	14
3.3 Environmental Conditions	15
3.4 Measurement Uncertainty	15
3.5 List of Equipment Used	16
4.System Test Configuration	18
4.1 EUT Configuration	18
4.2 EUT Exercise	18
4.3 Configuration of Tested System	18
4.4 Equipment Used in Tested System	18
4.5 Summary of Test Results	19
5. Description of Test Modes	20
6. Duty Cycle Measurement	21
7. RF Output Power Measurement	23
7.1 Provisions Applicable	24
7.2 Measurement Procedure	24
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	25
8. 6dB Bandwidth Measurement	27
8.1 Provisions Applicable	27
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	27





8.4 Measurement Result	28
9. Power Spectral Density Measurement	53
9.1 Provisions Applicable	53
9.2 Measurement Procedure	53
9.3 Measurement Setup (Block Diagram of Configuration)	54
9.4 Measurement Result	54
10. Conducted Band Edge and Out-of-Band Emissions	68
10.1 Provisions Applicable	68
10.2 Measurement Procedure	68
10.3 Measurement Setup (Block Diagram of Configuration)	68
10.4 Measurement Result	69
11. Radiated Spurious Emission	98
11.1 Measurement Limits	98
11.2 Measurement Procedure	98
11.3 Measurement Setup (Block Diagram of Configuration)	101
11.4 Measurement Result	102
12. AC Power Line Conducted Emission	133
12.1 Measurement Limits	133
12.2 Block Diagram of Line Conducted Emission Test	133
12.3 Preliminary Procedure of Line Conducted Emission Test	134
12.4 Final Procedure of Line Conducted Emission Test	134
12.5 Test Result of Line Conducted Emission Test	134
Appendix I: Photographs of Test Setup	137
Appendix II: Photographs of EUT	137





1. General Information

Applicant	Ansjer Electronics Co., Ltd
Address	301, 1st Building, No.21 Yongtian Road, Xiangzhou, Zhuhai, Guangdong, China
Manufacturer	Ansjer Electronics Co., Ltd
Address	No.5 WanLi Road, SanXiang, ZhongShan 528463, Guangdong, China
Factory	Ansjer Electronics Co., Ltd
Address	No.5 WanLi Road, SanXiang, ZhongShan 528463, Guangdong, China
Product Designation	Wireless IP Camera
Brand Name	N/A
Test Model	C188
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Apr. 02, 2024
Date of Test	Apr. 02, 2024 to May 10, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-2.4GWLAN-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jack Gai	
	Jack Gui (Project Engineer)	May 14, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	May 14, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	May 14, 2024



Page 6 of 137

2. Product Information

2.1 Product Technical Description

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Power (Average)	IEEE 802.11b: 12.02dBm; IEEE 802.11g: 11.97dBm;
Carpair ever (Average)	IEEE 802.11n(HT20): 10.91dBm; IEEE 802.11n(HT40): 11.01dBm
Output Power (Peak)	IEEE 802.11b: 14.49dBm; IEEE 802.11g: 19.43dBm;
Output I Ower (I cart)	IEEE 802.11n(HT20): 18.33dBm; IEEE 802.11n(HT40): 18.61dBm
Output Power (MIMO- Average)	IEEE 802.11n(HT20): 13.84dBm; IEEE 802.11n(HT40): 13.75dBm
Output Power (MIMO- Peak)	IEEE 802.11n(HT20): 21.19dBm; IEEE 802.11n(HT40): 21.59dBm
Madulation	802.11b:(DQPSK, DBPSK, CCK) DSSS
Modulation	802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM
	802.11b: 1/2/5.5/11Mbps
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps
	802.11n: up to 300Mbps
Number of channels	11
Hardware Version	XS7302+K06
Software Version	V4.1.4.730201450NA
Antenna Designation	Monopole Antenna
Antenna Gain	Please refer to report section 2.10 description
Number of transmit chain	2(802.11b/g/n all used two antennas,802.11n support MIMO)
Power Supply	DC 12V



Page 7 of 137

2.2 Table of Carrier Frequency For 2412-2462MHz:

11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		

7 channels are provided for 802.11n(HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01		02		03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10		11			



Page 8 of 137

2.3 IEEE 802.11n Modulation Scheme

1400					N _{CBPS}		N _{DBPS}		Data Rate(Mbps)		
MCS Index	Nss	Modulation	R	N_{BPSC}	INC	BPS	IND	INDBPS		800nsGI	
macx					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5	
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval




2.4 IEEE 802.11ax Modulation Scheme

HE-MCSs for 242-tone RU, N_{SS}=1

								Da	ata rate (Mb/	s)
HE-MCS Index	DCM	Modulation	R	N _{BPSCS}	N _{SD}	N _{CBPS}	N _{DBPS}	0.8µsGl	1.6µsGI	3.2µsGl
0	1	DDOK	1/2		117	117	58	4.3	4.0	3.6
0	0	BPSK	1/2	1	234	234	117	8.6	8.1	7.3
4	1		1/2		117	234	117	8.6	8.1	7.3
1	0	QPSK	1/2	2	234	468	234	17.2	16.3	14.6
2	N/A		3/4		234	468	351	25.8	24.4	21.9
2	1		1/2		117	468	234	17.2	16.3	14.6
3	0	40.044	1/2		234	936	468	34.4	32.5	29.3
4	1	16-QAM	3/4	3/4		468	351	25.8	24.4	21.9
4	0		3/4		234	936	702	51.6	48.8	43.9
5			2/3				936	68.8	65.0	58.5
6		64-QAM	3/4	6		1404	1053	77.4	73.1	65.8
7			5/6				1170	86.0	81.3	73.1
8	N/A		3/4		234	40-0	1404	103.2	97.5	87.8
9		256-QAM	5/6	8		1872	1560	114.7	108.3	97.5
10		4004 0414	3/4	40		00.46	1755	129.0	121.9	109.7
11		1024-QAM	5/6	10		2340	1950	143.4	135.4	121.9

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval





HE-MCSs for 484-tone RU, N_{SS}=1

								Data rate (Mb/s)		
HE-MCS Index	DCM	Modulation	R	N _{BPSCS}	N _{SD}	N _{CBPS}	N _{DBPS}	0.8µsGl	1.6µsGl	3.2µsGl
0	1	DDOL	1/2		234	234	117	8.6	8.1	7.3
0	0	BPSK	1/2	1	468	468	234	17.2	16.3	14.6
	1		1/2		234	468	234	17.2	16.3	14.6
1	0	QPSK	1/2	2	468	936	468	34.4	32.5	29.3
2	N/A		3/4		468	936	702	51.6	48.8	43.9
	1		1/2	4	234	936	468	34.4	32.5	29.3
3	0		1/2		468	1872	936	68.8	65.0	58.5
4	1	16-QAM	3/4		234	936	702	51.6	48.8	43.9
4	0		3/4		468	1872	1404	103.2	97.5	87.8
5			2/3				1872	137.6	130.0	117.0
6		64-QAM	3/4	6		2808	2106	154.9	146.3	131.6
7			5/6				2340	172.1	162.5	146.3
8	N/A		3/4		468		2808	206.5	195.0	175.5
9		256-QAM	5/6	8		3744	3120	229.4	216.7	195.0
10		4004 04:	3/4			1005	3510	258.1	243.8	219.4
11		1024-QAM	5/6	10		4680	3900	286.8	270.8	243.8

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 11 of 137

2.5 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2ANTC-C188, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.6 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	KDB 662911 D01 Multiple Transmitter Output v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

2.7 Special Accessories

Refer to section 4.4.

2.8 Equipment Modifications

Not available for this EUT intended for grant.

2.9 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. For the antenna gain, please refer to the description in Chapter 2.10 of the report.



Page 12 of 137

2.10 Description of Available Antennas

Antenna	Frequency	TX	Bandwidth	Max Pea	k Gain (dBi)	Max Directional Gain			
Type	Band (MHz)	Paths	(MHz)	Ant 1	Ant 2	(dBi)			
	2.4GWIFI PIFA Antenna List (2.4GHz 2*2 MIMO)								
Monopole Antenna	2400~2483.5	2	20, 40	3.29	3.29	6.3			

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11n mode.

Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, Gant, Directional gain = Gant + Array Gain, where Array Gain is as follows.

• For power spectral density (PSD) measurements on devices:

Array Gain = $10 \log (N_{ANT}/N_{SS}) dB = 3.01$;

For power measurements on IEEE 802.1devices:

Array Gain = 0 dB for $N_{ANT} \le 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥40 MHz for any Nant;


Array Gain = 5 log(Nant/Nss) dB or 3 dB, whichever is less, for 20 MHz channel widths with Nant ≥ 5.

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with Gant set equal to the gain of the antenna having the highest gain.



2.11 Description of Test Software

Software Setting Diagram

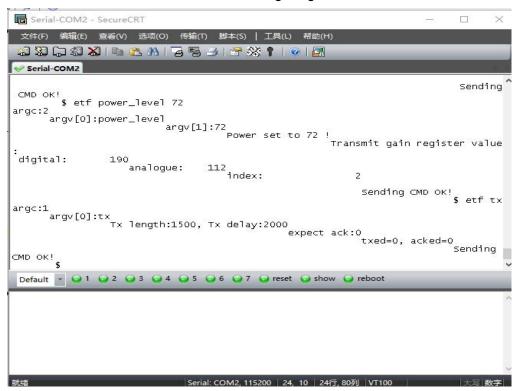

Test Mode	Channel	Power Index			
Test Mode	Channel	Chain 1	Chain 2		
802.11b	L/M/H	0	0		
802.11g	L/M/H	0	0		
802.11n-HT20	L/M/H	0	0		
802.11n-HT40	L/M/H	0	0		



Page 14 of 137

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 15 of 137


3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

3.4 Measurement Uncertainty

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

uncertainty multiplied by a coverage factor of k=2, prov	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$






3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31		
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31		
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02		
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30		
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03		
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		

• A	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02		
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08		
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02		





• Tes	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A				
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6				
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



Page 18 of 137

4.System Test Configuration


4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

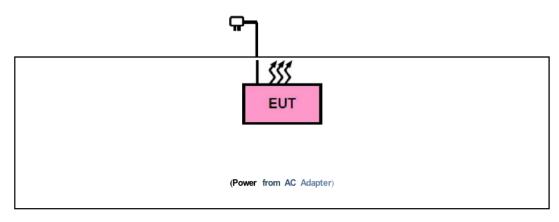

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	JF012WR-0900150UH	JFEC		
2	Control Box	USB-TTL			

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1			-	1	



Page 19 of 137

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



Page 20 of 137

5. Description of Test Modes

	Summary table of Test Cases				
	Data Rate / Modulation				
Test Item	2.4G WLAN - 802.11b/g/n (DSSS/OFDM)				
Radiated & Conducted Test Cases	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps powered by AC/DC adapter Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps powered by AC/DC adapter Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps powered by AC/DC adapter Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps powered by AC/DC adapter Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps powered by AC/DC adapter Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps powered by AC/DC adapter Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps powered by AC/DC adapter Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps powered by AC/DC adapter Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps powered by AC/DC adapter Mode 10: 802.11n-HT40_TX CH03_2422 MHz_MCS0 Mbps powered by AC/DC adapter Mode 11: 802.11n-HT40_TX CH06_2437 MHz_ MCS0 Mbps powered by AC/DC adapter Mode 12: 802.11n-HT40_TX CH06_2437 MHz_ MCS0 Mbps powered by AC/DC adapter Mode 12: 802.11n-HT40_TX CH09_2452 MHz_ MCS0 Mbps powered by AC/DC adapter				
AC Conducted Emission	Mode 1: 2.4G WLAN Link with adapter				

Note:

- 1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 2. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- All modes and antennas in the radiation spurious test are pre-scanned. When there is no MIMO technology
 mode, antenna 1 is evaluated. When there is MIMO technology mode, antenna 1 + antenna 2 are
 evaluated as the worst data.



Page 21 of 137

6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

ANT 1


Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	100			
IEEE 802.11g	6	97.48	0.11	0.72	-0.22
IEEE 802.11n-HT20	MCS0	97.31	0.12	0.77	-0.24
IEEE 802.11n-HT40	MCS0	94.82	0.23	1.54	-0.46

ANT 2

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	99.64			
IEEE 802.11g	6	97.48	0.11	0.72	-0.22
IEEE 802.11n-HT20	MCS0	97.23	0.12	0.77	-0.24
IEEE 802.11n-HT40	MCS0	94.78	0.23	1.54	-0.47

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. Average factor = 20 log10 Duty Cycle
- 3. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.






The test plots as follows:

ANT 1







ANT 2





Page 24 of 137

7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

7.3 Measurement Setup (Block Diagram of Configuration)

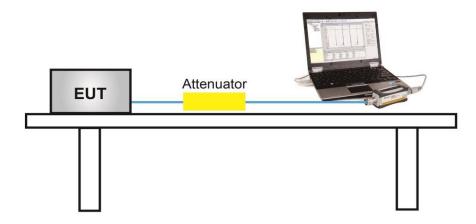




Page 25 of 137

7.4 Measurement Result

Test Data of Conducted Output Power-ANT 1							
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2412	11.18	13.68	≤30	Pass		
802.11b	2437	11.03	13.48	≤30	Pass		
	2462	10.02	12.68	≤30	Pass		
	2412	11.97	19.29	≤30	Pass		
802.11g	2437	11.89	19.43	≤30	Pass		
	2462	11.06	18.67	≤30	Pass		
	2412	10.75	18.02	≤30	Pass		
802.11n20	2437	10.63	18.22	≤30	Pass		
	2462	9.91	17.44	≤30	Pass		
	2422	11.01	18.54	≤30	Pass		
802.11n40	2437	10.84	18.61	≤30	Pass		
	2452	10.17	18.21	≤30	Pass		

Test Data of Conducted Output Power-ANT 2							
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2412	11.45	13.90	≤30	Pass		
802.11b	2437	12.02	14.49	≤30	Pass		
	2462	11.26	13.73	≤30	Pass		
	2412	11.38	18.98	≤30	Pass		
802.11g	2437	10.81	18.26	≤30	Pass		
	2462	10.84	18.44	≤30	Pass		
	2412	10.91	18.33	≤30	Pass		
802.11n20	2437	10.63	18.12	≤30	Pass		
	2462	9.60	17.22	≤30	Pass		
	2422	9.91	17.54	≤30	Pass		
802.11n40	2437	10.64	18.54	≤30	Pass		
	2452	10.17	18.05	≤30	Pass		





Test Data of Conducted Output Power-MIMO							
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2412	13.84	21.19	≤30	Pass		
802.11n20	2437	13.64	21.18	≤30	Pass		
	2462	12.77	20.34	≤30	Pass		
	2422	13.51	21.08	≤30	Pass		
802.11n40	2437	13.75	21.59	≤30	Pass		
	2452	13.18	21.14	≤30	Pass		

Note:

The Total Average Conducted Output Power (dBm) = $10*\log\{10^{(Ant1~AVG/10)} + 10^{(Ant2~AVG/10)}\}$. The Total Peak Conducted Output Power (dBm) = $10*\log\{10^{(Ant1~PK/10)} + 10^{(Ant2~PK/10)}\}$. 1.



Page 27 of 137

8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

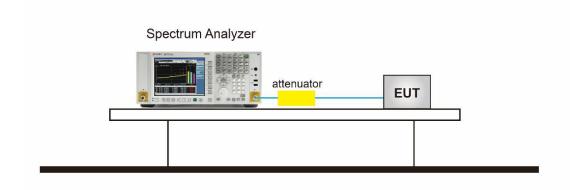




Page 28 of 137

8.4 Measurement Result


Test Data of Occupied Bandwidth and DTS Bandwidth-ANT 1							
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Pass or Fail		
	2412	12.629	8.078	≥0.5	Pass		
802.11b	2437	12.921	8.087	≥0.5	Pass		
	2462	12.515	8.073	≥0.5	Pass		
	2412	16.441	15.109	≥0.5	Pass		
802.11g	2437	16.595	15.515	≥0.5	Pass		
	2462	16.400	15.100	≥0.5	Pass		
	2412	17.461	15.121	≥0.5	Pass		
802.11n20	2437	17.585	16.240	≥0.5	Pass		
	2462	17.426	15.099	≥0.5	Pass		
	2422	35.711	30.083	≥0.5	Pass		
802.11n40	2437	36.187	35.353	≥0.5	Pass		
	2452	35.816	35.064	≥0.5	Pass		


Test Data of Occupied Bandwidth and DTS Bandwidth-ANT 2							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Pass or Fail		
	2412	13.035	8.090	≥0.5	Pass		
802.11b	2437	13.758	8.584	≥0.5	Pass		
	2462	12.919	8.077	≥0.5	Pass		
	2412	16.418	15.105	≥0.5	Pass		
802.11g	2437	16.603	15.139	≥0.5	Pass		
	2462	16.362	15.092	≥0.5	Pass		
	2412	17.482	15.087	≥0.5	Pass		
802.11n20	2437	17.629	15.438	≥0.5	Pass		
	2462	17.412	15.091	≥0.5	Pass		
	2422	35.714	31.302	≥0.5	Pass		
802.11n40	2437	36.314	35.444	≥0.5	Pass		
	2452	35.833	35.027	≥0.5	Pass		





Test Graphs of Occupied Bandwidth

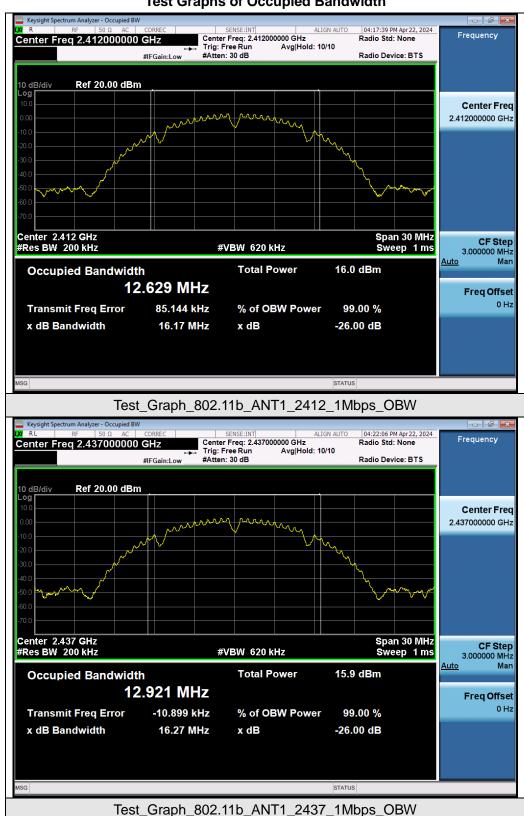








Test_Graph_802.11g_ANT1_2412_6Mbps_OBW









Test_Graph_802.11g_ANT1_2462_6Mbps_OBW


STATUS






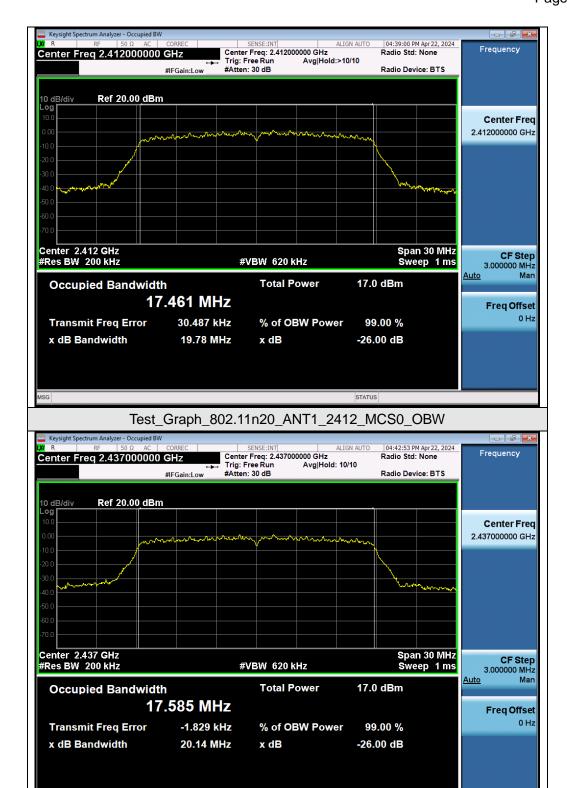


Test_Graph_802.11n20_ANT1_2437_MCS0_OBW






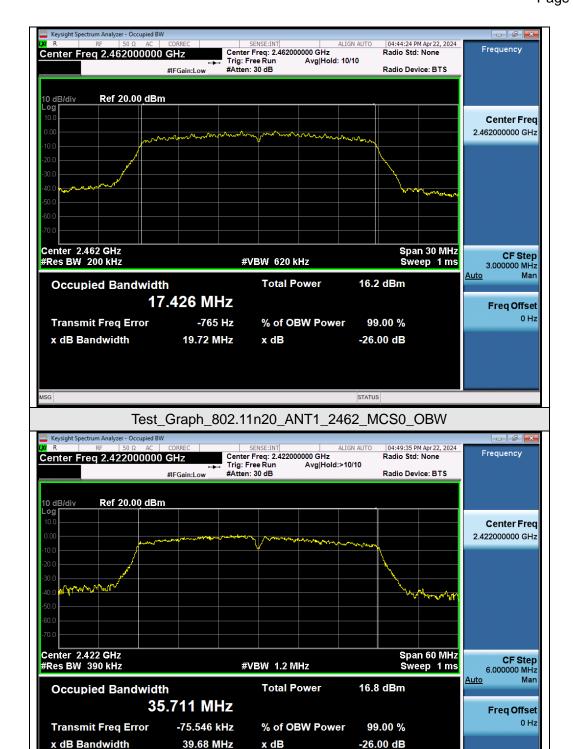

Test_Graph_802.11n40_ANT1_2422_MCS0_OBW






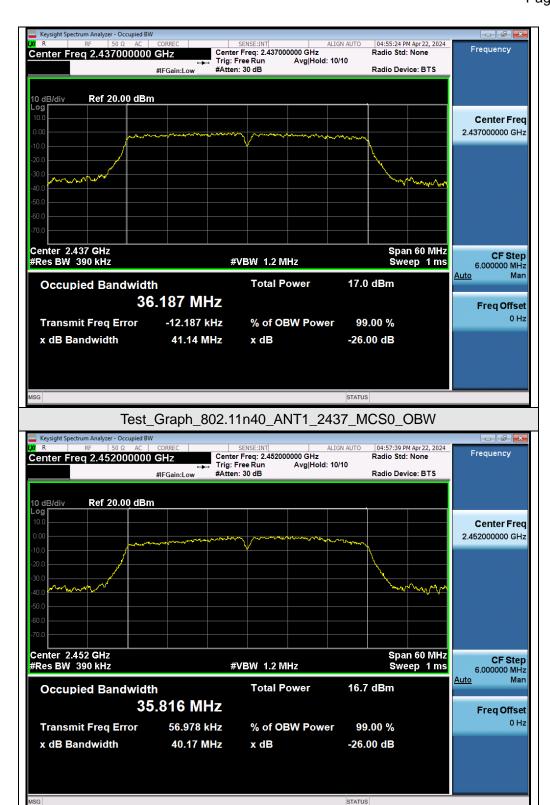

Test_Graph_802.11n40_ANT1_2452_MCS0_OBW


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/








Test_Graph_802.11b_ANT2_2437_1Mbps_OBW









Test_Graph_802.11g_ANT2_2412_6Mbps_OBW






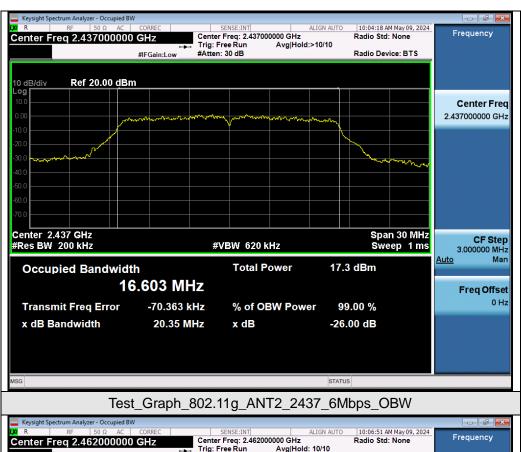









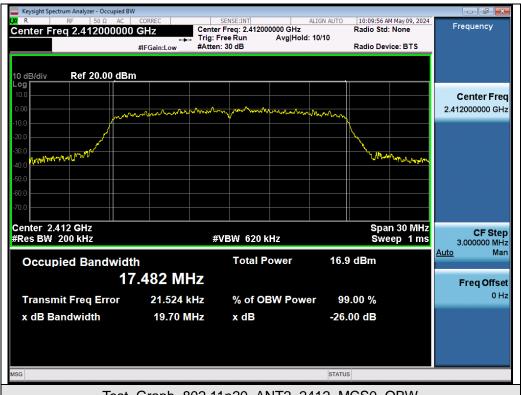

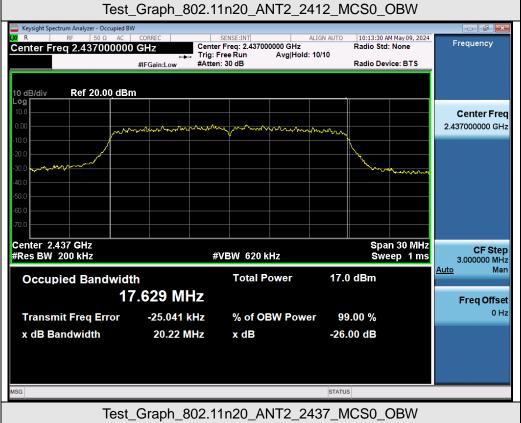



CF Step 6.000000 MHz

Freq Offset 0 Hz

Mar

<u>Auto</u>





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_2422_MCS0_OBW

#VBW 1.2 MHz

x dB

Total Power

% of OBW Power

16.2 dBm

99.00 %

-26.00 dB


Occupied Bandwidth

Transmit Freq Error x dB Bandwidth

35.714 MHz


-101.75 kHz


39.82 MHz







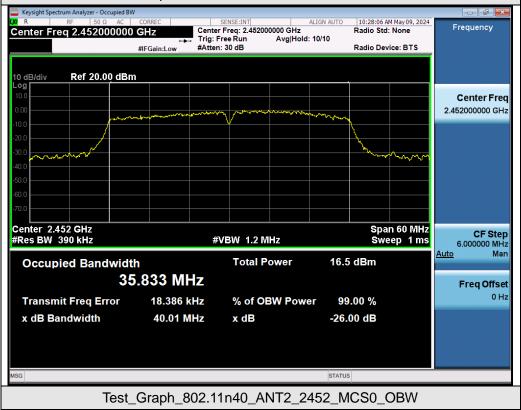






Test Graphs of DTS Bandwidth




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Web: http://www.agccert.com/





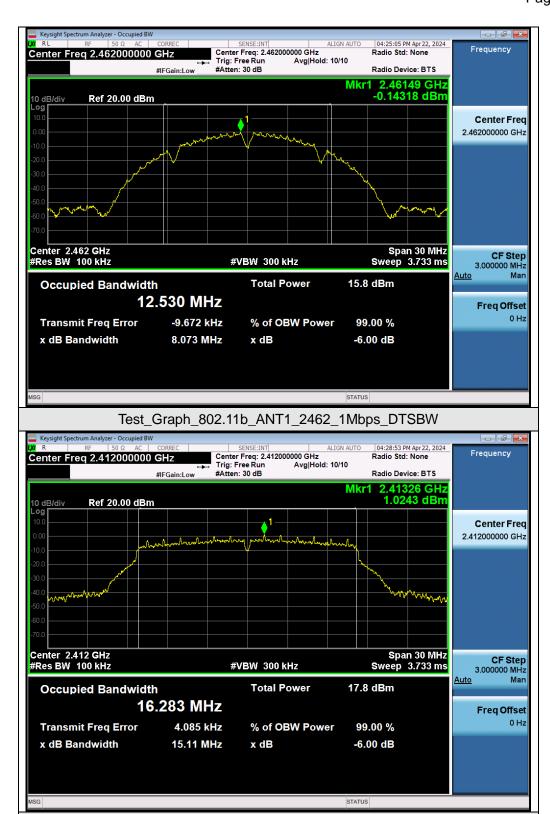


Test_Graph_802.11g_ANT1_2412_6Mbps_DTSBW














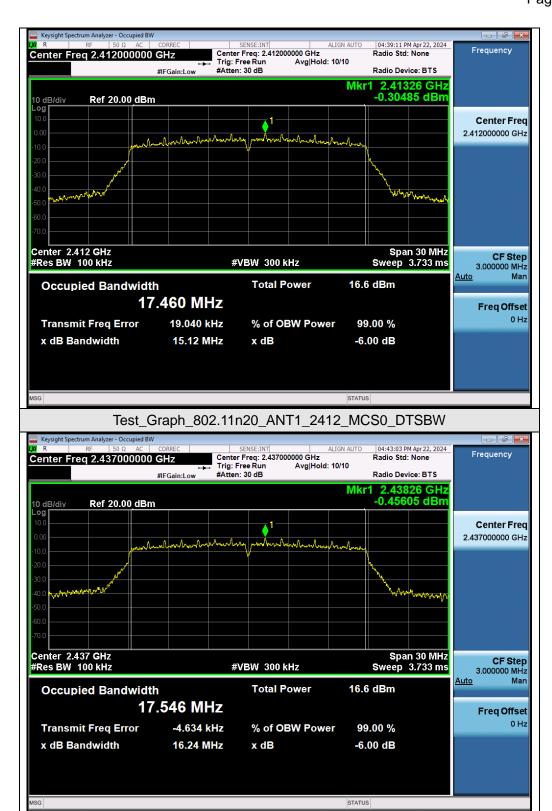


Test_Graph_802.11n20_ANT1_2437_MCS0_DTSBW






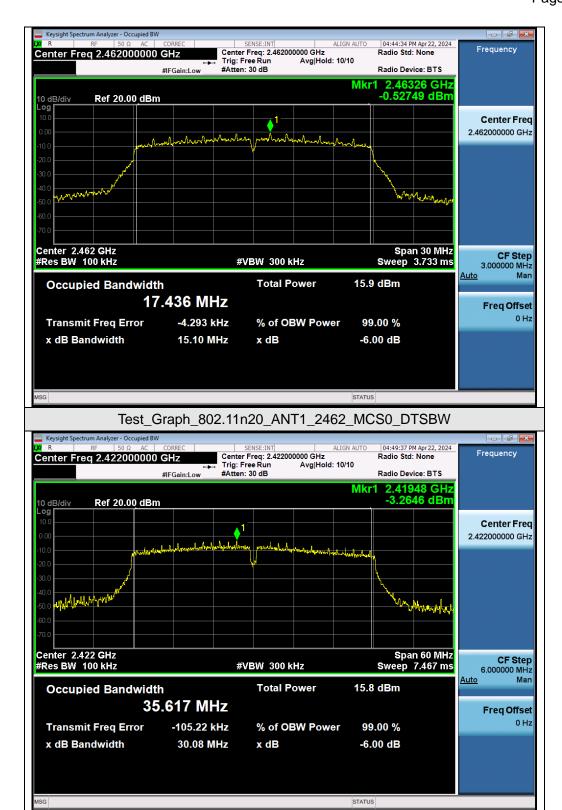


Test_Graph_802.11n40_ANT1_2422_MCS0_DTSBW





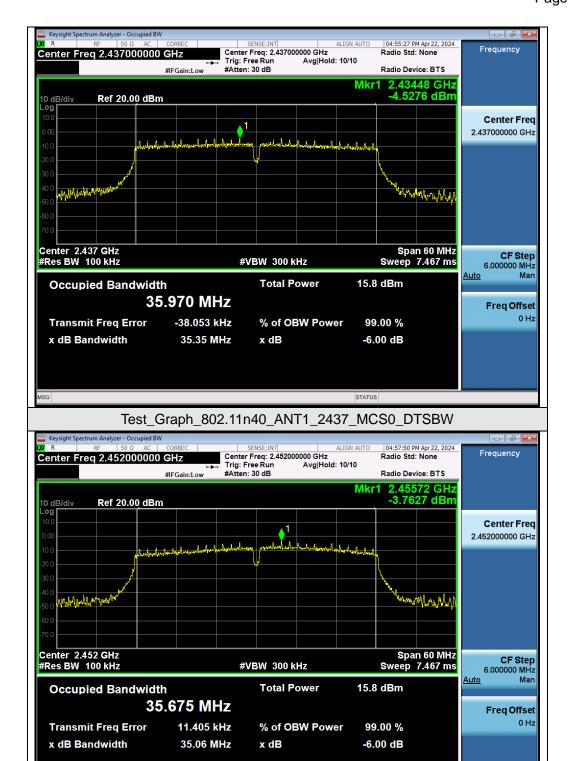


Test_Graph_802.11n40_ANT1_2452_MCS0_DTSBW

























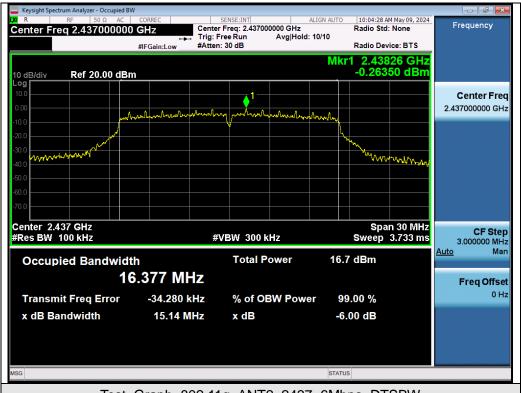









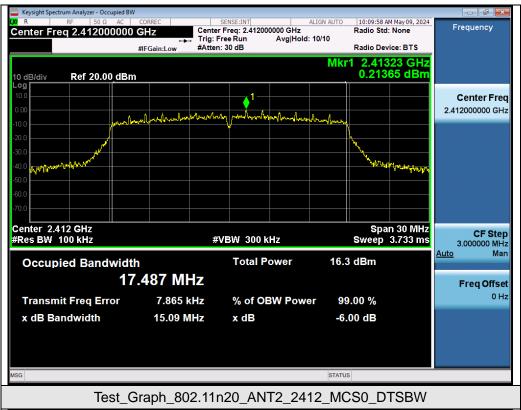

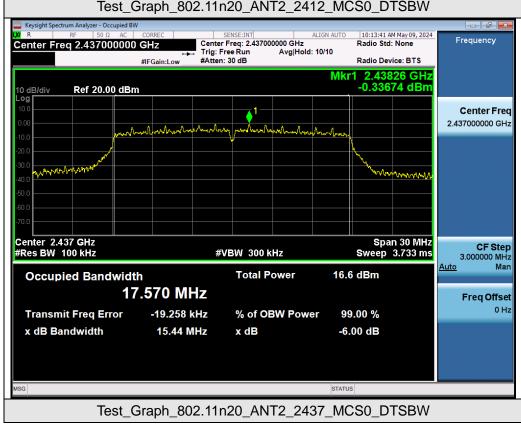




<u>Auto</u>

Mar

Freq Offset



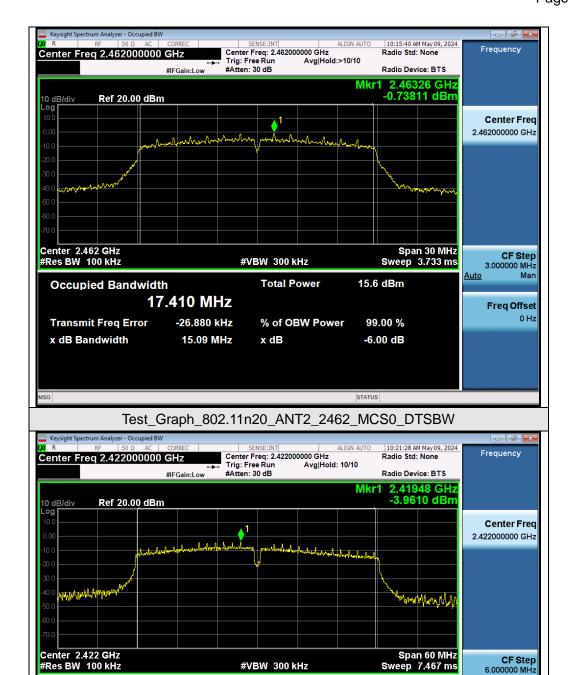

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_2422_MCS0_DTSBW

Total Power

x dB

% of OBW Power

15.2 dBm

99.00 %

-6.00 dB


Occupied Bandwidth

Transmit Freq Error x dB Bandwidth

35.575 MHz

-142.29 kHz

31.30 MHz











Report No.: AGC06662240307FR01

Page 53 of 137

9. Power Spectral Density Measurement

9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure


- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW \geq [3 × RBW].
- 5. Set the Span ≥ [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power spectral density test:
- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz ≤ RBW ≤ 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.



Report No.: AGC06662240307FR01

Page 54 of 137

9.3 Measurement Setup (Block Diagram of Configuration)

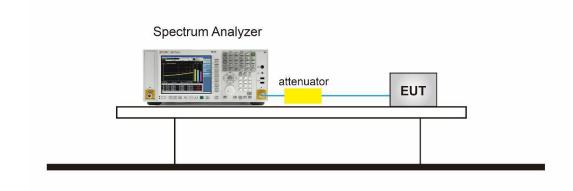

9.4 Measurement Result

Test Data of Conducted Output Power Spectral Density-ANT 1							
Test Mode	Test Frequency (MHz)	Power Spectral density (dBm/20kHz)	Power Spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
802.11b	2412	-4.037	-12.276	≤8	Pass		
	2437	-4.264	-12.503	≪8	Pass		
	2462	-5.149	-13.388	≪8	Pass		
802.11g	2412	-4.935	-13.174	≪8	Pass		
	2437	-5.887	-14.126	≪8	Pass		
	2462	-5.594	-13.833	≪8	Pass		
802.11n20	2412	-5.487	-13.726	≪8	Pass		
	2437	-5.572	-13.811	≪8	Pass		
	2462	-5.928	-14.167	≪8	Pass		
802.11n40	2422	-8.518	-16.757	≪8	Pass		
	2437	-9.239	-17.478	≪8	Pass		
	2452	-8.947	-17.186	≪8	Pass		




Test Data of Conducted Output Power Spectral Density-ANT 2						
Test Mode	Test Frequency (MHz)	Power Spectral density (dBm/20kHz)	Power Spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
802.11b	2412	-3.600	-11.839	≤8	Pass	
	2437	-3.257	-11.496	≪8	Pass	
	2462	-3.934	-12.173	≪8	Pass	
802.11g	2412	-5.412	-13.651	≪8	Pass	
	2437	-5.866	-14.105	≪8	Pass	
	2462	-5.489	-13.728	≪8	Pass	
802.11n20	2412	-5.018	-13.257	≪8	Pass	
	2437	-5.808	-14.047	≪8	Pass	
	2462	-6.253	-14.492	≪8	Pass	
802.11n40	2422	-9.713	-17.952	≪8	Pass	
	2437	-9.822	-18.061	≪8	Pass	
	2452	-8.903	-17.142	≪8	Pass	

Test Data of Conducted Output Power Spectral Density-MIMO							
Test Mode	Test Frequency (MHz)	Power Spectral density (dBm/20kHz)	Power Spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
802.11n20	2412	-2.236	-10.475	≤7.7	Pass		
	2437	-2.678	-10.917	≤7.7	Pass		
	2462	-3.077	-11.316	≤7.7	Pass		
802.11n40	2422	-6.064	-14.303	€7.7	Pass		
	2437	-6.510	-14.749	≤7.7	Pass		
	2452	-5.915	-14.154	≤7.7	Pass		


Note:


1. The Total Power Spectral Density (dBm) = $10*\log \{10^{(Ant1 PSD/10)} + 10^{(Ant2 PSD/10)}\}$.





Test Graphs of Conducted Output Power Spectral Density

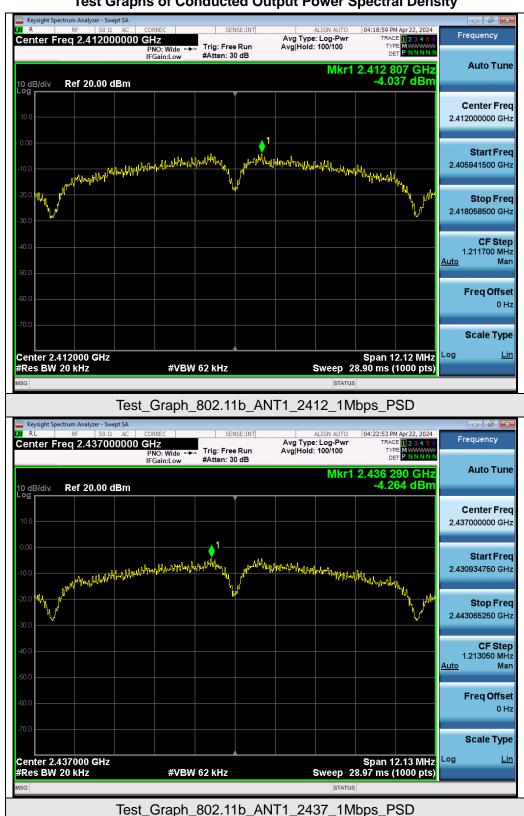










Test_Graph_802.11g_ANT1_2412_6Mbps_PSD






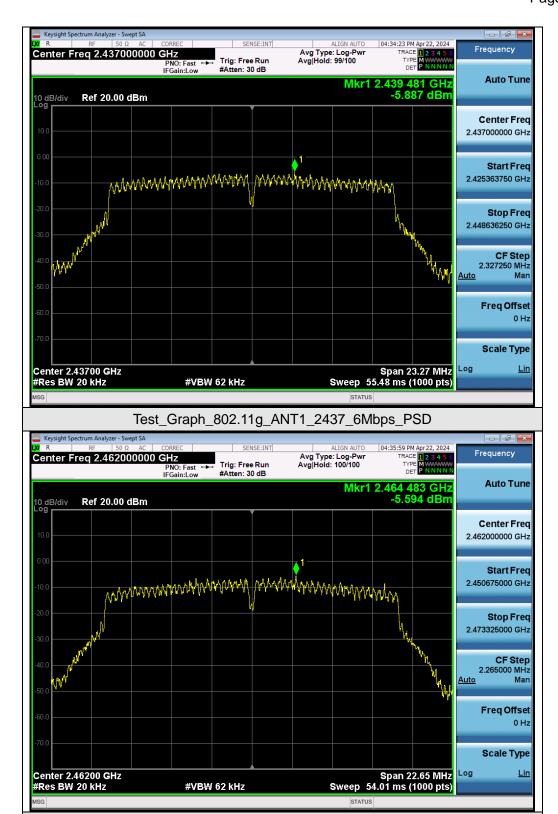


Test_Graph_802.11g_ANT1_2462_6Mbps_PSD






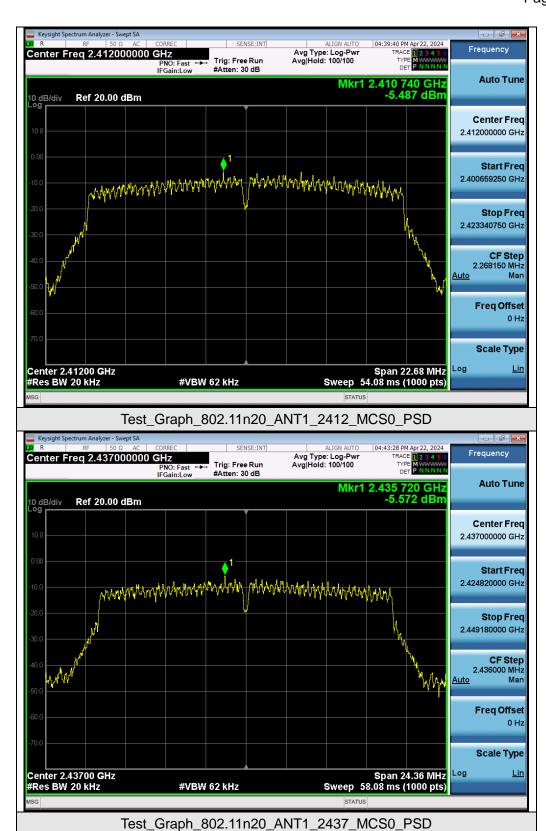





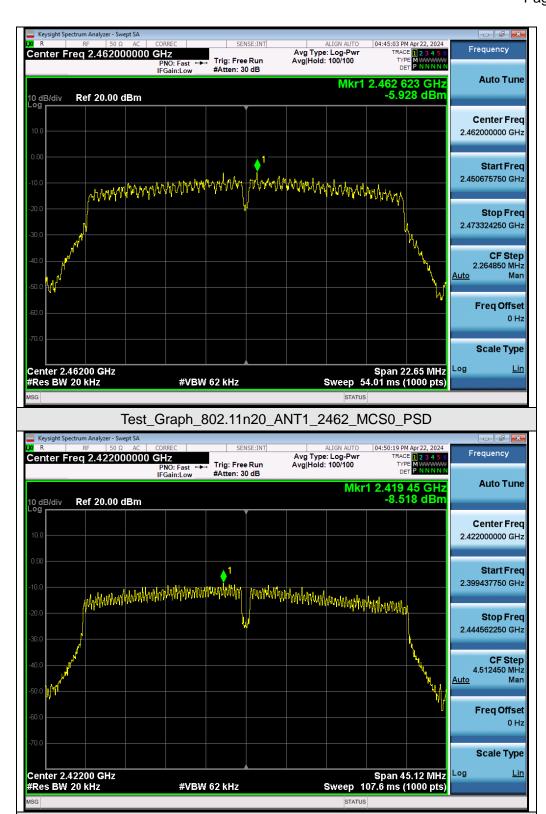

Test_Graph_802.11n40_ANT1_2422_MCS0_PSD

