



SAR TEST REPORT

Product Name: MR All in one

Model Name: AppleCore_16X, AppleCore_16XS

FCC ID: 2ANTO-AX162

Issued For : EmdoorVR Technology Co.,Ltd.

8F Chungu bld,Wonderful life wisdom Valley technology
Park, No.83 Dabao RD.,Xin an ST.,Baoan dist., Shenzhen,
China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsong Industrial Park,
No.177 Renmin West Road, Jinsha Community, Kengzi
Street, Pingshan New District, Shenzhen, China

Report Number: LGT23L051HA01

Sample Received Date: Dec.13, 2023

Date of Test: Dec.14, 2023 ~Jan. 30, 2024

Date of Issue: Jan. 30, 2024

Max. SAR (1g): Body: 1.138 W/kg

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	14
5.1 Validation System	14
5.2 Validation Result	14
6. SAR Evaluation Procedures	15
7. EUT Antenna Location Sketch	16
7.1 SAR test exclusion consider table	17
8. EUT Test Position	20
8.1 Body-worn Position Conditions	20
9. Uncertainty	21
9.1 Measurement Uncertainty	21
10. Conducted Power Measurement	22
10.1 Test Result	22
11. EUT and Test Setup Photo	24
11.1 EUT Photos	24
11.2 Setup Photos	27
12. SAR Result Summary	30
12.1 Body-worn SAR	30
13. Equipment List	33
Appendix A. System Validation Plots	34
Appendix B. SAR Test Plots	46
Appendix C. Probe Calibration and Dipole Calibration Report	70



Revision History

Rev.	Issue Date	Contents
00	Jan. 30, 2024	Initial Issue



TEST REPORT CERTIFICATION

Applicant EmdoorVR Technology Co.,Ltd.
Address 8F Chungu bld,Wonderful life wisdom Valley technology
Park, No.83 Dabao RD.,Xin an ST.,Baoan dist., Shenzhen,
China

Manufacture EmdoorVR Technology Co.,Ltd.
Address 8F Chungu bld,Wonderful life wisdom Valley technology
Park, No.83 Dabao RD.,Xin an ST.,Baoan dist., Shenzhen,
China

Product Name MR All in one

Trademark N/A

Model Name AppleCore_16X, AppleCore_16XS

Sample number LGT23L1206-1

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ANSI/IEEE Std. C95.1-1992 FCC 47 CFR Part 2 (2.1093) IEEE 1528: 2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Manager





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	MR All in one	
Trademark	N/A	
Model Name	AppleCore_16X	
Series Model	AppleCore_16XS	
Model Difference	X may be 0-9, S may be A-Z, AppleCore_16XS is based on AppleCore_16X, removed cameras, the other is the same	
Device Category	Portable	
Product stage	Production unit	
RF Exposure Environment	General Population / Uncontrolled	
Hardware Version	N/A	
Software Version	N/A	
Frequency Range	WLAN 802.11b/g/n20: 2412 MHz ~ 2462 MHz WLAN 802.11n40: 2422 MHz ~ 2452 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5150 ~ 5250 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5725 ~ 5850 MHz Bluetooth: 2402 ~ 2480 MHz	
Max. Reported SAR(1g): (Limit:1.6W/kg) Test distance:0mm	Mode	Body Worn (W/kg))
	Test Model: AppleCore_162	
	2.4G WLAN ANT A	0.455
	2.4G WLAN ANT B	0.591
	2.4G WLAN MIMO	1.138
	5.2G WLAN ANT A	0.512
	5.2G WLAN ANT B	0.420
	5.2G WLAN MIMO	0.942
	5.8G WLAN ANT A	0.096
	5.8G WLAN ANT B	0.148
	5.8G WLAN MIMO	0.518
	Test Model: AppleCore_162S	
	2.4G WLAN ANT A	0.368
	2.4G WLAN ANT B	0.372
	2.4G WLAN MIMO	0.607
	5.2G WLAN ANT A	0.194
	5.2G WLAN ANT B	0.219
	5.2G WLAN MIMO	0.519
	5.8G WLAN ANT A	0.162
	5.8G WLAN ANT B	0.185
	5.8G WLAN MIMO	0.499
Battery	Nominal voltage: 3.8V Rated capacity: 3000mAh Rated energy: 11.4Wh	



Operating Mode:	2.4G WLAN: 802.11b(DSSS): CCK, DQPSK, DBPSK 802.11g(OFDM): BPSK, QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK, QPSK,16-QAM,64-QAM 5G WLAN: 802.11a(OFDM): BPSK, QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK, QPSK,16-QAM,64-QAM 802.11ac (OFDM): BPSK, QPSK,16-QAM,64-QAM,256-QAM Bluetooth: GFSK + $\pi/4$ DQPSK+8DPSK BLE: GFSK
Antenna Specification	Bluetooth: PIFA Antenna WLAN: PIFA Antenna
Operating Mode	Maximum continuous output
DTM Mode	Not Support



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	FCC Registration No.: 746540
	A2LA Certificate No.: 6727.01
	IC Registration No.: CN0136



2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.4 8.0 20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.08 1.6 4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg



3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue;

ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

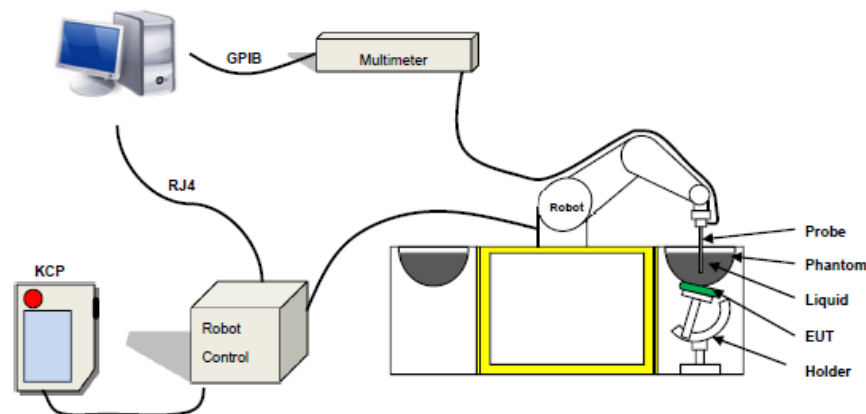

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 1g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 04/22 EPGO364 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 600 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Probe



3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.




Figure-SN 06/22 SAM 148



Figure-SN 06/22 ELLI 51

3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max _ 5 %) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability For 1 g averaging, the maximum weighting coefficient for SAR is 0,5.

IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	ϵ_r	σ 10g S/m
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 to 2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27



LIQUID MEASUREMENT RESULTS


Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2023-12-14	23.8	51	2450	23.5	Permittivity	39.20	39.81	1.56	±5
					Conductivity	1.80	1.82	1.11	±5
2023-12-16	21.7	56	5200	21.4	Permittivity	36.00	36.23	0.64	±5
					Conductivity	4.66	4.64	-0.43	±5
2023-12-15	23.6	57	5800	23.3	Permittivity	35.30	36.55	3.54	±5
					Conductivity	5.27	5.18	-1.71	±5
2024-01-26	20.4	48	2450	20.1	Permittivity	39.20	38.45	-1.91	±5
					Conductivity	1.80	1.85	2.78	±5
2024-01-27	21.5	51	5200	21.2	Permittivity	36.00	36.45	1.25	±5
					Conductivity	4.66	4.69	0.64	±5
2024-01-27	21.5	51	5800	21.2	Permittivity	35.30	36.72	4.02	±5
					Conductivity	5.27	5.06	-3.98	±5

5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

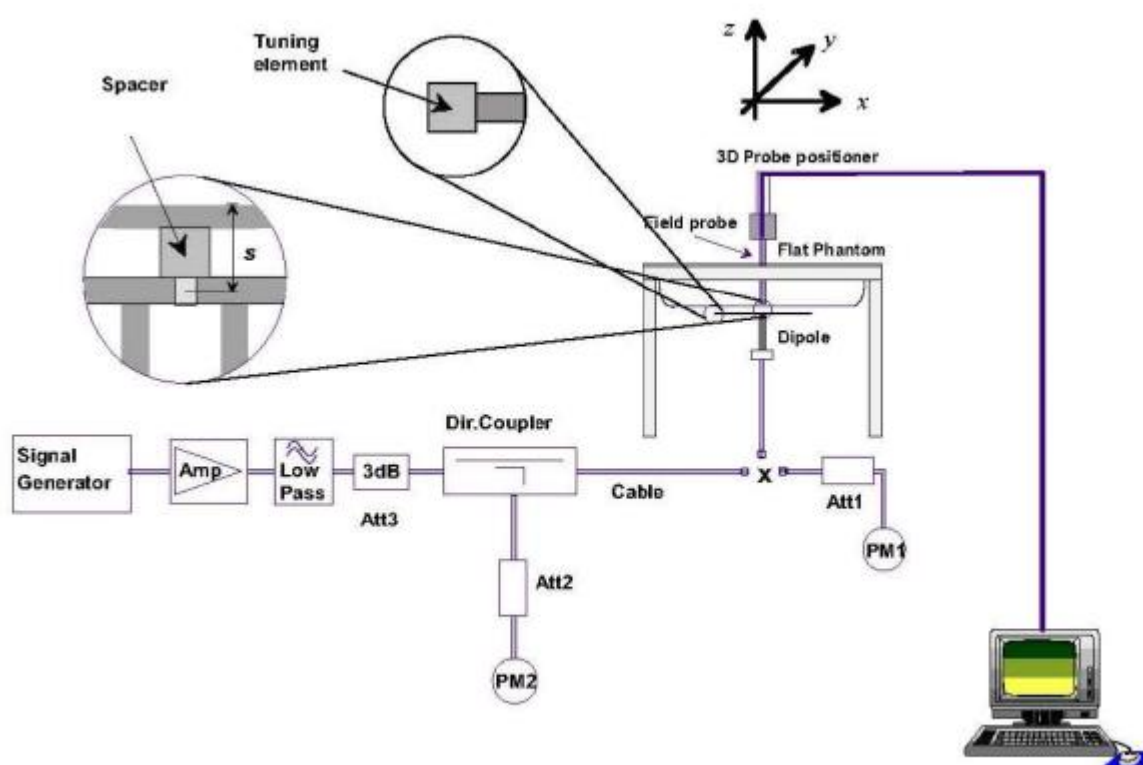

5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of $\pm 10\%$.

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2023-12-14	2450	100	5.384	53.84	54.28	-0.81	10
2023-12-16	5200	100	7.812	78.12	77.64	0.62	10
2023-12-15	5800	100	7.458	74.58	74.92	-0.45	10
2024-01-26	2450	100	5.538	55.38	54.28	2.03	10
2024-01-27	5200	100	7.905	79.05	77.64	1.82	10
2024-01-27	5800	100	7.683	76.83	74.92	2.55	10

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface

- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.

- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.

- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.


Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a MR All in one, support WLAN/BT mode.

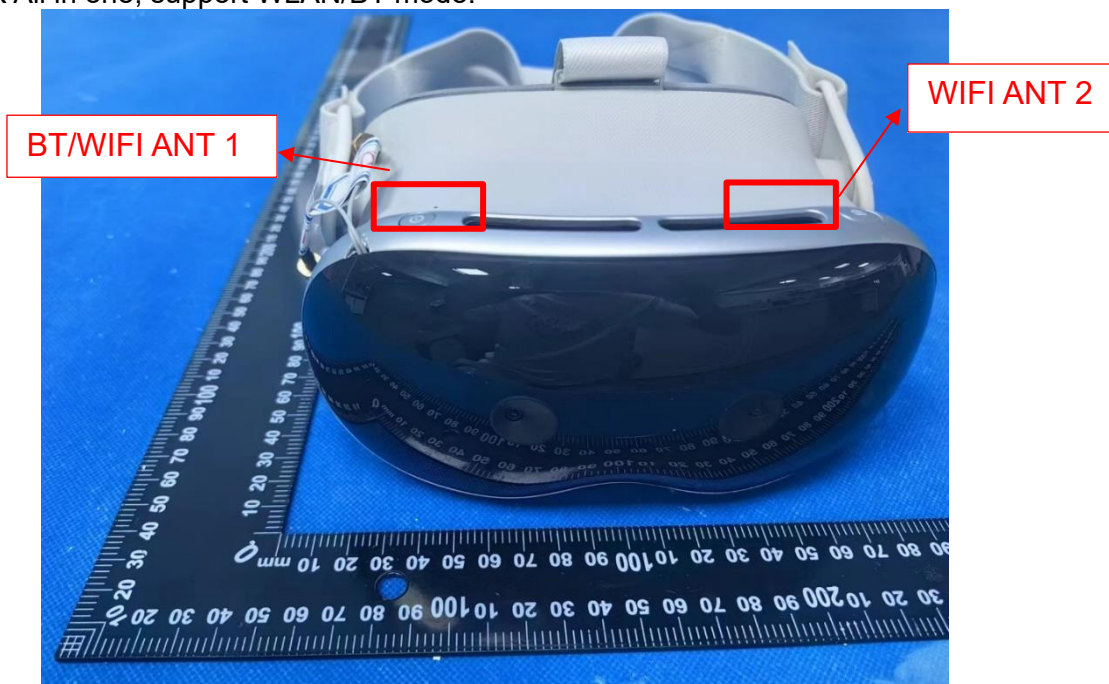

(Front view)

Antenna Separation Distance(mm)						
ANT	Front Side	Back Side	Right Side	Left Side	Top Side	Bottom Side
WLAN/BT ANT A	≤5	45	130	≤5	≤5	85
WLAN ANT B	≤5	45	≤5	123	≤5	85

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

	Wireless Interface	BT	2.4G WLAN ANT A	2.4G WLAN ANT B	5.2G WLAN ANT A
Exposure Position	Calculated Frequency(MHz)	2441	2412	2462	5200
	Maximum Turn-up power (dBm)	7	13	13	12.5
	Maximum rated power(mW)	5.01	19.95	19.95	17.78
Front Side	Separation distance (mm)	5	5	5	5
	exclusion threshold(mW)	9.60	9.66	9.56	6.58
	Testing required?	NO	YES	YES	YES
Back Side	Separation distance (mm)	45	45	45	45
	exclusion threshold(mW)	86.41	86.93	86.04	59.20
	Testing required?	NO	NO	NO	NO
Right Side	Separation distance (mm)	130	130	5	130
	exclusion threshold(mW)	896.01	896.58	9.56	865.78
	Testing required?	NO	NO	YES	NO
Left Side	Separation distance (mm)	5	5	123	5
	exclusion threshold(mW)	9.60	9.66	825.60	6.58
	Testing required?	NO	YES	NO	YES
Top Side	Separation distance (mm)	5	5	5	5
	exclusion threshold(mW)	9.60	9.66	9.56	6.58
	Testing required?	NO	YES	YES	YES
Bottom Side	Separation distance (mm)	85	85	85	85
	exclusion threshold(mW)	446.01	446.58	445.60	415.78
	Testing required?	NO	NO	NO	NO



Exposure Position	Wireless Interface	5.2G WLAN ANT B	5.8G WLAN ANT A	5.8G WLAN ANT B
	Calculated Frequency(MHz)	5180	5785	5745
	Maximum Turn-up power (dBm)	14	13.5	14.5
	Maximum rated power(mW)	25.12	22.39	28.18
Front Side	Separation distance (mm)	5	5	5
	exclusion threshold(mW)	6.59	6.24	6.26
	Testing required?	YES	YES	YES
Back Side	Separation distance (mm)	45	45	45
	exclusion threshold(mW)	59.32	56.13	56.32
	Testing required?	NO	NO	NO
Right Side	Separation distance (mm)	5	130	5
	exclusion threshold(mW)	6.59	862.36	6.26
	Testing required?	YES	NO	YES
Left Side	Separation distance (mm)	123	5	123
	exclusion threshold(mW)	795.91	6.24	792.58
	Testing required?	NO	YES	NO
Top Side	Separation distance (mm)	5	5	5
	exclusion threshold(mW)	6.59	6.24	6.26
	Testing required?	YES	YES	YES
Bottom Side	Separation distance (mm)	85	85	85
	exclusion threshold(mW)	415.91	412.36	412.58
	Testing required?	NO	NO	NO

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm, 25mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance,}$$



mm)]*[$\sqrt{f(\text{GHz})}$] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, $f(\text{GHz})$ is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation.

The result is rounded to one decimal place for comparison

For <50mm distance, we just calculate mW of the exclusion threshold value(3.0)to do compare

5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following

a)[threshold at 50mm in step 1]+(test separation distance -50mm)*($f(\text{MHz})/150$)]mW, at 100 MHz to 1500 MHz

b) [threshold at 50mm in step1]+(test separation distance -50mm) *10]mW at > 1500MHz and $\leq 6\text{GHz}$

6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8.for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.




8. EUT Test Position

This EUT was tested in Front Side, Left Side, Right Side and Top Side.

8.1 Body-worn Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

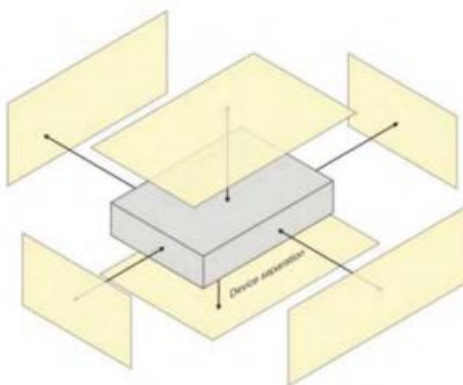



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Symbol	Uncertainty Component	Prob. Dist.	Unc. $a(x_i)$	Div. q_i	$u(x_i) = a(x_i)/q_i$	C_i	$u(y) = C_i * u(x_i)$	v_i
Measurement system errors								
CF	Probe calibration	N ($k = 2$)	5.8	2	2.90	1	2.90	∞
CF_{drift}	Probe calibration drift	R	0.12	$\sqrt{3}$	0.07	1	0.07	∞
LIN	Probe linearity and detection limit	R	1.91	$\sqrt{3}$	1.10	1	1.10	∞
BBS	Broadband signal	R	0.15	$\sqrt{3}$	0.09	1	0.09	∞
ISO	Probe isotropy	R	0.18	$\sqrt{3}$	0.10	1	0.10	∞
DAE	Other probe and data acquisition errors	N	2.7	1	2.70	1	2.70	∞
AMB	RF ambient and noise	N	1.73	1	1.73	1	1.73	∞
Δ_{xyz}	Probe positioning errors	N	0.81	1	0.81	$2/\delta$	0.81	
DAT	Data processing errors	N	2.5	1	2.50	1	2.50	∞
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Measurement of phantom conductivity(σ)	N	4.4	1	4.4	$c\epsilon, c\sigma$	4.40	∞
LIQ(T_c)	Temperature effects (medium)	R	2.9	$\sqrt{3}$	1.67	$c\epsilon, c\sigma$	1.67	∞
EPS	Shell permittivity	R	3.4	$\sqrt{3}$	1.96	See 8.4.2.3	0.49	∞
DIS	Distance between the radiating element of the DUT and the phantom medium	N	0.8	1	0.8	2	1.60	∞
D_{xyz}	Repeatability of positioning the DUT or source against the phantom	N	1.5	1	1.5	1	1.50	5
H	Device holder effects	N	3	1	3	1	3.00	
MOD	Effect of operating mode on probe sensitivity	R	3.59	$\sqrt{3}$	2.07	1	2.07	∞
TAS	Time-average SAR	R	1.73	$\sqrt{3}$	1.00	1	1.00	∞
RF_{drift}	Variation in SAR due to drift in output of DUT	N	2.89	1	2.89	1	2.89	
VAL	Validation antenna uncertainty (validation measurement only)	N	1.45	1	1.45	1	1.45	
P_{in}	Uncertainty in accepted power (validation measurement only)	N	2.5	1	2.5	1	2.50	
Corrections to the SAR result (if applied)								
$C(\epsilon', \sigma)$	Phantom deviation from target (ϵ', σ)	N	2.31	1	2.31	1	2.31	
$C(R)$	SAR scaling	R	1.15	$\sqrt{3}$	0.66	1	0.66	
$u(\Delta\text{SAR})$	Combined uncertainty						9.53	
U	Expanded uncertainty and effective degrees of freedom					U =	19.06	



10. Conducted Power Measurement

10.1 Test Result

2.4G WLAN

2.4GWIFI					
Mode	Channel Number	Frequency (MHz)	ANT A Power (dBm)	ANT B Power (dBm)	MIMO Power (dBm)
802.11b	1	2412	12.87	12.33	15.62
	7	2437	12.69	12.12	15.42
	11	2462	12.41	12.54	15.49
802.11g	1	2412	12.26	12.09	15.19
	7	2437	12.12	12.14	15.14
	11	2462	12.01	12.33	15.18
802.11n-HT20	1	2412	12.17	11.81	15.00
	7	2437	11.80	12.20	15.01
	11	2462	12.21	12.01	15.12
802.11n-HT40	3	2422	11.89	11.61	14.76
	6	2437	12.34	12.02	15.19
	9	2452	11.99	12.19	15.10

Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	6.74	4.72
	39	2441	6.34	4.31
	78	2480	6.18	4.15
$\pi/4$ -QPSK(2Mbps)	0	2402	5.88	3.87
	39	2441	5.30	3.39
	78	2480	5.31	3.40
8DPSK(3Mbps)	0	2402	6.36	4.33
	39	2441	5.78	3.78
	78	2480	5.64	3.66

BLE

BLE				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	6.67	4.65
	19	2440	6.24	4.21
	39	2480	6.05	4.03
GFSK(2Mbps)	0	2402	6.65	4.62
	19	2440	6.20	4.17
	39	2480	6.17	4.14



WLAN (5.2Gband)

5.2G WLAN					
Mode	Channel Number	Frequency (MHz)	ANT A Power (dBm)	ANT B Power (dBm)	MIMO Power (dBm)
802.11a	36	5180	11.89	13.44	15.74
	40	5200	12.12	13.20	15.70
	48	5240	11.61	12.41	15.04
802.11n-HT20	36	5180	11.82	13.41	15.70
	40	5200	11.94	13.20	15.63
	48	5240	11.52	12.43	15.01
802.11n-HT40	38	5190	11.22	12.91	15.16
	46	5230	11.10	12.74	15.01
802.11ac-VHT20	36	5180	12.02	13.48	15.82
	40	5200	12.22	13.37	15.84
	48	5240	11.84	12.51	15.20
802.11ac-VHT40	38	5190	11.46	12.96	15.28
	46	5230	11.45	12.81	15.19
802.11ac-VHT80	42	5210	11.73	12.87	15.35


WLAN (5.8G band)

5.8G WLAN					
Mode	Channel Number	Frequency (MHz)	ANT A Power (dBm)	ANT B Power (dBm)	MIMO Power (dBm)
802.11a	149	5745	12.94	14.12	16.58
	157	5785	12.98	13.98	16.52
	165	5825	12.73	14.32	16.61
802.11n-HT20	149	5745	12.91	14.10	16.56
	157	5785	12.97	14.01	16.53
	165	5825	12.88	14.27	16.64
802.11n-HT40	151	5755	12.13	13.64	15.96
	159	5795	12.32	13.70	16.07
802.11ac-VHT20	149	5745	12.87	14.39	16.71
	157	5785	13.29	14.16	16.76
	165	5825	12.98	14.33	16.72
802.11ac-VHT40	151	5755	12.23	13.67	16.02
	159	5795	12.10	13.82	16.08
802.11ac-VHT80	155	5775	12.70	13.76	16.27

11. EUT and Test Setup Photo

11.1 EUT Photos

Front side

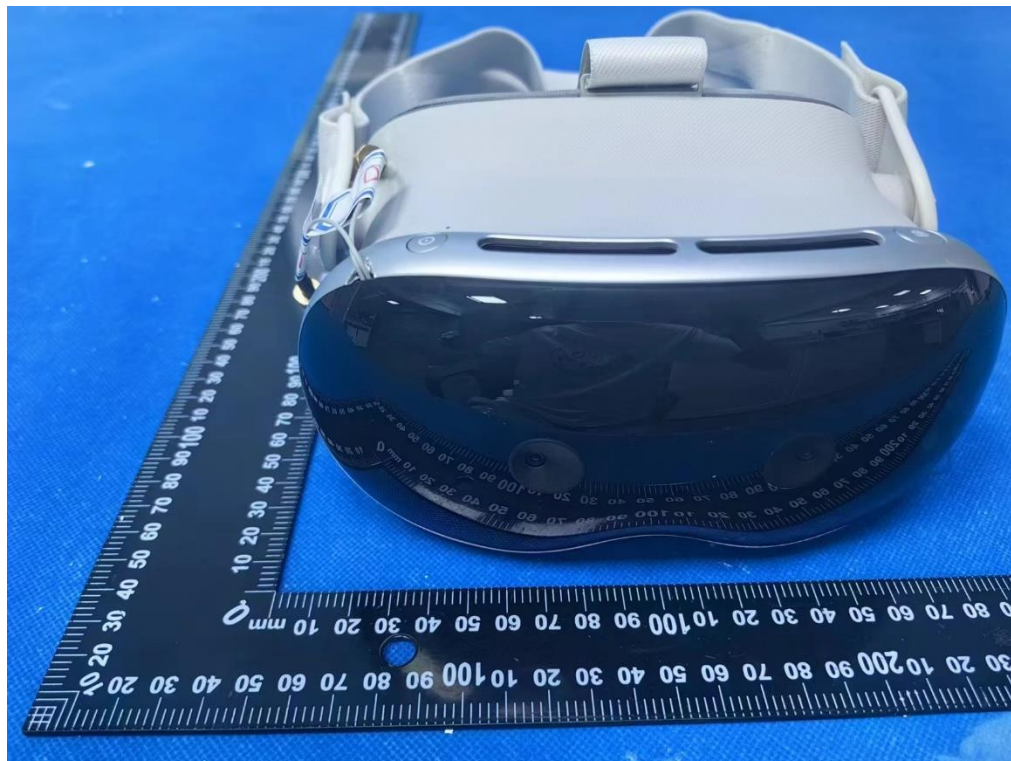

Back Side



Left Edge



Right Edge



Top Edge



Bottom Edge




11.2 Setup Photos

Body Front Side (separation distance 0mm)



Body Right side (separation distance is 0mm)

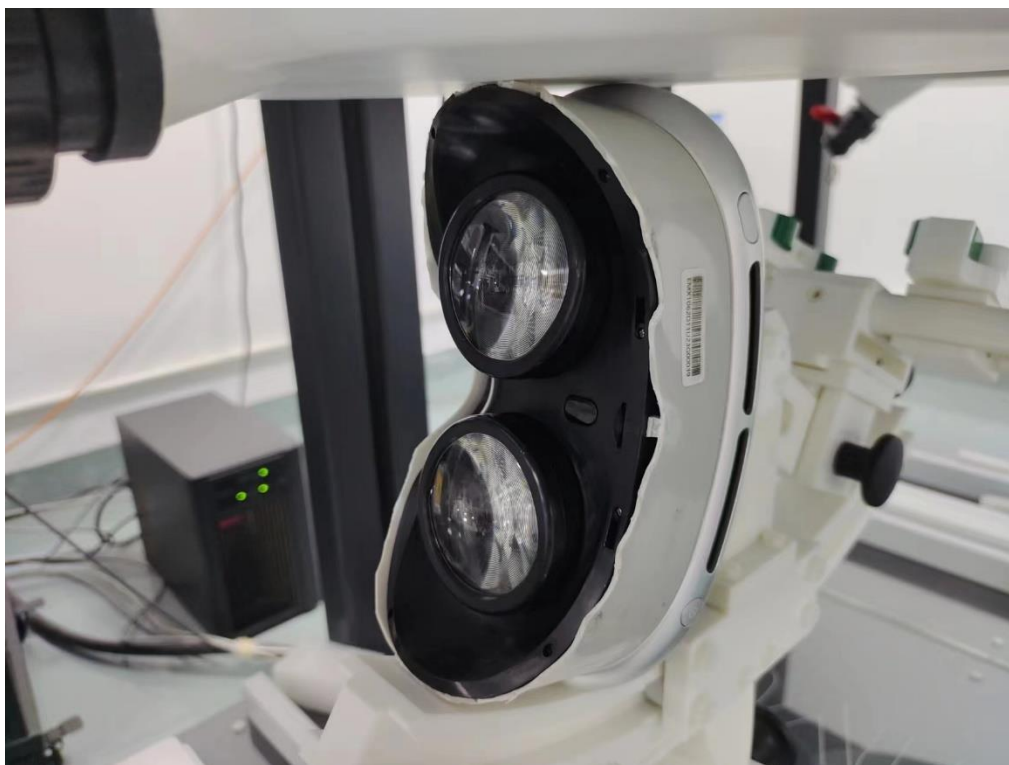

Body Left side (separation distance is 0mm)




Body Top side (separation distance is 0mm)





Liquid depth (15 cm)

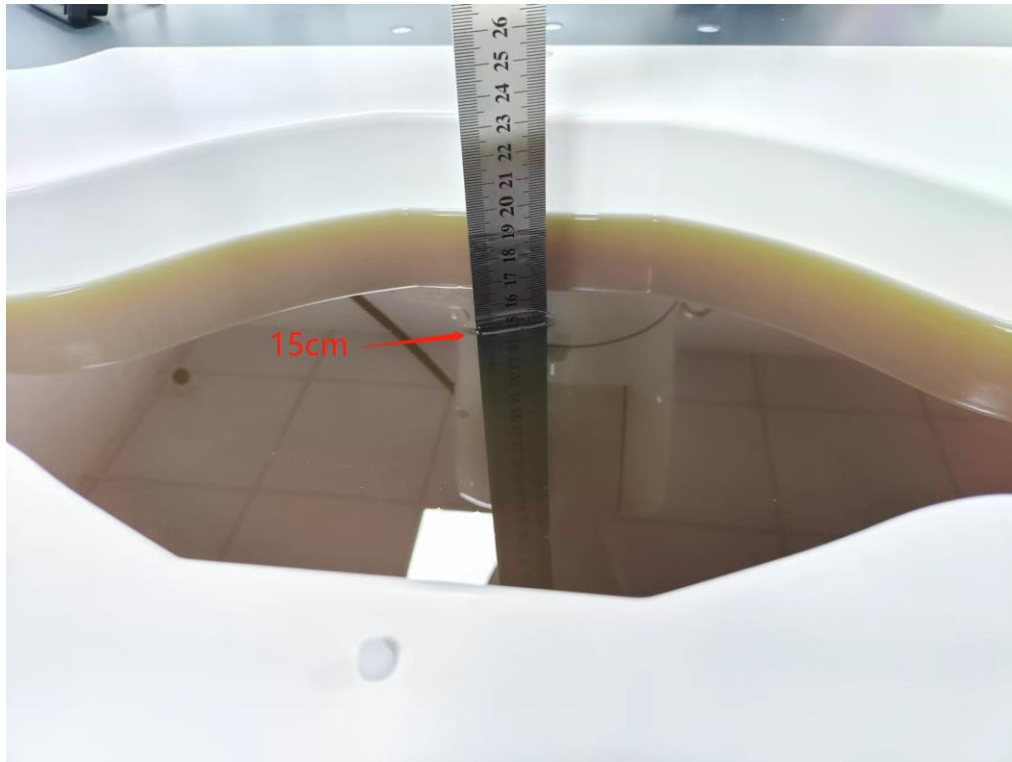



12. SAR Result Summary

12.1 Body-worn SAR

Test Model: AppleCore_162

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
2.4GHz WLAN ANT A	802.11b	Front Side	2412	0.073	0.11	13.00	12.87	0.075	/
		Right Side	2412	0.193	3.94	13.00	12.87	0.199	/
		Left Side	2412	0.105	-0.51	13.00	12.87	0.108	/
		Top Side	2412	0.442	3.15	13.00	12.87	0.455	1
2.4GHz WLAN ANT B	802.11b	Front Side	2462	0.053	2.79	13.00	12.54	0.059	/
		Right Side	2462	0.064	1.67	13.00	12.54	0.071	/
		Left Side	2462	0.045	1.32	13.00	12.54	0.050	/
		Top Side	2462	0.532	0.89	13.00	12.54	0.591	2
2.4GHz WLAN CDD A	802.11b	Front Side	2412	0.091	-2.18	16.00	15.62	0.099	/
		Right Side	2412	0.156	0.24	16.00	15.62	0.170	/
		Left Side	2412	0.202	-0.08	16.00	15.62	0.220	/
		Top Side	2412	0.500	2.36	16.00	15.62	0.546	3
2.4GHz WLAN CDD B	802.11b	Front Side	2412	0.114	-1.73	16.00	15.62	0.124	/
		Right Side	2412	0.217	2.29	16.00	15.62	0.237	/
		Left Side	2412	0.117	-1.12	16.00	15.62	0.128	/
		Top Side	2412	0.542	3.86	16.00	15.62	0.592	4
		Top Side	2437	0.433	-1.25	16.00	15.42	0.495	/
		Top Side	2462	0.487	2.90	16.00	15.49	0.548	/
5.2GHz WLAN ANT A	802.11ac-VHT20	Front Side	5200	0.122	3.12	12.50	12.22	0.130	/
		Right Side	5200	0.122	-2.87	12.50	12.22	0.130	/
		Left Side	5200	0.079	3.51	12.50	12.22	0.084	/
		Top Side	5200	0.480	-3.67	12.50	12.22	0.512	5
5.2GHz WLAN ANT B	802.11ac-VHT20	Front Side	5180	0.072	0.30	14.00	13.48	0.081	/
		Right Side	5180	0.139	-2.00	14.00	13.48	0.157	/
		Left Side	5180	0.092	3.22	14.00	13.48	0.104	/
		Top Side	5180	0.373	1.91	14.00	13.48	0.420	6
5.2GHz WLAN MIMO A	802.11ac-VHT20	Front Side	5200	0.099	-2.12	16.00	15.84	0.103	/
		Right Side	5200	0.144	-0.25	16.00	15.84	0.149	/
		Left Side	5200	0.19	1.35	16.00	15.84	0.197	/
		Top Side	5200	0.462	3.21	16.00	15.84	0.479	7
5.2GHz WLAN MIMO B	802.11ac-VHT20	Front Side	5200	0.084	-3.68	16.00	15.84	0.087	/
		Right Side	5200	0.169	2.83	16.00	15.84	0.175	/
		Left Side	5200	0.103	2.28	16.00	15.84	0.107	/
		Top Side	5200	0.446	2.11	16.00	15.84	0.463	8
5.8GHz WLAN ANT A	802.11ac-VHT20	Front Side	5785	0.033	0.41	13.50	13.29	0.035	/
		Right Side	5785	0.042	1.79	13.50	13.29	0.044	/
		Left Side	5785	0.049	-3.79	13.50	13.29	0.051	/
		Top Side	5785	0.091	-1.65	13.50	13.29	0.096	9



5.8GHz WLAN ANT B	802.11ac- VHT20	Front Side	5745	0.034	1.20	14.50	14.39	0.035	/
		Right Side	5745	0.064	1.20	14.50	14.39	0.066	/
		Left Side	5745	0.031	0.87	14.50	14.39	0.032	/
		Top Side	5745	0.144	-3.26	14.50	14.39	0.148	10
5.8GHz WLAN MIMO A	802.11ac- VHT20	Front Side	5785	0.037	2.38	17.00	16.76	0.039	/
		Right Side	5785	0.08	3.10	17.00	16.76	0.085	/
		Left Side	5785	0.089	-0.40	17.00	16.76	0.094	/
		Top Side	5785	0.203	-2.08	17.00	16.76	0.215	11
5.8GHz WLAN MIMO B	802.11ac- VHT20	Front Side	5785	0.058	-0.82	17.00	16.76	0.061	/
		Right Side	5785	0.114	2.87	17.00	16.76	0.120	/
		Left Side	5785	0.069	0.76	17.00	16.76	0.073	/
		Top Side	5785	0.287	3.93	17.00	16.76	0.303	12

Band	Mode	Max SAR	WIFI MIMO
		(W/Kg)	
2.4G WLAN	802.11b ANT A	0.546	1.138
	802.11b ANT B	0.592	
5.2G WLAN	802.11ac-VHT20 ANT A	0.479	0.942
	802.11ac-VHT20 ANT B	0.463	
5.8G WLAN	802.11ac-VHT20 ANT A	0.215	0.518
	802.11ac-VHT20 ANT B	0.303	



Test Model: AppleCore_162S

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas.No.
2.4GHz WLAN ANT A	802.11b	Top Side	2412	0.357	-2.96	13.00	12.87	0.368	13
2.4GHz WLAN ANT B	802.11b	Top Side	2462	0.335	1.19	13.00	12.54	0.372	14
2.4GHz WLAN MIMO A	802.11b	Top Side	2412	0.309	-1.14	16.00	15.62	0.337	15
2.4GHz WLAN MIMO B	802.11b	Top Side	2412	0.247	1.12	16.00	15.62	0.270	16
5.2GHz WLAN ANT A	802.11ac-VHT20	Top Side	5200	0.182	2.94	12.50	12.22	0.194	17
5.2GHz WLAN ANT B	802.11ac-VHT20	Top Side	5180	0.194	1.53	14.00	13.48	0.219	18
5.2GHz WLAN MIMO A	802.11ac-VHT20	Top Side	5200	0.294	-3.79	16.00	15.84	0.305	19
5.2GHz WLAN MIMO B	802.11ac-VHT20	Top Side	5200	0.206	3.50	16.00	15.84	0.214	20
5.8GHz WLAN ANT A	802.11ac-VHT20	Top Side	5785	0.154	0.36	13.50	13.29	0.162	21
5.8GHz WLAN ANT B	802.11ac-VHT20	Top Side	5745	0.180	0.65	14.50	14.39	0.185	22
5.8GHz WLAN MIMO A	802.11ac-VHT20	Top Side	5785	0.226	1.62	17.00	16.76	0.239	23
5.8GHz WLAN MIMO B	802.11ac-VHT20	Top Side	5785	0.246	0.07	17.00	16.76	0.260	24

Band	Mode	Max SAR	WIFI MIMO
		(W/Kg)	
2.4G WLAN	802.11b ANT A	0.337	0.607
	802.11b ANT B	0.270	
5.2G WLAN	802.11ac-VHT20 ANT A	0.305	0.519
	802.11ac-VHT20 ANT B	0.214	
5.8G WLAN	802.11ac-VHT20 ANT A	0.239	0.499
	802.11ac-VHT20 ANT B	0.260	

Note:

- The test separation of all above table is 0mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - Scaled SAR(W/kg) = Measured SAR(W/kg) *Tune-up Scaling Factor
- Bluetooth and WLAN can't simultaneous transmission at the same time.
- According to the model difference, there are different metals and circuits, so the worst side difference test is carried out on the series model



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
2450MHz Dipole	MVG	DIP2G450	SN 06/22 DIP2G450-645	2022.02.11	2025.02.10
5000MHz Dipole	MVG	DIP5G000	SN 06/22 DIP5G000-653	2022.02.11	2025.02.10
E-Field Probe	MVG	EPGO364	SN 04/22 EPGO364	2023.02.10	2024.02.09
Liquid Calibration Kit	MVG	OCPG 87	SN 06/22 OCPG87	2023.02.10	2024.02.09
Antenna	MVG	ANTA 73	SN 06/22 ANTA 73	N/A	N/A
Ellipsoid Phantom	MVG	ELLI 51	SN 06/22 ELLI 51	N/A	N/A
Phantom	MVG	SAM 148	SN 06/22 SAM148	N/A	N/A
Phone holder	MVG	MSH 117	SN 06/22 MSH 117	N/A	N/A
Laptop holder	MVG	LSH 36	SN 06/22 LSH 38	N/A	N/A
Directional coupler	SHW	SHWDGP	202303280013	N/A	N/A
Network Analyzer	Agilent	E5071C	MY46418070	2023.03.27	2024.03.26
Multi Meter	Keithley	DMM6500	DMM6500	2023.03.27	2024.03.26
Signal Generator	Keithley	N5182B	MY59100717	2023.04.07	2024.04.06
Wireless Communication Test Set	R&S	CMW500	137737	2023.04.14	2024.04.13
Power Sensor	R&S	Z11	116184	2023.04.13	2024.04.12
Temperature hygrometer	N/A	ST-W2318	N/A	2023.04.24	2024.04.23
Thermograph	N/A	TP101	N/A	2023.04.25	2024.04.24



Appendix A. System Validation Plots

System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-12-14

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	2450.000
Relative permittivity	39.81
Conductivity (S/m)	1.82
Probe	SN 04/22 EPGO364
ConvF	2.33
Crest factor:	1:1

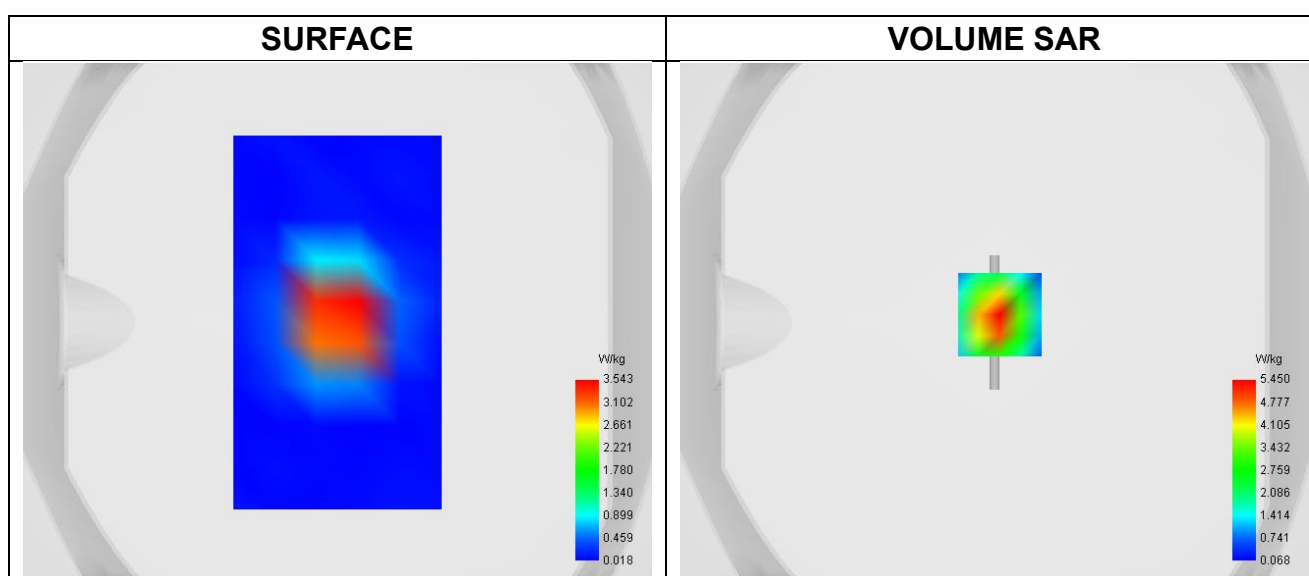


Maximum location: X=2.00, Y=3.00 ; SAR Peak: 9.51 W/kg

SAR 10g (W/Kg)	2.366
SAR 1g (W/Kg)	5.384



Z Axis Scan

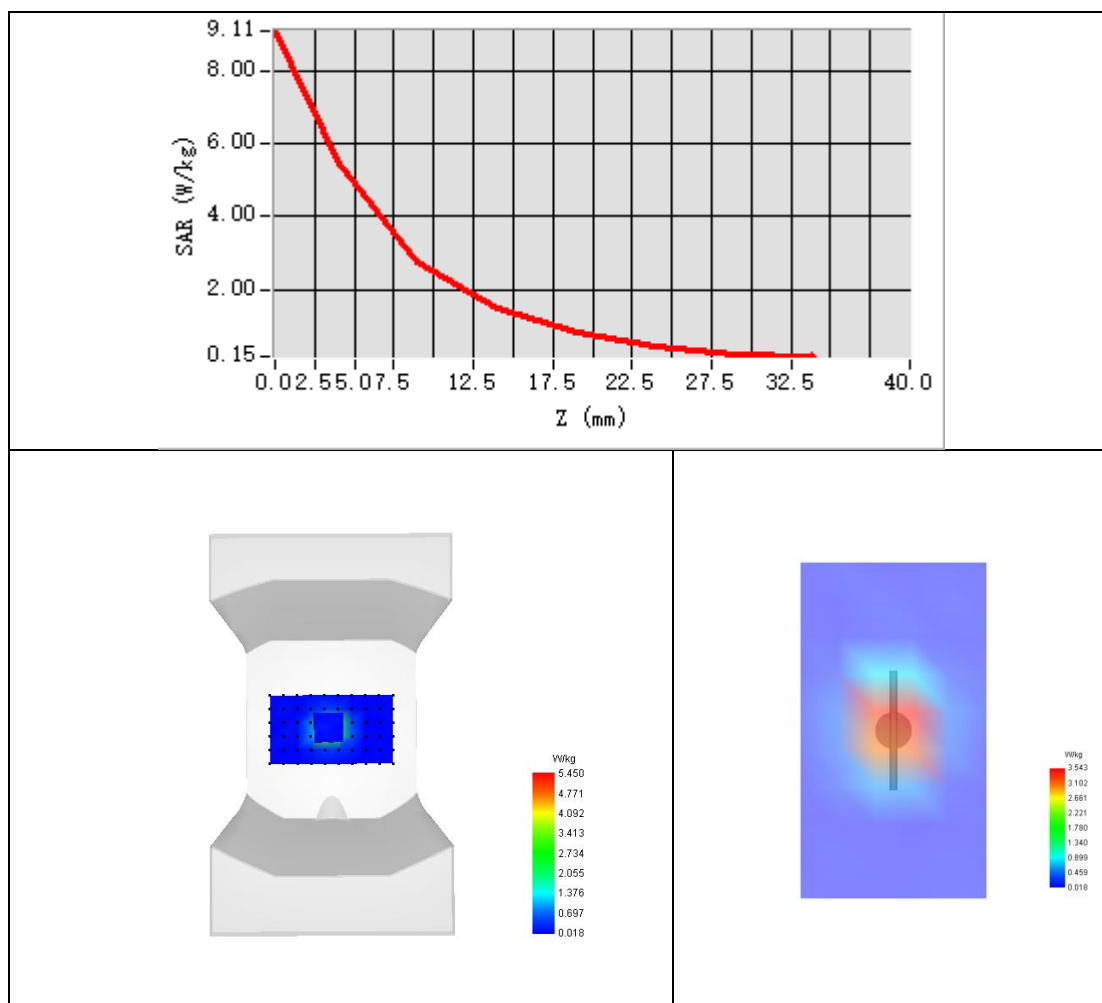



System Performance Check Data (5200MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-12-16

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW
Frequency (MHz)	5200.000
Relative permittivity	36.23
Conductivity (S/m)	4.64
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

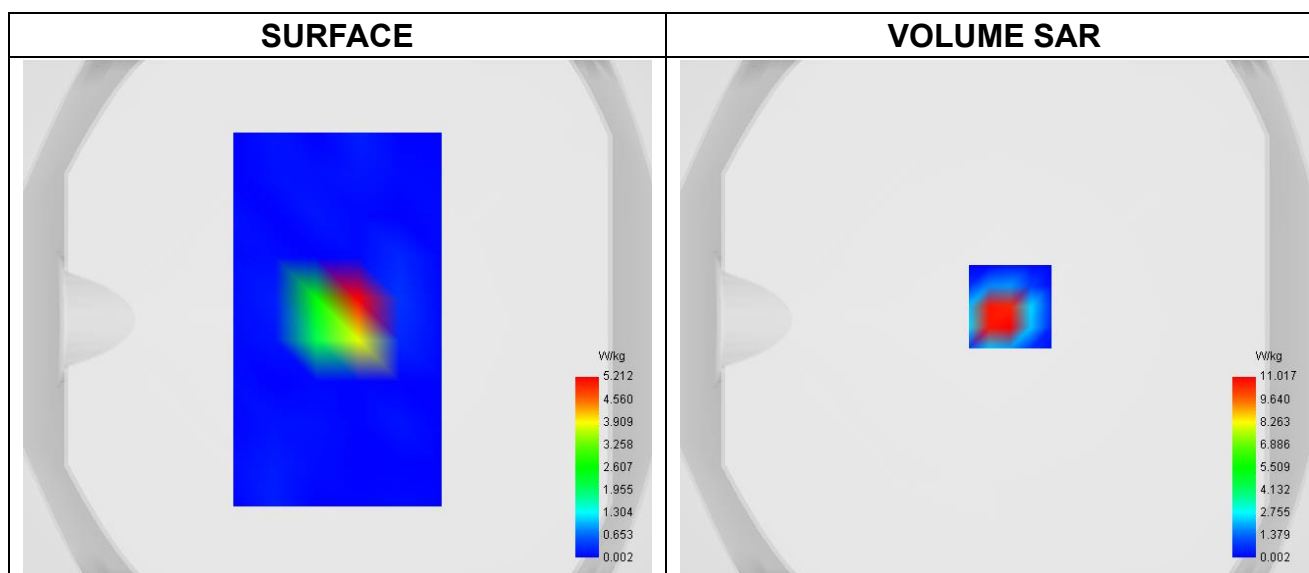


Maximum location: X=6.00, Y=5.00 ; SAR Peak: 24.33 W/kg

SAR 10g (W/Kg)	2.172
SAR 1g (W/Kg)	7.812



Z Axis Scan

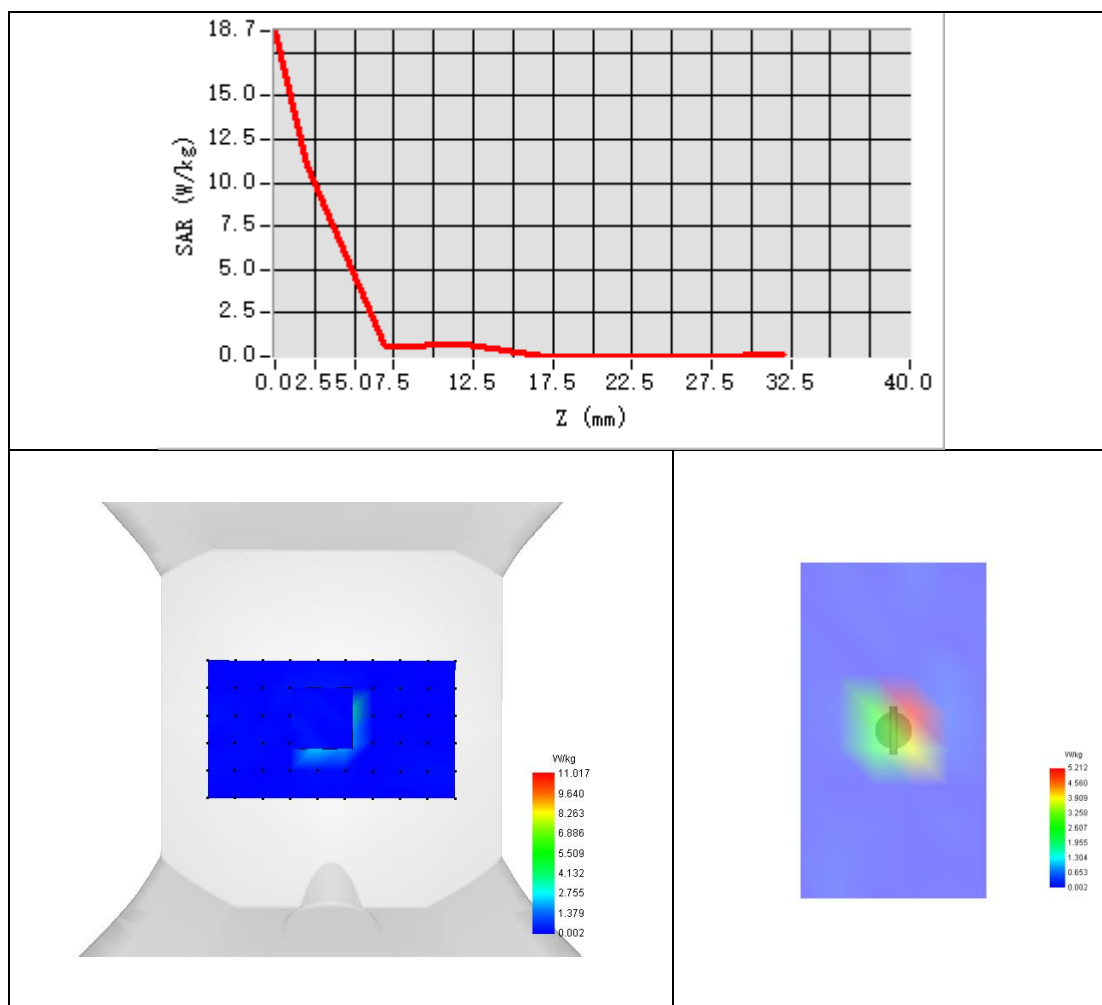



System Performance Check Data (5800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-12-15

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW
Frequency (MHz)	5800.000
Relative permittivity	36.55
Conductivity (S/m)	5.18
Probe	SN 04/22 EPG0364
ConvF	1.73
Crest factor:	1:1

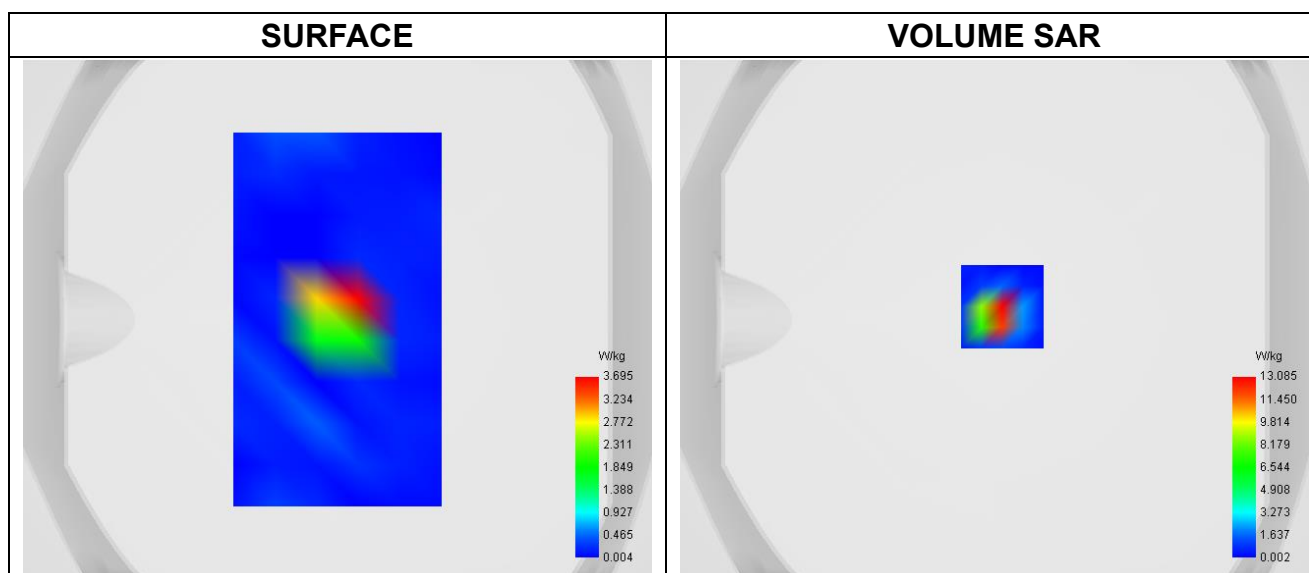


Maximum location: X=3.00, Y=5.00 ; SAR Peak: 25.73 W/kg

SAR 10g (W/Kg)	2.156
SAR 1g (W/Kg)	7.458



Z Axis Scan

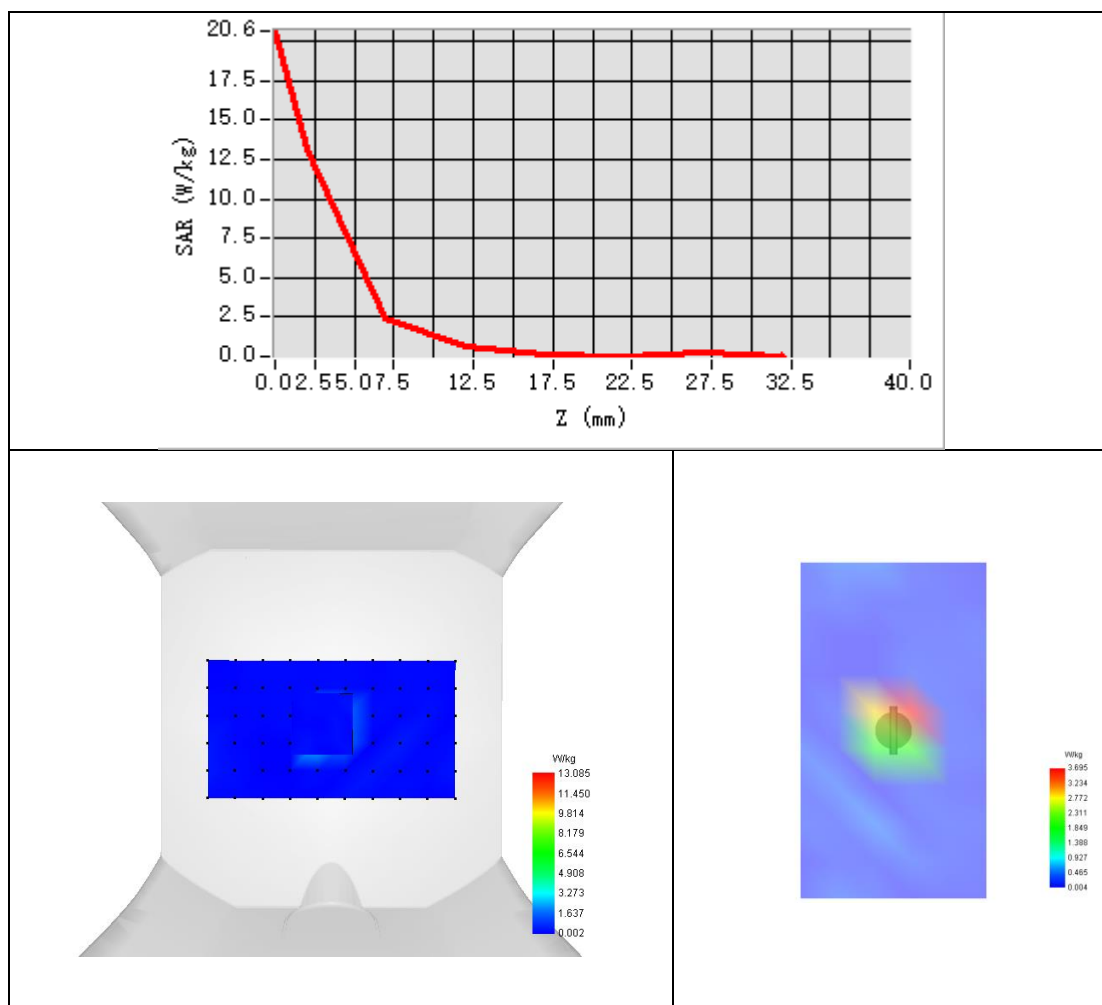



System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-01-26

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	2450.000
Relative permittivity	38.45
Conductivity (S/m)	1.85
Probe	SN 04/22 EPGO364
ConvF	2.33
Crest factor:	1:1

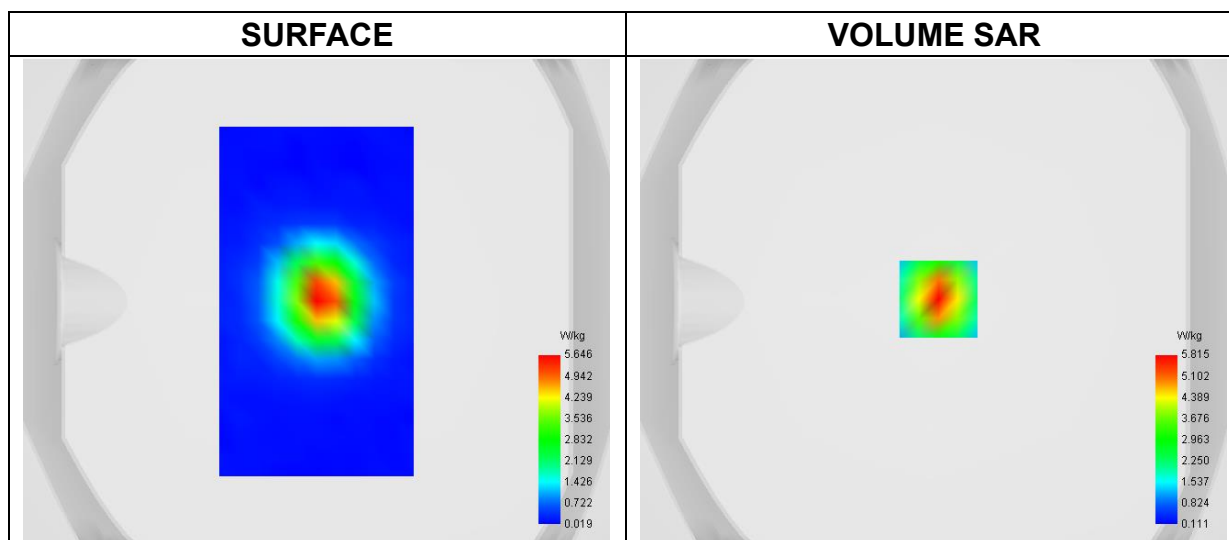


Maximum location: X=2.00, Y=1.00 ; SAR Peak: 9.34 W/kg

SAR 10g (W/Kg)	2.270
SAR 1g (W/Kg)	5.538



Z Axis Scan

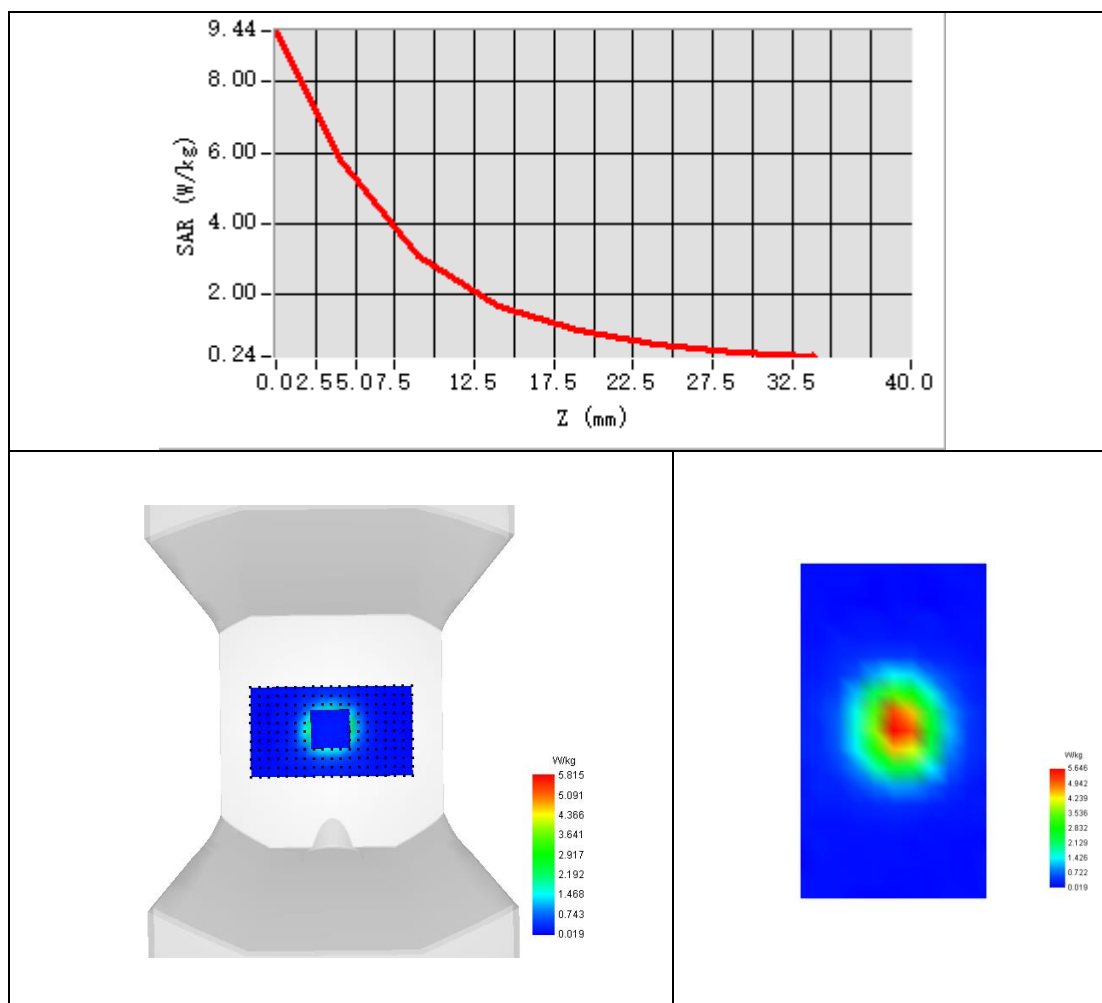



System Performance Check Data (5200MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2024-01-27

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW
Frequency (MHz)	5200.000
Relative permittivity	36.45
Conductivity (S/m)	4.69
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

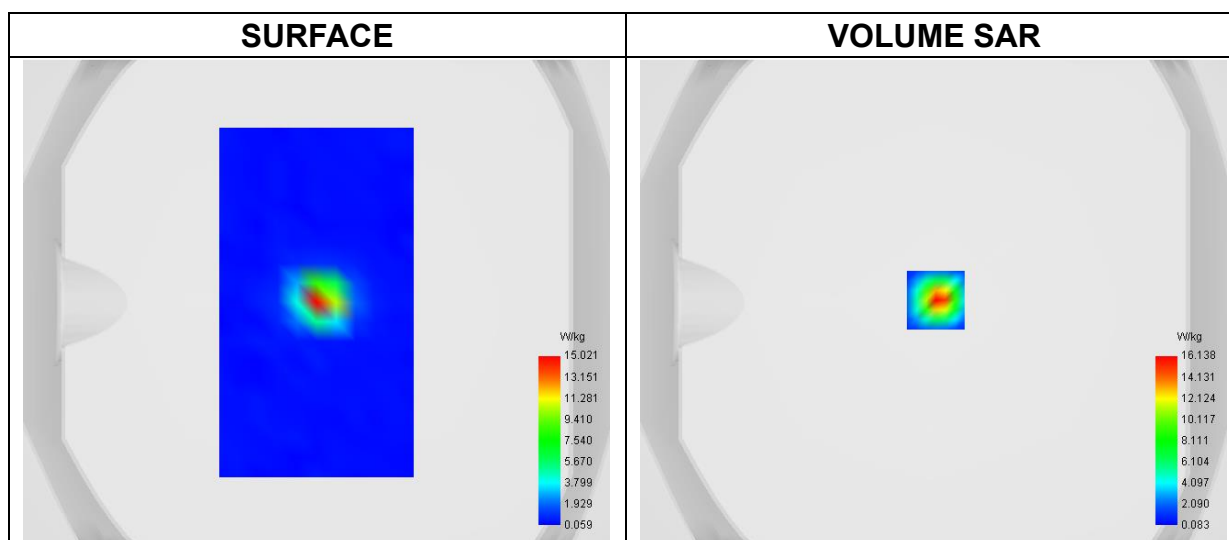


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 27.12 W/kg

SAR 10g (W/Kg)	2.381
SAR 1g (W/Kg)	7.905



Z Axis Scan

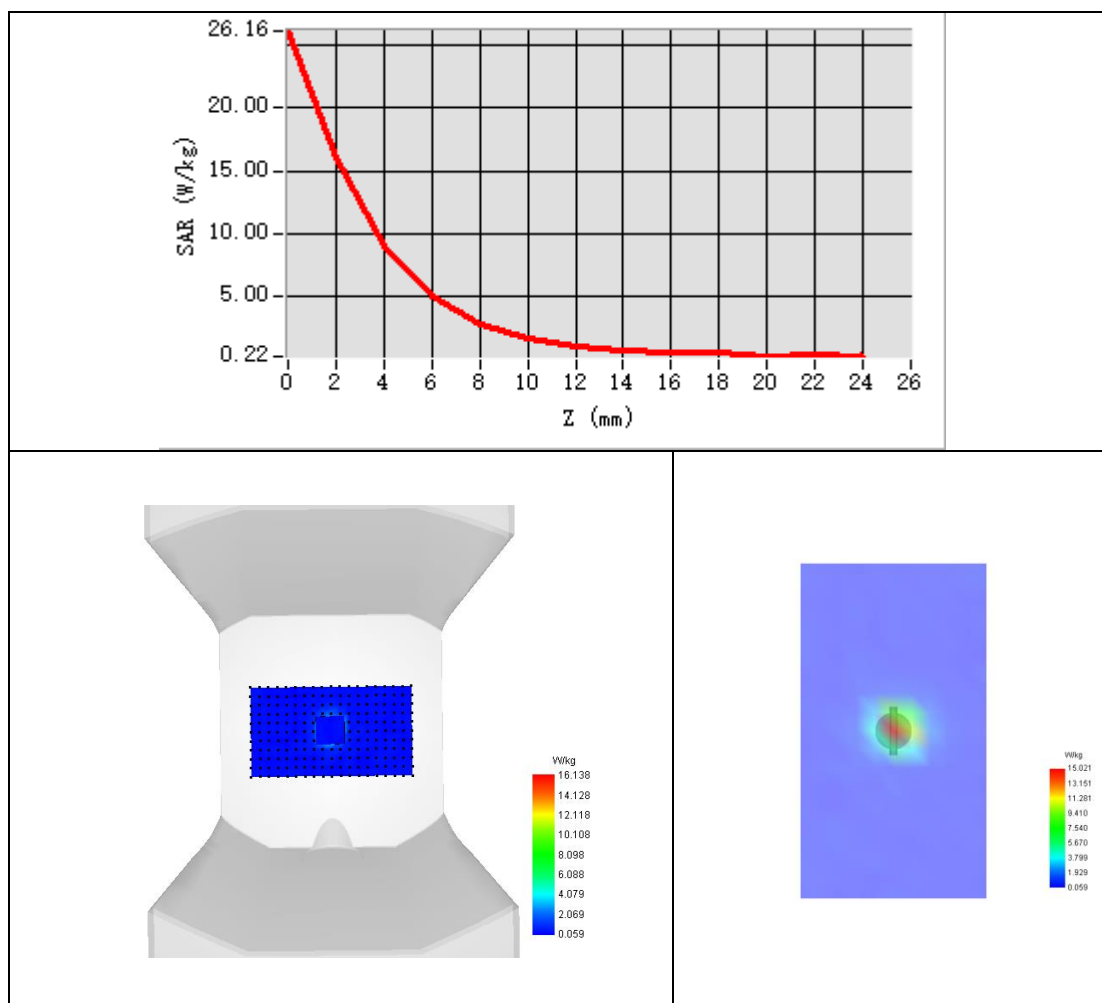



System Performance Check Data (5800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2024-01-27

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW
Frequency (MHz)	5800.000
Relative permittivity	36.72
Conductivity (S/m)	5.06
Probe	SN 04/22 EPGO364
ConvF	1.73
Crest factor:	1:1

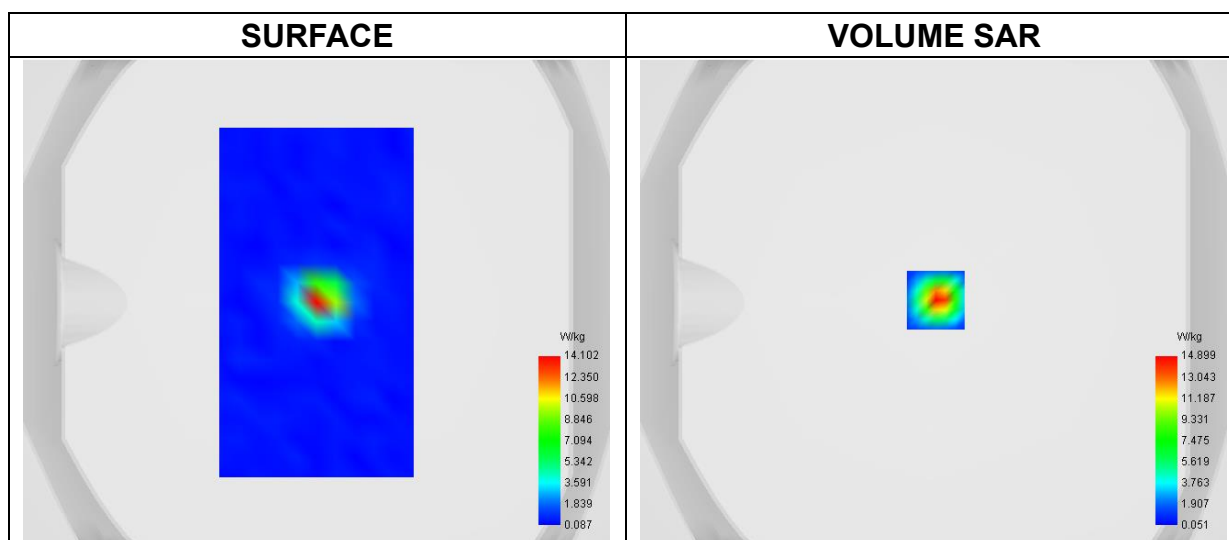


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 24.79 W/kg

SAR 10g (W/Kg)	2.392
SAR 1g (W/Kg)	7.683



Z Axis Scan

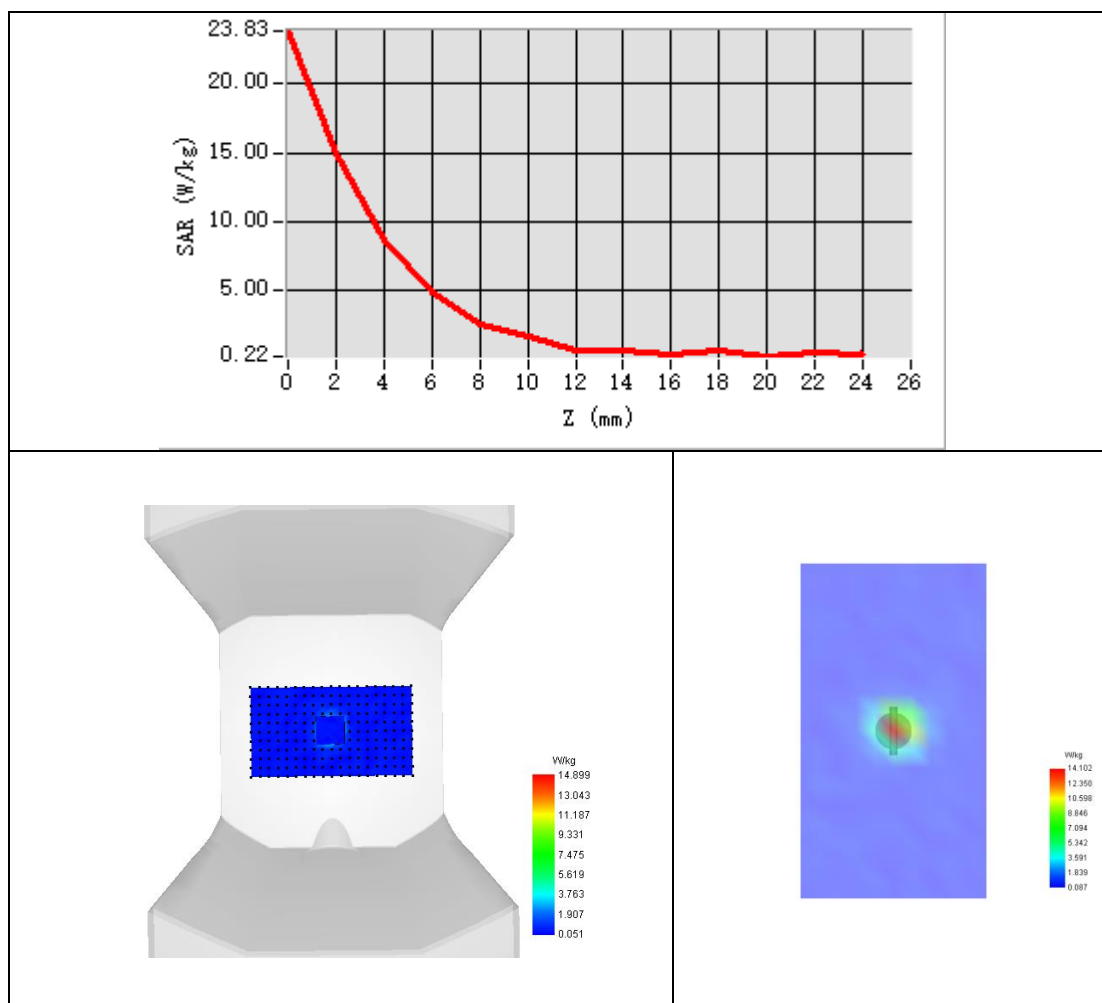




Appendix B. SAR Test Plots

Plot 1:

Test Date	2023-12-14
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM ANT A
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.232
SAR 1g (W/Kg)	0.442
Relative permittivity	39.81
Conductivity (S/m)	1.82
ConvF	2.33

Maximum location: X=26.00, Y=-53.00 ; SAR Peak: 0.75 W/kg

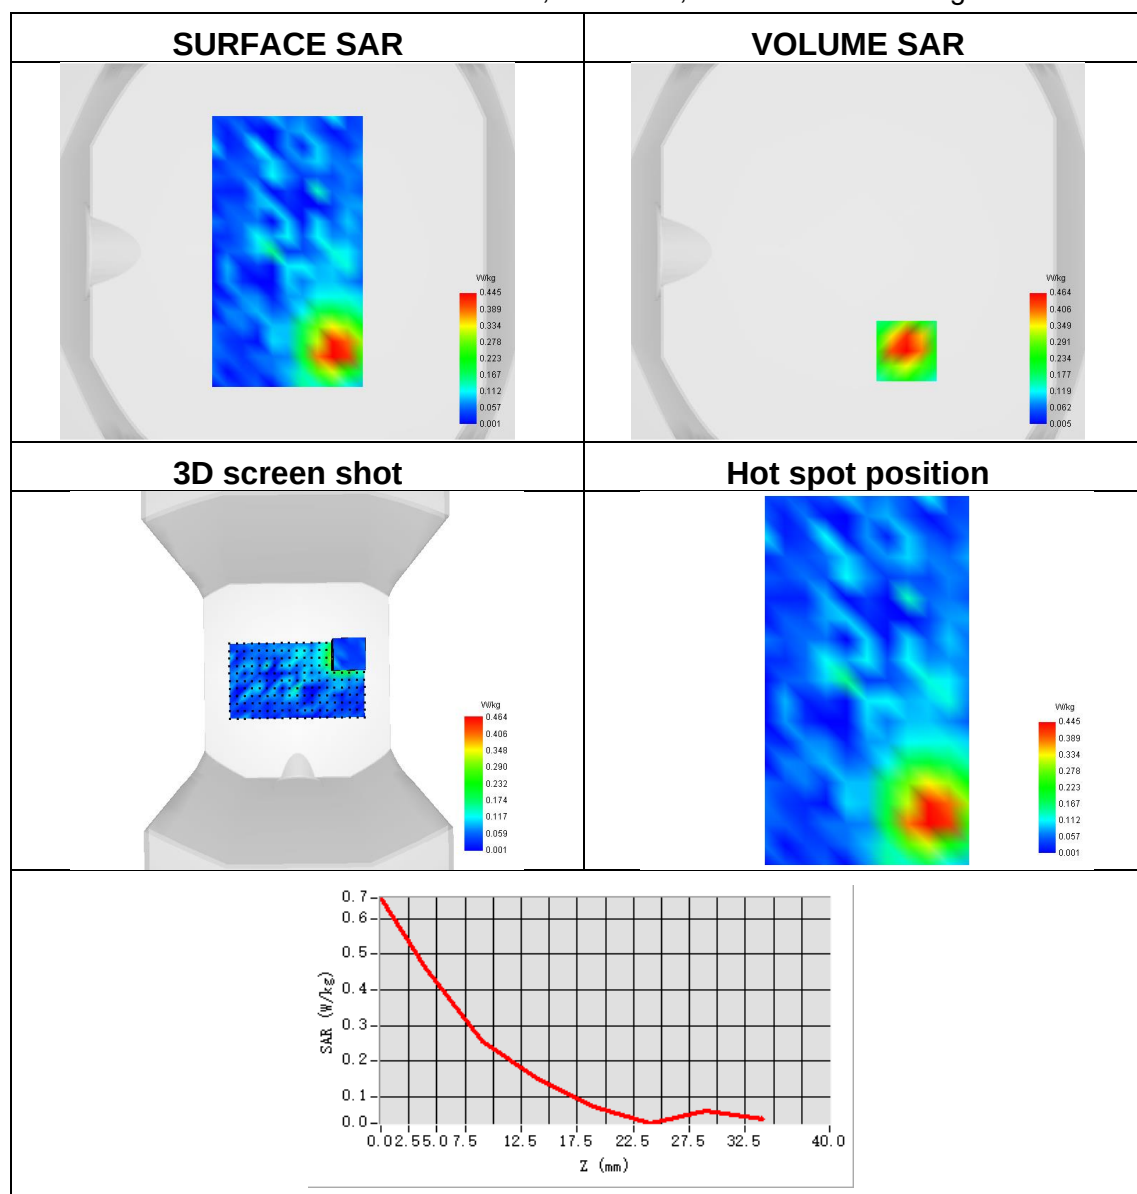




Plot 2:

Test Date	2023-12-14
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM ANT B
Signal	IEEE 802.11 b
Frequency	2462
SAR 10g (W/Kg)	0.253
SAR 1g (W/Kg)	0.532
Relative permittivity	39.81
Conductivity (S/m)	1.82
ConvF	2.33

Maximum location: X=8.00, Y=8.00 ; SAR Peak: 0.94 W/kg

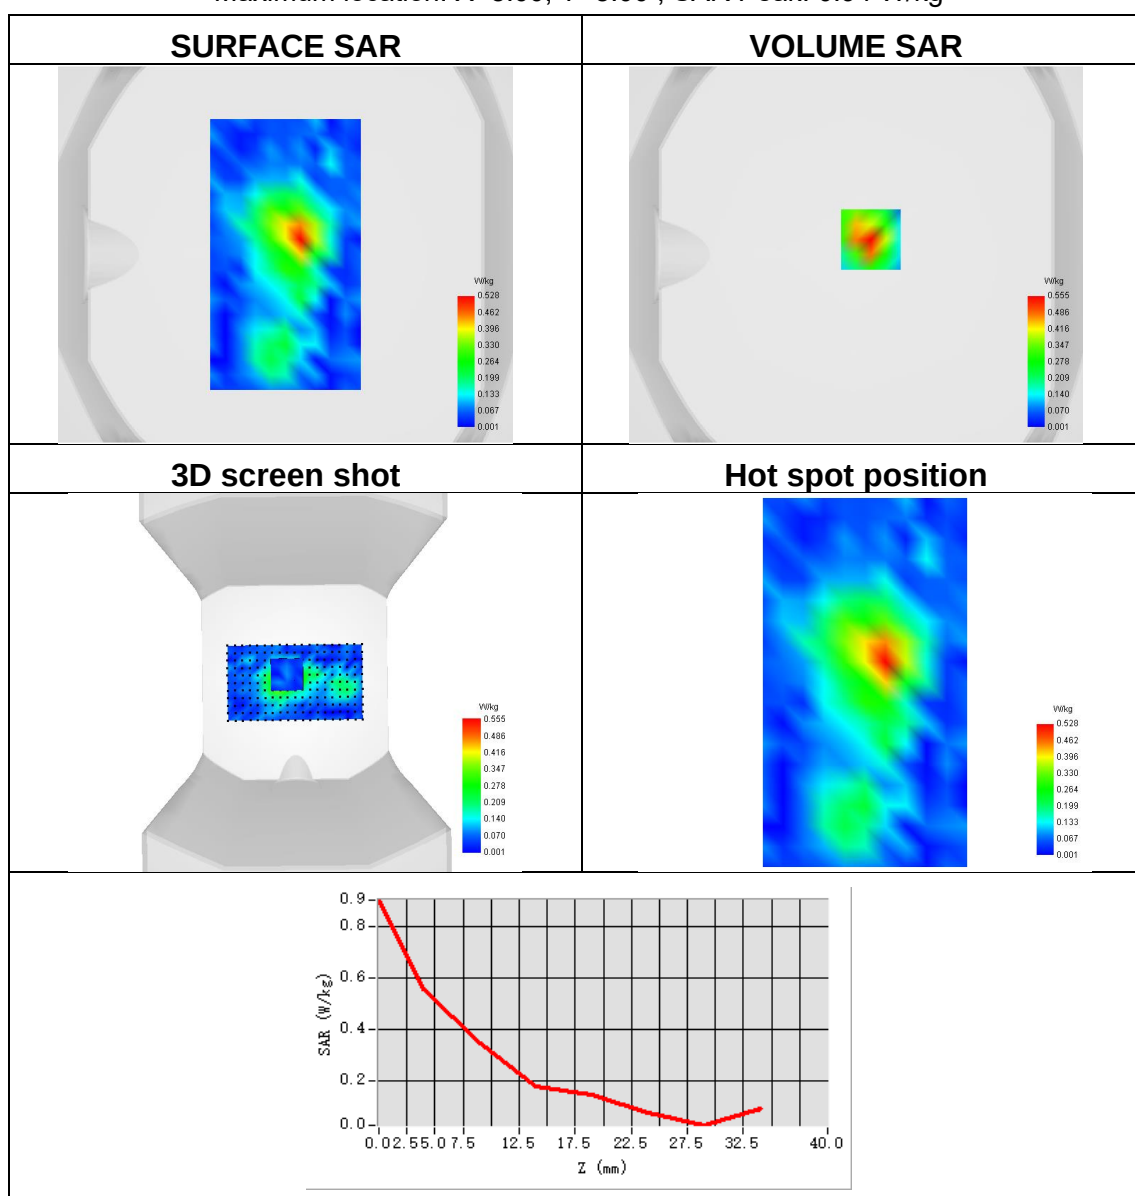




Plot 3:

Test Date	2023-12-14
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM MIMO A
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.233
SAR 1g (W/Kg)	0.500
Relative permittivity	39.81
Conductivity (S/m)	1.82
ConvF	2.33

Maximum location: X=1.00, Y=40.00 ; SAR Peak: 0.94 W/kg

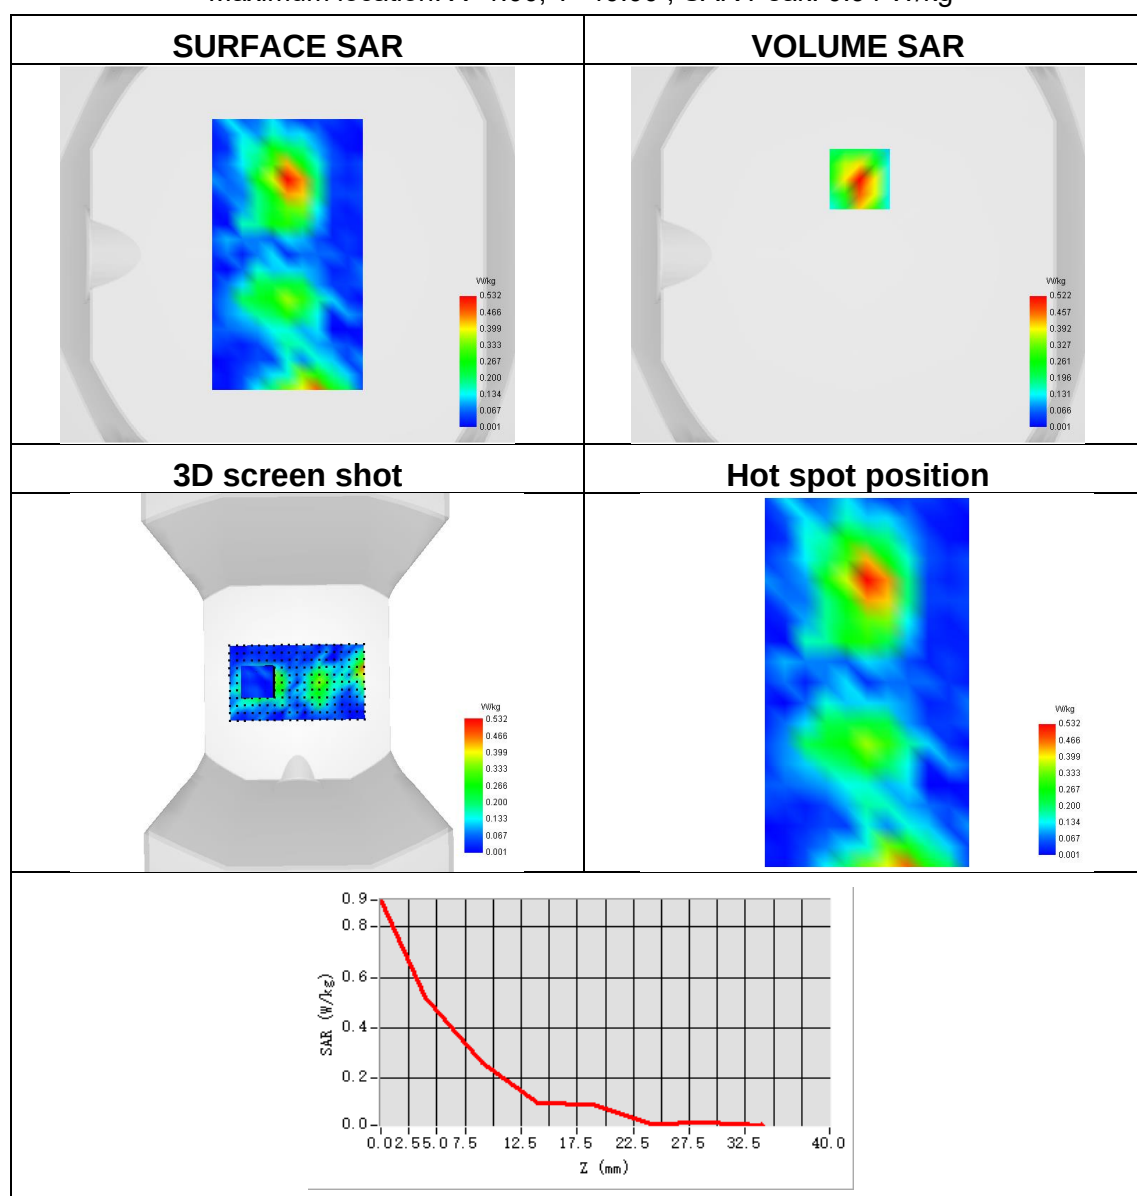




Plot 4:

Test Date	2023-12-14
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM MIMO B
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.257
SAR 1g (W/Kg)	0.542
Relative permittivity	39.81
Conductivity (S/m)	1.82
ConvF	2.33

Maximum location: X=8.00, Y=-55.00 ; SAR Peak: 1.02 W/kg

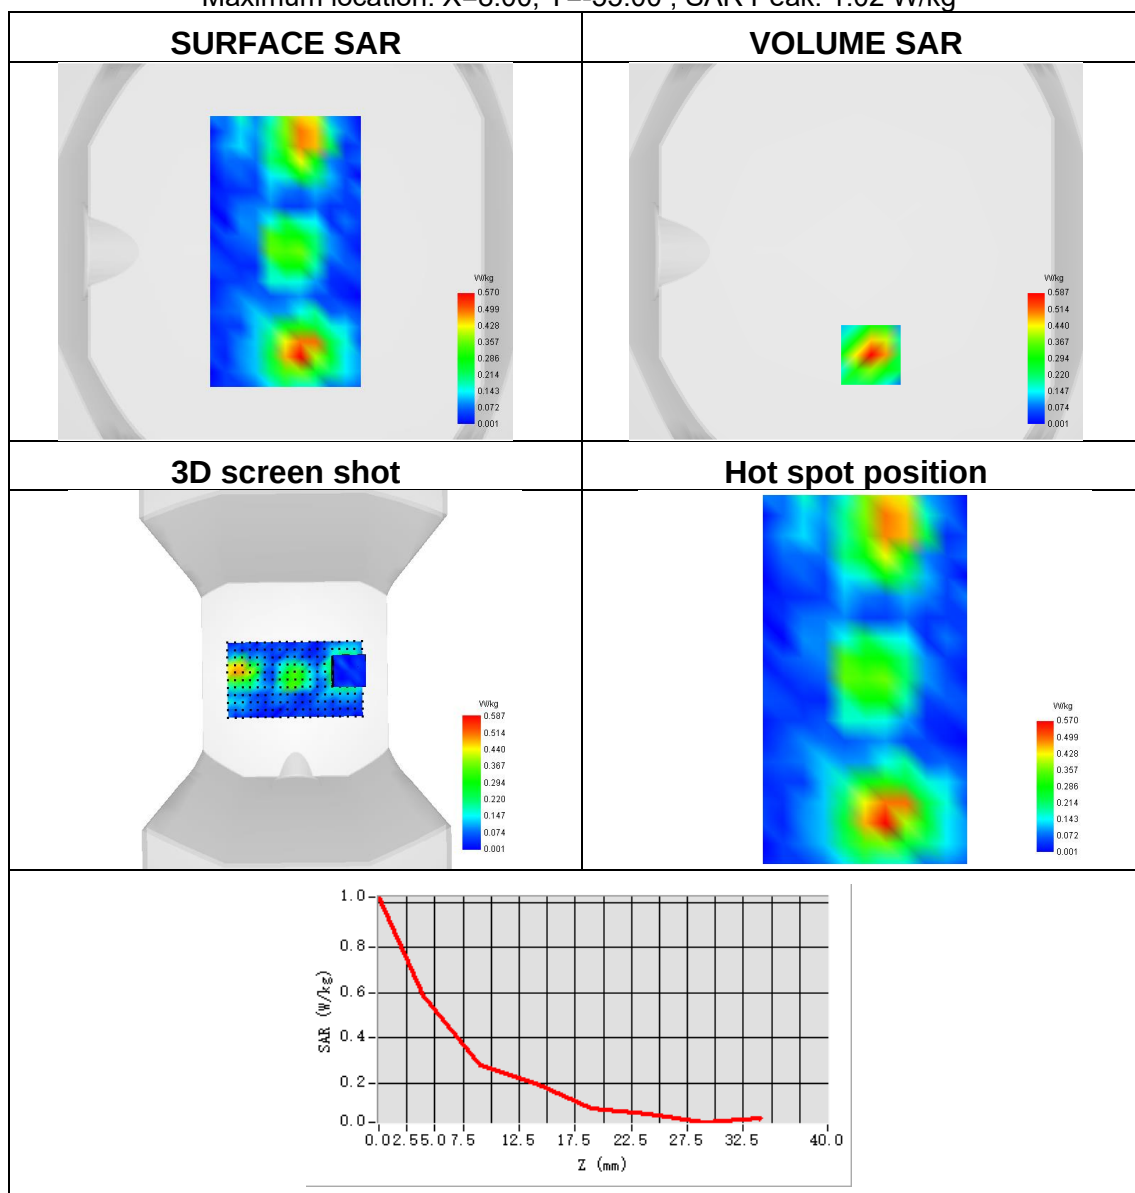




Plot 5:

Test Date	2023-12-16
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 ANT A
Signal	IEEE 802.11 ac
Frequency	5200
SAR 10g (W/Kg)	0.179
SAR 1g (W/Kg)	0.480
Relative permittivity	36.23
Conductivity (S/m)	4.64
ConvF	1.95

Maximum location: X=10.00, Y=-35.00 ; SAR Peak: 2.16 W/kg

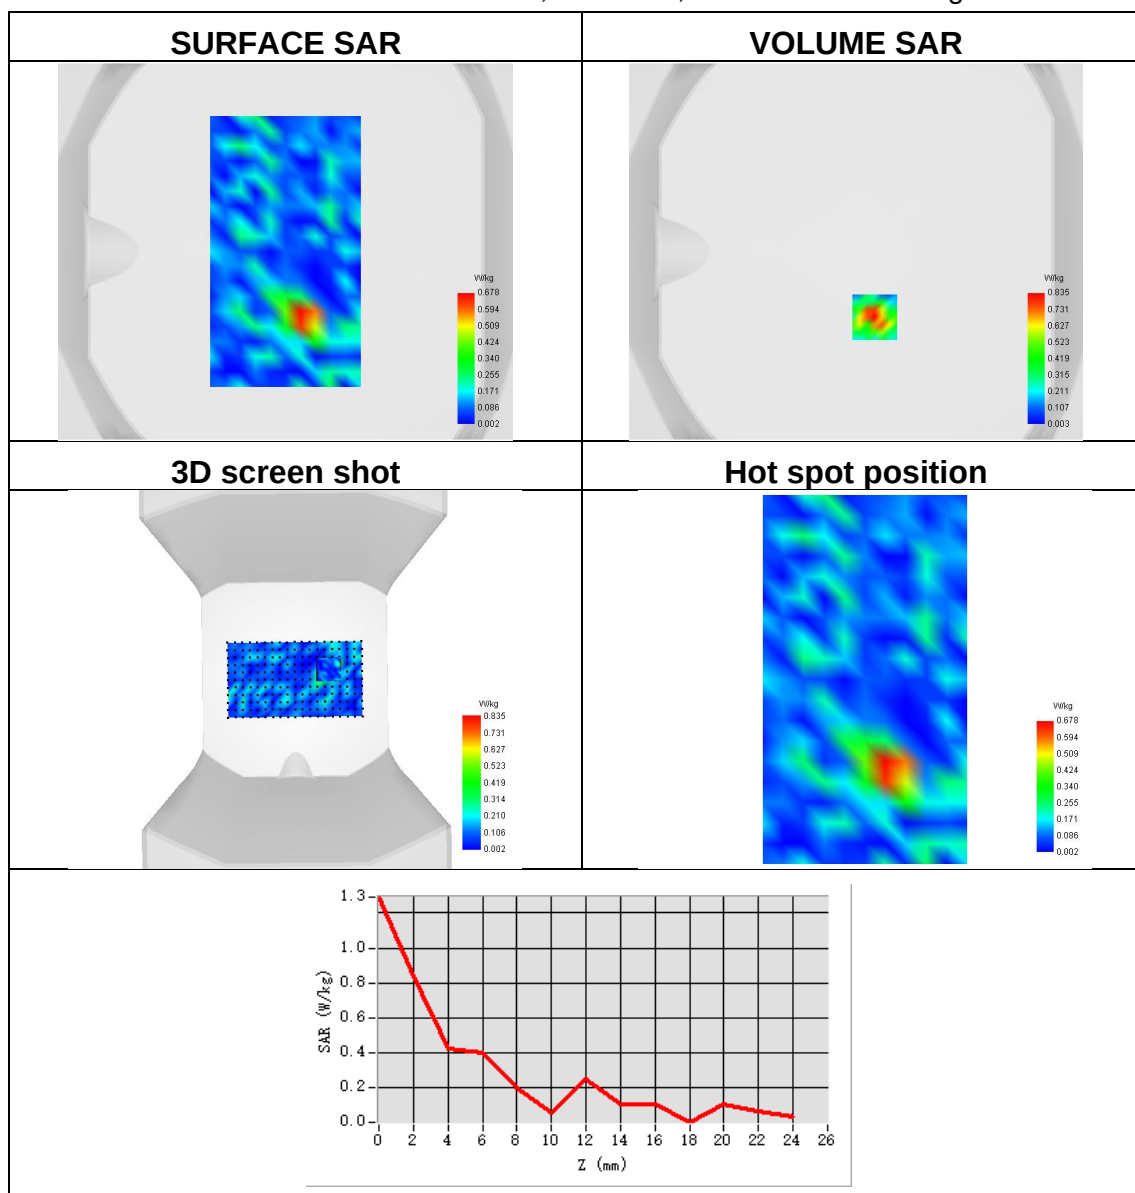




Plot 6:

Test Date	2023-12-16
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 ANT B
Signal	IEEE 802.11 ac
Frequency	5180
SAR 10g (W/Kg)	0.157
SAR 1g (W/Kg)	0.373
Relative permittivity	36.23
Conductivity (S/m)	4.64
ConvF	1.95

Maximum location: X=15.00, Y=24.00 ; SAR Peak: 2.03 W/kg

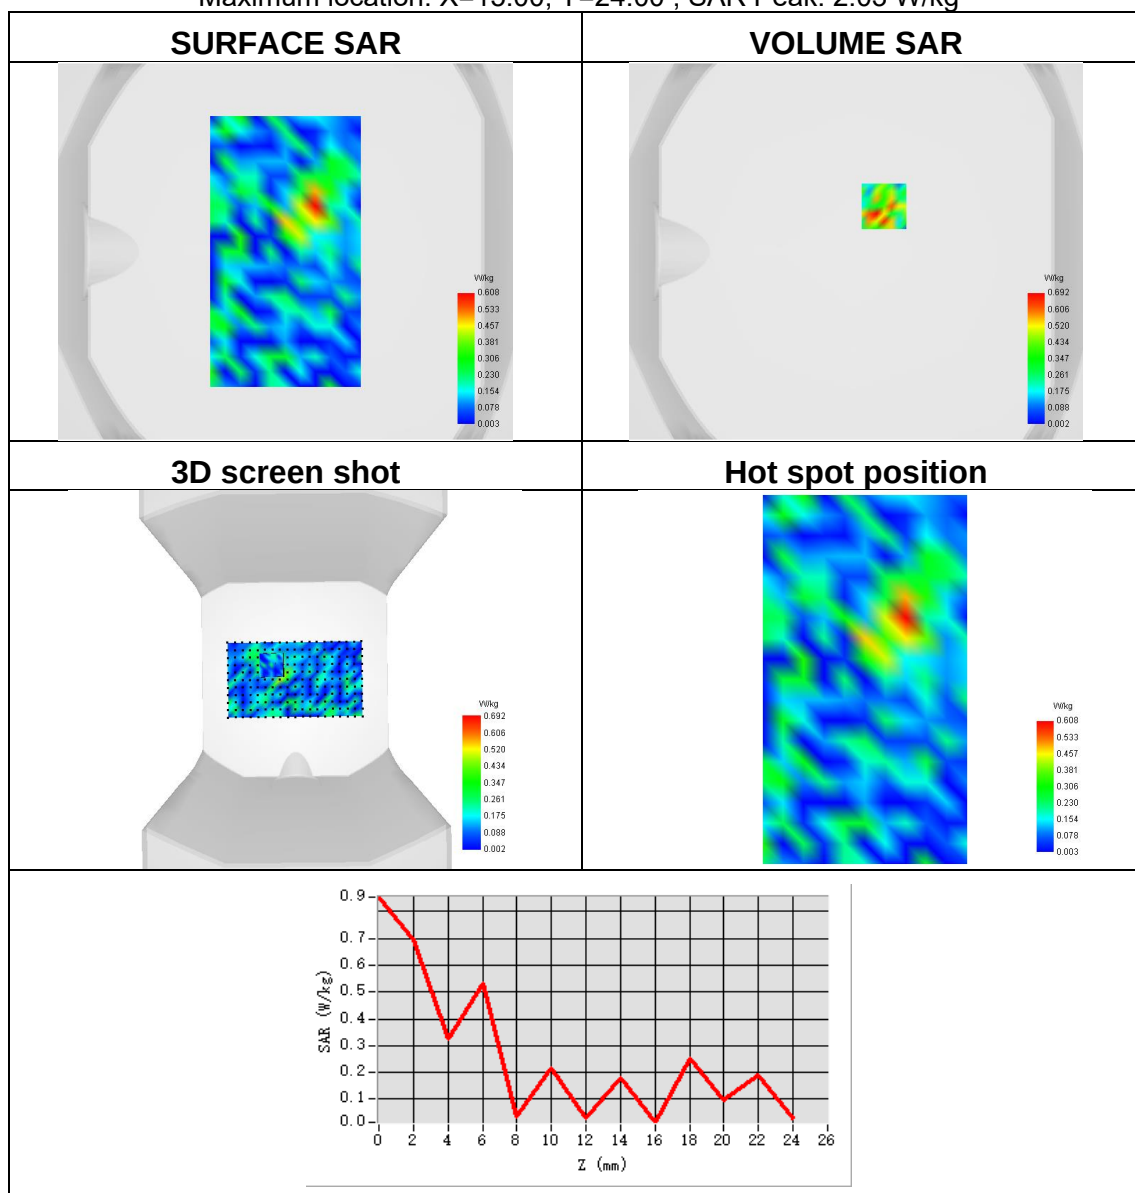




Plot 7:

Test Date	2023-12-16
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 MIMO A
Signal	IEEE 802.11 ac
Frequency	5200
SAR 10g (W/Kg)	0.169
SAR 1g (W/Kg)	0.462
Relative permittivity	36.23
Conductivity (S/m)	4.64
ConvF	1.95

Maximum location: X=9.00, Y=-32.00 ; SAR Peak: 2.15 W/kg

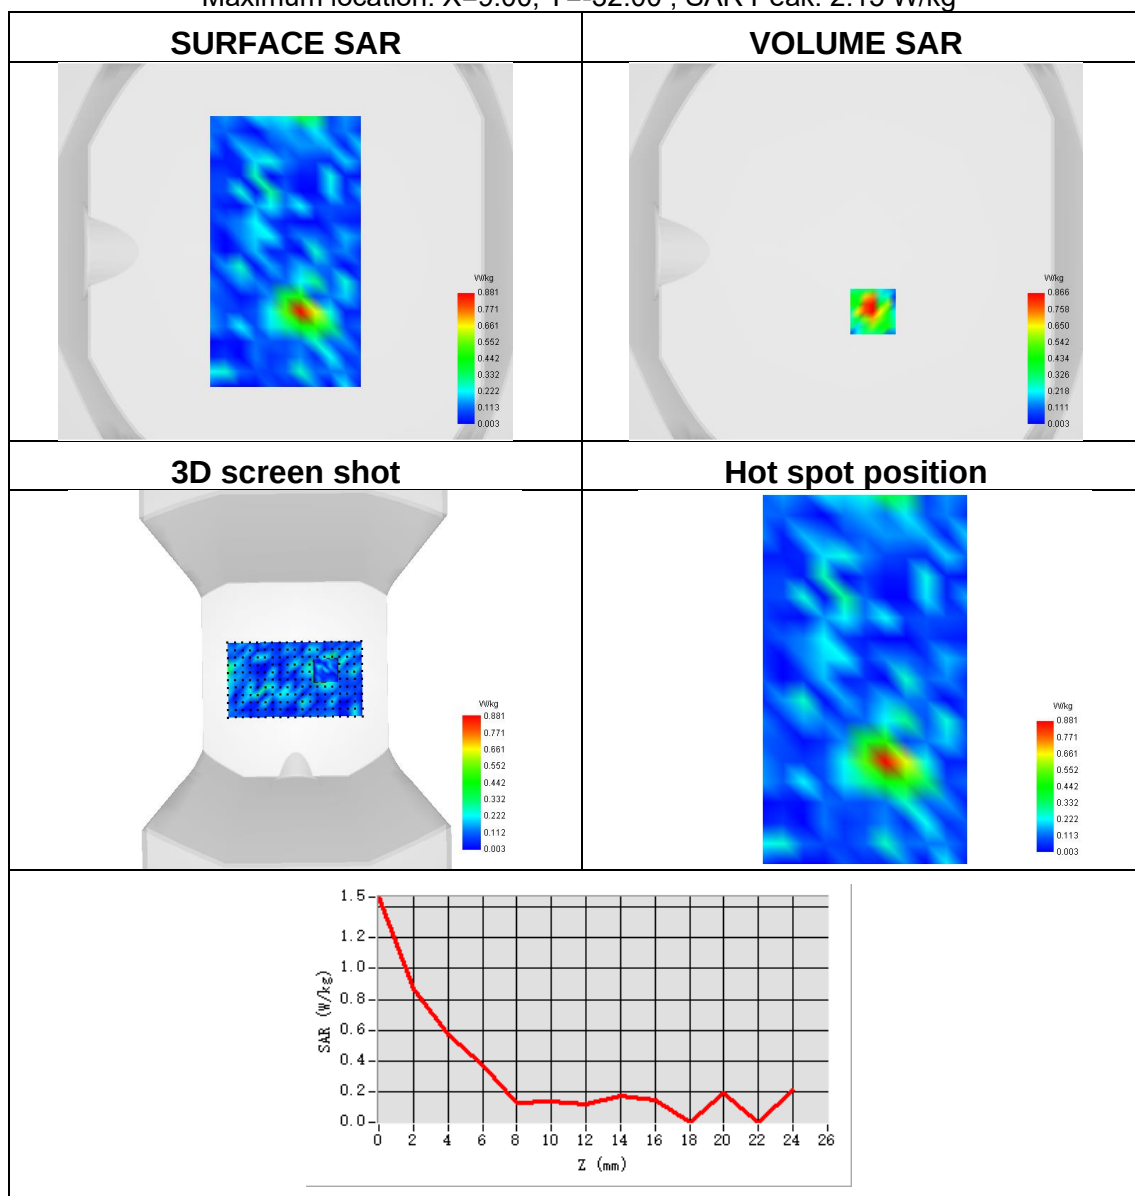




Plot 8:

Test Date	2023-12-16
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 MIMO B
Signal	IEEE 802.11 ac
Frequency	5200
SAR 10g (W/Kg)	0.146
SAR 1g (W/Kg)	0.446
Relative permittivity	36.23
Conductivity (S/m)	4.64
ConvF	1.95

Maximum location: X=15.00, Y=-58.00 ; SAR Peak: 2.13 W/kg

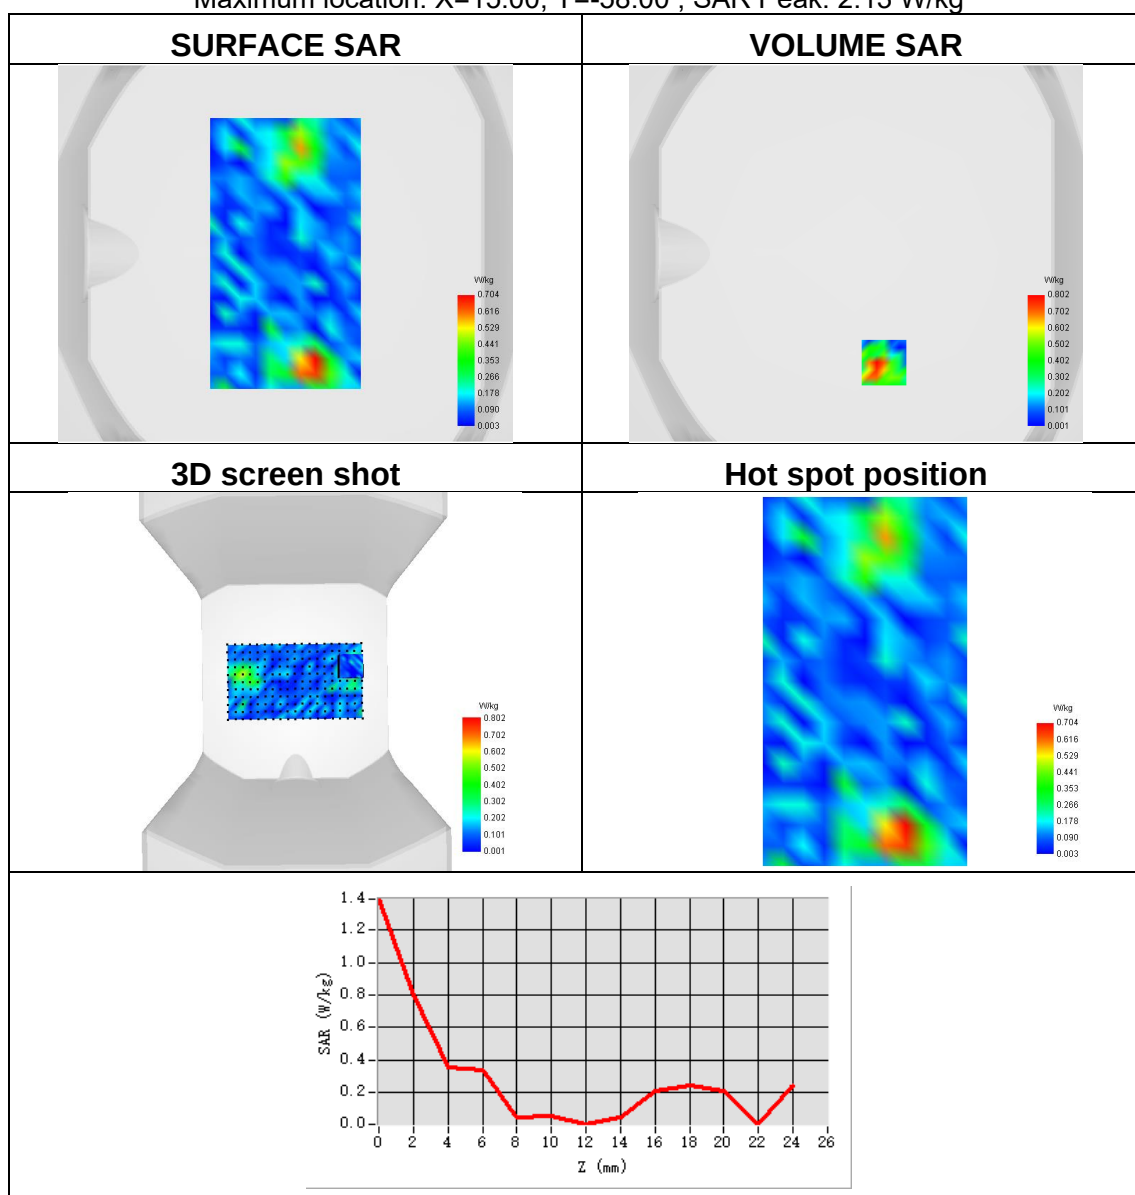




Plot 9:

Test Date	2023-12-15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 ANT A
Signal	IEEE 802.11 ac
Frequency	5785
SAR 10g (W/Kg)	0.090
SAR 1g (W/Kg)	0.091
Relative permittivity	36.55
Conductivity (S/m)	5.18
ConvF	1.73

Maximum location: X=16.00, Y=56.00 ; SAR Peak: 1.25 W/kg

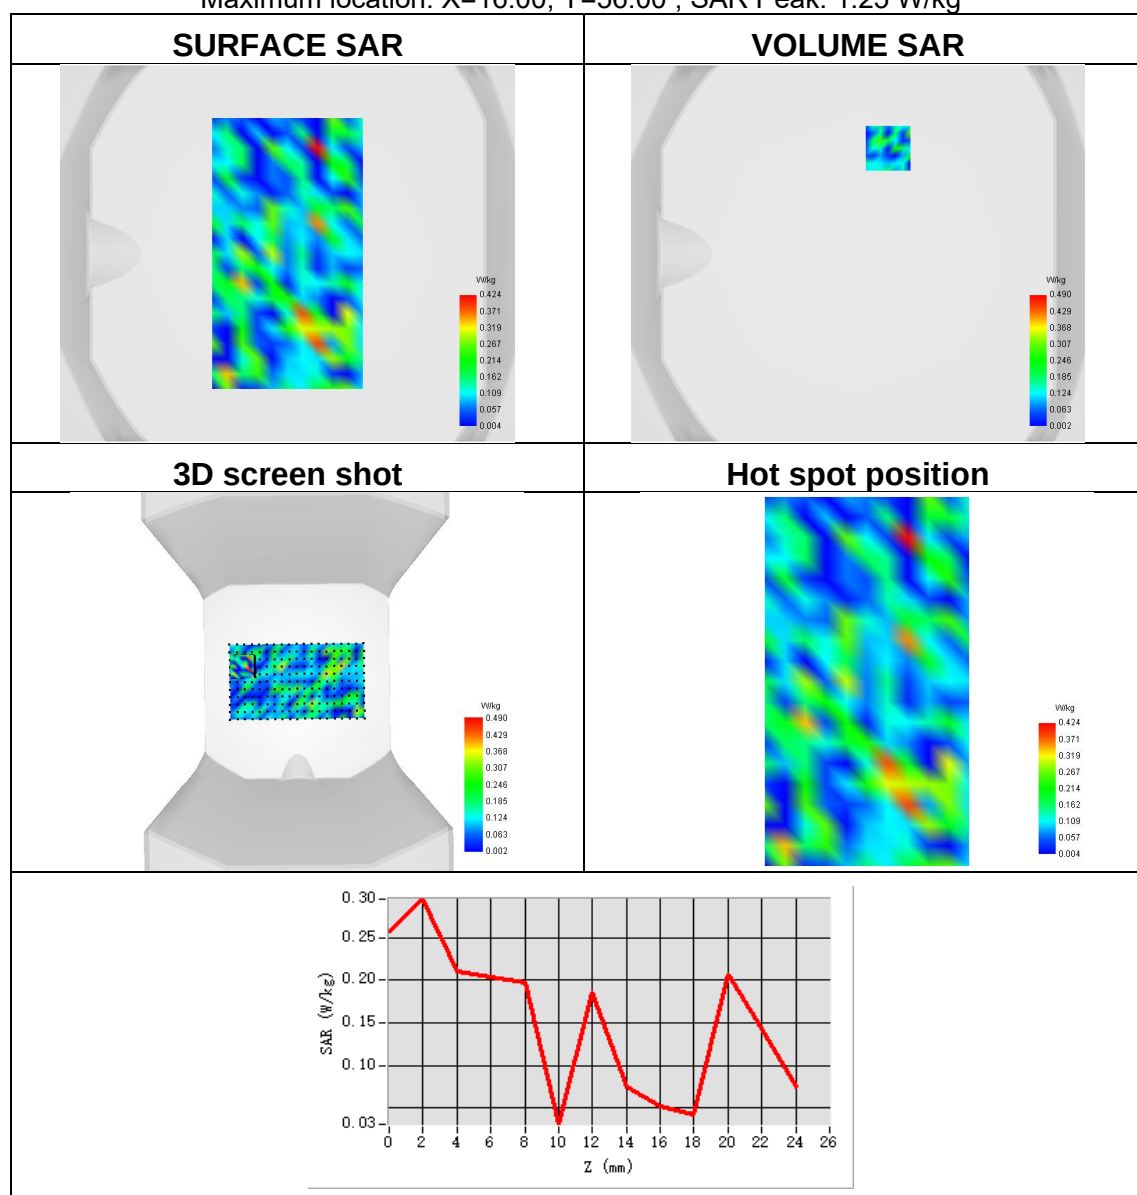




Plot 10:

Test Date	2023-12-15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 ANT B
Signal	IEEE 802.11 ac
Frequency	5745
SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.144
Relative permittivity	36.55
Conductivity (S/m)	5.18
ConvF	1.73

Maximum location: X=-16.00, Y=32.00 ; SAR Peak: 1.29 W/kg

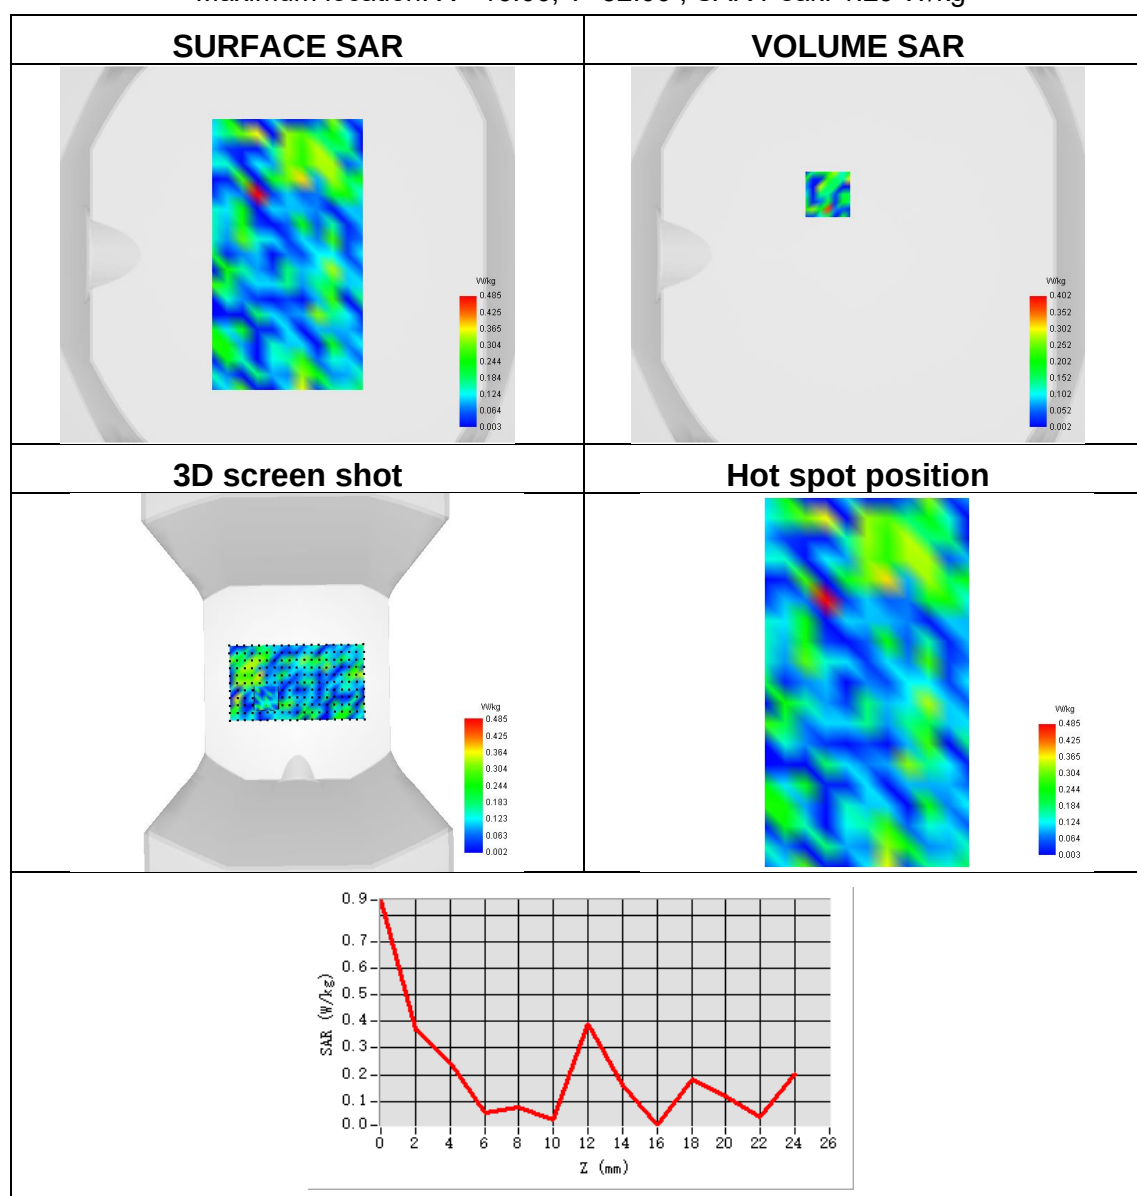




Plot 11:

Test Date	2023-12-15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 MIMO A
Signal	IEEE 802.11 ac
Frequency	5785
SAR 10g (W/Kg)	0.118
SAR 1g (W/Kg)	0.203
Relative permittivity	36.55
Conductivity (S/m)	5.18
ConvF	1.73

Maximum location: X=8.00, Y=41.00 ; SAR Peak: 1.84 W/kg

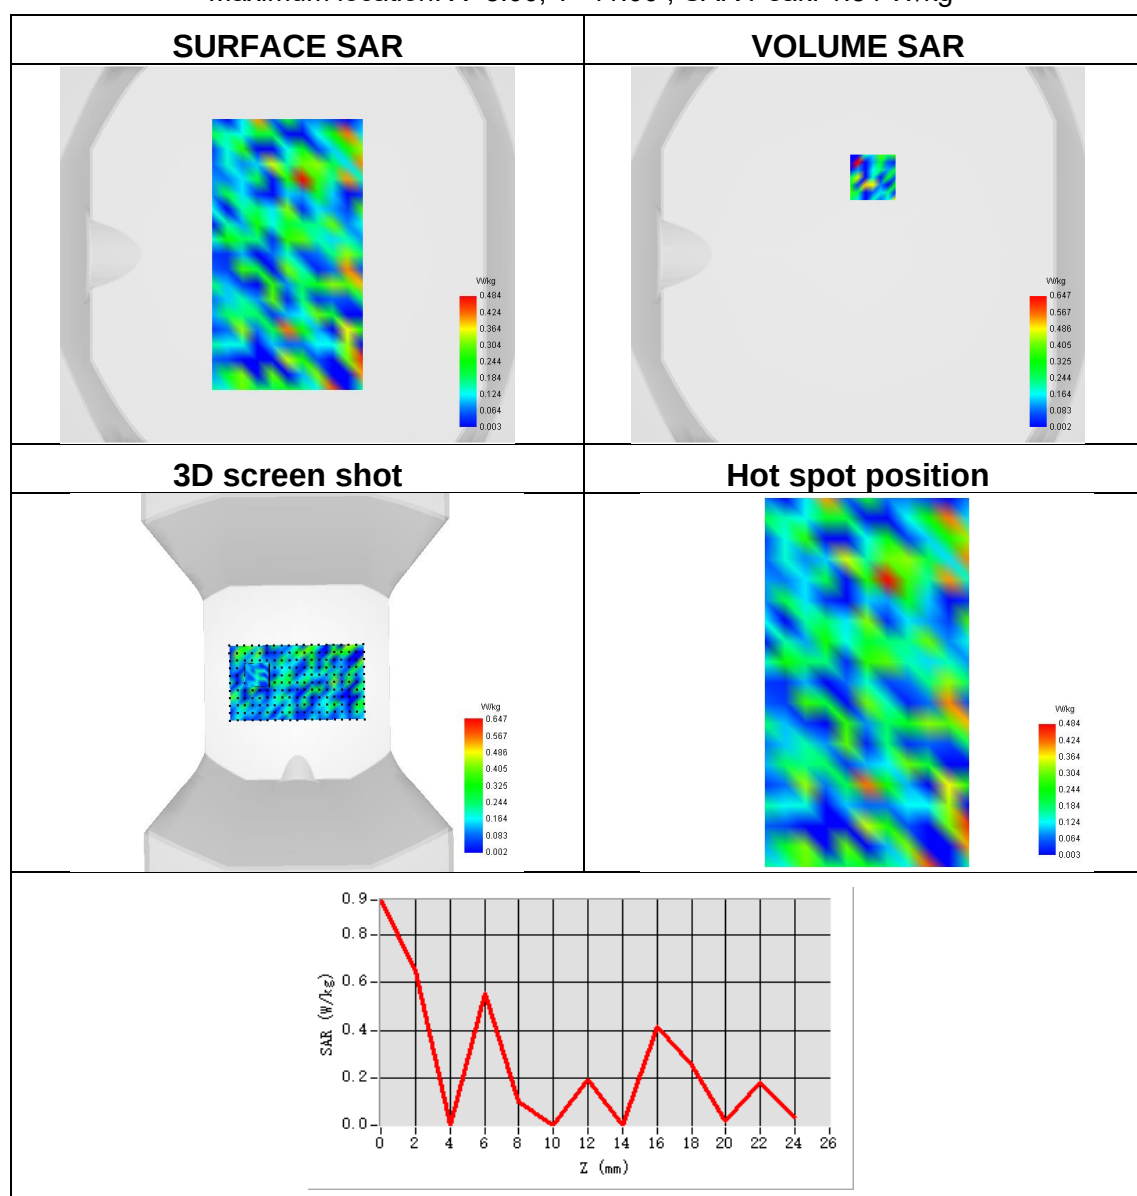




Plot 12:

Test Date	2023-12-15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 MIMO B
Signal	IEEE 802.11 ac
Frequency	5785
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.287
Relative permittivity	36.55
Conductivity (S/m)	5.18
ConvF	1.73

Maximum location: X=1.00, Y=-56.00 ; SAR Peak: 1.67 W/kg

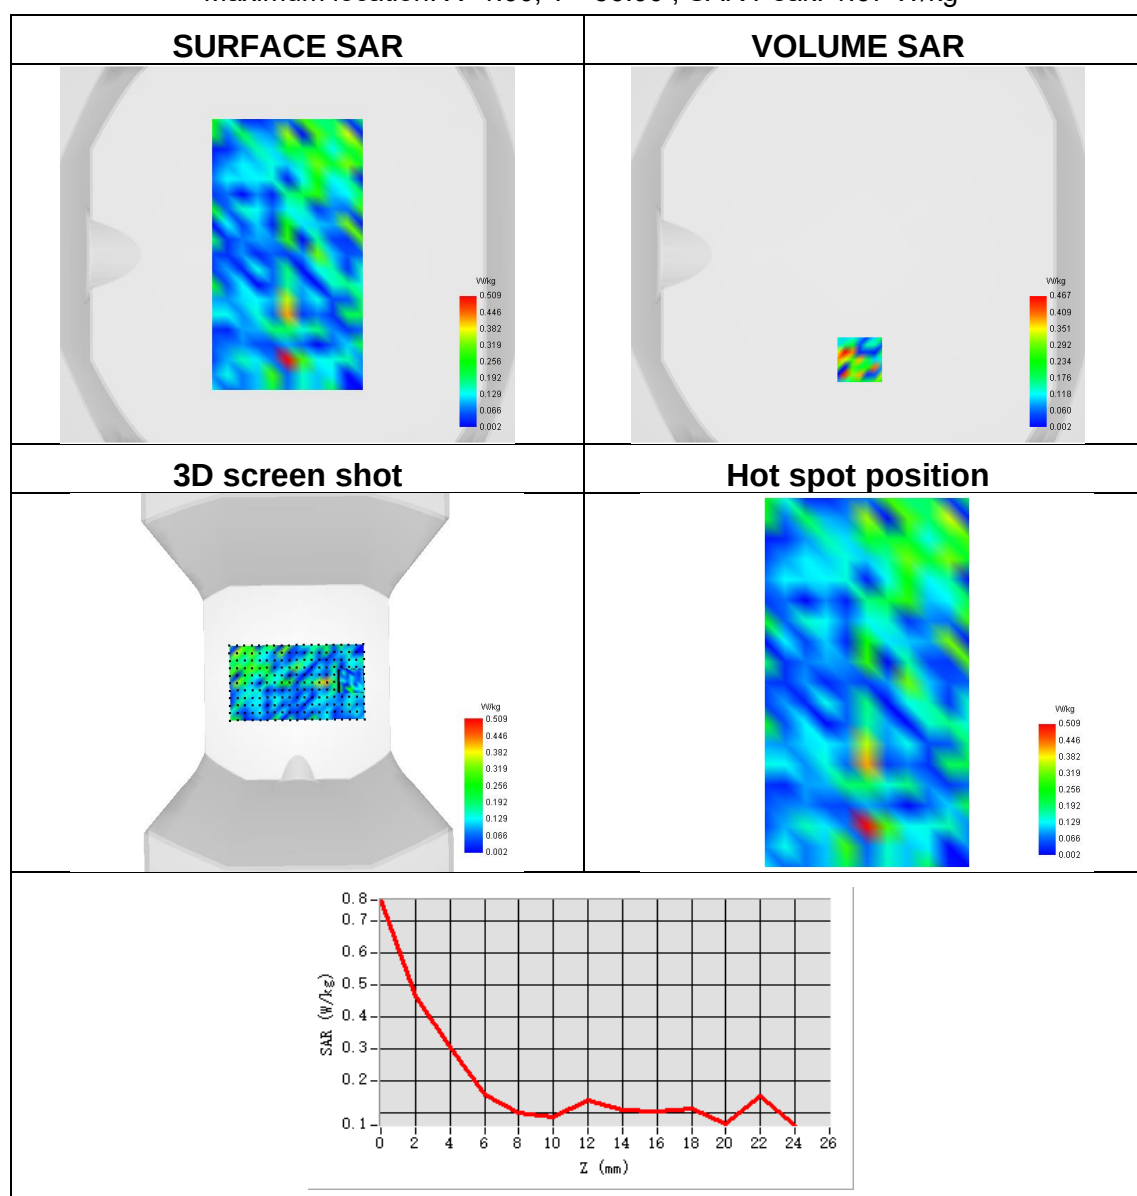




Plot 13:

Test Date	2024-01-26
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM ANT A
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.174
SAR 1g (W/Kg)	0.357
Relative permittivity	38.45
Conductivity (S/m)	1.85
ConvF	2.33

Maximum location: X=7.00, Y=-55.00 ; SAR Peak: 0.66 W/kg

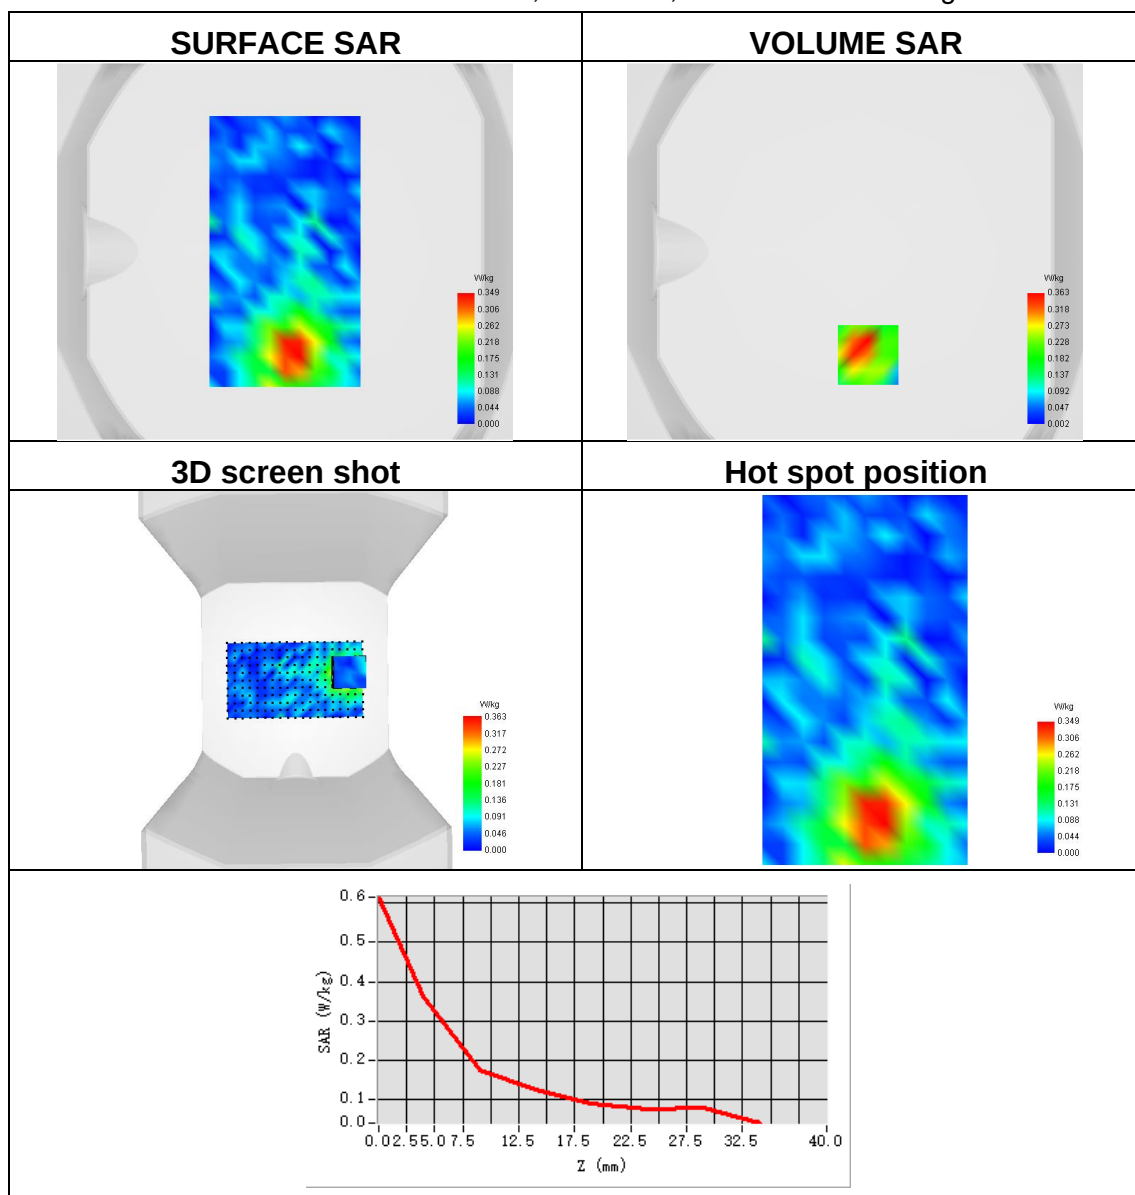




Plot 14:

Test Date	2024-01-26
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM ANT B
Signal	IEEE 802.11 b
Frequency	2462
SAR 10g (W/Kg)	0.179
SAR 1g (W/Kg)	0.335
Relative permittivity	38.45
Conductivity (S/m)	1.85
ConvF	2.33

Maximum location: X=0.00, Y=29.00 ; SAR Peak: 0.59 W/kg

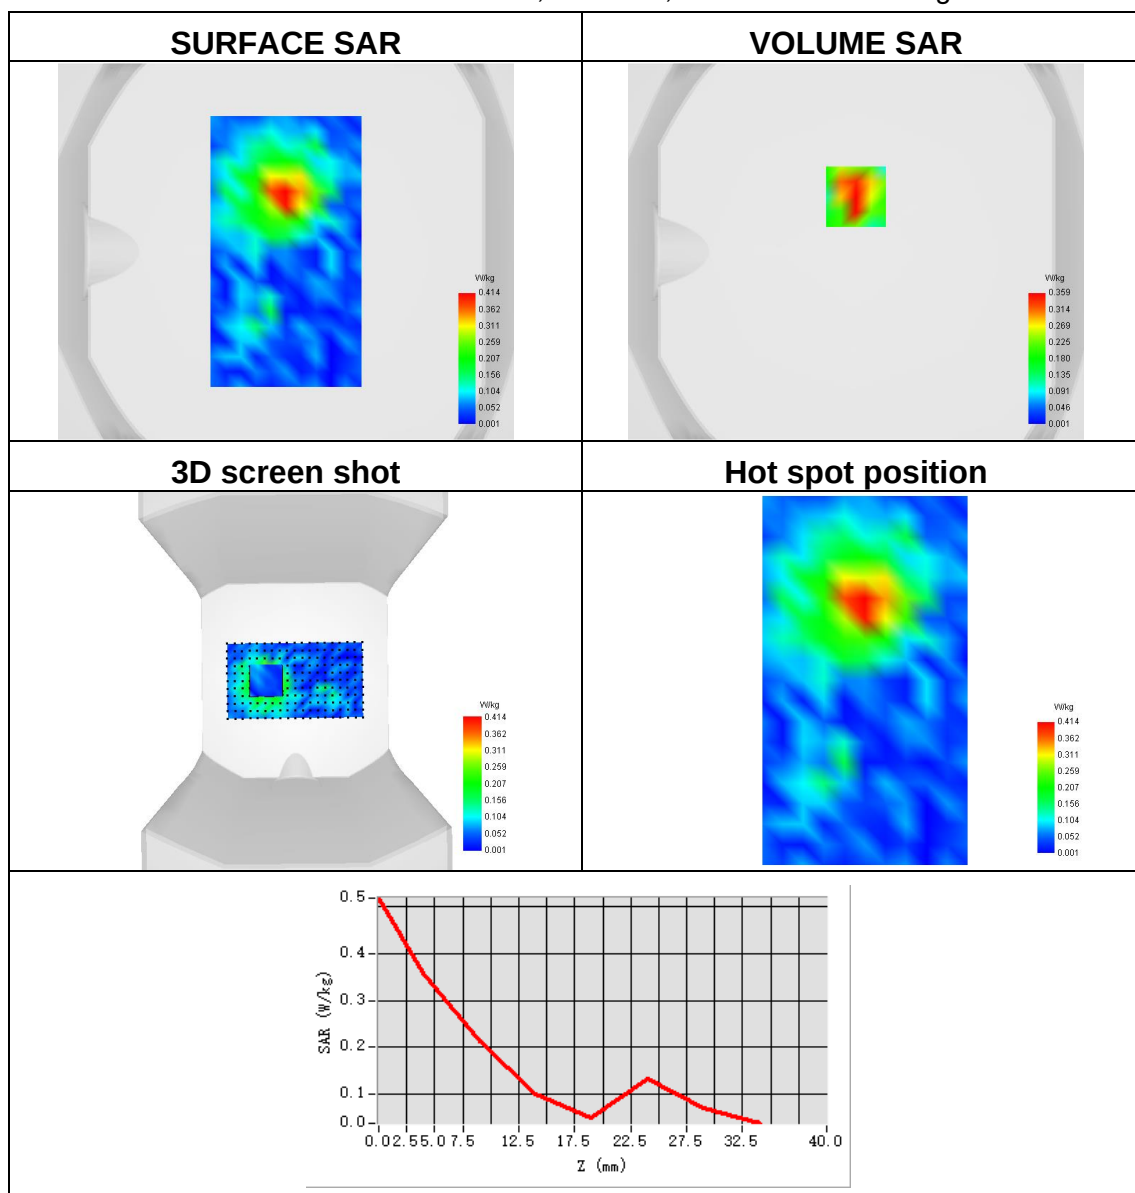




Plot 15:

Test Date	2024-01-26
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM MIMO A
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.164
SAR 1g (W/Kg)	0.309
Relative permittivity	38.45
Conductivity (S/m)	1.85
ConvF	2.33

Maximum location: X=-1.00, Y=33.00 ; SAR Peak: 0.61 W/kg

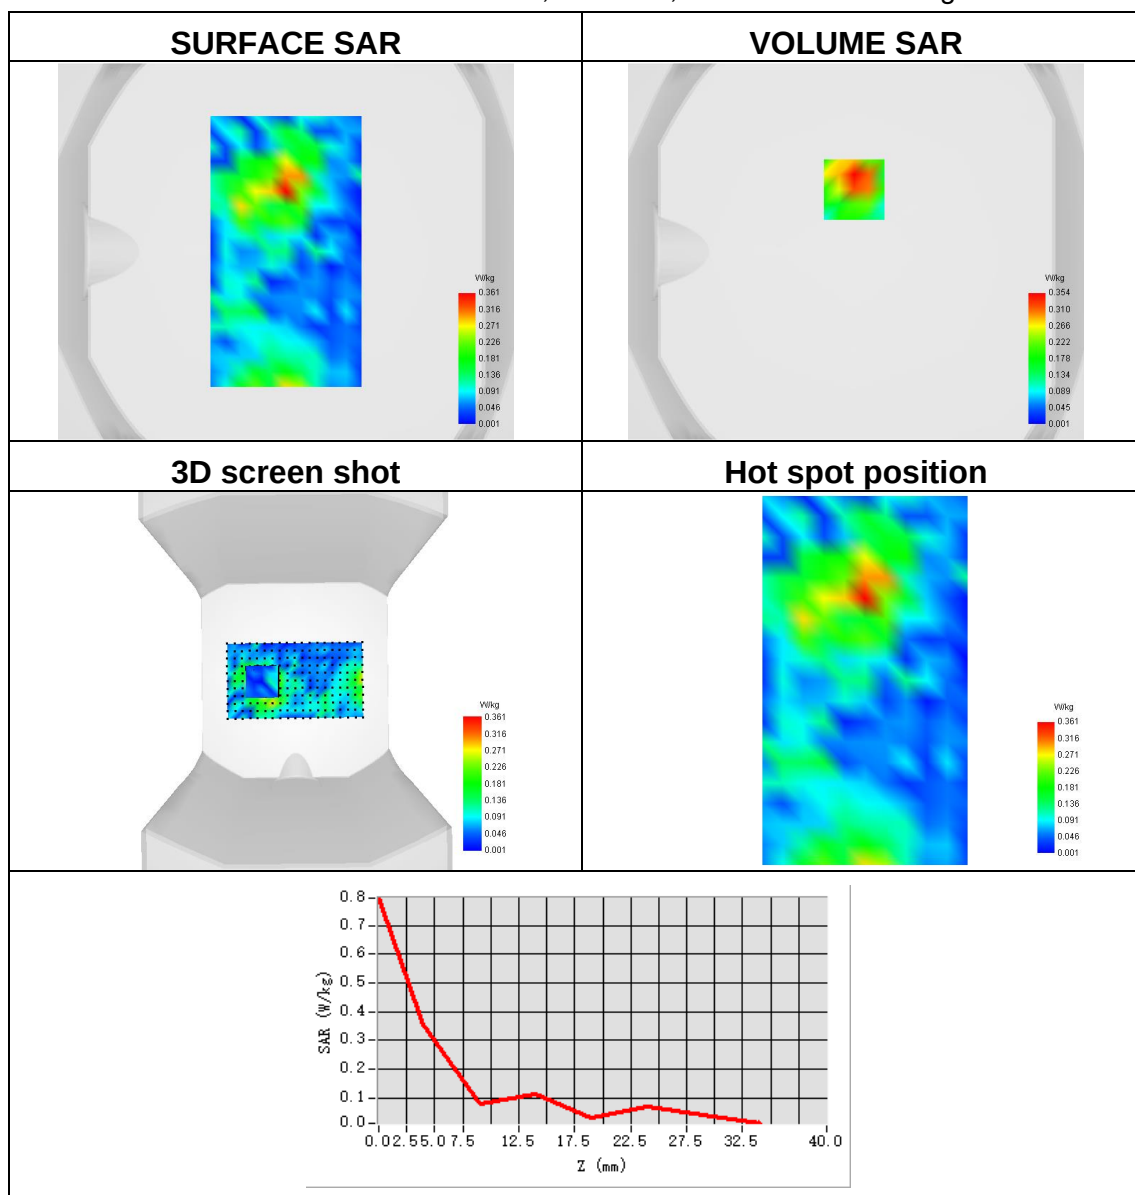




Plot 16:

Test Date	2024-01-26
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM MIMO B
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.128
SAR 1g (W/Kg)	0.247
Relative permittivity	38.45
Conductivity (S/m)	1.85
ConvF	2.33

Maximum location: X=5.00, Y=18.00 ; SAR Peak: 0.52 W/kg

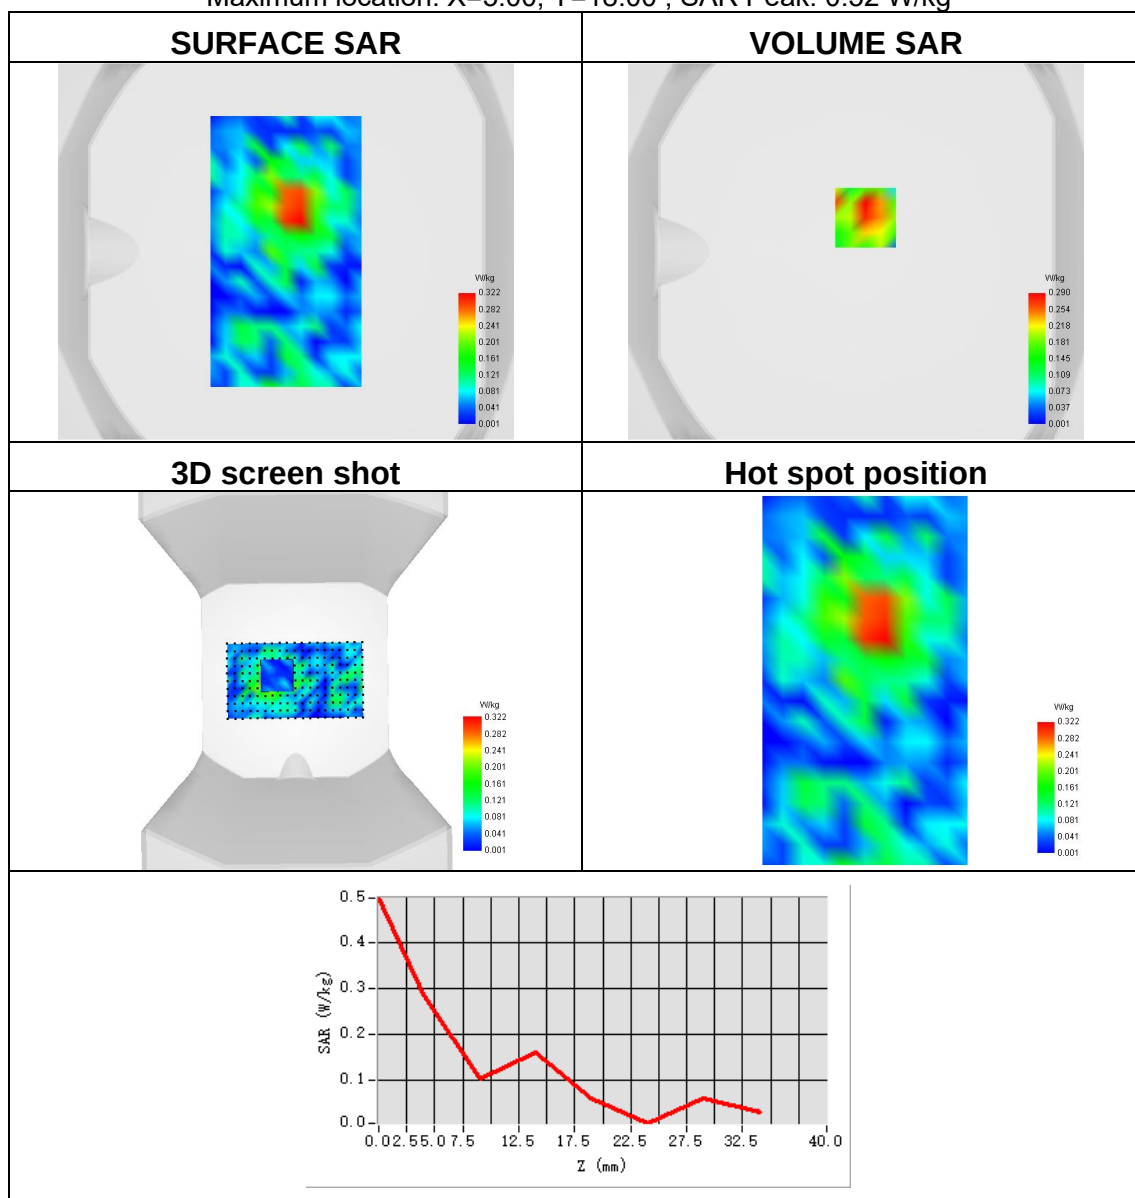




Plot 17:

Test Date	2024-01-27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 ANT A
Signal	IEEE 802.11 ac
Frequency	5200
SAR 10g (W/Kg)	0.108
SAR 1g (W/Kg)	0.182
Relative permittivity	36.45
Conductivity (S/m)	4.69
ConvF	1.95

Maximum location: X=9.00, Y=-17.00 ; SAR Peak: 1.07 W/kg

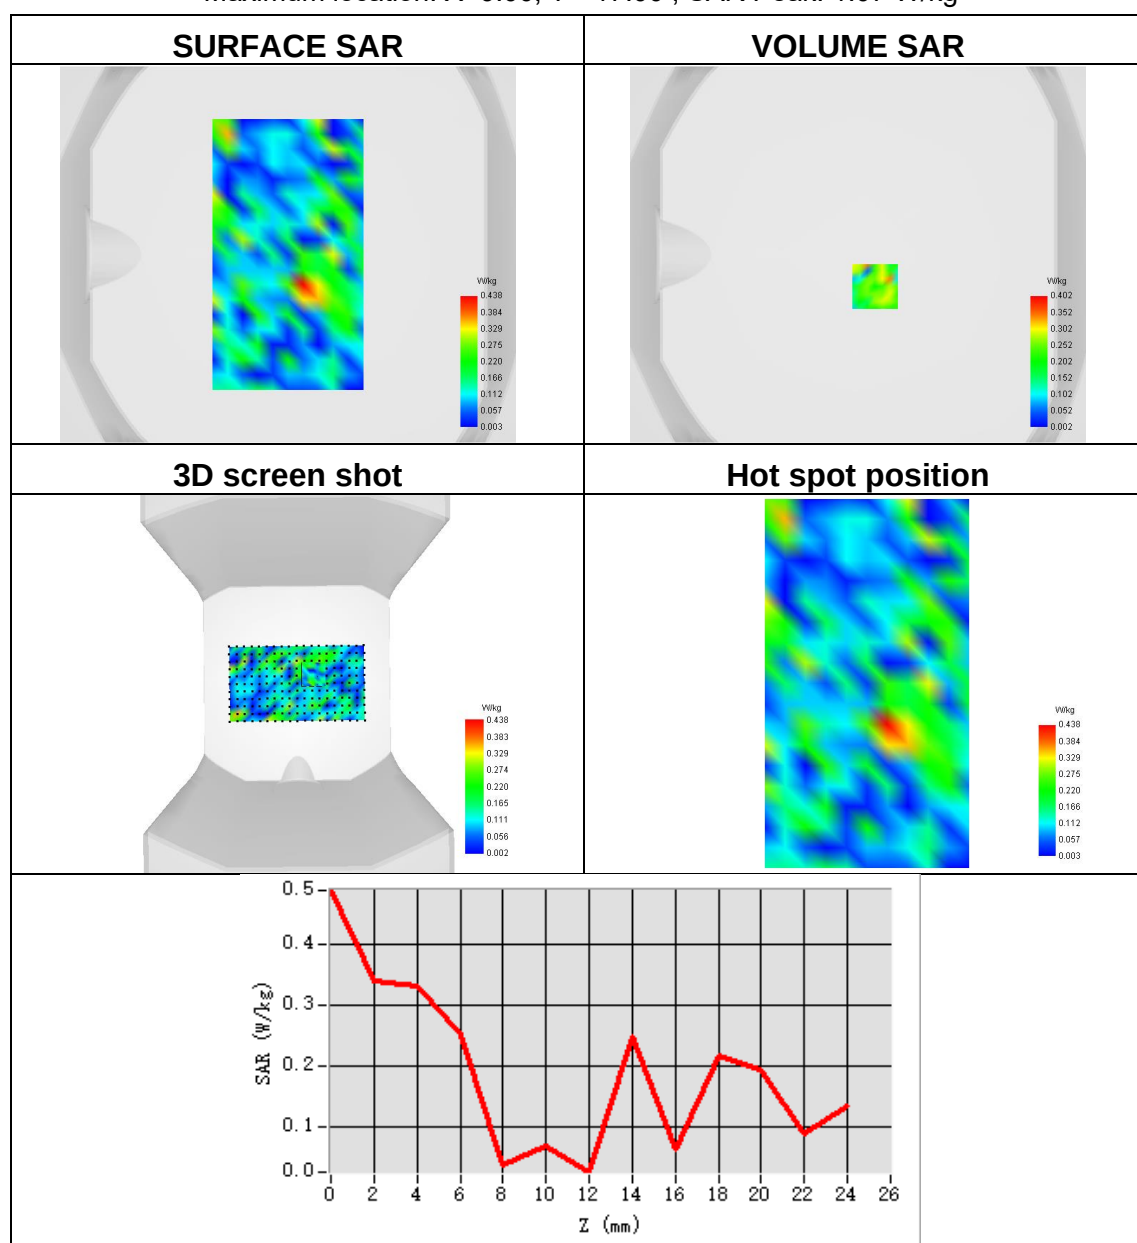




Plot 18:

Test Date	2024-01-27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 ANT B
Signal	IEEE 802.11 ac
Frequency	5180
SAR 10g (W/Kg)	0.100
SAR 1g (W/Kg)	0.194
Relative permittivity	36.45
Conductivity (S/m)	4.69
ConvF	1.95

Maximum location: X=-24.00, Y=24.00 ; SAR Peak: 1.50 W/kg

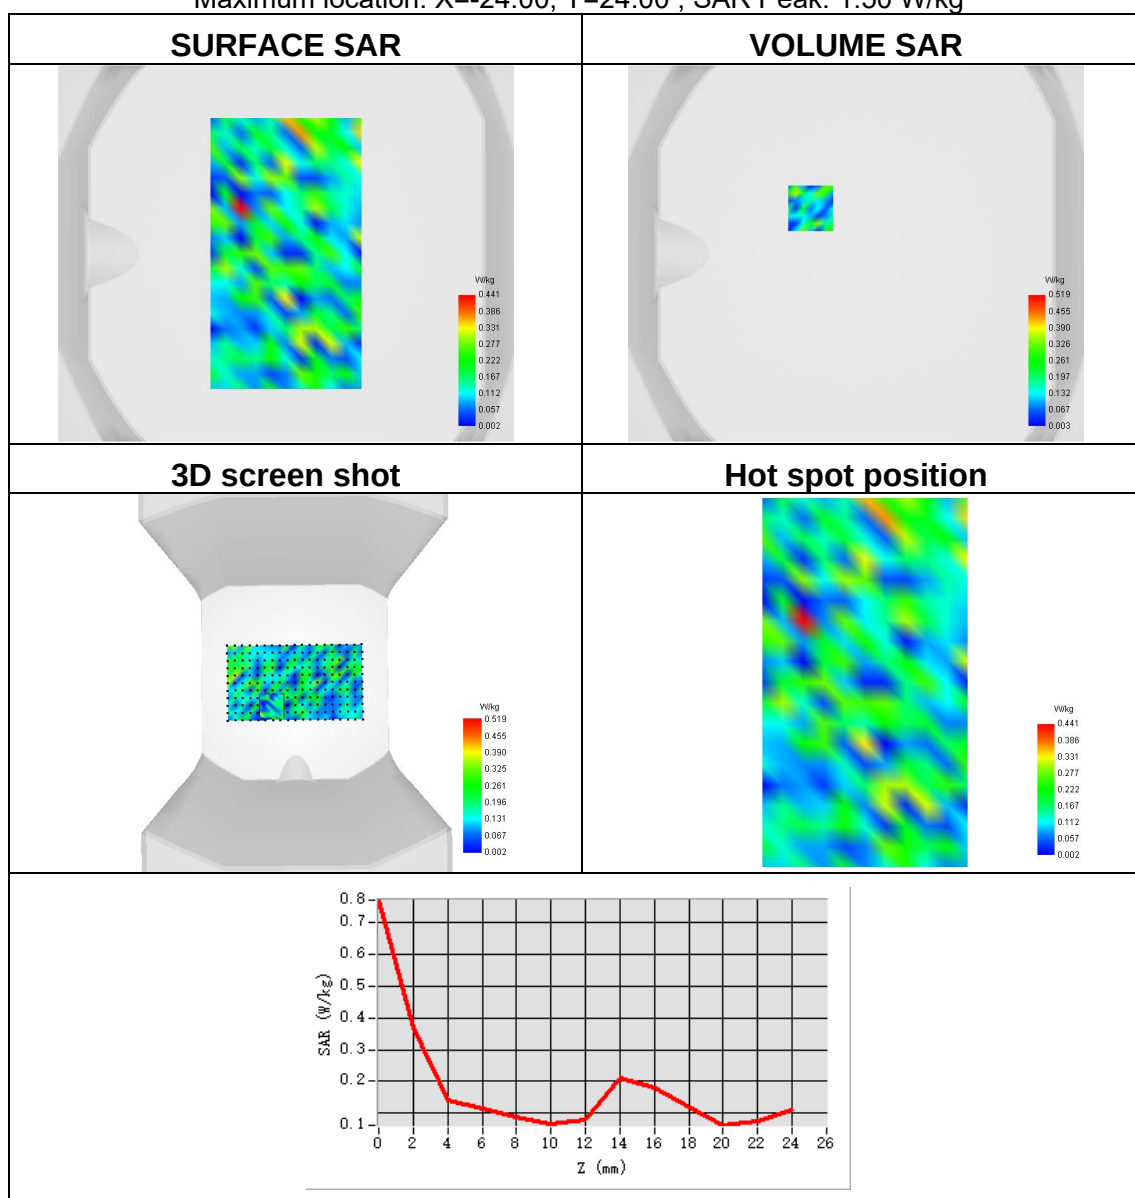




Plot 19:

Test Date	2024-01-27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 MIMO A
Signal	IEEE 802.11 ac
Frequency	5200
SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.294
Relative permittivity	36.45
Conductivity (S/m)	4.69
ConvF	1.95

Maximum location: X=9.00, Y=-30.00 ; SAR Peak: 1.48 W/kg

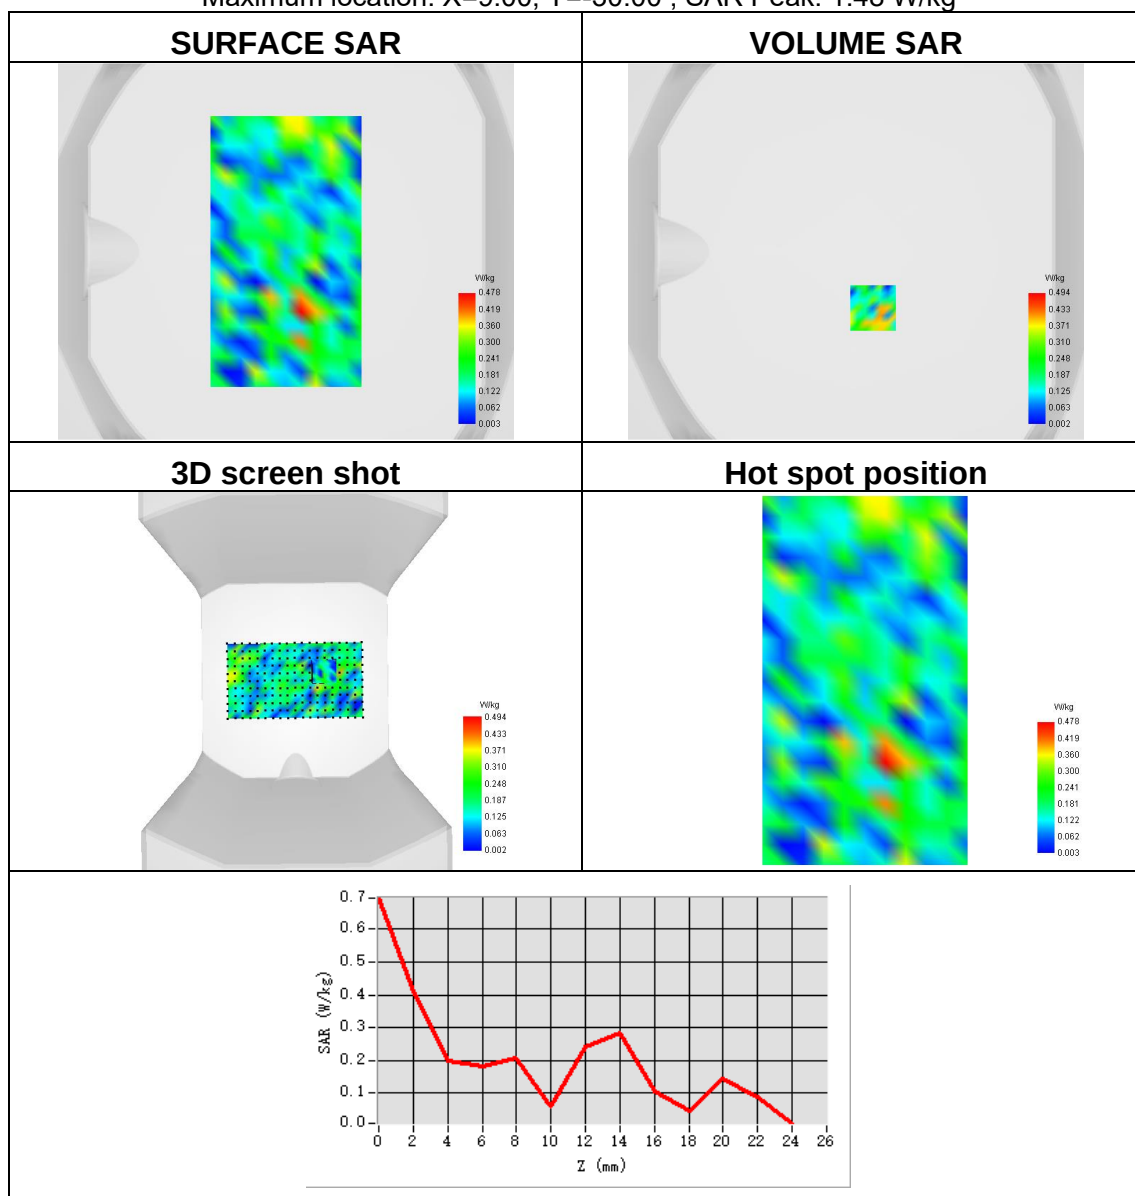




Plot 20:

Test Date	2024-01-27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 MIMO B
Signal	IEEE 802.11 ac
Frequency	5200
SAR 10g (W/Kg)	0.090
SAR 1g (W/Kg)	0.206
Relative permittivity	36.45
Conductivity (S/m)	4.69
ConvF	1.95

Maximum location: X=0.00, Y=32.00 ; SAR Peak: 0.98 W/kg

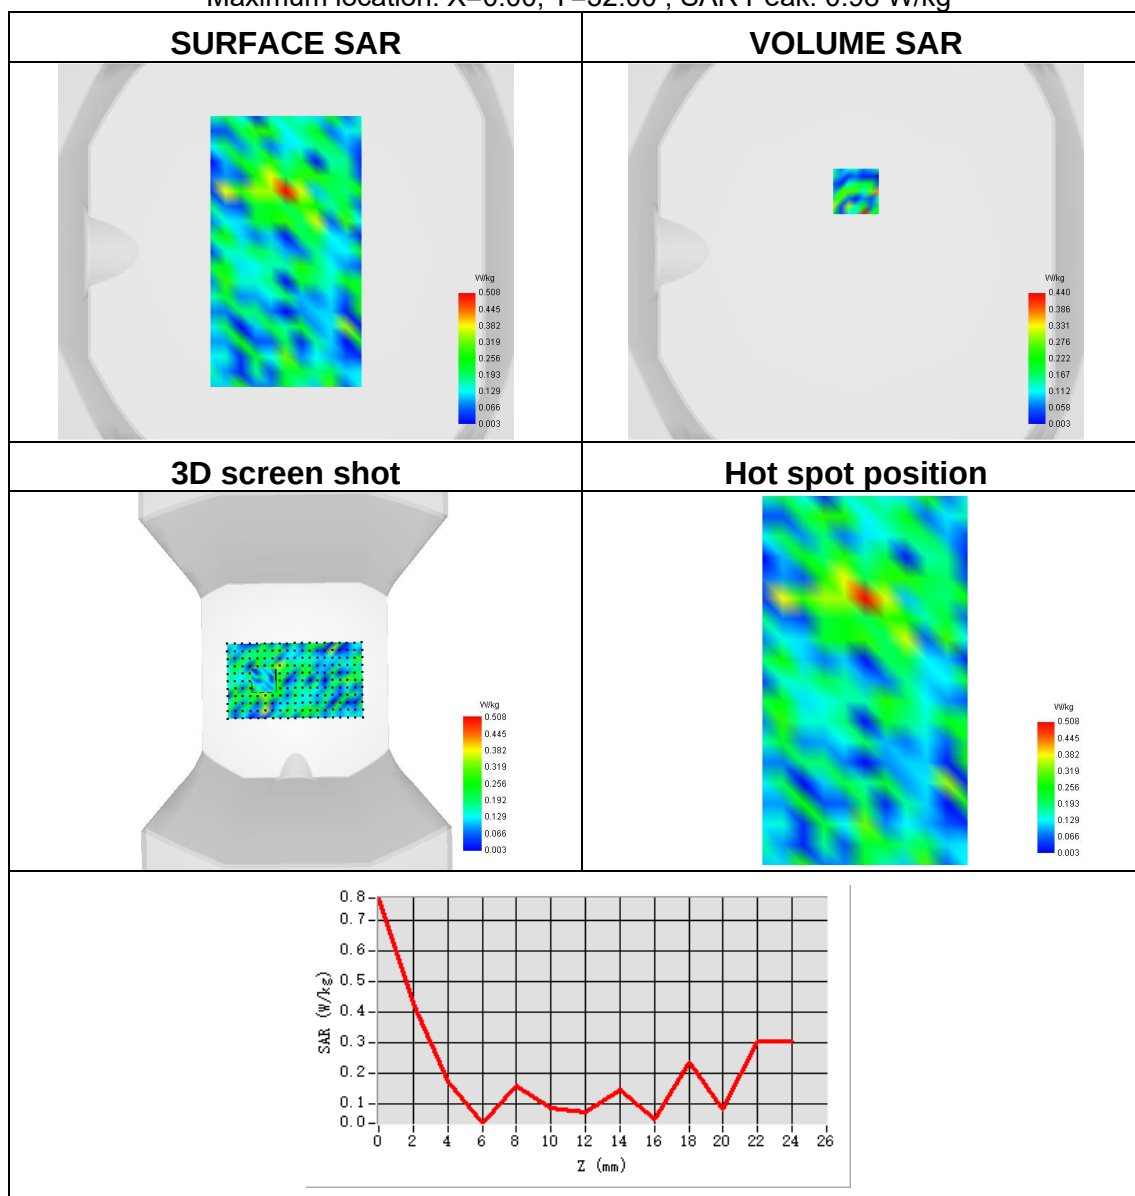




Plot 21:

Test Date	2024-01-27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 ANT A
Signal	IEEE 802.11 ac
Frequency	5785
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.154
Relative permittivity	36.72
Conductivity (S/m)	5.06
ConvF	1.73

Maximum location: X=-26.00, Y=-15.00 ; SAR Peak: 1.38 W/kg

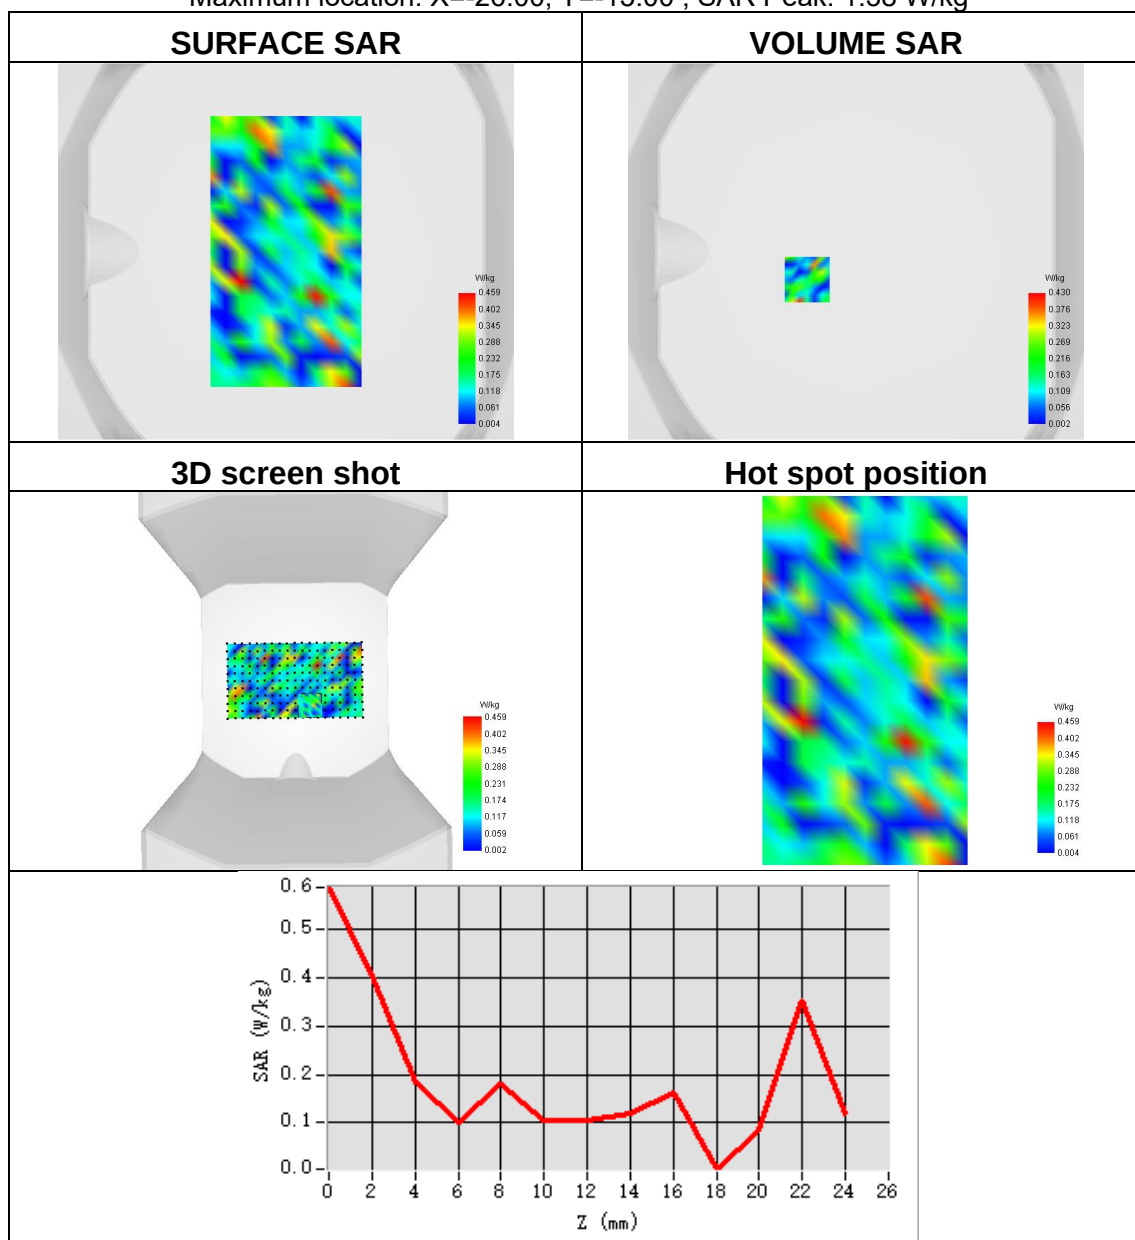




Plot 22:

Test Date	2024-01-27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 ANT B
Signal	IEEE 802.11 ac
Frequency	5745
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.180
Relative permittivity	36.72
Conductivity (S/m)	5.06
ConvF	1.73

Maximum location: X=0.00, Y=-64.00 ; SAR Peak: 1.47 W/kg

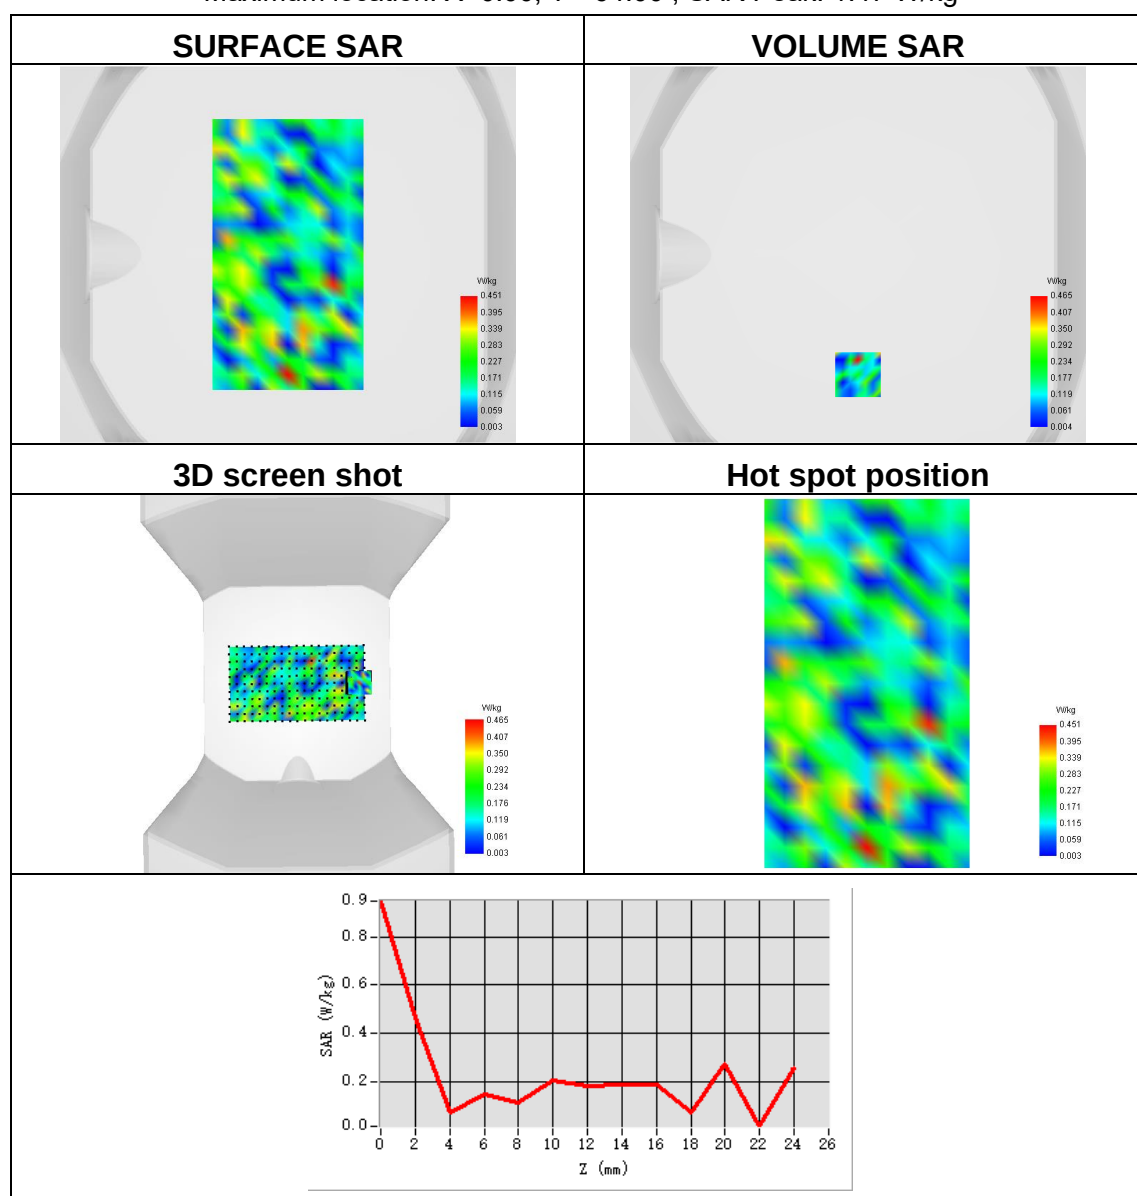




Plot 23:

Test Date	2024-01-27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 MIMO A
Signal	IEEE 802.11 ac
Frequency	5785
SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.226
Relative permittivity	36.72
Conductivity (S/m)	5.06
ConvF	1.73

Maximum location: X=-1.00, Y=17.00 ; SAR Peak: 1.86 W/kg

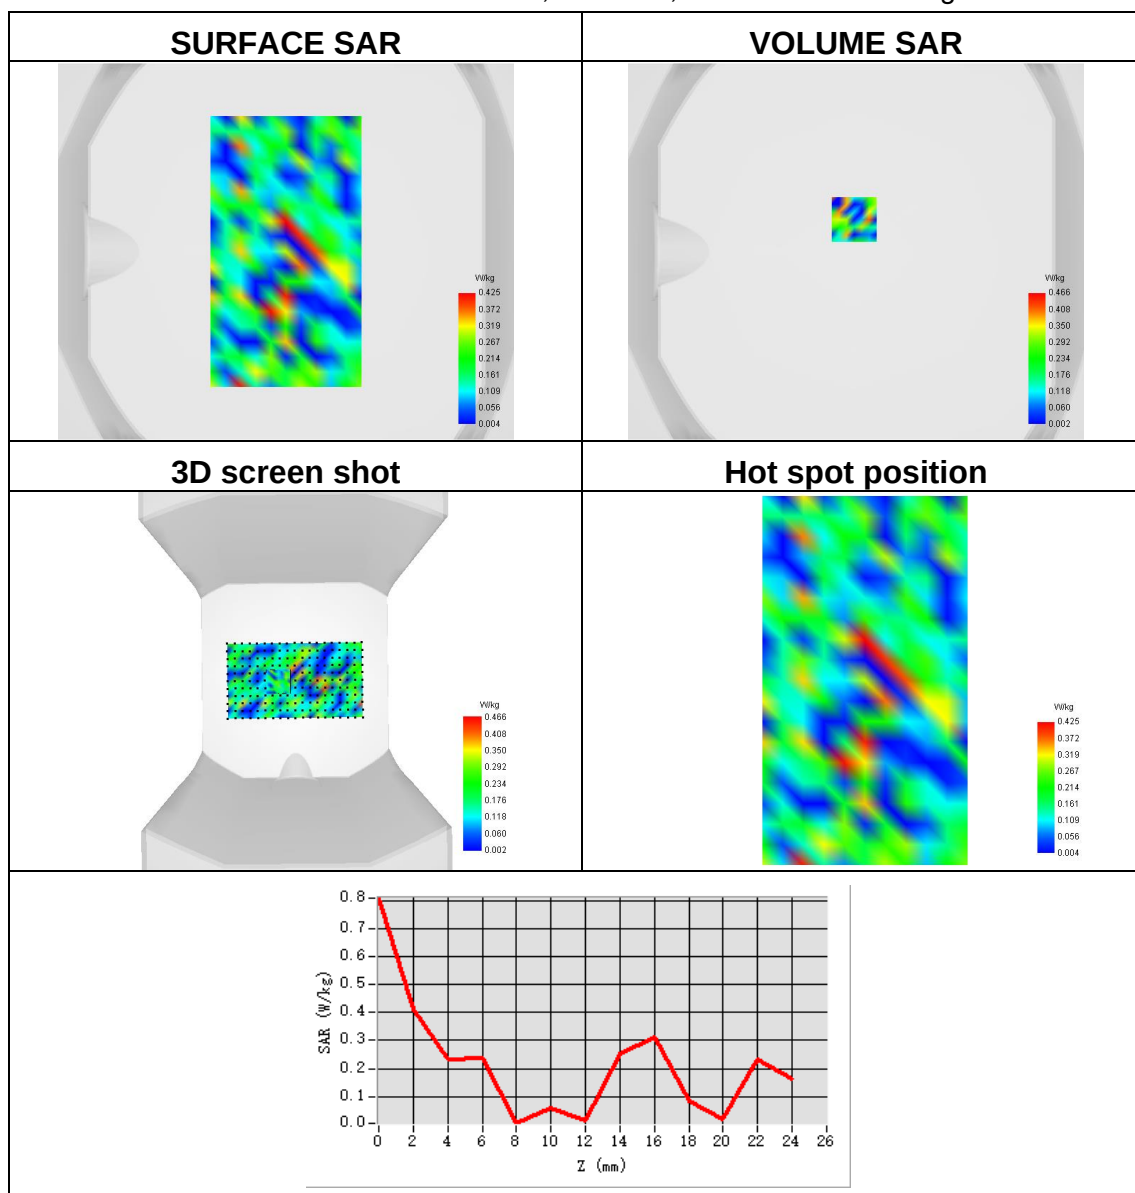




Plot 24:

Test Date	2024-01-27
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 MIMO B
Signal	IEEE 802.11 ac
Frequency	5785
SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.246
Relative permittivity	36.72
Conductivity (S/m)	5.06
ConvF	1.73

Maximum location: X=-32.00, Y=1.00 ; SAR Peak: 1.50 W/kg

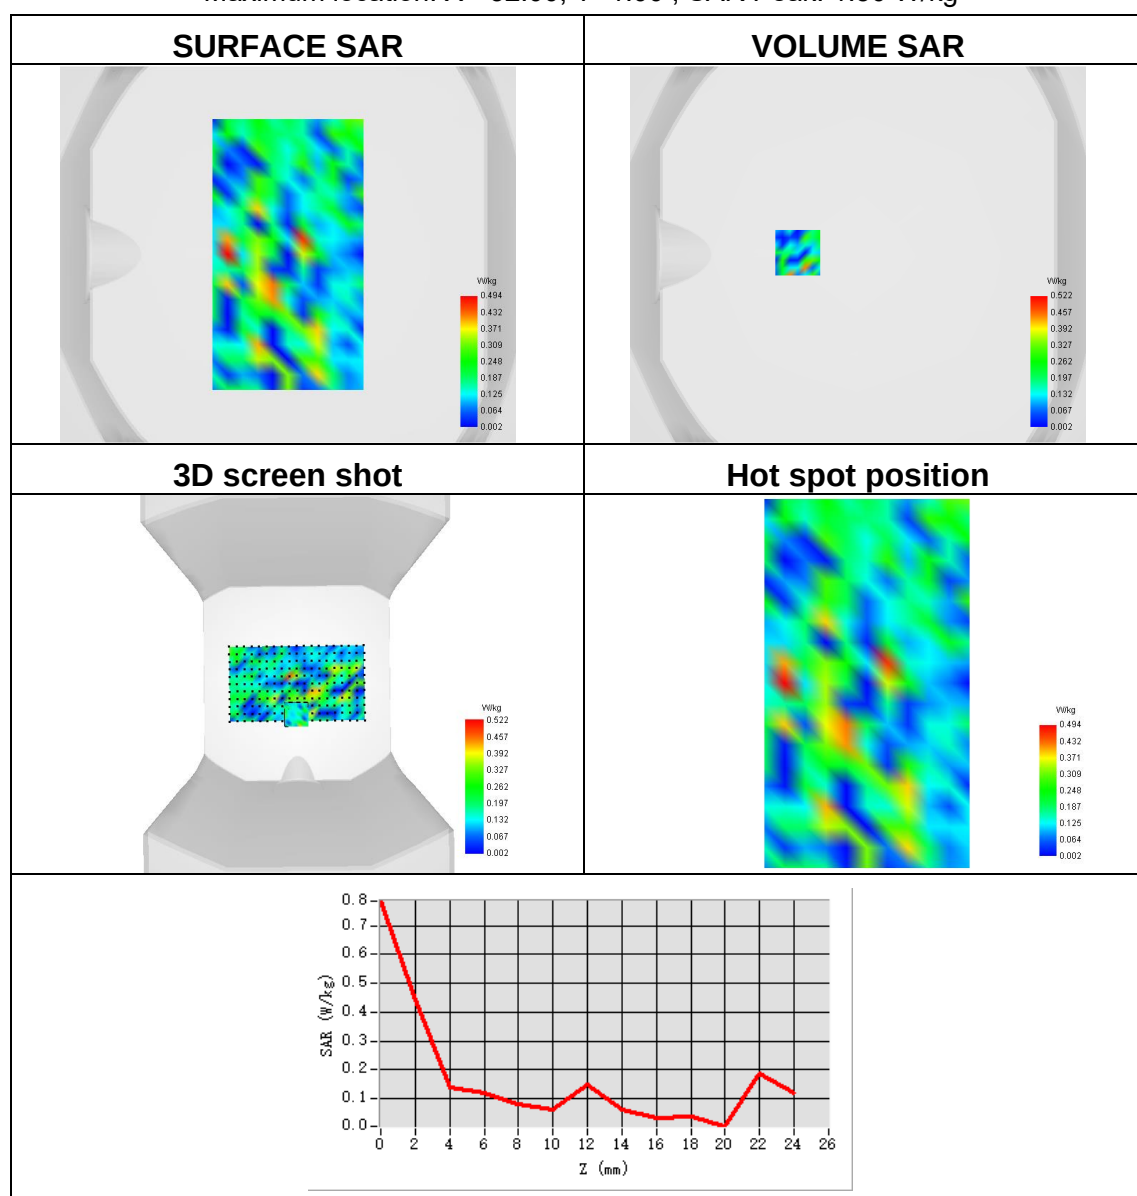



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※