


Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

### Plot 1

Date/Time: 12/20/2017 11:05:34 AM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Fio; Type: Serum Tester Frame Removed; Serial: IMEI:  
 Communication System: UID 10024 - DAB, GPRS-FDD (TDMA, GMSK, TN 0-1); Frequency: 1880 MHz  
 Medium: MSL1900\_Batch 110615-4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.527$  S/m;  $\epsilon_r = 53.288$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASy5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: Joseph/Lynn Air Temperature: 22.3±C; Medium Temperature: 21.3±C; Comments:  
 DASy Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(4.97, 4.97, 4.97); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection), z = 2.0  
 I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017  
 I Phantom: ELI v4.0\_Front; Type: QDOVA001BB; Serial: TP:xxxx  
 I DASy52 52.8.8(1222);  
 Flat-Section/Front 0mm/Area Scan (141x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.167 W/kg  
 Flat-Section/Front 0mm/Area Scan (15x13x1): Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.138 W/kg  
 Flat-Section/Front 0mm/Zoom Scan (8x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 2.518 V/m; Power Drift = 0.63 dB  
 Peak SAR (extrapolated) = 0.202 W/kg  
 SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.083 W/kg  
 Maximum value of SAR (measured) = 0.153 W/kg  
 Flat-Section/Front 0mm/Zoom Scan (36x41x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm  
 Reference Value = 2.518 V/m; Power Drift = 0.63 dB  
 Penetration depth = 11.57 (11.47, 12.01) [mm]  
 Maximum value of SAR (interpolated) = 0.202 W/kg

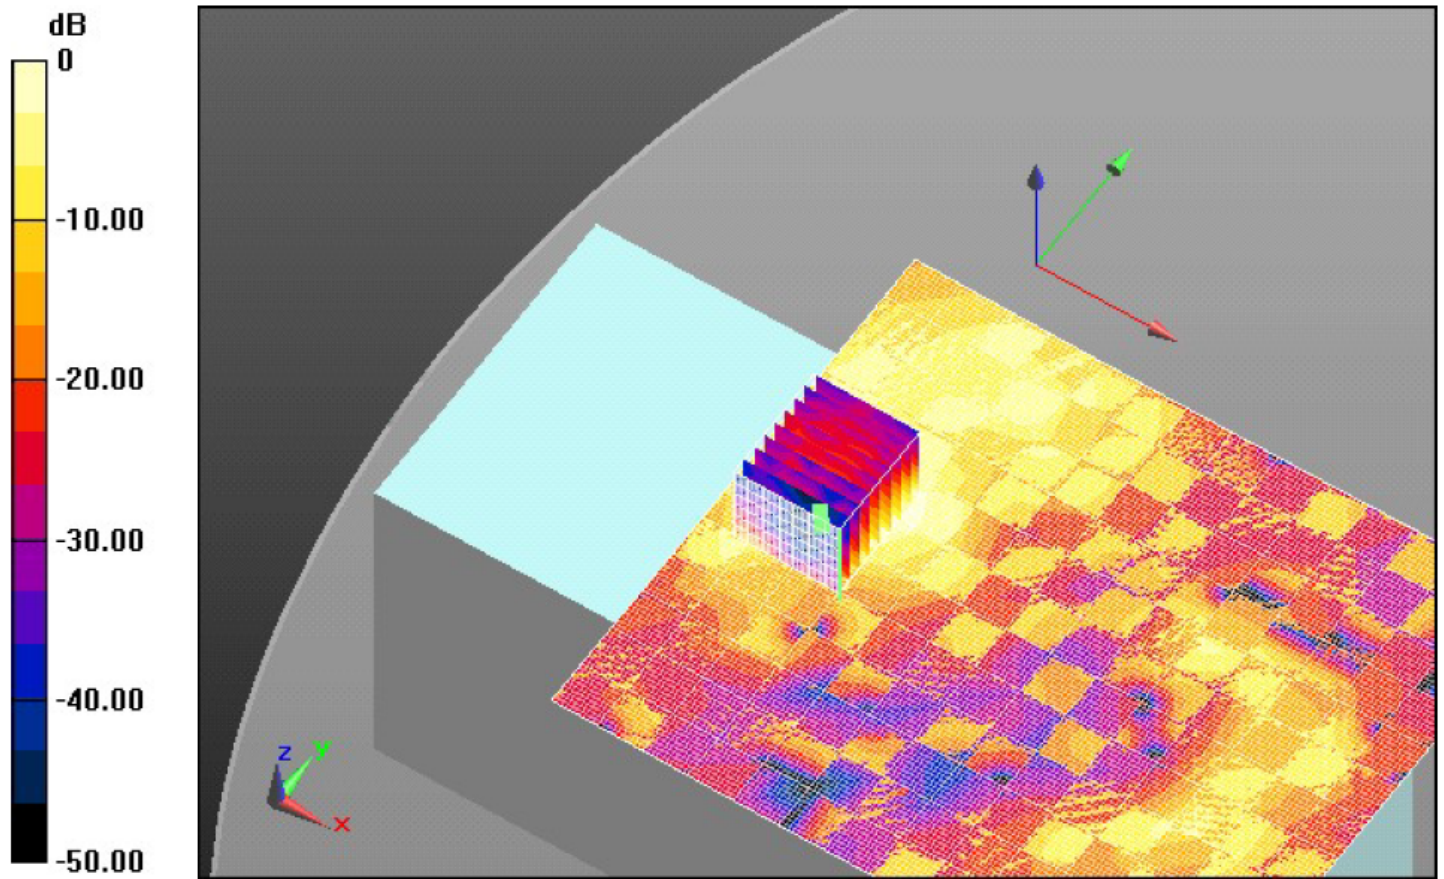


0 dB = 0.167 W/kg = -7.77 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

## Plot 2

Date/Time: 12/20/2017 12:42:05 PM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Fio; Type: Serum Tester Frame Removed; Serial: IMEI:  
 Communication System: UID 10024 - DAB, GPRS-FDD (TDMA, GMSK, TN 0-1); Frequency: 836.6 MHz  
 Medium: MSL900\_Batch 110518-7  
 Medium parameters used: f = 837 MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 53.086$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: Joseph and Lynn Air Temperature: 23.2°C; Medium Temperature: 21.6°C; Comments:  
 DASYS Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(6.38, 6.38, 6.38); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection), z = 2.0  
 I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017  
 I Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092  
 I DASYS52 52.8.8(1222);  
 Flat-Section/Front 0mm/Area Scan (141x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.139 W/kg  
 Flat-Section/Front 0mm/Area Scan (15x13x1): Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.138 W/kg  
 Flat-Section/Front 0mm/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 1.928 V/m; Power Drift = 0.48 dB  
 Peak SAR (extrapolated) = 0.175 W/kg  
 SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.080 W/kg  
 Maximum value of SAR (measured) = 0.140 W/kg  
 Flat-Section/Front 0mm/Zoom Scan (36x36x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm  
 Reference Value = 1.928 V/m; Power Drift = 0.48 dB  
 Penetration depth = 13.48 (13.41, 14.70) [mm]  
 Maximum value of SAR (interpolated) = 0.175 W/kg

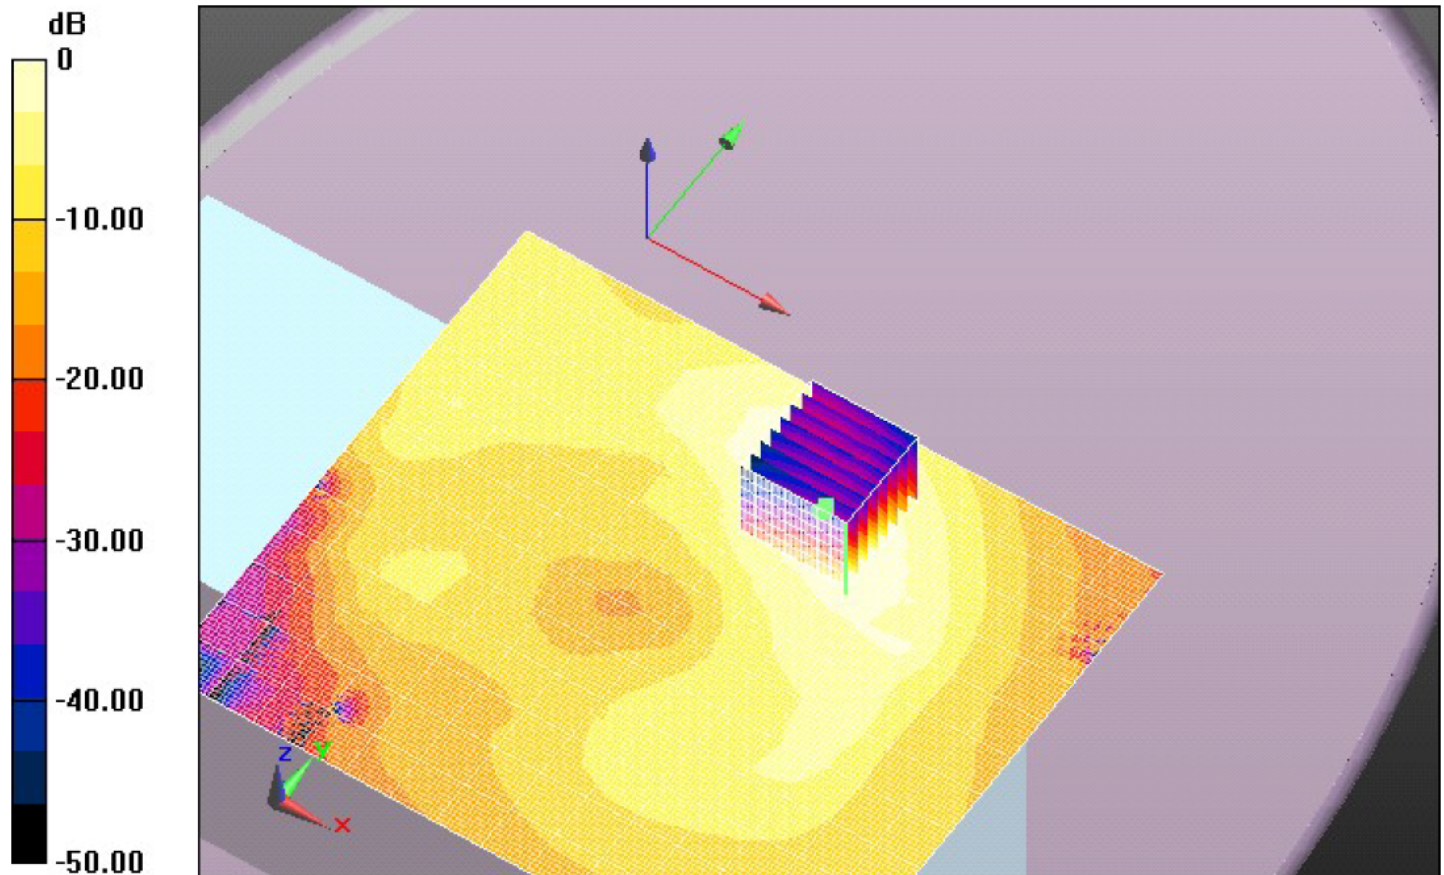


0 dB = 0.139 W/kg = -8.58 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

### Plot 3

Date/Time: 10/27/2017 3:16:51 PM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Fio; Type: Serum Tester Frame Removed; Serial: IMEI:  
 Communication System: UID 0, UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel 8.4) (0); Frequency: 1880 MHz  
 Medium: MSL1900\_Batch 110615-4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 54.487$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASy5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: Lynn Air Temperature: 24.2°C; Medium Temperature: 21.6°C; Comments:  
 DASy Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(4.97, 4.97, 4.97); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection), z = 2.0, 32.0  
 I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017  
 I Phantom: ELI v4.0\_Front; Type: QDOVA001BB; Serial: TP:xxxx  
 I DASy52 52.8.8(1222);  
 Flat-Section/Front 0mm/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.235 W/kg  
 Flat-Section/Front 0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 2.405 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 0.350 W/kg  
 SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.132 W/kg  
 Maximum value of SAR (measured) = 0.262 W/kg

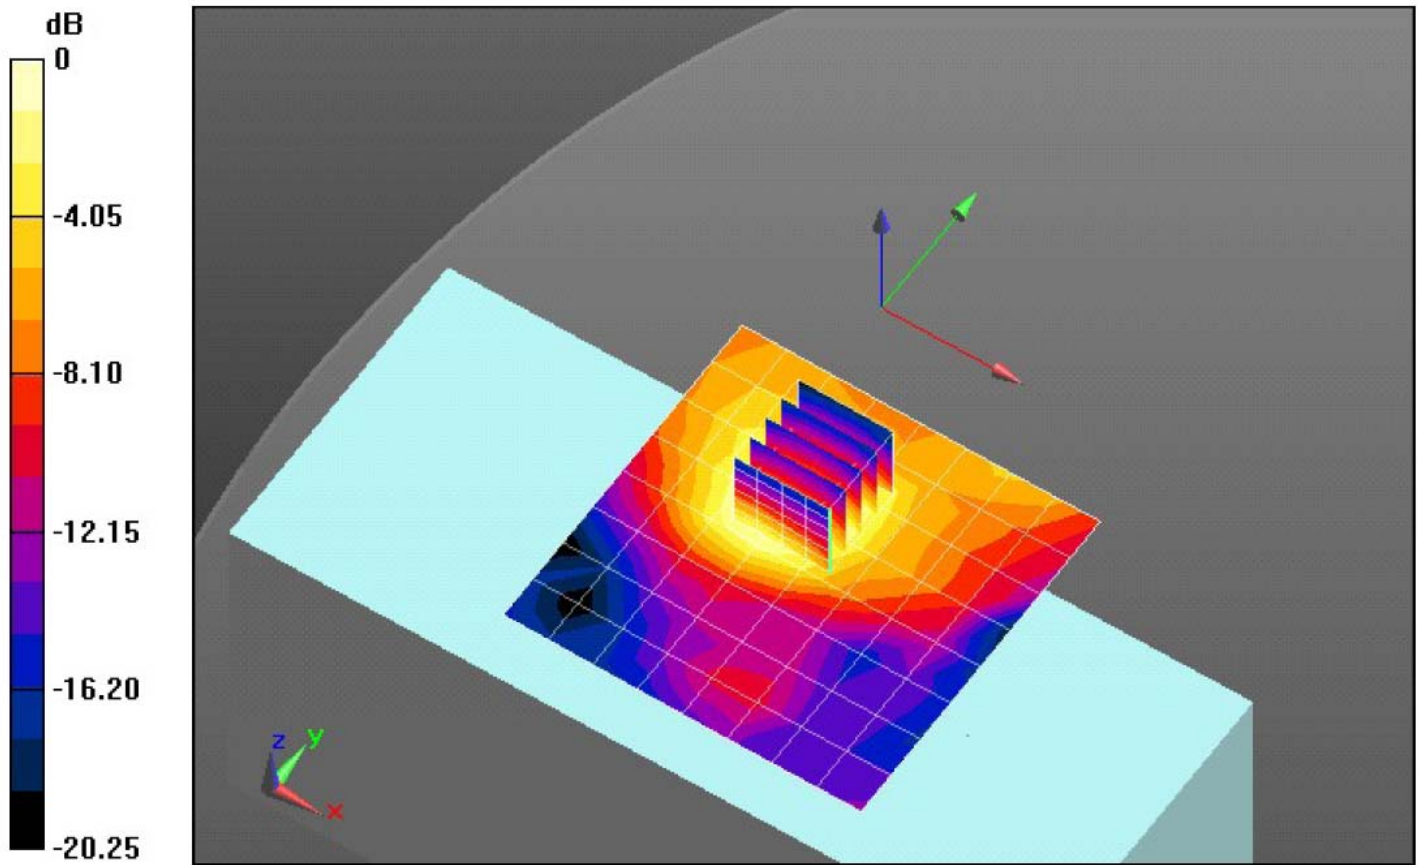


0 dB = 0.235 W/kg = -6.28 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

### Plot 4

Date/Time: 10/30/2017 6:08:50 PM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Fio; Type: Serum Tester Frame Removed; Serial: IMEI:  
 Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz  
 Medium: MSL1750\_Batch 100824-2  
 Medium parameters used (extrapolated):  $f = 1732.6$  MHz;  $\sigma = 1.434$  S/m;  $\epsilon_r = 54.758$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: Lynn/Joseph Air Temperature: 26 °C Medium Temperature: 22.8°C; Comments:  
 DASY Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(5.15, 5.15, 5.15); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017  
 I Phantom: ELI v4.0\_Front; Type: QDOVA001BB; Serial: TP:xxxx  
 I DASY52 52.8.8(1222);  
 Flat-Section/Front 0mm/Area Scan (9x9x1): Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
 Maximum value of SAR (measured) = 0.186 W/kg  
 Flat-Section/Front 0mm/Zoom Scan (6x6x7)/Cube 0: Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
 Reference Value = 2.597 V/m; Power Drift = 0.78 dB  
 Peak SAR (extrapolated) = 0.292 W/kg  
 SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.107 W/kg  
 Maximum value of SAR (measured) = 0.215 W/kg

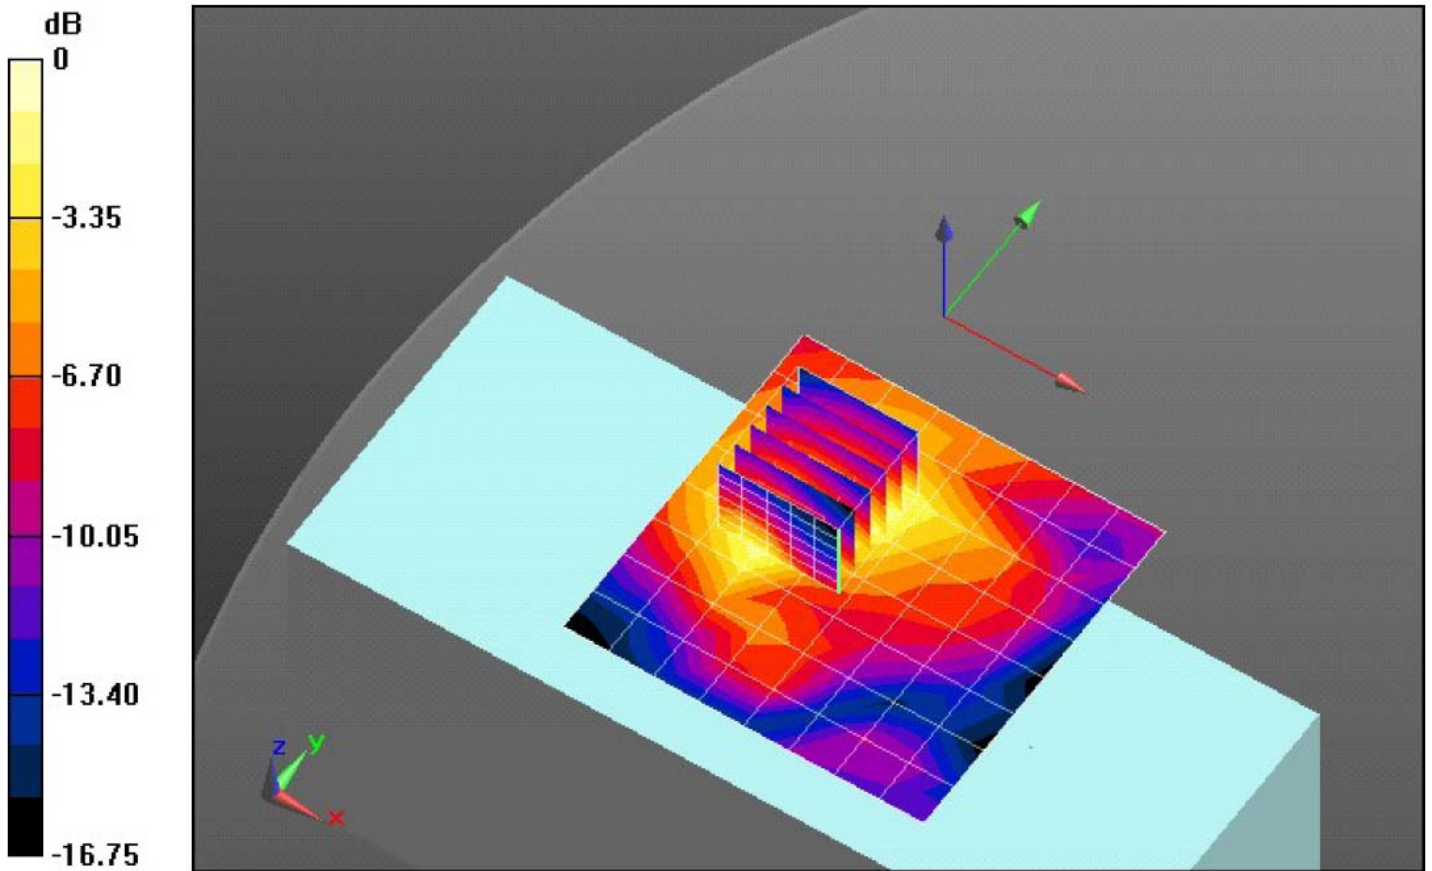


0 dB = 0.186 W/kg = -7.31 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

### Plot 5

Date/Time: 1/8/2018 2:57:17 PM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Fio; Type: Serum Tester Frame Removed; Serial: IMEI:  
 Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz  
 Medium: MSL900\_Batch 110518-7  
 Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.987$  S/m;  $\epsilon_r = 52.68$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASy5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: Lynn/Joseph Air Temperature: 22.8 C Medium Temperature: 21.2°C; Comments:  
 DASy Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(6.38, 6.38, 6.38); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017  
 I Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092  
 I DASy52 52.8.8(1222);  
 Flat-Section 2/Front 0mm/Area Scan (15x9x1): Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
 Maximum value of SAR (measured) = 0.0721 W/kg  
 Flat-Section 2/Front 0mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
 Reference Value = 1.355 V/m; Power Drift = 0.76 dB  
 Peak SAR (extrapolated) = 0.0960 W/kg  
 SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.044 W/kg  
 Maximum value of SAR (measured) = 0.0762 W/kg

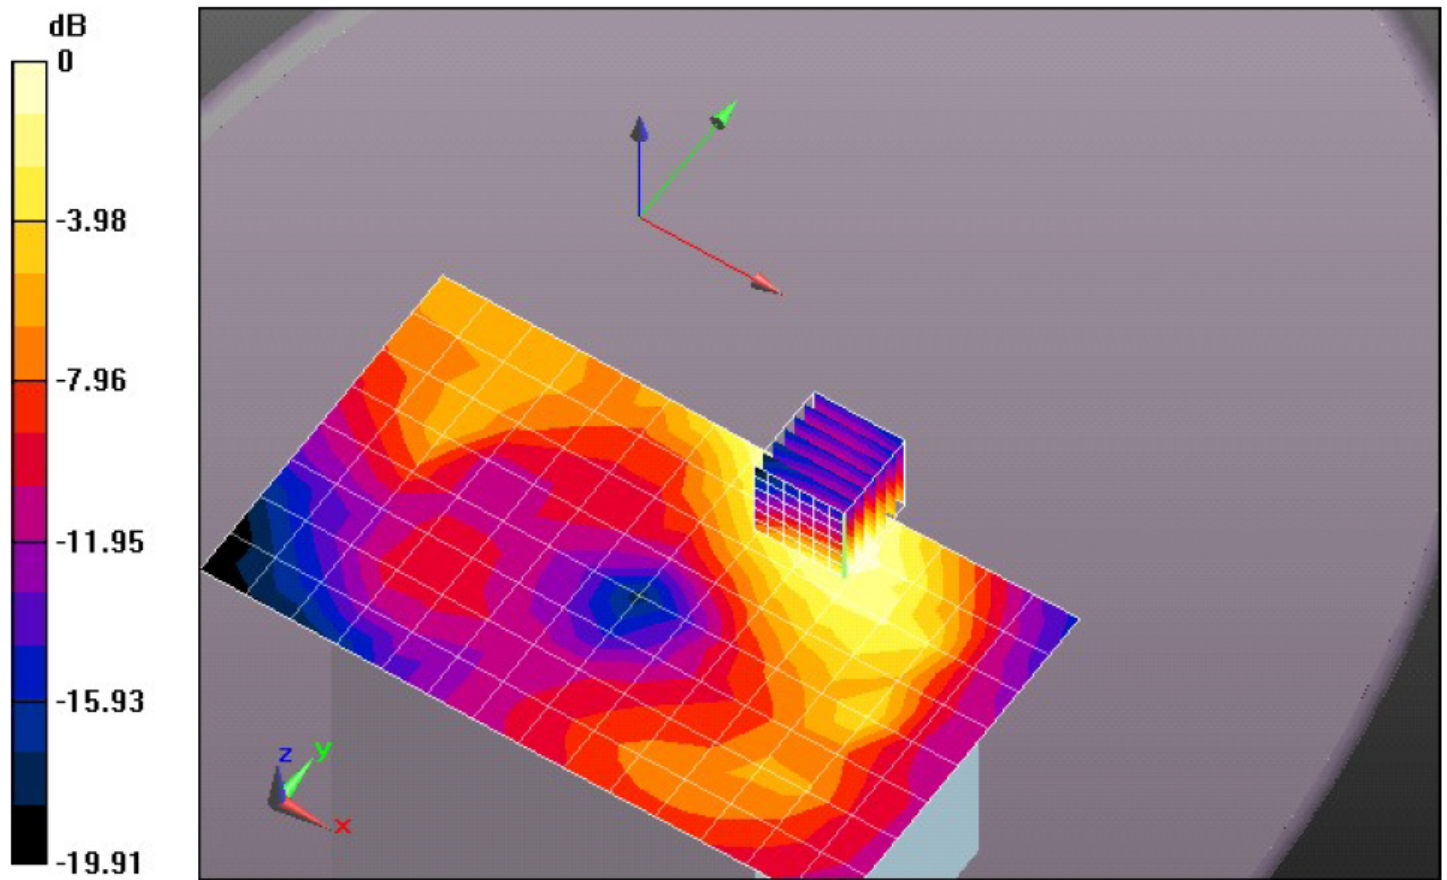


0 dB = 0.0721 W/kg = -11.42 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

### Plot 6

Date/Time: 1/31/2018 11:13:41 AM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Fio; Type: Serum Tester Frame Removed; Serial: IMEI:  
 Communication System: UID 0, 802.11bgn\_100% Duty Cycle (0); Frequency: 2437 MHz  
 Medium: MSL2450\_Batch 110615-1  
 Medium parameters used: f = 2437 MHz;  $\sigma = 1.933$  S/m;  $\epsilon_r = 52.717$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: Joseph Air Temperature: 21.0°C Medium Temperature: 20.7°C; Comments:  
 DASYS Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(4.6, 4.6, 4.6); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection), z = 2.0, 32.0  
 I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017  
 I Phantom: ELI v4.0\_Front; Type: QDOVA001BB; Serial: TP:xxxx  
 I DASYS52 52.8.8(1222);  
 Flat-Section/Front 0mm/Area Scan (13x11x1): Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.0464 W/kg  
 Flat-Section/Front 0mm/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 1.835 V/m; Power Drift = -0.35 dB  
 Peak SAR (extrapolated) = 0.0810 W/kg  
 SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.024 W/kg  
 Maximum value of SAR (measured) = 0.0505 W/kg

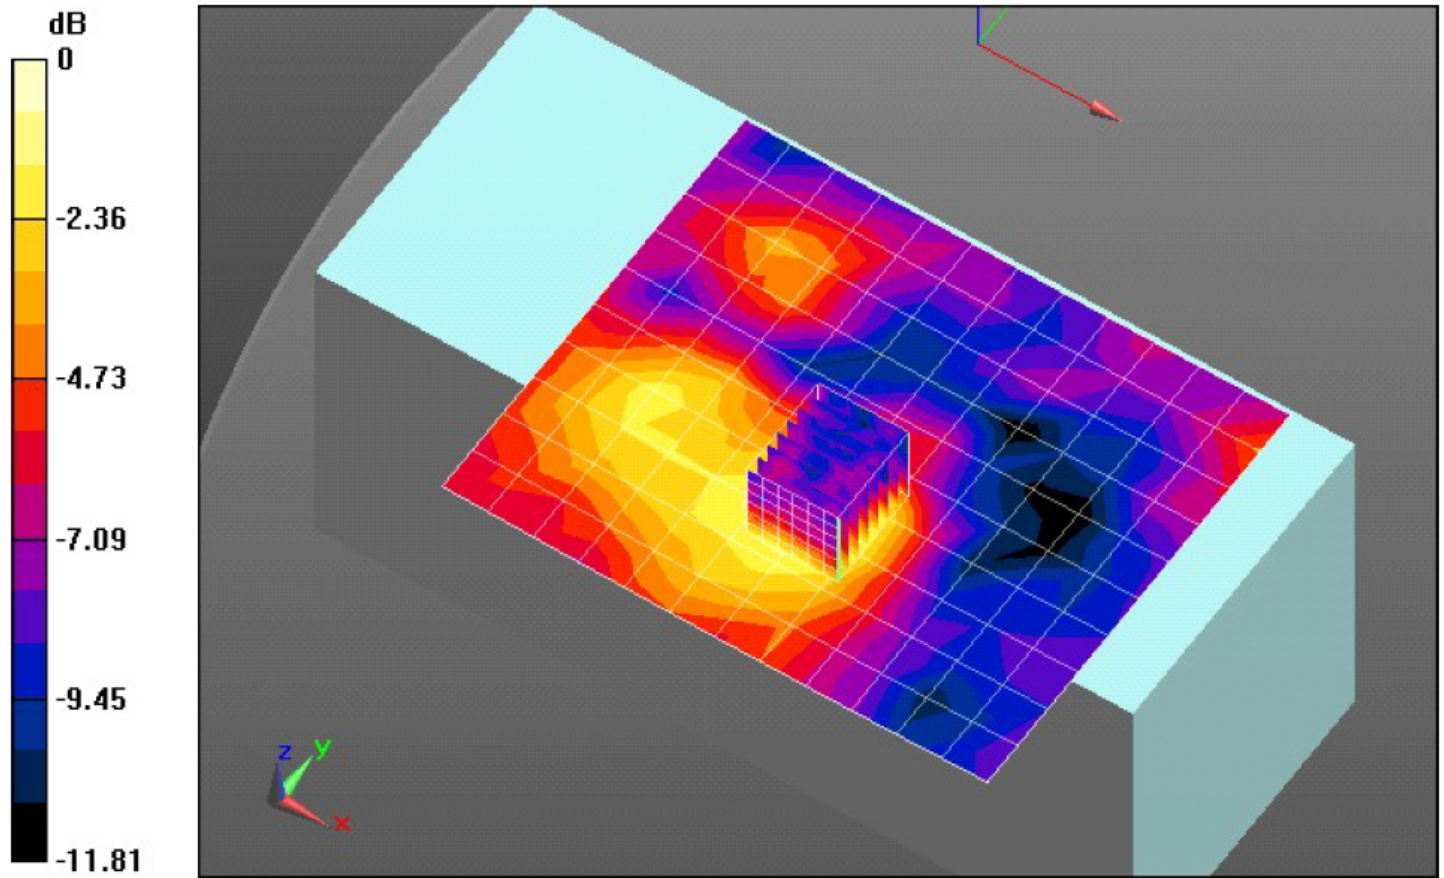

0 dB = 0.0464 W/kg = -13.33 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

### Plot 7

Date/Time: 1/8/2018 1:41:47 PM

Test Laboratory: Cetecom Inc. SAR 1 Lab

DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:xxx

Communication System: UID 0, CW (0); Frequency: 900 MHz

Medium: MSL900\_Batch 110518-7

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.999$  S/m;  $\epsilon_r = 52.554$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

Procedure Notes: Test Technician: John; Air Temperature: 21.8°C; Medium Temperature: 21°C; Comments: ;

DASY Configuration:

I Probe: ES3DV3 - SN3323; ConvF(6.31, 6.31, 6.31); Calibrated: 5/12/2017;

I Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 32.0$

I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017

I Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092

I DASY52 52.8.8(1222);

System Performance Check at Frequencies above 1 GHz/OBS\_d=15mm, Pin=250mW, dist=2.0mm (ES-Probe)/Zoom Scan (7x7x7)


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.34 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.83 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 3.10 W/kg

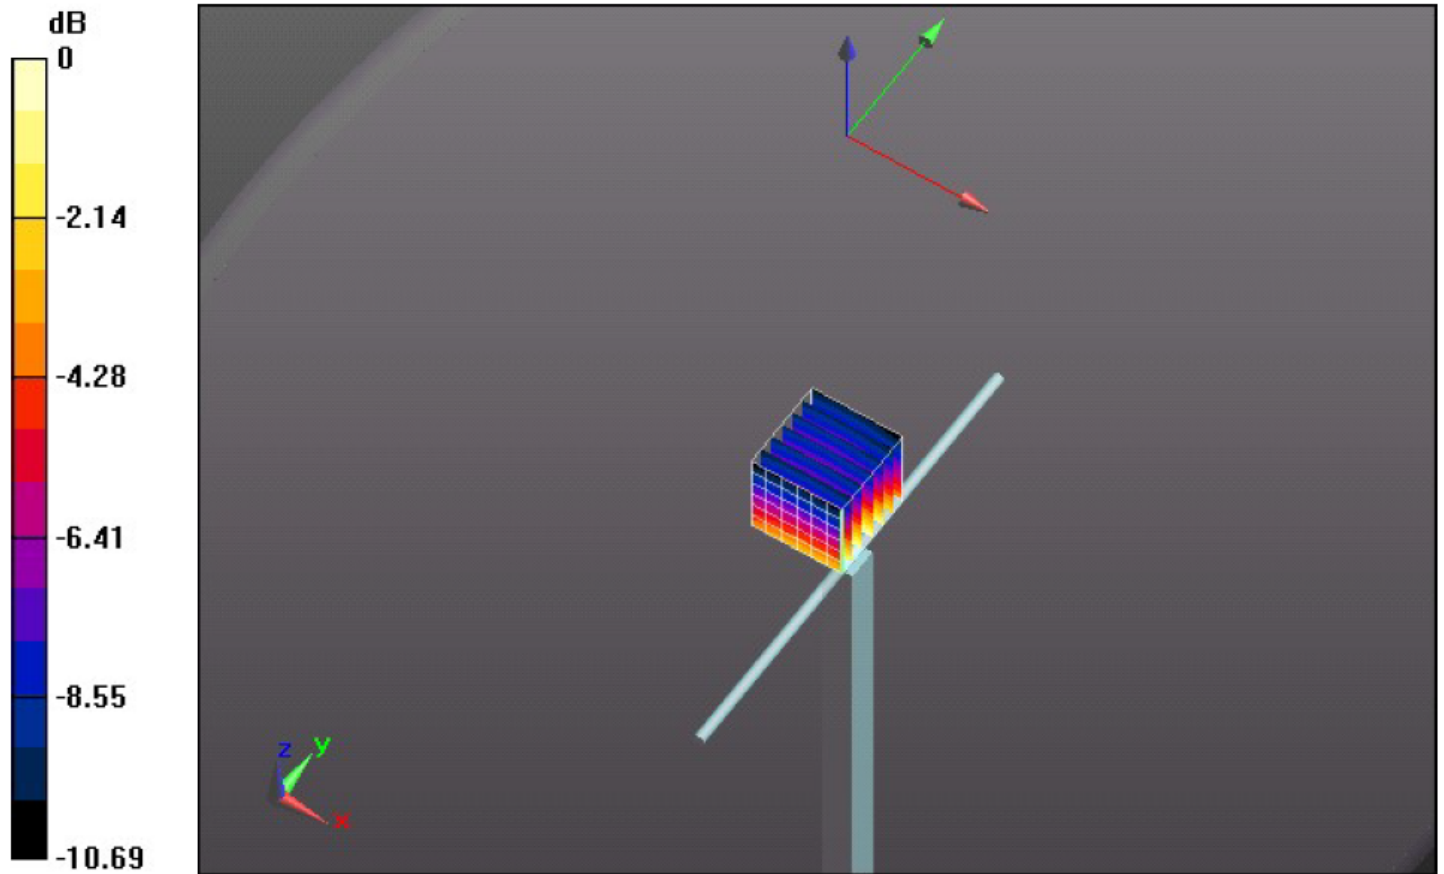


0 dB = 3.10 W/kg = 4.92 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

### Plot 8

Date/Time: 10/30/2017 4:49:48 PM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Dipole 1750 MHz - D1750V2 - SN1045\_April 2016; Type: D1750V2; Serial: D1750V2 - SN:1045  
 Communication System: UID 0, CW; Frequency: 1750 MHz  
 Medium: MSL1750\_Batch 100824-2  
 Medium parameters used: f = 1750 MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 54.699$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: John; Air Temperature: 22.2°C; Medium Temperature: 21.2°C; Comments: ;  
 DASYS Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(5.15, 5.15, 5.15); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection), z = 32.0  
 I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017  
 I Phantom: ELI v4.0\_Front; Type: QDOVA001BB; Serial: TP:xxxx  
 I DASYS2 52.8.8(1222);  
 System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=.1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)  
 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 80.90 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 14.6 W/kg  
 SAR(1 g) = 8.45 W/kg; SAR(10 g) = 4.52 W/kg  
 Maximum value of SAR (measured) = 10.6 W/kg

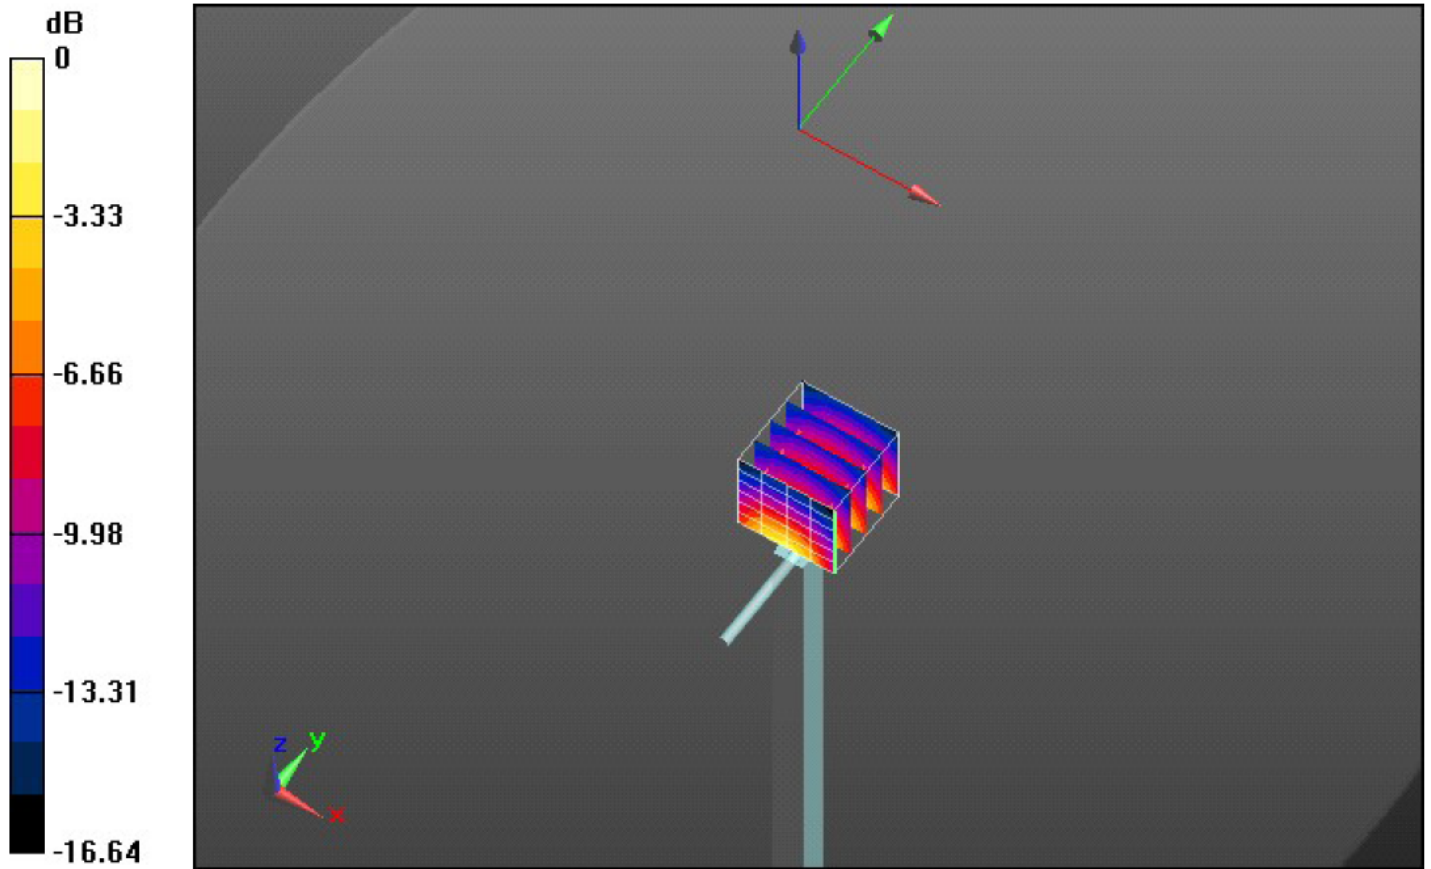


0 dB = 10.6 W/kg = 10.23 dBW/kg



Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	

### Plot 9

Date/Time: 12/19/2017 6:22:58 PM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Dipole 1900 MHz - D1900V2 - SN5d135\_April 2016; Type: D1900V2; Serial: D1900V2 - SN:5d135  
 Communication System: UID 0, CW (0); Frequency: 1900 MHz  
 Medium: MSL1900\_Batch 110615-4  
 Medium parameters used: f = 1900 MHz;  $\sigma = 1.588$  S/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: Joseph; Air Temperature: 22.6C; Medium Temperature: 21.2C; Comments: ;  
 DASYS Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(4.97, 4.97, 4.97); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection), z = 32.0  
 I Electronics: DAE4 Sn1233; Calibrated: 3/17/2014  
 I Phantom: ELI v4.0\_Front; Type: QDOVA001BB; Serial: TP:xxxx  
 I DASYS2 52.8.(1222);  
 System Performance Check at Frequencies below 1 GHz/OBS\_d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)  
 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 85.67 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 16.3 W/kg  
 SAR(1 g) = 9.19 W/kg; SAR(10 g) = 4.84 W/kg  
 Maximum value of SAR (measured) = 11.6 W/kg

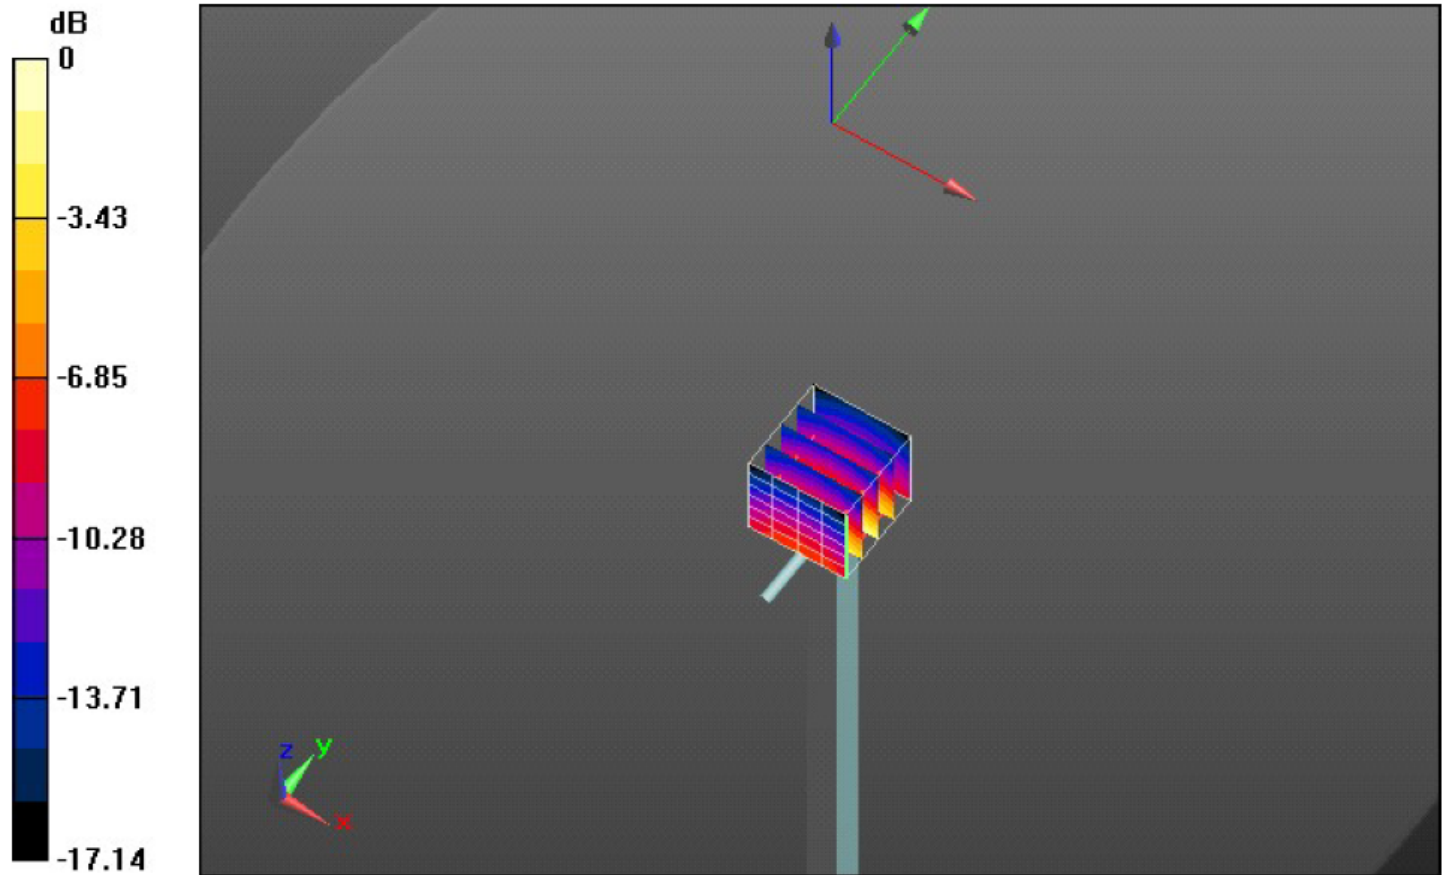


0 dB = 11.6 W/kg = 10.64 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b>
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	


### Plot 10

Date/Time: 1/30/2018 6:32:04 PM  
 Test Laboratory: Cetecom Inc. SAR 1 Lab  
 DUT: Dipole 2450 MHz D2450V2; Type: D2450V2 - SN:xxx  
 Communication System: UID 0, CW (0); Frequency: 2450 MHz  
 Medium: MSL2450\_Batch 110530-1  
 Medium parameters used: f = 2450 MHz;  $\sigma = 1.95$  S/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
 Procedure Notes: Test Technician: Joseph; Air Temperature: 20.7°C; Medium Temperature: 20.5°C; Comments: ;

DASY Configuration:  
 I Probe: ES3DV3 - SN3323; ConvF(4.6, 4.6, 4.6); Calibrated: 5/12/2017;  
 I Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), z = 2.0, 32.0  
 I Electronics: DAE4 Sn1266; Calibrated: 5/16/2017  
 I Phantom: ELI v4.0\_Front; Type: QDOVA001BB; Serial: TP:xxxx  
 I DASYS2 52.8.8(1222);  
 System Performance Check at Frequencies above 1 GHz/OBS\_d=15mm, Pin=250mW, dist=2.0mm (ES-Probe)/Area Scan (4x4x1):  
 Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 13.5 W/kg  
 System Performance Check at Frequencies above 1 GHz/OBS\_d=15mm, Pin=250mW, dist=2.0mm (ES-Probe)/Zoom Scan (7x7x7)  
 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 89.49 V/m; Power Drift = 0.02 dB  
 Peak SAR (extrapolated) = 26.3 W/kg  
 SAR(1 g) = 12.1 W/kg; SAR(10 g) = 5.58 W/kg  
 Maximum value of SAR (measured) = 18.6 W/kg

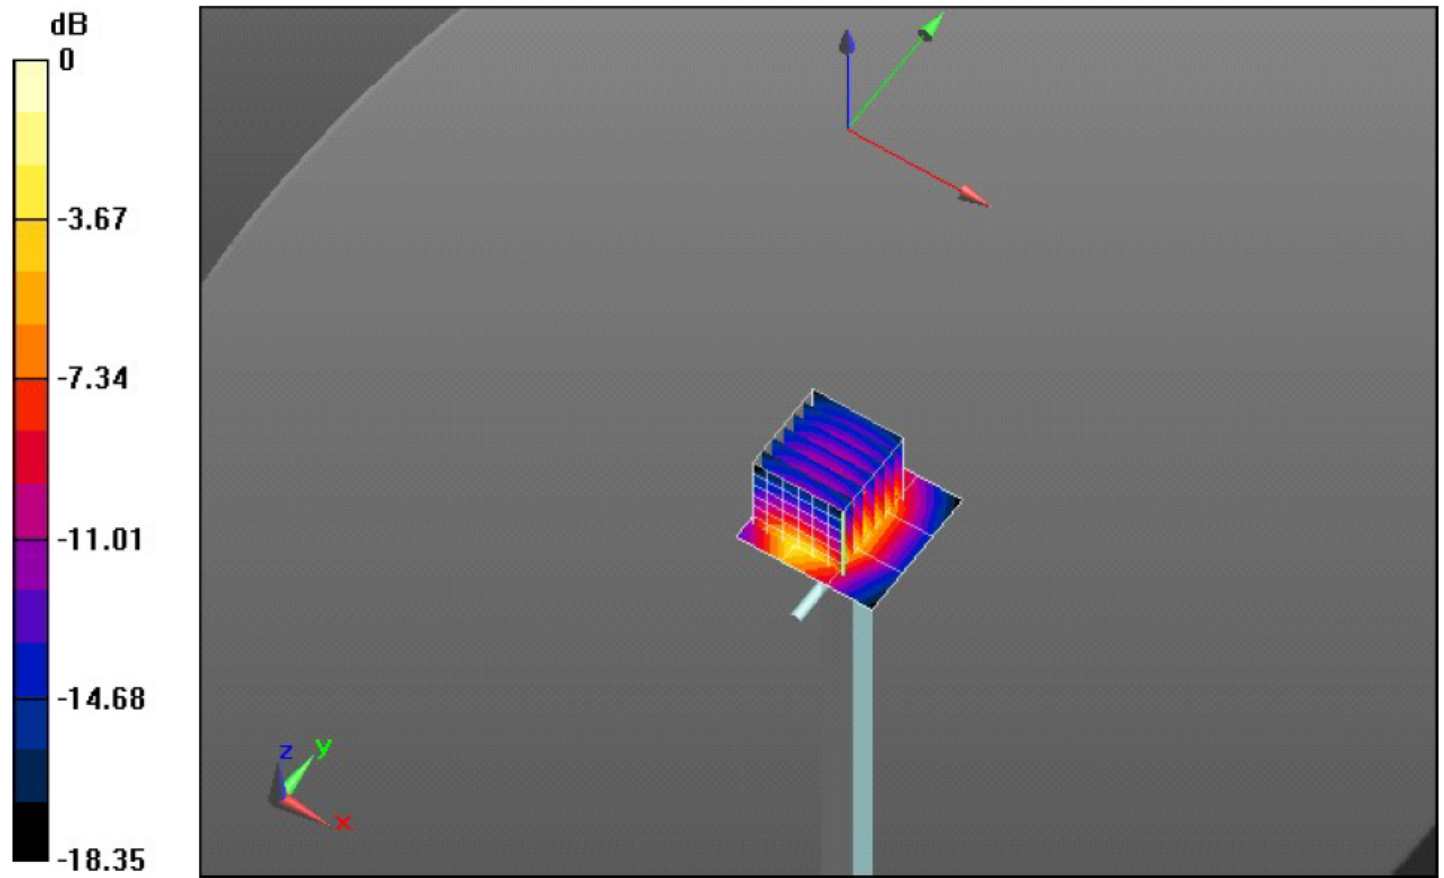

0 dB = 13.5 W/kg = 11.29 dBW/kg

Test Report #:	SAR-FIOIN-002-17001_Appendix_A	FCC ID:	2ANVA-V200	<b>CETECOM™</b> 
Date of Report:	2018-02-12	IC Cert. No.:	22342-V200	