


Revision	Description of Revision	Issued by	Date
00-00	Original Release		
00-01	Update DieLine		20190617

259.6 ± 0.2

49.2 ± 0.2

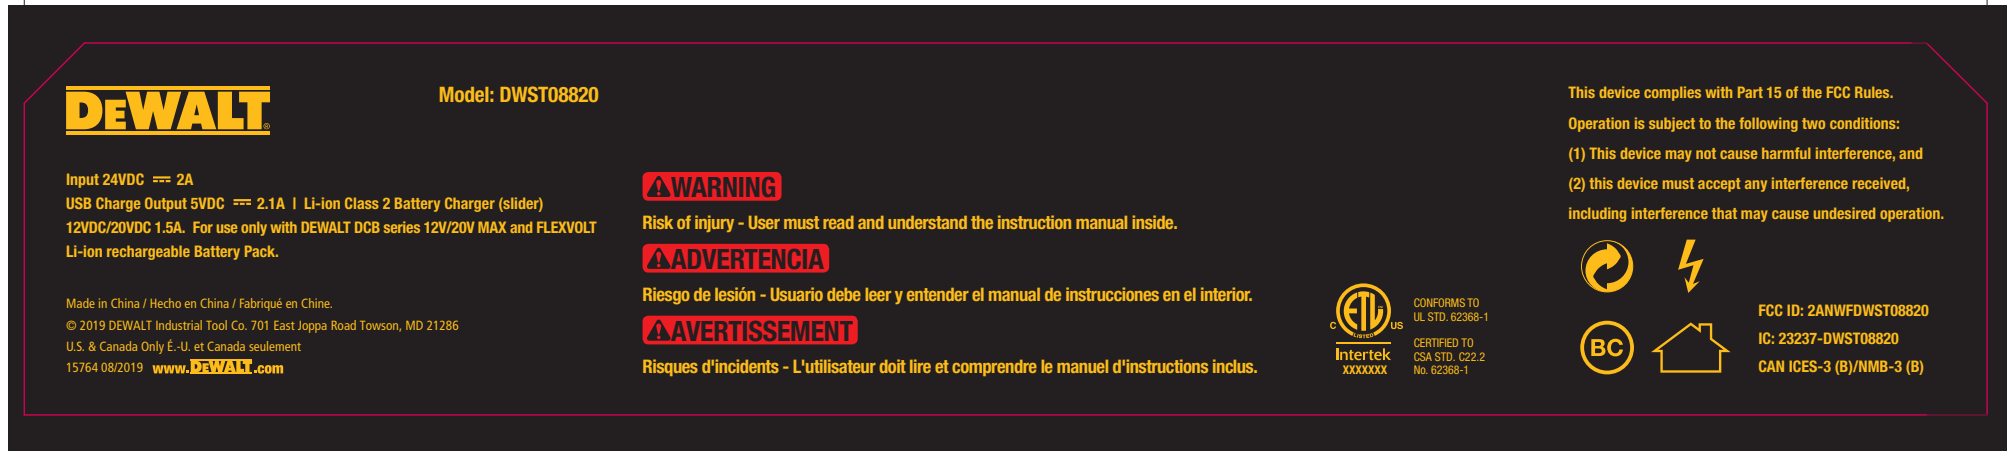

**DEWALT**

Model: DWST08820

Input 24VDC  $\approx$  2A  
 USB Charge Output 5VDC  $\approx$  2.1A | Li-ion Class 2 Battery Charger (slider)  
 12VDC/20VDC 1.5A. For use only with DEWALT DCB series 12V/20V MAX and FLEXVOLT  
 Li-ion rechargeable Battery Pack.

**⚠ WARNING**

Risk of injury - User must read and understand the instruction manual inside.

**⚠ ADVERTENCIA**

Riesgo de lesión - Usuario debe leer y entender el manual de instrucciones en el interior.

**⚠ AVERTISSEMENT**

Risques d'incidents - L'utilisateur doit lire et comprendre le manuel d'instructions inclus.

Made in China / Hecho en China / Fabriqué en Chine.  
 © 2019 DEWALT Industrial Tool Co. 701 East Joppa Road Towson, MD 21286  
 U.S. & Canada Only É.-U. et Canada seulement  
 15764 08/2019 [www.DEWALT.com](http://www.DEWALT.com)

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.



CONFORMS TO  
 UL STD. 62368-1  
 CERTIFIED TO  
 CSA STD. C22.2  
 No. 62368-1



FCC ID: 2ANWFDWST08820  
 IC: 23237-DWST08820  
 CAN ICES-3 (B)/NMB-3 (B)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		THIRD ANGLE PROJECTION		Product label		Model	Safed	
0° 0.5mm ± 0.05	0.5° 2.99mm ± 0.06			Customer		Unit	mm	
3° 9.99mm ± 0.07	10° 29.99mm ± 0.1			Drawn	Zyf	20190614	TS no.	PL-STY001F00101-C
30° 99.99mm ± 0.15	100° 299mm ± 0.2	Checked			File no.	TS-WI-ENG-F-PL-STY001F00101-C	Scale	1:1
300° ± 0.3		Approved			TS Audio Technology Co.,LTD		Doc. Rev.	
Material	80g合成纸 背网格胶	Do not scale the drawing!			Sheet	1 of 1		
Color	3C							
Finishing	过触感哑膜							

Label Location

