

# TEST REPORT

No.: 17-1-0099901T07a

According to:  
**FCC Regulations**  
 Part 18.305

**ISED Regulations**  
 RSS-216, Issue 2

for

Renesas Electronics Europe GmbH

Evaluation Board  
 Y-Charger-IT

FCC: 2ANWT-CHARGE-IT  
 ISED: 23343-YCHARGEIT  
 PMN: CHARGE-IT  
 HVIN: Y-CHARGE-IT  
 FVIN: FW-Y-CHARGE-IT

| Laboratory Accreditation and Listings                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                       |                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>Deutsche<br>Akkreditierungsstelle<br>D-PL-12047-01-01<br><br>Accredited EMC-Test Laboratory                                                                                                                                                                                                                                         | <br>Industry Canada<br>Reg. No.: 3462D-1<br>Reg. No.: 3462D-2<br>Reg. No.: 3462D-3 | <br>Voluntary Controls for Electromagnetic<br>Emissions<br><br>Reg. No.:<br>R-20013, C-20009,<br>T-20006, G-20013 |
| <br>AUTHORIZED<br>RF LABORATORY                                                                                                                                                                                                                                                                                                         | <br>Authorized<br>Test Lab<br>Lab Code: 20011130-00                                | <br>MRA US-EU 0003                                                                                                |
| accredited according to DIN EN ISO/IEC 17025                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                       |                                                                                                                                                                                                        |
| <p align="center"> <b>CETECOM GmbH</b><br/>           Laboratory Radio Communications &amp; Electromagnetic Compatibility<br/>           Im Teelbruch 116 • 45219 Essen • Germany<br/>           Registered in Essen, Germany, Reg. No.: HRB Essen 8984<br/>           Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964<br/>           E-mail: info@cetecom.com • Internet: www.cetecom.com         </p> |                                                                                                                                                                       |                                                                                                                                                                                                        |
| Laboratory Accreditation and Listings                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                       |                                                                                                                                                                                                        |

## TABLE OF CONTENTS

|                                                                                       |                    |
|---------------------------------------------------------------------------------------|--------------------|
| <b>1. SUMMARY OF TEST RESULTS.....</b>                                                | <b>3</b>           |
| 1.1. Tests overview according CFR47, Part 18 .....                                    | 3                  |
| <b>2. ADMINISTRATIVE DATA .....</b>                                                   | <b>4</b>           |
| 2.1. Identification of the testing laboratory .....                                   | 4                  |
| 2.2. Test location .....                                                              | 4                  |
| 2.3. Organizational items .....                                                       | 4                  |
| 2.4. Applicant's details .....                                                        | 4                  |
| 2.5. Manufacturer's details .....                                                     | 4                  |
| <b>3. EQUIPMENT UNDER TEST (EUT).....</b>                                             | <b>5</b>           |
| 3.1. Technical data of main EUT declared by applicant .....                           | 5                  |
| 3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....        | 5                  |
| 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....             | 5                  |
| 3.4. EUT set-ups .....                                                                | 6                  |
| 3.5. EUT operating modes .....                                                        | 6                  |
| <b>4. DESCRIPTION OF TEST SYSTEM SET-UP'S .....</b>                                   | <b>7</b>           |
| 4.1. Test system set-up for AC power-line conducted emission measurements .....       | 7                  |
| 4.2. Test system set-up for radiated magnetic field measurements below 30 MHz.....    | 7                  |
| 4.3. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz ..... | 8                  |
| <b>5. MEASUREMENTS .....</b>                                                          | <b>10</b>          |
| 5.1. General Limit - Conducted emissions on AC-Power lines .....                      | 10                 |
| 5.2. General Limit - Radiated field strength emissions.....                           | 11                 |
| 5.3. RF-Parameter: 99% occupied Bandwidth.....                                        | 14                 |
| 5.4. Measurement uncertainties .....                                                  | 16                 |
| <b>6. ACCREDITATION DETAILS OF CETECOM'S LABORATORIES AND TEST SITES .....</b>        | <b>17</b>          |
| <b>7. INSTRUMENTS AND ANCILLARY.....</b>                                              | <b>18</b>          |
| 7.1. Used equipment "CTC" .....                                                       | 18                 |
| <b>8. VERSIONS OF TEST REPORTS (CHANGE HISTORY) .....</b>                             | <b>21</b>          |
| <b>Table of annex</b> The listed attachments are an integral part of this report      | <b>Total pages</b> |
| Annex 2: Measurement diagrams (separate document) TR17_1_0099901T07a_A1               | 12                 |
| Annex 2: External photographs of EUT (separate document) TR17_1_0099901T06a_A2        | 5                  |
| Annex 3: Test set-up photographs (separate document) TR17_1_0099901T06a_A3            | 6                  |

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) is a wireless power transfer (WPT) source with nominal operating frequency 125 kHz.

### 1.1. Tests overview according CFR47, Part 18

| No. of Diagram group | Test Cases                                             | Port                              | References, Standards & Limits |                             |                                                                | EUT set-up | EUT op-mode | Result |
|----------------------|--------------------------------------------------------|-----------------------------------|--------------------------------|-----------------------------|----------------------------------------------------------------|------------|-------------|--------|
|                      |                                                        |                                   | FCC                            | ISED                        | Limits                                                         |            |             |        |
| 1                    | AC Power Lines<br>Conducted emissions<br>0.15 – 30 MHz | AC Power lines                    | §18.307                        | RSS-216<br>EN55011:<br>2016 | <input checked="" type="checkbox"/> consumer devices – Class B | 1          | 1, 1+2      | Passed |
| 2                    | Radiated emissions<br>9 kHz-30 MHz                     | Cabinet + Inter-connecting cables | §18.305                        | RSS-216<br>EN55011:<br>2016 | <input checked="" type="checkbox"/> Any non ISM frequency      | 1          | 1, 1+2      | Pass   |
| 3                    | Radiated emissions<br>30 MHz-1 GHz                     | Cabinet + Inter-connecting cables | §18.305                        | RSS-216<br>EN55011:<br>2016 | <input checked="" type="checkbox"/> Any non ISM frequency      | 1          | 1, 1+2      | Pass   |

.....  
Dipl.-Ing. Rachid Acharkaoui  
Responsible for test section

.....  
Dipl.-Ing. Ninovic Perez  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

|                                     |                                                      |
|-------------------------------------|------------------------------------------------------|
| Company name:                       | CETECOM GmbH                                         |
| Address:                            | Im Teelbruch 116<br>45219 Essen - Kettwig<br>Germany |
| Responsible for testing laboratory: | Dipl.-Ing. Rachid Acharkaoui                         |
| Deputy:                             | Dipl.-Ing. Niels Jeß                                 |

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

|               |                                                           |
|---------------|-----------------------------------------------------------|
| Company name: | see chapter 2.1. Identification of the testing laboratory |
|---------------|-----------------------------------------------------------|

### 2.3. Organizational items

|                               |                     |
|-------------------------------|---------------------|
| Responsible for test report : | Dipl.-Ing. N. Perez |
| Project leader:               | Dipl.-Ing N. Perez  |
| Receipt of EUT:               | 2017-28-06          |
| Date(s) of test:              | 2017-08-22          |
| Date of report:               | 2017-12-12          |
| -----                         |                     |
| Version of template:          | 13.02               |

### 2.4. Applicant's details

|                   |                                                   |
|-------------------|---------------------------------------------------|
| Applicant's name: | Renesas Electronics Europe GmbH                   |
| Address:          | Arcadiastr. 10<br>40472 Düsseldorf<br><br>Germany |
| Contact person:   | Mr. Dirk Naurath                                  |

### 2.5. Manufacturer's details

|                      |                                |
|----------------------|--------------------------------|
| Manufacturer's name: | please see Applicant's details |
| Address:             | please see Applicant's details |

### 3. Equipment under test (EUT)

#### 3.1. Technical data of main EUT declared by applicant

|                                        |                                                                                                                                                                   |                                                    |                                                                        |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------------------------------------|
| Type of modulation (packet types)      | ASK (Amplitude Shift Keying) 2 kbps                                                                                                                               |                                                    |                                                                        |
| Number of channels (USA/Canada -bands) | 1 nominal channel at 125 kHz                                                                                                                                      |                                                    |                                                                        |
| Antenna Type                           | <input checked="" type="checkbox"/> Integrated<br><input type="checkbox"/> External, no RF- connector<br><input type="checkbox"/> External, separate RF-connector |                                                    |                                                                        |
| Antenna Gain                           | No information from applicant                                                                                                                                     |                                                    |                                                                        |
| EUT A WPC Coil Type                    | Primary Inductive TX coil                                                                                                                                         |                                                    |                                                                        |
| MAX Field strength (radiated):         | -22.30 dBμV/m Quasi Peak@300 m distance                                                                                                                           |                                                    |                                                                        |
| Installed options                      | <input checked="" type="checkbox"/> Bluetooth LE (not tested within this test report)                                                                             |                                                    |                                                                        |
| Power supply                           | <input checked="" type="checkbox"/> DC power only: 5 V DC over AE1                                                                                                |                                                    |                                                                        |
| Special EMI components                 | --                                                                                                                                                                |                                                    |                                                                        |
| EUT sample type                        | <input type="checkbox"/> Production                                                                                                                               | <input checked="" type="checkbox"/> Pre-Production | <input type="checkbox"/> Engineering                                   |
| Firmware                               |                                                                                                                                                                   | <input type="checkbox"/> for normal use            | <input checked="" type="checkbox"/> Special version for test execution |
| FCC label attached                     | <input type="checkbox"/> yes                                                                                                                                      | <input checked="" type="checkbox"/> no             |                                                                        |

#### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

| Short description*) | EUT              | Type        | S/N serial number | HW hardware status | SW software status |
|---------------------|------------------|-------------|-------------------|--------------------|--------------------|
| EUT A               | Evaluation Board | Y-Charge-IT | #4                | V1.30              | V1.0.137           |

\*) EUT short description is used to simplify the identification of the EUT in this test report.

#### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

| AE short description *) | Auxiliary Equipment | Type | S/N serial number | HW hardware status | SW software status |
|-------------------------|---------------------|------|-------------------|--------------------|--------------------|
| AE 1                    | USB Charger         |      |                   |                    |                    |
| AE 2                    | USB-Cable           | --   | --                | 1m long            | --                 |

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

| EUT set-up no. *) | Combination of EUT and AE | Remarks                                |
|-------------------|---------------------------|----------------------------------------|
| set. 1            | EUT A + AE 1 + AE 2       | Radiated Measurements table top set up |

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. EUT operating modes

| EUT operating mode no. *) | Description of operating modes | Additional information                                                                                      |
|---------------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------|
| op. 1                     | Wireless Charging (WPT)-Mode   | Continuous WPT (125 kHz) Charging mode activated                                                            |
| op. 2                     | BTLE continuous TX             | The EUT was put to continuous transmissions mode with help of a special firmware software. Duty-Cycle > 98% |

\*) EUT operating mode no. is used to simplify the test report.

## 4. Description of test system set-up's

### 4.1. Test system set-up for AC power-line conducted emission measurements


**Specification:** ANSI C63.4-2014 chapter 7, ANSI C63.10-2013chapter 6.2

**General Description:** The radio frequency voltage conducted back into the AC power line in the frequency range 150 kHz to 30 MHz has to be investigated. Compliance should be tested by measuring the radio frequency voltage between each power line and ground at the power terminals in the stated frequency range.

A 50 Ohm / 50  $\mu$ H line impedance stabilization network (LISN) is used coupling the interface to the measurement equipment. The EUT power input leads are connected through the LISN to the AC-power source. The LISN enclosure is electrically connected to the ground plane. The measuring instrument is connected to the coaxial output of the LISN.

Tabletop devices were set-up on a 80 cm height above reference ground plane, floor standing equipment 10 cm raised above ground plane. Measurements have been performed on each phase line and neutral line of the devices AC-power lines. The EUT was power supplied with 110 V/60 Hz. The EUT was tested in the defined operating mode and installed (connected) to accessory equipment according the general description of use given by the applicant.

**Schematic:**

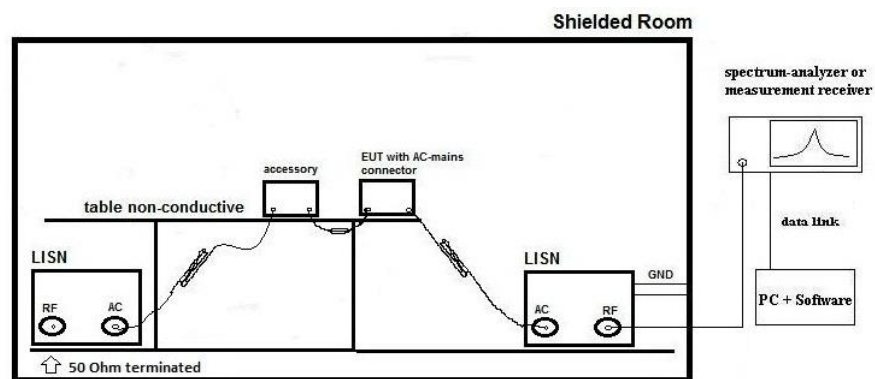

Only schematic view, we refer to figure 6, 7 and 8 of ANSI C63.4-2009 for more details.

**Testing method:**

**Exploratory, preliminary measurements** as a first step, determines the worst-case phase line (neutral or phase) as well as the most critical operating mode of the equipment. A complete frequency-sweep with PK-Detector is performed on each current-carrying conductor.

**Final testing** for power phases and critical frequencies (Margin to AV- or QP limit lower than 3 dB) as a second step includes measurements with receivers detector set to Quasi-Peak and Average.

**Formula:**

$$V_C = V_R + C_L \quad (1)$$

$$M = L_T - V_C \quad (2)$$

$V_C$  = measured Voltage –corrected value

$V_R$  = Receiver reading

$C_L$  = Cable loss

$M$  = Margin

$L_T$  = Limit

Values are in dB, positive margin means value is below limit.


### 4.2. Test system set-up for radiated magnetic field measurements below 30 MHz

**Specification:** ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1 , ANSI C63.10-2013 chapter 6.4 (§6.4.4.2)

**General Description:** Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commission.

**Schematic:**

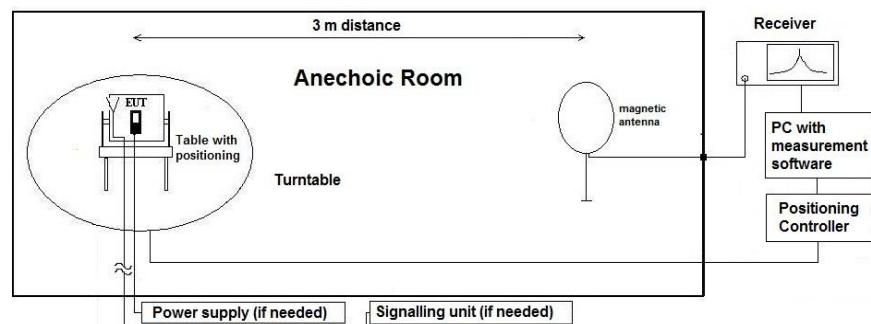

**Testing method:**

**Exploratory, preliminary measurement**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C<sub>L</sub> = Cable loss

D<sub>F</sub> = Distance correction factor

E<sub>C</sub> = Electrical field – corrected value

E<sub>R</sub> = Receiver reading

G<sub>A</sub> = Gain of pre-amplifier (if used)

L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**Distance correction:** Reference for applied correction (extrapolating) factors due to reduced measurement distance:


ANSI C63.10:2013, §6.4.4.2 - Equations (2) + (3) + (4)

### 4.3. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz

**Specification:** ANSI C63.4-2014 chapter 8.2.3, ANSI C63.10-2013 chapter 6.5

**General Description:** Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the regulatory commissions.

**Schematic:**

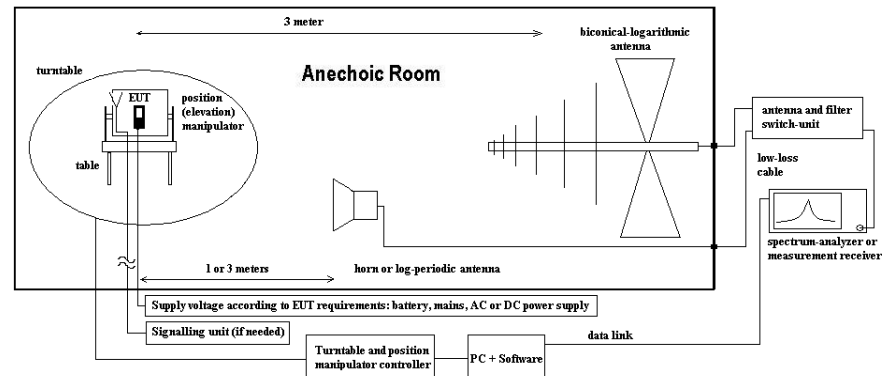

**Testing method:**

#### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

#### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C<sub>L</sub> = Cable loss

D<sub>F</sub> = Distance correction factor (if used)

E<sub>C</sub> = Electrical field – corrected value

E<sub>R</sub> = Receiver reading

G<sub>A</sub> = Gain of pre-amplifier (if used)

L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

## 5. Measurements

### 5.1. General Limit - Conducted emissions on AC-Power lines

#### 5.1.1. Test location and equipment

|               |                                                                   |                                                                  |                                                                                                |
|---------------|-------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| test location | <input checked="" type="checkbox"/> CETECOM Essen (Chapter 2.2.1) | <input type="checkbox"/> Please see Chapter 2.2.2                | <input type="checkbox"/> Please see Chapter 2.2.3                                              |
| test site     | <input type="checkbox"/> 333 EMI field                            | <input checked="" type="checkbox"/> 348 EMI cond.                |                                                                                                |
| receiver      | <input type="checkbox"/> 001 ESS                                  | <input checked="" type="checkbox"/> 377 ESCS 30                  | <input type="checkbox"/> 489 ESU 40 <input type="checkbox"/> 620 ESU 26                        |
| LISN          | <input checked="" type="checkbox"/> 005 ESH2-Z5                   | <input type="checkbox"/> 007 ESH3-Z6                             | <input type="checkbox"/> 300 ESH3-Z5 & 50Ω used for AE <input type="checkbox"/> no LISN for AE |
| signaling     | <input type="checkbox"/> 392 MT8820A                              | <input type="checkbox"/> 436 CMU                                 | <input type="checkbox"/> 547 CMU <input type="checkbox"/> 594 CMW                              |
| line voltage  | <input type="checkbox"/> 230 V 50 Hz via public mains             | <input checked="" type="checkbox"/> 060 120 V 60 Hz via PAS 5000 |                                                                                                |

#### 5.1.2. Requirements

|              |                                                |                                                             |                |                                                  |                |
|--------------|------------------------------------------------|-------------------------------------------------------------|----------------|--------------------------------------------------|----------------|
| <b>FCC</b>   | Part 15, Subpart B, §15.107 / 15.207/ 18.307   |                                                             |                |                                                  |                |
| <b>IC</b>    | RSS-Gen Issue 4, Chapter 8.8, Table 3/ EN55011 |                                                             |                |                                                  |                |
| <b>ANSI</b>  | C63.4-2014, § 5.2, 6, 7                        |                                                             |                |                                                  |                |
| <b>Limit</b> | Frequency [MHz]                                | <input checked="" type="checkbox"/> Conducted limit Class B |                | <input type="checkbox"/> Conducted limit Class A |                |
|              |                                                | QUASI-Peak [dBμV]                                           | AVERAGE [dBμV] | QUASI-Peak [dBμV]                                | AVERAGE [dBμV] |
|              | 0.15 – 0.5                                     | 66 to 56*                                                   | 56 to 46*      | 79                                               | 66             |
|              | 0.5 – 5                                        | 56                                                          | 46             | 73                                               | 60             |
|              | 5 – 30                                         | 60                                                          | 50             | 73                                               | 60             |

Remark: \* decreases with the logarithm of the frequency

#### 5.1.3. Test condition and test set-up

|                                       |           |                                                                                                    |                                            |                                                |
|---------------------------------------|-----------|----------------------------------------------------------------------------------------------------|--------------------------------------------|------------------------------------------------|
| Signal link to test system (if used): |           | <input type="checkbox"/> air link                                                                  | <input type="checkbox"/> cable connection  | <input checked="" type="checkbox"/> none       |
| EUT-grounding                         |           | <input checked="" type="checkbox"/> none                                                           | <input type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up                      |           | <input checked="" type="checkbox"/> table top<br>(40 cm distance to reference ground plane (wall)) |                                            |                                                |
| Climatic conditions                   |           | Temperature: (22±3°C)                                                                              |                                            |                                                |
| EMI-Receiver or Analyzer settings     | Scan data | <input type="checkbox"/> 9 – 150 kHz, RBW = 200 Hz, Step = 61 Hz                                   |                                            |                                                |
|                                       |           | <input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW = 9 kHz, Step = 4 kHz                     |                                            |                                                |
|                                       |           | <input type="checkbox"/> other:                                                                    |                                            |                                                |
|                                       | Scan-Mode | 6 dB EMI-Receiver Mode                                                                             |                                            |                                                |
| Pre-measurement                       |           | Peak detector, Repetitive-Scan, max-hold, sweep-time 50 μs per frequency point                     |                                            |                                                |
| Final measurement                     |           | Average & Quasi-peak detector at critical frequencies                                              |                                            |                                                |
| General measurement procedures        |           | Please see chapter “Test system set-up for AC power line conducted emissions measurements”         |                                            |                                                |

#### 5.1.4. Measurement results

The results are presented below in summary form only. For more information please see the diagrams

| EUT set-up no.: |                                   |                                                                                                                                                         | set-up 1   |                                           |        |
|-----------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------------|--------|
| Diagram No.     | EUT operating mode no. or comment | Used Detector                                                                                                                                           | Power line | Additional (scan-) information or remarks | Result |
| 1.01            | EUT operating mode 1              | <input checked="" type="checkbox"/> Peak (pre-scan)<br><input checked="" type="checkbox"/> AV (final)<br><input checked="" type="checkbox"/> QP (final) | L1/ N      | Charging battery                          | passed |
| 1.02            | EUT operating mode 1+2            | <input checked="" type="checkbox"/> Peak (pre-scan)<br><input checked="" type="checkbox"/> AV (final)<br><input checked="" type="checkbox"/> QP (final) | L1/ N      | Charging battery + BTLE TX                | passed |

## 5.2. General Limit - Radiated field strength emissions

### 5.2.1. Test location and equipment

|                 |                                                                          |                                             |                                                                            |                                            |                                                    |                                      |
|-----------------|--------------------------------------------------------------------------|---------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------|----------------------------------------------------|--------------------------------------|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)       |                                             | <input type="checkbox"/> Please see Chapter. 2.2.2                         |                                            | <input type="checkbox"/> Please see Chapter. 2.2.3 |                                      |
| test site       | <input checked="" type="checkbox"/> 441 EMI SAR                          | <input type="checkbox"/> 487 SAR NSA        | <input type="checkbox"/> 347 Radio.lab.                                    |                                            | <input type="checkbox"/>                           | <input type="checkbox"/>             |
| receiver        | <input type="checkbox"/> 377 ESCS30                                      | <input checked="" type="checkbox"/> 001 ESS | <input type="checkbox"/>                                                   | <input type="checkbox"/>                   | <input type="checkbox"/>                           | <input type="checkbox"/>             |
| spectr. analys. | <input type="checkbox"/> 584 FSU                                         | <input type="checkbox"/> 120 FSEM           | <input type="checkbox"/> 264 FSEK                                          | <input type="checkbox"/>                   | <input type="checkbox"/>                           | <input type="checkbox"/>             |
| antenna         | <input type="checkbox"/> 574 BTA-L                                       | <input type="checkbox"/> 133 EMCO3115       | <input type="checkbox"/> 302 BBHA9170                                      | <input type="checkbox"/> 289 CBL 6141      | <input checked="" type="checkbox"/> 030 HFH-Z2     | <input type="checkbox"/> 477 GPS     |
| signaling       | <input type="checkbox"/> 392 MT8820A                                     | <input type="checkbox"/> 371 CBT32          | <input type="checkbox"/> 547 CMU                                           | <input type="checkbox"/> 594 CMW           |                                                    |                                      |
| otherwise       | <input type="checkbox"/> 400 FTC40x15E                                   | <input type="checkbox"/> 401 FTC40x15E      | <input type="checkbox"/> 110 USB LWL                                       | <input type="checkbox"/> 482 Filter Matrix | <input type="checkbox"/> 378 RadiSense             |                                      |
| DC power        | <input type="checkbox"/> 087 EA 3013S                                    | <input type="checkbox"/> 457 EA 3013A       | <input type="checkbox"/> 459 EA 2032-50                                    | <input type="checkbox"/> 268 EA- 3050      | <input type="checkbox"/> 494 AG6632A               | <input type="checkbox"/> 498 NGPE 40 |
| line voltage    | <input checked="" type="checkbox"/> 12 VDC (for EUT A supplied from AE4) |                                             | <input checked="" type="checkbox"/> 060 120 V 60 Hz via PAS 5000 (for AE4) |                                            |                                                    |                                      |

### 5.2.2. Requirements/Limits

|                                                     |                           |  |                                                 |                               |                 |                                                                     |                                                                    |
|-----------------------------------------------------|---------------------------|--|-------------------------------------------------|-------------------------------|-----------------|---------------------------------------------------------------------|--------------------------------------------------------------------|
| FCC                                                 |                           |  | <input checked="" type="checkbox"/> Part 18.305 |                               |                 |                                                                     |                                                                    |
| other                                               |                           |  | OET MP-5                                        |                               |                 |                                                                     |                                                                    |
| Equipment                                           | Operating Frequency [MHz] |  | Radiated emissions limits                       |                               |                 |                                                                     |                                                                    |
|                                                     |                           |  | RF Power generated by equipment (watts)         | [µV/m] @300m                  | [dBµV/m] @ 300m | Distance Correction factor 300m to 3m (for frequencies lower 30MHz) | Distance Correction factor 300m-3m (for frequencies higher 30MHz)) |
| Any type unless otherwise specified (miscellaneous) | Any ISM frequency         |  | Below 500<br>500 or more                        | 25<br>25 ×<br>SQRT(power/500) | 27.95<br>--     | See table                                                           | 20dB/Decade                                                        |
|                                                     | Any non-ISM frequency     |  | Below 500<br>500 or more                        | 15<br>15 ×<br>SQRT(power/500) | 23.52<br>--     | See table                                                           | 20dB/Decade                                                        |

### 5.2.3. Operating frequencies accord. §18.301

| ISM Frequency | Tolerance  |
|---------------|------------|
| 6.78 MHz      | ±15.0 kHz  |
| 13.56 MHz     | ±7.0 kHz   |
| 27.12 MHz     | ±163.0 kHz |
| 40.68 MHz     | ±20.0 kHz  |
| 915 MHz       | ±13.0 MHz  |
| 2,450 MHz     | ±50.0 MHz  |
| 5,800 MHz     | ±75.0 MHz  |
| 24,125 MHz    | ±125.0 MHz |
| 61.25 GHz     | ±250.0 MHz |
| 122.50 GHz    | ±500.0 MHz |
| 245.00 GHz    | ±1.0 GHz   |

### 5.2.4. Prohibited frequencies accord. §18.303

|                         | Frequencies     |
|-------------------------|-----------------|
| Safety and Rescue bands | 490-510 kHz     |
|                         | 2170-2194 kHz   |
|                         | 8354-8374 kHz   |
|                         | 121.4-121.6 MHz |
|                         | 156.7-156.9 MHz |
|                         | 242.8-243.2 MHz |

### 5.2.5. Test condition and test set-up1: 9kHz to 30MHz

|                                       |                           |                                                                                                                                                                                                                   |                                            |                                                |
|---------------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------------------------------------------------|
| Signal link to test system (if used): |                           | <input type="checkbox"/> air link                                                                                                                                                                                 | <input type="checkbox"/> cable connection  | <input checked="" type="checkbox"/> none       |
| EUT-grounding                         |                           | <input type="checkbox"/> none                                                                                                                                                                                     | <input type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up                      |                           | <input checked="" type="checkbox"/> table top                                                                                                                                                                     |                                            | <input type="checkbox"/> floor standing        |
| Climatic conditions                   |                           | Temperature: (22±3°C)                                                                                                                                                                                             |                                            | Rel. humidity: (40±20)%                        |
| EMI-Receiver or Analyzer Settings     | Scan data                 | <input checked="" type="checkbox"/> 9 – 150 kHz RBW/VBW = 200 Hz Scan step = 80 Hz<br><input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz Scan step = 4 kHz<br><input type="checkbox"/> other:   |                                            |                                                |
|                                       | Scan-Mode                 | <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3dB Spectrum analyser Mode                                                                                                    |                                            |                                                |
|                                       | Detector Mode: Sweep-Time | Peak (pre-measurement) and Quasi-PK/Average (final if applicable)<br>Repetitive-Scan, max-hold<br>Coupled – calibrated display if continuous signal otherwise adapted to EUT's individual transmission duty-cycle |                                            |                                                |
| General measurement procedures        |                           | Please see chapter "Test system set-up radiated magnetic field measurements below 30 MHz"                                                                                                                         |                                            |                                                |

### 5.2.6. Test condition and measurement test set-up2: 30MHz to 1GHz

|                                       |                       |                                                                                                                 |                                            |                                                |
|---------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------|------------------------------------------------|
| Signal link to test system (if used): |                       | <input type="checkbox"/> air link                                                                               | <input type="checkbox"/> cable connection  | <input checked="" type="checkbox"/> none       |
| EUT-grounding                         |                       | <input type="checkbox"/> none                                                                                   | <input type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up                      |                       | <input checked="" type="checkbox"/> table top 0.8m height                                                       |                                            | <input type="checkbox"/> floor standing        |
| Climatic conditions                   |                       | Temperature: (22±3°C)                                                                                           |                                            | Rel. humidity: (40±20)%                        |
| EMI-Receiver (Analyzer) Settings      | Scan frequency range: | <input checked="" type="checkbox"/> 30 – 1000 MHz <input type="checkbox"/> other:                               |                                            |                                                |
|                                       | Scan-Mode             | <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB spectrum analyser mode |                                            |                                                |
|                                       | Detector              | Peak / Quasi-peak                                                                                               |                                            |                                                |
|                                       | RBW/VBW               | 100 kHz/300 kHz                                                                                                 |                                            |                                                |
|                                       | Mode:                 | Repetitive-Scan, max-hold                                                                                       |                                            |                                                |
|                                       | Scan step             | 30 kHz                                                                                                          |                                            |                                                |
|                                       |                       | Coupled – calibrated display if continuous tx-signal otherwise adapted to EUT's individual duty-cycle           |                                            |                                                |
| General measurement procedures        |                       | Please see chapter "Test system set-up for electric field measurement in the range 30 MHz to 1 GHz"             |                                            |                                                |

### 5.2.7. Measurement Results

The results are presented below in summary form only. The EUT is put on operation on nominal channel.

Table of measurement results:

| Diagram No. | Carrier Channel Range | Frequency range | Set-up no. | OP-mode no. | Remark                                                                                   | Used detector                       |                          |                          | Result |
|-------------|-----------------------|-----------------|------------|-------------|------------------------------------------------------------------------------------------|-------------------------------------|--------------------------|--------------------------|--------|
|             |                       |                 |            |             |                                                                                          | PK                                  | AV                       | QP                       |        |
| 2.11        | Nominal               | 9kHz - 30MHz    | 1          | 1           | §18.305 limits                                                                           | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Pass   |
| 2.12        | Nominal               | 9kHz - 30MHz    | 1          | 1           | RSS-216 limits                                                                           | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Pass   |
| 2.13        | Nominal               | 9kHz - 30MHz    | 1          | 1+2         | §18.305 limits                                                                           | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Pass   |
| 2.05a       | Nominal               | 100 – 160 kHz   | 1          | 1           | Carrier field strength related to 300m<br>-22.30 dBuV/m@3m (PK)<br>-22.90 dBuV/m@3m (QK) | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Pass   |
| 3.04a       | Nominal               | 30 – 1000 MHz   | 1          | 1           | §18.305 limits (non-ISM)                                                                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Pass   |
| 3.04b       | Nominal               | 30-1000 MHz     | 1          | 1           | RSS-216 limits                                                                           | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Pass   |
| 3.04c       | Nominal               | 30 – 1000 MHz   | 1          | 1+2         | §18.305 limits (non-ISM)                                                                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Pass   |

**Remark:**

### 5.2.7.1. Correction factors due to reduced meas. distance ( $f < 30$ MHz)

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according to Extrapolation formulas valid for EUT's with maximum dimension of  $0.625 \times \lambda$ . Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

| Frequency Range | f [kHz/MHz] | Lambda [m] | Far-Field Point [m] | Distance Limit accord. 15.209 [m] | 1st Condition (dmeas < $D_{near-field}$ ) | 2te Condition (Limit distance bigger $d_{near-field}$ ) | Distance Correction accord. Formula |
|-----------------|-------------|------------|---------------------|-----------------------------------|-------------------------------------------|---------------------------------------------------------|-------------------------------------|
| kHz             | 9,00E+03    | 33333,33   | 5305,17             | 300                               | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 1,00E+04    | 30000,00   | 4774,65             |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 2,00E+04    | 15000,00   | 2387,33             |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 3,00E+04    | 10000,00   | 1591,55             |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 4,00E+04    | 7500,00    | 1193,66             |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 5,00E+04    | 6000,00    | 954,93              |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 6,00E+04    | 5000,00    | 795,78              |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 7,00E+04    | 4285,71    | 682,09              |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 8,00E+04    | 3750,00    | 596,83              |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 9,00E+04    | 3333,33    | 530,52              |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 1,00E+05    | 3000,00    | 477,47              |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 1,25E+05    | 2400,00    | 381,97              |                                   | fulfilled                                 | not fulfilled                                           | -80,00                              |
|                 | 2,00E+05    | 1500,00    | 238,73              |                                   | fulfilled                                 | fulfilled                                               | -78,02                              |
|                 | 3,00E+05    | 1000,00    | 159,16              |                                   | fulfilled                                 | fulfilled                                               | -74,49                              |
|                 | 4,00E+05    | 750,00     | 119,37              |                                   | fulfilled                                 | fulfilled                                               | -72,00                              |
|                 | 4,90E+05    | 612,24     | 97,44               |                                   | fulfilled                                 | fulfilled                                               | -70,23                              |
|                 | 5,00E+05    | 600,00     | 95,49               |                                   | fulfilled                                 | not fulfilled                                           | -40,00                              |
|                 | 6,00E+05    | 500,00     | 79,58               |                                   | fulfilled                                 | not fulfilled                                           | -40,00                              |
|                 | 7,00E+05    | 428,57     | 68,21               |                                   | fulfilled                                 | not fulfilled                                           | -40,00                              |
|                 | 8,00E+05    | 375,00     | 59,68               |                                   | fulfilled                                 | not fulfilled                                           | -40,00                              |
|                 | 9,00E+05    | 333,33     | 53,05               |                                   | fulfilled                                 | not fulfilled                                           | -40,00                              |
| MHz             | 1,00        | 300,00     | 47,75               | 30                                | fulfilled                                 | not fulfilled                                           | -40,00                              |
|                 | 1,59        | 188,50     | 30,00               |                                   | fulfilled                                 | not fulfilled                                           | -40,00                              |
|                 | 2,00        | 150,00     | 23,87               |                                   | fulfilled                                 | fulfilled                                               | -38,02                              |
|                 | 3,00        | 100,00     | 15,92               |                                   | fulfilled                                 | fulfilled                                               | -34,49                              |
|                 | 4,00        | 75,00      | 11,94               |                                   | fulfilled                                 | fulfilled                                               | -32,00                              |
|                 | 5,00        | 60,00      | 9,55                |                                   | fulfilled                                 | fulfilled                                               | -30,06                              |
|                 | 6,00        | 50,00      | 7,96                |                                   | fulfilled                                 | fulfilled                                               | -28,47                              |
|                 | 7,00        | 42,86      | 6,82                |                                   | fulfilled                                 | fulfilled                                               | -27,13                              |
|                 | 8,00        | 37,50      | 5,97                |                                   | fulfilled                                 | fulfilled                                               | -25,97                              |
|                 | 9,00        | 33,33      | 5,31                |                                   | fulfilled                                 | fulfilled                                               | -24,95                              |
|                 | 10,00       | 30,00      | 4,77                |                                   | fulfilled                                 | fulfilled                                               | -24,04                              |
|                 | 10,60       | 28,30      | 4,50                |                                   | fulfilled                                 | fulfilled                                               | -23,53                              |
|                 | 11,00       | 27,27      | 4,34                |                                   | fulfilled                                 | fulfilled                                               | -23,21                              |
|                 | 12,00       | 25,00      | 3,98                |                                   | fulfilled                                 | fulfilled                                               | -22,45                              |
|                 | 13,56       | 22,12      | 3,52                |                                   | fulfilled                                 | fulfilled                                               | -21,39                              |
|                 | 15,00       | 20,00      | 3,18                |                                   | fulfilled                                 | fulfilled                                               | -20,51                              |
|                 | 15,92       | 18,85      | 3,00                |                                   | fulfilled                                 | fulfilled                                               | -20,00                              |
|                 | 17,00       | 17,65      | 2,81                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |
|                 | 18,00       | 16,67      | 2,65                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |
|                 | 20,00       | 15,00      | 2,39                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |
|                 | 21,00       | 14,29      | 2,27                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |
|                 | 23,00       | 13,04      | 2,08                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |
|                 | 25,00       | 12,00      | 1,91                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |
|                 | 27,00       | 11,11      | 1,77                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |
|                 | 29,00       | 10,34      | 1,65                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |
|                 | 30,00       | 10,00      | 1,59                |                                   | not fulfilled                             | fulfilled                                               | -20,00                              |

### 5.3. RF-Parameter: 99% occupied Bandwidth

#### 5.3.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                      |                                                 |                                        |                                                       |                                                    |                                               |                          |
|----------------------|-------------------------------------------------|----------------------------------------|-------------------------------------------------------|----------------------------------------------------|-----------------------------------------------|--------------------------|
| test site            | <input type="checkbox"/> 441 EMI SAR            | <input type="checkbox"/> 348 EMI cond. | <input type="checkbox"/> 443 EMI FAR                  | <input checked="" type="checkbox"/> 347 Radio.lab. | <input type="checkbox"/> 337 OATS             | <input type="checkbox"/> |
| spectr. analys.      | <input type="checkbox"/> 584 FSU                | <input type="checkbox"/> 120 FSEM      | <input type="checkbox"/> 264 FSEK                     | <input type="checkbox"/> 489 ESU                   | <input checked="" type="checkbox"/> 683 FSU26 | <input type="checkbox"/> |
| attenuator           | <input type="checkbox"/> 530 10 dB              | <input type="checkbox"/>               | <input type="checkbox"/>                              | <input type="checkbox"/>                           | <input type="checkbox"/>                      | <input type="checkbox"/> |
| signalling           | <input type="checkbox"/> 392 MT8820A            | <input type="checkbox"/> 436 CMU       | <input type="checkbox"/> 547 CMU                      |                                                    |                                               |                          |
| DC power             | <input checked="" type="checkbox"/> 463 HP3245A | <input type="checkbox"/> 087 EA3013    | <input type="checkbox"/> 354 NGPE 40                  | <input type="checkbox"/> 086 LNG50-10              | <input type="checkbox"/>                      | <input type="checkbox"/> |
| Power supply voltage | <input checked="" type="checkbox"/> 5 V DC      |                                        | <input type="checkbox"/> 060 110 V 60 Hz via PAS 5000 |                                                    |                                               |                          |
| Others               | <input type="checkbox"/> 613 20dB Attenuator    |                                        | <input type="checkbox"/> cable K5                     |                                                    |                                               |                          |

#### 5.3.2. References of occupied and emission bandwidth

##### §15.202(a)

(a) *Occupied bandwidth. The frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. In some cases, for example multichannel frequency-division systems, the percentage of 0.5 percent may lead to certain difficulties in the practical application of the definitions of occupied and necessary bandwidth; in such cases a different percentage may prove useful.*

#### 5.3.3. Test condition and measurement test set-up

|                                      |                                                                                                  |                                            |                                                |
|--------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------|------------------------------------------------|
| Signal ink to test system (if used): | <input type="checkbox"/> air link                                                                | <input type="checkbox"/> cable connection  | <input checked="" type="checkbox"/> none       |
| EUT-grounding                        | <input checked="" type="checkbox"/> none                                                         | <input type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up                     | <input checked="" type="checkbox"/> table top                                                    |                                            | <input type="checkbox"/> floor standing        |
| Climatic conditions                  | Temperature: (22±3°C)                                                                            |                                            | Rel. humidity: (40±20)%                        |
| General measurement procedures       | Please see chapter "Test system set-up for conducted RF-measurement at antenna Port" (W2 Set-up) |                                            |                                                |

#### 5.3.4. EUT Settings:

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions. Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

#### 5.3.5. Measurement method:

The **99% emission bandwidth** was measured. Two markers are placed on frequency points such that left to lower f-marker and right to higher f-marker only 1% of the TX-power is contained. Between the markers, 99% of the power is laying. The RBW value is readjusted and the measurement repeated until the RBW/EBW ratio is around 1%.

#### 5.3.6. Spectrum-Analyzer settings:

|                            |                                                                                                                                                                           |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Span                       | Set as to fully display the emissions + 30%                                                                                                                               |
| Scale y display            | approximate 30dB below the maximum PEAK level                                                                                                                             |
| Resolution Bandwidth (RBW) | <input checked="" type="checkbox"/> ANSI 63.10:2009 Set to initial value approx 1% to 5% of the emission bandwidth, re-adjust and proof that RBW/EBW is between 1% and 5% |
| Video Bandwidth (VBW)      | Minimum 3 times the resolution bandwidth                                                                                                                                  |
| Sweep time                 | Auto -coupled                                                                                                                                                             |
| Detector                   | Peak detector                                                                                                                                                             |
| Sweep mode                 | Repetitive Mode, MAX-HOLD, trace stabilization                                                                                                                            |

**5.3.7. Results:****99% OCCUPIED BANDWIDTH:**

|                                                |                                    |
|------------------------------------------------|------------------------------------|
| Set-up no.: 1<br>Op. Mode: 1                   | <b>99% Bandwidth<br/>[MHz]</b>     |
| T <sub>NOM</sub> = 21°C, V <sub>NOM</sub> = 5V | Nominal channel = 1<br>(125.2 kHz) |
| Measured value                                 | 750.32Hz                           |

**Remark:****VERDICT:** for information only

## 5.4. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according to its statistical distribution calculated.

| RF-Measurement                            | Reference    | Frequency range                     | Calculated uncertainty based on a confidence level of 95% | Remarks         |
|-------------------------------------------|--------------|-------------------------------------|-----------------------------------------------------------|-----------------|
| Conducted emissions (U <sub>CISPR</sub> ) | CISPR 16-2-1 | 9 kHz - 150 kHz<br>150 kHz - 30 MHz | 4.0 dB<br>3.6 dB                                          | -               |
| Radiated emissions Enclosure              | CISPR 16-2-3 | 30 MHz - 1 GHz<br>1 GHz - 18 GHz    | 4.2 dB<br>5.1 dB                                          | E-Field         |
| Disturbance power                         | CISPR 16-2-2 | 30 MHz - 300 MHz                    | -                                                         | -               |
| Power Output radiated                     | -            | 30 MHz - 4 GHz                      | 3.17 dB                                                   | Substitution    |
| Power Output conducted                    | -            | 9 kHz - 20 GHz                      | 1.0 dB                                                    | -               |
| Conducted emissions on antenna ports      | -            | 9 kHz - 20 GHz<br>20 GHz - 40 GHz   | 1.0 dB                                                    | -               |
| Occupied bandwidth                        | -            | 9 kHz - 4 GHz                       | 0.1272 ppm (Delta Marker)                                 | Frequency error |
|                                           |              |                                     | 1.0 dB                                                    | Power           |
| Emission bandwidth                        | -            | 9 kHz - 4 GHz                       | 0.1272 ppm (Delta Marker)                                 | Frequency error |
|                                           |              |                                     | 1.0 dB                                                    | Power           |
| Frequency stability                       | -            | 9 kHz - 20 GHz                      | 0.0636 ppm                                                | -               |
| Radiated emissions Enclosure              | -            | 150 kHz - 30 MHz                    | 5.0 dB                                                    | Magnetic field  |
|                                           |              | 30 MHz - 1 GHz                      | 4.2 dB                                                    | E-field         |
|                                           |              | 1 GHz - 20 GHz                      | 3.17 dB                                                   | Substitution    |

**Table: measurement uncertainties, valid for conducted/radiated measurements**

## 6. Accreditation details of CETECOM's laboratories and test sites

| Ref.-<br>No.                                                                    | Accreditation<br>Certificate             | Valid for laboratory area or test site                                                                                                                                                                                                                                      | Accreditation Body                                                                                |
|---------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| -                                                                               | D-PL-<br>12047-01-01                     | All laboratories and test sites of CETECOM GmbH, Essen                                                                                                                                                                                                                      | DAkkS, Deutsche<br>Akkreditierungsstelle GmbH                                                     |
| 337<br>487<br>558<br>348<br>348                                                 | MRA US-EU<br>0003                        | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements above 1 GHz, 3 m (FAR)<br>Mains Ports Conducted Interference Measurements<br>Telecommunication Ports Conducted Interference Measurem. | FCC, Federal Communications<br>Commission<br>Laboratory Division, USA                             |
| 337<br>487<br>550<br>558                                                        | 3462D-1<br>3462D-2<br>3462D-2<br>3462D-3 | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR)<br>Radiated Measurements above 1 GHz, 3 m (FAR)                                                             | IC, Industry Canada Certification<br>and Engineering Bureau                                       |
| 487<br>550<br>348<br>348                                                        | R-2666<br>G-301<br>C-2914<br>T-1967      | Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR)<br>Mains Ports Conducted Interference Measurements<br>Telecommunication Ports Conducted Interference Measurem.                                                          | VCCI, Voluntary Control Council<br>for Interference by Information<br>Technology Equipment, Japan |
| OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room |                                          |                                                                                                                                                                                                                                                                             |                                                                                                   |

## 7. Instruments and Ancillary

### 7.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

#### 7.1.1. Test software and firmware of equipment

| Ref.-No. | Equipment                               | Type                   | Serial-No.     | Version of Firmware or Software during the test                                                 |
|----------|-----------------------------------------|------------------------|----------------|-------------------------------------------------------------------------------------------------|
| 001      | EMI Test Receiver                       | ESS                    | 825132/017     | Firm.= 1.21 , OTP=2.0, GRA=2.0                                                                  |
| 012      | Signal Generator (EMS-cond.)            | SMY 01                 | 839069/027     | Firm.= V 2.02                                                                                   |
| 013      | Power Meter (EMS cond.)                 | NRVD                   | 839111/003     | Firm.= V 1.51                                                                                   |
| 017      | Digital Radiocommunication Tester       | CMD 60 M               | 844365/014     | Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99                                              |
| 053      | Audio Analyzer                          | UPA3                   | 860612/022     | Firm. V 4.3                                                                                     |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10                    | G60547         | Firm.= V 3.1DHG                                                                                 |
| 140      | Signal Generator                        | SMHU                   | 831314/006     | Firm.= 3.21                                                                                     |
| 261      | Thermal Power Sensor                    | NRV-Z55                | 825083/0008    | EPROM-Datum 02.12.04, SE EE 1 B                                                                 |
| 262      | Power Meter                             | NRV-S                  | 825770/0010    | Firm.= 2.6                                                                                      |
| 263      | Signal Generator                        | SMP 04                 | 826190/0007    | Firm.=3.21                                                                                      |
| 295      | Racal Digital Radio Test Set            | 6103                   | 1572           | UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02       |
| 298      | Univ. Radio Communication Tester        | CMU 200                | 832221/091     | R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used                              |
| 323      | Digital Radiocommunication Tester       | CMD 55                 | 825878/0034    | Firm.= 3.52 .22.01.99                                                                           |
| 335      | CTC-EMS-Conducted                       | System EMS Conducted   | -              | EMC 32 V 8.52                                                                                   |
| 340      | Digital Radiocommunication Tester       | CMD 55                 | 849709/037     | Firm.= 3.52 .22.01.99                                                                           |
| 355      | Power Meter                             | URV 5                  | 891310/027     | Firm.= 1.31                                                                                     |
| 365      | 10V Insertion Unit 50 Ohm               | URV5-Z2                | 100880         | Eprom Data = 31.03.08                                                                           |
| 366      | Ultra Compact Simulator                 | UCS 500 M4             | V0531100594    | Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10                                                    |
| 371      | Bluetooth Tester                        | CBT32                  | 100153         | CBT V5.30+ SW-Option K55, K57                                                                   |
| 377      | EMI Test Receiver                       | ESCS 30                | 100160         | Firm.= 2.30, OTP= 02.01, GRA= 02.36                                                             |
| 378      | Broadband RF Field Monitor              | RadiSense III          | 03D00013SNO-08 | Firm.= V.03D13                                                                                  |
| 389      | Digital Multimeter                      | Keithley 2000          | 0583926        | Firm. = A13 (Mainboard) A02 (Display)                                                           |
| 392      | Radio Communication Tester              | MT8820A                | 6K00000788     | Firm.= 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002 |
| 436      | Univ. Radio Communication Tester        | CMU 200                | 103083         | R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band |
| 441      | CTC-SAR-EMI Cable Loss                  | System EMI field (SAR) | -              | EMC 32 Version 8.52                                                                             |
| 442      | CTC-SAR-EMS                             | System EMS field (SAR) | -              | EMC 32 Version 8.40                                                                             |
| 443      | CTC-FAR-EMI-RSE                         | System CTC-FAR-EMI-RSE | -              | Spuri 7.2.5 or EMC 32 Ver. 9.15.00                                                              |
| 444      | CTC-FAR-EMS field                       | System-EMS-Field (FAR) | -              | EMC 32 Version 9.15.00                                                                          |
| 460      | Univ. Radio Communication Tester        | CMU 200                | 108901         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,    |
| 489      | EMI Test Receiver                       | ESU40                  | 1000-30        | Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00                                                 |
| 491      | ESD Simulator dito                      | ESD dito               | dito307022     | V 2.30                                                                                          |
| 524      | Voltage Drop Simulator                  | VDS 200                | 0196-16        | Software Nr. 000037 Version V4.20a01                                                            |
| 526      | Burst Generator                         | EFT 200 A              | 0496-06        | Software Nr. 000034 Version V2.32                                                               |
| 527      | Micro Pulse Generator                   | MPG 200 B              | 0496-05        | Software-Nr. 000030 Version V2.43                                                               |
| 528      | Load Dump Simulator                     | LD 200B                | 0496-06        | Software-Nr. 000031 Version V2.35a01                                                            |
| 546      | Univ. Radio Communication Tester        | CMU 200                | 106436         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used     |
| 547      | Univ. Radio Communication Tester        | CMU 200                | 835390/014     | R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14  |
| 584      | Spectrum Analyzer                       | FSU 8                  | 100248         | 2.82_SP3                                                                                        |
| 597      | Univ. Radio Communication Tester        | CMU 200                | 100347         | R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850                |
| 598      | Spectrum Analyzer                       | FSEM 30                | 831259/013     | Firmware Bios 3.40 , Analyzer 3.40 Sp 2                                                         |
| 607      | Signal Generator                        | SMR 20                 | 832033/011     | V1.25                                                                                           |
| 620      | EMI Test Receiver                       | ESU 26                 | 100362         | 4.43_SP3                                                                                        |
| 642      | Wideband Radio Communication Tester     | CMW 500                | 126089         | Setup V03.26, Test programm component V03.02.20                                                 |
| 670      | Univ. Radio Communication Tester        | CMU 200                | 106833         | µP1 =V8.50, Firmware = V.20                                                                     |
| 689      | Vector Signal Generator                 | SMU200                 | 100970         | 02.20.360.142                                                                                   |
| 692      | Bluetooth Tester                        | CBT 32                 | 100236         | CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)                                          |

#### 7.1.2. Single instruments and test systems

| Ref.-No. | Equipment                               | Type                         | Serial-No.              | Manufacturer               | Interval of calibration | Remark | Cal due    |
|----------|-----------------------------------------|------------------------------|-------------------------|----------------------------|-------------------------|--------|------------|
| 001      | EMI Test Receiver                       | ESS                          | 825132/017              | Rohde & Schwarz            | 12 M                    | -      | 16.05.2018 |
| 005      | AC - LISN (50 Ohm/50µH, test site 1)    | ESH2-Z5                      | 861741/005              | Rohde & Schwarz            | 12 M                    | -      | 15.05.2018 |
| 007      | Single-Line V-Network (50 Ohm/5µH)      | ESH3-Z6                      | 892563/002              | Rohde & Schwarz            | 12 M                    | -      | 17.05.2018 |
| 009      | Power Meter (EMS-radiated)              | NRV                          | 863056/017              | Rohde & Schwarz            | 24 M                    | -      | 15.05.2019 |
| 016      | Line Impedance Simulating Network       | Op. 24-D                     | B6366                   | Spitzenberger+Spies        | 36 M                    | -      | 30.05.2019 |
| 020      | Horn Antenna 18 GHz (Subst 1)           | 3115                         | 9107-3699               | EMCO                       | 36/12 M                 | -      | 31.07.2017 |
| 021      | Loop Antenna (H-Field)                  | 6502                         | 9206-2770               | EMCO                       | 36 M                    | -      | 30.04.2018 |
| 030      | Loop Antenna (H-field)                  | HFH-Z2                       | 879604/026              | Rohde & Schwarz            | 36 M                    | -      | 30.04.2018 |
| 033      | RF-current probe (100kHz-30MHz)         | ESH2-Z1                      | 879581/18               | Rohde & Schwarz            | 24 M                    | -      | 15.05.2019 |
| 057      | relay-switch-unit (EMS system)          | RSU                          | 494440/002              | Rohde & Schwarz            | pre-m                   | 1a     |            |
| 060      | power amplifier (DC-2kHz)               | PAS 5000                     | B6363                   | Spitzenberger+Spies        | -                       | 3      |            |
| 066      | notch filter (WCDMA; FDD1)              | WRCT 1900/2200-5/40-10EEK    | 5                       | Wainwright GmbH            | 12 M                    | 1g     | 30.06.2017 |
| 086      | DC - power supply, 0 -10 A              | LNG 50-10                    | -                       | Heinzinger Electronic      | pre-m                   | 2      |            |
| 087      | DC - power supply, 0 -5 A               | EA-3013 S                    | -                       | Elektro Automatik          | pre-m                   | 2      |            |
| 091      | USB-LWL-Converter                       | OLS-1                        | 007/2006                | Ing. Büro Scheiba          | -                       | 4      |            |
| 099      | passive voltage probe                   | ESH2-Z3                      | 299.7810.52             | Rohde & Schwarz            | 36 M                    | -      | 30.04.2018 |
| 100      | passive voltage probe                   | Probe TK 9416                | without                 | Schwarzbeck                | 36 M                    | -      | 30.04.2018 |
| 110      | USB-LWL-Converter                       | OLS-1                        | -                       | Ing. Büro Scheiba          | -                       | 4      |            |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10                          | G60547                  | BOCONSULT                  | 36 M                    | -      | 30.05.2019 |
| 133      | horn antenna 18 GHz (Meas 1)            | 3115                         | 9012-3629               | EMCO                       | 36 M                    | 1c     | 10.03.2020 |
| 134      | horn antenna 18 GHz (Subst 2)           | 3115                         | 9005-3414               | EMCO                       | 36 M                    | -      | 10.03.2020 |
| 136      | adjustable dipole antenna (Dipole 1)    | 3121C-DB4                    | 9105-0697               | EMCO                       | 36 M                    | -      | 30.04.2018 |
| 140      | Signal Generator                        | SMHU                         | 831314/006              | Rohde & Schwarz            | 24 M                    | -      | 30.05.2018 |
| 248      | attenuator                              | SMA 6dB 2W                   | -                       | Radiall                    | pre-m                   | 2      |            |
| 249      | attenuator                              | SMA 10dB 10W                 | -                       | Radiall                    | pre-m                   | 2      |            |
| 252      | attenuator                              | N 6dB 12W                    | -                       | Radiall                    | pre-m                   | 2      |            |
| 256      | attenuator                              | SMA 3dB 2W                   | -                       | Radiall                    | pre-m                   | 2      |            |
| 257      | hybrid                                  | 4031C                        | 04491                   | Narda                      | pre-m                   | 2      |            |
| 260      | hybrid coupler                          | 4032C                        | 11342                   | Narda                      | pre-m                   | 2      |            |
| 261      | Thermal Power Sensor                    | NRV-Z55                      | 825083/0008             | Rohde & Schwarz            | 24 M                    | -      | 30.05.2018 |
| 262      | Power Meter                             | NRV-S                        | 825770/0010             | Rohde & Schwarz            | 24 M                    | -      | 30.05.2018 |
| 263      | Signal Generator                        | SMP 04                       | 826190/0007             | Rohde & Schwarz            | 36 M                    | -      | 30.05.2019 |
| 265      | peak power sensor                       | NRV-Z33, Model 04            | 840414/009              | Rohde & Schwarz            | 24 M                    | -      | 30.05.2018 |
| 266      | Peak Power Sensor                       | NRV-Z31, Model 04            | 843383/016              | Rohde & Schwarz            | 24 M                    | -      | 30.05.2018 |
| 267      | notch filter GSM 850                    | WRCA 800/960-6EEK            | 9                       | Wainwright GmbH            | pre-m                   | 2      |            |
| 270      | termination                             | 1418 N                       | BB6935                  | Weinschel                  | pre-m                   | 2      |            |
| 271      | termination                             | 1418 N                       | BE6384                  | Weinschel                  | pre-m                   | 2      |            |
| 272      | attenuator (20 dB) 50 W                 | Model 47                     | BF6239                  | Weinschel                  | pre-m                   | 2      |            |
| 273      | attenuator (10 dB) 100 W                | Model 48                     | BF9229                  | Weinschel                  | pre-m                   | 2      |            |
| 274      | attenuator (10 dB) 50 W                 | Model 47 (10 dB) 50 W        | BG0321                  | Weinschel                  | pre-m                   | 2      |            |
| 275      | DC-Block                                | Model 7003 (N)               | C5129                   | Weinschel                  | pre-m                   | 2      |            |
| 276      | DC-Block                                | Model 7006 (SMA)             | C7061                   | Weinschel                  | pre-m                   | 2      |            |
| 279      | power divider                           | 1515 (SMA)                   | LH855                   | Weinschel                  | pre-m                   | 2      |            |
| 287      | pre-amplifier 25MHz - 4GHz              | AMF-2D-100M4G-35-10P         | 379418                  | Miteq                      | 12 M                    | 1c     | 30.06.2017 |
| 291      | high pass filter GSM 850/900            | WHJ 2200-4EE                 | 14                      | Wainwright GmbH            | 12 M                    | 1c     | 30.06.2017 |
| 298      | Univ. Radio Communication Tester        | CMU 200                      | 832221/091              | Rohde & Schwarz            | pre-m                   | 3      |            |
| 300      | AC LISN (50 Ohm/50µH, 1-phase)          | ESH3-Z5                      | 892 239/020             | Rohde & Schwarz            | 12 M                    | -      | 17.05.2018 |
| 301      | attenuator (20 dB) 50W, 18GHz           | 47-20-33                     | AW0272                  | Lucas Weinschel            | pre-m                   | 2      |            |
| 302      | horn antenna 40 GHz (Meas 1)            | BBHA9170                     | 155                     | Schwarzbeck                | 36 M                    | -      | 14.03.2020 |
| 303      | horn antenna 40 GHz (Subst 1)           | BBHA9170                     | 156                     | Schwarzbeck                | 36 M                    | -      | 20.03.2020 |
| 331      | Climatic Test Chamber -40/+180 Grad     | HC 4055                      | 43146                   | Heraeus Vötsch             | 24 M                    | -      | 30.10.2018 |
| 341      | Digital Multimeter                      | Fluke 112                    | 81650455                | Fluke                      | 24 M                    | -      | 30.05.2018 |
| 342      | Digital Multimeter                      | Voltcraft M-4660A            | IB 255466               | Voltcraft                  | 24 M                    | -      | 17.05.2019 |
| 347      | laboratory site                         | radio lab.                   | -                       | -                          | -                       | 5      |            |
| 348      | laboratory site                         | EMI conducted                | -                       | -                          | -                       | 5      |            |
| 354      | DC - Power Supply 40A                   | NGPE 40/40                   | 448                     | Rohde & Schwarz            | pre-m                   | 2      |            |
| 355      | Power Meter                             | URV 5                        | 891310/027              | Rohde & Schwarz            | 24 M                    | -      | 30.05.2018 |
| 357      | power sensor                            | NRV-Z1                       | 861761/002              | Rohde & Schwarz            | 24 M                    | -      | 24.05.2019 |
| 371      | Bluetooth Tester                        | CBT32                        | 100153                  | R&S                        | 36 M                    | -      | 30.05.2019 |
| 373      | Single-Line V-Network (50 Ohm/5µH)      | ESH3-Z6                      | 100535                  | Rohde & Schwarz            | 12 M                    | -      | 17.05.2018 |
| 377      | EMI Test Receiver                       | ESCS 30                      | 100160                  | Rohde & Schwarz            | 12 M                    | -      | 15.05.2018 |
| 389      | Digital Multimeter                      | Keithley 2000                | 0583926                 | Keithley                   | 24 M                    | -      | 30.04.2017 |
| 392      | Radio Communication Tester              | MT8820A                      | 6K00000788              | Anritsu                    | 12 M                    | -      | 18.05.2018 |
| 405      | Thermo-/Hygrometer                      | OPUS 10 THI                  | 126.0604.0003.3.3.3.2 2 | LUFFT Mess u. Regeltechnik | 24 M                    | -      | 30.03.2019 |
| 431      | Model 7405                              | Near-Field Probe Set         | 9305-2457               | EMCO                       | -                       | 4      |            |
| 436      | Univ. Radio Communication Tester        | CMU 200                      | 103083                  | Rohde & Schwarz            | 12 M                    | -      | 24.05.2018 |
| 439      | UltraLog-Antenna                        | HL 562                       | 100248                  | Rohde & Schwarz            | 36 M                    | -      | 10.03.2020 |
| 441      | CTC-SAR-EMI Cable Loss                  | System EMI field (SAR) Cable | -                       | CETECOM                    | 12 M                    | 5      | 05.06.2017 |
| 443      | CTC-FAR-EMI-RSE                         | System CTC-FAR-EMI-RSE       | -                       | ETS-Lindgren / CETECOM     | 12 M                    | 5      | 30.09.2017 |

| Ref.-No. | Equipment                               | Type                        | Serial-No.              | Manufacturer                | Interval of calibration | Remark | Cal due    |
|----------|-----------------------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|--------|------------|
| 448      | notch filter WCDMA_FDD II               | WRCT 1850.0/2170.0-5/40-    | 5                       | Wainwright Instruments GmbH | 12 M                    | 1c     | 30.06.2017 |
| 449      | notch filter WCDMA FDD V                | WRCT 824.0/894.0-5/40-8SSK  | 1                       | Wainwright                  | 12 M                    | 1c     | 30.06.2017 |
| 454      | Oscilloscope                            | HM 205-3                    | 9210 P 29661            | Hameg                       | -                       | 4      |            |
| 456      | DC-Power supply 0-5 A                   | EA 3013 S                   | 207810                  | Elektro Automatik           | pre-m                   | 2      |            |
| 459      | DC -Power supply 0-5 A , 0-32 V         | EA-PS 2032-50               | 910722                  | Elektro Automatik           | pre-m                   | 2      |            |
| 460      | Univ. Radio Communication Tester        | CMU 200                     | 108901                  | Rohde & Schwarz             | 12 M                    | -      | 16.06.2018 |
| 463      | Universal source                        | HP3245A                     | 2831A03472              | Agilent                     | -                       | 4      |            |
| 466      | Digital Multimeter                      | Fluke 112                   | 89210157                | Fluke USA                   | 24 M                    | -      | 30.05.2018 |
| 467      | Digital Multimeter                      | Fluke 112                   | 89680306                | Fluke USA                   | 36 M                    | -      | 30.04.2018 |
| 468      | Digital Multimeter                      | Fluke 112                   | 90090455                | Fluke USA                   | 36 M                    | -      | 30.04.2018 |
| 477      | ReRadiating GPS-System                  | AS-47                       | -                       | Automotive Cons. Fink       | -                       | 3      |            |
| 480      | power meter (Fula)                      | NRVS                        | 838392/031              | Rohde & Schwarz             | 24 M                    | -      | 16.05.2019 |
| 482      | filter matrix                           | Filter matrix SAR 1         | -                       | CETECOM (Brl)               | -                       | 1d     |            |
| 484      | pre-amplifier 2,5 - 18 GHz              | AMF-5D-02501800-25-10P      | 1244554                 | Miteq                       | 12 M                    | -      | 30.07.2017 |
| 487      | System CTC NSA-Verification SAR-EMI     | System EMI field (SAR) NSA  | -                       | ETS Lindgren / CETECOM      | 24 M                    | -      | 31.03.2019 |
| 489      | EMI Test Receiver                       | ESU40                       | 1000-30                 | Rohde & Schwarz             | 12 M                    | -      | 18.05.2019 |
| 502      | band reject filter                      | WRCG 1709/1786-1699/1796-   | SN 9                    | Wainwright                  | pre-m                   | 2      |            |
| 503      | band reject filter                      | WRCG 824/849-814/859-       | SN 5                    | Wainwright                  | pre-m                   | 2      |            |
| 512      | notch filter GSM 850                    | WRCA 800/960-02/40-6EEK     | SN 24                   | Wainwright                  | 12 M                    | 1c     | 30.06.2017 |
| 517      | relais switch matrix                    | HF Relais Box Keithley      | SE 04                   | Keithley                    | pre-m                   | 2      |            |
| 523      | Digital Multimeter                      | L4411A                      | MY46000154              | Agilent                     | 24 M                    | -      | 18.05.2019 |
| 529      | 6 dB Broadband resistive power divider  | Model 1515                  | LH 855                  | Weinschel                   | pre-m                   | 2      |            |
| 530      | 10 dB Broadband resistive power divider | R 416110000                 | LOT 9828                | -                           | pre-m                   | 2      |            |
| 546      | Univ. Radio Communication Tester        | CMU 200                     | 106436                  | R&S                         | 12 M                    | -      | 30.03.2018 |
| 547      | Univ. Radio Communication Tester        | CMU 200                     | 835390/014              | Rohde & Schwarz             | 12 M                    | -      | 05.07.2018 |
| 549      | Log.Per-Antenna                         | HL025                       | 1000060                 | Rohde & Schwarz             | 36/12 M                 | -      | 31.07.2018 |
| 550      | System CTC S-VSWR Verification SAR-EMI  | System EMI Field SAR S-VSWR | -                       | ETS Lindgren/CETECOM        | 24 M                    | -      | 30.03.2019 |
| 552      | high pass filter 2,8-18GHz              | WHKX 2.8/18G-10SS           | 4                       | Wainwright                  | 12 M                    | 1c     | 30.06.2017 |
| 557      | System CTC-OTA-2                        | R&S TS8991                  | -                       | Rohde & Schwarz             | 12 M                    | 5      | 30.09.2016 |
| 558      | System CTC FAR S-VSWR                   | System CTC FAR S-VSWR       | -                       | CTC                         | 24 M                    | -      | 08.08.2019 |
| 574      | Biconilog Hybrid Antenna                | BTA-L                       | 980026L                 | Frankonia                   | 36/12 M                 | -      | 31.03.2019 |
| 584      | Spectrum Analyzer                       | FSU 8                       | 100248                  | Rohde & Schwarz             | pre-m                   | -      |            |
| 594      | Wideband Radio Communication Tester     | CMW 500                     | 101757                  | Rohde & Schwarz             | 12 M                    | -      | 30.04.2017 |
| 597      | Univ. Radio Communication Tester        | CMU 200                     | 100347                  | Rohde & Schwarz             | pre-m                   | -      |            |
| 600      | power meter                             | NRVD (Reserve)              | 834501/018              | Rohde & Schwarz             | 24 M                    | -      | 17.05.2019 |
| 601      | medium-sensitivity diode sensor         | NRV-Z5 (Reserve)            | 8435323/003             | Rohde & Schwarz             | 24 M                    | -      | 15.05.2019 |
| 602      | peak power sensor                       | NRV-Z32 (Reserve)           | 835080                  | Rohde & Schwarz             | 24 M                    | -      |            |
| 611      | DC power supply                         | E3632A                      | KR 75305854             | Agilent                     | pre-m                   | 2      |            |
| 612      | DC power supply                         | E3632A                      | MY 40001321             | Agilent                     | pre-m                   | 2      |            |
| 613      | Attenuator                              | R416120000 20dB 10W         | Lot. 9828               | Radiall                     | pre-m                   | 2      |            |
| 616      | Digitalmultimeter                       | Fluke 177                   | 88900339                | Fluke                       | 24 M                    | -      | 30.05.2018 |
| 617      | Power Splitter/Combiner                 | ZFSC-2-2-S+                 | S F987001108            | Mini Circuits               | -                       | 2      |            |
| 618      | Power Splitter/Combiner                 | 50PD-634                    | 600994                  | JFW Industries USA          | -                       | 2      |            |
| 619      | Power Splitter/Combiner                 | 50PD-634                    | 600995                  | JFW Industries, USA         | -                       | 3      |            |
| 620      | EMI Test Receiver                       | ESU 26                      | 100362                  | Rohde-Schwarz               | 12 M                    | -      | 16.05.2018 |
| 621      | Step Attenuator 0-139 dB                | RSP                         | 100017                  | Rohde & Schwarz             | pre-m                   | 2      |            |
| 625      | Generic Test Load USB                   | Generic Test Load USB       | -                       | CETECOM                     | -                       | 2      |            |
| 627      | data logger                             | OPUS 1                      | 201.0999.9302.6.4.1.4 3 | G. Lufft GmbH               | 24 M                    | -      | 30.03.2019 |
| 634      | Spectrum Analyzer                       | FSM (HF-Unit)               | 826188/010              | Rohde & Schwarz             | pre-m                   | 2      |            |
| 637      | High Speed HDMI with Ethernet 1m        | HDMI cable with Ethernet 1m | -                       | Kogilink                    | -                       | 2      |            |
| 638      | HDMI Kabel with Ethernet 1,5 m flach    | HDMI cable with Ethernet    | -                       | Reichelt                    | -                       | 2      |            |
| 640      | HDMI cable 2m rund                      | HDMI cable 2m rund          | -                       | Reichelt                    | -                       | 2      |            |
| 641      | HDMI cable with Ethernet                | Certified HDMI cable with   | -                       | PureLink                    | -                       | 2      |            |
| 642      | Wideband Radio Communication Tester     | CMW 500                     | 126089                  | Rohde&Schwarz               | 12 M                    | -      | 24.05.2018 |
| 644      | Amplifierer                             | ZX60-2534M+                 | SN865701299             | Mini-Circuits               | -                       | -      |            |
| 670      | Univ. Radio Communication Tester        | CMU 200                     | 106833                  | Rohde & Schwarz             | 24 M                    | -      | 30.05.2018 |
| 671      | DC-power supply 0-5 A                   | EA-3013S                    | -                       | Elektro Automatik           | pre-m                   | 2      |            |
| 678      | Power Meter                             | NRP                         | 101638                  | Rohde&Schwarz               | pre-m                   | -      |            |
| 683      | Spectrum Analyzer                       | FSU 26                      | 200571                  | Rohde & Schwarz             | 12 M                    | -      | 17.05.2018 |
| 686      | Field Analyzer                          | EHP-200A                    | 160WX30702              | Narda Safety Test Solutions | 24 M                    | -      | 29.03.2019 |
| 687      | Signal Generator                        | SMF 100A                    | 102073                  | Rohde&Schwarz               | 12 M                    | -      | 17.05.2018 |
| 688      | Pre Amp                                 | JS-18004000-40-8P           | 1750117                 | Miteq                       | pre-m                   | -      |            |

| Ref.-No. | Equipment                         | Type                    | Serial-No.             | Manufacturer           | Interval of calibration | Remark | Cal due    |
|----------|-----------------------------------|-------------------------|------------------------|------------------------|-------------------------|--------|------------|
| 690      | Spectrum Analyzer                 | FSU                     | 100302/026             | Rohde&Schwarz          | 12 M                    | -      | 16.05.2018 |
| 691      | OSP120 Base Unit                  | OSP120                  | 101183                 | Rohde & Schwarz        | 12 M                    | -      | 22.05.2018 |
| 692      | Bluetooth Tester                  | CBT 32                  | 100236                 | Rohde & Schwarz        | 36 M                    | -      | 29.05.2020 |
| 693      | TS8997                            | CTC-Radio Lab 1_ TS8997 | -                      | Rohde&Schwarz          | 12 M                    | 5      | 06.06.2017 |
| 697      | Power Splitter                    | ZN4PD-642W-S+           | 165001445              | Mini-Circuits          | -                       | 2      |            |
| 701      | CMW500 wide. Radio Comm.          | CMW500                  | 158150                 | Rohde & Schwarz        | 12 M                    | -      | 01.05.2017 |
| 703      | INNCO Antennen Mast               | MA 4010-KT080-XPET-ZSS3 | MA4170-KT100-XPET-     | INNCO                  | pre-m                   | -      |            |
| 704      | INNCON Controller                 | CO 3000-4port           | CO3000/933/3841051 6/L | INNCO Systems GmBh     | pre-m                   | -      |            |
| 711      | Harmonic Mixer 90 GHz - 140GHz    | RPG FS-Z140             | 101004                 | RPG                    | 12 M                    | -      | 22.02.2018 |
| 712      | Harmonic Mixer 75 GHz - 110GHz    | FS-Z110                 | 101468                 | Rohde & Schwarz        | 12 M                    | -      | 22.02.2018 |
| 713      | Harmonic Mixer, 50 GHz - 75GHz    | FS-Z75                  | 101022                 | Rohde & Schwarz        | 12 M                    | -      | 22.05.2018 |
| 714      | Signal Analyzer 67GHz             | FSW67                   | 104023                 | Rohde & Schwarz        | 24 M                    | -      | 03.03.2019 |
| 715      | Harmonic Mixer, 140 GHz - 220GHz  | FS-Z220                 | 101009                 | RPG Radiometer Physics | 12 M                    | -      | 03.08.2018 |
| 716      | Harmonic Mixer 220 GHz to 325 GHZ | FS-Z325                 | 101005                 | RPG Radiometer Physics | 12 M                    | -      | 13.02.2018 |
| 747      | Spectrum Analyzer                 | FSU 26                  | 200152                 | Rohde & Schwarz        | 12 M                    | -      | 18.05.2018 |
| 748      | Pickett-Potter Horn Antenna       | FH-PP 4060              | 010001                 | Radiometer Physicscs   | -                       | -      |            |
| 749      | Pickett-potter Horn Antenna       | FH-PP 60-90             | 010003                 | Radiometer Physics     | -                       | -      |            |
| 750      | Pickett-Potter Horn Antenna       | FH-PP 140-220           | 010011                 | Radiometer Physics     | -                       | -      |            |

### 7.1.3. Legend

| Note / remarks |     | Calibrated during system calibration:                                                     |
|----------------|-----|-------------------------------------------------------------------------------------------|
|                | 1a  | System CTC-SAR-EMS (Ref.-No. 442)                                                         |
|                | 1b  | System-CTC-EMS-Conducted (Ref.-No. 335)                                                   |
|                | 1c  | System CTC-FAR-EMI-RSE (Ref.-No. 443)                                                     |
|                | 1d  | System CTC-SAR-EMI (Ref.-No. 441)                                                         |
|                | 1e  | System CTC-OATS (EMI radiated) (Ref.-No. 337)                                             |
|                | 1 f | System CTC-CTIA-OTA (Ref.-No. 420)                                                        |
|                | 1 g | System CTC-FAR-EMS (Ref.-No. 444)                                                         |
|                | 2   | Calibration or equipment check immediately before measurement                             |
|                | 3   | Regulatory maintained equipment for functional check or support purpose                   |
|                | 4   | Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment |
|                | 5   | Test System                                                                               |

|                         |         |                                                                               |
|-------------------------|---------|-------------------------------------------------------------------------------|
| Interval of calibration | 12 M    | 12 month                                                                      |
|                         | 24 M    | 24 month                                                                      |
|                         | 36 M    | 36 month                                                                      |
|                         | 24/12 M | Calibration every 24 months, between this every 12 months internal validation |
|                         | 36/12 M | Calibration every 36 months, between this every 12 months internal validation |
|                         | Pre-m   | Check before starting the measurement                                         |
|                         | -       | Without calibration                                                           |

## 8. Versions of test reports (change history)

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| --      | Initial release | 2016-12-12      |
| --      | --              | --              |