



BNetzA-CAB-02/21-102

## TEST REPORT

Test report no.: 1-7227\_23-01-03



### Testing laboratory

**cetecom advanced GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <https://cetecomadvanced.com>  
e-mail: [mail@cetecomadvanced.com](mailto:mail@cetecomadvanced.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

### Applicant

**Elektroniksystem i Umeå AB**  
Tvistevägen 48  
90736 Umeå / SWEDEN  
Phone: +46 901 00500  
Contact: Johan Haake  
e-mail: [johan@elsys.se](mailto:johan@elsys.se)

### Manufacturer

**Elektroniksystem i Umeå AB**  
Tvistevägen 48  
90736 Umeå / SWEDEN

### Test standard/s

FCC - Title 47 CFR Part 15      FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 3      Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

<b>Kind of test item:</b>	<b>LoRa device</b>
<b>Model name:</b>	<b>ELT lite, ELT 2</b>
<b>FCC ID:</b>	<b>2ANX3-ELT01</b>
<b>ISED certification number:</b>	<b>26904-ELT01</b>
<b>Frequency:</b>	902.0 MHz – 928.0 MHz
<b>Technology tested:</b>	LoRa
<b>Antenna:</b>	external antenna (RP-SMA connector)
<b>Power supply:</b>	3.2 V to 3.7 V DC by battery
<b>Temperature range:</b>	-20°C to +55°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Christoph Schneider  
Lab Manager  
Radio Labs

### Test performed:

Hans-Joachim Wolsdorfer  
Lab Manager  
Radio Labs

## 1 Table of contents

1	Table of contents.....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details .....	3
2.3	Test laboratories sub-contracted .....	3
3	Test standard/s, references and accreditations .....	4
4	Reporting statements of conformity – decision rule .....	5
5	Test environment.....	6
6	Test item .....	6
6.1	General description .....	6
6.2	Additional information .....	6
7	Description of the test setup.....	7
7.1	Shielded semi anechoic chamber .....	8
7.2	Shielded fully anechoic chamber.....	10
7.3	Conducted measurements .....	11
8	Sequence of testing.....	12
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz .....	12
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz .....	13
8.3	Sequence of testing radiated spurious 1 GHz to 10 GHz.....	14
9	Measurement uncertainty .....	15
10	Additional comments .....	16
11	Summary of measurement results .....	17
12	Measurement results .....	18
12.1	Maximum output power .....	18
12.2	Antenna gain .....	21
12.3	Power spectral density .....	22
12.4	Spectrum bandwidth – 6 dB bandwidth and 99% bandwidth .....	25
12.5	Detailed spurious emissions @ the band edge – conducted and radiated .....	29
12.6	Spurious Emissions Conducted .....	32
12.7	Spurious Emissions Radiated < 30 MHz.....	35
12.8	Spurious Emissions Radiated > 30 MHz.....	40
12.8.1	Spurious emissions radiated 30 MHz to 1 GHz .....	40
12.8.2	Spurious emissions radiated above 1 GHz .....	44
13	Glossary .....	48
14	Document history.....	49

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order: 2023-11-10

Date of receipt of test item: 2024-01-26

Start of test:\* 2024-01-29

End of test:\* 2024-04-15

Person(s) present during the test: -/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations


Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 3	August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 5 incl. Amendment 1 & 2	February 2021	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus
Guidance	Version	Description
KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2020	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

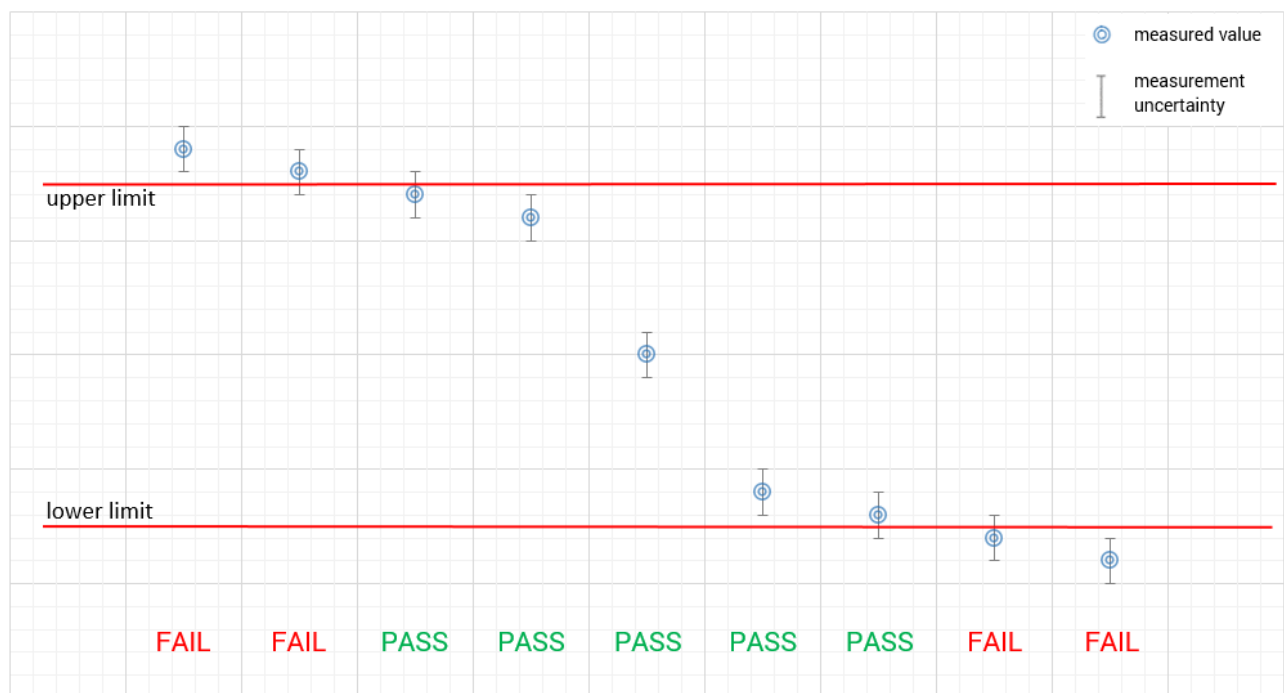

## 5 Test environment

Temperature :	T <sub>nom</sub> T <sub>max</sub> T <sub>min</sub>	+22 °C during room temperature tests No tests under extreme environmental conditions required. No tests under extreme environmental conditions required.
Relative humidity content :		55 %
Barometric pressure :		1021 hpa
Power supply :	V <sub>nom</sub> V <sub>max</sub> V <sub>min</sub>	3.6 V DC by battery No tests under extreme environmental conditions required. No tests under extreme environmental conditions required.

## 6 Test item

### 6.1 General description

Kind of test item :	LoRa device
Model name :	ELT lite, ELT 2
HMN :	-/-
PMN :	ELT series
HVIN :	ELT lite, ELT 2
FVIN :	-/-
S/N serial number :	Rad. prototype Cond. prototype
Hardware status :	4
Software status :	2
Firmware status :	2
Frequency band :	902.0 MHz – 928.0 MHz
Type of radio transmission :	DTS
Use of frequency spectrum :	
Type of modulation :	CSS
Number of channels :	8
Antenna :	external antenna (RP-SMA connector)
Power supply :	3.2 V to 3.7 V DC by battery
Temperature range :	-20°C to +55°C

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-7227\_23-01-01\_TR1-A101-R1  
1-7227\_23-01-01\_TR1-A102-R1  
1-7227\_23-01-01\_TR1-A104-R1

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

**Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

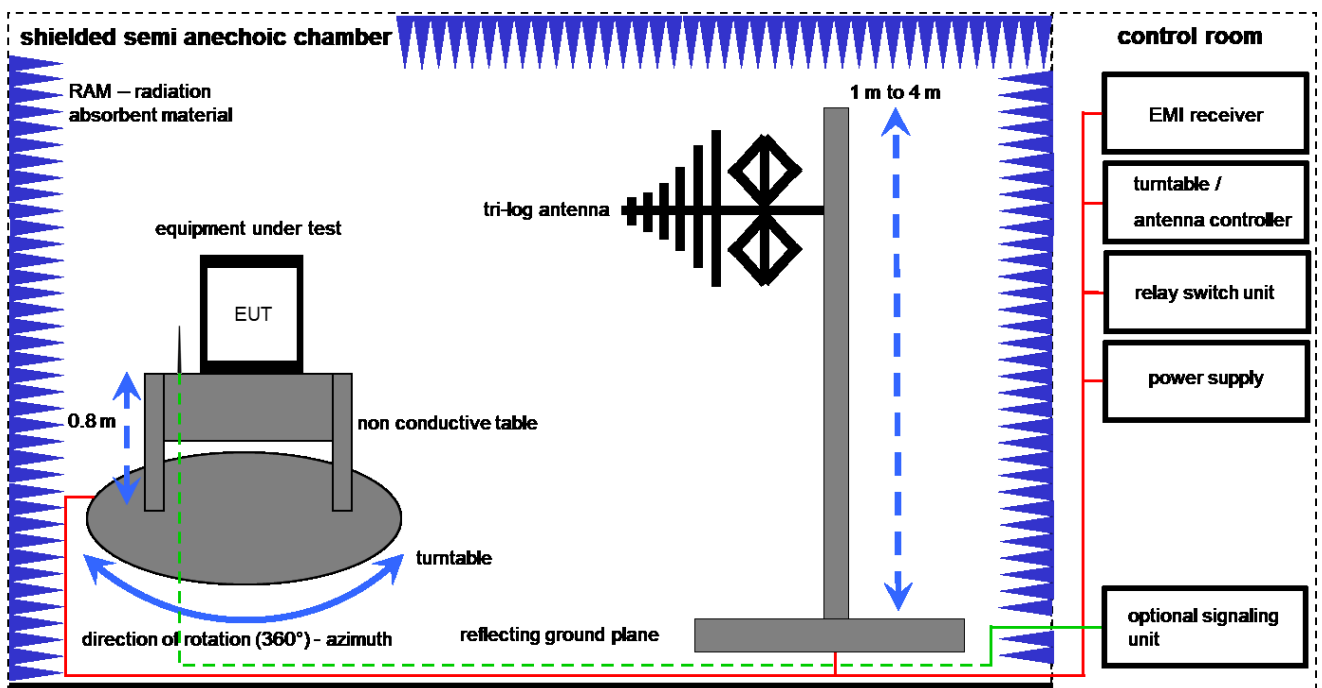

Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.59.00

$FS = UR + CL + AF$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:


$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$



**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG	-/-	300000551	ne	-/-	-/-
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	295	300003787	vKI!	23.05.2023	31.05.2025
7	A	Turntable	2089-4.0	EMCO	-/-	300004394	ne	-/-	-/-
8	A	PC	TecLine	F+W	-/-	300004388	ne	-/-	-/-
9	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	06.12.2023	31.12.2024

## 7.2 Shielded fully anechoic chamber

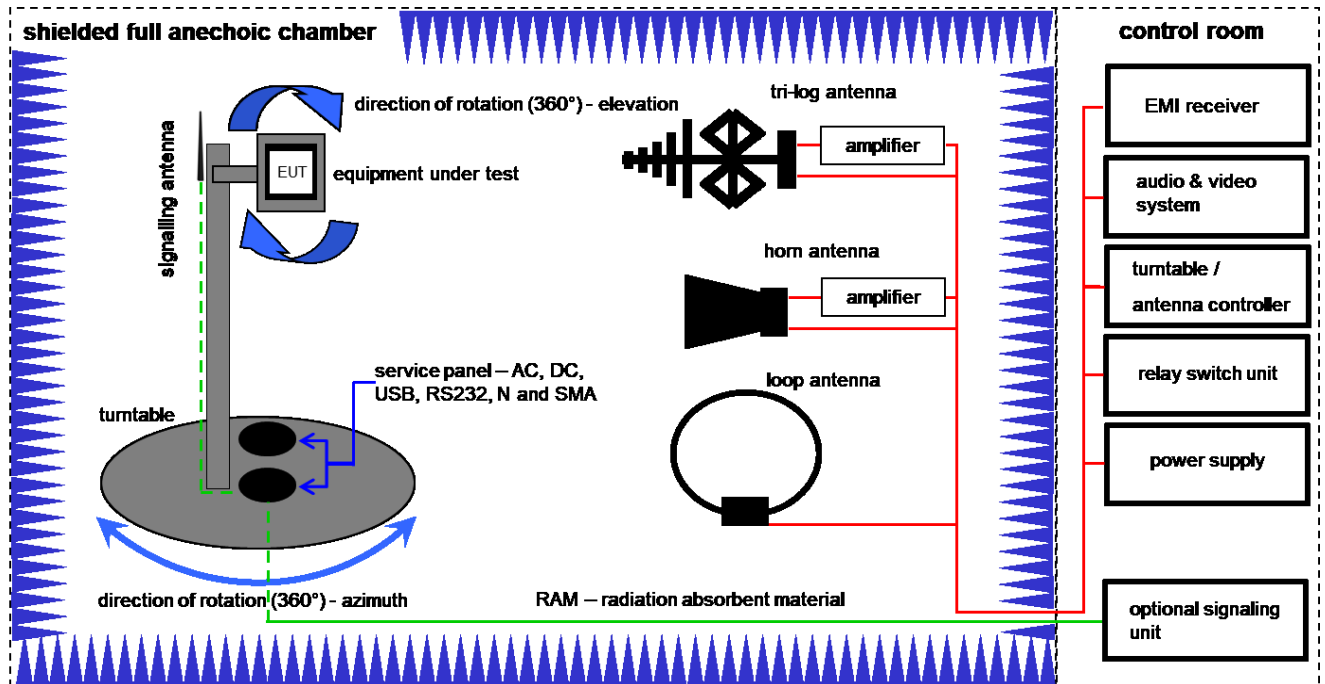

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


FS [dBμV/m] = 40.0 [dBμV/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dBμV/m] (71.61 μV/m)

### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	C	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	10.10.2023	31.10.2025
2	A,B,C	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	A,B,C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	11.12.2023	31.12.2024
4	C	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
5	B	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	01029	300005379	vIKI!	09.10.2023	31.10.2025
6	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vIKI!	02.08.2023	31.08.2025
7	C	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
8	A,B,C	NEXIO EMV-Software	BAT EMC V2022.0.22.0	Nexio	-/-	300004682	ne	-/-	-/-

### 7.3 Conducted measurements

#### Conducted measurements normal conditions

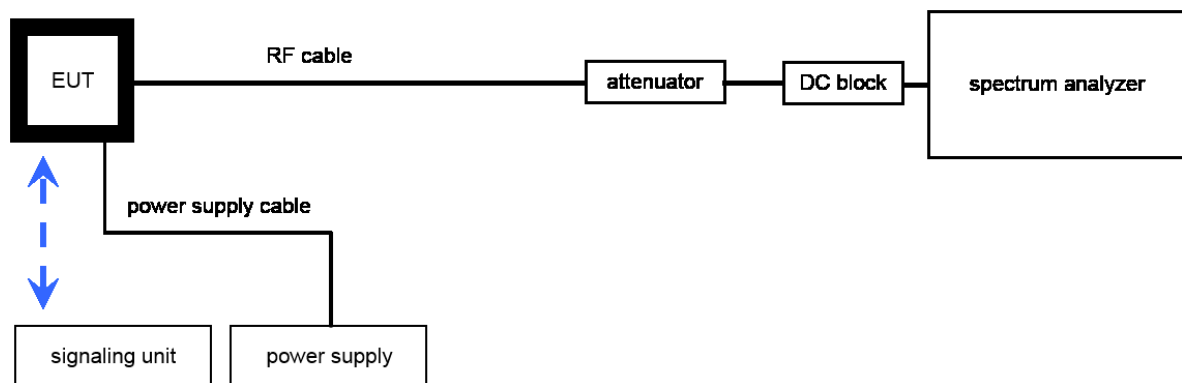

OP = AV + CA  
(OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal analyzer	FSW26	Rohde&Schwarz	101371	300005697	k	07.12.2023	31.12.2024
2	A	Power Supply	HMP2020	Rohde & Schwarz	102219	300006192	k	15.12.2022	31.12.2024

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*Note: The sequence will be repeated three times with different EUT orientations.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 8.3 Sequence of testing radiated spurious 1 GHz to 10 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 9 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	$\pm 3$ dB
Carrier frequency separation	$\pm 21.5$ kHz
Spectrum bandwidth	$\pm 21.5$ kHz absolute; $\pm 15.0$ kHz relative
Maximum output power	$\pm 1$ dB
Detailed conducted spurious emissions @ the band edge	$\pm 1$ dB
Band edge compliance radiated	$\pm 3$ dB
Spurious emissions conducted	$\pm 3$ dB
Spurious emissions radiated below 30 MHz	$\pm 3$ dB
Spurious emissions radiated 30 MHz to 1 GHz	$\pm 3$ dB
Spurious emissions radiated 1 GHz to 12.75 GHz	$\pm 3.7$ dB
Spurious emissions radiated above 12.75 GHz	$\pm 4.5$ dB

## 10 Additional comments

Reference documents: Customer Questionnaire ECO FCC

Special test descriptions: the EUT has been powered by a 3.6 V Li battery during the tests  
(see photo Annex)

Configuration descriptions: None

Test mode: ☒ Special software is used.  
EUT is transmitting pseudo random data by itself



## 11 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS Gen clause 4.6.1	Spectrum bandwidth 6dB bandwidth	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance conducted	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§§15.247(d) RSS - 247 / 5.5	TX spurious emissions conducted	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	TX single channel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions below 30 MHz (AC conducted)	Nominal	Nominal	-/-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	battery powered

## 12 Measurement results

### 12.1 Maximum output power

#### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	5 MHz
Trace-Mode:	Max Hold
Measurement method	According to ANSI C63.10-2020 11.9.1 Maximum peak conducted output power 11.9.2.2.2 Method AVGSA-1A (alternative)
Used equipment:	See chapter 7.3 A
Measurement uncertainty:	See chapter 9

#### Limits:

FCC	IC
1 watt (30 dBm) Maximum Output Power Conducted	


#### Result:

Test Conditions		Maximum Output Power Conducted / dBm		
		low channel	middle channel	high channel
$T_{nom}$	$V_{nom}$	13.82	13.72	13.60


Test Conditions		ERP / dBm		
		low channel	middle channel	high channel
$T_{nom}$	$V_{nom}$	14.25	14.27	14.26

**Plots:**


Plot 1: low channel

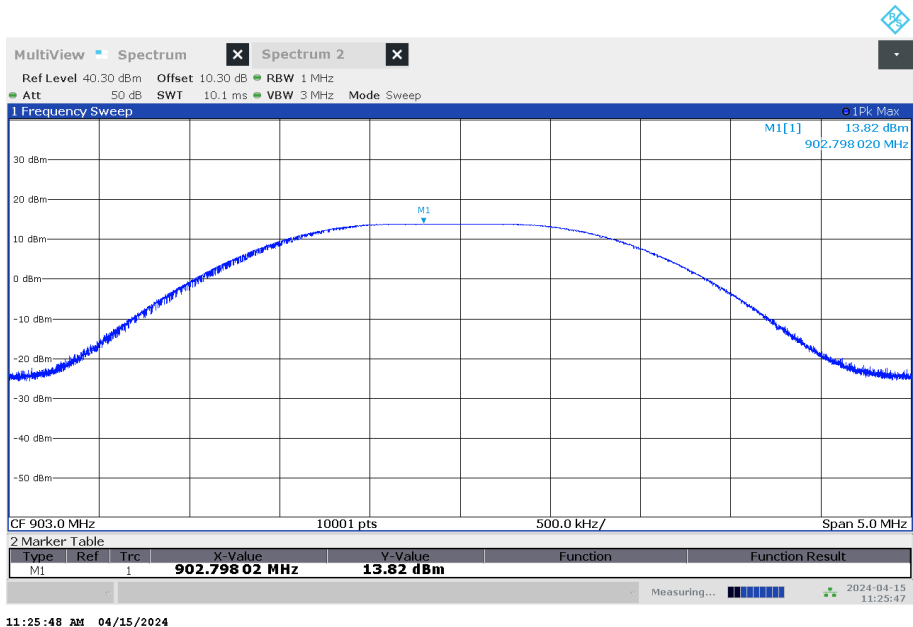

Plot 2: middle channel

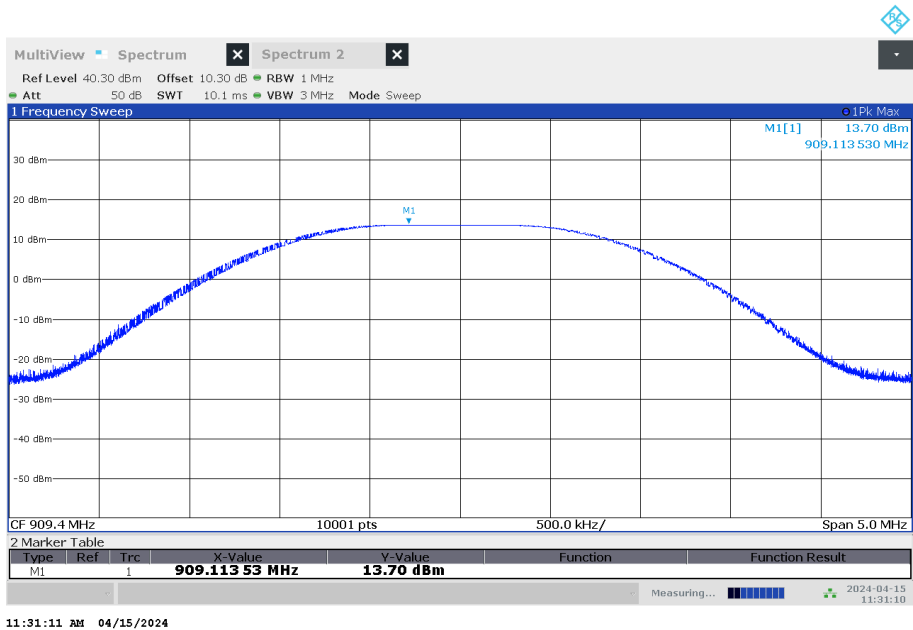

Plot 3: high channel

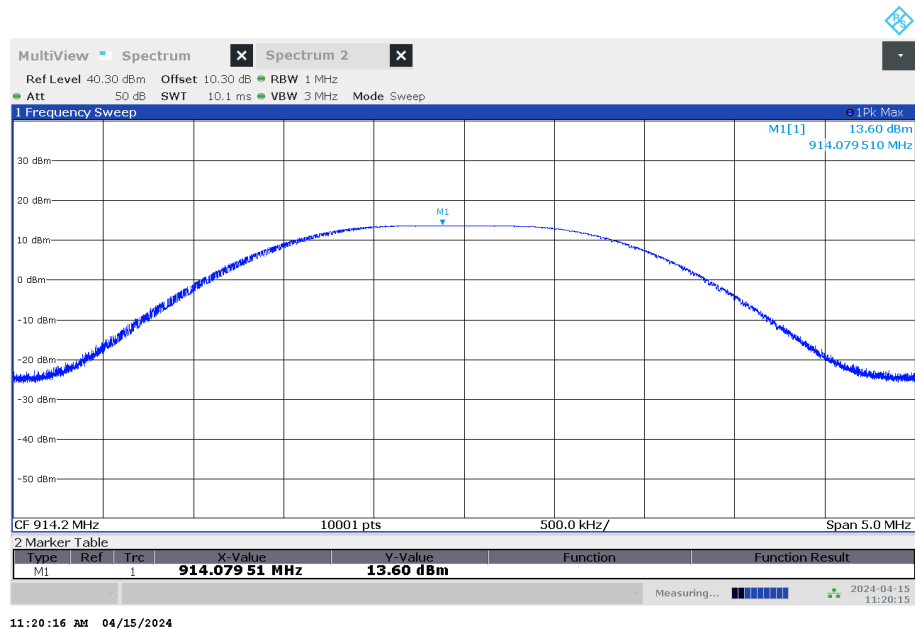

## 12.2 Antenna gain

### Description:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

### Measurement:

Measurement parameters	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Span	5 MHz
Trace mode	Max hold
Test setup	See sub clause 7.2 B (radiated) See sub clause 7.3 A (conducted)
Measurement uncertainty	See sub clause 9

### Limits:

FCC	IC
Antenna gain	
The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	

### Results:

	low channel	middle channel	high channel
Conducted power / dBm	13.82	13.70	13.60
Radiated power (e.r.p.) / dBm	14.25	14.27	14.26
Gain / dBi (Calculated)	2.58	2.72	2.81

## 12.3 Power spectral density

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	10 kHz
Resolution bandwidth:	3 kHz
Span:	1 MHz
Trace-Mode:	Max Hold
Measurement method	According to ANSI C63.10-2020 11.10.2 Method PKPSD
Test setup	See sub clause 7.3 A
Measurement uncertainty	See sub clause 9

### Limits:


FCC	IC
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	

### Results:


Power Spectral density / (dBm/3kHz)			
channel	low	middle	high
	1.49	1.29	1.81

**Plots:**


Plot 1: low channel

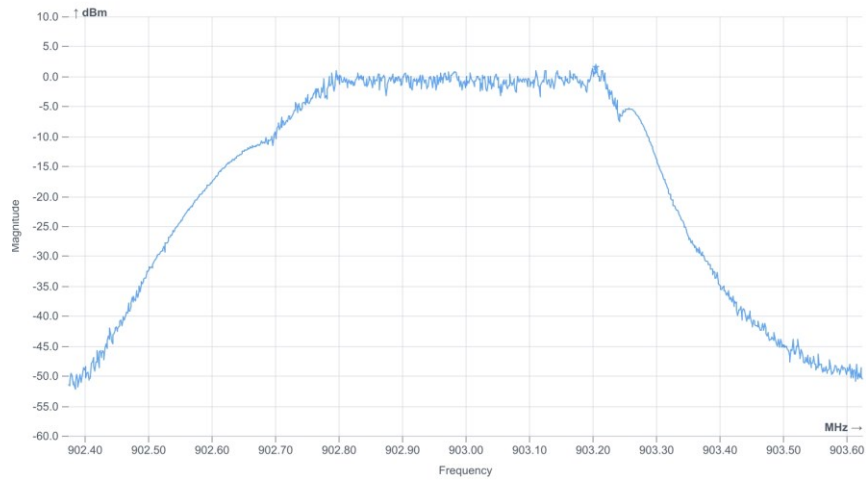

Plot 2: middle channel

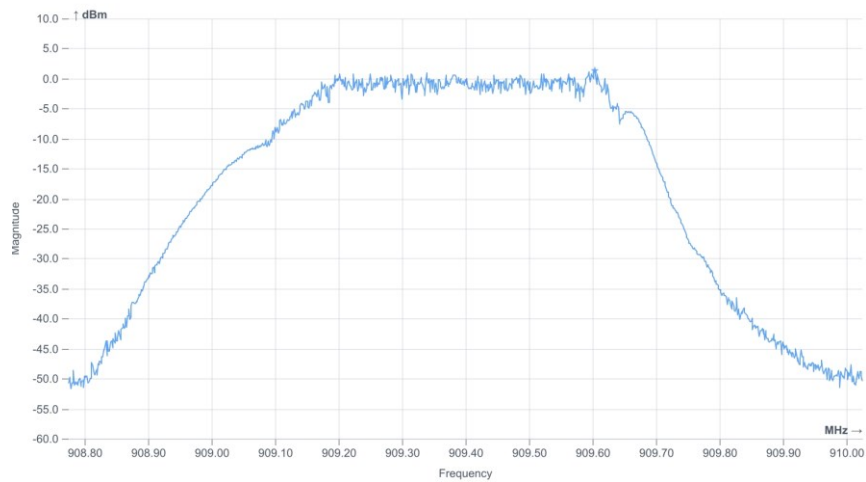

Plot 3: high channel

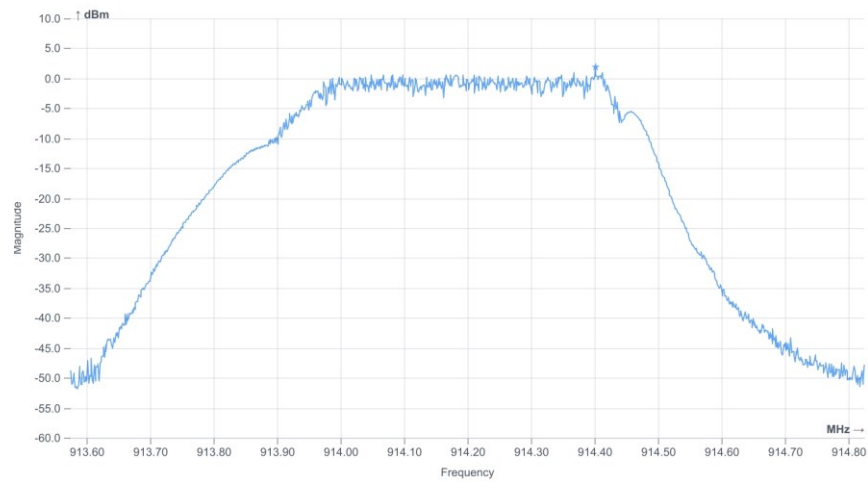



## 12.4 Spectrum bandwidth – 6 dB bandwidth and 99% bandwidth

### Description:

Measurement of the 6 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	99% OBW: 1% - 5% Of the OBW 6 dB BW: 100 kHz
Video bandwidth:	$\geq 3 \times \text{RBW}$
Span:	See plots
Trace-Mode:	Max Hold
Measurement method	According to ANSI C63.10-2020 11.8 DTS bandwidth
Test setup	See sub clause 7.3 A
Measurement uncertainty	See sub clause 9

### Limits:

FCC	IC
Spectrum Bandwidth – 6 dB Bandwidth	
The minimum 6 dB bandwidth shall be at least 500 kHz.	


### Results:

Test Conditions		6 dB Bandwidth / kHz		
		low channel	middle channel	high channel
$T_{\text{nom}}$	$V_{\text{nom}}$	817.80	814.80	813.80


Test Conditions		99% Bandwidth / kHz		
		low channel	middle channel	high channel
$T_{\text{nom}}$	$V_{\text{nom}}$	672.13	668.65	668.54

**Plots:**


Plot 1: low channel, 6 dB-BW

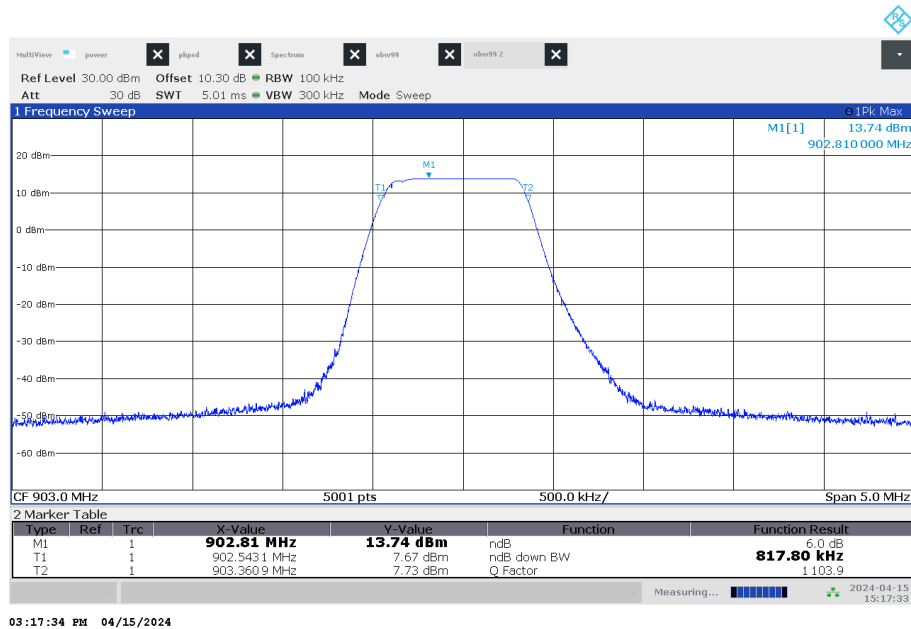


Plot 2: low channel, 99%OBW

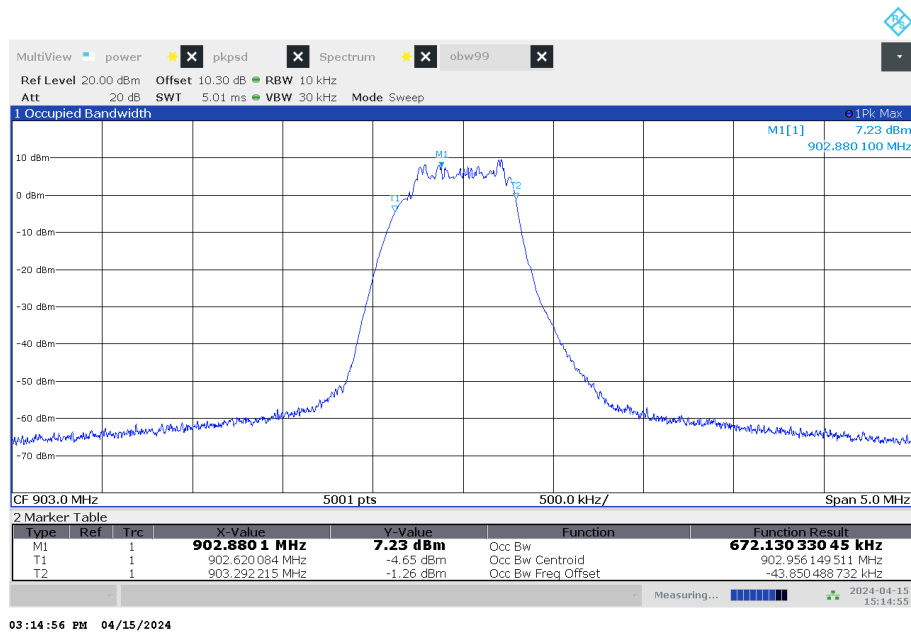


Plot 3: middle channel, 6 dB-BW

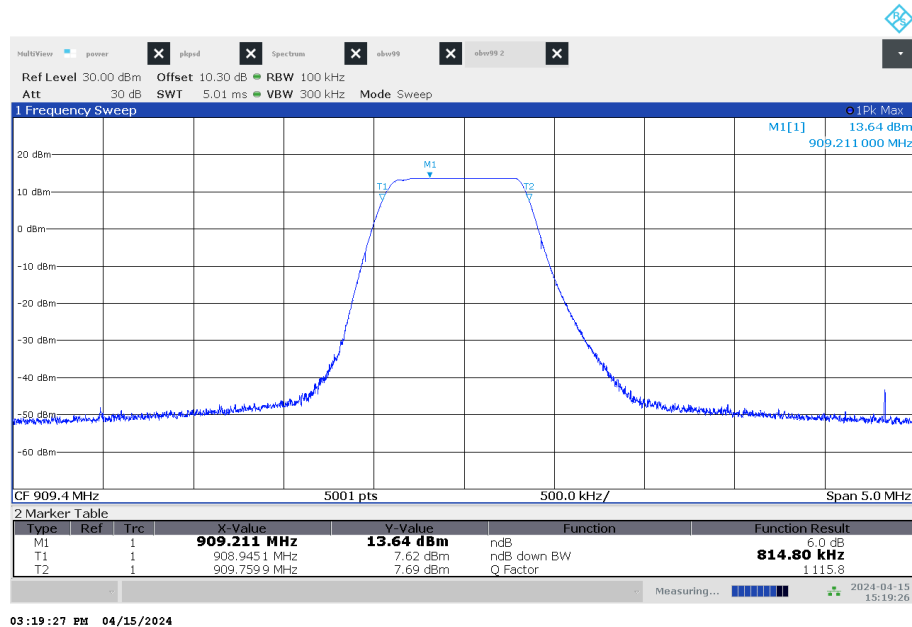


Plot 4: middle channel, 99%OBW

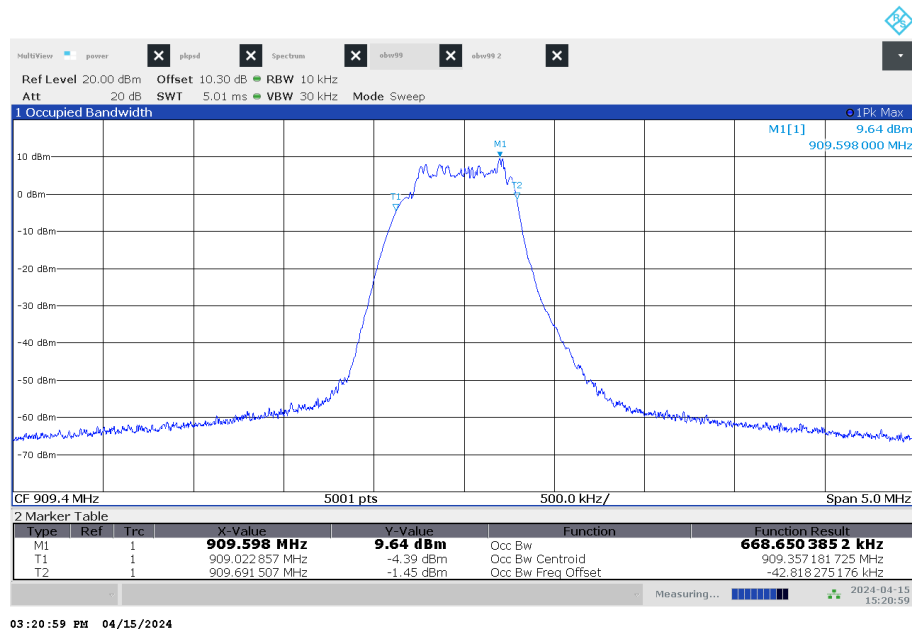

Plot 5: high channel, 6 dB-BW

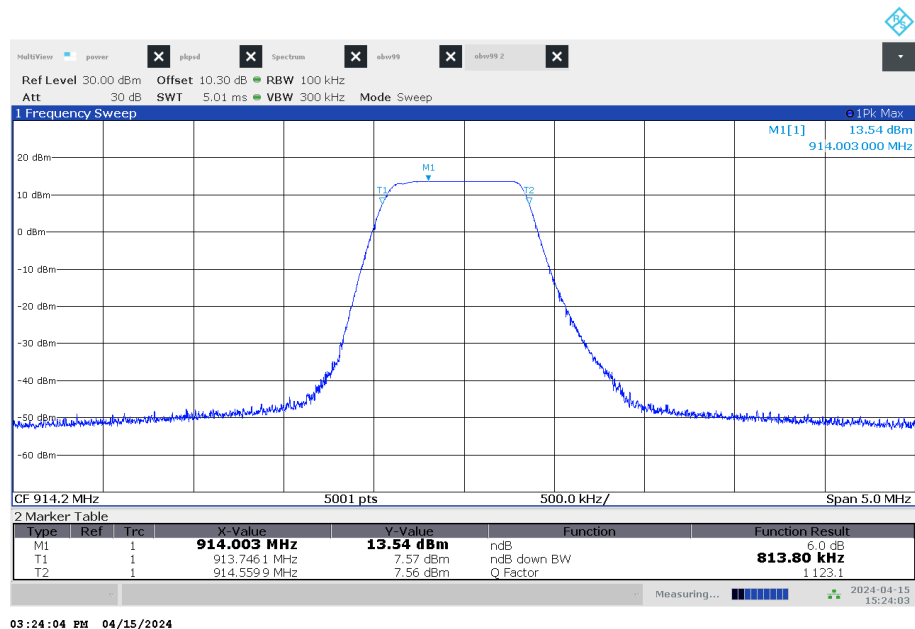

Plot 6: high channel, 99%OBW

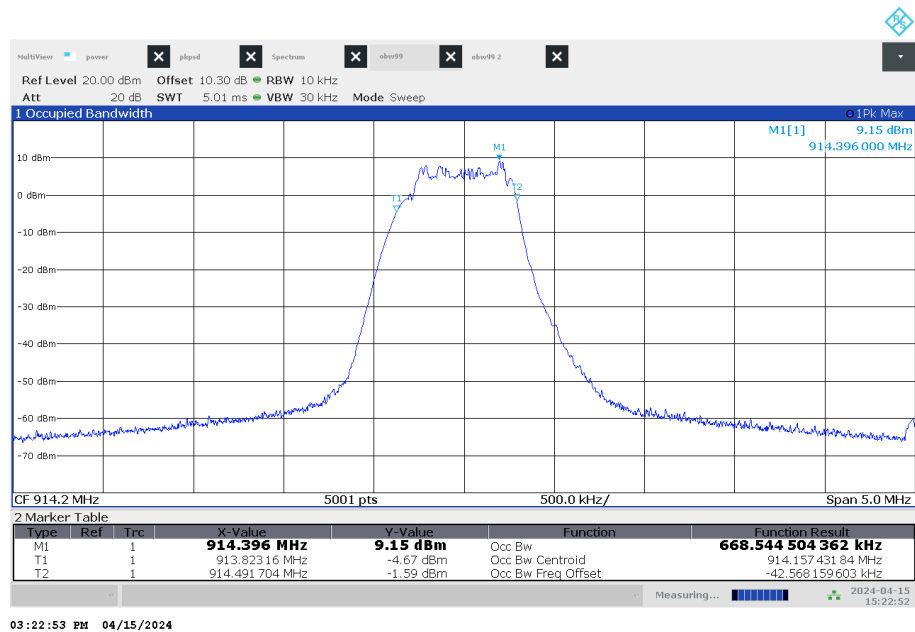

## 12.5 Detailed spurious emissions @ the band edge – conducted and radiated

### Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in single channel mode.

### Measurement:

Measurement parameters	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	Lower Band Edge: 902 MHz Upper Band Edge: 928 MHz
Trace mode	Max hold
Test setup	See sub clause 7.3 A
Measurement uncertainty	See sub clause 9

### Limits:


FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	

### Results conducted:


Scenario	Spurious band edge conducted / dB		
Modulation	lowest channel	middle channel	highest channel
lower band edge – single channel mode	> 20 dB	> 20 dB	> 20 dB
upper band edge – single channel mode	> 20 dB	> 20 dB	> 20 dB

**Plots:**

**Plot 1: low channel**

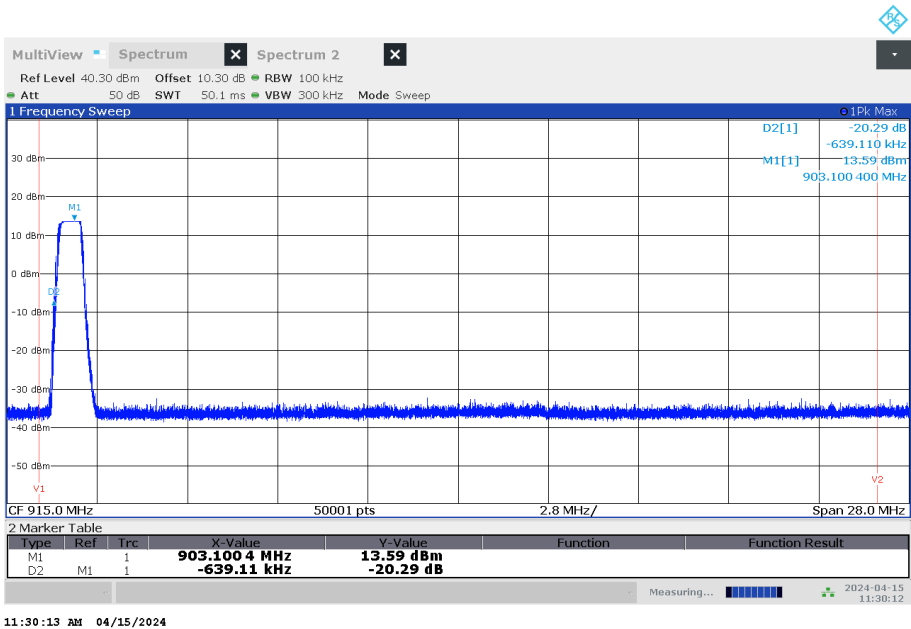

**Plot 2: high channel**

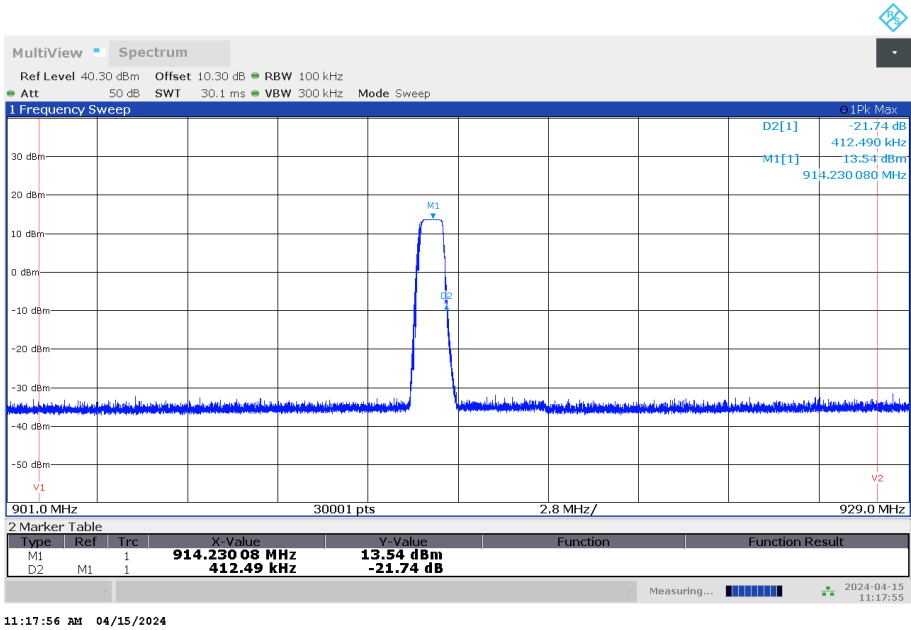

**Results radiated:**

No restricted band in the range  $\pm 2$  channel bandwidths of the Band-edges of the specified emission band! (608 MHz – 614 MHz and 960 MHz – 1240 MHz).

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

## 12.6 Spurious Emissions Conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode. The measurement is repeated for low, mid and high channel.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 1 MHz F > 1 GHz: 1 MHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 12.75 GHz
Trace-Mode:	Max Hold
Used equipment:	See chapter 7.3A
Measurement uncertainty:	See chapter 9

### Limits:

FCC	IC
TX spurious emissions conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	


### Result:

Emission Limitation				
Frequency / MHz	Amplitude of emission / dBm	Limit max. allowed emission power	actual attenuation below frequency of operation / dB	Results
903.0	-/-	24 dBm		Operating frequency
		-20 dBc	No emissions detected!	
909.4	-/-	24 dBm		Operating frequency
		-20 dBc	No emissions detected!	
914.2	-/-	24 dBm		Operating frequency
		-20 dBc	No emissions detected!	




**Plots:**


Plot 1: low channel, 1 MHz – 12.75 GHz

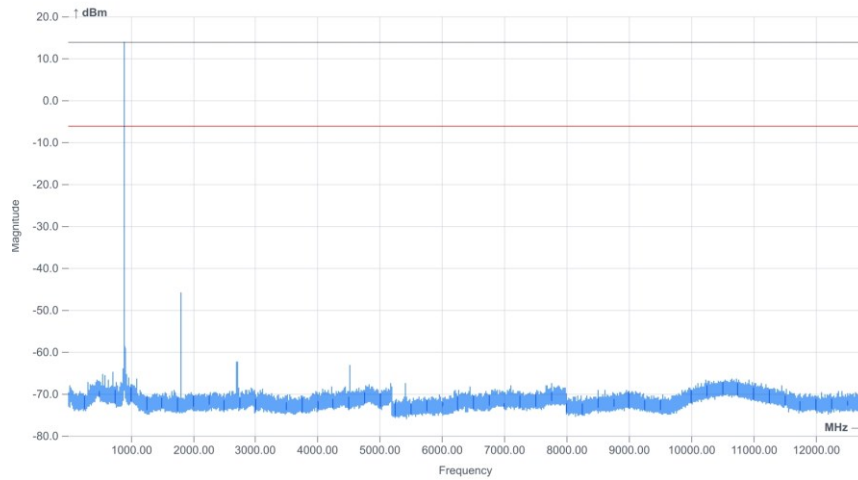

Plot 2: middle channel, 1 MHz – 12.75 GHz

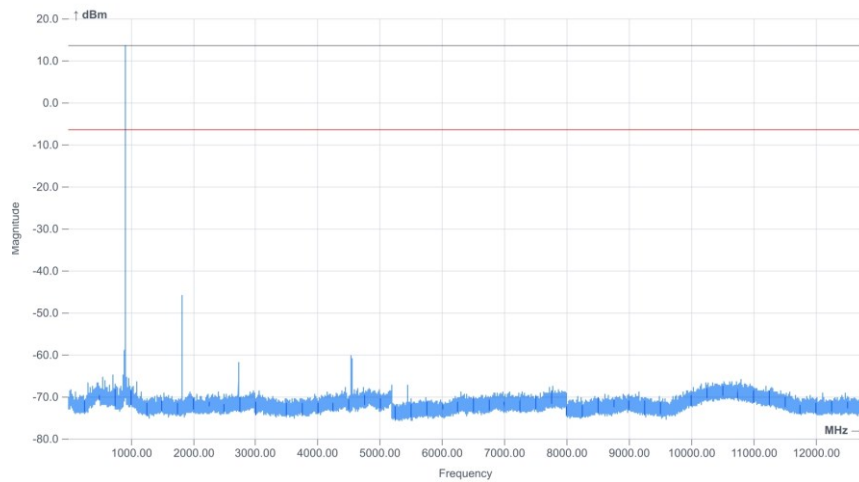

Plot 3: high channel, 1 MHz – 12.75 GHz

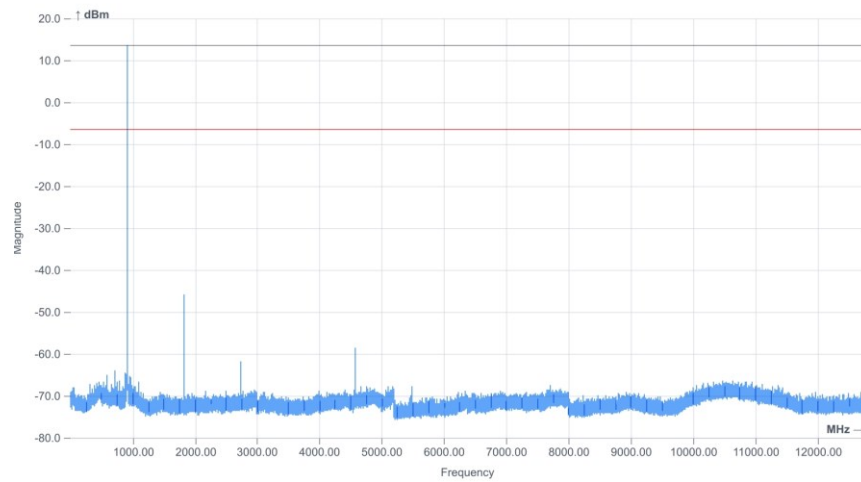

## 12.7 Spurious Emissions Radiated < 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit frequencies are 903.0 MHz; 909.4 MHz and 914.9 MHz. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m according the ANSI C63.10.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold
Used equipment:	See chapter 7.2 A
Measurement uncertainty:	See chapter 9

### Limits:


FCC		
Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 – 0.490	2400/(F/kHz)	300
0.490 – 1.705	24000/(F/kHz)	30
1.705 – 30	30 (29.5 dBμV/m)	30

IC		
Frequency (MHz)	Field strength (μA/m)	Measurement distance (m)
0.009 – 0.490	6.37/F (F in kHz)	300
0.490 – 1.705	63.7/F (F in kHz)	30
1.705 – 30	0.08 (-22 dBμA/m)	30


**Result:**

Spurious emission level								
lowest channel			middle channel			highest channel		
Frequency / MHz	Detector	Level / (dB $\mu$ V/m)	Frequency / MHz	Detector	Level / (dB $\mu$ V/m)	Frequency / MHz	Detector	Level / (dB $\mu$ V/m)
no peaks detected			no peaks detected			no peaks detected		


Plot 1: TX-Mode low channel, FCC

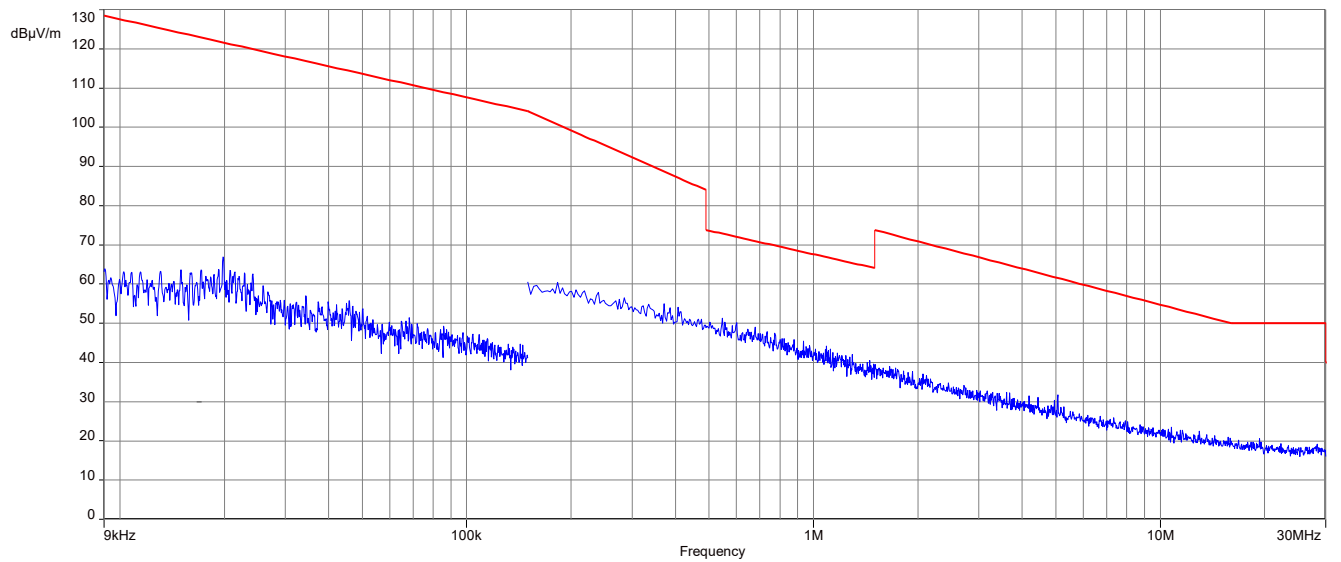


Plot 2: TX-Mode low channel, IC

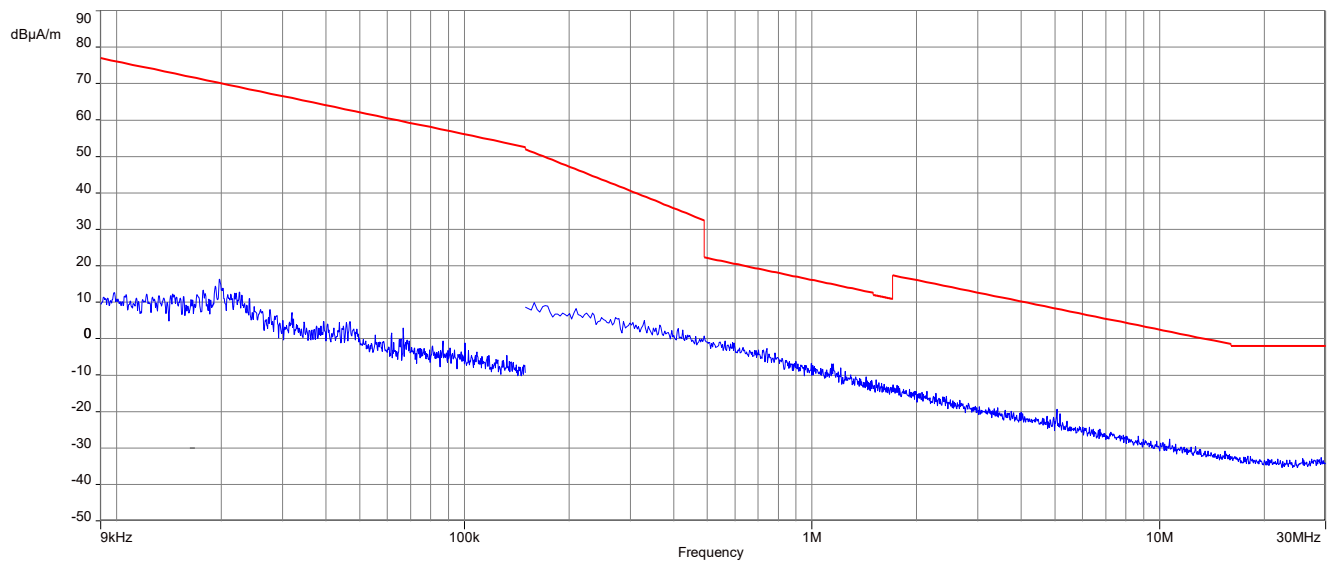


Plot 3: TX-Mode mid channel, FCC

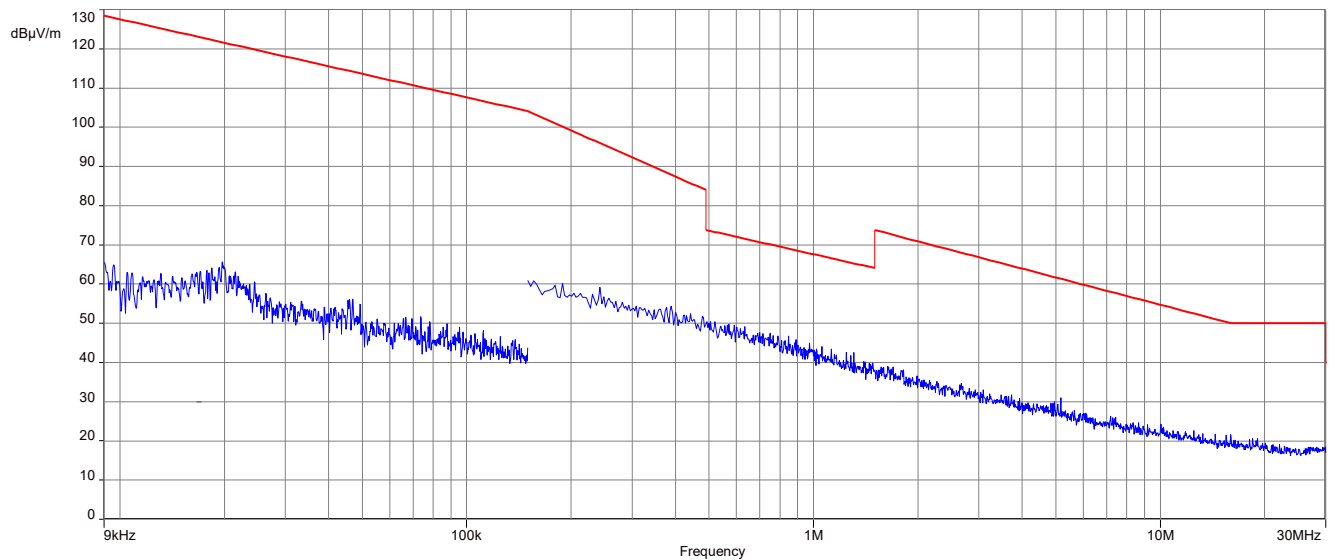


Plot 4: TX-Mode mid channel, IC

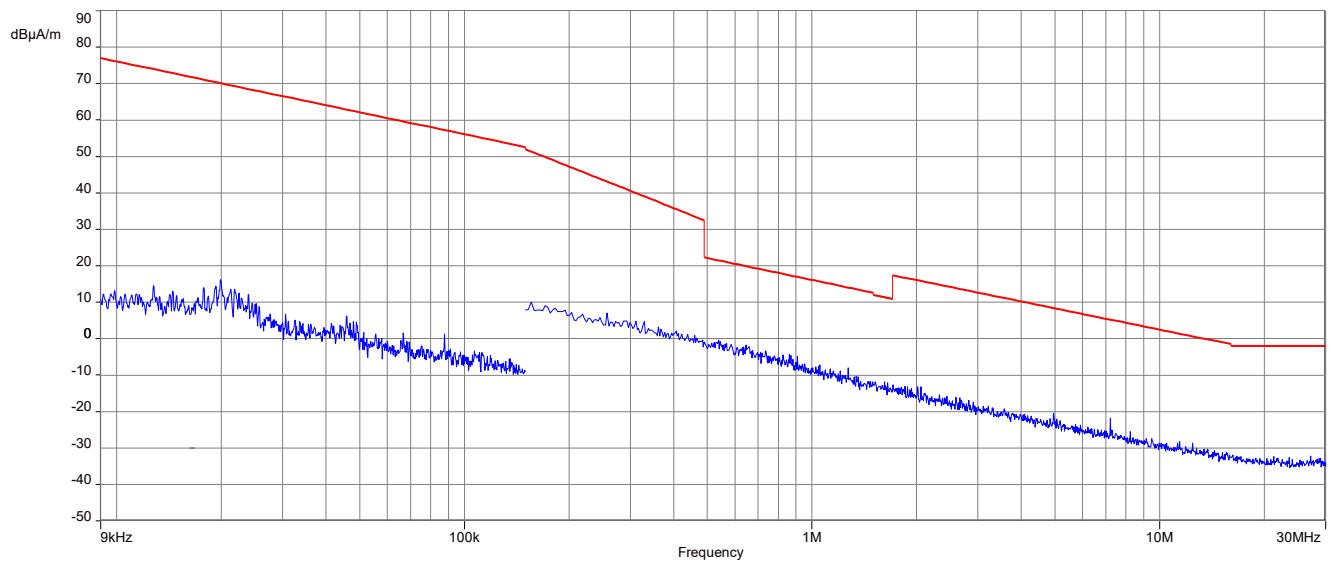

Plot 5: TX-Mode high channel, FCC

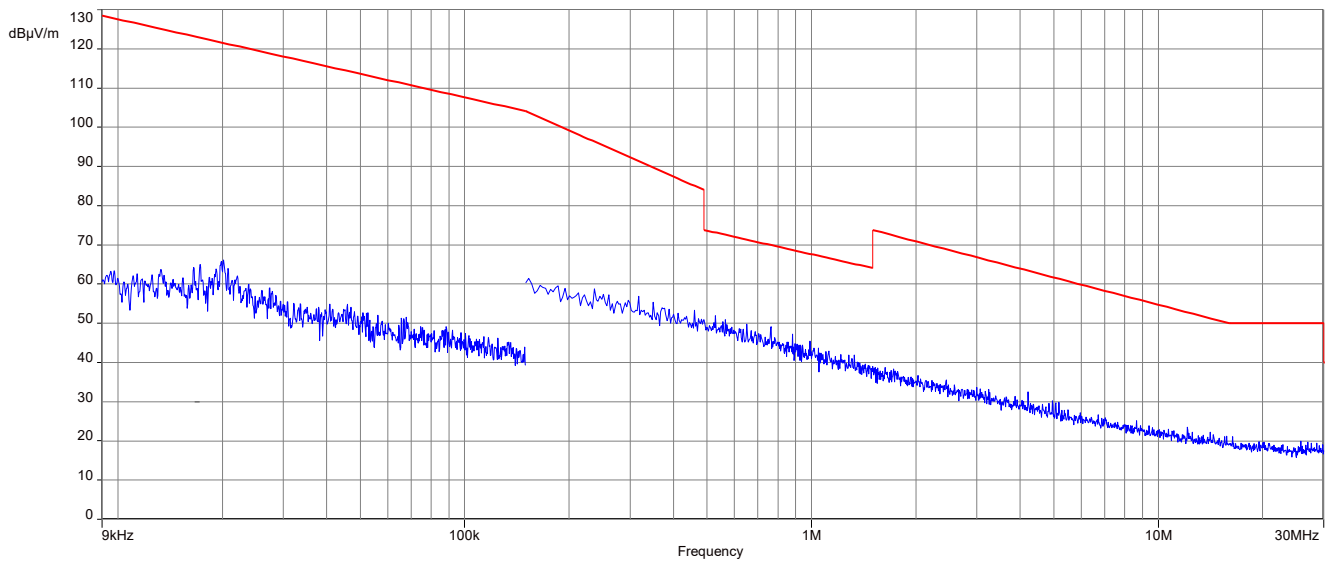

Plot 6: TX-Mode high channel, IC

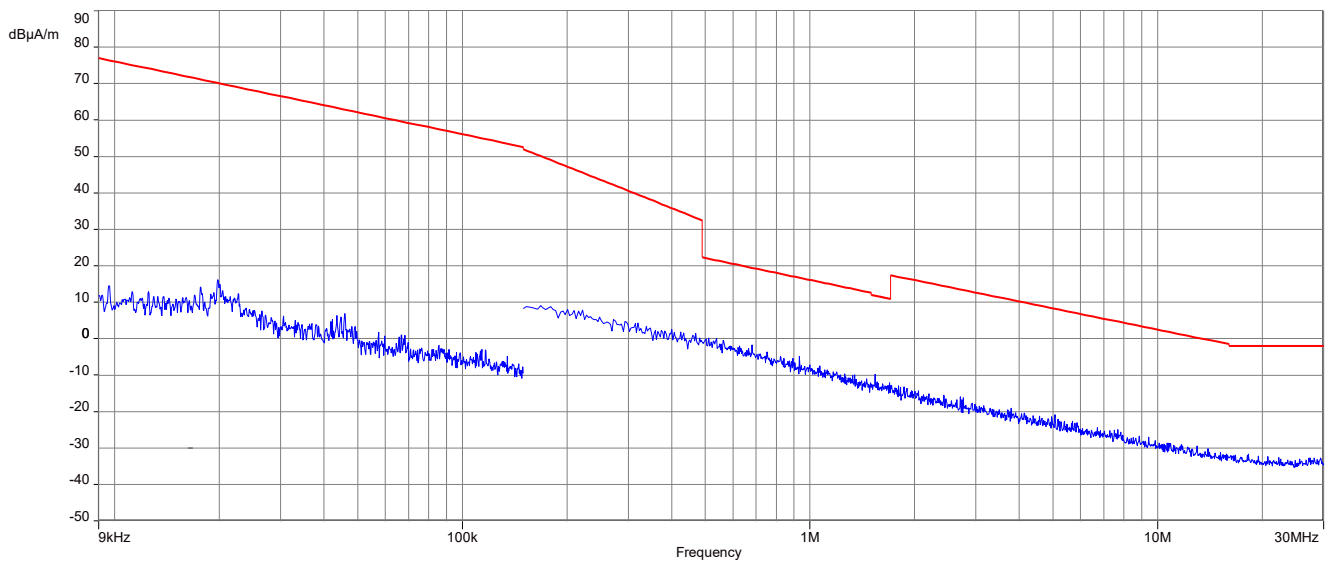

## 12.8 Spurious Emissions Radiated > 30 MHz

### 12.8.1 Spurious emissions radiated 30 MHz to 1 GHz

#### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel low, mid and high.

#### Measurement:

Measurement parameters	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	3 x VBW
Video bandwidth	120 kHz
Span	30 MHz to 1 GHz
Trace mode	Max hold
Measured modulation	CSS
Test setup	See sub clause 7.2 A
Measurement uncertainty	See sub clause 9


#### Limits:

FCC		IC
Band-edge Compliance of conducted and radiated emissions		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV/m)	Measurement distance / m
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3



**Result:** See result table below the plots.


Plot 1: 30 MHz – 1 GHz, horizontal & vertical polarisation (low channel)

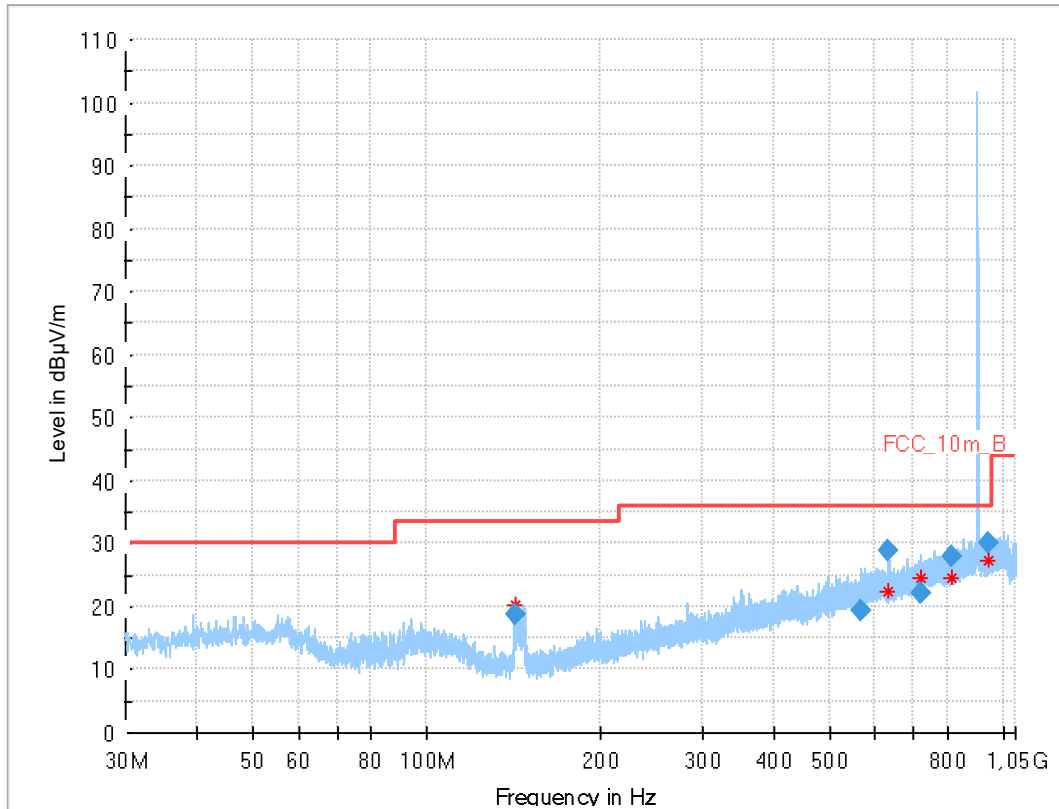

## Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
142.300	18.89	33.5	14.6	1000	120.0	178.0	V	53	25
567.980	19.41	36.0	16.6	1000	120.0	107.0	V	37	20
631.587	28.85	36.0	7.2	1000	120.0	195.0	V	52	22
717.899	22.05	36.0	14.0	1000	120.0	136.0	V	-34	22
812.112	27.85	36.0	8.2	1000	120.0	187.0	H	25	24
941.179	29.99	36.0	6.0	1000	120.0	195.0	V	142	25


Plot 2: 30 MHz – 1 GHz, horizontal &amp; vertical polarisation (middle channel)

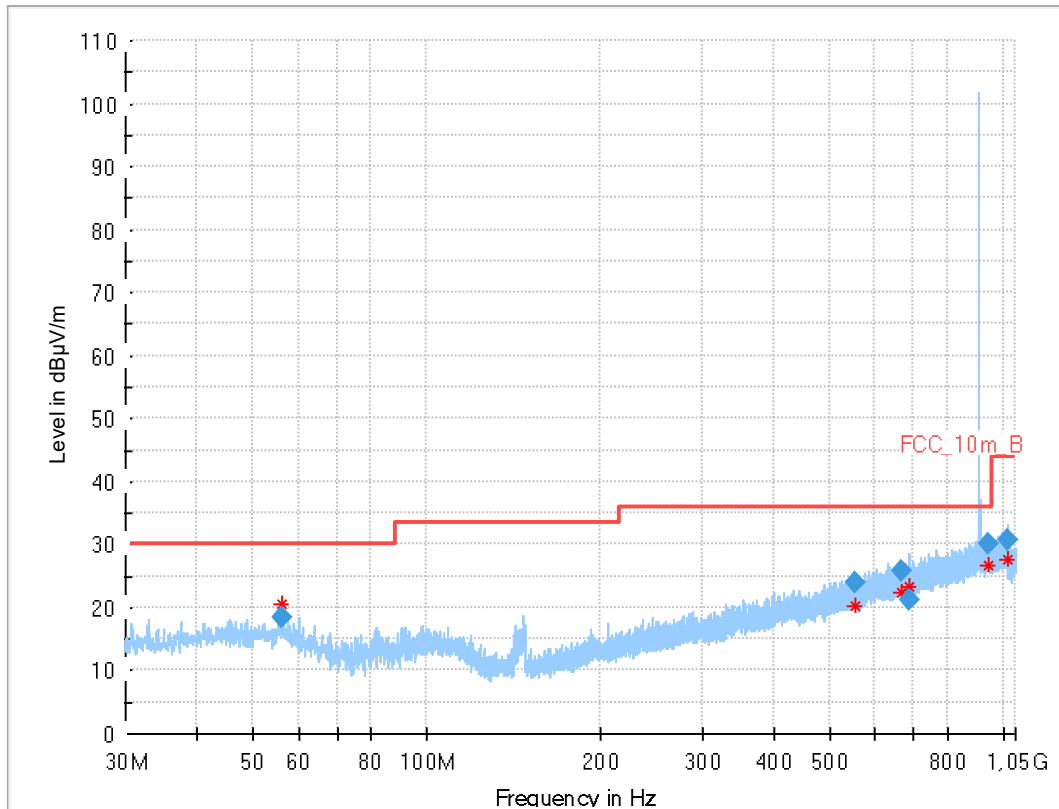

## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
55.838	18.50	30.0	11.5	1000	120.0	150.0	V	62	16
555.724	24.07	36.0	11.9	1000	120.0	190.0	H	-37	20
664.661	25.74	36.0	10.3	1000	120.0	170.0	H	-37	22
687.117	21.25	36.0	14.8	1000	120.0	195.0	H	142	22
943.388	30.04	36.0	6.0	1000	120.0	118.0	V	52	25
1018.791	30.87	44.0	13.1	1000	120.0	110.0	V	-33	26

Plot 3: 30 MHz – 1 GHz, horizontal &amp; vertical polarisation (high channel)

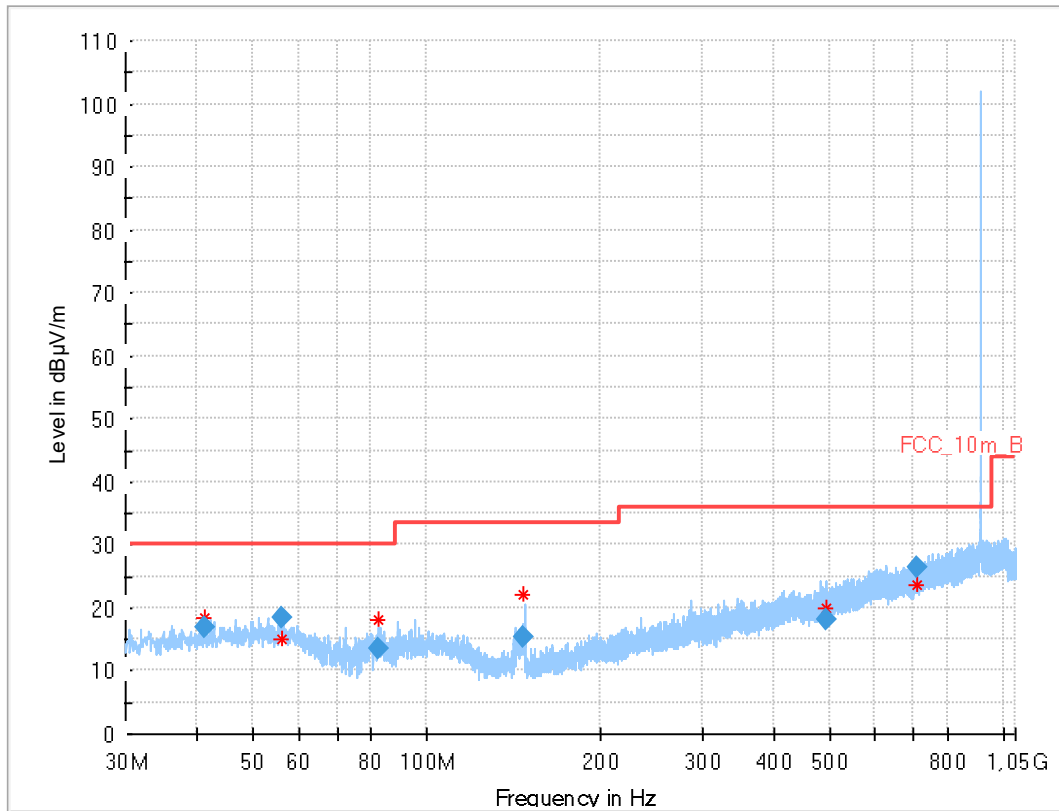

## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.301	17.01	30.0	13.0	1000	120.0	180.0	V	142	14
56.035	18.53	30.0	11.5	1000	120.0	195.0	H	-37	16
82.593	13.57	30.0	16.4	1000	120.0	184.0	V	180	9
147.378	15.39	33.5	18.1	1000	120.0	102.0	V	-14	10
493.442	18.26	36.0	17.7	1000	120.0	151.0	V	52	19
707.812	26.50	36.0	9.5	1000	120.0	107.0	H	52	22

## 12.8.2 Spurious emissions radiated above 1 GHz

### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed in the mode with the highest output power.

### Measurement:

Measurement parameters	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 10 GHz
Trace mode	Max hold
DSSS, FHSS Hybrid	DSSS
Test setup	See sub clause 7.2 C (1 GHz – 10 GHz)
Measurement uncertainty	See sub clause 9

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

### Limits:

ANSI C63.10
The average emission shall be determined by using Video averaging (VBW = 10 Hz). If the dwell time of the hopping signal is less than 100 ms (per channel), the VBW=10 Hz reading may be adjusted by a factor: $F = 20\log(\text{dwell time}/100 \text{ ms})$


FCC	IC	
TX spurious emissions radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
§15.209		
Frequency / MHz	Field strength / (dBµV/m)	Measurement distance / m
Above 960	54.0	3

**Result:**


TX spurious emissions radiated								
Lowest channel			Middle channel			Highest channel		
Frequency / MHz	Detector	Level / (dB $\mu$ V/m)	Frequency / MHz	Detector	Level / (dB $\mu$ V/m)	Frequency / MHz	Detector	Level / (dB $\mu$ V/m)
-/-	Peak	-/-	2728.0	Peak	50.23	-/-	Peak	-/-
	AVG	-/-		AVG	47.74		AVG	-/-
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-

**Plots:**


Plot 1: 1 GHz – 10 GHz, horizontal &amp; vertical polarisation (lowest channel)

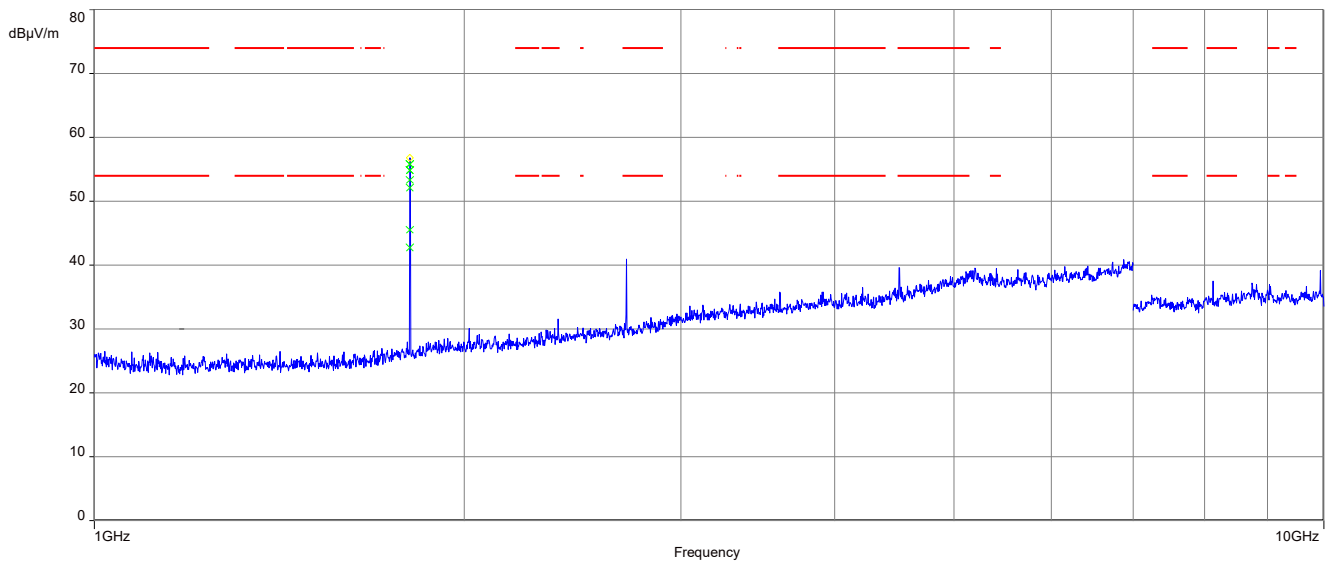

Plot 2: 1 GHz – 10 GHz, horizontal &amp; vertical polarisation (middle channel)

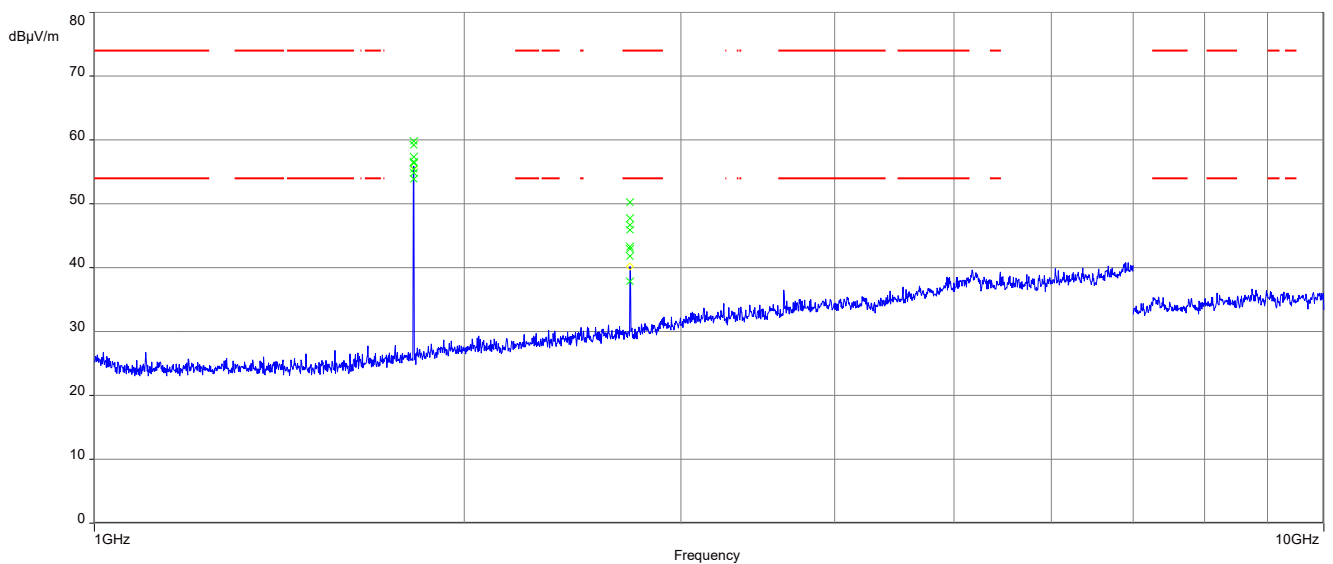

Plot 3: 1 GHz – 10 GHz, horizontal & vertical polarisation (highest channel)

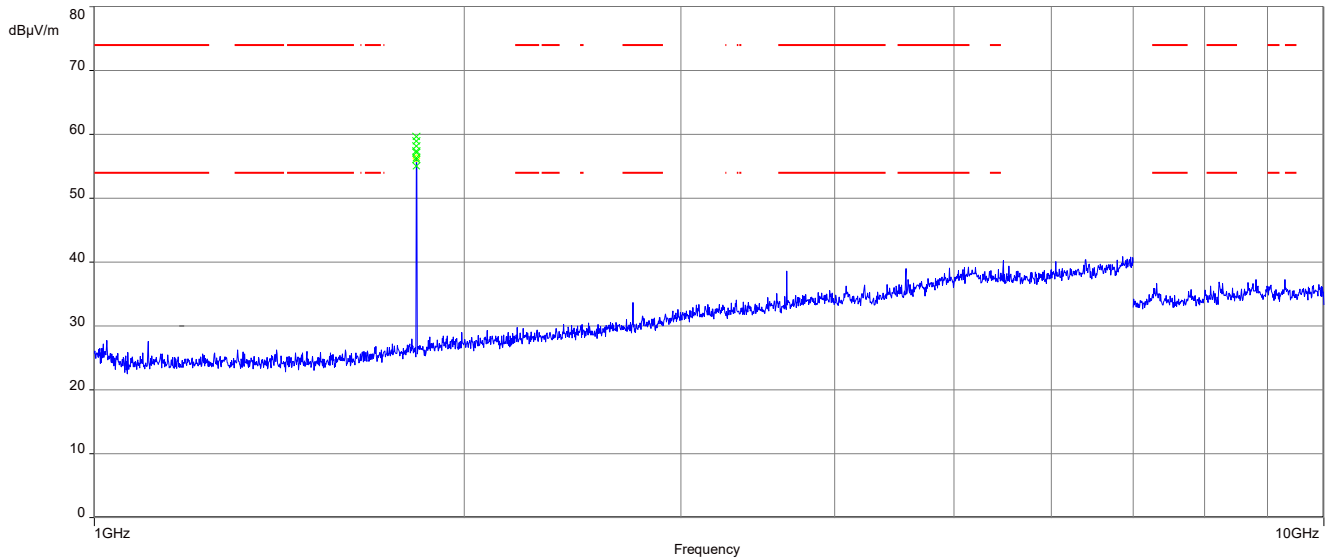

## 13 Glossary

<b>AVG</b>	Average
<b>C</b>	Compliant
<b>C/N<sub>0</sub></b>	Carrier to noise-density ratio, expressed in dB-Hz
<b>CAC</b>	Channel availability check
<b>CW</b>	Clean wave
<b>DC</b>	Duty cycle
<b>DFS</b>	Dynamic frequency selection
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>DUT</b>	Device under test
<b>EN</b>	European Standard
<b>ETSI</b>	European Telecommunications Standards Institute
<b>EMC</b>	Electromagnetic Compatibility
<b>EUT</b>	Equipment under test
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>FHSS</b>	Frequency hopping spread spectrum
<b>FVIN</b>	Firmware version identification number
<b>GNSS</b>	Global Navigation Satellite System
<b>GUE</b>	GNSS User Equipment
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>HW</b>	Hardware
<b>IC</b>	Industry Canada
<b>Inv. No.</b>	Inventory number
<b>MC</b>	Modulated carrier
<b>NA</b>	Not applicable
<b>NC</b>	Not compliant
<b>NOP</b>	Non occupancy period
<b>NP</b>	Not performed
<b>OBW</b>	Occupied bandwidth
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OFDM</b>	Orthogonal frequency division multiplexing
<b>OOB</b>	Out of band
<b>OP</b>	Occupancy period
<b>PER</b>	Packet error rate
<b>PMN</b>	Product marketing name
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>RLAN</b>	Radio local area network
<b>S/N or SN</b>	Serial number
<b>SW</b>	Software
<b>UUT</b>	Unit under test
<b>WLAN</b>	Wireless local area network



14 Document history

Version	Applied changes	Date of release
-/-	Initial release	2024-04-19

##### END OF TEST REPORT #####