



Pirelli Tyre S.p.A.

Pirelli Confidential

Title: Antenna Gain Report
CTSN-09S
Doc No: TSR_10311
Version: V3.0
Date: 20/05/2024

This document contains Pirelli Tyre S.p.A. proprietary and/or confidential information. By receiving this document, the recipient agrees that this document and the information contained therein will be held in confidence and in trust. No part of this document may be copied, reprinted or reproduced in any material form or electronically, whether wholly or in part, and no information contained herein may be used or disclosed to third parties, unless under a previous written agreement with Pirelli Tyre S.p.A. setting forth relevant terms and conditions.

Antenna Gain Report on CTSN-09S



Pirelli Tyre S.p.A.

Pirelli Confidential

Title: Antenna Gain Report
CTSN-09S
Doc No: TSR_10311
Version: V3.0
Date: 20/05/2024

This document contains Pirelli Tyre S.p.A. proprietary and/or confidential information. By receiving this document, the recipient agrees that this document and the information contained therein will be held in confidence and in trust. No part of this document may be copied, reprinted or reproduced in any material form or electronically, whether wholly or in part, and no information contained herein may be used or disclosed to third parties, unless under a previous written agreement with Pirelli Tyre S.p.A. setting forth relevant terms and conditions.

Document Name

Antenna Gain Report

Document Description

For the specific project, eirp measurement and antenna gain characteristic calculation on 3 channels inside the 2.4GHz ISM frequency range

Prepared by	Date	Department	Signature
Edoardo Regini	20/05/2024		
Reviewed by	Date	Department	Signature
Simona Scotti	20/05/2024		

Change Log Author	Date	Version	Description of Changes
Edoardo Regini	19/03/2024	V1.0	First Version
Edoardo Regini	21/03/2024	V2.0	Calibration instrument added
Edoardo Regini	20/05/2024	V3.0	Minor changes



Pirelli Tyre S.p.A.

Pirelli Confidential

Title: Antenna Gain Report
CTSN-09S
Doc No: TSR_10311
Version: V3.0
Date: 20/05/2024

This document contains Pirelli Tyre S.p.A. proprietary and/or confidential information. By receiving this document, the recipient agrees that this document and the information contained therein will be held in confidence and in trust. No part of this document may be copied, reprinted or reproduced in any material form or electronically, whether wholly or in part, and no information contained herein may be used or disclosed to third parties, unless under a previous written agreement with Pirelli Tyre S.p.A. setting forth relevant terms and conditions.

Scope

This document reports the eirp measurement done on CTSN-09S product and power measured at the connector. Antenna Gain is calculated using the following formula:

$$G_a = eirp - P_T$$

where,

$eirp$ = Effective Isotropic Radiated Power (dBm)

P_T = Output power of the transmitter (dBm)

G_a = Antenna Gain (dBi)

P_T already takes into account the loss of the cable used during the conducted measurement

Samples Tested

Product Name	HW Ver	ID	SW Ver	Notes
CTSN-09S	V1.0	RT_L	1.0	Antenna connected to the Pirelli CT-0618 RF out as in the field configuration SW in line with the field application, but RF out set as continuous transmitting on the low channel 2407.125 MHz using the Direct Test Mode settings available
CTSN-09S	V1.0	RT_M	1.0	Antenna connected to the Pirelli CT-0618 RF out as in the field configuration SW in line with the field application, but RF out set as continuous transmitting on the mid channel 2440.856 MHz using the Direct Test Mode settings available
CTSN-09S	V1.0	RT_H	1.0	Antenna connected to the Pirelli CT-0618 RF out as in the field configuration SW in line with the field application, but RF out set as continuous transmitting on the high channel 2476.835 MHz using the Direct Test Mode settings available
CTSN-09S	V1.0	CT_L	1.0	Modified HW: w.fl connector to the Pirelli CT-0618 RF out. Antenna not connected Used for Conducted measurements SW in line with the field application, but RF out set as continuous transmitting on the low channel 2407.125 MHz using the Direct Test Mode settings available
CTSN-09S	V1.0	CT_M	1.0	Modified HW: w.fl connector to the Pirelli CT-0618 RF out. Antenna not connected Used for Conducted measurements SW in line with the field application, but RF out set as continuous transmitting on the mid channel 2440.856 MHz using the Direct Test Mode settings available
CTSN-09S	V1.0	CT_H	1.0	Modified HW: w.fl connector to the Pirelli CT-0618 RF out. Antenna not connected Used for Conducted measurements SW in line with the field application, but RF out set as continuous transmitting on the high channel 2476.835 MHz using the Direct Test Mode settings available



This document contains Pirelli Tyre S.p.A. proprietary and/or confidential information. By receiving this document, the recipient agrees that this document and the information contained therein will be held in confidence and in trust. No part of this document may be copied, reprinted or reproduced in any material form or electronically, whether wholly or in part, and no information contained herein may be used or disclosed to third parties, unless under a previous written agreement with Pirelli Tyre S.p.A. setting forth relevant terms and conditions.

Test Summary

Max Peak Gain @ 2407.125 MHz : -6.00 dBi

Cahnnel	Frequency [MHz]	Polarization [V/H]	Max eirp [dBm]	*P _T [dBm]	G _a [dBi]
Low	2407.125	N/A	-15,25	-9,25	-6,00
Mid	2440.856	N/A	-15,49	-9,35	-6,14
High	2476.835	N/A	-17,14	-9,63	-7,51

$$G_a = eirp - P_T$$

(*) Note: Power at the connector are taken from UL report 24-4791111799-3-1-1-RAD-A

Max Average Gain @ 2407.125 MHz: -9.05 dBi

Cahnnel	Frequency [MHz]	Polarization [V/H]	Avg eirp [dBm]	*P _T [dBm]	G _a [dBi]
Low	2407.125	N/A	-18,30	-9,25	-9,05
Mid	2440.856	N/A	-18,51	-9,35	-9,16
High	2476.835	N/A	-19,99	-9,63	-10,36

$$G_a = eirp - P_T$$


(*) Note: Power at the connector are taken from UL report 24-4791111799-3-1-1-RAD-A




This document contains Pirelli Tyre S.p.A. proprietary and/or confidential information. By receiving this document, the recipient agrees that this document and the information contained therein will be held in confidence and in trust. No part of this document may be copied, reprinted or reproduced in any material form or electronically, whether wholly or in part, and no information contained herein may be used or disclosed to third parties, unless under a previous written agreement with Pirelli Tyre S.p.A. setting forth relevant terms and conditions.

Test @ 2407.125MHz


Theta = 0, Phi = 0

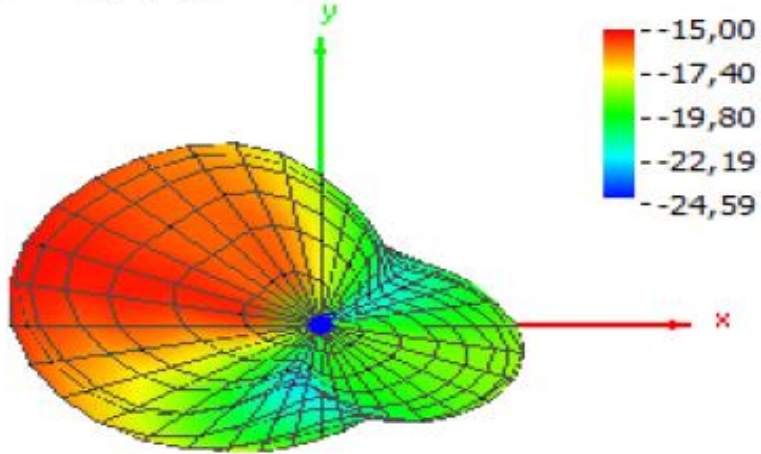


Theta = 180, Phi = 0

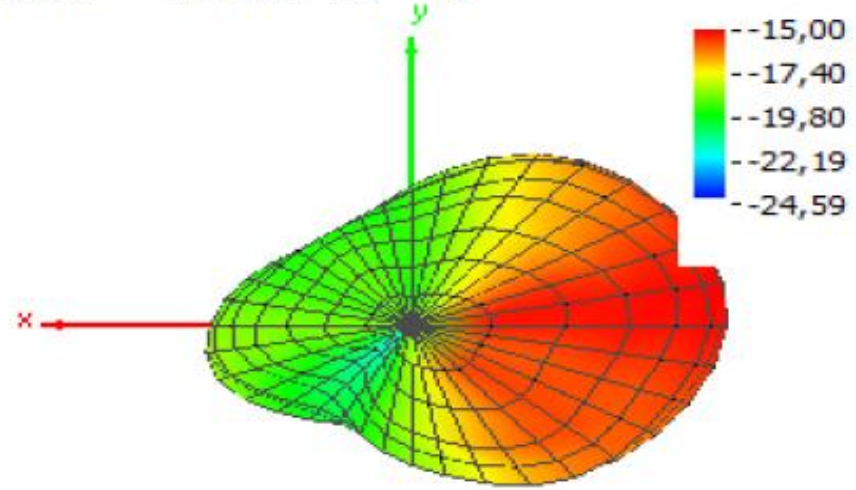


Theta = 90, Phi = 0

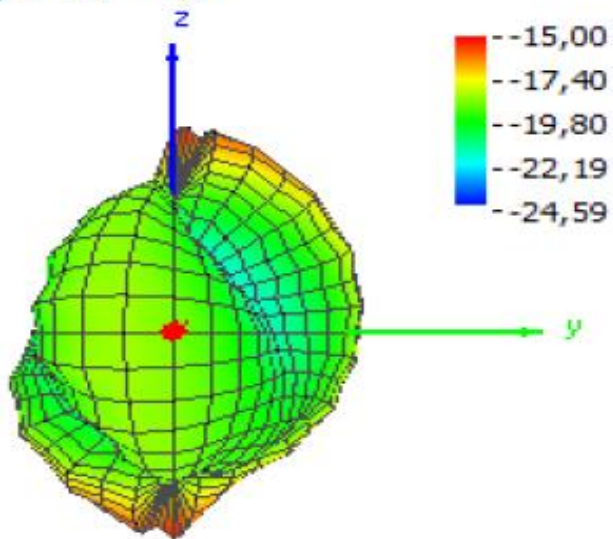


Theta = 90, Phi = 180

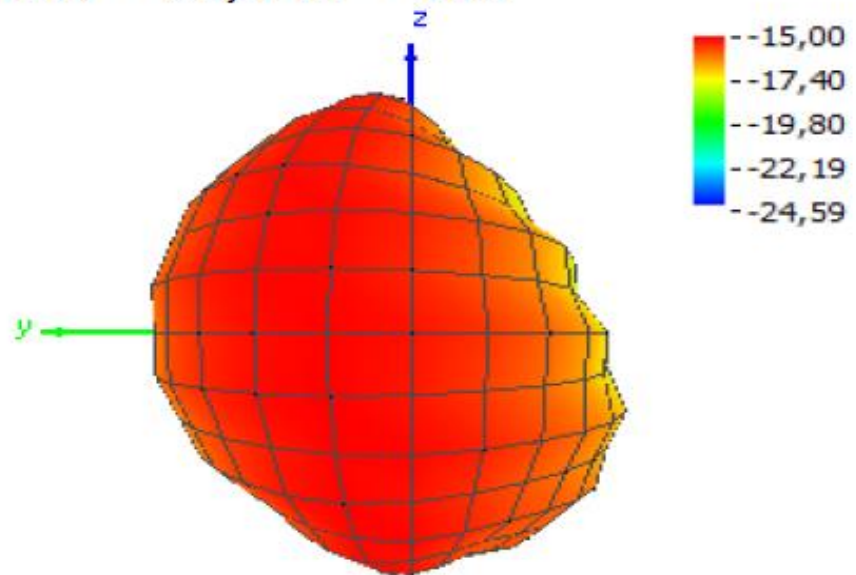

Theta = 90, Phi = 270

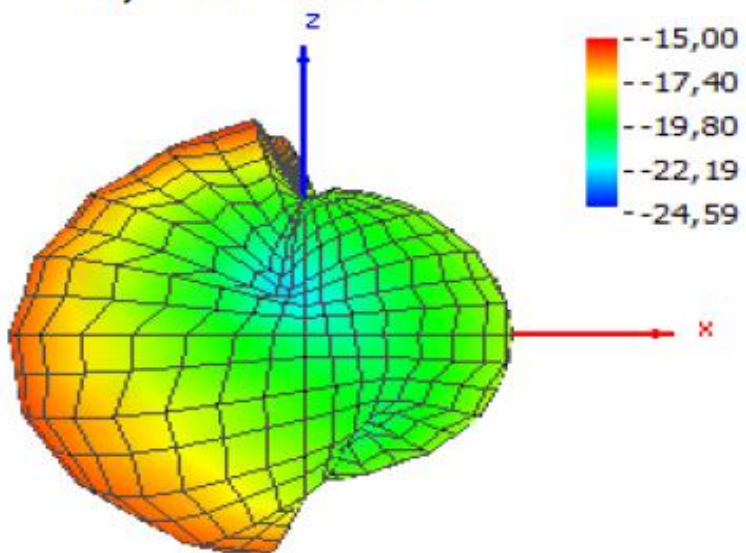

Theta = 90, Phi = 90

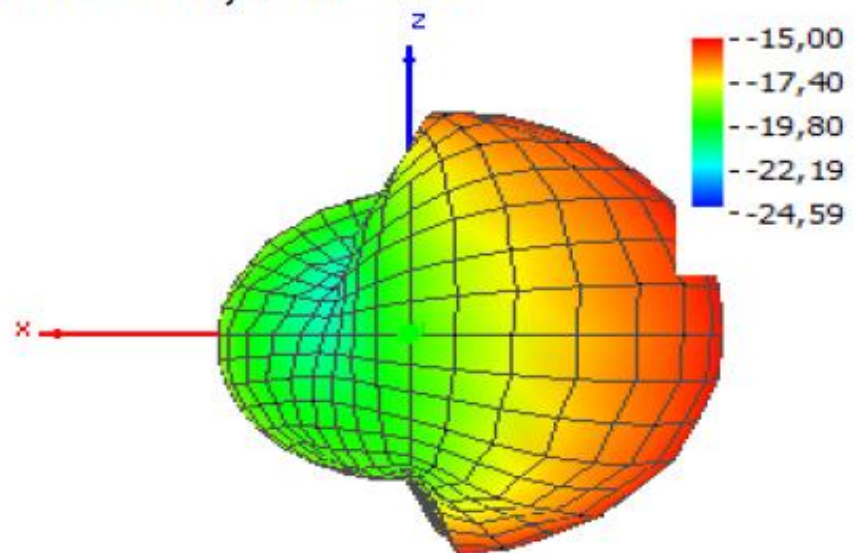

		Elevation [deg]																		
		0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
Azimuth [deg]	0	-33,43	-28,90	-25,61	-23,45	-21,66	-20,60	-19,63	-19,15	-18,76	-18,80	-19,01	-19,55	-20,39	-21,65	-23,52	-25,97	-30,36	-36,01	-36,01
	10	-33,43	-29,57	-26,70	-24,08	-22,68	-21,20	-20,48	-19,67	-19,51	-19,37	-19,64	-20,11	-20,94	-22,21	-24,03	-26,77	-30,86	-36,01	-36,01
	20	-33,43	-30,72	-27,95	-25,31	-23,84	-22,12	-21,52	-20,48	-20,41	-20,13	-20,41	-20,77	-21,65	-22,86	-24,70	-27,57	-31,40	-36,01	-36,01
	30	-33,43	-32,09	-29,69	-26,68	-25,25	-23,29	-22,65	-21,48	-21,35	-21,01	-21,30	-21,53	-22,41	-23,56	-25,40	-28,17	-31,94	-36,01	-36,01
	40	-33,43	-33,98	-31,67	-28,27	-26,72	-24,63	-23,81	-22,56	-22,31	-21,92	-22,15	-22,40	-23,19	-24,37	-26,10	-28,74	-31,91	-36,01	-36,01
	50	-33,43	-36,01	-33,74	-29,83	-27,86	-25,65	-24,60	-23,42	-22,95	-22,62	-22,72	-23,04	-23,69	-24,81	-26,35	-28,88	-31,40	-34,98	-36,01
	60	-33,43	-36,01	-35,43	-30,66	-28,14	-26,00	-24,69	-23,62	-23,00	-22,77	-22,72	-23,12	-23,54	-24,76	-25,95	-28,36	-30,41	-34,12	-36,01
	70	-33,43	-36,01	-35,54	-30,36	-27,71	-25,60	-24,15	-23,19	-22,55	-22,31	-22,18	-22,64	-22,97	-24,13	-25,13	-27,48	-29,39	-33,30	-36,01
	80	-33,43	-36,01	-34,17	-29,36	-26,64	-24,64	-23,22	-22,37	-21,76	-21,56	-21,43	-21,89	-22,16	-23,32	-24,24	-26,41	-28,37	-32,61	-36,01
	90	-33,43	-36,01	-31,72	-27,83	-25,24	-23,52	-22,10	-21,32	-20,70	-20,59	-20,42	-20,94	-21,13	-22,32	-23,17	-25,37	-27,24	-31,82	-36,01
	100	-33,43	-34,19	-29,64	-26,21	-23,90	-22,20	-20,84	-20,19	-19,54	-19,50	-19,26	-19,86	-20,00	-21,22	-22,05	-24,29	-26,19	-30,89	-36,01
	110	-33,43	-32,05	-28,04	-24,81	-22,65	-20,99	-19,72	-19,04	-18,39	-18,34	-18,12	-18,70	-18,81	-20,09	-20,92	-23,21	-25,09	-29,84	-36,01
	120	-33,43	-30,75	-26,97	-23,69	-21,58	-19,99	-18,70	-18,02	-17,39	-17,32	-17,12	-17,68	-17,86	-19,08	-19,93	-22,20	-24,20	-28,95	-36,01
	130	-33,43	-29,88	-26,02	-22,71	-20,59	-19,04	-17,85	-17,17	-16,58	-16,53	-16,39	-16,89	-17,16	-18,34	-19,32	-21,59	-23,65	-28,53	-36,01
	140	-33,43	-29,03	-25,14	-21,88	-19,90	-18,35	-17,24	-16,53	-16,04	-15,96	-15,89	-16,38	-16,73	-17,91	-18,93	-21,20	-23,45	-28,59	-36,01
	150	-33,43	-28,26	-24,42	-21,19	-19,30	-17,79	-16,74	-16,08	-15,61	-15,54	-15,51	-16,01	-16,40	-17,61	-18,68	-21,05	-23,35	-28,67	-36,01
	160	-33,43	-27,56	-23,90	-20,64	-18,89	-17,34	-16,38	-15,71	-15,31	-15,26	-15,29	-15,74	-16,20	-17,39	-18,55	-20,96	-23,29	-28,76	-36,01
	170	-33,43	-27,17	-23,69	-20,38	-18,70	-17,09	-16,28	-15,51	-15,26	-15,25	-15,27	-15,67	-16,25	-17,37	-18,64	-20,98	-23,40	-28,87	-36,01
	180	-33,43	-27,15	-23,83	-20,39	-18,87	-17,14	-16,45	-15,56	-15,42	-15,26	-15,47	-15,82	-16,55	-17,57	-18,95	-21,19	-23,70	-29,06	-36,01
	190	-33,43	-27,60	-24,39	-20,74	-19,31	-17,43	-16,87	-15,86	-15,84	-15,56	-15,89	-16,18	-16,96	-17,99	-19,41	-21,62	-24,15	-29,42	-36,01
	200	-33,43	-28,54	-25,26	-21,35	-19,96	-17,95	-17,45	-16,35	-16,36	-16,04	-16,39	-16,65	-17,50	-18,48	-19,93	-22,09	-24,68	-29,77	-36,01
	210	-33,43	-30,00	-26,67	-22,26	-20,88	-18,66	-18,24	-16,97	-17,10	-16,67	-17,09	-17,21	-18,14	-19,07	-20,57	-22,67	-25,28	-30,28	-36,01
	220	-33,43	-32,35	-28,74	-23,64	-22,32	-19,70	-19,45	-17,91	-18,14	-17,54	-18,03	-18,01	-18,99	-19,78	-21,33	-23,32	-25,82	-30,64	-36,01
	230	-33,43	-35,96	-31,47	-25,57	-24,08	-21,13	-20,89	-19,11	-19,38	-18,63	-19,08	-18,93	-19,88	-20,59	-22,07	-23,93	-26,17	-30,61	-36,01
	240	-33,43	-36,01	-34,68	-27,77	-26,00	-22,83	-22,37	-20,48	-20,65	-19,88	-20,18	-19,97	-20,75	-21,35	-22,65	-24,36	-26,51	-30,47	-36,01
	250	-33,43	-36,01	-36,01	-29,77	-27,40	-24,32	-23,56	-21,80	-21,75	-20,97	-21,13	-20,91	-21,61	-22,16	-23,35	-24,92	-26,97	-30,78	-36,01
	260	-33,43	-36,01	-35,33	-30,44	-27,73	-25,24	-24,16	-22,76	-22,43	-21,81	-21,89	-21,71	-22,40	-22,90	-24,17	-25,66	-27,77	-31,34	-36,01
	270	-33,43	-36,01	-32,38	-29,36	-26,93	-25,23	-24,02	-23,10	-22,66	-22,36	-22,39	-22,44	-23,13	-23,77	-25,08	-26,63	-28,91	-32,32	-36,01
	280	-33,43	-33,30	-30,01	-27,66	-25,67	-24,55	-23,39	-22,95	-22,48	-22,52	-22,56	-23,02	-23,73	-24,68	-26,09	-27,83	-30,24	-33,57	-36,01
	290	-33,43	-31,23	-28,21	-26,19	-24,40	-23,50	-22,48	-22,38	-21,88	-22,24	-22,29	-23,24	-23,81	-25,29	-26,71	-28,99	-31,39	-34,69	-36,01
	300	-33,43	-29,76	-27,06	-24,91	-23,29	-22,46	-21,53	-21,51	-21,05	-21,55	-21,59	-22,85	-23,35	-25,31	-26,52	-29,54	-32,14	-36,01	-36,01
	310	-33,43	-28,77	-26,21	-23,92	-22,42	-21,50	-20,63	-20,66	-20,22	-20,70	-20,76	-22,07	-22,50	-24,57	-25,80	-29,33	-31,87	-36,01	-36,01
	320	-33,43	-28,17	-25,53	-23,23	-21,74	-20,80	-20,02	-19,93	-19,51	-19,95	-20,01	-21,26	-21,65	-23,71	-24,85	-28,49	-31,04	-36,01	-36,01
	330	-33,43	-27,66	-25,12	-22,70	-21,29	-20,21	-19,47	-19,24	-18,86	-19,23	-19,28	-20,45	-20,86	-22,80	-23,95	-27,50	-30,20	-36,01	-36,01
	340	-33,43	-27,50	-24,99	-22,37	-21,00	-19,81	-19,14	-18,74	-18,42	-18,66	-18,76	-19,73	-20,23	-22,05	-23,30	-26,69	-29,59	-36,01	-36,01
	350	-33,43	-27,63	-25,23	-22,39	-21,21	-19,71	-19,20	-18,52	-18,39	-18,40	-18,66	-19,36	-20,03	-21,61	-23,02	-26,23	-29,45	-36,01	-36,01
	360	-33,43	-28,90	-25,61	-23,45	-21,66	-20,60	-19,63	-19,15	-18,76	-18,80	-19,01	-19,55	-20,39	-21,65	-23,52	-25,97	-30,36	-36,01	-36,01


Peak eirp	-15,25	[dBm]
Directivity	3,05	[dBi]
Avg eirp	-18,30	[dBm]




This document contains Pirelli Tyre S.p.A. proprietary and/or confidential information. By receiving this document, the recipient agrees that this document and the information contained therein will be held in confidence and in trust. No part of this document may be copied, reprinted or reproduced in any material form or electronically, whether wholly or in part, and no information contained herein may be used or disclosed to third parties, unless under a previous written agreement with Pirelli Tyre S.p.A. setting forth relevant terms and conditions.

Test @ 2440.856MHz


Theta = 0, Phi = 0

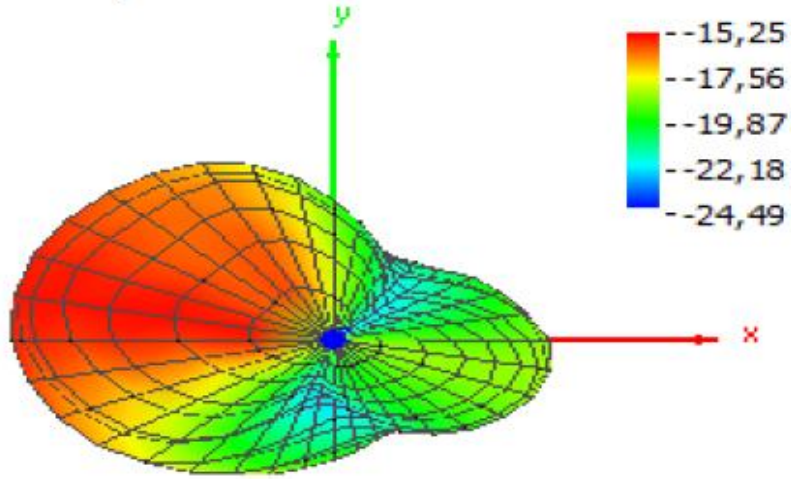


Theta = 180, Phi = 0

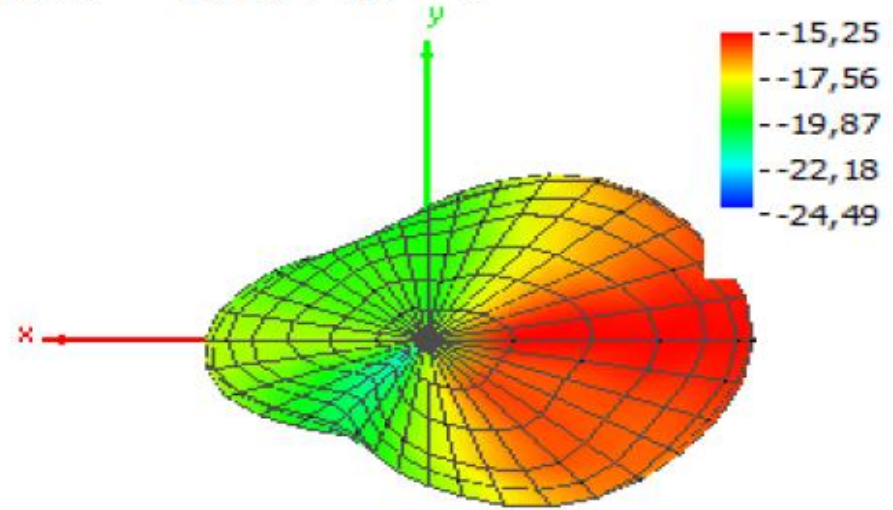


Theta = 90, Phi = 0

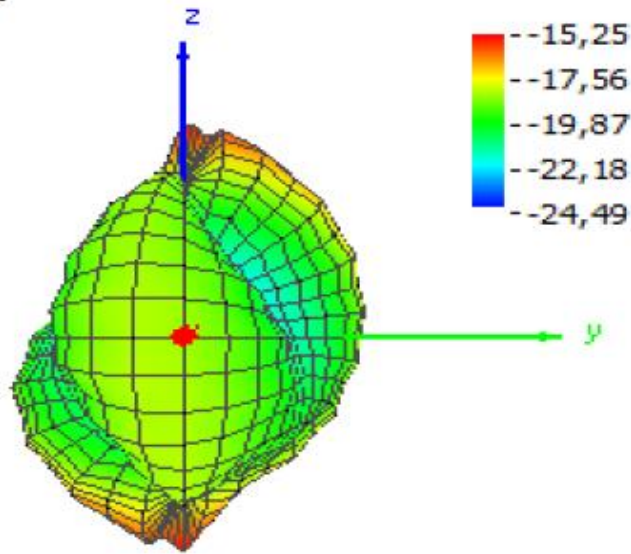


Theta = 90, Phi = 180

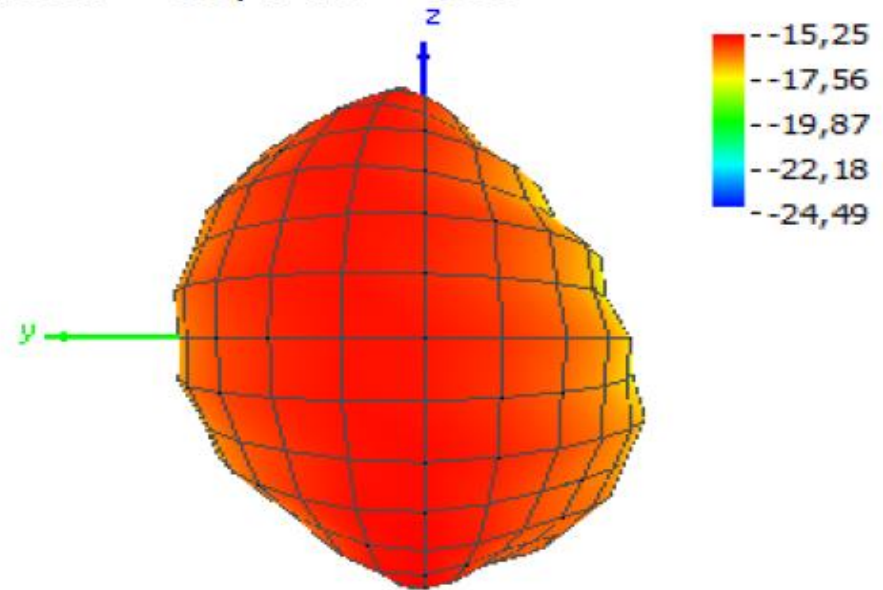

Theta = 90, Phi = 270

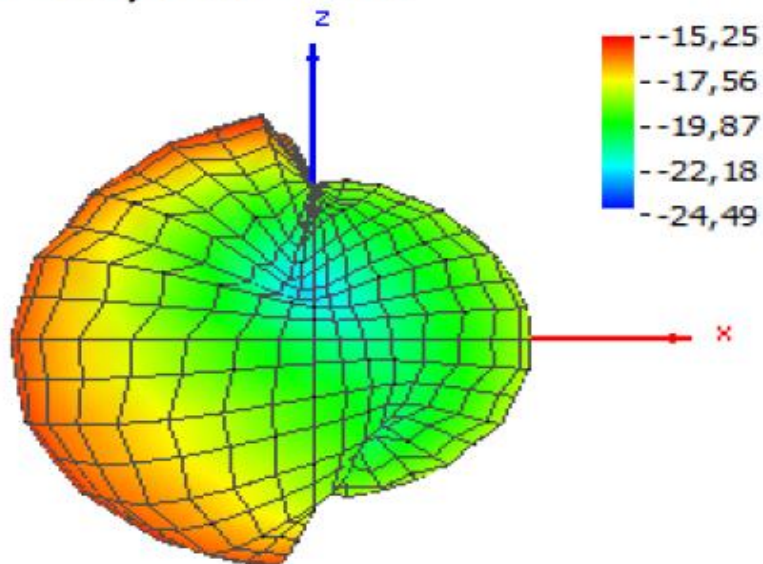

Theta = 90, Phi = 90

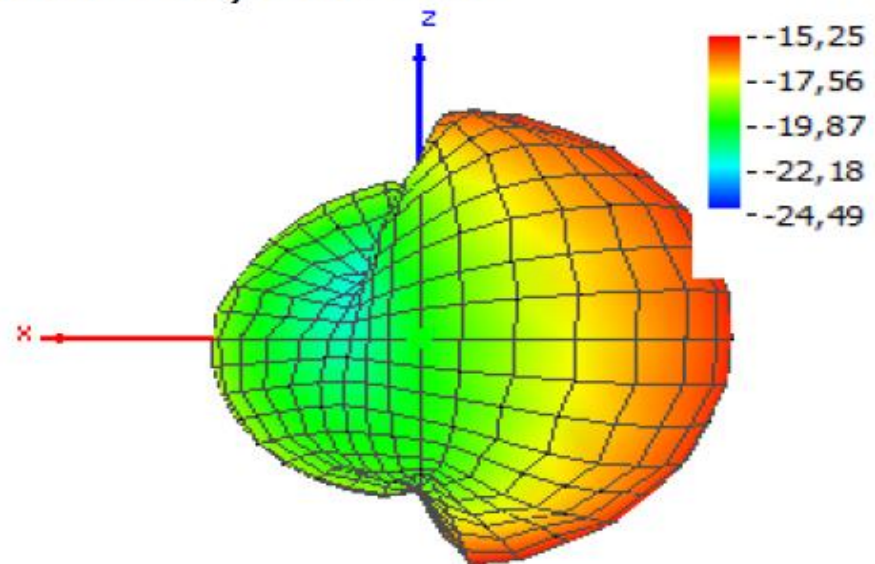


		Elevation [deg]																		
		0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
Azimuth [deg]	0	-34,27	-28,89	-25,60	-23,29	-21,39	-20,26	-19,32	-18,82	-18,52	-18,56	-18,82	-19,36	-20,28	-21,49	-23,44	-25,88	-30,49	-35,84	-35,84
	10	-34,27	-29,47	-26,49	-23,74	-22,26	-20,76	-20,05	-19,21	-19,17	-19,05	-19,39	-19,88	-20,78	-22,07	-23,93	-26,65	-30,98	-35,84	-35,84
	20	-34,27	-30,81	-27,76	-24,82	-23,37	-21,71	-21,06	-20,01	-20,07	-19,82	-20,21	-20,58	-21,52	-22,74	-24,58	-27,47	-31,57	-35,84	-35,84
	30	-34,27	-32,04	-29,33	-26,08	-24,79	-22,79	-22,17	-21,01	-21,05	-20,63	-21,10	-21,41	-22,37	-23,49	-25,39	-28,23	-32,12	-35,84	-35,84
	40	-34,27	-33,84	-31,31	-27,58	-26,23	-24,05	-23,41	-22,16	-22,07	-21,67	-22,06	-22,29	-23,22	-24,37	-26,17	-29,02	-32,43	-35,84	-35,84
	50	-34,27	-35,84	-33,14	-29,31	-27,53	-25,35	-24,41	-23,24	-22,94	-22,54	-22,83	-23,15	-23,92	-25,12	-26,70	-29,32	-32,19	-35,84	-35,84
	60	-34,27	-35,84	-34,64	-30,37	-28,21	-26,07	-24,89	-23,74	-23,26	-22,99	-23,07	-23,48	-24,06	-25,29	-26,58	-29,16	-31,52	-35,00	-35,84
	70	-34,27	-35,84	-35,16	-30,57	-28,10	-26,03	-24,64	-23,63	-23,01	-22,80	-22,74	-23,21	-23,61	-24,87	-25,96	-28,42	-30,40	-33,98	-35,84
	80	-34,27	-35,84	-34,44	-29,94	-27,43	-25,38	-23,97	-23,06	-22,40	-22,21	-22,08	-22,59	-22,87	-24,12	-25,14	-27,38	-29,51	-33,51	-35,84
	90	-34,27	-35,84	-32,63	-28,68	-26,19	-24,38	-22,94	-22,17	-21,44	-21,34	-21,15	-21,69	-21,93	-23,20	-24,14	-26,48	-28,58	-33,12	-35,84
	100	-34,27	-35,35	-30,42	-27,12	-24,77	-23,15	-21,74	-21,07	-20,35	-20,29	-20,08	-20,69	-20,86	-22,17	-23,10	-25,48	-27,60	-32,54	-35,84
	110	-34,27	-33,00	-28,82	-25,69	-23,50	-21,94	-20,58	-19,94	-19,21	-19,20	-18,96	-19,59	-19,74	-21,09	-21,97	-24,41	-26,58	-31,71	-35,84
	120	-34,27	-31,36	-27,61	-24,51	-22,38	-20,86	-19,50	-18,87	-18,13	-18,12	-17,90	-18,50	-18,69	-20,03	-20,94	-23,36	-25,56	-30,75	-35,84
	130	-34,27	-30,47	-26,58	-23,45	-21,32	-19,84	-18,54	-17,91	-17,22	-17,22	-17,05	-17,62	-17,88	-19,17	-20,17	-22,59	-24,83	-30,27	-35,84
	140	-34,27	-29,70	-25,67	-22,53	-20,47	-18,97	-17,79	-17,16	-16,56	-16,53	-16,46	-17,00	-17,37	-18,62	-19,71	-22,12	-24,47	-30,18	-35,84
	150	-34,27	-28,80	-24,86	-21,75	-19,82	-18,34	-17,25	-16,59	-16,10	-16,07	-16,05	-16,58	-17,03	-18,32	-19,47	-21,98	-24,44	-30,44	-35,84
	160	-34,27	-27,97	-24,20	-21,08	-19,29	-17,80	-16,82	-16,20	-15,75	-15,71	-15,76	-16,31	-16,81	-18,09	-19,33	-21,87	-24,46	-30,89	-35,84
	170	-34,27	-27,35	-23,82	-20,63	-18,94	-17,44	-16,56	-15,87	-15,55	-15,49	-15,63	-16,15	-16,76	-18,02	-19,36	-21,89	-24,61	-31,08	-35,84
	180	-34,27	-27,08	-23,73	-20,47	-18,93	-17,33	-16,59	-15,79	-15,62	-15,49	-15,76	-16,22	-16,96	-18,18	-19,63	-22,13	-24,96	-31,43	-35,84
	190	-34,27	-27,21	-24,04	-20,62	-19,20	-17,48	-16,88	-15,99	-15,93	-15,78	-16,12	-16,55	-17,37	-18,56	-20,08	-22,57	-25,47	-31,80	-35,84
	200	-34,27	-27,69	-24,65	-21,03	-19,69	-17,85	-17,33	-16,37	-16,41	-16,22	-16,63	-17,00	-17,89	-19,07	-20,64	-23,09	-26,09	-32,21	-35,84
	210	-34,27	-28,63	-25,61	-21,75	-20,40	-18,43	-17,99	-16,92	-17,02	-16,79	-17,26	-17,57	-18,50	-19,66	-21,32	-23,75	-26,80	-32,77	-35,84
	220	-34,27	-30,33	-27,22	-22,84	-21,53	-19,27	-18,97	-17,69	-17,91	-17,55	-18,05	-18,30	-19,29	-20,41	-22,12	-24,50	-27,49	-33,34	-35,84
	230	-34,27	-32,73	-29,38	-24,43	-23,02	-20,47	-20,20	-18,74	-19,04	-18,58	-19,07	-19,21	-20,22	-21,27	-22,88	-25,16	-27,87	-33,39	-35,84
	240	-34,27	-35,84	-31,89	-26,36	-24,73	-22,00	-21,63	-20,04	-20,24	-19,70	-20,12	-20,17	-21,09	-22,06	-23,54	-25,68	-28,28	-33,15	-35,84
	250	-34,27	-35,84	-34,35	-28,32	-26,30	-23,47	-22,91	-21,27	-21,35	-20,77	-21,10	-21,08	-21,91	-22,76	-24,20	-26,19	-28,63	-33,08	-35,84
	260	-34,27	-35,84	-35,55	-29,67	-27,26	-24,61	-23,80	-22,36	-22,21	-21,68	-21,89	-21,94	-22,68	-23,51	-24,90	-26,77	-29,24	-33,58	-35,84
	270	-34,27	-35,84	-34,39	-29,90	-27,41	-25,22	-24,17	-22,99	-22,68	-22,30	-22,47	-22,62	-23,39	-24,29	-25,75	-27,63	-30,11	-34,55	-35,84
	280	-34,27	-35,84	-32,32	-29,05	-26,75	-25,09	-24,01	-23,18	-22,80	-22,63	-22,80	-23,18	-23,93	-25,09	-26,54	-28,59	-31,33	-35,84	-35,84
	290	-34,27	-33,88	-30,22	-27,70	-25,68	-24,50	-23,38	-22,99	-22,49	-22,62	-22,75	-23,51	-24,16	-25,59	-27,09	-29,51	-32,24	-35,84	-35,84
	300	-34,27	-31,92	-28,84	-26,37	-24,60	-23,52	-22,48	-22,31	-21,78	-22,10	-22,19	-23,24	-23,77	-25,53	-27,00	-30,02	-32,84	-35,84	-35,84
	310	-34,27	-30,67	-27,67	-25,26	-23,51	-22,53	-21,50	-21,42	-20,85	-21,26	-21,31	-22,53	-22,97	-24,92	-26,30	-29,79	-32,53	-35,84	-35,84
	320	-34,27	-29,72	-26,69	-24,24	-22,59	-21,59	-20,65	-20,46	-19,99	-20,33	-20,43	-21,60	-22,03	-23,95	-25,21	-28,86	-31,67	-35,84	-35,84
	330	-34,27	-28,96	-26,01	-23,49	-21,86	-20,81	-19,91	-19,67	-19,24	-19,55	-19,60	-20,72	-21,15	-23,00	-24,27	-27,85	-30,68	-35,84	-35,84
	340	-34,27	-28,45	-25,52	-22,87	-21,33	-20,16	-19,32	-18,98	-18,61	-18,85	-18,92	-19,92	-20,43	-22,19	-23,49	-26,90	-29,90	-35,84	-35,84
	350	-34,27	-28,27	-25,46	-22,61	-21,21	-19,83	-19,11	-18,56	-18,34	-18,42	-18,62	-19,41	-20,00	-21,65	-23,07	-26,33	-29,62	-35,84	-35,84
	360	-34,27	-28,89	-25,60	-23,29	-21,39	-20,26	-19,32	-18,82	-18,52	-18,56	-18,82	-19,36	-20,28	-21,49	-23,44	-25,88	-30,49	-35,84	-35,84

Peak eirp	-15,49	[dBm]
Directivity	3,02	[dBi]
Avg eirp	-18,51	[dBm]


This document contains Pirelli Tyre S.p.A. proprietary and/or confidential information. By receiving this document, the recipient agrees that this document and the information contained therein will be held in confidence and in trust. No part of this document may be copied, reprinted or reproduced in any material form or electronically, whether wholly or in part, and no information contained herein may be used or disclosed to third parties, unless under a previous written agreement with Pirelli Tyre S.p.A. setting forth relevant terms and conditions.

Test @ 2476.835MHz


Theta = 0, Phi = 0

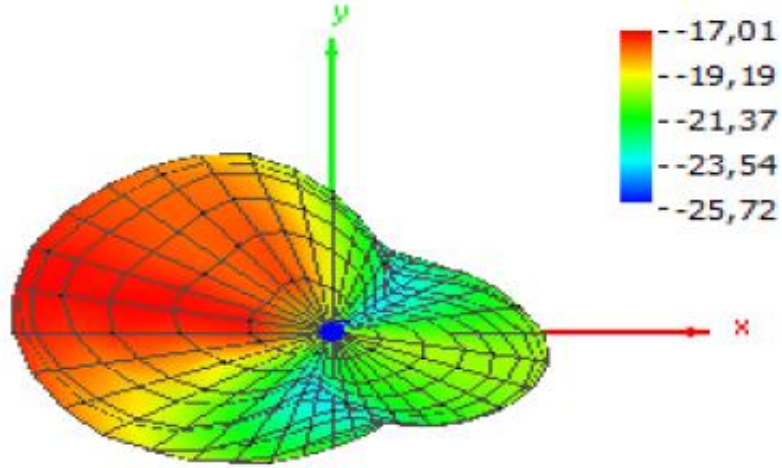


Theta = 180, Phi = 0

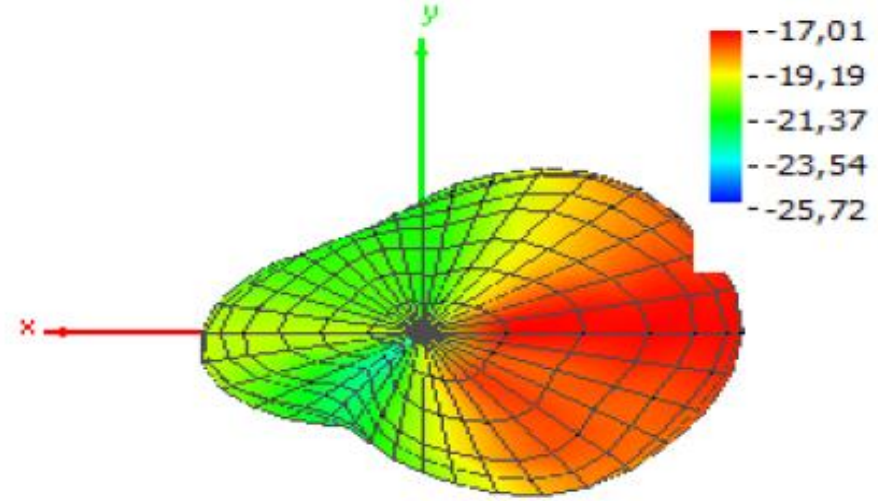


Theta = 90, Phi = 0

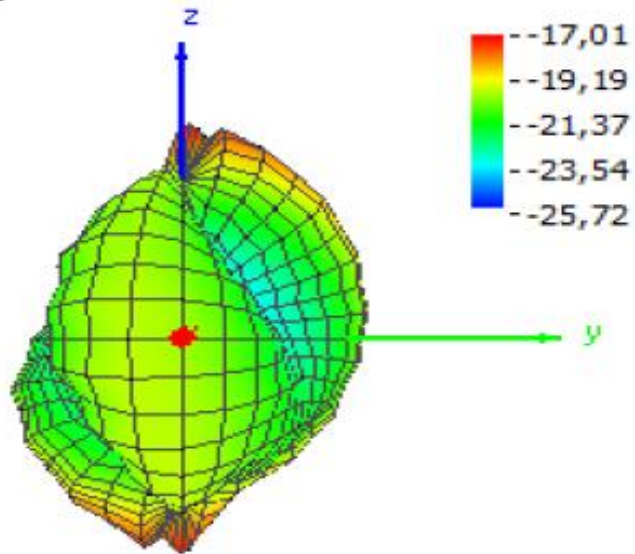


Theta = 90, Phi = 180

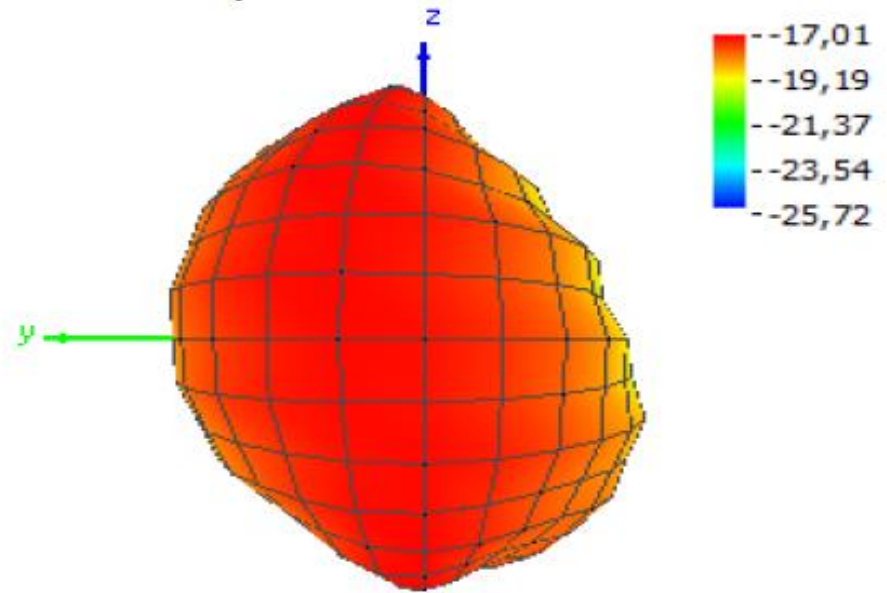

Theta = 90, Phi = 270

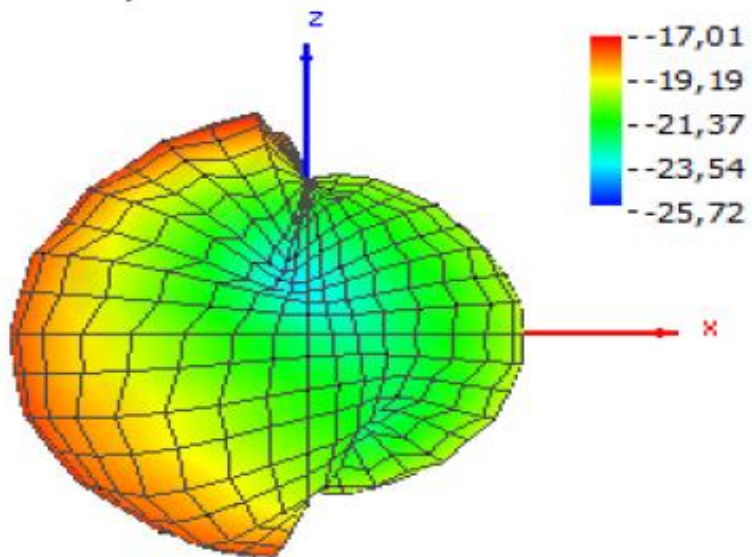

Theta = 90, Phi = 90

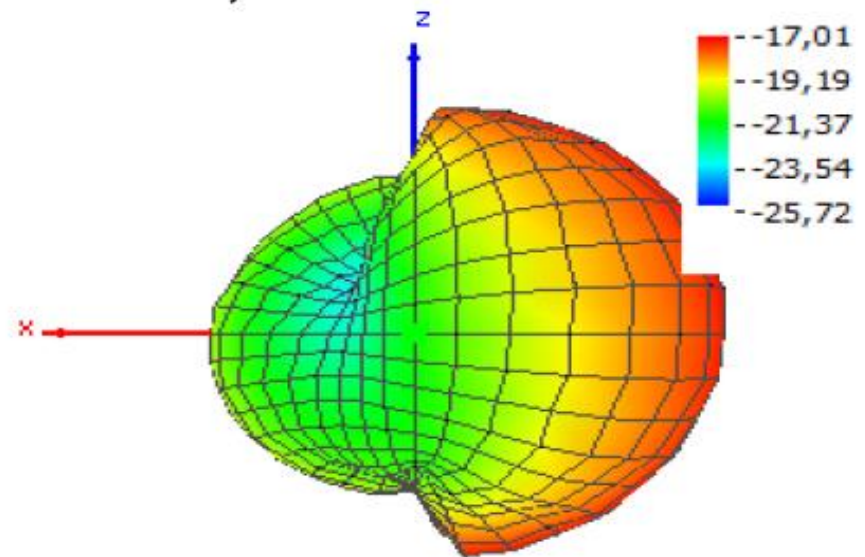

		Elevation [deg]																		
		0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
Azimuth [deg]	0	-35,65	-31,23	-27,52	-25,12	-23,23	-22,02	-21,00	-20,49	-20,15	-20,13	-20,38	-20,92	-21,76	-22,98	-24,85	-27,26	-31,74	-35,65	-35,65
	10	-35,65	-32,12	-28,70	-25,75	-24,18	-22,59	-21,81	-20,97	-20,85	-20,71	-21,00	-21,45	-22,33	-23,58	-25,36	-28,14	-32,34	-35,65	-35,65
	20	-35,65	-33,54	-30,17	-26,99	-25,43	-23,58	-22,87	-21,83	-21,79	-21,49	-21,86	-22,17	-23,07	-24,24	-26,04	-28,76	-32,84	-35,65	-35,65
	30	-35,65	-35,33	-31,92	-28,36	-26,82	-24,79	-24,04	-22,91	-22,76	-22,38	-22,78	-23,00	-23,96	-25,09	-26,85	-29,63	-33,49	-35,65	-35,65
	40	-35,65	-35,65	-33,76	-30,06	-28,23	-26,17	-25,24	-24,04	-23,78	-23,40	-23,73	-23,97	-24,81	-25,88	-27,64	-30,41	-33,76	-35,65	-35,65
	50	-35,65	-35,65	-35,42	-31,38	-29,41	-27,27	-26,16	-24,98	-24,61	-24,27	-24,47	-24,75	-25,44	-26,61	-28,17	-30,84	-33,63	-35,65	-35,65
	60	-35,65	-35,65	-35,65	-31,95	-29,59	-27,60	-26,36	-25,33	-24,82	-24,55	-24,58	-25,00	-25,51	-26,72	-27,97	-30,50	-32,93	-35,65	-35,65
	70	-35,65	-35,65	-35,30	-31,41	-29,22	-27,29	-26,00	-25,07	-24,45	-24,24	-24,18	-24,66	-25,11	-26,35	-27,44	-29,82	-32,08	-35,65	-35,65
	80	-35,65	-35,65	-33,84	-30,43	-28,29	-26,51	-25,27	-24,36	-23,81	-23,63	-23,54	-24,03	-24,36	-25,60	-26,61	-28,92	-31,02	-35,01	-35,65
	90	-35,65	-35,46	-31,85	-28,84	-26,89	-25,35	-24,10	-23,39	-22,77	-22,71	-22,60	-23,14	-23,42	-24,64	-25,66	-27,94	-30,05	-34,65	-35,65
	100	-35,65	-33,20	-29,98	-27,30	-25,51	-24,06	-22,90	-22,26	-21,67	-21,62	-21,51	-22,11	-22,40	-23,61	-24,56	-26,89	-29,10	-34,08	-35,65
	110	-35,65	-31,67	-28,76	-26,09	-24,35	-22,93	-21,81	-21,21	-20,59	-20,59	-20,46	-21,03	-21,28	-22,55	-23,51	-25,83	-28,01	-33,00	-35,65
	120	-35,65	-30,63	-27,86	-25,16	-23,37	-21,91	-20,84	-20,21	-19,58	-19,57	-19,44	-20,01	-20,28	-21,54	-22,51	-24,83	-27,04	-32,19	-35,65
	130	-35,65	-30,23	-27,14	-24,26	-22,44	-21,02	-19,93	-19,32	-18,75	-18,72	-18,66	-19,18	-19,53	-20,77	-21,79	-24,10	-26,35	-31,73	-35,65
	140	-35,65	-29,78	-26,42	-23,50	-21,69	-20,28	-19,22	-18,62	-18,11	-18,09	-18,08	-18,60	-19,04	-20,26	-21,40	-23,74	-26,15	-31,71	-35,65
	150	-35,65	-29,21	-25,80	-22,88	-21,13	-19,71	-18,74	-18,11	-17,68	-17,69	-17,67	-18,26	-18,76	-19,98	-21,22	-23,65	-26,16	-32,15	-35,65
	160	-35,65	-28,66	-25,33	-22,37	-20,65	-19,22	-18,32	-17,73	-17,33	-17,33	-17,39	-17,98	-18,55	-19,80	-21,10	-23,63	-26,28	-32,63	-35,65
	170	-35,65	-28,40	-25,12	-22,04	-20,42	-18,94	-18,14	-17,47	-17,18	-17,14	-17,32	-17,87	-18,50	-19,78	-21,15	-23,69	-26,46	-32,77	-35,65
	180	-35,65	-28,43	-25,17	-22,00	-20,50	-18,89	-18,19	-17,43	-17,30	-17,19	-17,48	-17,97	-18,74	-19,96	-21,45	-23,96	-26,84	-33,09	-35,65
	190	-35,65	-28,81	-25,68	-22,29	-20,83	-19,15	-18,56	-17,68	-17,65	-17,52	-17,86	-18,30	-19,16	-20,38	-21,93	-24,41	-27,36	-33,54	-35,65
	200	-35,65	-29,50	-26,30	-22,77	-21,36	-19,56	-19,02	-18,11	-18,14	-17,97	-18,35	-18,76	-19,69	-20,88	-22,49	-24,97	-28,06	-34,10	-35,65
	210	-35,65	-30,76	-27,45	-23,50	-22,13	-20,16	-19,73	-18,66	-18,79	-18,57	-19,00	-19,34	-20,33	-21,53	-23,20	-25,67	-28,79	-34,59	-35,65
	220	-35,65	-32,68	-29,04	-24,61	-23,24	-21,05	-20,68	-19,49	-19,67	-19,39	-19,87	-20,08	-21,13	-22,29	-24,01	-26,38	-29,51	-35,21	-35,65
	230	-35,65	-35,35	-31,15	-26,21	-24,73	-22,29	-21,91	-20,56	-20,79	-20,38	-20,85	-21,01	-22,06	-23,10	-24,78	-27,13	-29,89	-35,24	-35,65
	240	-35,65	-35,65	-33,46	-28,04	-26,33	-23,74	-23,27	-21,83	-21,95	-21,48	-21,85	-21,96	-22,89	-23,88	-25,36	-27,62	-30,15	-34,94	-35,65
	250	-35,65	-35,65	-35,23	-29,74	-27,67	-25,11	-24,48	-23,02	-23,01	-22,47	-22,86	-22,86	-23,70	-24,60	-26,05	-28,04	-30,70	-35,03	-35,65
	260	-35,65	-35,65	-35,47	-30,79	-28,44	-26,08	-25,24	-24,00	-23,80	-23,33	-23,60	-23,70	-24,49	-25,30	-26,75	-28,79	-31,25	-35,43	-35,65
	270	-35,65	-35,65	-34,05	-30,66	-28,31	-26,47	-25,40	-24,50	-24,14	-23,91	-24,06	-24,36	-25,13	-26,11	-27,56	-29,49	-32,16	-35,65	-35,65
	280	-35,65	-35,65	-32,18	-29,66	-27,56	-26,20	-25,16	-24,50	-24,18	-24,07	-24,25	-24,76	-25,50	-26,76	-28,23	-30,45	-33,21	-35,65	-35,65
	290	-35,65	-33,72	-30,67	-28,51	-26,64	-25,53	-24,57	-24,19	-23,78	-23,98	-24,11	-24,92	-25,63	-27,17	-28,73	-31,19	-34,05	-35,65	-35,65
	300	-35,65	-32,32	-29,44	-27,39	-25,63	-24,68	-23,68	-23,55	-23,03	-23,43	-23,53	-24,64	-25,18	-27,11	-28,54	-31,62	-34,34	-35,65	-35,65
	310	-35,65	-31,38	-28,53	-26,34	-24,72	-23,71	-22,77	-22,68	-22,19	-22,61	-22,62	-23,88	-24,32	-26,42	-27,65	-31,20	-33,94	-35,65	-35,65
	320	-35,65	-30,65	-27,87	-25,53	-23,88	-22,90	-21,96	-21,83	-21,40	-21,76	-21,76	-22,99	-23,43	-25,38	-26,61	-30,27	-32,88	-35,65	-35,65
	330	-35,65	-30,12	-27,36	-24,88	-23,26	-22,20	-21,30	-21,09	-20,66	-20,98	-21,01	-22,11	-22,53	-24,40	-25,61	-29,13	-31,82	-35,65	-35,65
	340	-35,65	-29,82	-27,05	-24,40	-22,84	-21,65	-20,83	-20,44	-20,10	-20,32	-20,37	-21,36	-21,81	-23,56	-24,86	-28,18	-31,09	-35,65	-35,65
	350	-35,65	-29,91	-27,12	-24,17	-22,90	-21,38	-20,71	-20,10	-19,88	-19,89	-20,10	-20,84	-21,49	-23,04	-24,41	-27,64	-30,80	-35,65	-35,65
360	-35,65	-31,23	-27,52	-25,12	-23,23	-22,02	-21,00	-20,49	-20,15	-20,13	-20,38	-20,92	-21,76	-22,98	-24,85	-27,26	-31,74	-35,65	-35,65	

Peak eirp	-17,14	[dBm]
Directivity	2,85	[dBi]
Avg eirp	-19,99	[dBm]