



FCC TEST REPORT

FCC ID: 2ANXIKS36BB200PDQ

On Behalf of

Comson (Shenzhen) Electronic Technology Co., Ltd.

Portable Bluetooth Speaker

**Model No.: KS-36, BB200PDQ, KS-32, KS-33, KS-34, KS-35,
KS-37, KS-38, KS-39**

Prepared for : Comson (Shenzhen) Electronic Technology Co., Ltd.
3rd floor, Building 22, Xingwei Third Industrial District, Xingye Yi
Address : Road No.6, Fenghuang Community, Fuyong, Shenzhen City,
Guangdong Province, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2006157-C01-R01
Date of Receipt : July 1, 2020
Date of Test : July 2-13, 2020
Date of Report : July 13, 2020
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description.....	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty.....	9
2.9. Test Equipment List	10
3. Maximum Peak Output power	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Setup.....	11
3.4. Test Result	11
4. Bandwidth.....	12
4.1. Limit	12
4.2. Test Procedure	12
4.3. Test Result	12
5. Carrier Frequency Separation.....	22
5.1. Limit	22
5.2. Test Procedure	22
5.3. Test Result	22
6. Number Of Hopping Channel.....	24
6.1. Limit	24
6.2. Test Procedure	24
6.3. Test Result	24
7. Dwell Time.....	26
7.1. Test limit	26
7.2. Test Procedure	26
7.3. Test Result	26
8. Radiated emissions.....	30
8.1. Limit	30
8.2. Block Diagram of Test setup	31
8.3. Test Procedure	32
8.4. Test Result	32
9. Band Edge Compliance	38

9.1. Block Diagram of Test Setup.....	38
9.2. Limit	38
9.3. Test Procedure	38
9.4. Test Result	38
10. Power Line Conducted Emissions	48
10.1. Block Diagram of Test Setup.....	48
10.2. Limit	48
10.3. Test Procedure	48
10.4. Test Result	48
11. Antenna Requirements	51
11.1. Limit	51
11.2. Result	51
12. Test setup photo	52
12.1. Photos of Radiated emission.....	52
12.2. Photos of Conducted Emission test	53
13. Photos of EUT	54

TEST REPORT DECLARATION

Applicant : Comson (Shenzhen) Electronic Technology Co., Ltd.
 Address : 3rd floor, Building 22, Xingwei Third Industrial District, Xingye Yi Road No.6,
 Fenghuang Community, Fuyong, Shenzhen City, Guangdong Province, China
 Manufacturer : Comson (Shenzhen) Electronic Technology Co., Ltd.
 Address : 3rd floor, Building 22, Xingwei Third Industrial District, Xingye Yi Road No.6,
 Fenghuang Community, Fuyong, Shenzhen City, Guangdong Province, China
 EUT Description : Portable Bluetooth Speaker
 (A) Model No. : KS-36, BB200PDQ, KS-32, KS-33, KS-34, KS-35,
 KS-37, KS-38, KS-39

COMSON

(B) Trademark :



Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Lucas Pang
Project Engineer

Approved by (name + signature).....:

Simple Guan
Project Manager

Date of issue.....

July 13, 2020

Revision History

Revision	Issue Date	Revisions	Revised By
V0	July 13, 2020	Initial released Issue	Lucas Pang

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

2. GENERAL INFORMATION


2.1. Description of Device (EUT)

Description : Portable Bluetooth Speaker

Model Number : KS-36, BB200PDQ, KS-32, KS-33, KS-34, KS-35, KS-37, KS-38, KS-39

Diff : There is no difference between the models except the appearance color. So all the test were performed on the model KS-36.

COUMSON

Trademark : 

Power supply : DC 5V from USB, DC 3.7V from battery.

Radio Technology : Bluetooth V5.0

Operation frequency : 2402-2480MHz

Channel No. : 79 Channels

Channel spacing : 1MHz

Modulation type : GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna Type : PCB Antenna, 2dBi(Max).

Software version : V01

Hardware version : V01

Intend use environment : Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	Notebook PC	ACER	ZQT	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
π /4 DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

September 15, 2019 Certificated by IC
Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	1Year
Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2019.09.06	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2019.09.05	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2019.09.06	1Year
Receiver	R&S	ESCI	101165	2019.09.05	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2019.09.06	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2019.09.05	1Year
Cable	Resenberger	N/A	No.2	2019.09.05	1Year
Cable	Resenberger	N/A	No.3	2019.09.05	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2019.09.05	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2019.09.05	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2019.09.05	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2019.09.05	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2019.09.20	1 Year
Horn Antenna	A-INFOMW	LB-180100-KF	J211020657	2019.09.20	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2019.09.05	1 Year
Power Meter	Agilent	E9300A	MY41496625	2019.09.06	1 Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-880	100631	2019.09.10	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2019.09.10	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1.Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3.Test Setup

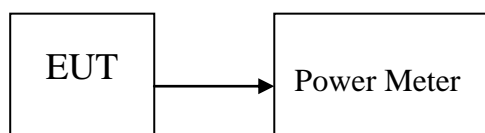

3.4.Test Result

Mode	Freq (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (dBm)	Result
GFSK	2402	-4.865	0.326	21	Pass
	2441	-5.788	0.264	21	Pass
	2480	-6.905	0.204	21	Pass
$\pi/4$ DQPSK	2402	-2.954	0.507	21	Pass
	2441	-4.282	0.373	21	Pass
	2480	-5.763	0.265	21	Pass
8DPSK	2402	-1.746	0.669	21	Pass
	2441	-3.822	0.415	21	Pass
	2480	-5.394	0.289	21	Pass
Conclusion: PASS					

4. BANDWIDTH

4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3.Test Result


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant 1	0.7991	0.8808	0	Pass
NVNT	1-DH1	2441	Ant 1	0.7883	0.8778	0	Pass
NVNT	1-DH1	2480	Ant 1	0.8157	0.884	0	Pass
NVNT	2-DH1	2402	Ant 1	1.1765	1.2506	0	Pass
NVNT	2-DH1	2441	Ant 1	1.1581	1.256	0	Pass
NVNT	2-DH1	2480	Ant 1	1.1601	1.2608	0	Pass
NVNT	3-DH1	2402	Ant 1	1.1489	1.2126	0	Pass
NVNT	3-DH1	2441	Ant 1	1.1443	1.2412	0	Pass
NVNT	3-DH1	2480	Ant 1	1.1487	1.2496	0	Pass

OBW NVNT 1-DH1 2402MHz Ant1

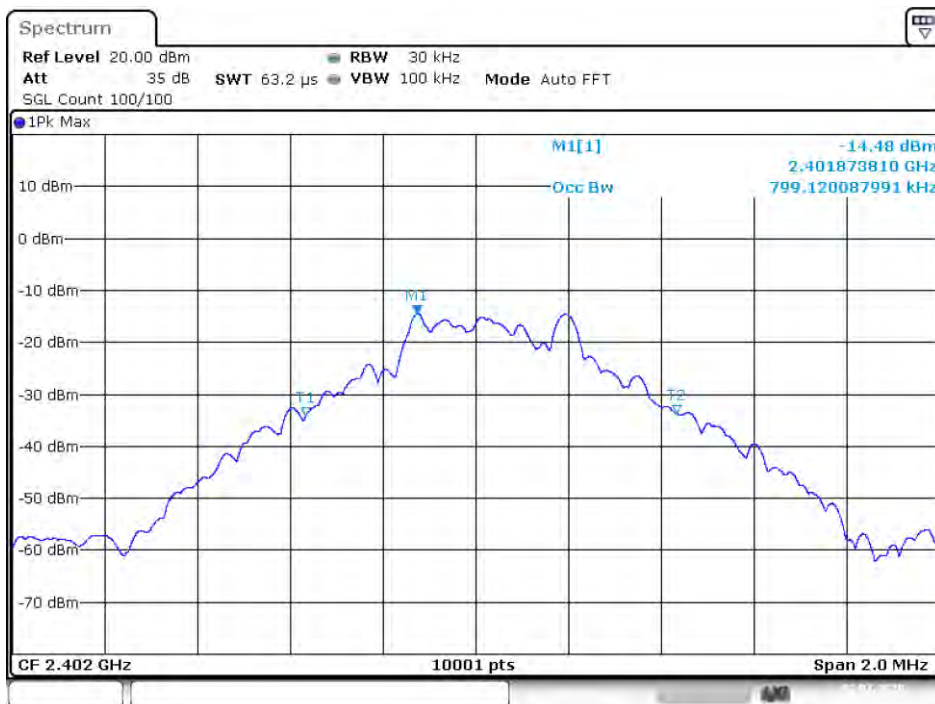


Date: 2.JUL.2020 05:33:15

-20 dB BW NVNT 1-DH1 2402MHz Ant1

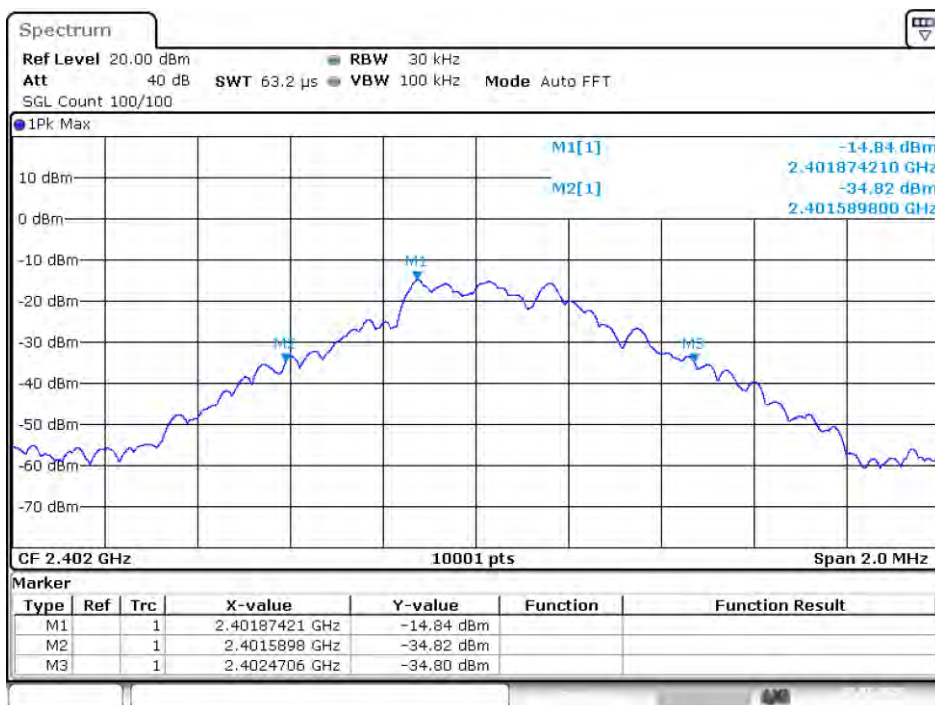


Date: 2.JUL.2020 05:33:18

OBW NVNT 1-DH1 2441MHz Ant1

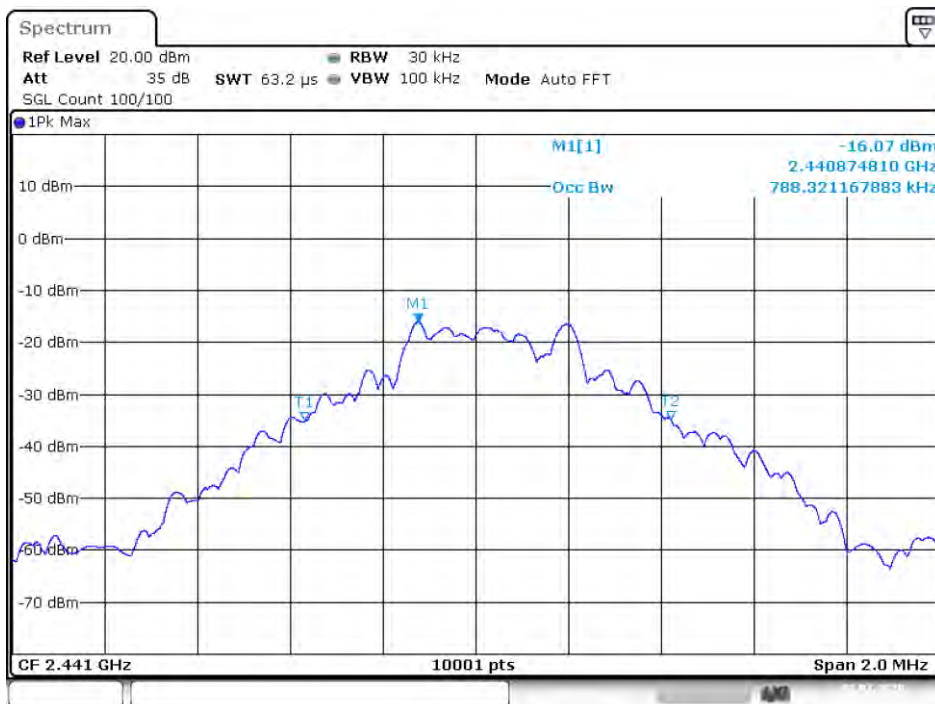


Date: 2 JUL 2020 05:36:25

-20 dB BW NVNT 1-DH1 2441MHz Ant1

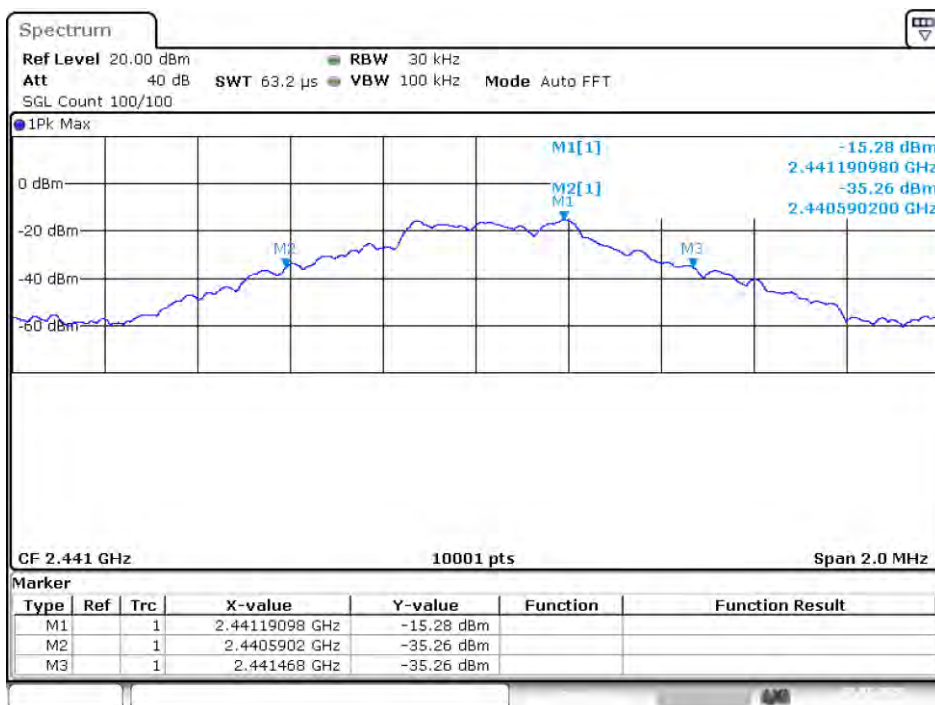


Date: 2 JUL 2020 05:36:28

OBW NVNT 1-DH1 2480MHz Ant1

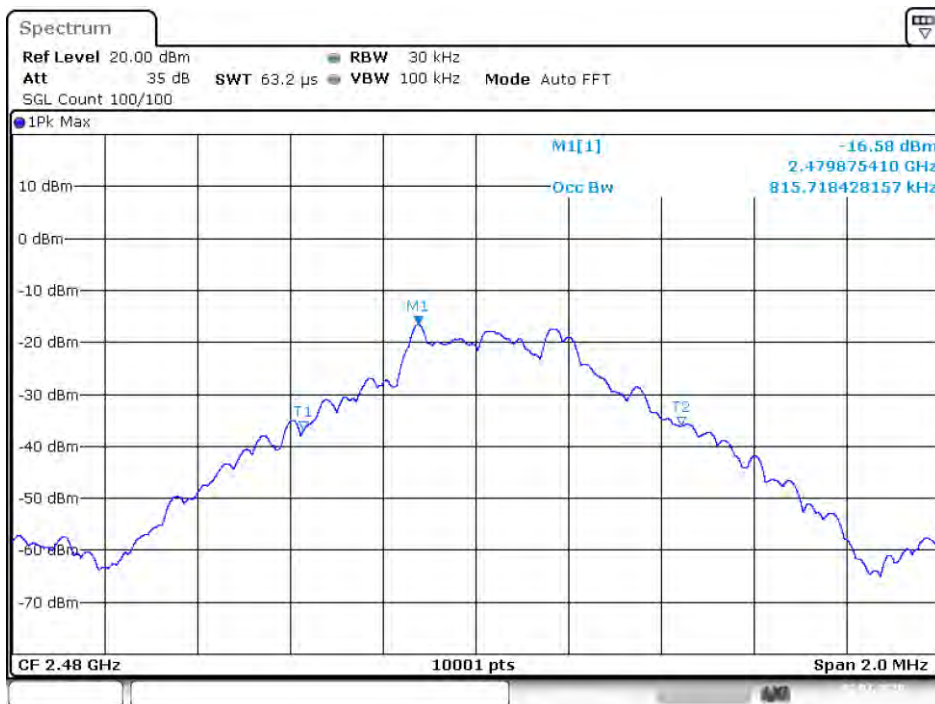


Date: 2.JUL.2020 05:38:07

-20 dB BW NVNT 1-DH1 2480MHz Ant1

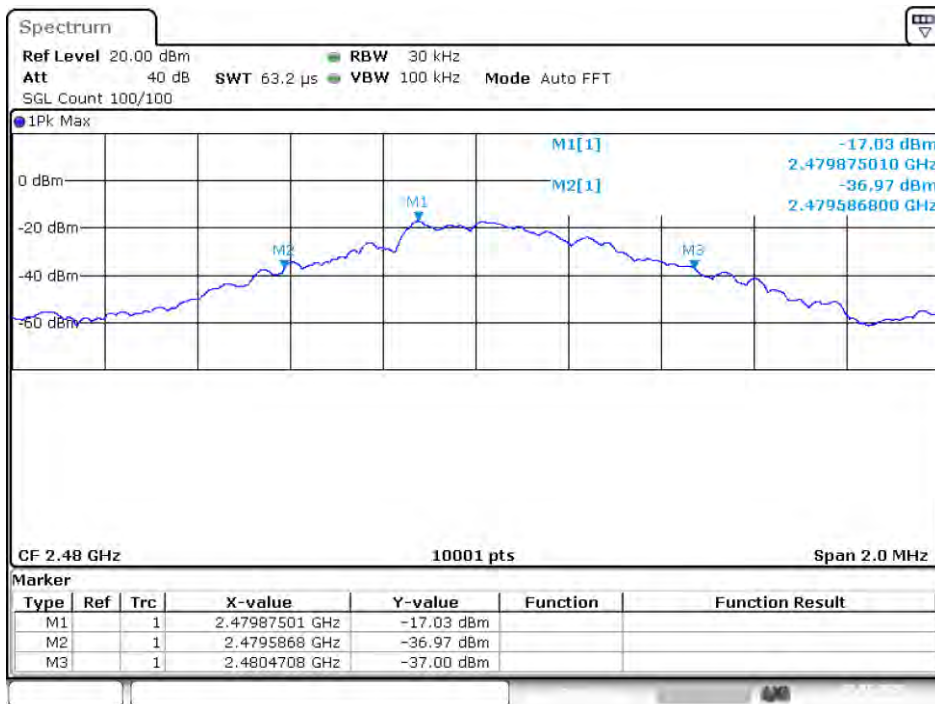


Date: 2.JUL.2020 05:38:10

OBW NVNT 2-DH1 2402MHz Ant1

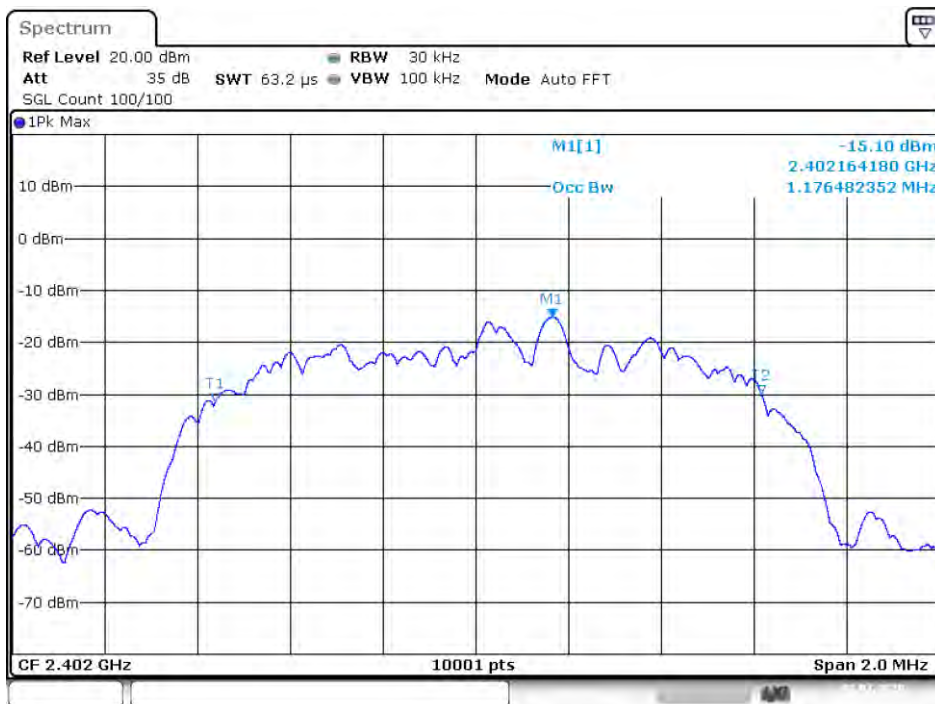


Date: 2.JUL.2020 05:54:51

-20 dB BW NVNT 2-DH1 2402MHz Ant1

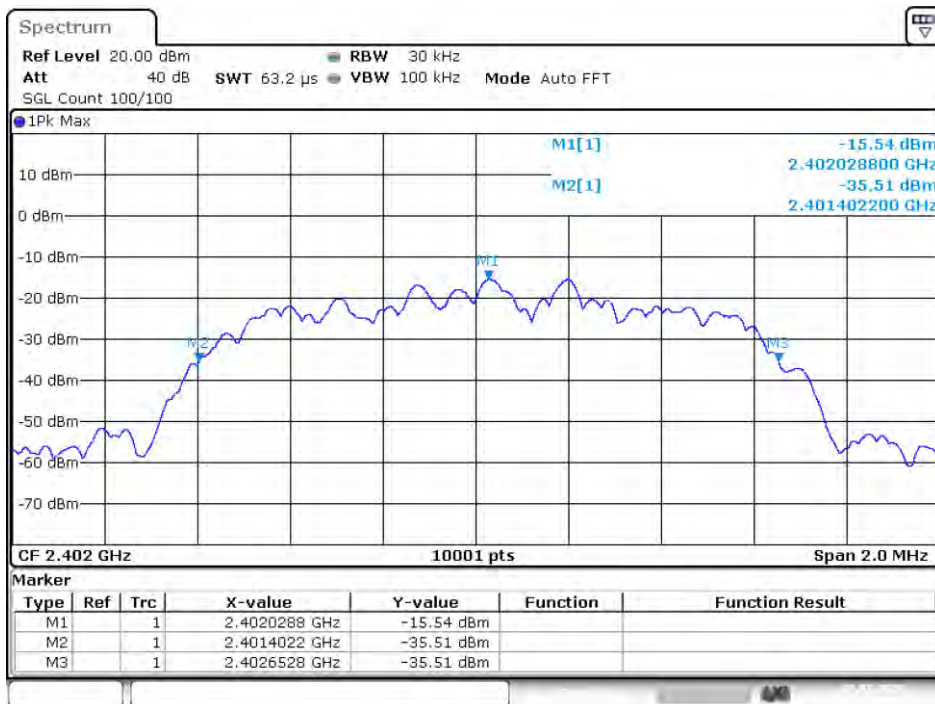


Date: 2.JUL.2020 05:54:54

OBW NVNT 2-DH1 2441MHz Ant1

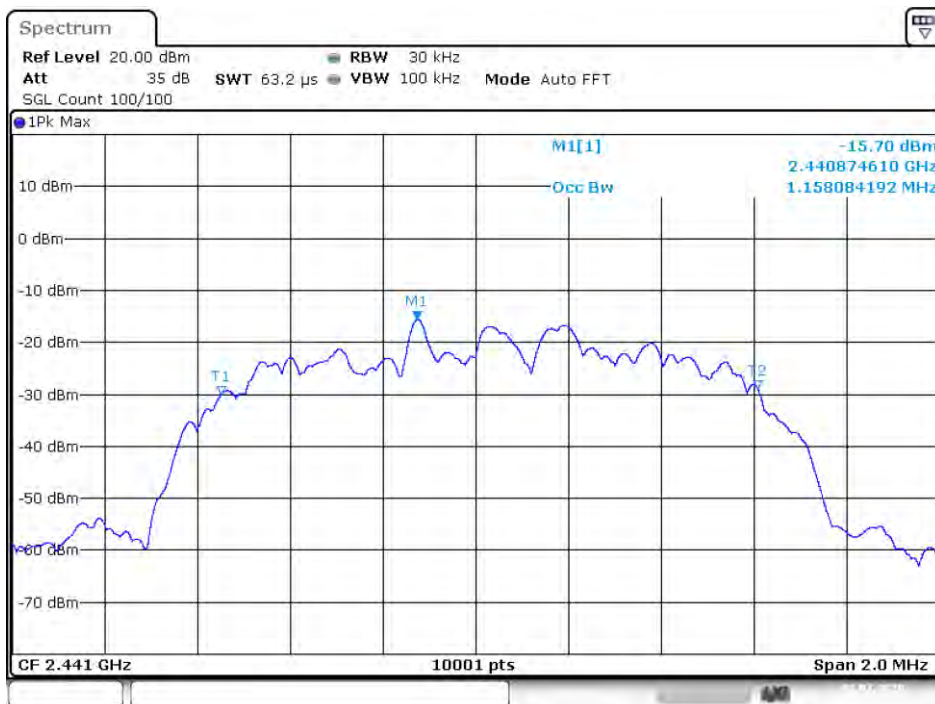


Date: 2.JUL.2020 05:58:10

-20 dB BW NVNT 2-DH1 2441MHz Ant1

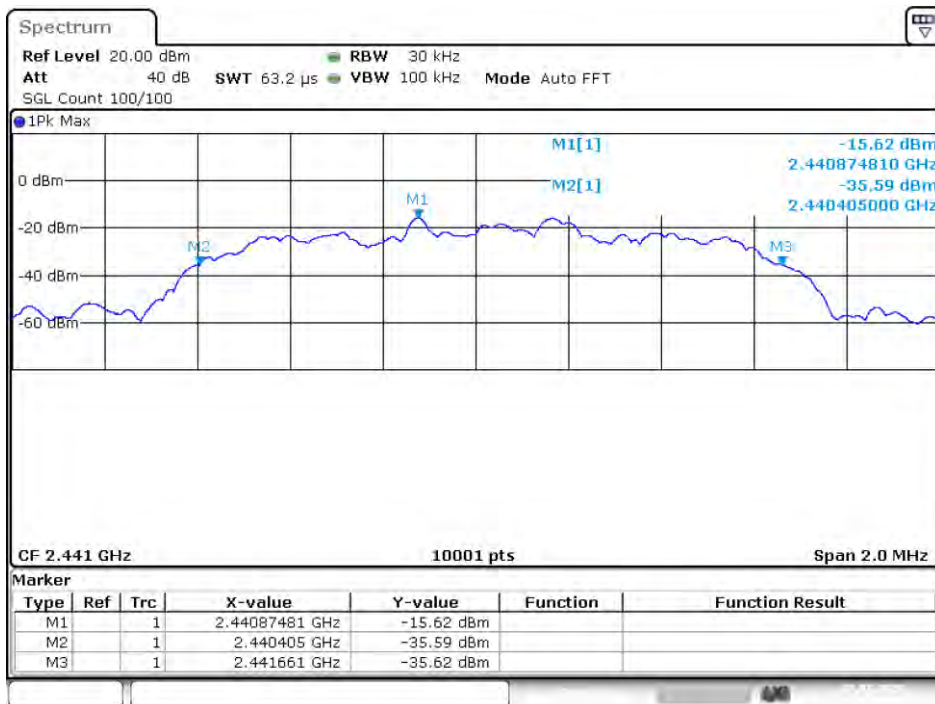


Date: 2.JUL.2020 05:58:14

OBW NVNT 2-DH1 2480MHz Ant1

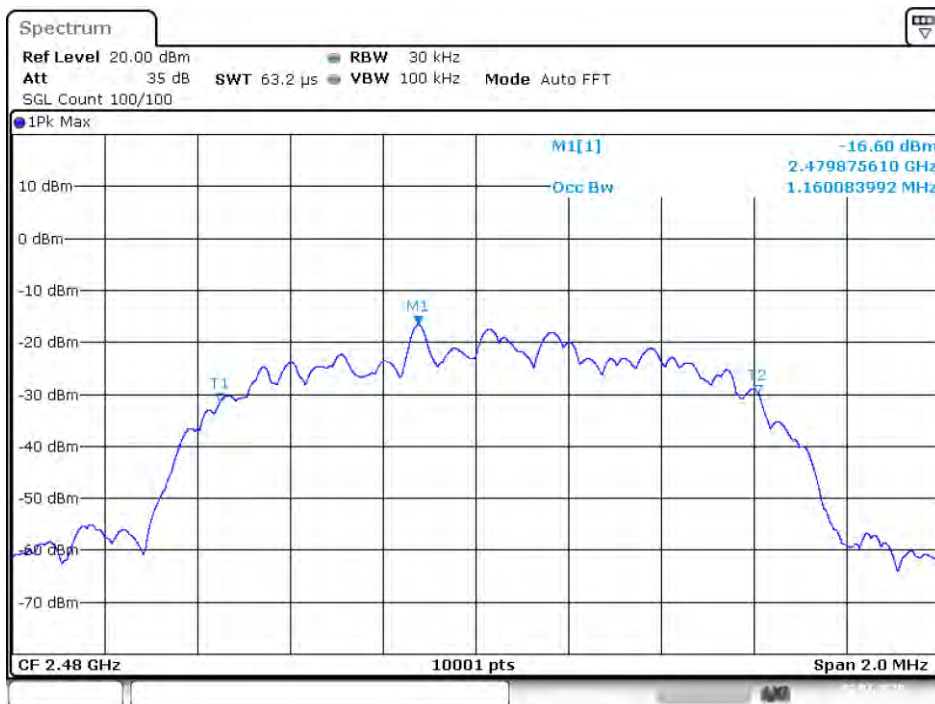


Date: 2.JUL.2020 05:59:52

-20 dB BW NVNT 2-DH1 2480MHz Ant1

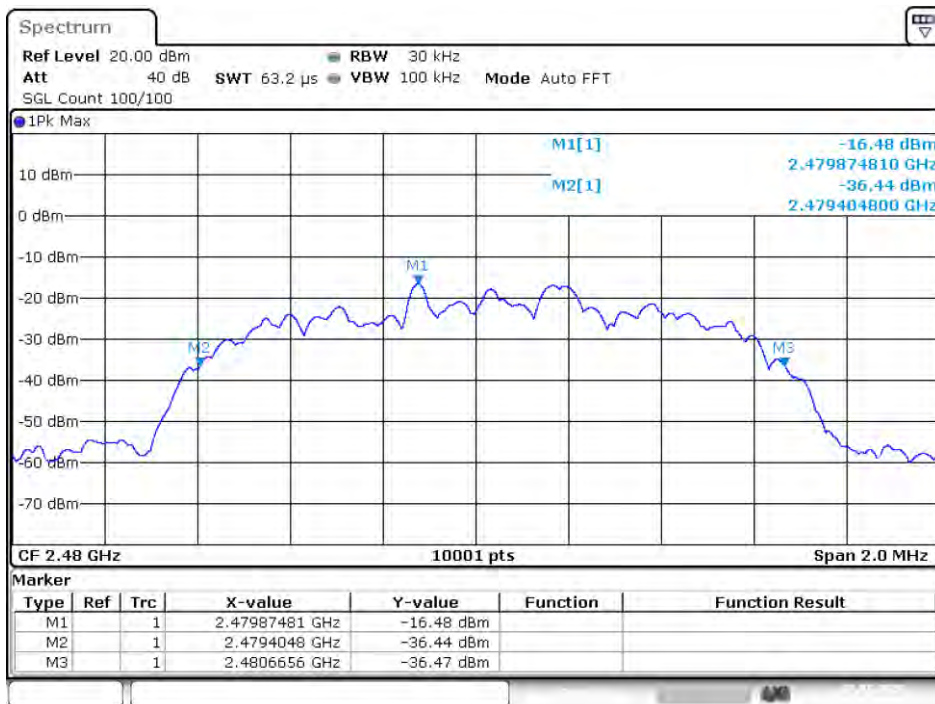


Date: 2.JUL.2020 05:59:55

OBW NVNT 3-DH1 2402MHz Ant1

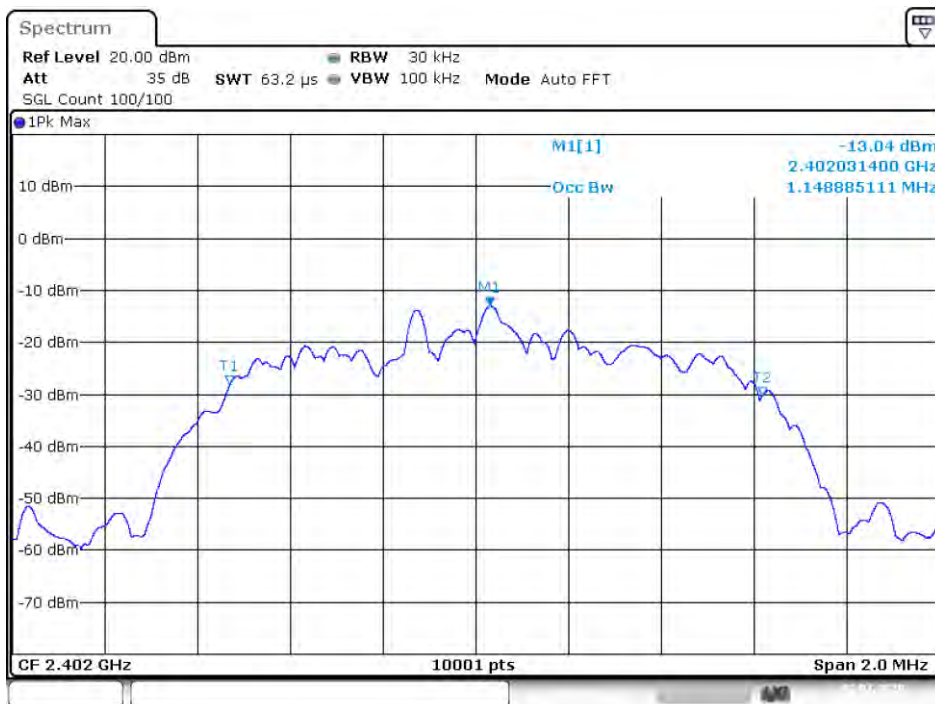


Date: 2.JUL.2020 06:14:23

-20 dB BW NVNT 3-DH1 2402MHz Ant1

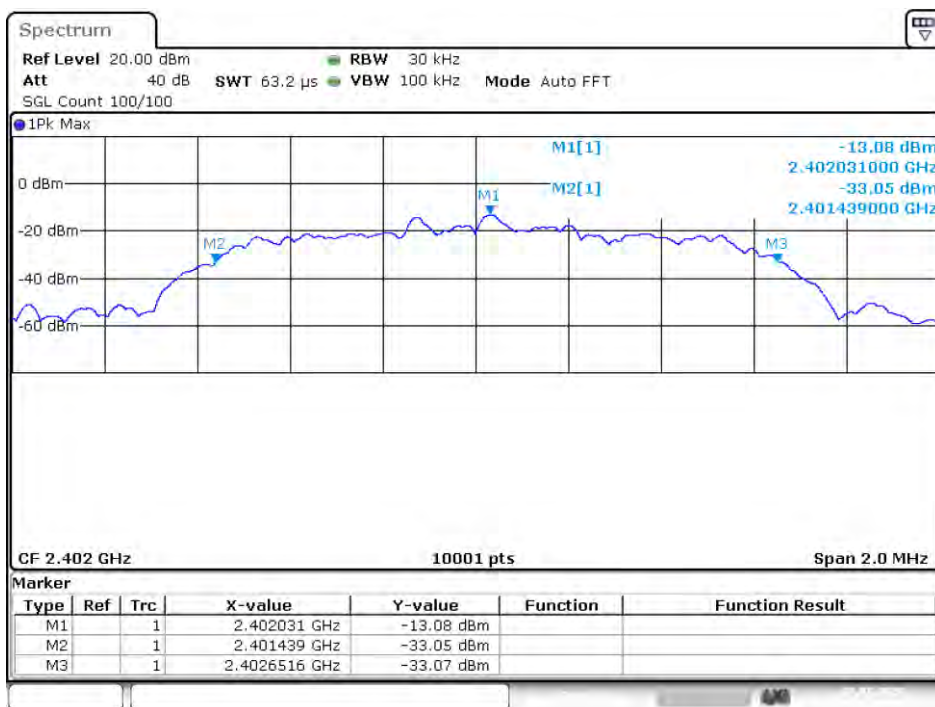


Date: 2.JUL.2020 06:14:26

OBW NVNT 3-DH1 2441MHz Ant1

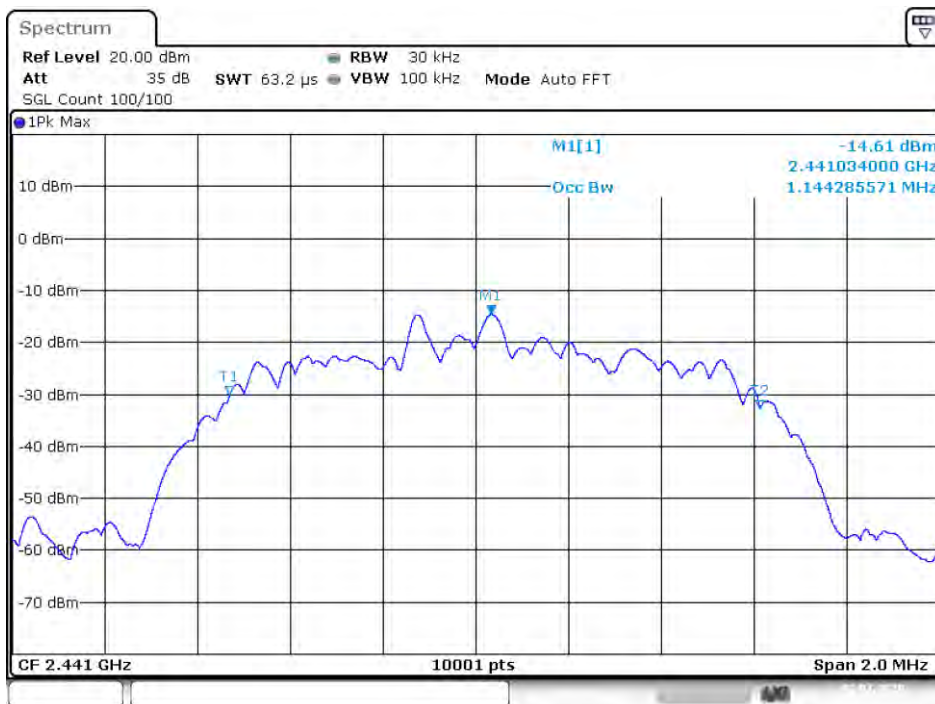


Date: 2.JUL.2020 06:18:58

-20 dB BW NVNT 3-DH1 2441MHz Ant1

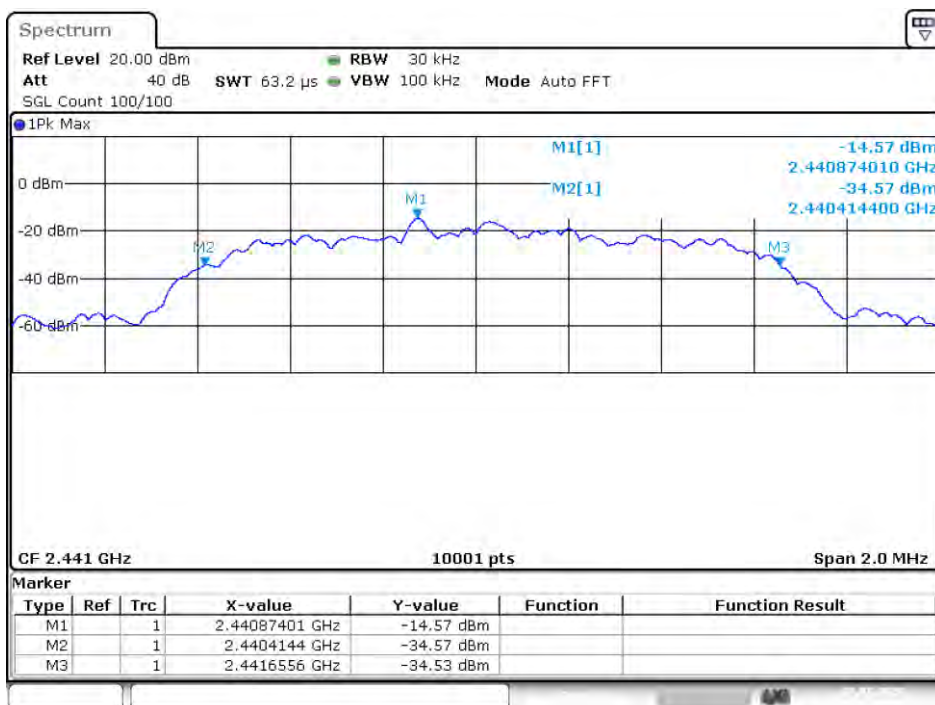


Date: 2.JUL.2020 06:19:01

OBW NVNT 3-DH1 2480MHz Ant1

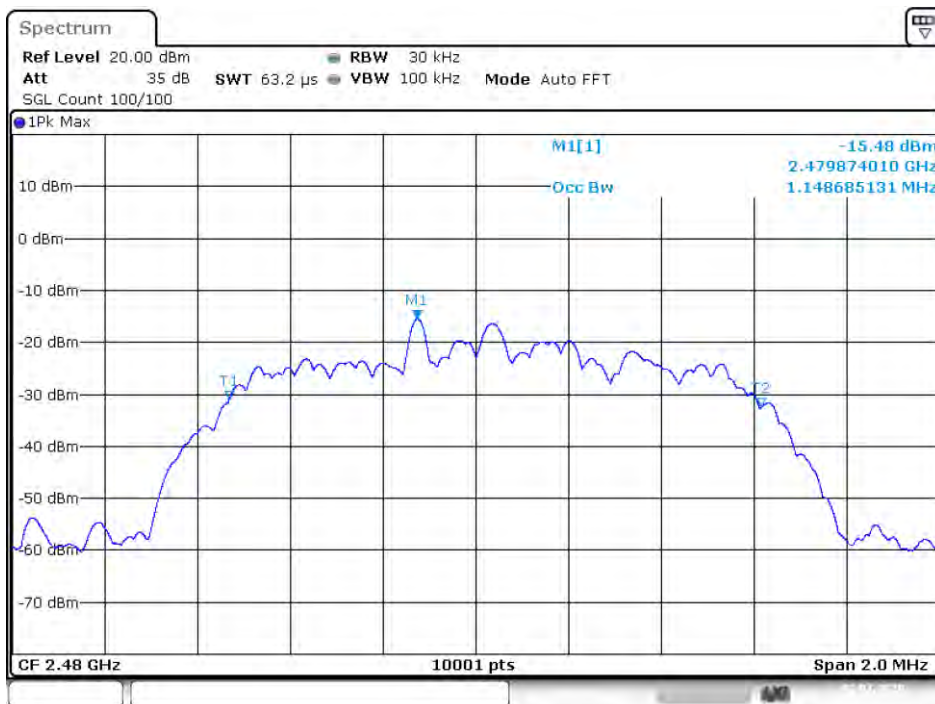

Date: 2.JUL.2020 06:24:05

-20 dB BW NVNT 3-DH1 2480MHz Ant1

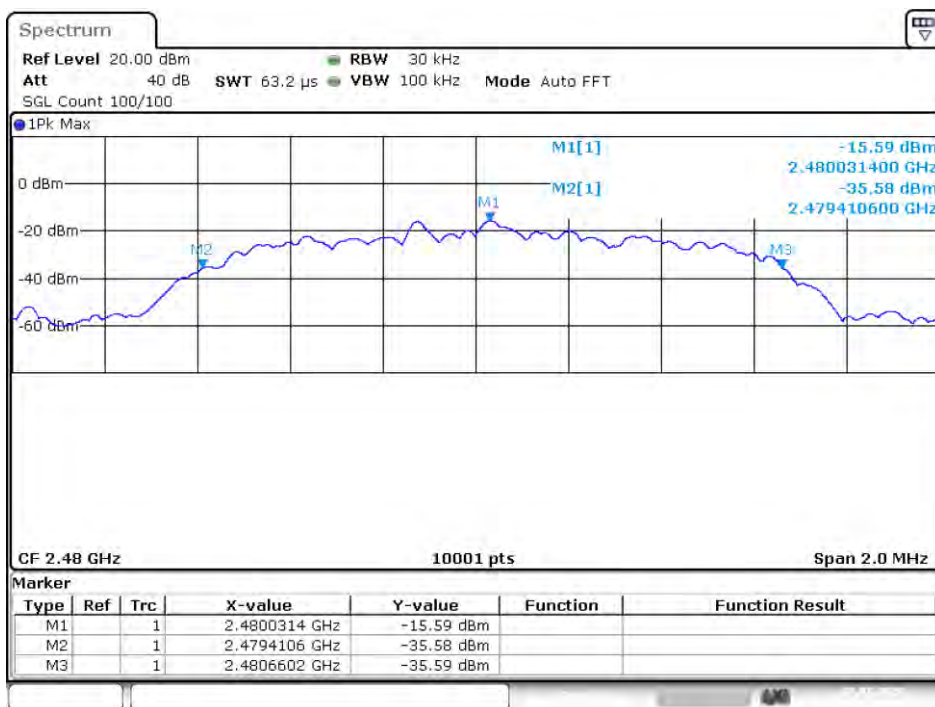

Date: 2.JUL.2020 06:24:08

5. CARRIER FREQUENCY SEPARATION

5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 20kHz RBW and 62kHz VBW.

5.3.Test Result


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2441.035	2442.007	0.972	0.589	Pass
NVNT	2-DH1	2440.882	2442.061	1.179	0.841	Pass
NVNT	3-DH1	2441.053	2442.088	1.035	0.833	Pass

CFS NVNT 1-DH1 2441MHz

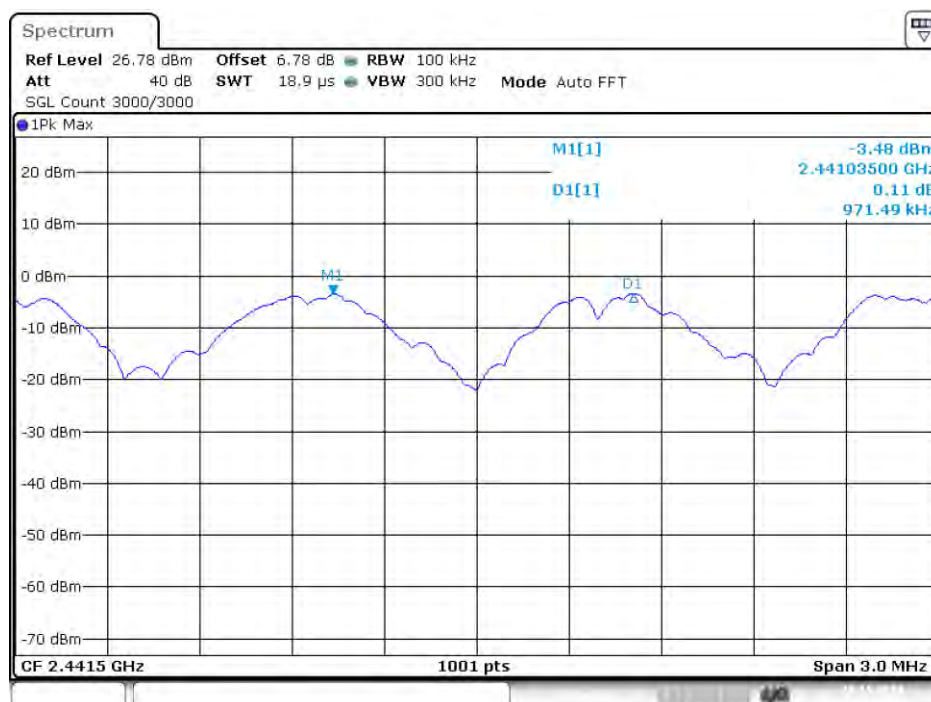


Date: 2.JUL.2020 08:58:29

CFS NVNT 2-DH1 2441MHz

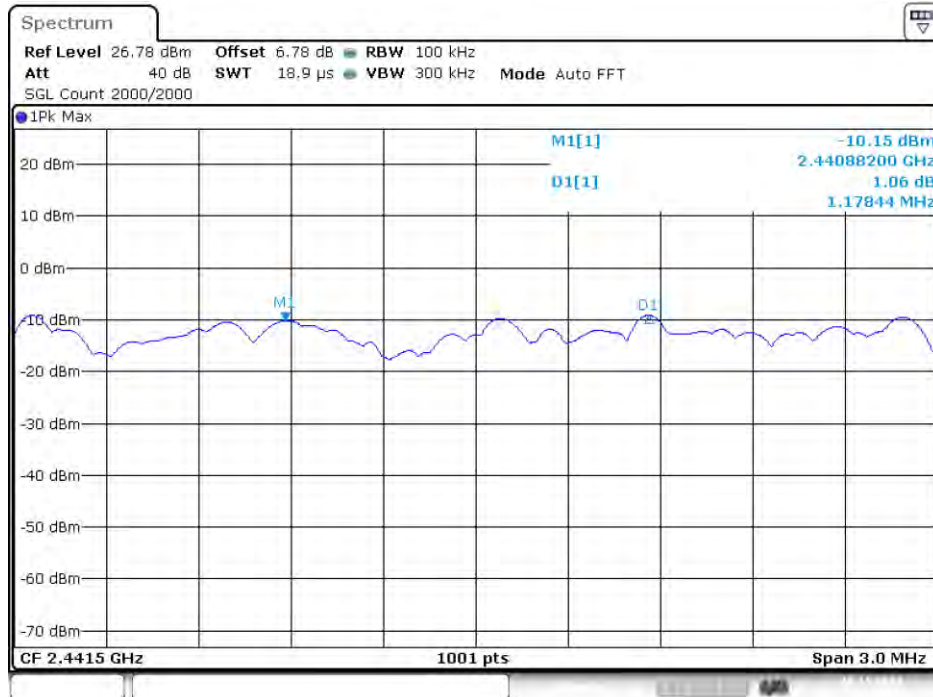

Date: 2.JUL.2020 08:55:59

CFS NVNT 3-DH1 2441MHz

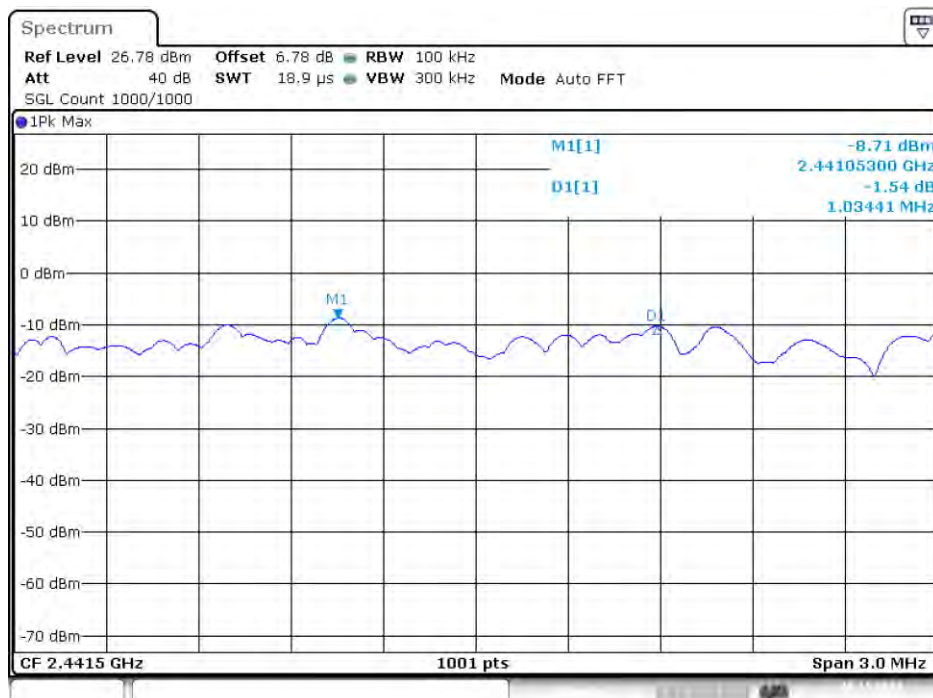

Date: 2.JUL.2020 08:51:51

6. NUMBER OF HOPPING CHANNEL

6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3.Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz

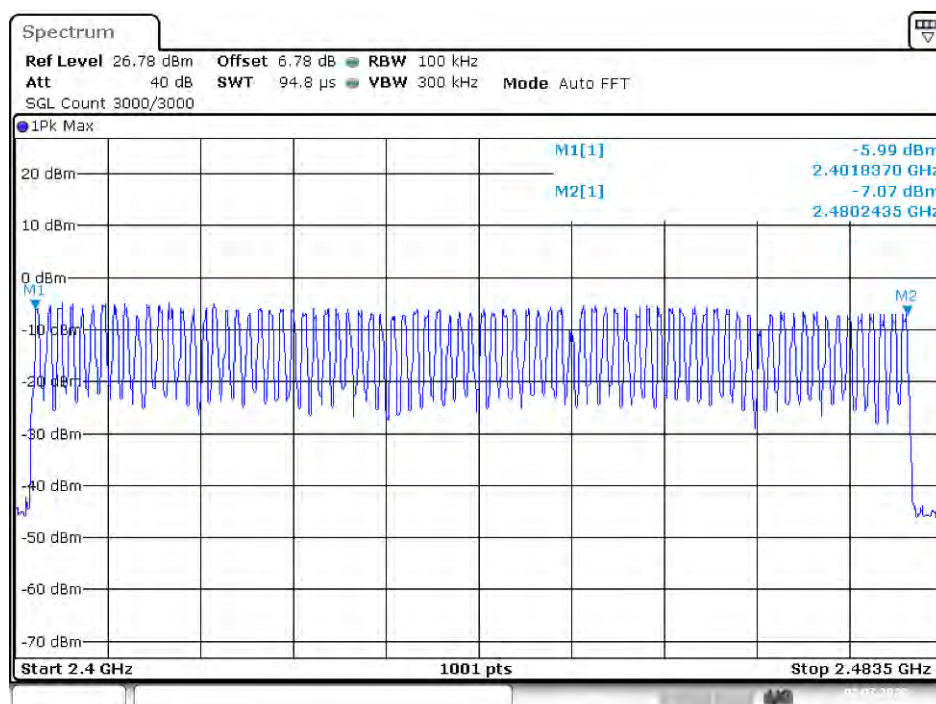


Date: 2.JUL.2020 05:45:31

Hopping No. NVNT 2-DH1 2441MHz

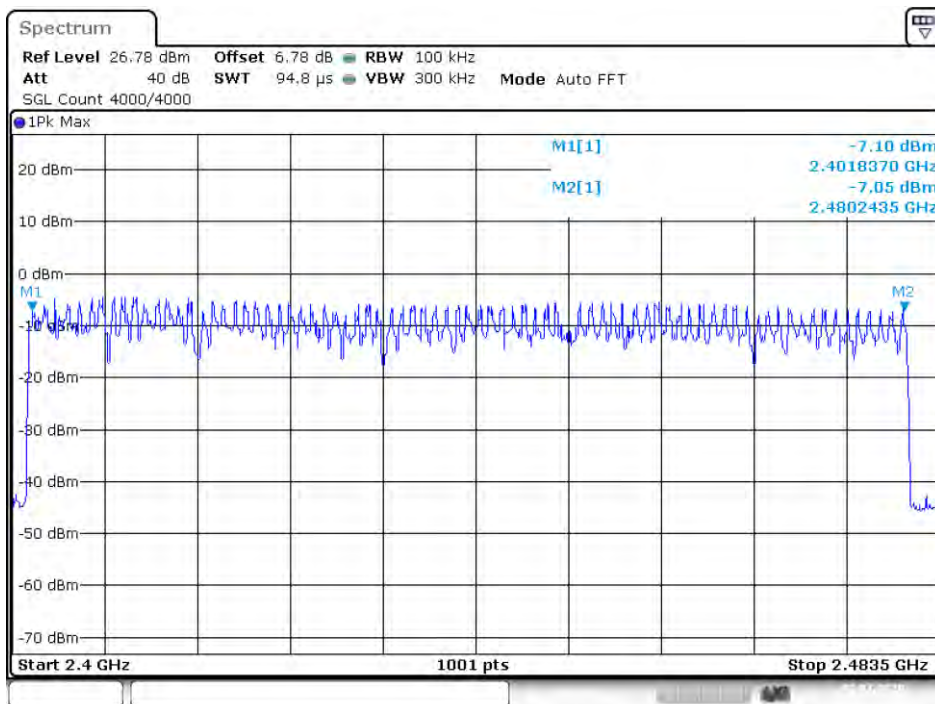

Date: 2.JUL.2020 06:05:53

Hopping No. NVNT 3-DH1 2441MHz

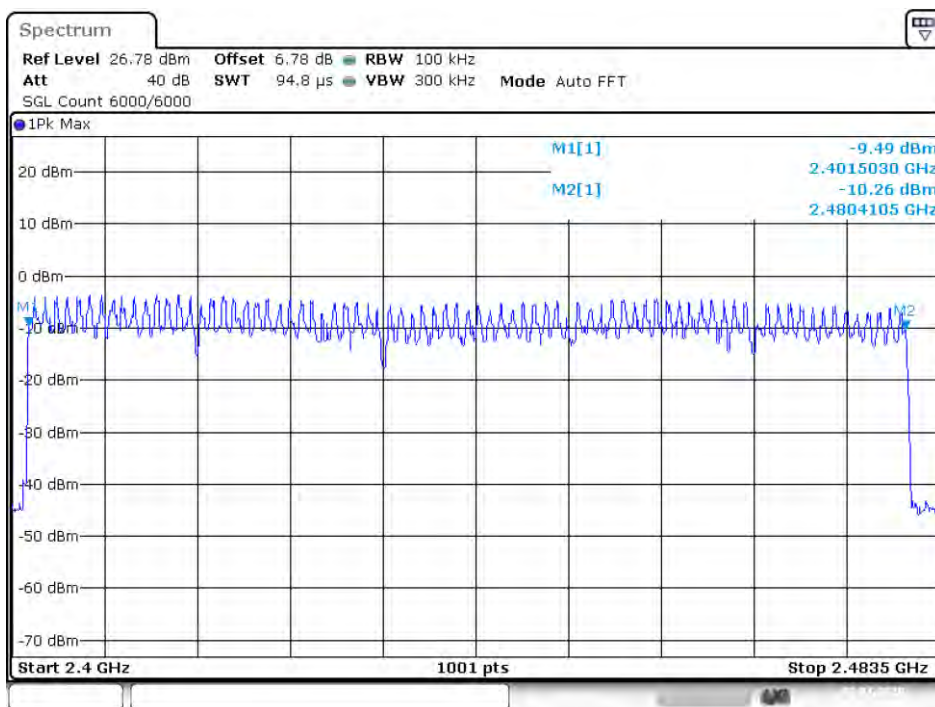

Date: 2.JUL.2020 06:33:51

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measurements were complete.

7.3. Test Result

PASS.

Detailed information please see the following page.

Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Conclusion
GFSK	DH1	2441	0.385	0.123	<0.4	PASS
	DH3	2441	1.641	0.263		PASS
	DH5	2441	2.888	0.308		PASS
π /4 DQPSK	DH1	2441	0.394	0.126	<0.4	PASS
	DH3	2441	1.646	0.263		PASS
	DH5	2441	2.894	0.309		PASS
8DPSK	DH1	2441	0.396	0.127	<0.4	PASS
	DH3	2441	1.645	0.263		PASS
	DH5	2441	2.896	0.309		PASS

Note: 1 A period time = 0.4 (s) * 79 = 31.6(s)

2 DH1 time slot = Pulse Duration * (1600/(2*79)) * A period time/1000


DH3 time slot = Pulse Duration * (1600/(4*79)) * A period time/1000

DH5 time slot = Pulse Duration * (1600/(6*79)) * A period time/1000


Dwell time

GFSK


$\pi/4$ -DQPSK

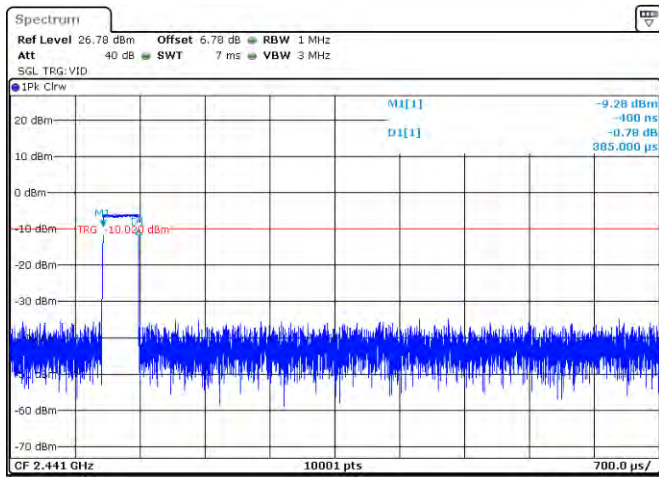


Channel 39 / 2441 MHz - DH1

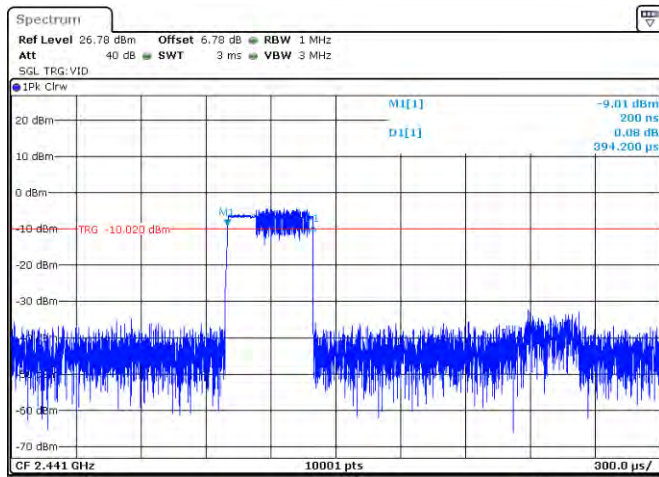


Channel 39 / 2441 MHz - 2DH1

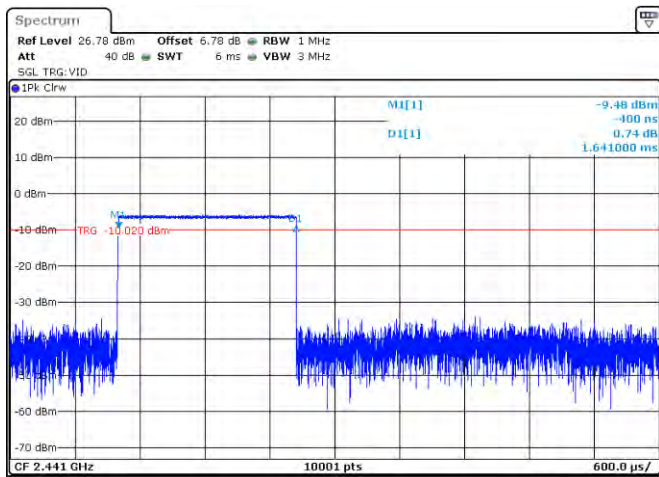


Channel 39 / 2441 MHz - DH3

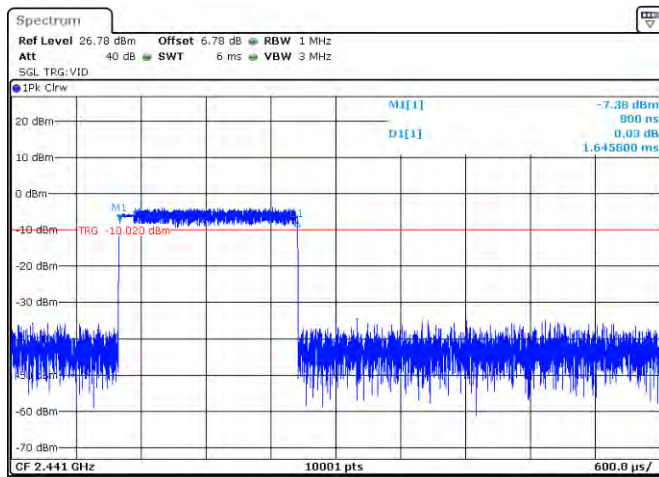

Channel 39 / 2441 MHz - 2DH3

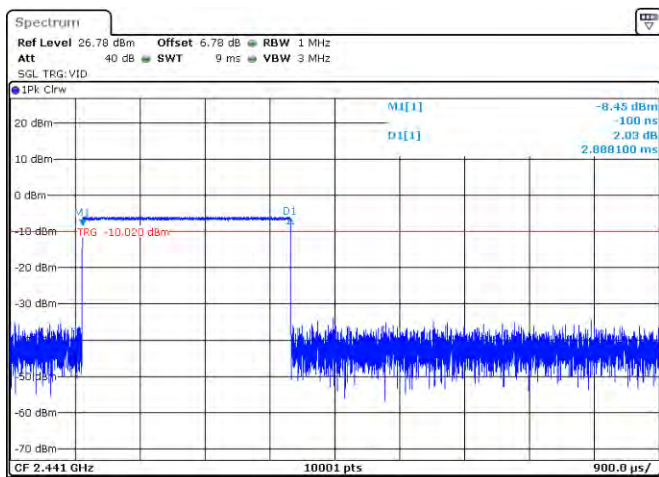


Channel 39 / 2441 MHz - DH5

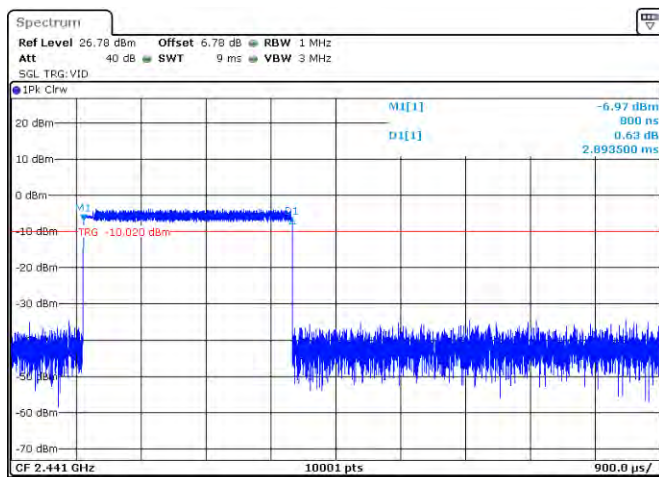


Channel 39 / 2441 MHz - 2DH5

Dwell time


8DPSK

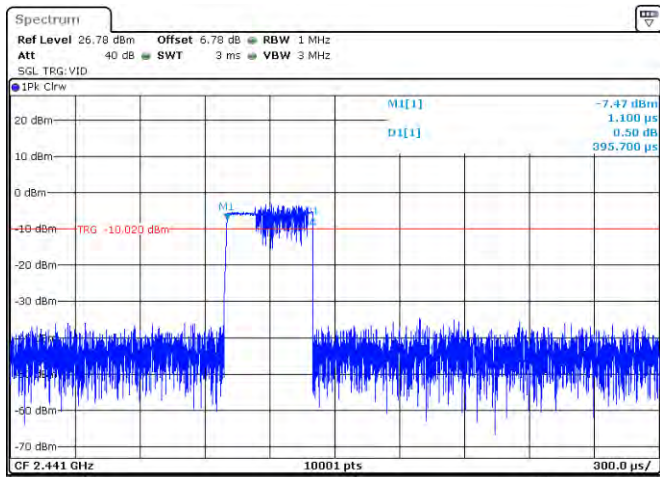

Channel 39 / 2441 MHz - DH1

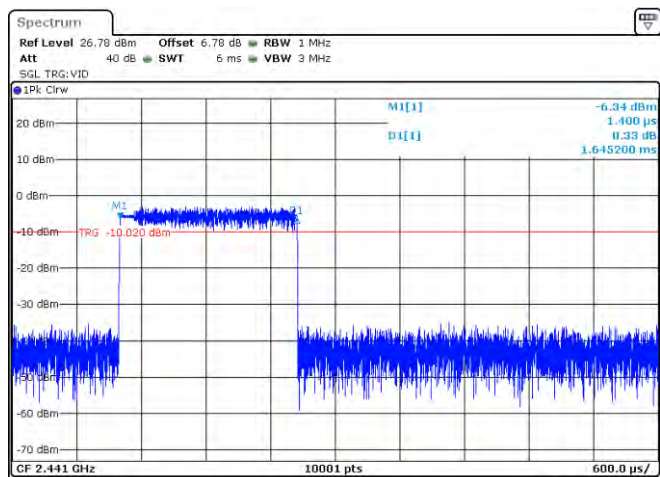

Channel 39 / 2441 MHz - DH3

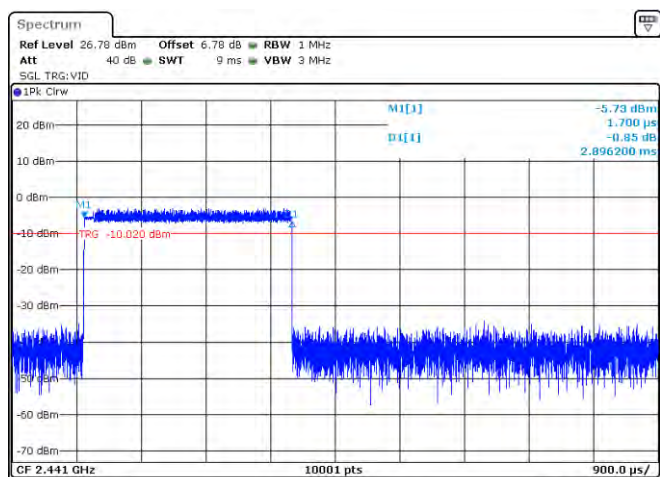

Channel 39 / 2441 MHz - DH5

8. RADIATED EMISSIONS

8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

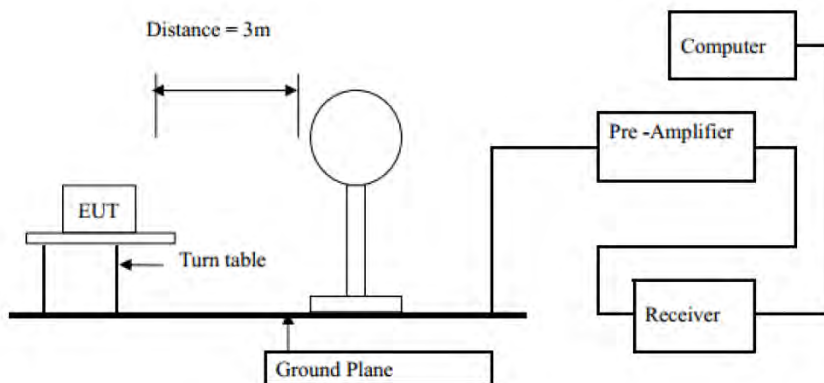

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

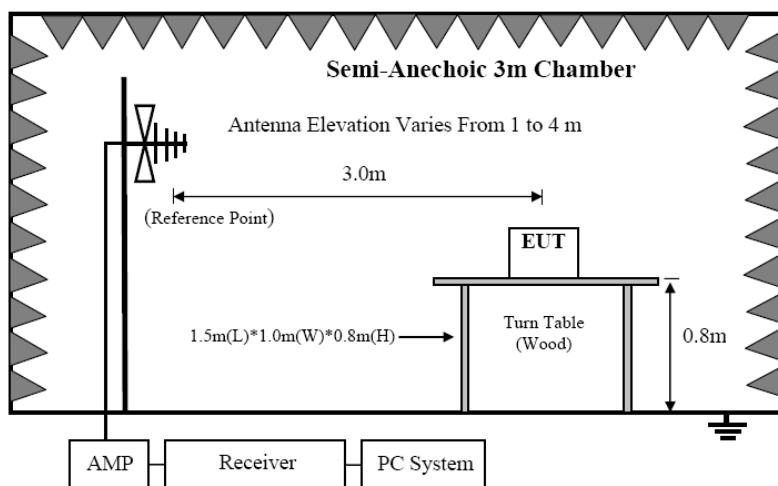

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

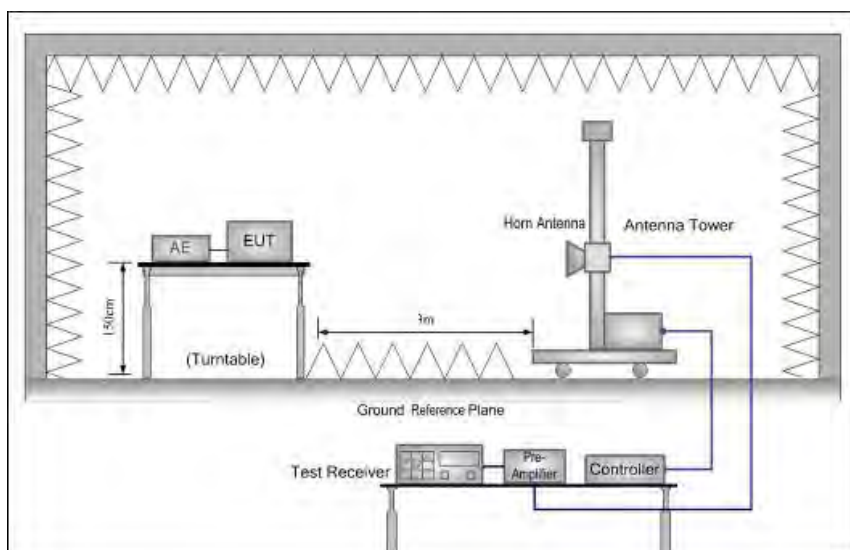

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency. Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

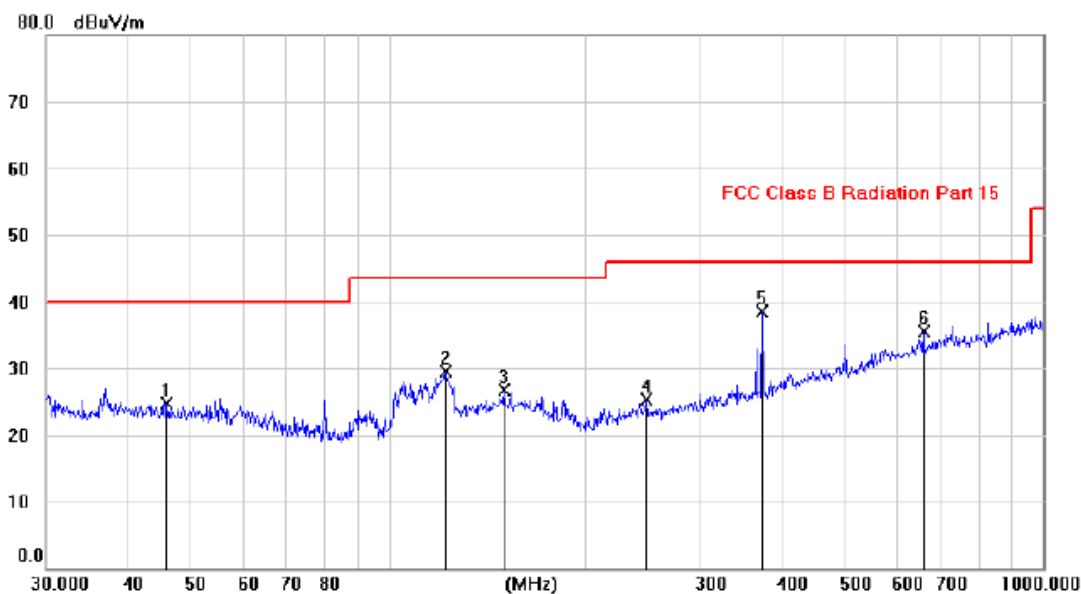

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		45.9680	10.01	14.68	24.69	40.00	-15.31	peak			
2		121.9755	15.50	13.99	29.49	43.50	-14.01	peak			
3		150.1687	10.63	16.01	26.64	43.50	-16.86	peak			
4		248.3777	11.39	13.84	25.23	46.00	-20.77	peak			
5	*	372.3960	21.57	16.86	38.43	46.00	-7.57	peak			
6		656.7602	12.82	22.60	35.42	46.00	-10.58	peak			

Horizontal:

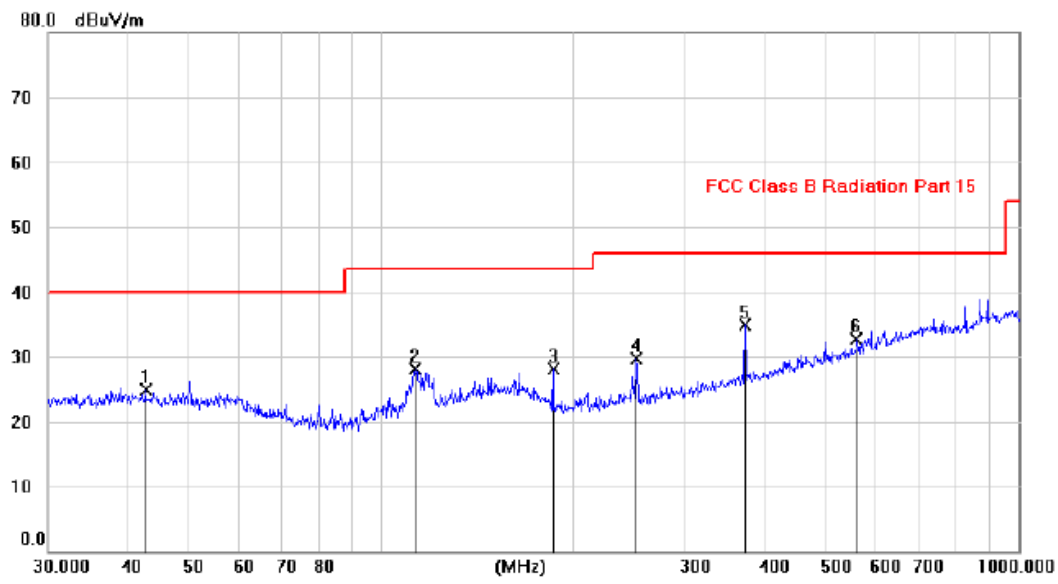

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		42.6897	10.02	14.82	24.84	40.00	-15.16	peak	
2		112.9592	15.14	12.97	28.11	43.50	-15.39	peak	
3		186.1795	15.19	12.97	28.16	43.50	-15.34	peak	
4		251.9744	15.86	13.90	29.76	46.00	-16.24	peak	
5	*	372.3960	17.95	16.86	34.81	46.00	-11.19	peak	
6		558.5343	11.87	20.74	32.61	46.00	-13.39	peak	

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	42.32	V	33.98	10.22	34.25	52.27	74	21.73	PK
4804	32.20	V	33.98	10.22	34.25	42.15	54	11.85	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	42.17	H	33.98	10.22	34.25	52.12	74	21.88	PK
4804	31.54	H	33.98	10.22	34.25	41.49	54	12.51	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	41.93	V	33.98	10.22	34.25	51.88	74	22.12	PK
4882	32.96	V	33.98	10.22	34.25	42.91	54	11.09	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	42.38	H	33.98	10.22	34.25	52.33	74	21.67	PK
4882	32.04	H	33.98	10.22	34.25	41.99	54	12.01	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	42.63	V	33.98	10.22	34.25	52.58	74	21.42	PK
4960	32.86	V	33.98	10.22	34.25	42.81	54	11.19	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.66	H	33.98	10.22	34.25	52.61	74	21.39	PK
4960	31.47	H	33.98	10.22	34.25	41.42	54	12.58	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

From 1G-25GHz

Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	42.50	V	33.98	10.22	34.25	52.45	74	21.55	PK
4804	32.29	V	33.98	10.22	34.25	42.24	54	11.76	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	42.89	H	33.98	10.22	34.25	52.84	74	21.16	PK
4804	31.55	H	33.98	10.22	34.25	41.50	54	12.50	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	42.24	V	33.98	10.22	34.25	52.19	74	21.81	PK
4882	33.00	V	33.98	10.22	34.25	42.95	54	11.05	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	42.63	H	33.98	10.22	34.25	52.58	74	21.42	PK
4882	32.31	H	33.98	10.22	34.25	42.26	54	11.74	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX High									
4960	41.94	V	33.98	10.22	34.25	51.89	74	22.11	PK
4960	32.71	V	33.98	10.22	34.25	42.66	54	11.34	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.81	H	33.98	10.22	34.25	52.76	74	21.24	PK
4960	31.42	H	33.98	10.22	34.25	41.37	54	12.63	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/


Note:

- 1, Result = Read level + Antenna factor + cable loss-Amp factor
- 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: 8DPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	42.16	V	33.98	10.22	34.25	52.11	74	21.89	PK
4804	32.36	V	33.98	10.22	34.25	42.31	54	11.69	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	42.44	H	33.98	10.22	34.25	52.39	74	21.61	PK
4804	31.65	H	33.98	10.22	34.25	41.60	54	12.40	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: 8DPSK TX Mid									
4882	42.69	V	33.98	10.22	34.25	52.64	74	21.36	PK
4882	32.65	V	33.98	10.22	34.25	42.60	54	11.40	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	42.86	H	33.98	10.22	34.25	52.81	74	21.19	PK
4882	31.85	H	33.98	10.22	34.25	41.80	54	12.20	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: 8DPSK TX High									
4960	42.39	V	33.98	10.22	34.25	52.34	74	21.66	PK
4960	32.69	V	33.98	10.22	34.25	42.64	54	11.36	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.59	H	33.98	10.22	34.25	52.54	74	21.46	PK
4960	32.23	H	33.98	10.22	34.25	42.18	54	11.82	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

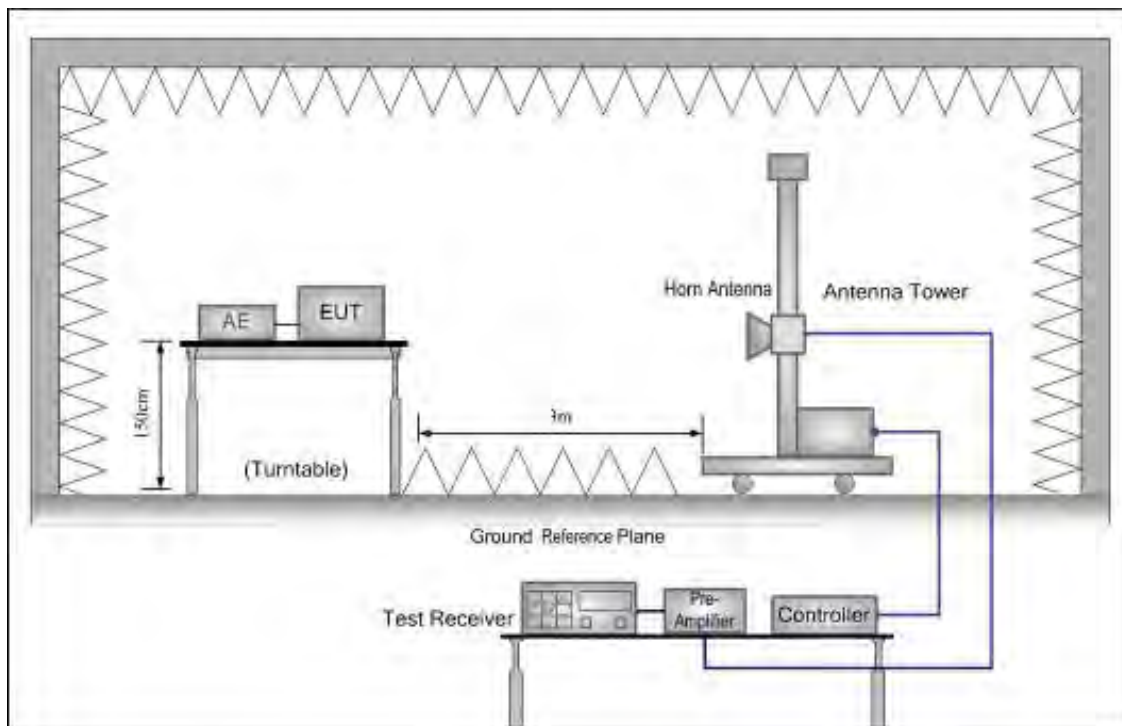

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure


All restriction band and non- restriction band have been tested , only worse case is reported.

9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

Polarization: Vertical

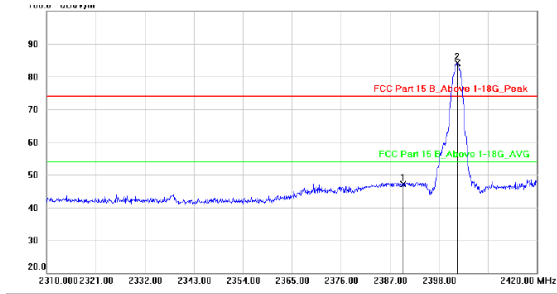

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	2390.000	50.51	-3.40	47.11	74.00	-26.89	peak		
2 *	2402.180	87.51	-3.41	84.10	74.00	10.10	peak		


Polarization: Horizontal

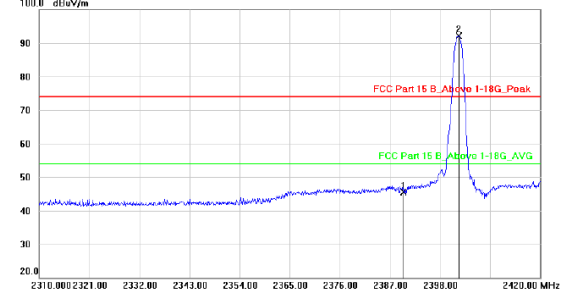

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	2390.000	48.95	-3.40	45.55	74.00	-28.45	peak		
2 *	2402.180	95.43	-3.41	92.02	74.00	18.02	peak		


Test Mode: GFSK-High Hopping-off

Polarization: Vertical

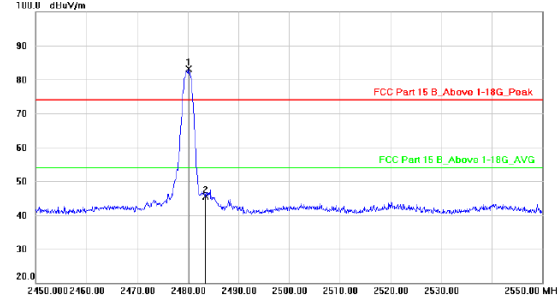

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	2480.200	86.40	-3.38	83.02	74.00	9.02	peak		
2	2483.500	48.86	-3.38	45.48	74.00	-28.52	peak		

Polarization: Horizontal

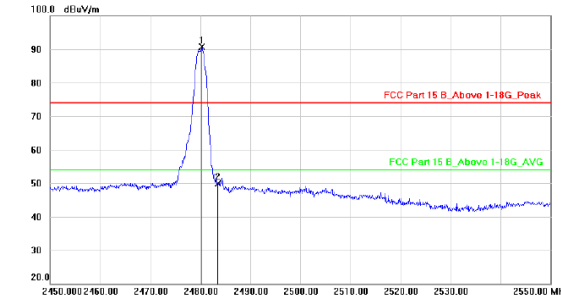


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	2480.300	94.10	-3.38	90.72	74.00	16.72	peak		
2	2483.500	53.32	-3.38	49.94	74.00	-24.06	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: GFSK-Low Hopping-on

Polarization: Vertical

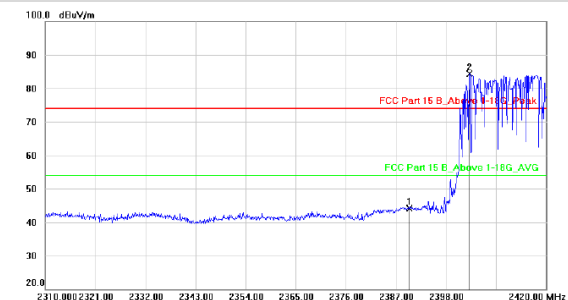

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	47.47	-3.40	44.07	74.00	-29.93	peak		
2	*	2403.170	87.68	-3.41	84.27	74.00	10.27	peak		


Polarization: Horizontal

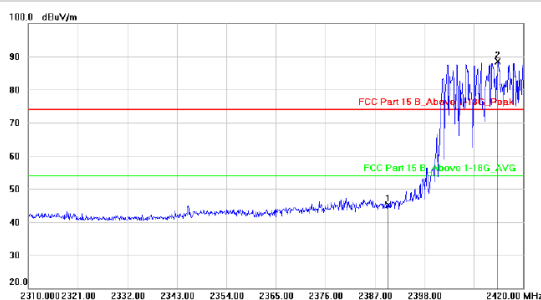

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	48.46	-3.40	45.06	74.00	-28.94	peak		
2	*	2414.390	91.84	-3.41	88.43	74.00	14.43	peak		


Test Mode: GFSK-High Hopping-on

Polarization: Vertical

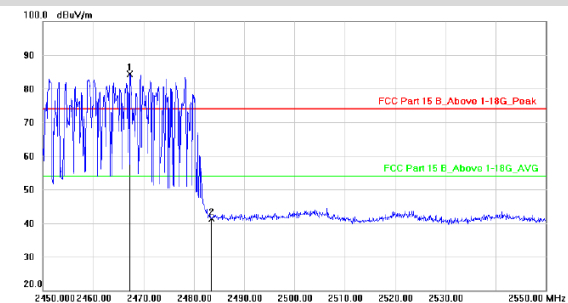

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2467.300	87.75	-3.39	84.36	74.00	10.36	peak		
2	*	2483.500	44.76	-3.38	41.38	74.00	-32.62	peak		

Polarization: Horizontal

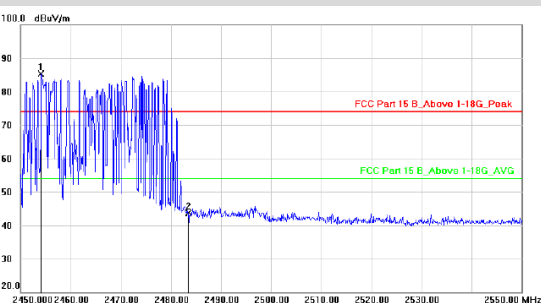


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2454.100	88.78	-3.39	85.39	74.00	11.39	peak		
2	*	2483.500	47.17	-3.38	43.79	74.00	-30.21	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: $\pi/4$ DQPSK-Low Hopping-off

Polarization: Vertical

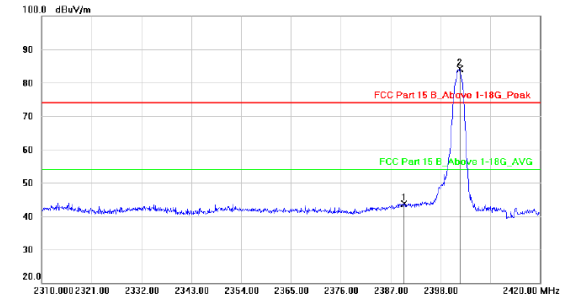

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	47.11	-3.40	43.71	74.00	-30.29	peak		
2	*	2402.290	87.48	-3.41	84.07	74.00	10.07	peak		


Polarization: Horizontal

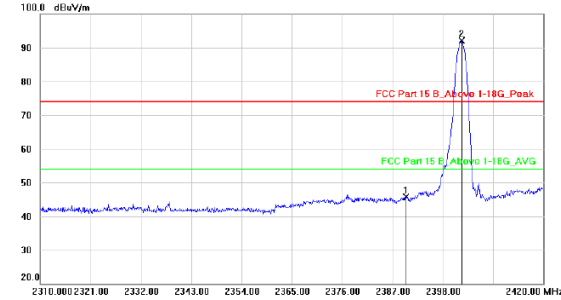

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	49.18	-3.40	45.78	74.00	-28.22	peak		
2	*	2402.180	95.42	-3.41	92.01	74.00	18.01	peak		


Test Mode: $\pi/4$ DQPSK-High Hopping-off

Polarization: Vertical

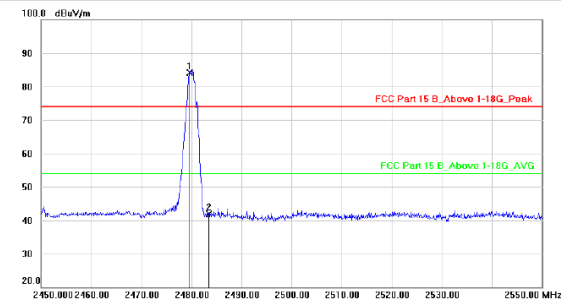

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2479.600	87.42	-3.38	84.04	74.00	10.04	peak		
2		2483.500	45.21	-3.38	41.83	74.00	-32.17	peak		

Polarization: Horizontal

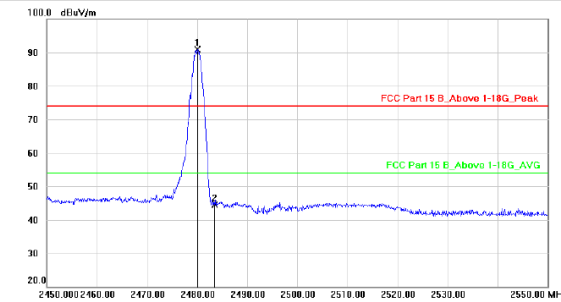


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.000	94.32	-3.38	90.94	74.00	16.94	peak		
2		2483.500	47.86	-3.38	44.48	74.00	-29.52	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: $\pi/4$ DQPSK-Low Hopping-on

Polarization: Vertical

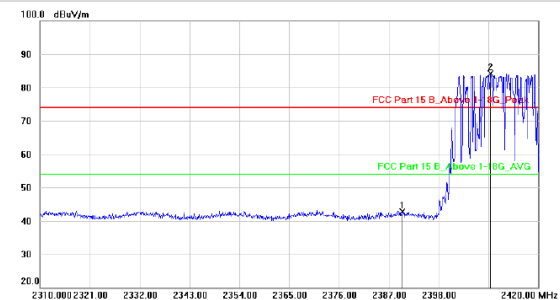

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	46.07	-3.40	42.67	74.00	-31.33	peak		
2	*	2409.550	87.56	-3.40	84.16	74.00	10.16	peak		


Polarization: Horizontal

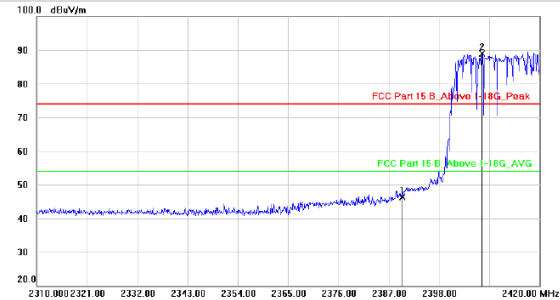

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	49.79	-3.40	46.39	74.00	-27.61	peak		
2	*	2407.460	92.25	-3.40	88.85	74.00	14.85	peak		


Test Mode: $\pi/4$ DQPSK-High Hopping-on

Polarization: Vertical

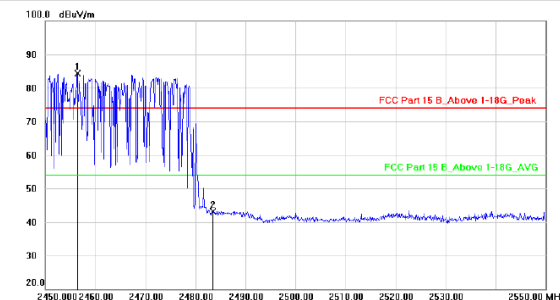

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2456.400	87.72	-3.39	84.33	74.00	10.33	peak		
2	*	2483.500	46.42	-3.38	43.04	74.00	-30.96	peak		

Polarization: Horizontal

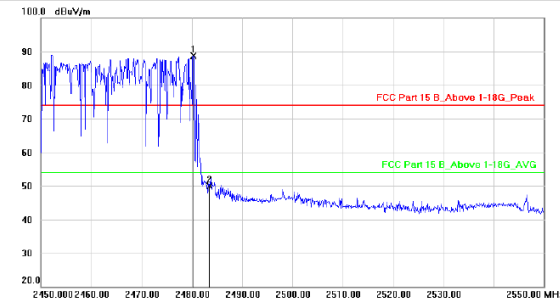


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.300	92.14	-3.38	88.76	74.00	14.76	peak		
2	*	2483.500	53.24	-3.38	49.86	74.00	-24.14	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: 8DPSK-Low Hopping-off

Polarization: Vertical

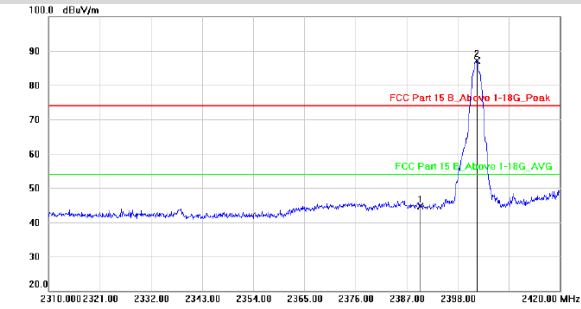

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	48.01	-3.40	44.61	74.00	-29.39	peak		
2	*	2402.180	90.51	-3.41	87.10	74.00	13.10	peak		


Polarization: Horizontal

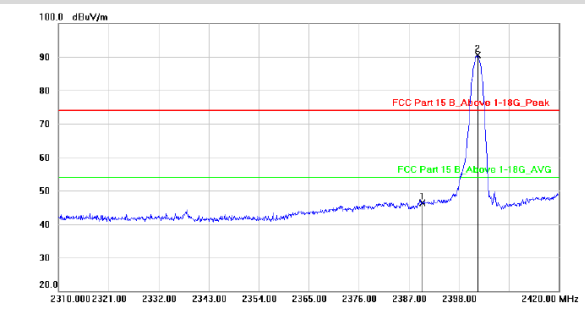

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	49.68	-3.40	46.28	74.00	-27.72	peak		
2	*	2402.180	93.92	-3.41	90.51	74.00	16.51	peak		


Test Mode: 8DPSK-High Hopping-off

Polarization: Vertical

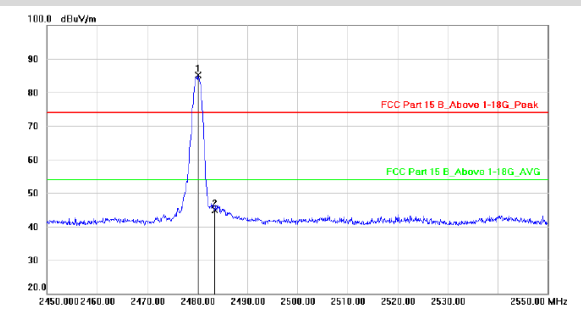

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.200	88.40	-3.38	85.02	74.00	11.02	peak		
2		2483.500	48.36	-3.38	44.98	74.00	-29.02	peak		

Polarization: Horizontal

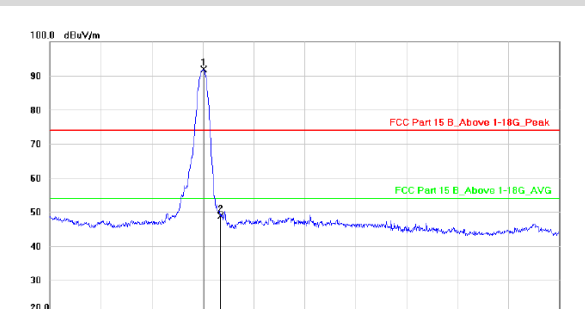


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.200	95.25	-3.38	91.87	74.00	17.87	peak		
2		2483.500	52.32	-3.38	48.94	74.00	-25.06	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Test Mode: 8DPSK-Low Hopping-on

Polarization: Vertical

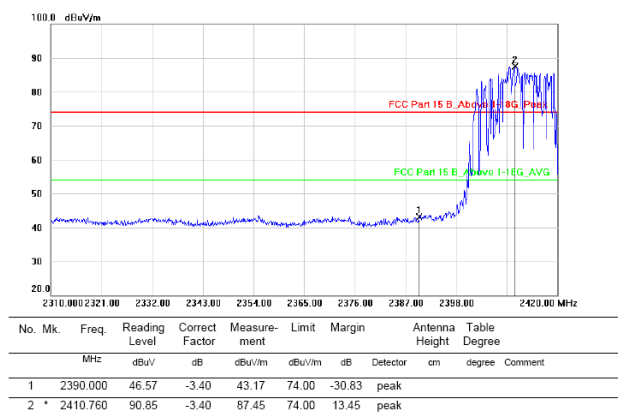


Polarization: Horizontal

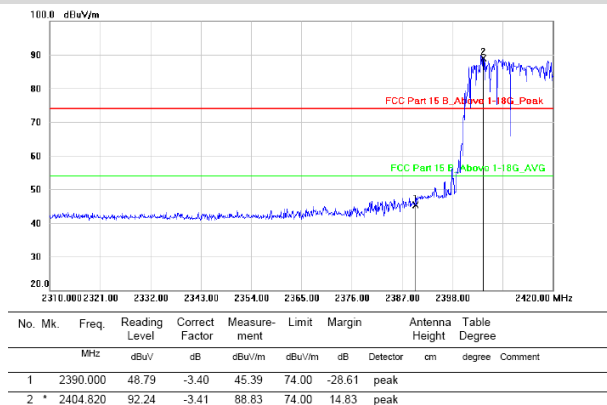


Test Mode: 8DPSK-High Hopping-on

Polarization: Vertical

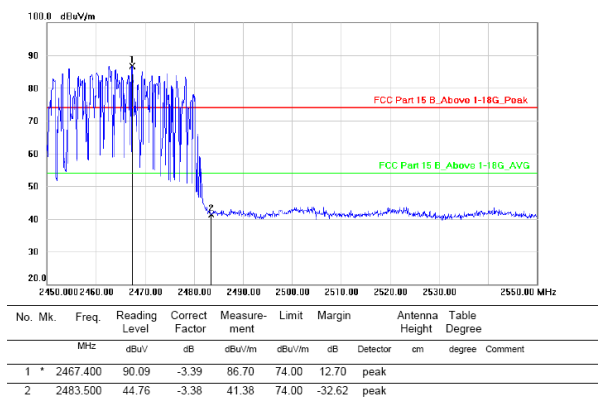

Polarization: Horizontal

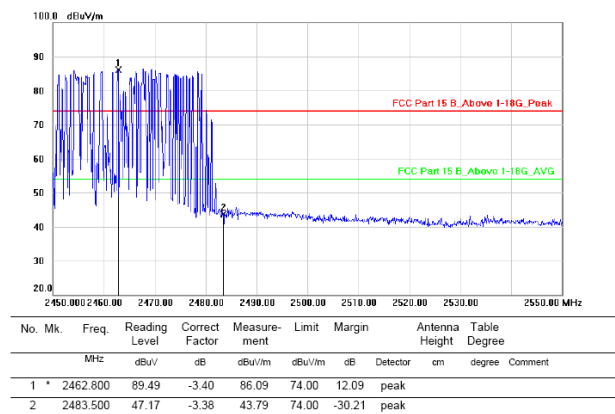


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method

GFSK Mode:

Test channel: Lowest channel

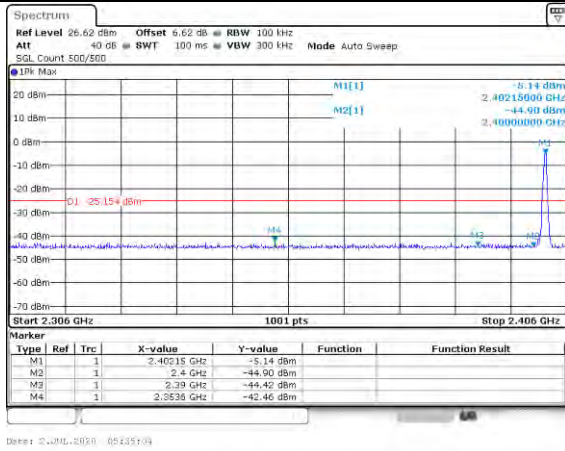


No-hopping mode

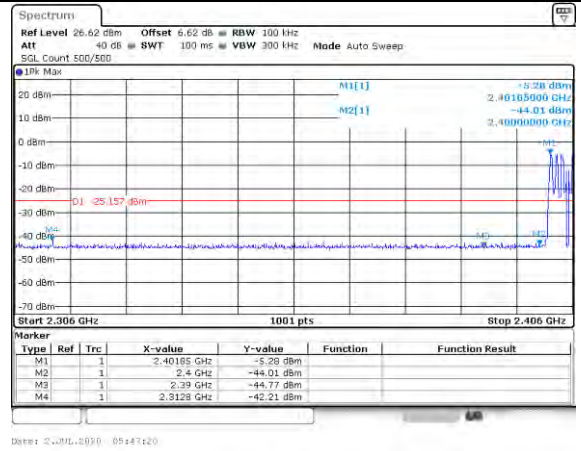


Hopping mode

Test channel: Highest channel

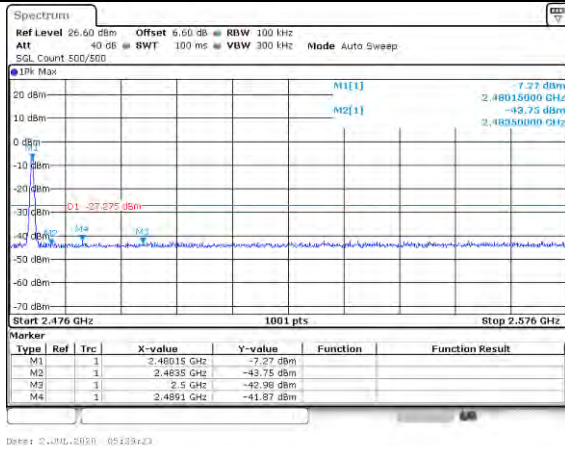


No-hopping mode

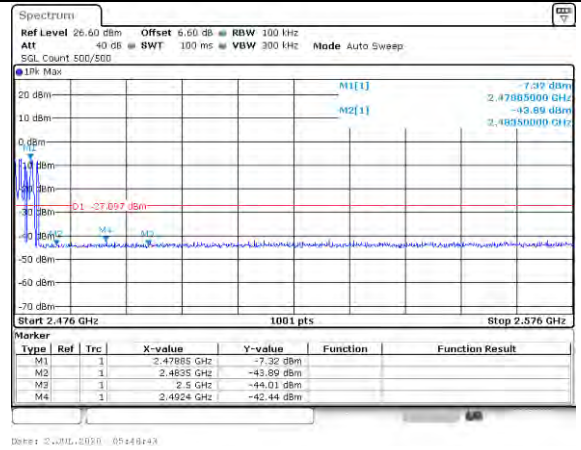


Hopping mode

π /4DQPSK Mode:

Test channel: Lowest channel

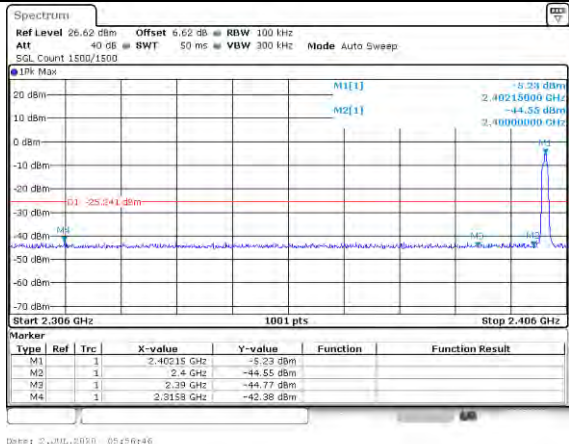


No-hopping mode

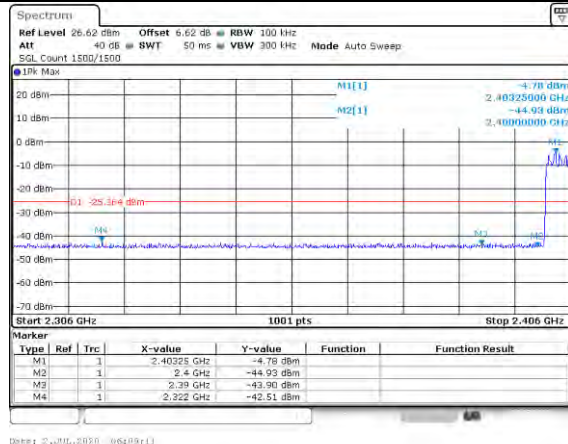


Hopping mode

Test channel: Highest channel

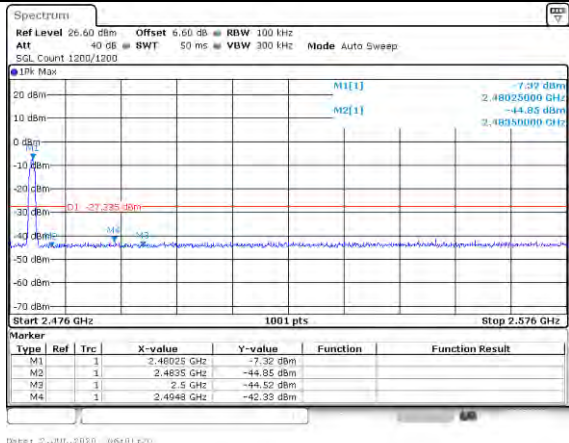


No-hopping mode

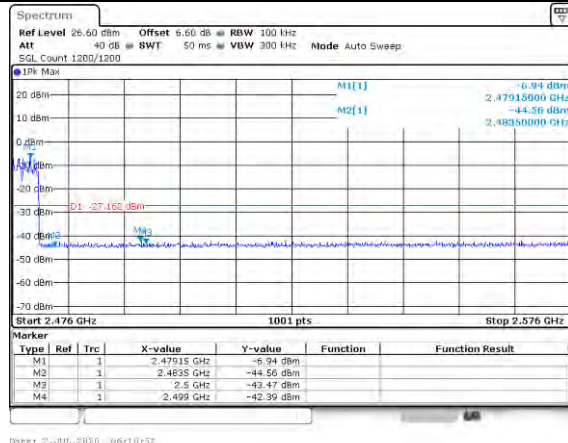


Hopping mode

8DPSK Mode:

Test channel: Lowest channel

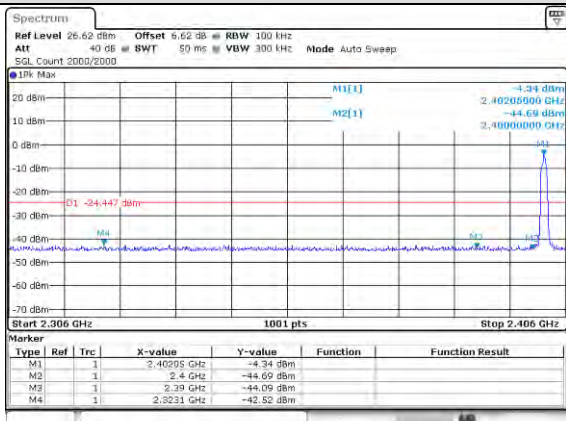


No-hopping mode

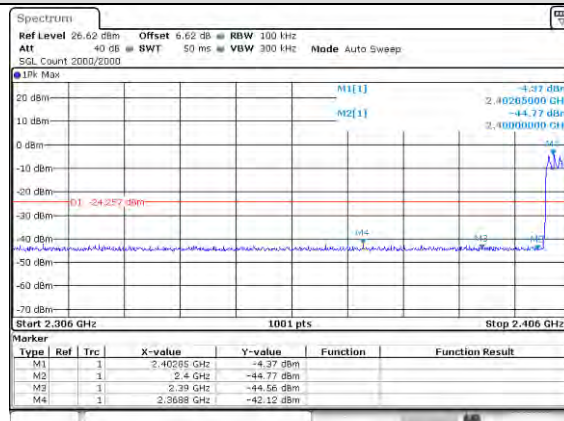


Hopping mode

Test channel: Highest channel

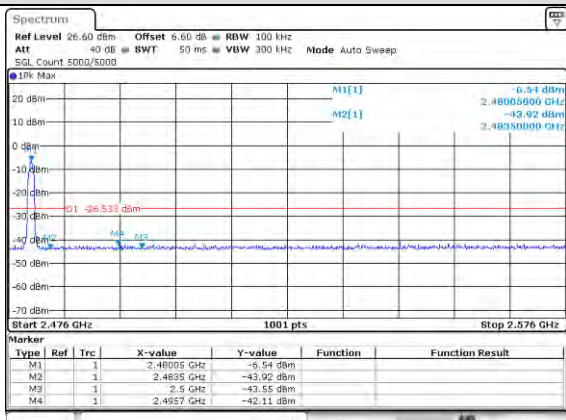


No-hopping mode

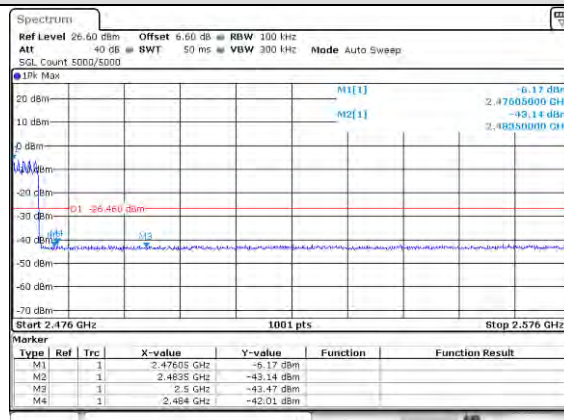

Hopping mode

10. POWER LINE CONDUCTED EMISSIONS

10.1. Block Diagram of Test Setup

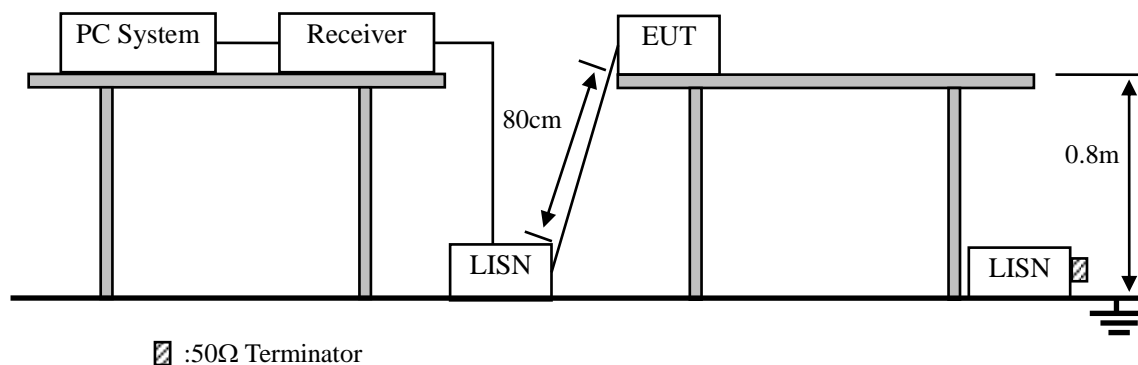

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

PASS. (See below detailed test data)


Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

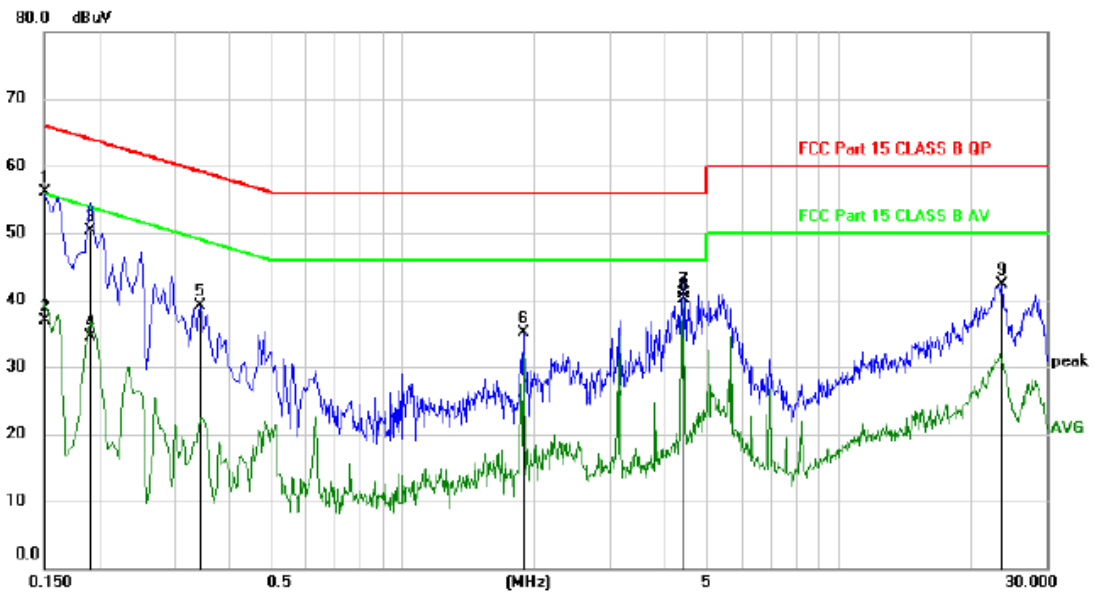

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	46.17	9.94	56.11	66.00	-9.89	QP	
2		0.1500	26.93	9.94	36.87	56.00	-19.13	AVG	
3		0.1920	40.35	9.92	50.27	63.95	-13.68	QP	
4		0.1920	24.51	9.92	34.43	53.95	-19.52	AVG	
5		0.3420	29.15	9.95	39.10	59.15	-20.05	peak	
6		1.8900	25.15	9.88	35.03	56.00	-20.97	peak	
7		4.4160	30.90	10.00	40.90	56.00	-15.10	QP	
8	*	4.4160	30.05	10.00	40.05	46.00	-5.95	AVG	
9		23.6400	31.78	10.45	42.23	60.00	-17.77	peak	

Neutral:

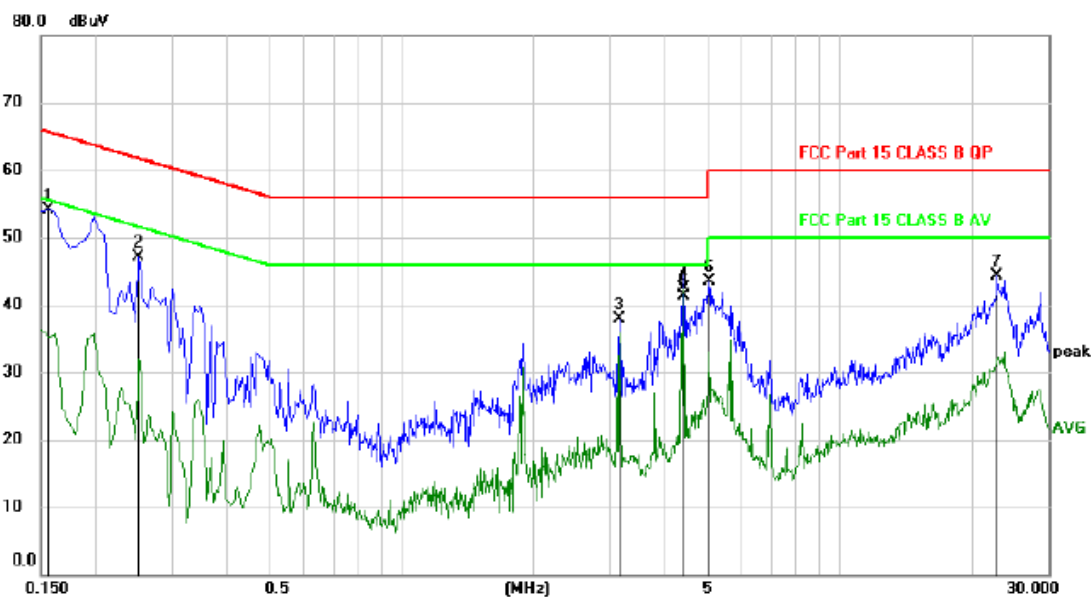

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1560	44.26	9.94	54.20	65.67	-11.47	peak	
2		0.2519	37.20	9.97	47.17	61.69	-14.52	peak	
3		3.1560	27.99	9.96	37.95	56.00	-18.05	peak	
4		4.4160	32.46	10.00	42.46	56.00	-13.54	QP	
5	*	4.4160	31.29	10.00	41.29	46.00	-4.71	AVG	
6		5.0460	33.53	10.04	43.57	60.00	-16.43	peak	
7		23.0100	33.77	10.45	44.22	60.00	-15.78	peak	

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

11.ANTENNA REQUIREMENTS

11.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Result


The EUT antenna is PCB Antenna. It complies with the standard requirement.

12. TEST SETUP PHOTO

12.1. Photos of Radiated emission

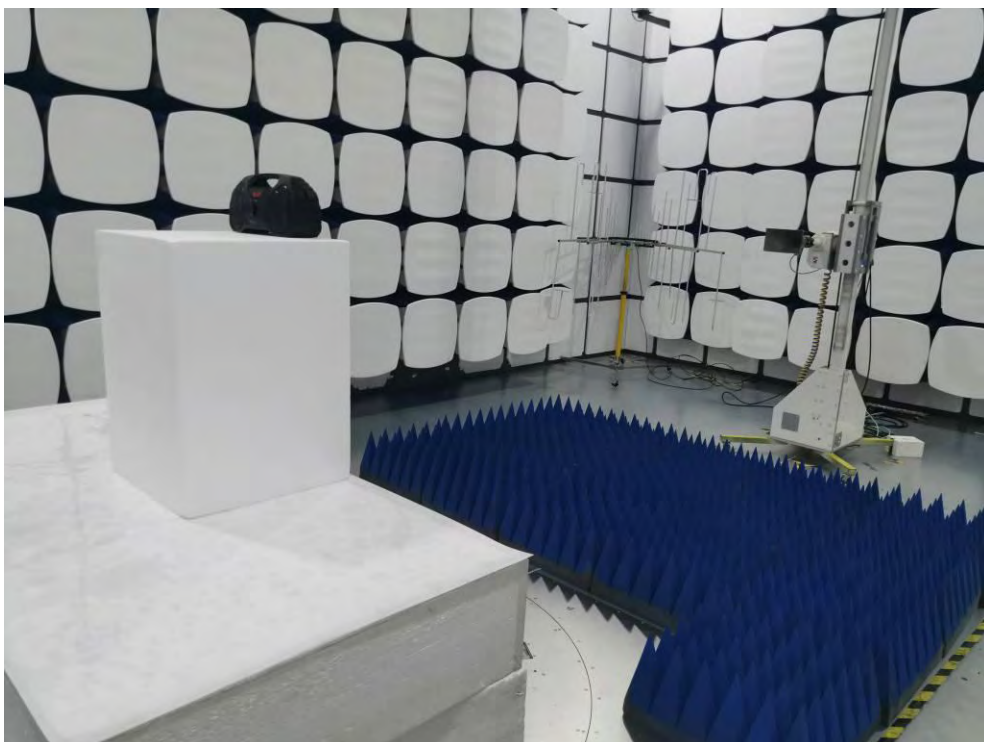


12.2.Photos of Conducted Emission test

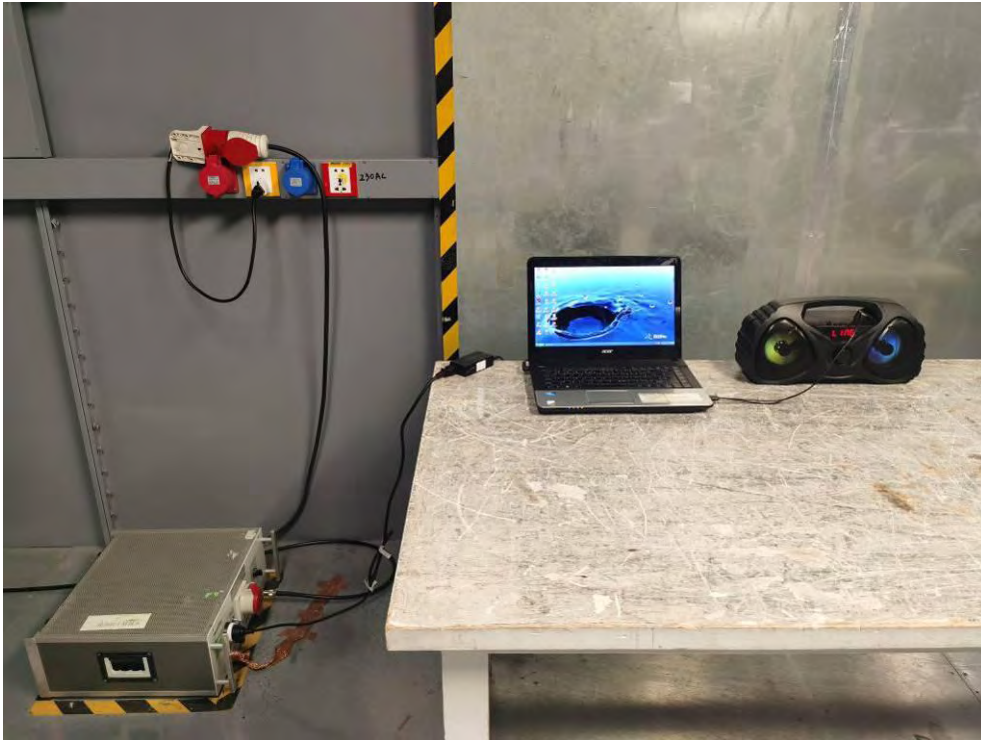



13. PHOTOS OF EUT






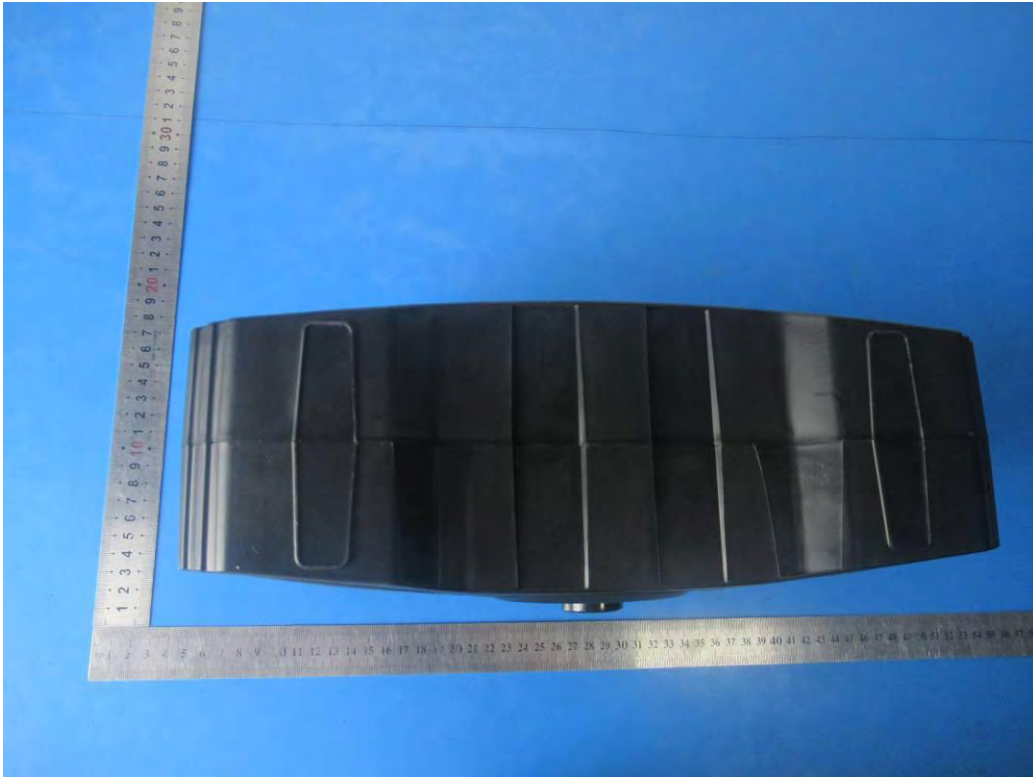








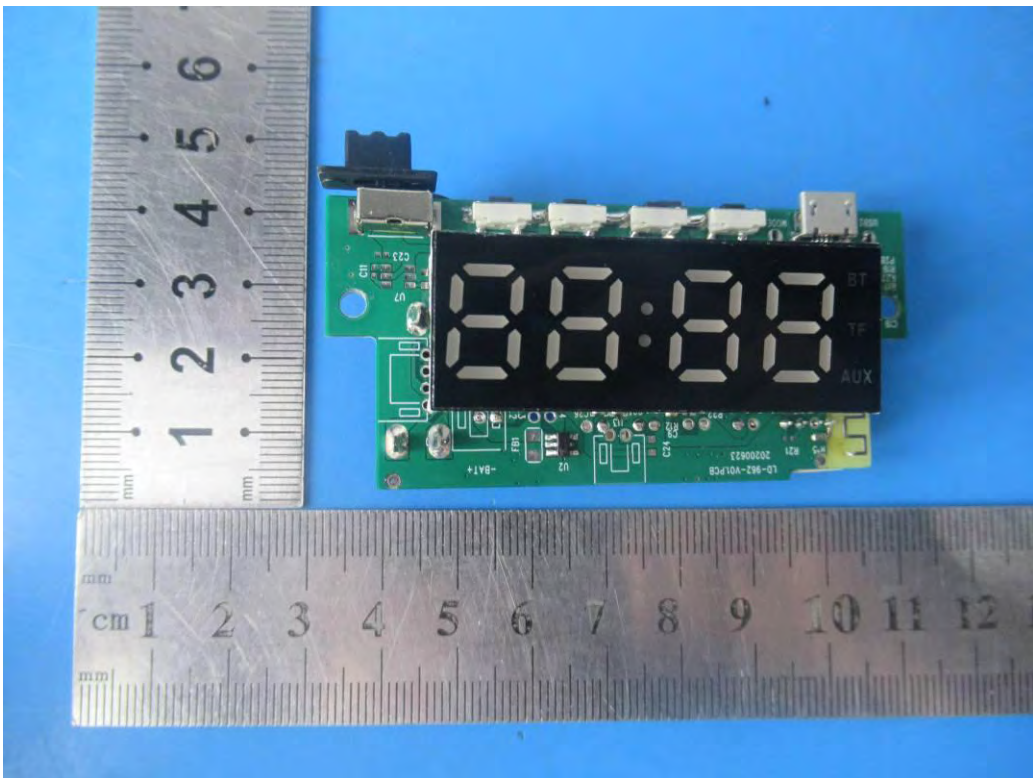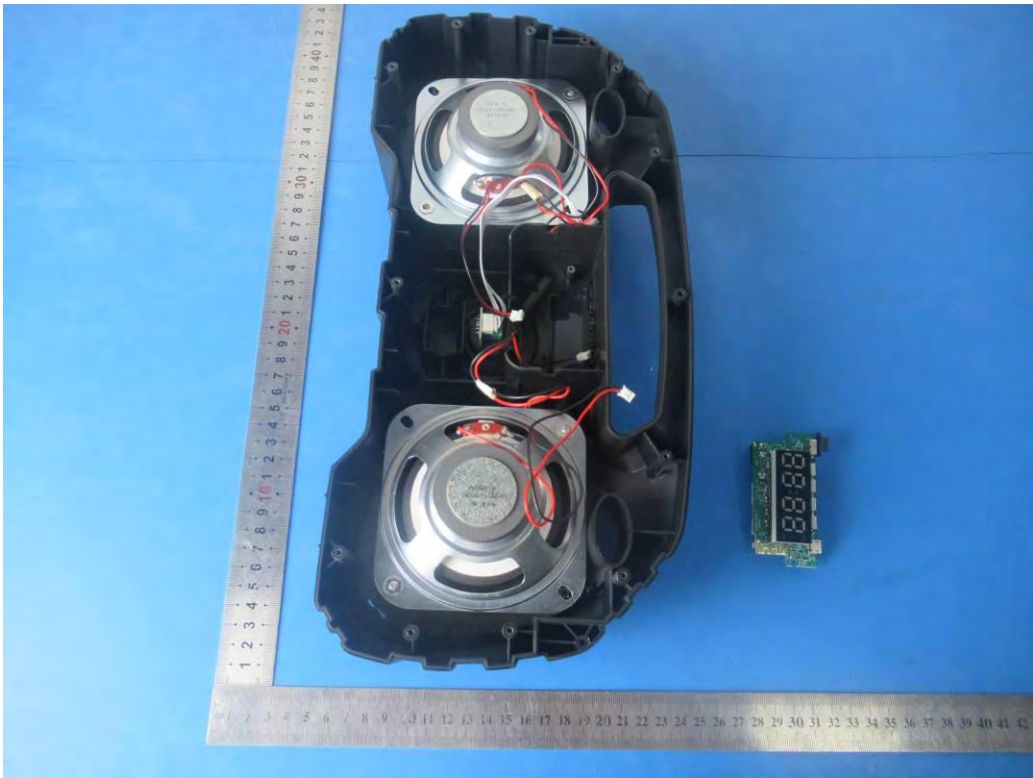

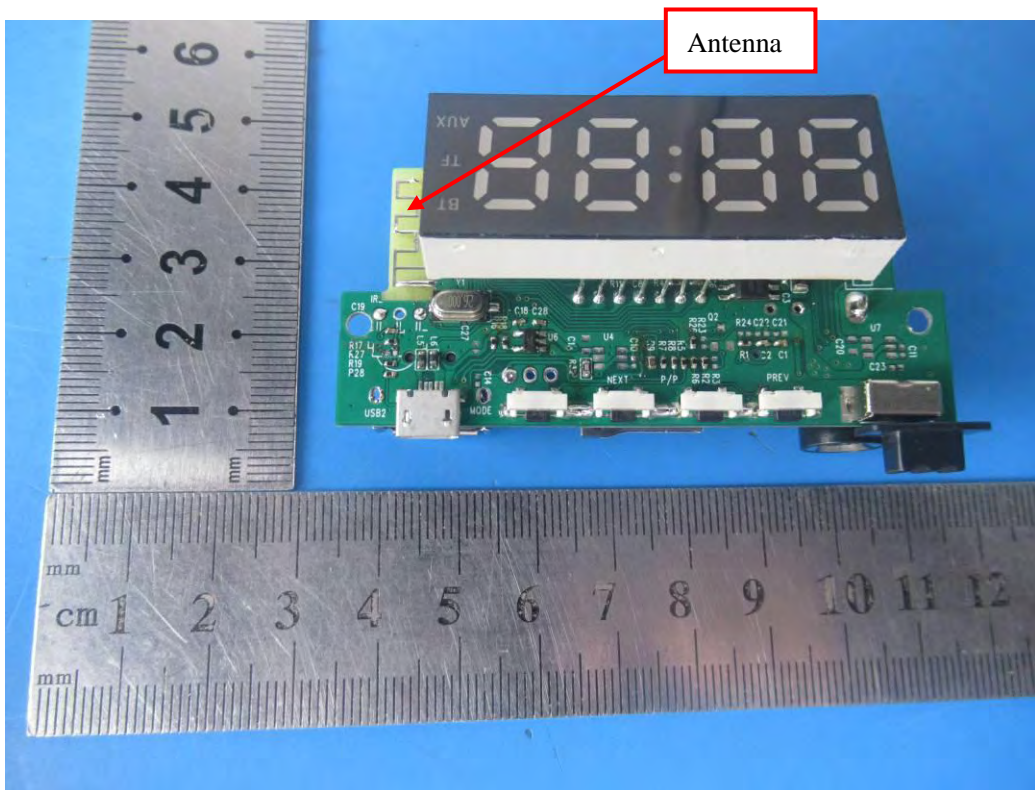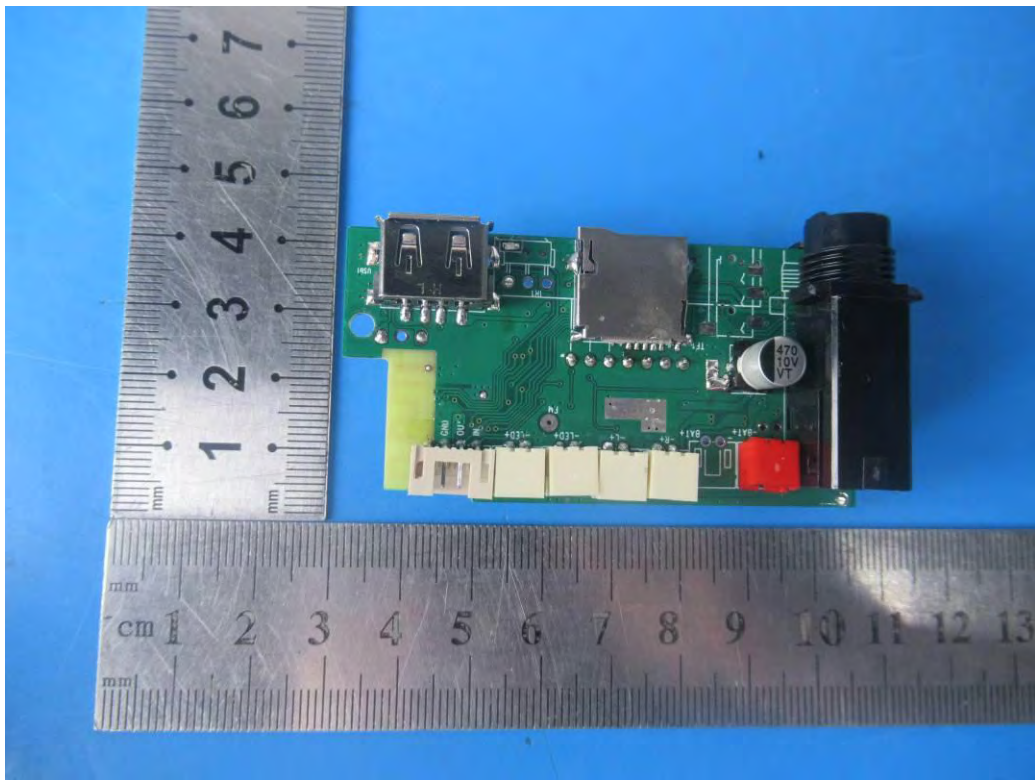

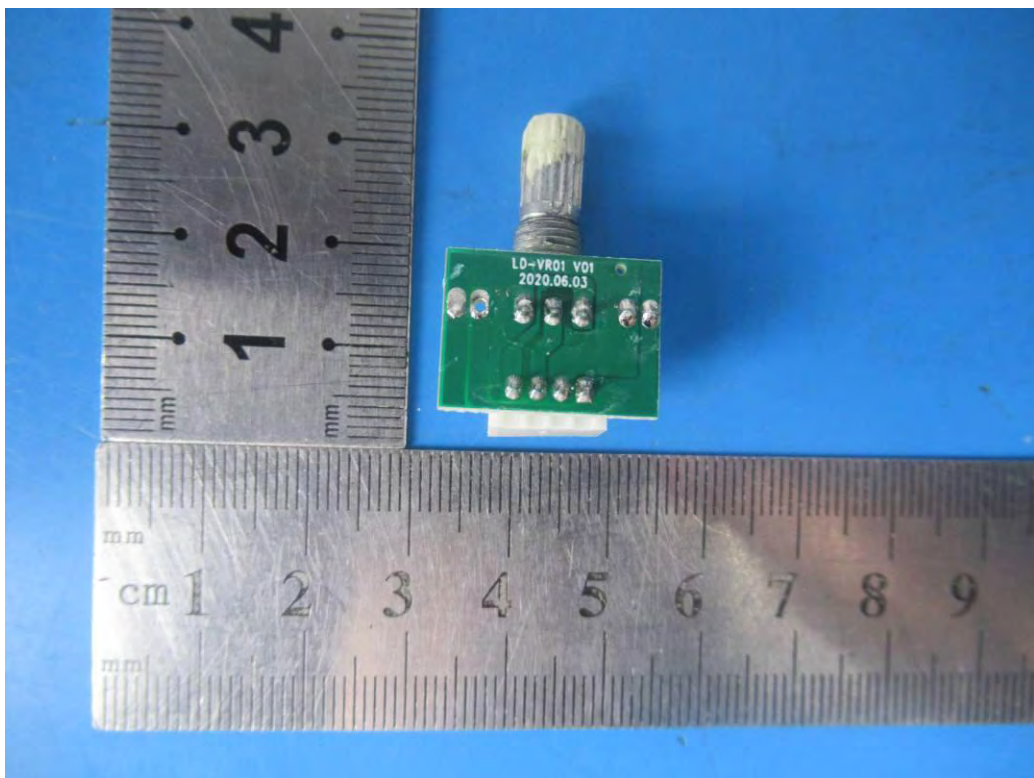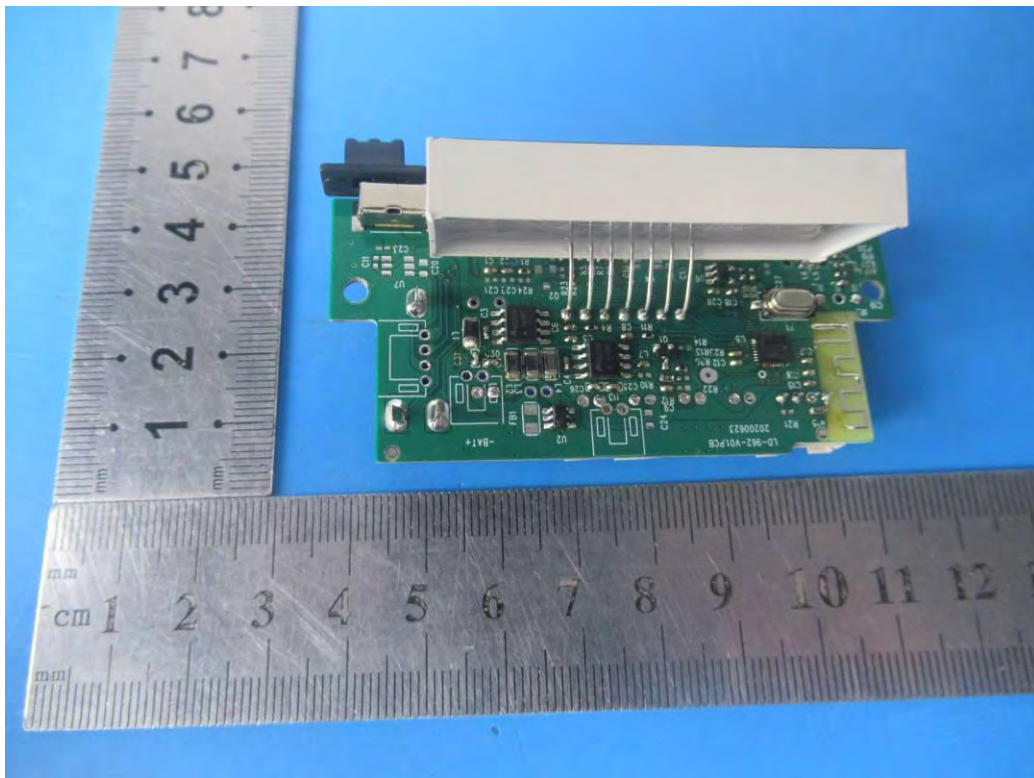

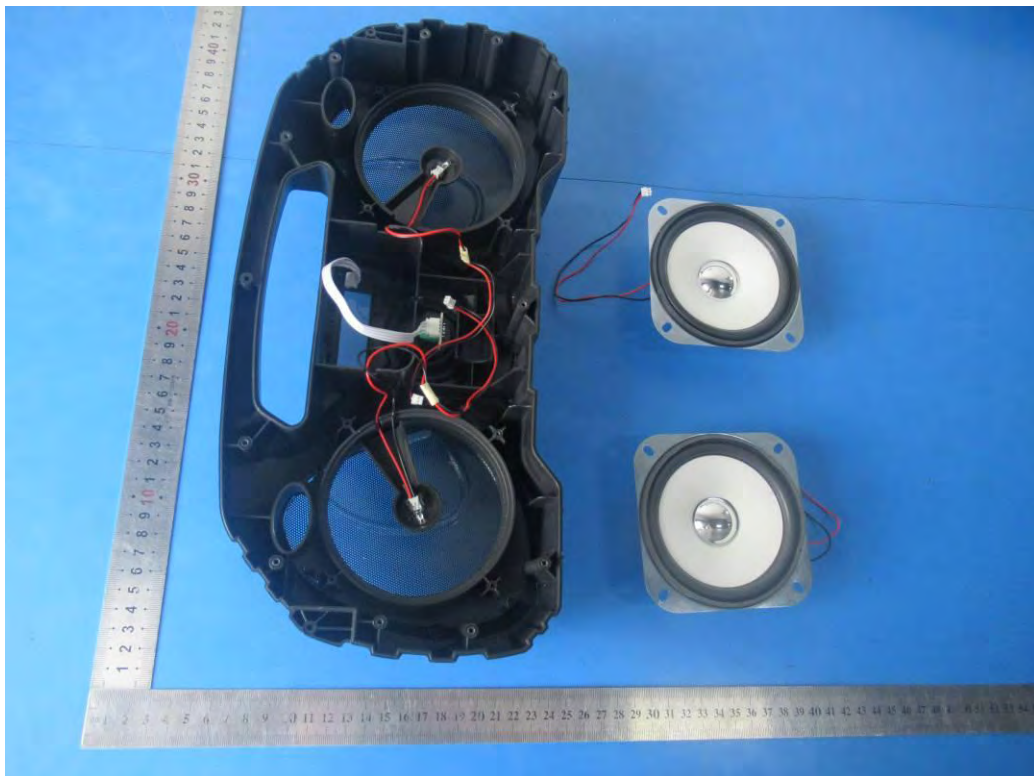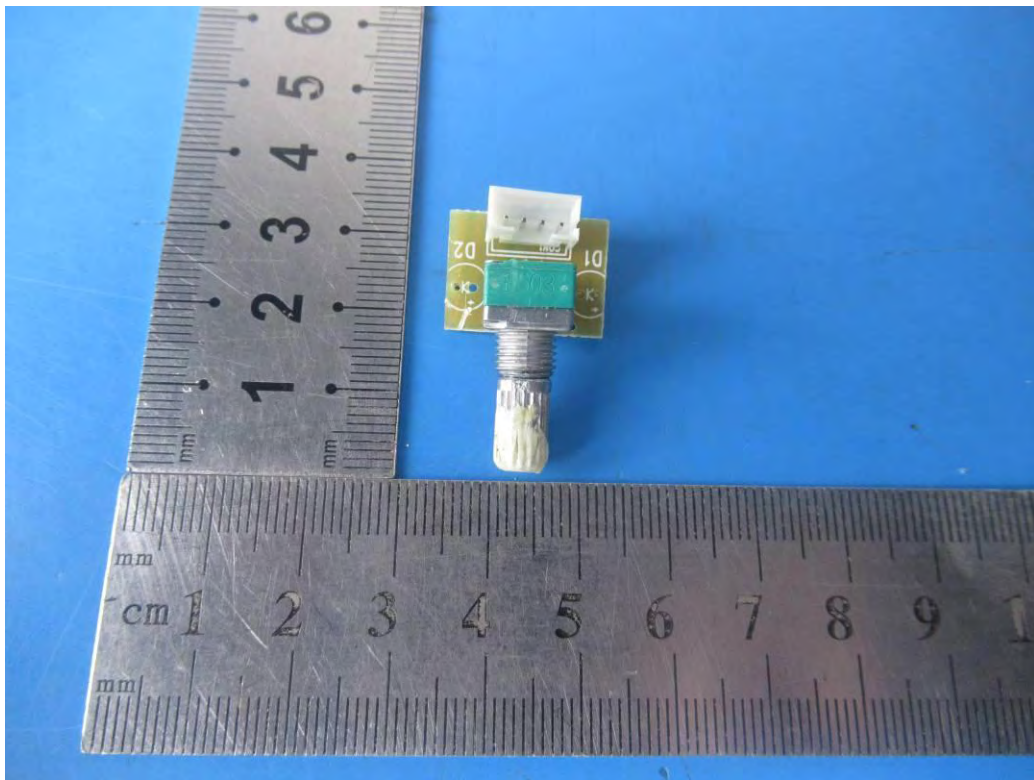



-----THE END OF REPORT-----