

FCC RADIO TEST REPORT

FCC ID: 2ANXU-T400D

Product : Fully Automatic Turntable with Bluetooth Transmittor

Trade Name : Crosley

Model Name : T400D-GW
T400D-NA, T400D-XX (Where xxxxx denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers)

Serial Model :

Report No. : UNIA2018113012-1FR-01

Prepared for

Shenzhen Jiayingink Technology Holding Company Limited
No.11,11-1, Anye Road, Anliang village, Yuanshan Town, Longgang District,
Shenzhen, China

Prepared by

Shenzhen United Testing Technology Co., Ltd.
2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name : **Shenzhen Jiaying Technology Holding Company Limited**

Address : No.11,11-1, Anye Road, Anliang village, Yuanshan Town,
Longgang District, Shenzhen, China

Manufacture's Name : **Shenzhen Jiaying Technology Holding Company Limited**

Address : No.11,11-1, Anye Road, Anliang village, Yuanshan Town,
Longgang District, Shenzhen, China

Product description

Product name : Fully Automatic Turntable with Bluetooth Transmittor

Trade Mark : Crosley

Model and/or type reference : T400D-GW

Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : Nov. 15, 2018 ~Nov. 25, 2018

Date of Issue..... : Nov. 26, 2018

Test Result..... : Pass

Prepared by:

Reviewer:

Approved & Authorized Signer:

Liuze/Manager

Table of Contents

Page

11. TEST SUMMARY	5
22. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 Carrier Frequency of Channels	7
2.3 Operation of EUT during testing	7
2.4 DESCRIPTION OF TEST SETUP	7
2.5 MEASUREMENT INSTRUMENTS LIST	8
33. CONDUCTED EMISSIONS TEST	9
3.1 Conducted Power Line Emission Limit	9
3.2 Test Setup	9
3.3 Test Procedure	9
3.4 Test Result	9
4. RADIATED EMISSION TEST	16
4.1 Radiation Limit	16
4.2 Test Setup	16
4.3 Test Procedure	17
4.4 Test Result	17
5. BAND EDGE	27
5.1 Limits	27
5.2 Test Procedure	27
5.3 Test Result	27
6. OCCUPIED BANDWIDTH MEASUREMENT	30
6.1 Test Setup	30
6.2 Test Procedure	30
6.3 Measurement Equipment Used	30
6.4 Test Result	30
7. MAXIMUM PEAK OUTPUT POWER	35
7.1 Test Setup	35
7.2 Test Procedure	35
7.3 Limit	35
7.4 Test Result	35
8. FREQUENCY SEPARATION	36
8.1 Test Setup	36
8.2 Test Procedure	36
8.3 Limit	36

Table of Contents

Page

8.4 Test Result	36
9. CONDUCTED BANDEGE MEASUREMENT	41
9.1 Test Setup	41
9.2 Test Procedure	41
9.3 Limit	41
9.4 Test Result	41
10. SPURIOUS RF CONDUCTED EMISSION	46
10.1 Test Limit	46
10.2 Test Procedure	46
10.3 Test Setup	46
10.4 Test Result	46
11. NUMBER OF HOPPING FREQUENCY	52
11.1 Test Limit	52
11.2 Test Procedure	52
11.3 Test Setup	52
11.4 Test Result	52
12. TIME OF OCCUPANCY(DWELL TIME)	54
12.1 Test Limit	54
12.2 Test Procedure	54
12.3 Test Setup	54
12.4 Test Result	54
13. PSEUDORANDOM FREQUENCY HPPPING SEQUENCE	59
For 47 CFR Part 15C section 15.247 (a)(1) requirement	59
14. ANTENNA REQUIREMENT	60
15. PHOTOGRAPH OF TEST	61

11. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
MAXIMUM PEAK OUTPUT POWER	COMPLIANT
FREQUENCY SEPARATION	COMPLIANT
CONDUCTED BANDEGE MEASUREMENT	COMPLIANT
SPURIOUS RF CONDUCTED EMISSION	COMPLIANT
NUMBER OF HOPPING FREQUENCY	COMPLIANT
TIME OF OCCUPANCY(DWELL TIME)	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.
 Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L6494

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

Designation Number: CN1227

Test Firm Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files.

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

22. GENERAL INFORMATION

2.1 2.1GENERAL DESCRIPTION OF EUT

Equipment	Fully Automatic Turntable with Bluetooth Transmittor
Trade Mark	Crosley
Model Name	T400D-GW
Serial No.	T400D-NA, T400D-XX
Model Difference	(Where xxxxx denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers)
FCC ID	2ANXU-T400D
Antenna Type	PCB Antenna
Antenna Gain	0dBi
Frequency Range	2402-2480MHz
Number of Channels	79CH
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Power Source	DC 12V from adapter with AC 120V/60Hz
Adapter 1 Model	M/N: GKYP50020120UL1 Input: AC 100-240V~50/60Hz 0.5A Max Output: DC 12V/200mA
Adapter 2 Model	M/N: JS018SPS-120020U Input: AC 100-240V~50/60Hz 0.2A Max Output: DC 12V/0.2A
Adapter 3 Model	M/N: LY006SPS-120020UH Input: AC 100-240V~50/60Hz 0.2A Max Output: DC 12V/200mA

Note:

Table for auxiliary equipment:

Equipment Description	Manufacturer	Model	Calibration Due Date
N/A	N/A	N/A	N/A

2.2 Carrier Frequency of Channels

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	21	2423	42	2444	63	2465
01	2403	22	2424	43	2445	64	2466
02	2404	23	2425	44	2446	65	2467
03	2405	24	2426	45	2447	66	2468
04	2406	25	2427	46	2448	67	2469
05	2407	26	2428	47	2449	68	2470
06	2408	27	2429	48	2450	69	2471
07	2409	28	2430	49	2451	70	2472
08	2410	29	2431	50	2452	71	2473
09	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460		
17	2419	38	2440	59	2461		
18	2420	39	2441	60	2462		
19	2421	40	2442	61	2463		
20	2422	41	2443	62	2464		

2.3 Operation of EUT during testing

Operating Mode

The mode is used: Transmitting mode

Low Channel: 2402MHz


Middle Channel: 2441MHz

High Channel: 2480MHz


Test SW Version: Bluetooth MP Tool

2.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:



Operation of EUT during Radiation testing:



2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
CONDUCTED EMISSIONS TEST					
1	AMN	Schwarzbeck	NNLK8121	8121370	2019.9.9
2	AMN	ETS	3810/2	00020199	2019.9.9
3	EMI TEST RECEIVER	Rohde&Schwarz	ESCI	101210	2019.9.9
4	AAN	TESEQ	T8-Cat6	38888	2019.9.9
RADIATED EMISSION TEST					
1	Horn Antenna	Sunol	DRH-118	A101415	2019.9.29
2	BicoNILog Antenna	Sunol	JB1 Antenna	A090215	2019.9.29
3	PREAMP	HP	8449B	3008A00160	2019.9.9
4	PREAMP	HP	8447D	2944A07999	2019.9.9
5	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2019.9.9
6	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2019.9.28
7	Signal Generator	Agilent	E4421B	MY4335105	2019.9.28
8	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2019.9.28
9	MXA Signal Analyzer	Agilent	N9020A	MY51110104	2019.9.9
10	ANT Tower&Turn table Controller	Champro	EM 1000	60764	2019.9.28
11	Anechoic Chamber	Taihe Maorui	9m*6m*6m	966A0001	2019.9.9
12	Shielding Room	Taihe Maorui	6.4m*4m*3m	643A0001	2019.9.9
13	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2019.3.14
14	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2019.3.14
15	RF power divider	Anritsu	K241B	992289	2019.9.28
16	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2019.9.28
17	Biconical antenna	Schwarzbeck	VHA 9103	91032360	2019.9.8
18	Biconical antenna	Schwarzbeck	VHA 9103	91032361	2019.9.8
19	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2019.9.8
20	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2019.1.12
21	Active Receive Loop Antenna	Schwarzbeck	FMZB 1919B	00023	2019.11.02
22	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170651	2019.03.14
23	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2019.10.24
24	Active Loop Antenna	Com-Power	AL-130R	10160009	2019.05.10
25	Power Meter	KEYSIGHT	N1911A	MY50520168	2019.05.10
26	Frequency Meter	VICTOR	VC2000	997406086	2019.05.10
27	DC Power Source	HYELEC	HY5020E	055161818	2019.05.10
Test software					
1	E3	XINHUA	6.101223a	N/A	N/A

33. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage(dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

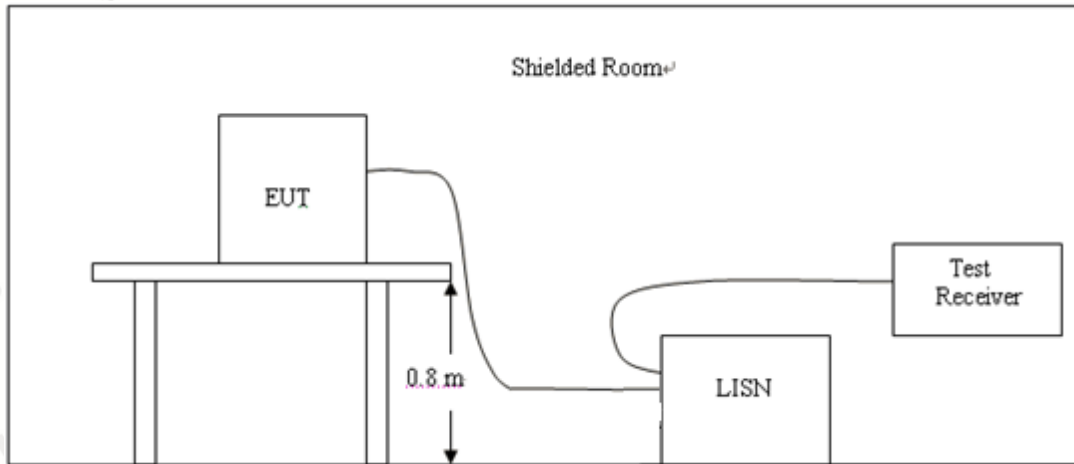

3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver, scanned from 150 KHz to 30MHz for emissions in each of the test modes.

3.4 Test Result


Pass

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes of Low, Middle, and High channel were tested, only the worst result of High Channel was reported as below:

(Adapter 1:GKYPS0020120UL1)

Temperature:	26°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of GFSK 2480MHz		

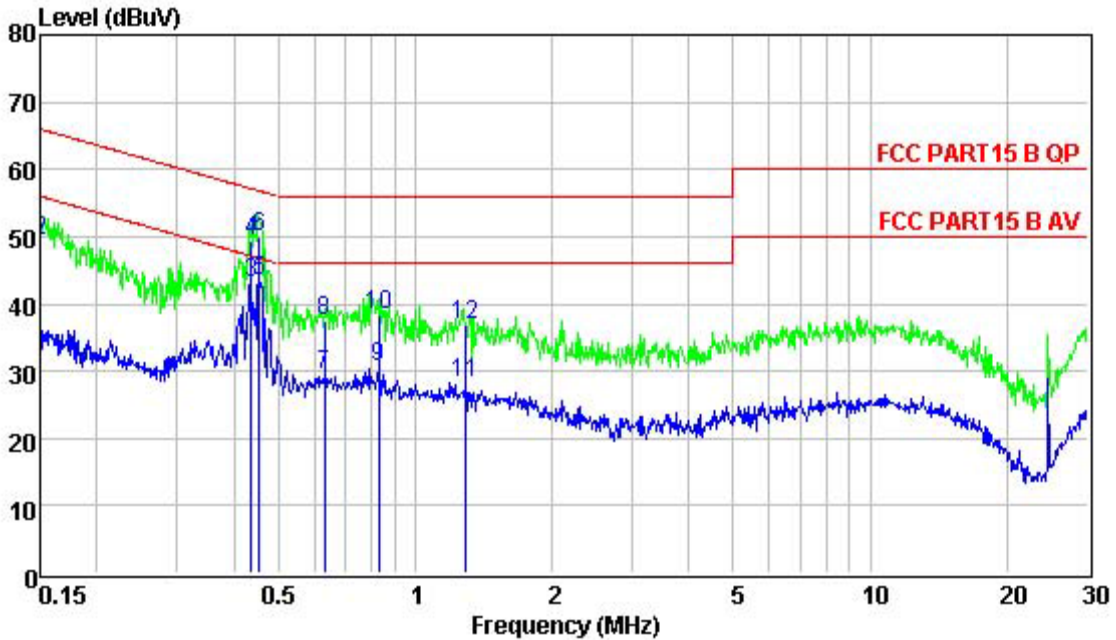


	Freq	Level	Limit	LISN	Cable	Over	Remark
	MHz	dBuV	dBuV	dB	dB	dB	
1	0.150	36.71	56.00	9.70	0.24	-19.29	Average
2	0.150	49.30	66.00	9.70	0.24	-16.70	QP
3	0.437	43.17	47.11	9.59	0.25	-3.94	Average
4	0.437	49.25	57.11	9.59	0.25	-7.86	QP
5	0.454	43.43	46.80	9.59	0.25	-3.37	Average
6	0.454	50.09	56.80	9.59	0.25	-6.71	QP
7	0.634	29.32	46.00	9.60	0.25	-16.68	Average
8	0.634	37.53	56.00	9.60	0.25	-18.47	QP
9	0.830	30.75	46.00	9.60	0.26	-15.25	Average
10	0.830	38.40	56.00	9.60	0.26	-17.60	QP
11	1.296	28.25	46.00	9.60	0.27	-17.75	Average
12	1.296	36.85	56.00	9.60	0.27	-19.15	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

(Adapter 1:GKYPS0020120UL1)

Temperature:	26°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of GFSK 2480MHz		

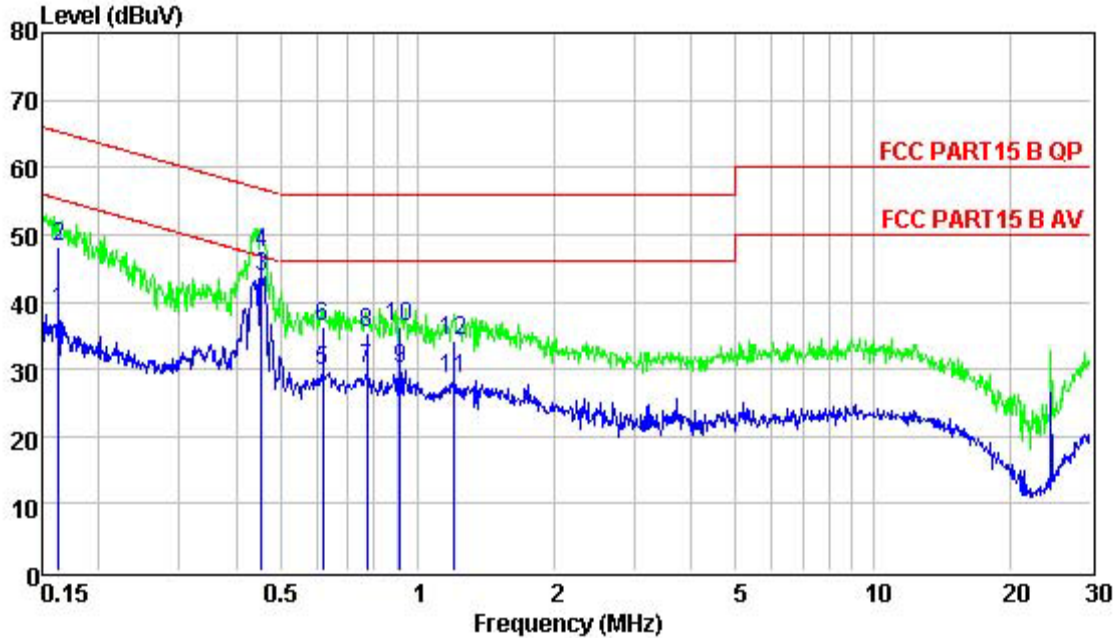


	Freq	Level	Limit	LISN	Cable	Over	Remark
	MHz	dBuV	Line	Factor	Loss	Limit	
			dBuV		dB	dB	
1	0.163	38.75	55.30	9.49	0.24	-16.55	Average
2	0.163	48.30	65.30	9.49	0.24	-17.00	QP
3	0.454	43.75	46.80	9.59	0.25	-3.05	Average
4	0.454	47.40	56.80	9.59	0.25	-9.40	QP
5	0.621	29.60	46.00	9.60	0.25	-16.40	Average
6	0.621	36.36	56.00	9.60	0.25	-19.64	QP
7	0.775	30.01	46.00	9.60	0.26	-15.99	Average
8	0.775	35.52	56.00	9.60	0.26	-20.48	QP
9	0.914	30.03	46.00	9.60	0.26	-15.97	Average
10	0.914	36.23	56.00	9.60	0.26	-19.77	QP
11	1.203	28.67	46.00	9.59	0.27	-17.33	Average
12	1.203	34.20	56.00	9.59	0.27	-21.80	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

(Adapter 2:JS018SPS-120020U)

Temperature:	26°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of GFSK 2480MHz		

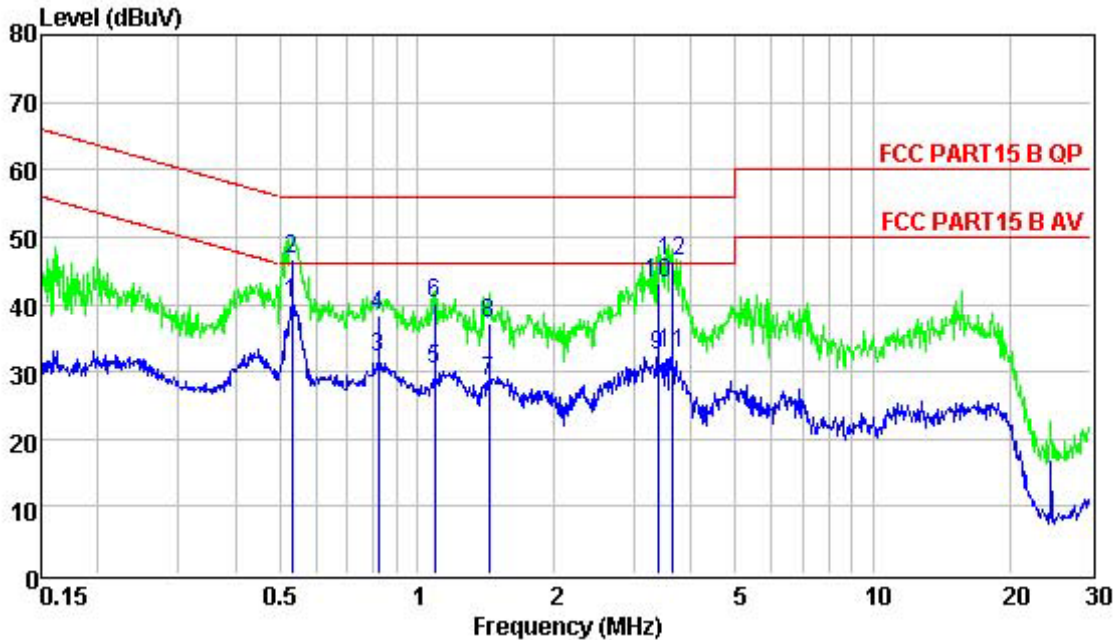


	Freq	Level	Limit	LISN	Cable	Over	Remark
	MHz	dBuV	dBuV	dB	dB	dB	
1	0.532	40.09	46.00	9.59	0.25	-5.91	Average
2	0.532	46.80	56.00	9.59	0.25	-9.20	QP
3	0.822	32.18	46.00	9.60	0.26	-13.82	Average
4	0.822	38.45	56.00	9.60	0.26	-17.55	QP
5	1.094	30.19	46.00	9.59	0.26	-15.81	Average
6	1.094	40.10	56.00	9.59	0.26	-15.90	QP
7	1.441	28.66	46.00	9.60	0.27	-17.34	Average
8	1.441	37.13	56.00	9.60	0.27	-18.87	QP
9	3.381	32.49	46.00	9.63	0.29	-13.51	Average
10	3.381	43.04	56.00	9.63	0.29	-12.96	QP
11	3.623	32.78	46.00	9.63	0.29	-13.22	Average
12	3.623	46.30	56.00	9.63	0.29	-9.70	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

(Adapter 2:JS018SPS-120020U)

Temperature:	26°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of GFSK 2480MHz		

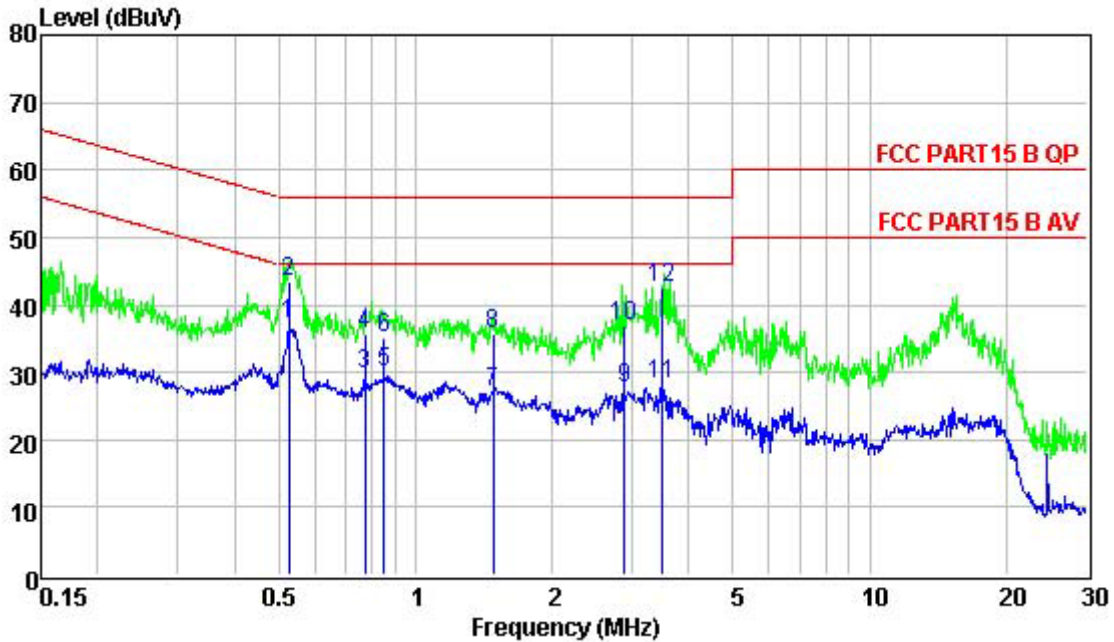


	Freq	Level	Limit	LISN	Cable	Over	Remark
	MHz	dBuV	dBuV	dB	dB	dB	
1	0.527	37.13	46.00	9.59	0.25	-8.87	Average
2	0.527	43.30	56.00	9.59	0.25	-12.70	QP
3	0.775	29.66	46.00	9.60	0.26	-16.34	Average
4	0.775	35.56	56.00	9.60	0.26	-20.44	QP
5	0.853	29.92	46.00	9.60	0.26	-16.08	Average
6	0.853	35.12	56.00	9.60	0.26	-20.88	QP
7	1.480	27.05	46.00	9.58	0.27	-18.95	Average
8	1.480	35.60	56.00	9.58	0.27	-20.40	QP
9	2.884	27.74	46.00	9.61	0.29	-18.26	Average
10	2.884	36.89	56.00	9.61	0.29	-19.11	QP
11	3.491	28.21	46.00	9.63	0.29	-17.79	Average
12	3.491	42.40	56.00	9.63	0.29	-13.60	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

(Adapter 3: LY006SPS-120020UH)

Temperature:	26°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of GFSK 2480MHz		

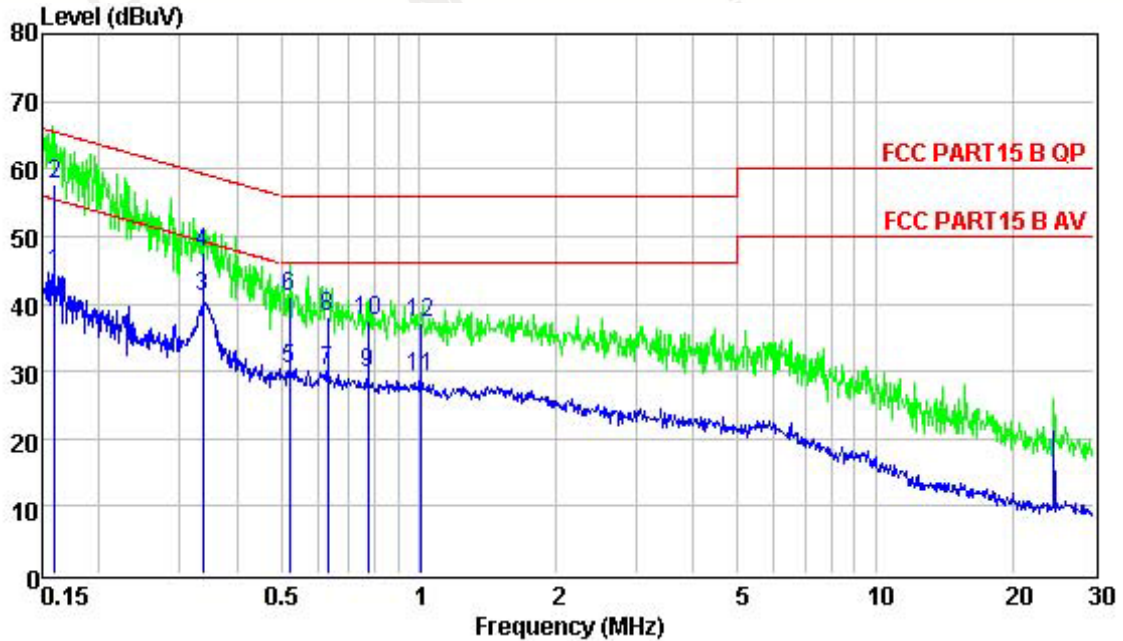


	Freq	Level	Limit	LISN	Cable	Over	Remark
	MHz	dBuV	Line	Factor	Loss	Limit	
			dBuV	dB	dB	dB	
1	0.160	44.62	55.47	9.69	0.24	-10.85	Average
2	0.160	57.80	65.47	9.69	0.24	-7.67	QP
3	0.337	40.91	49.27	9.61	0.25	-8.36	Average
4	0.337	47.60	59.27	9.61	0.25	-11.67	QP
5	0.521	30.48	46.00	9.58	0.25	-15.52	Average
6	0.521	41.10	56.00	9.58	0.25	-14.90	QP
7	0.634	30.08	46.00	9.60	0.25	-15.92	Average
8	0.634	38.15	56.00	9.60	0.25	-17.85	QP
9	0.775	29.60	46.00	9.60	0.26	-16.40	Average
10	0.775	37.45	56.00	9.60	0.26	-18.55	QP
11	1.010	29.07	46.00	9.59	0.26	-16.93	Average
12	1.010	37.12	56.00	9.59	0.26	-18.88	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

(Adapter 3: LY006SPS-120020UH)

Temperature:	26°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of GFSK 2480MHz		

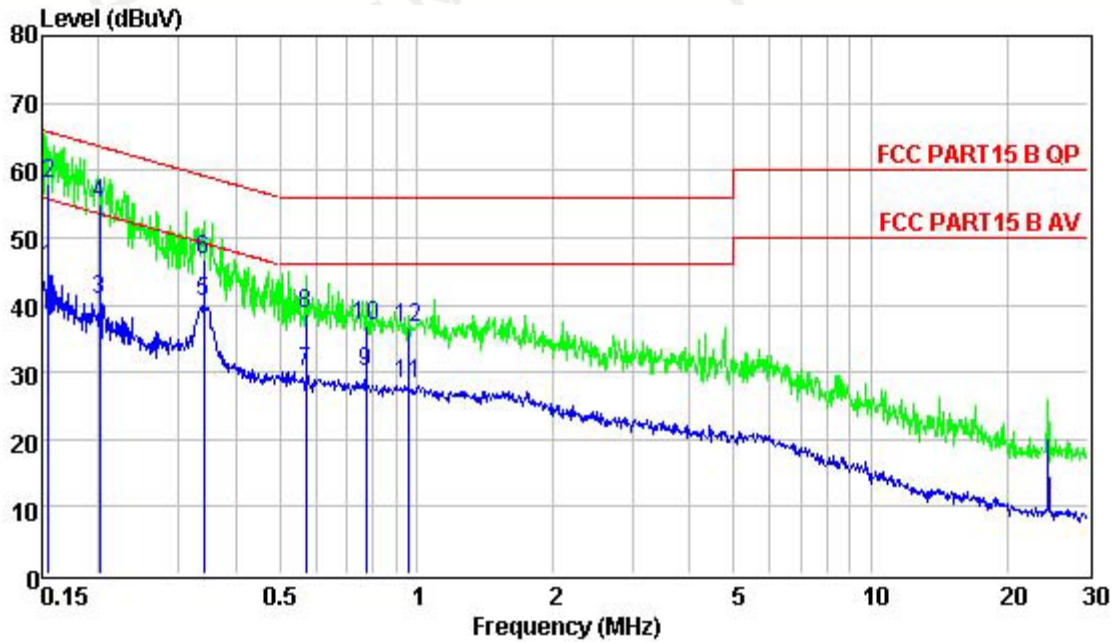

	Freq	Level	Limit	LISN	Cable	Over	Remark
	MHz	dBuV	dBuV	dB	dB	dB	
1	0.155	45.51	55.74	9.46	0.24	-10.23	Average
2	0.155	58.10	65.74	9.46	0.24	-7.64	QP
3	0.201	40.70	53.58	9.57	0.25	-12.88	Average
4	0.201	54.96	63.58	9.57	0.25	-8.62	QP
5	0.341	40.58	49.18	9.58	0.25	-8.60	Average
6	0.341	46.80	59.18	9.58	0.25	-12.38	QP
7	0.570	30.07	46.00	9.59	0.25	-15.93	Average
8	0.570	38.60	56.00	9.59	0.25	-17.40	QP
9	0.775	30.02	46.00	9.60	0.26	-15.98	Average
10	0.775	36.86	56.00	9.60	0.26	-19.14	QP
11	0.958	28.22	46.00	9.60	0.26	-17.78	Average
12	0.958	36.48	56.00	9.60	0.26	-19.52	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

4. RADIATED EMISSION TEST

4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup


1. Radiated Emission Test-Up Frequency Below 30MHz

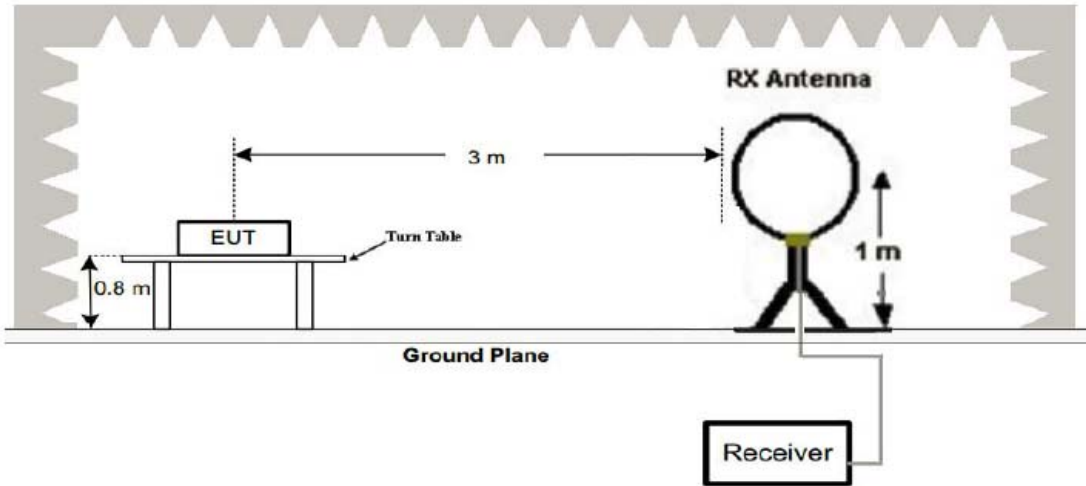

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

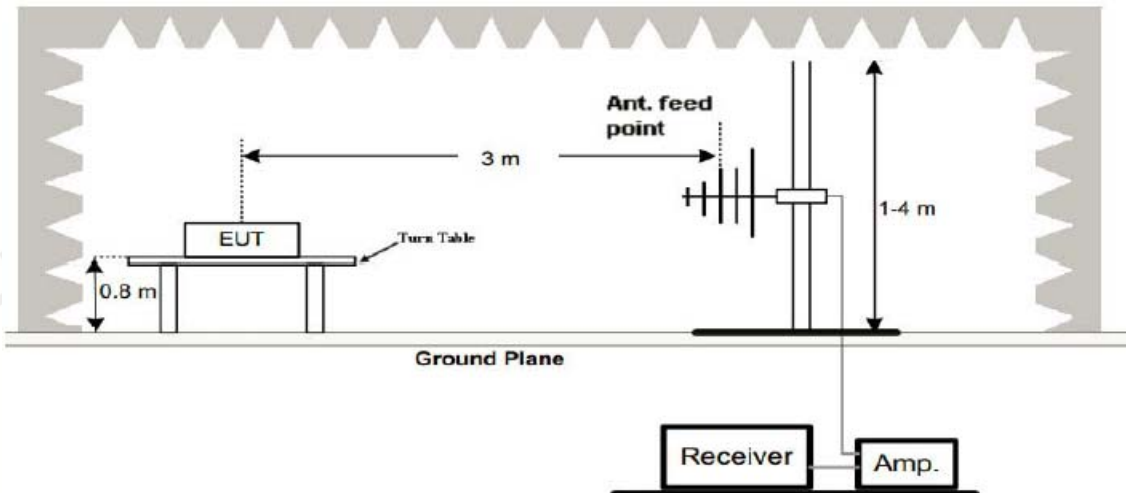

3. Radiated Emission Test-Up Frequency Above 1GHz

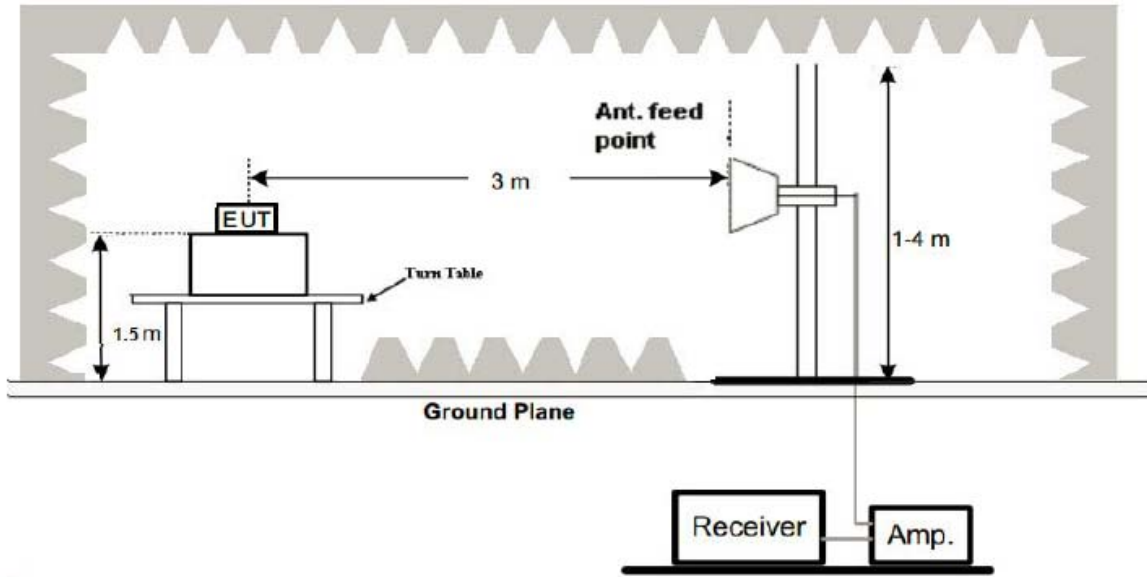

4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).
8. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 Test Result

PASS


Remark:

1. All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK High Channel was reported for below 1GHz test.
2. For BT3.0 above 1GHz test all modes of GFSK, $\pi/4$ DQPSK, and 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
3. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
4. Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9KHz to 30MHz and not recorded in this report.

Below 1GHz Test Results:

(Adapter 1:GKYP50020120UL1)

Temperature:	22°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Horizontal
Test Mode:	Transmitting mode of GFSK 2480MHz		

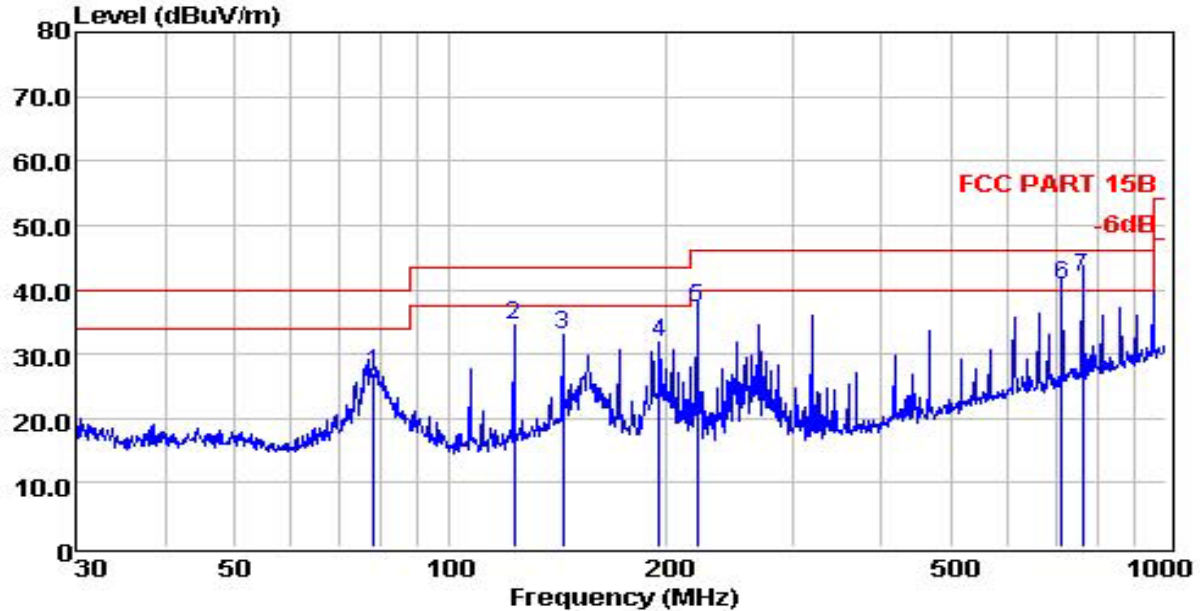


	Freq	ReadAntenna	Cable	Limit	Over	Remark	
	MHz	Level	Factor	Loss	Level	Line	
		dBuV	dB/m	dB	dBuV/m	dBuV/m	
1	78.41	13.82	13.05	0.15	27.02	40.00	-12.98 QP
2	122.83	21.44	12.76	0.21	34.41	43.50	-9.09 QP
3	143.83	17.37	15.31	0.23	32.91	43.50	-10.59 QP
4	195.82	19.83	11.66	0.30	31.79	43.50	-11.71 QP
5	221.39	25.29	11.57	0.40	37.26	46.00	-8.74 QP
6 !	714.17	20.21	19.18	1.25	40.64	46.00	-5.36 QP
7 !	763.38	20.36	20.38	1.34	42.08	46.00	-3.92 QP

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

(Adapter 1:GKYPS0020120UL1)


Temperature:	22°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Vertical
Test Mode:	Transmitting mode of GFSK 2480MHz		

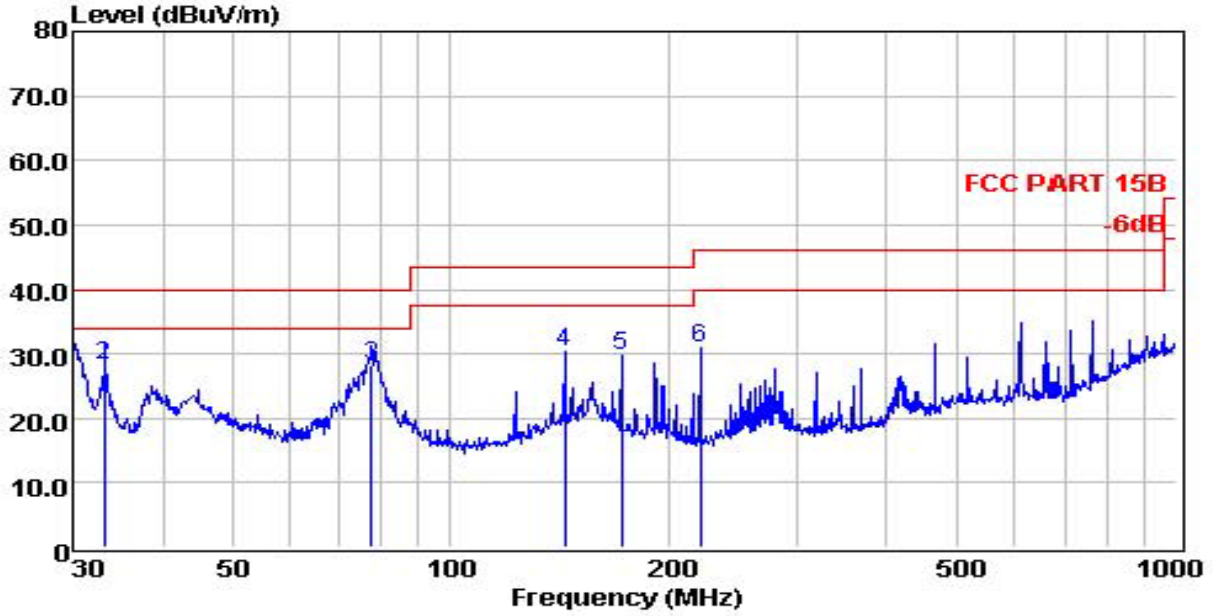

	Freq	Read	Antenna	Cable	Limit	Over	Remark
	MHz	Level	Factor	Loss	Line	Limit	
		dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	30.00	14.82	14.80	0.34	29.96	40.00	-10.04 QP
2	33.21	14.64	13.48	0.27	28.39	40.00	-11.61 QP
3	77.59	16.89	11.27	0.15	28.31	40.00	-11.69 QP
4	143.83	14.92	15.31	0.23	30.46	43.50	-13.04 QP
5	171.99	15.70	13.85	0.24	29.79	43.50	-13.71 QP
6	221.39	18.85	11.57	0.40	30.82	46.00	-15.18 QP

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	22°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Horizontal
Test Mode:	Transmitting mode of GFSK 2480MHz		

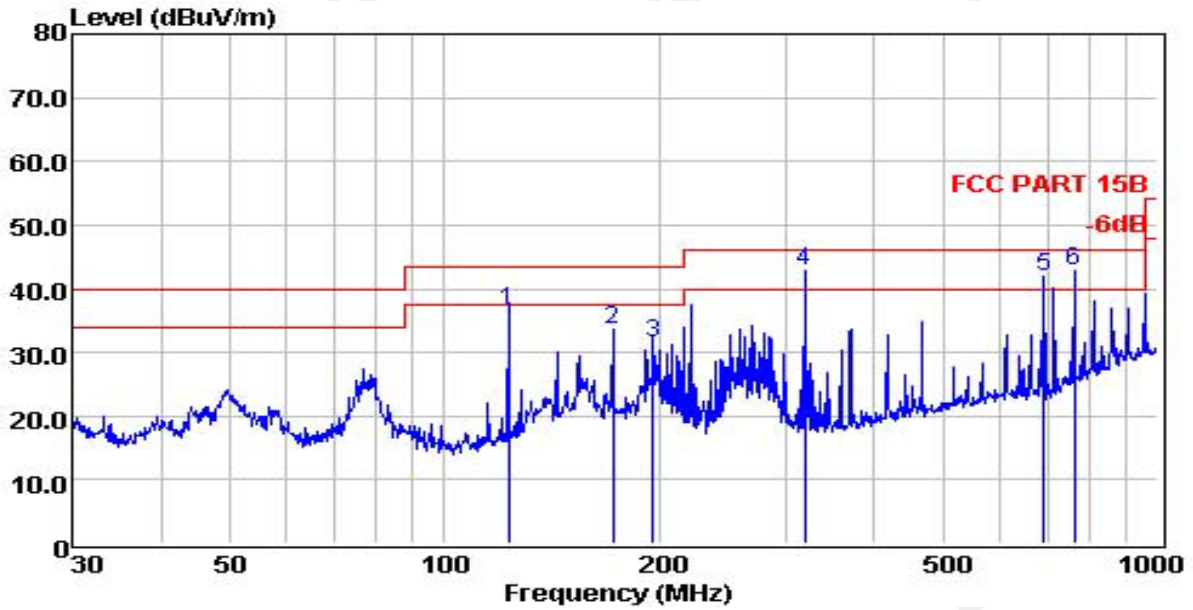


	Read	Antenna	Cable	Limit	Over		
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	122.83	23.65	12.76	0.21	36.62	43.50	-6.88 QP
2	171.99	19.62	13.85	0.24	33.71	43.50	-9.79 QP
3	195.82	19.55	11.66	0.30	31.51	43.50	-11.99 QP
4 !	319.94	28.95	13.21	0.70	42.86	46.00	-3.14 QP
5 !	691.99	23.91	16.85	1.21	41.97	46.00	-4.03 QP
6 !	763.38	22.52	19.04	1.34	42.90	46.00	-3.10 QP

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

(Adapter 2:JS018SPS-120020U)

Temperature:	22°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Vertical
Test Mode:	Transmitting mode of GFSK 2480MHz		

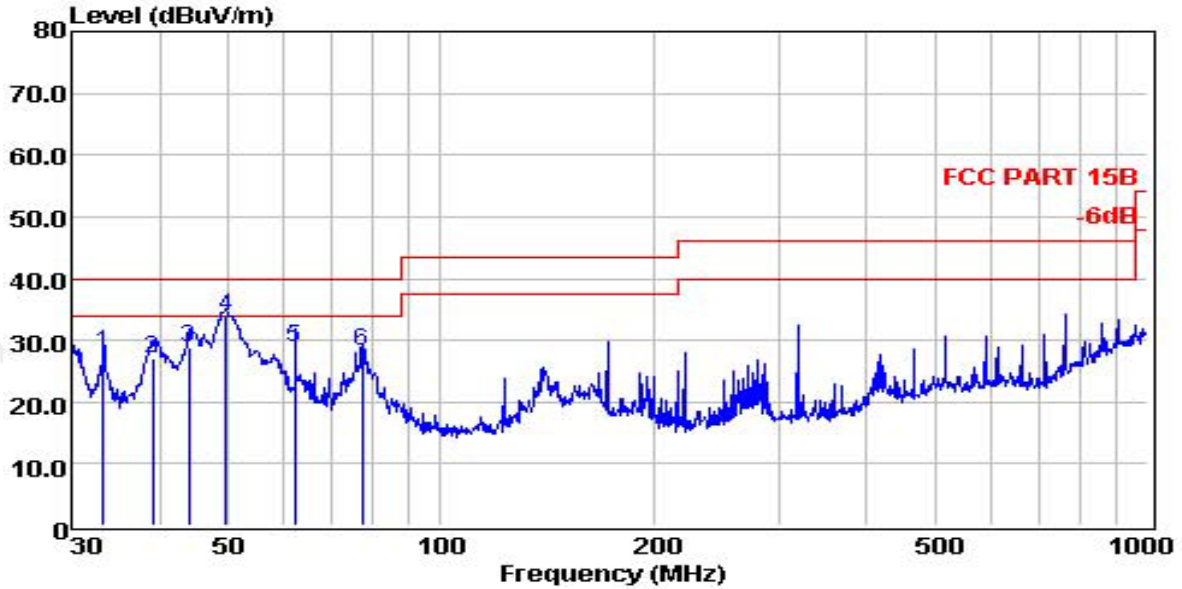


	ReadAntenna	Cable	Limit	Over		
Freq	Level	Factor	Loss	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	33.33	14.30	13.44	0.26	28.00	40.00 -12.00 QP
2	39.02	13.60	13.37	0.15	27.12	40.00 -12.88 QP
3	43.97	15.39	13.29	0.13	28.81	40.00 -11.19 QP
4	49.71	20.82	13.02	0.12	33.96	40.00 -6.04 QP
5	62.21	16.75	11.88	0.13	28.76	40.00 -11.24 QP
6	77.32	16.76	11.28	0.15	28.19	40.00 -11.81 QP

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

(Adapter 3: LY006SPS-120020UH)

Temperature:	22°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Horizontal
Test Mode:	Transmitting mode of GFSK 2480MHz		

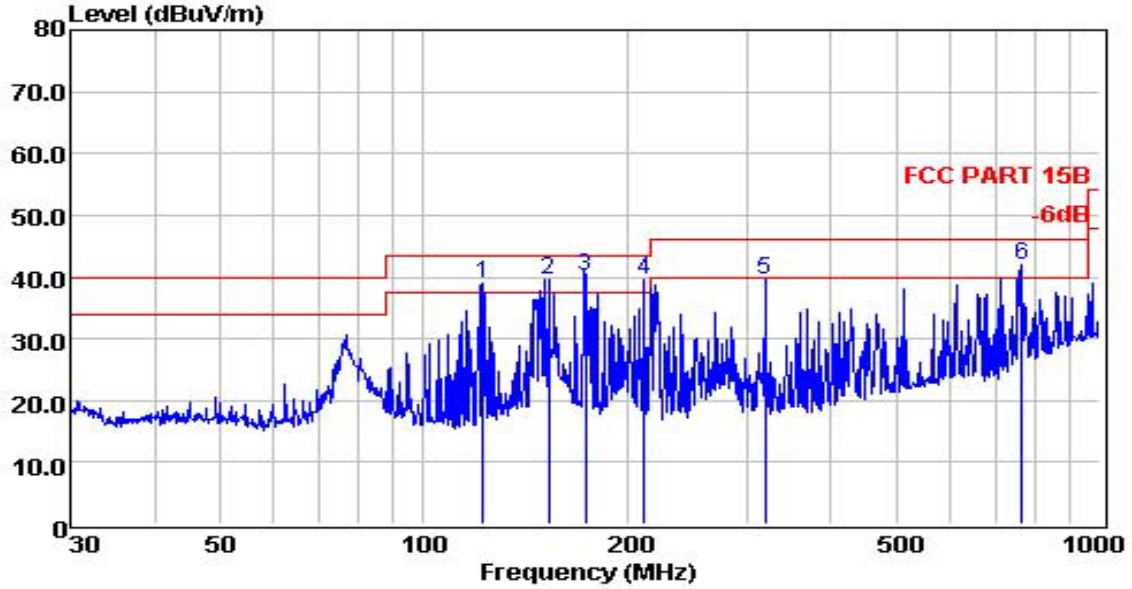


	ReadAntenna	Cable	Limit	Over				
Freq	Level	Factor	Loss	Level	Line			
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m			
1 !	122.40	25.96	12.70	0.21	38.87	43.50	-4.63	QP
2 !	153.20	23.87	15.54	0.23	39.64	43.50	-3.86	QP
3 !	173.21	26.32	13.67	0.24	40.23	43.50	-3.27	QP
4 !	212.27	27.62	11.46	0.37	39.45	43.50	-4.05	QP
5 !	319.94	25.61	13.21	0.70	39.52	46.00	-6.48	QP
6 !	768.75	20.09	20.51	1.35	41.95	46.00	-4.05	QP

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

(Adapter 3: LY006SPS-120020UH)

Temperature:	22°C	Relative Humidity:	48%
Test Date:	Nov. 18, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Vertical
Test Mode:	Transmitting mode of GFSK 2480MHz		

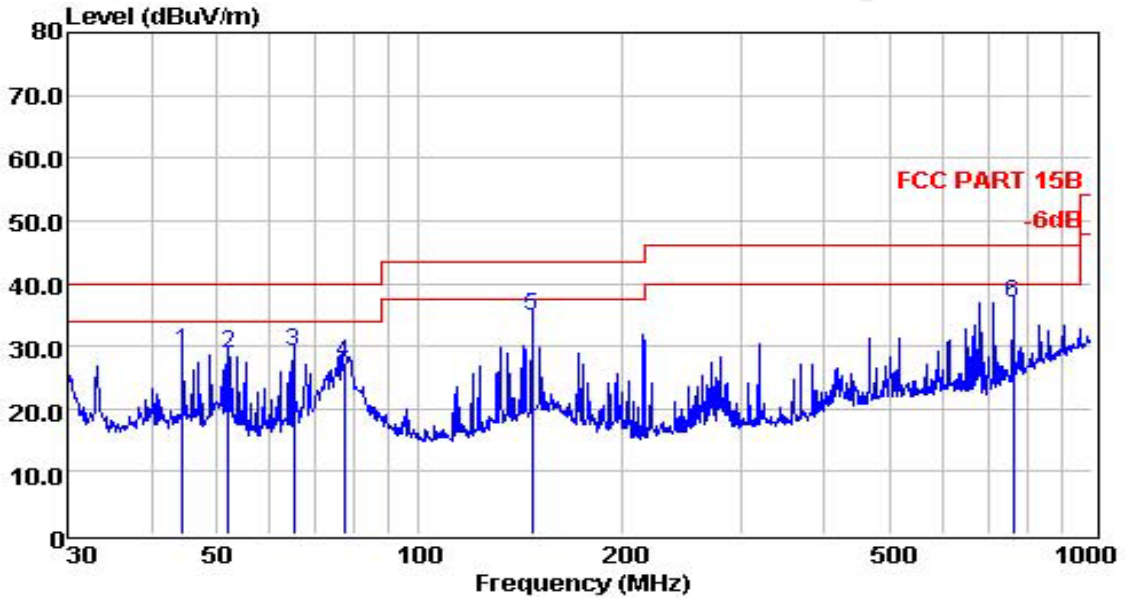

	Freq	ReadAntenna	Cable	Limit	Over	Remark		
	MHz	Level	Factor	Loss	Level	Line	Limit	dB
		dBuV	dB/m	dB	dBuV/m	dBuV/m		dB
1	44.43	15.64	13.27	0.13	29.04	40.00	-10.96	QP
2	52.03	16.11	12.77	0.12	29.00	40.00	-11.00	QP
3	65.11	17.23	11.85	0.14	29.22	40.00	-10.78	QP
4	77.32	16.01	11.28	0.15	27.44	40.00	-12.56	QP
5	147.40	19.23	15.40	0.23	34.86	43.50	-8.64	QP
6	763.38	16.44	19.04	1.34	36.82	46.00	-9.18	QP

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results (GFSK Worst Case):
CH Middle (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	110.14	-5.84	104.3	114	-9.7	PK
2402	82.53	-5.84	76.69	94	-17.31	AV
4804	59.42	-3.64	55.78	74	-18.22	PK
4804	49.41	-3.64	45.77	54	-8.23	AV
7206	58.23	-0.95	57.28	74	-16.72	PK
7206	47.75	-0.95	46.8	54	-7.2	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	110.37	-5.84	104.53	114	-9.47	PK
2402	81.36	-5.84	75.52	94	-18.48	AV
4804	59.26	-3.64	55.62	74	-18.38	PK
4804	48.53	-3.64	44.89	54	-9.11	AV
7206	58.41	-0.95	57.46	74	-16.54	PK
7206	47.43	-0.95	46.48	54	-7.52	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	110.34	-5.84	104.5	114	-9.5	PK
2441	82.23	-5.84	76.39	94	-17.61	AV
4882	58.42	-3.64	54.78	74	-19.22	PK
4882	49.51	-3.64	45.87	54	-8.13	AV
7323	57.86	-0.95	56.91	74	-17.09	PK
7323	48.26	-0.95	47.31	54	-6.69	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	111.36	-5.84	105.52	114	-8.48	PK
2441	82.41	-5.84	76.57	94	-17.43	AV
4882	59.14	-3.64	55.5	74	-18.5	PK
4882	49.36	-3.64	45.72	54	-8.28	AV
7323	58.86	-0.95	57.91	74	-16.09	PK
7323	47.68	-0.95	46.73	54	-7.27	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	111.42	-5.84	105.58	114	-8.42	PK
2480	82.14	-5.84	76.3	94	-17.7	AV
4960	60.42	-3.64	56.78	74	-17.22	PK
4960	49.34	-3.64	45.7	54	-8.3	AV
7440	58.72	-0.95	57.77	74	-16.23	PK
7440	46.75	-0.95	45.8	54	-8.2	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	109.42	-5.84	103.58	114	-10.42	PK
2480	82.34	-5.84	76.5	94	-17.5	AV
4960	59.42	-3.64	55.78	74	-18.22	PK
4960	49.26	-3.64	45.62	54	-8.38	AV
7440	57.24	-0.95	56.29	74	-17.71	PK
7440	46.51	-0.95	45.56	54	-8.44	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

5. BAND EDGE

5.1 Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3 Test Result

PASS

Remark: All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were tested, only the worst result of GFSK was reported as below:

Radiated Band Edge Test:

Worst case on GFSK

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	55.34	-5.81	49.53	74	-24.47	PK
2310	/	-5.81	/	54	/	AV
2390	55.21	-5.84	49.37	74	-24.63	PK
2390	/	-5.84	/	54	/	AV
2400	56.15	-5.84	50.31	74	-23.69	PK
2400	/	-5.84	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	56.37	-5.81	50.56	74	-23.44	PK
2310	/	-5.81	/	54	/	AV
2390	54.75	-5.84	48.91	74	-25.09	PK
2390	/	-5.84	/	54	/	AV
2400	56.32	-5.84	50.48	74	-23.52	PK
2400	/	-5.84	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)

Horizontal :

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.5	56.37	-5.65	50.72	74	-23.28	PK
2483.5	/	-5.65	/	54	/	AV
2500	54.24	-5.72	48.52	74	-25.48	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.5	57.35	-5.65	51.7	74	-22.3	PK
2483.5	/	-5.65	/	54	/	AV
2500	55.26	-5.72	49.54	74	-24.46	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

6. OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Setup

Same as Radiated Emission Measurement

6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW=30KHz, VBW=100KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

6.3 Measurement Equipment Used

Same as Radiated Emission Measurement

6.4 Test Result

PASS


GFSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	1.031	PASS
2441	1.035	PASS
2480	1.033	PASS


CH: 2402MHz



CH: 2441MHz

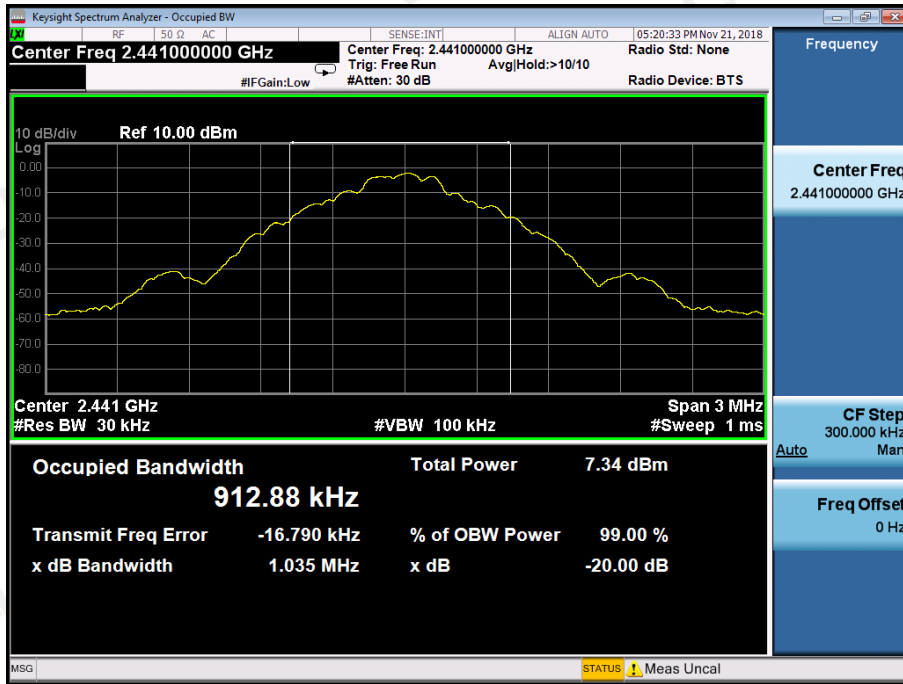


CH: 2480MHz

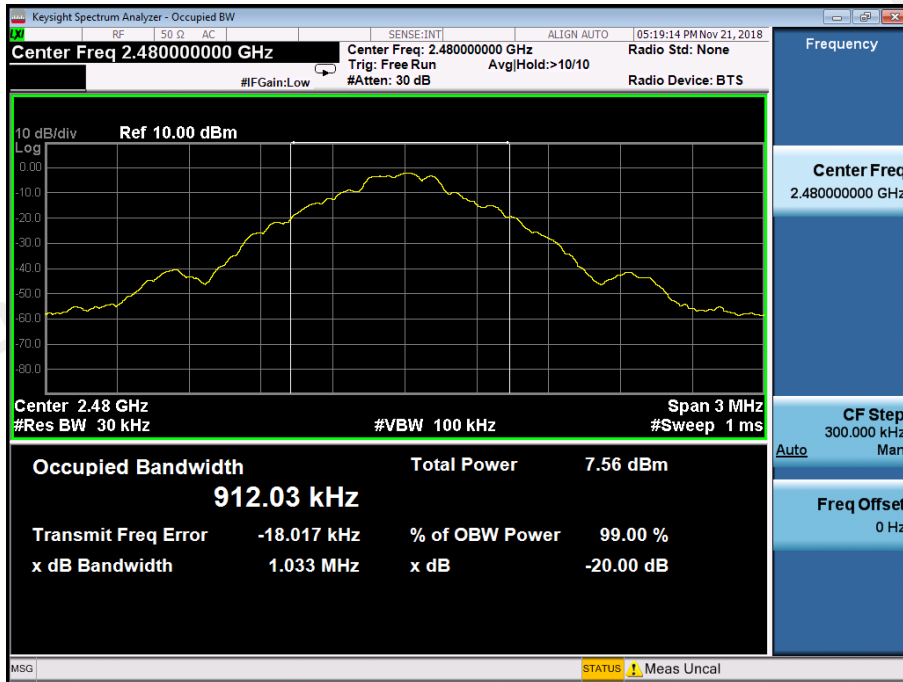


$\pi/4$ DQPSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	1.364	PASS
2441	1.370	PASS
2480	1.366	PASS


CH: 2402MHz

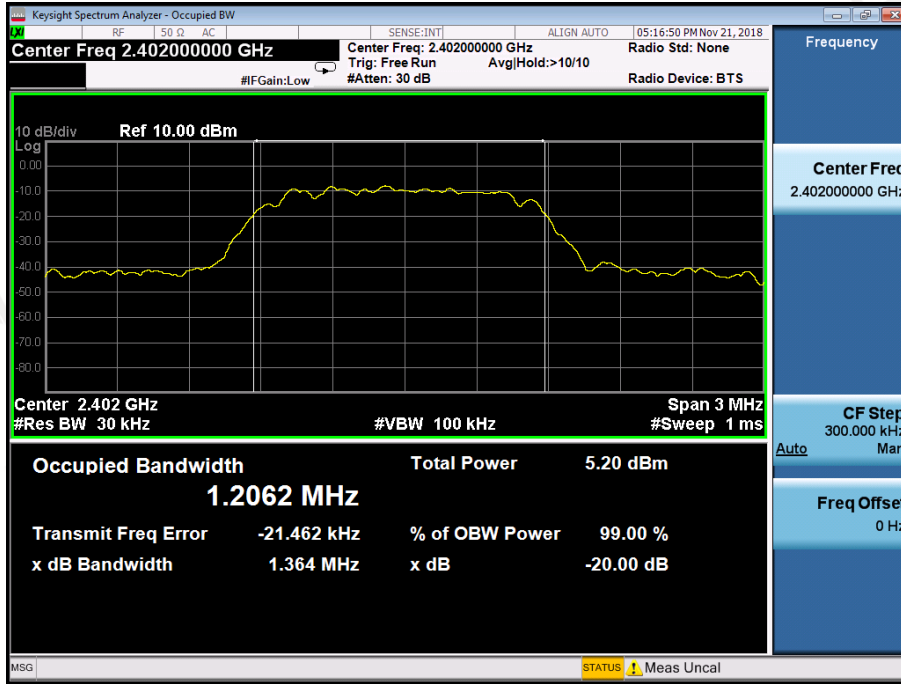

CH: 2441MHz

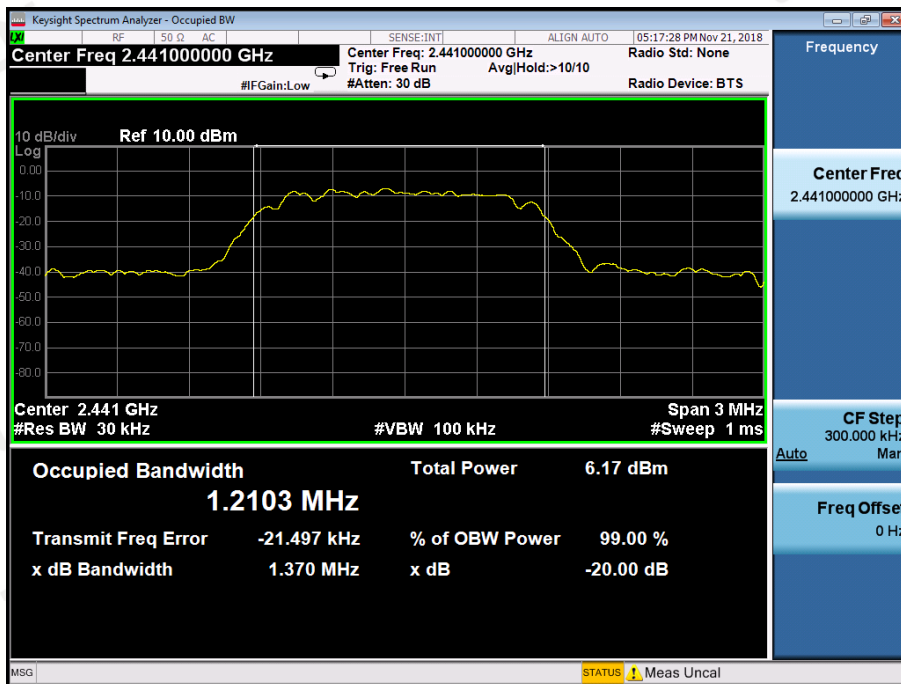


CH: 2480MHz

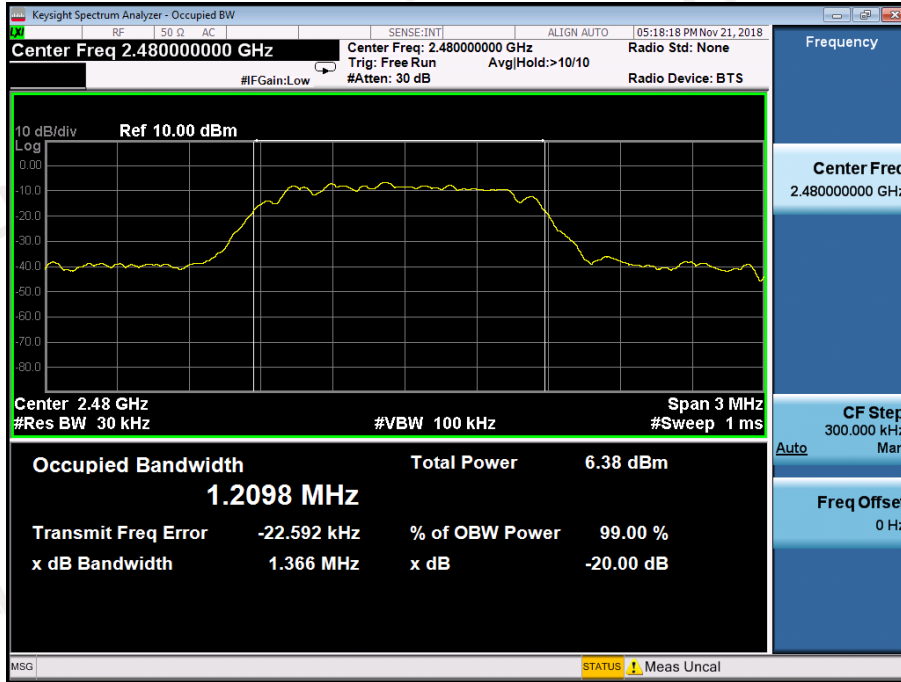


8DPSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	1.378	PASS
2441	1.382	PASS
2480	1.384	PASS


CH: 2402MHz

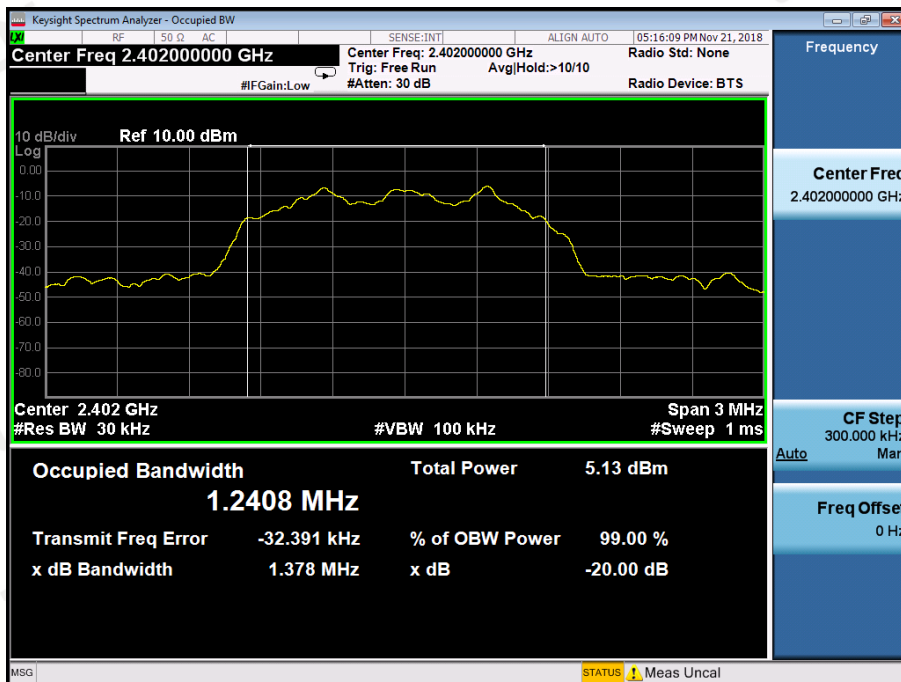

CH: 2441MHz

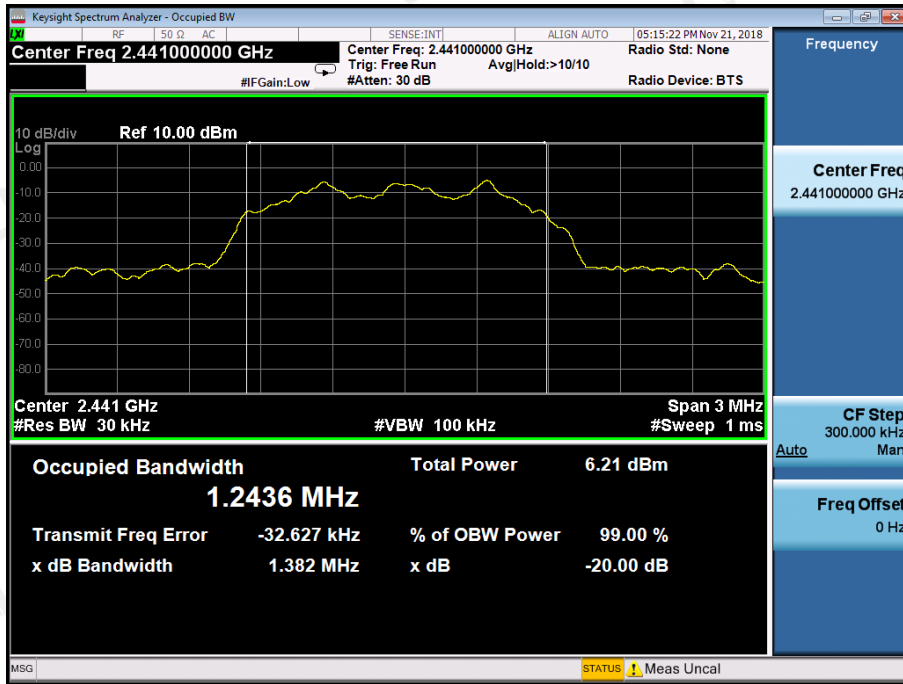

CH: 2480MHz

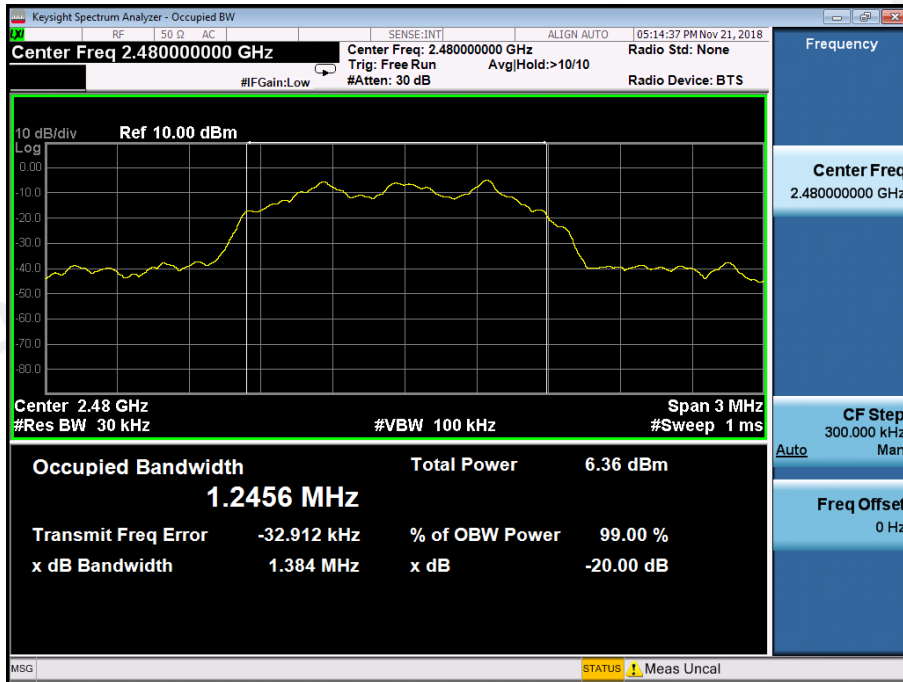

7. MAXIMUM PEAK OUTPUT POWER

7.1 Test Setup



7.2 Test Procedure

According to ANSI C63.10:2013 Maximum peak conducted output power for HFSS devices:
 The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.
 The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple detector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

7.3 Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


7.4 Test Result

PASS

Type	Channel	Peak Output power (dBm)	Limit (dBm)	Result
GFSK	Low	2.012	30	Pass
	Mid	3.146		
	High	3.532		
π/4DQPSK	Low	2.263	21	Pass
	Mid	3.293		
	High	2.457		
8DPSK	Low	2.574	21	Pass
	Mid	2.235		
	High	3.261		

8. FREQUENCY SEPARATION

8.1 Test Setup



8.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz.

8.3 Limit

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

8.4 Test Result

PASS

Type/Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.000	1.031	pass
	Adjacency Channel	2403			
	Mid Channel	2441	0.998	1.035	pass
	Adjacency Channel	2442			
	High Channel	2480	1.004	1.033	pass
	Adjacency Channel	2479			

CH: 2402MHz



CH: 2441MHz




CH: 2480MHz




Type/Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.006	0.909	pass
	Adjacency Channel	2403			
	Mid Channel	2441	0.992	0.913	pass
	Adjacency Channel	2442			
	High Channel	2480	0.998	0.911	pass
	Adjacency Channel	2479			

CH: 2402MHz

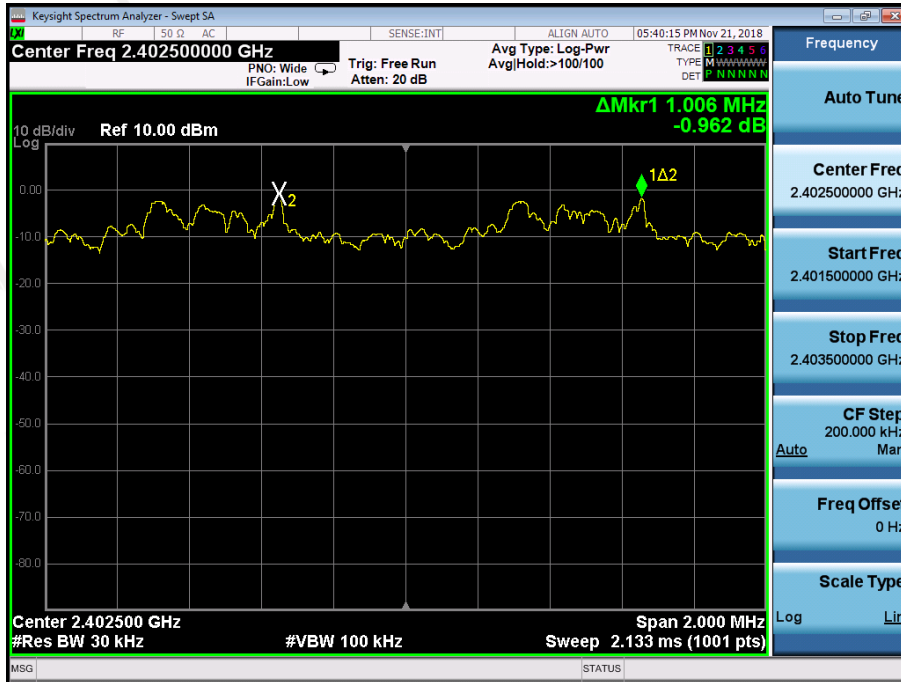

CH: 2441MHz

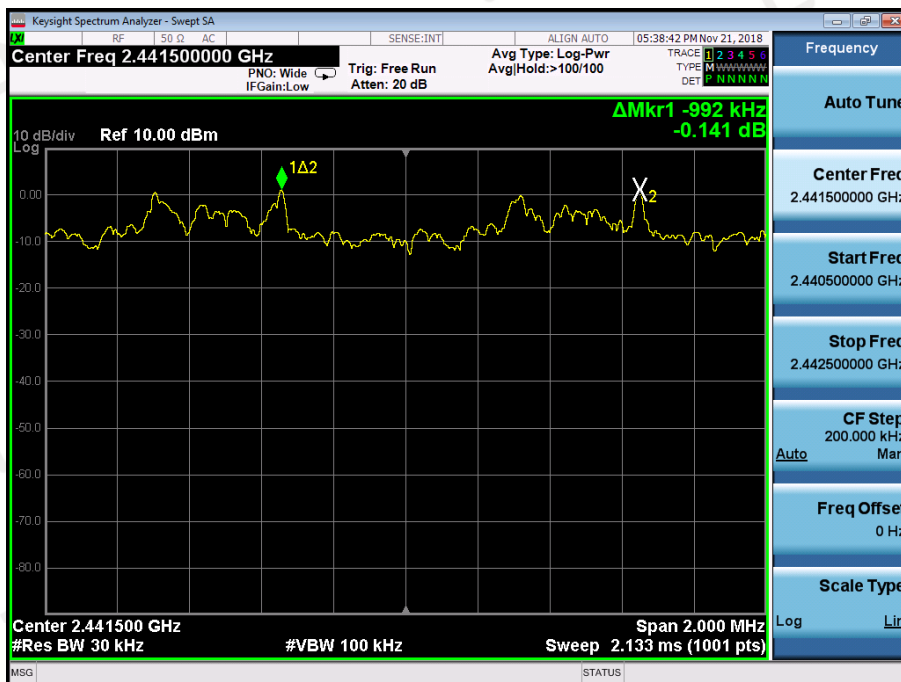


CH: 2480MHz




Type/Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation 8DPSK	Low Channel	2402	0.992	0.919	pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.006	0.921	pass
	Adjacency Channel	2442			
	High Channel	2480	0.996	0.923	pass
	Adjacency Channel	2479			


CH: 2402MHz

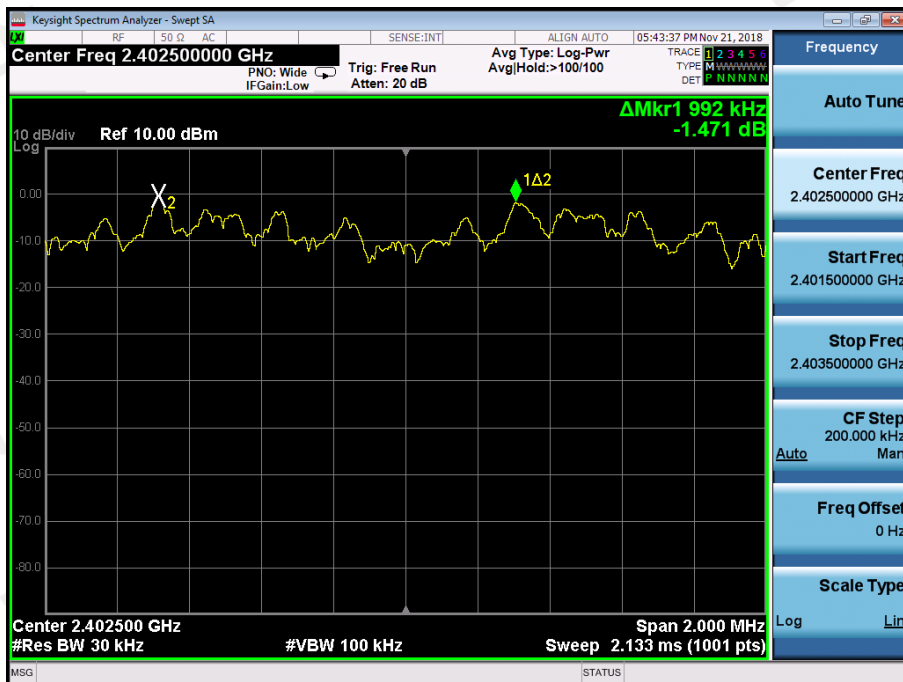

CH: 2441MHz

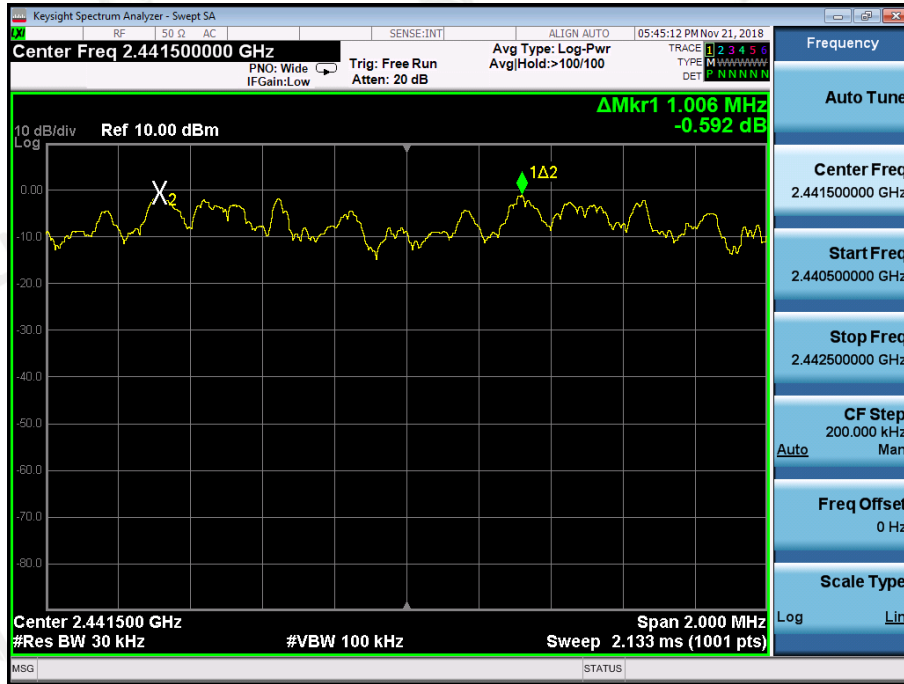

CH: 2480MHz

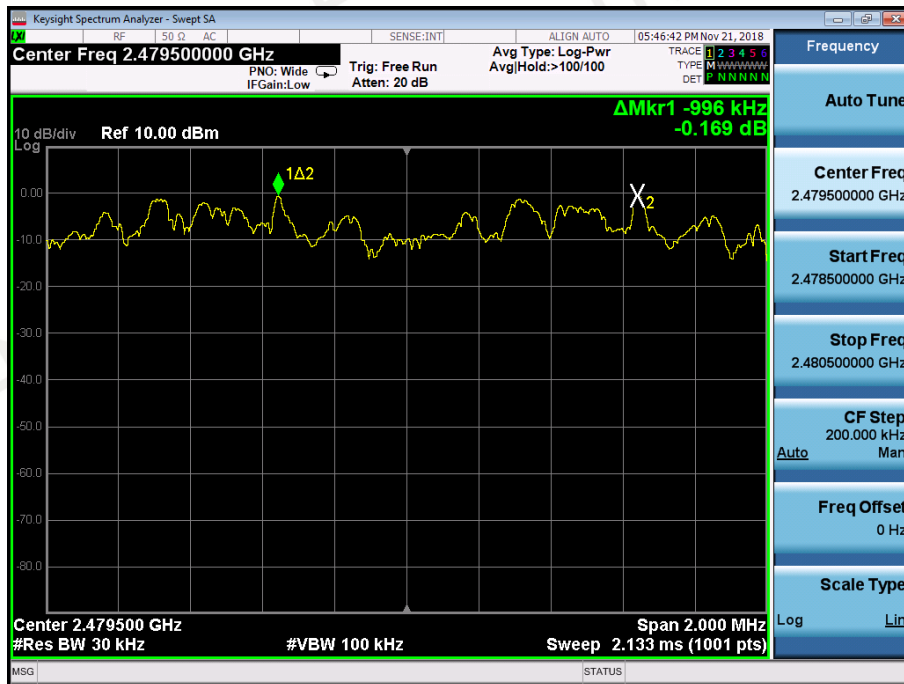

9. CONDUCTED BANDEGE MEASUREMENT

9.1 Test Setup



9.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100KHz, VBW=300KHz.
4. Set detected by the spectrum analyzer with peak detector.

9.3 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

9.4 Test Result



PASS

Modulation		Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
GFSK	Non-hopping	Left Band	54.99	20	Pass
		Right Band	58.74	20	Pass
	hopping	Left Band	50.66	20	Pass
		Right Band	61.53	20	Pass
π/4DQPSK	Non-hopping	Left Band	56.95	20	Pass
		Right Band	57.13	20	Pass
	hopping	Left Band	57.22	20	Pass
		Right Band	53.68	20	Pass
8DPSK	Non-hopping	Left Band	58.01	20	Pass
		Right Band	58.84	20	Pass
	hopping	Left Band	46.25	20	Pass
		Right Band	51.05	20	Pass

GFSK



2402MHz

2480MHz

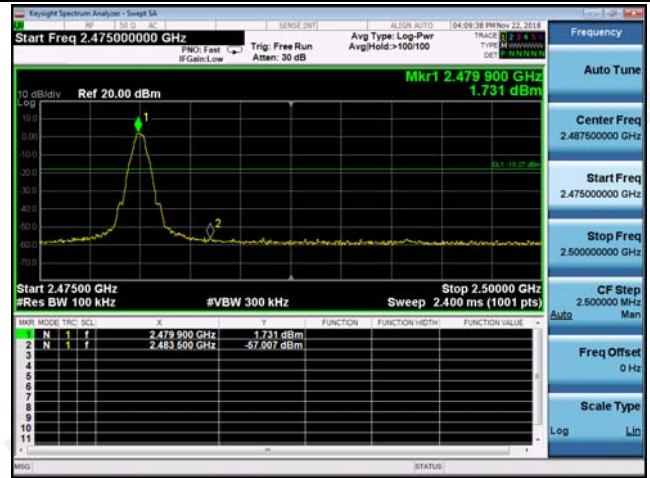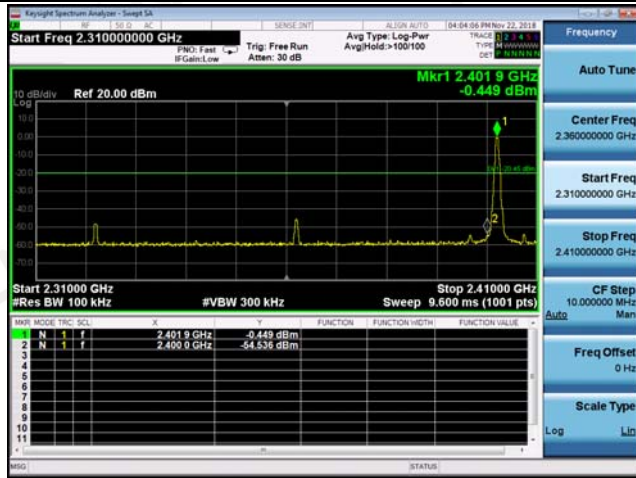

Hopping Off

Hopping Off

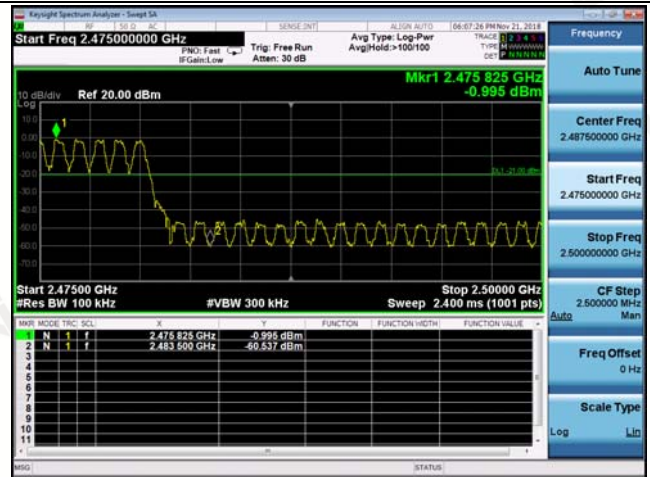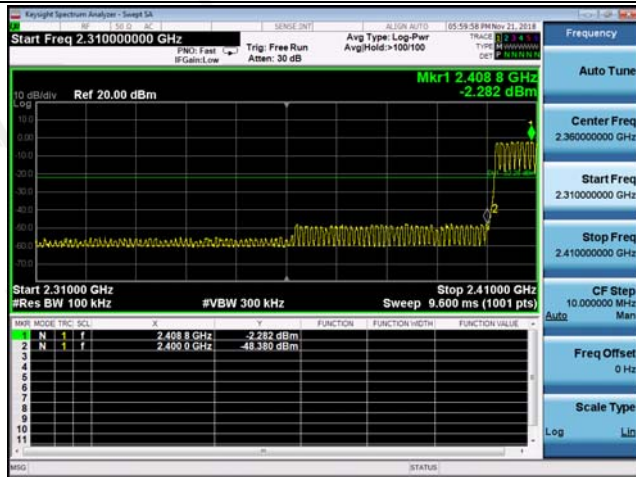



Hopping On

Hopping On

GFSK



2402MHz

2480MHz

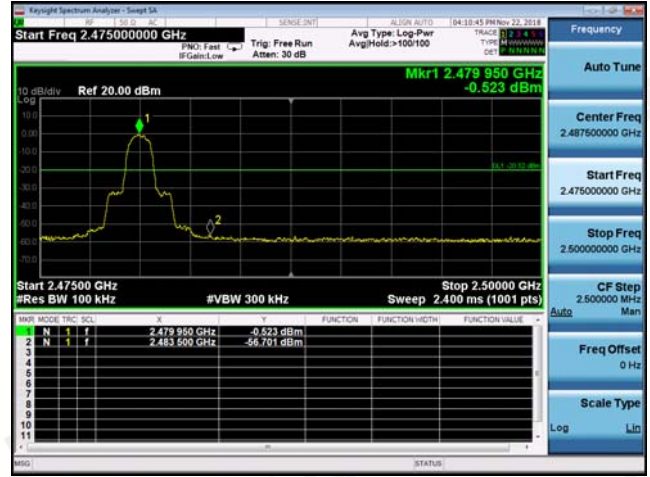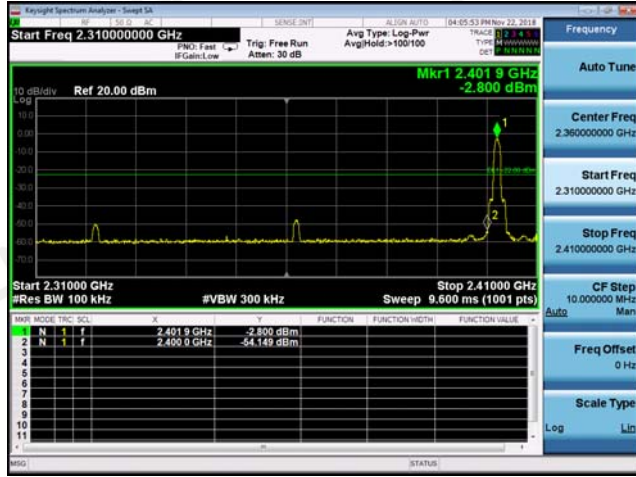

Hopping Off

Hopping Off

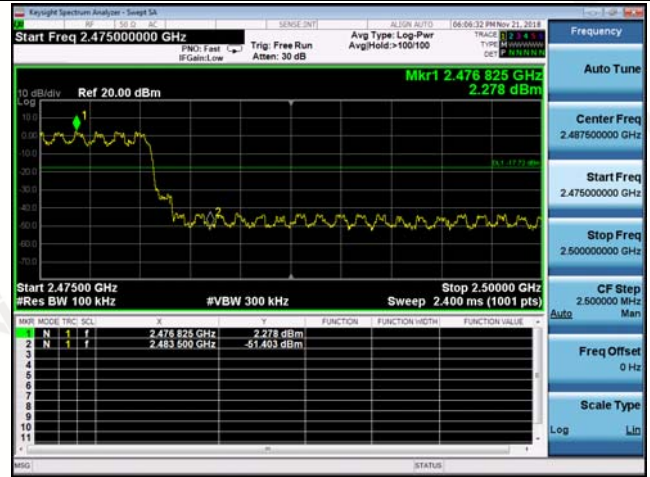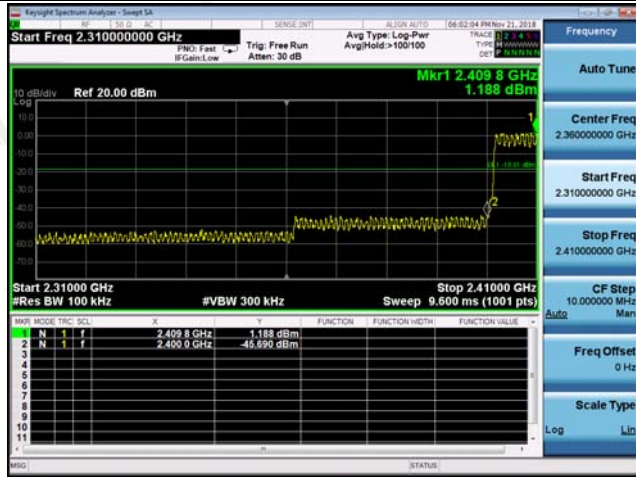



Hopping On

Hopping On

$\pi/4$ DQPSK



2402MHz

2480MHz

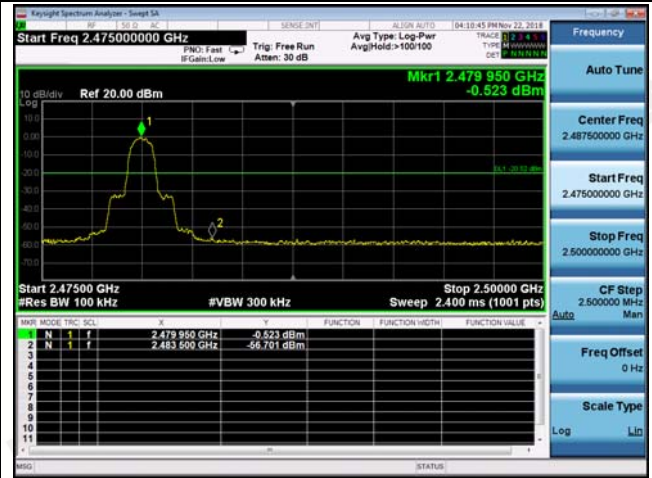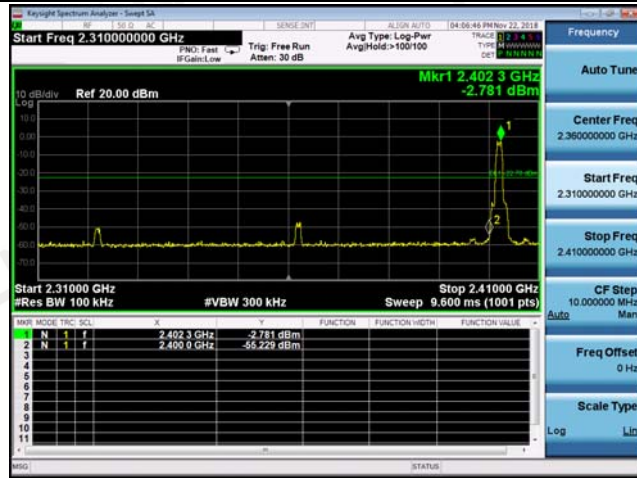

Hopping Off

Hopping Off

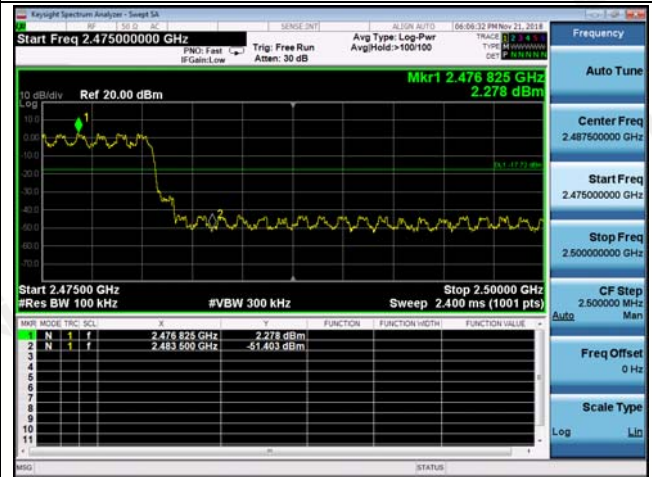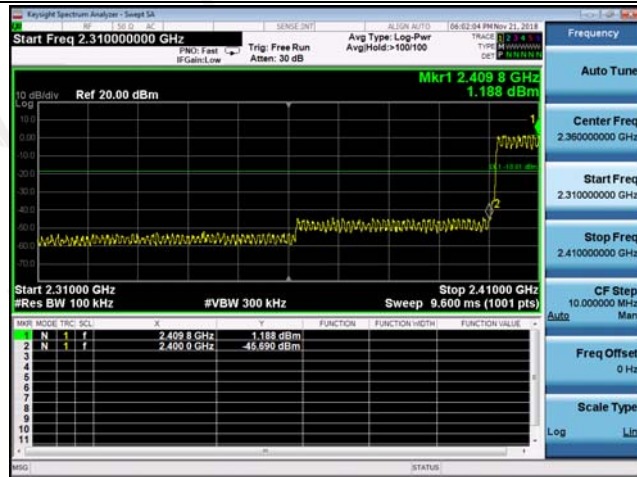



Hopping On

Hopping On

8DPSK



2402MHz

2480MHz

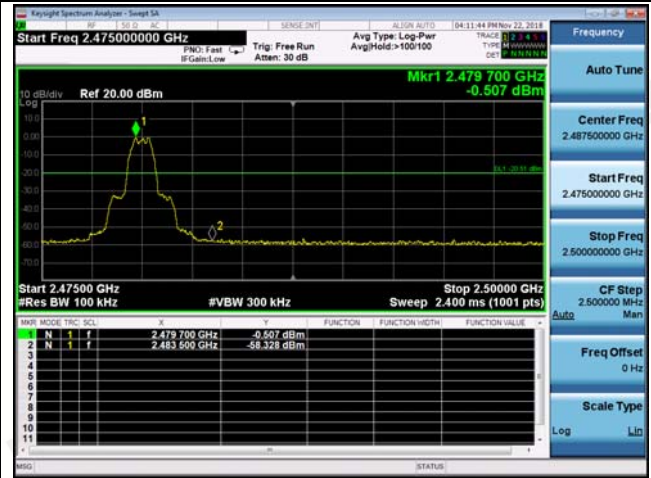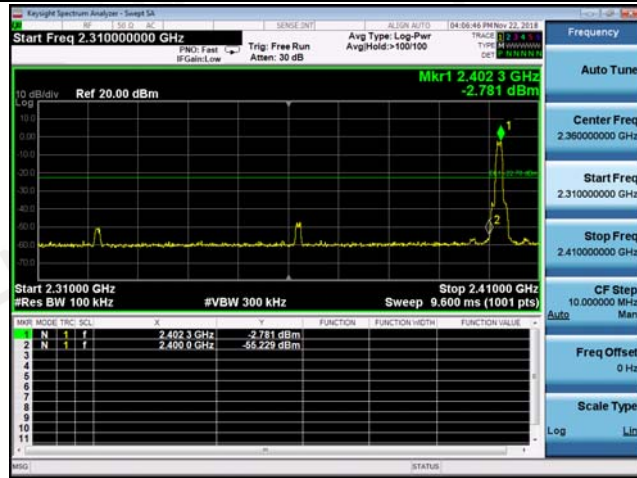

Hopping Off

Hopping Off

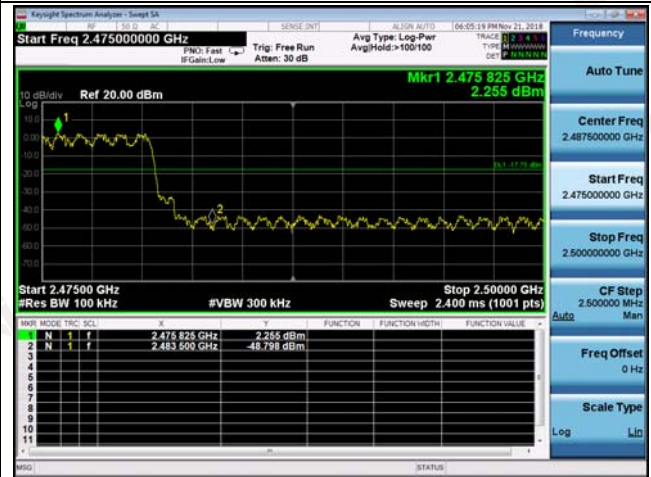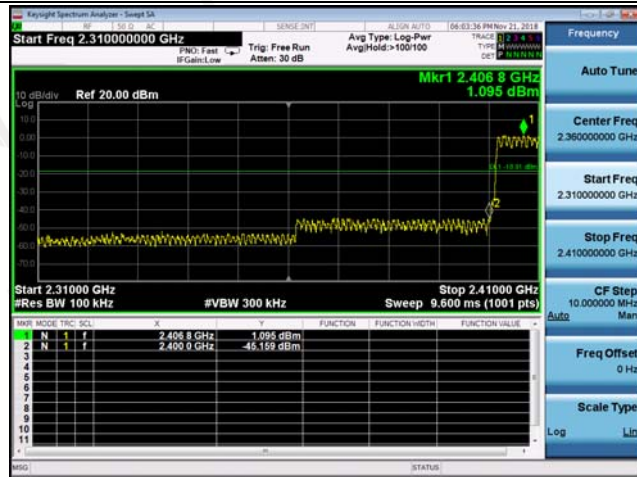

Hopping On

Hopping On

10. SPURIOUS RF CONDUCTED EMISSION


10.1 Test Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.
3. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to be calculated by " $10\lg(BW1/BW2)$ ". for example For 9KHz-150kHz, RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.

10.2 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013, For 9KHz-150kHz, Set RBW=1kHz and VBW= 3KHz; For 150KHz-10MHz, Set RBW=10kHz and VBW= 30KHz; For 10MHz-25GHz, Set RBW=100kHz and VBW= 300KHz in order to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

10.3 Test Setup

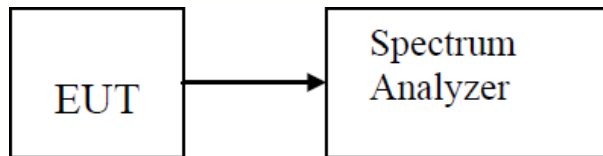


10.4 Test Result


PASS

GFSK

CH: 2402MHz

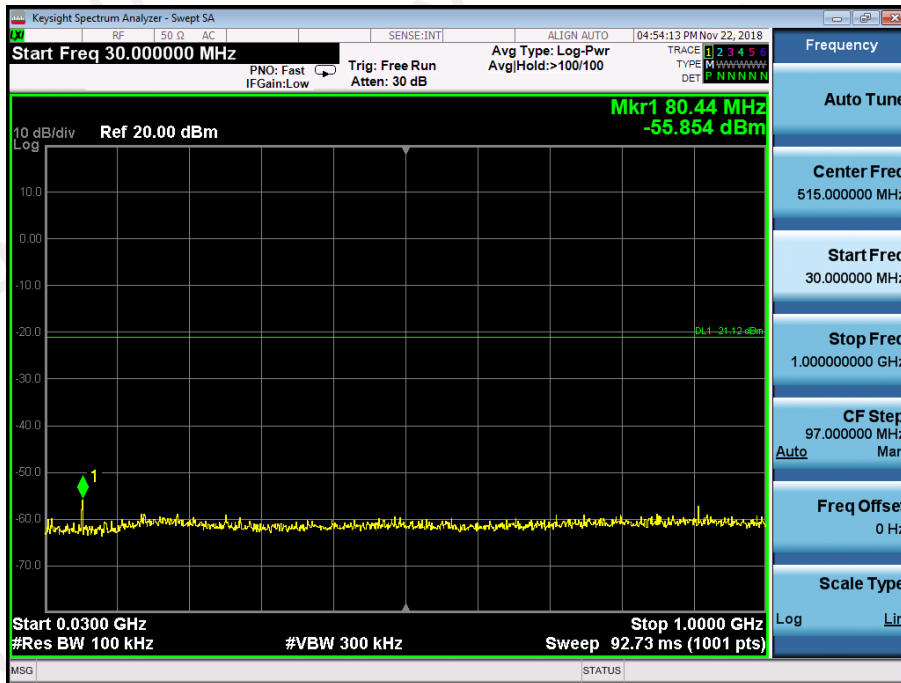


30MHz~1GHz

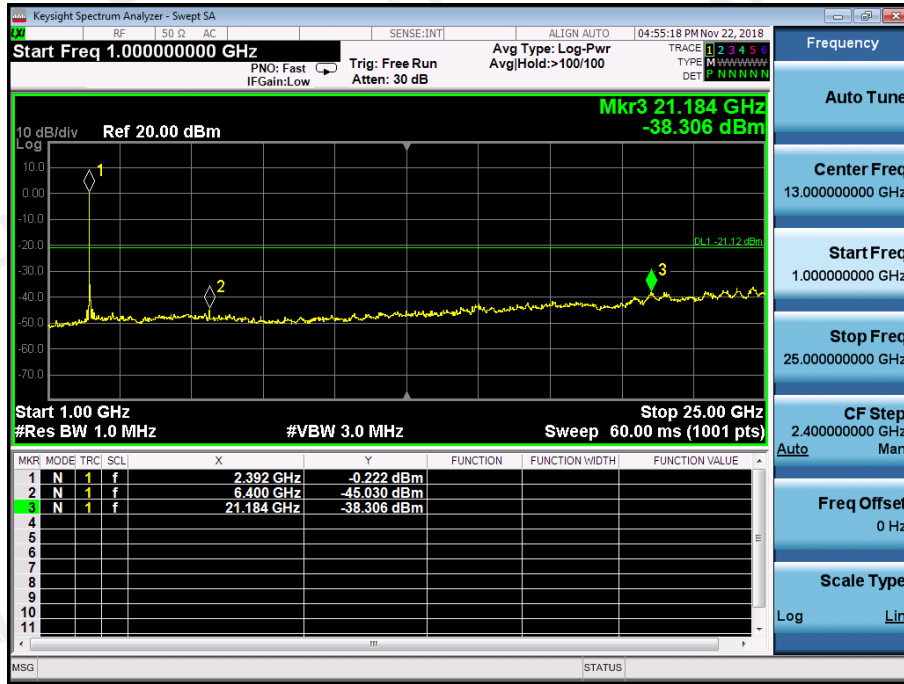

1GHz~25GHz

GFSK


CH: 2441MHz

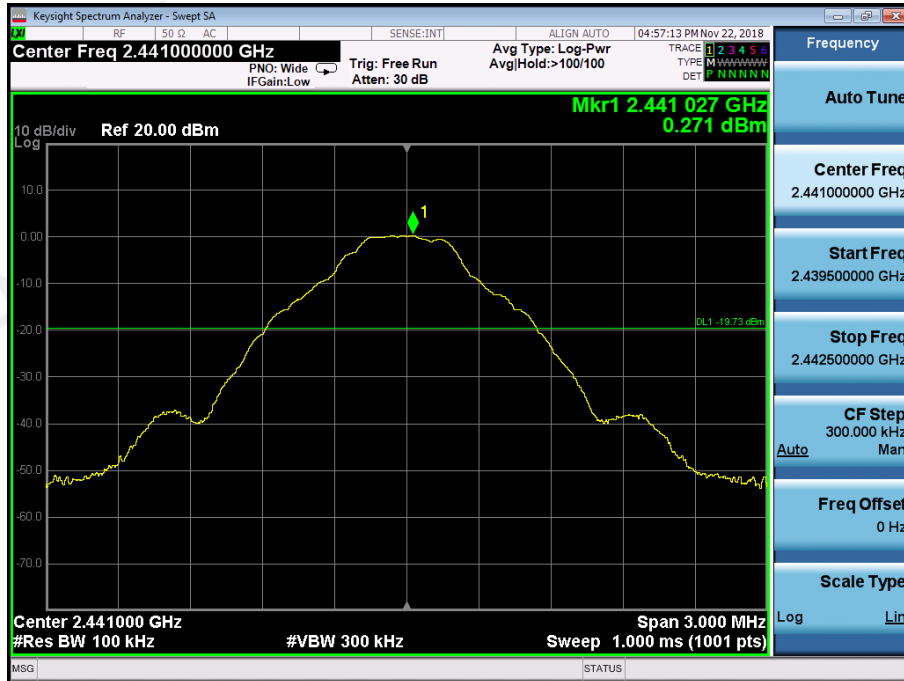




GFSK

CH: 2480MHz

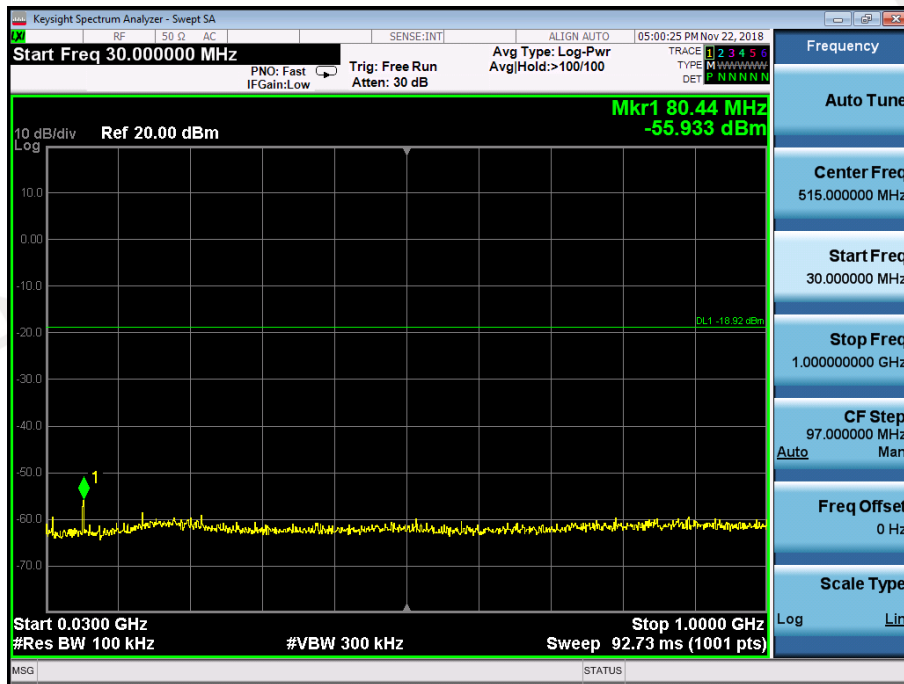

30MHz~1GHz

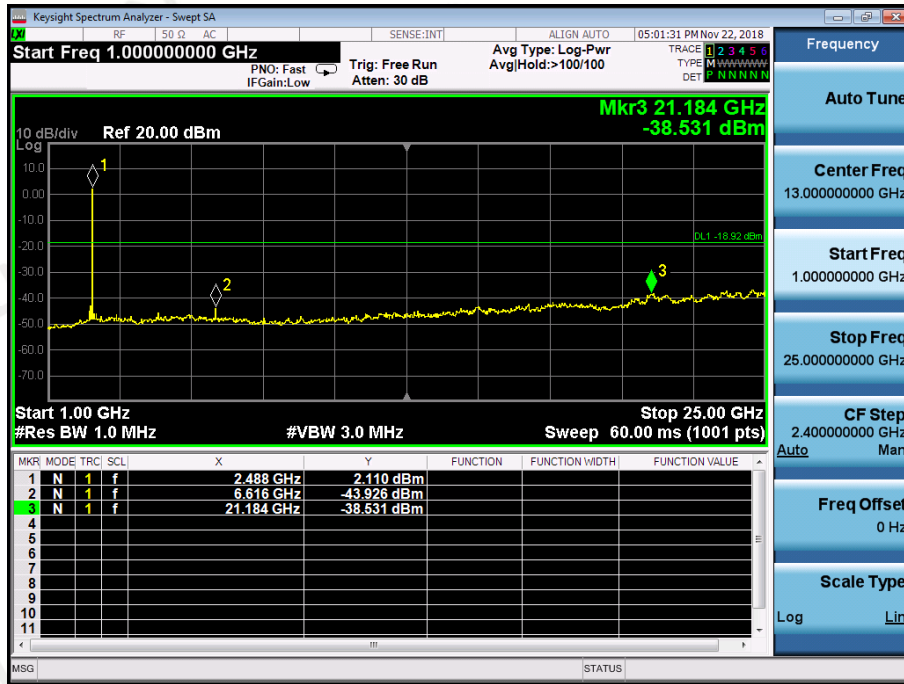

1GHz~25GHz

11. NUMBER OF HOPPING FREQUENCY


11.1 Test Limit

Frequency hopping systems in the 2400 – 2483.5MHz band shall use at least 15 channels.

11.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=1MHz and VBW=3MHz.

11.3 Test Setup

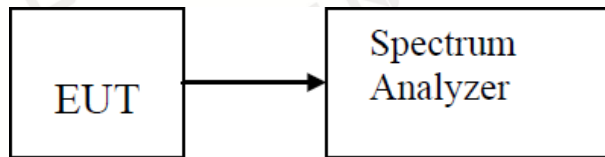


11.4 Test Result


PASS

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		


GFSK

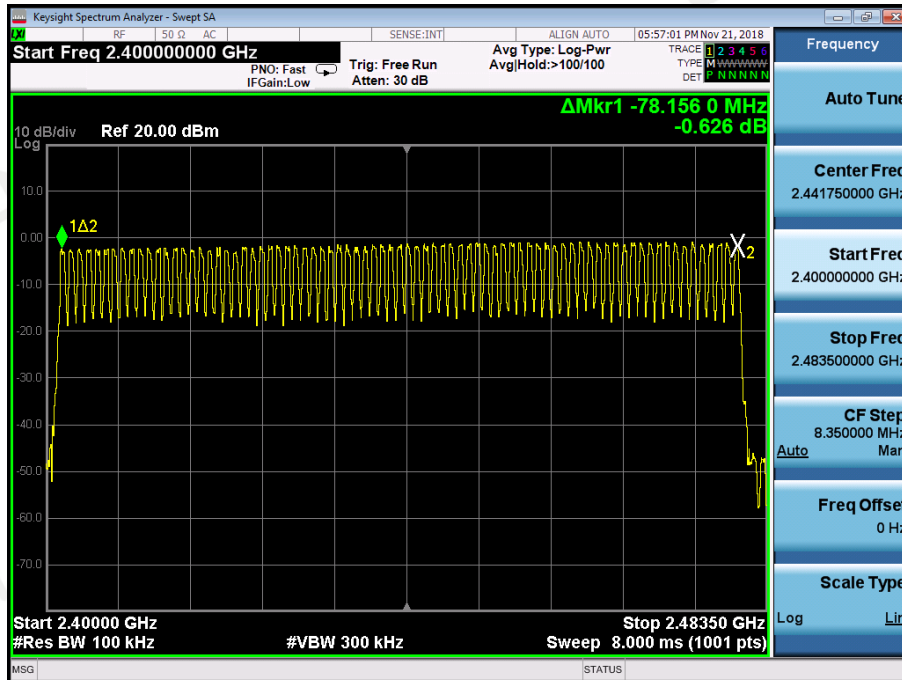

$\pi/4$ DQPSK

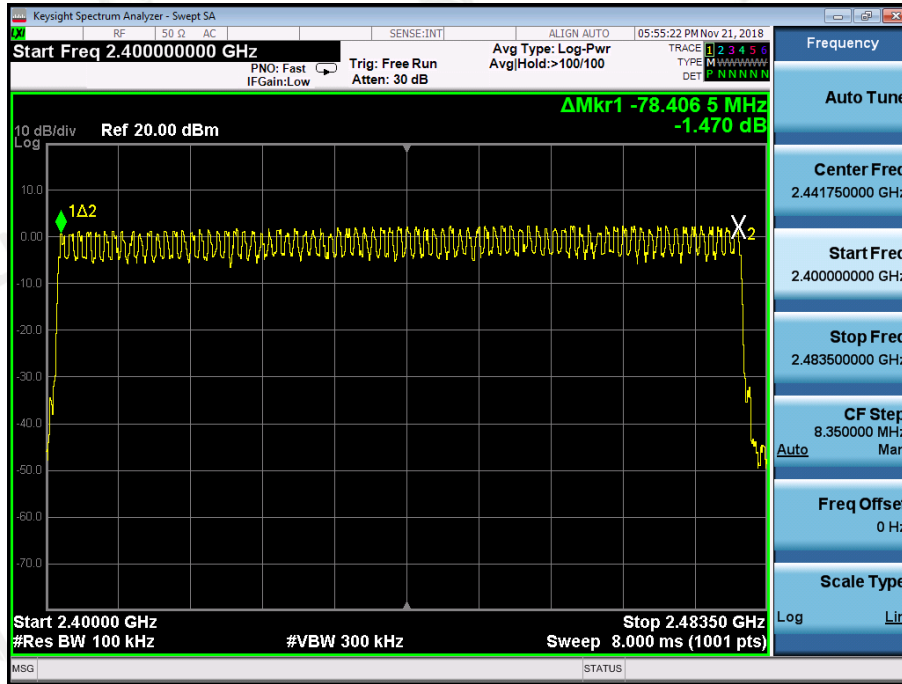

8DPSK

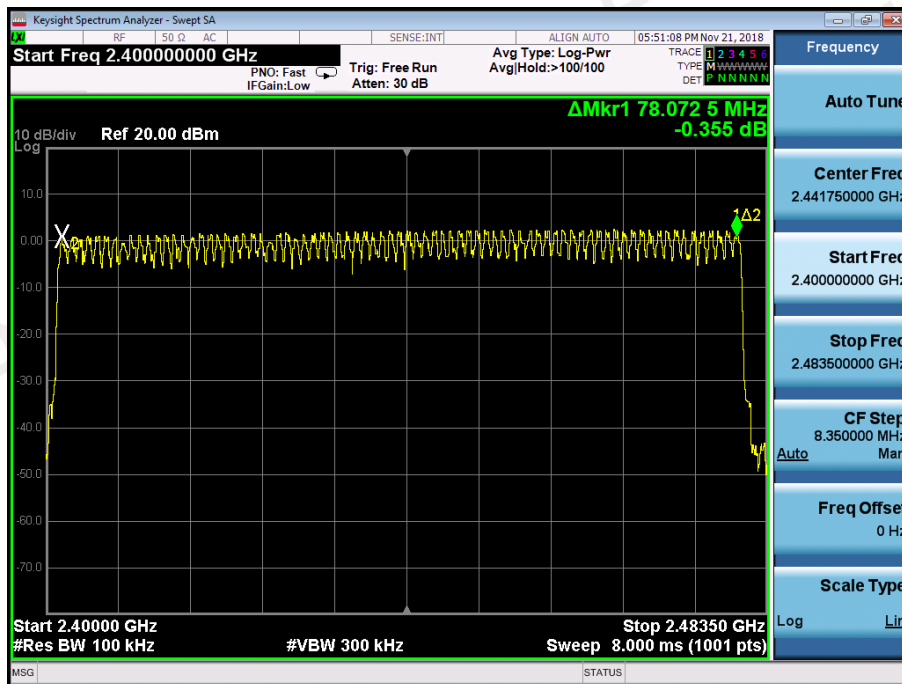

12. TIME OF OCCUPANCY(DWELL TIME)


12.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

12.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator.
Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz,Span=0Hz.

12.3 Test Setup

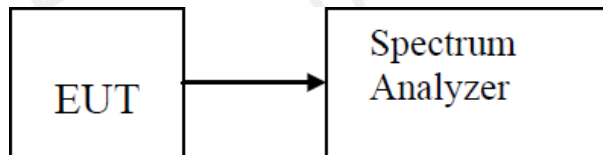


12.4 Test Result


PASS

Type	Modulation	CH	Pulse time(ms)	Dwell Time(ms)	Limit(ms)	Result
Dwell Time	GFSK	Low	2.94	313.600	400	Pass
		Mid	3.01	321.067	400	Pass
		High	2.99	318.933	400	Pass


CH: 2402MHz

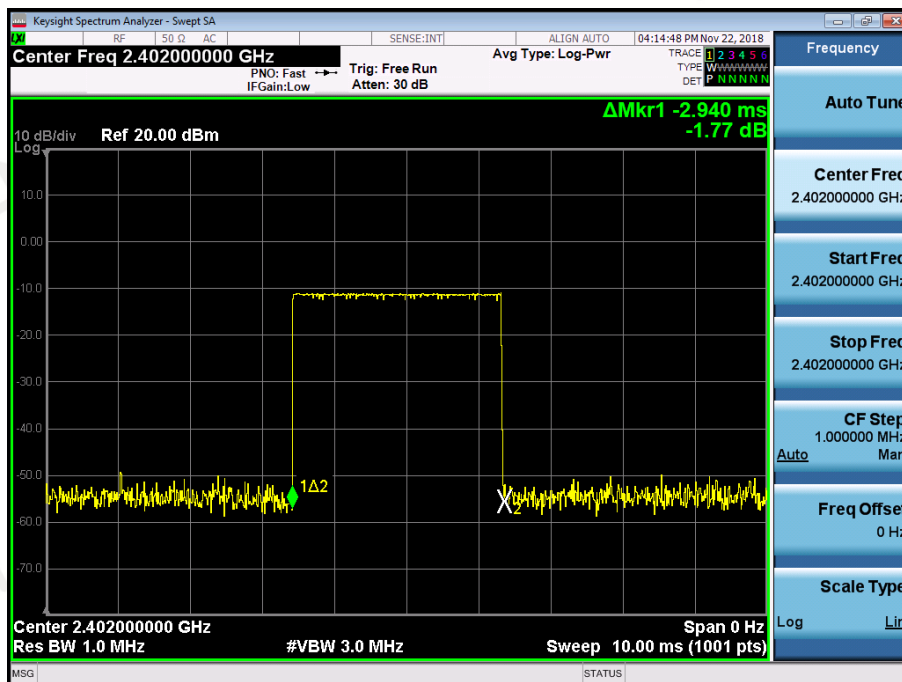

CH: 2441MHz

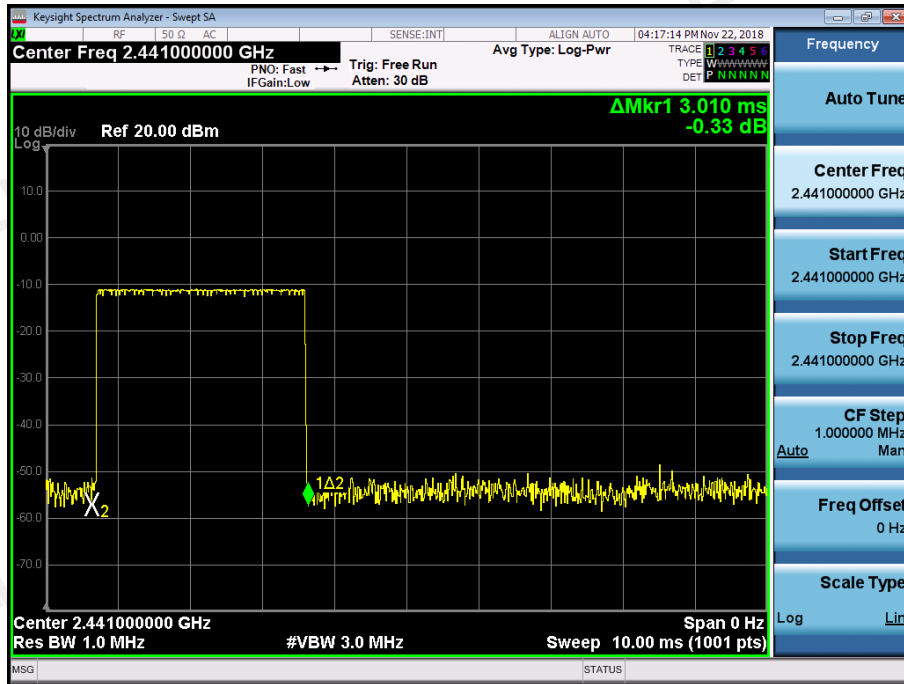


CH: 2480MHz

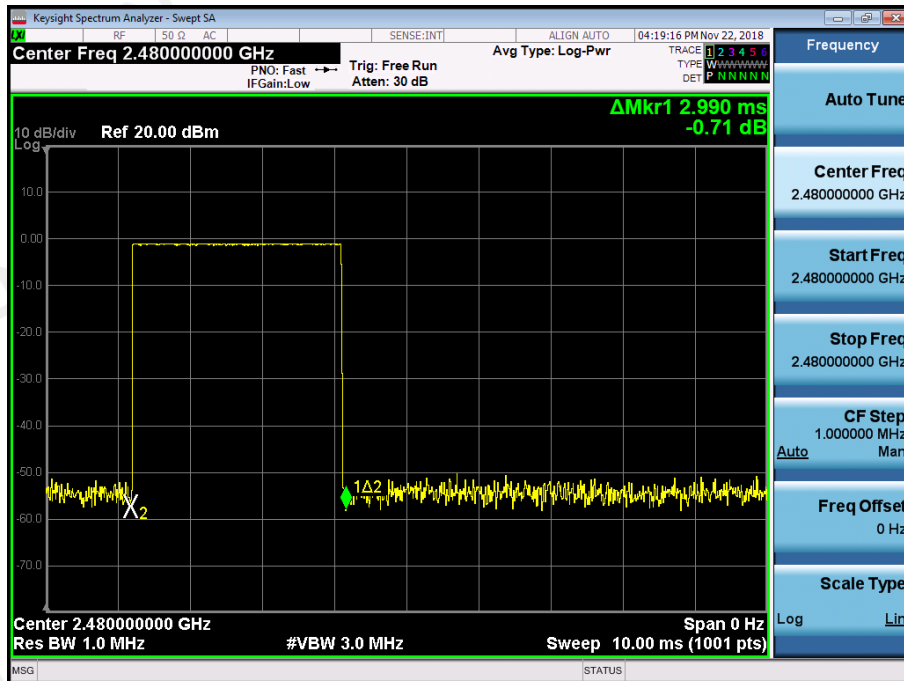


Type	Modulation	CH	Pulse time(ms)	Dwell Time(ms)	Limit(ms)	Result
Dwell Time	$\pi/4$ DQPSK	Low	2.95	314.667	400	Pass
		Mid	2.94	313.600	400	Pass
		High	2.93	312.533	400	Pass


CH: 2402MHz

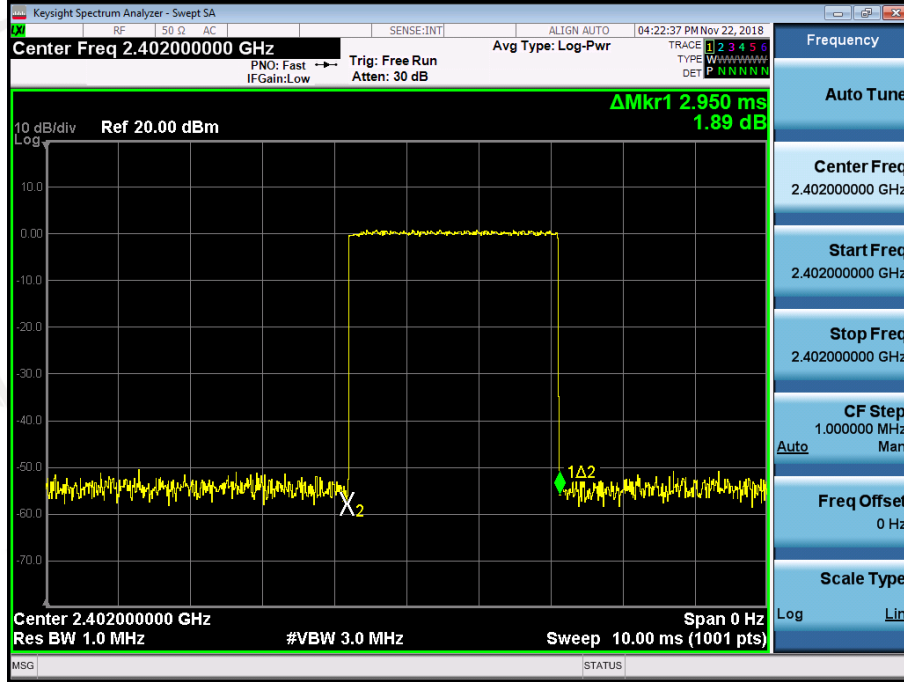

CH: 2441MHz

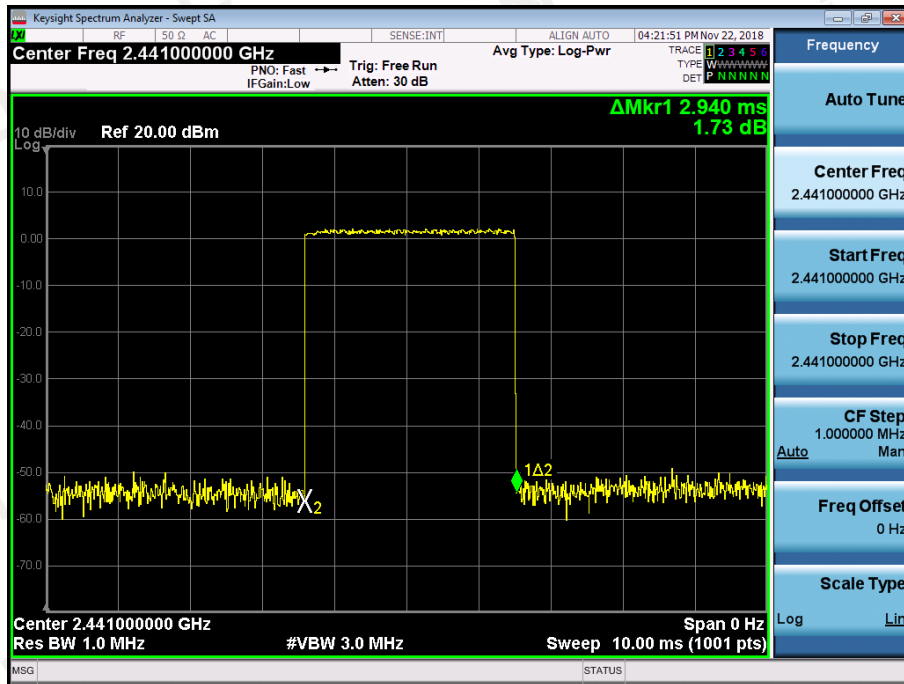


CH: 2480MHz

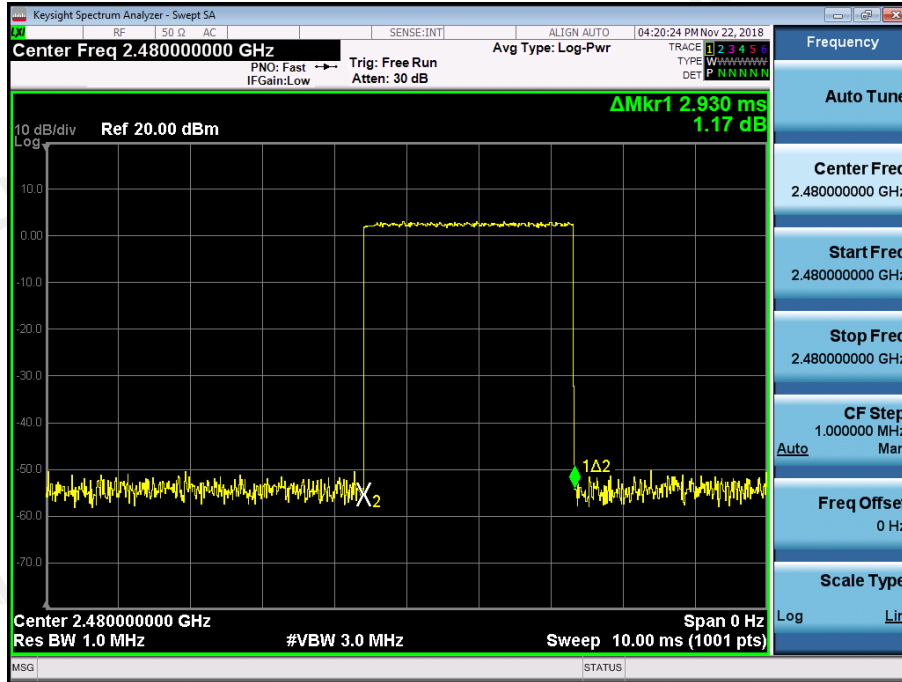


Type	Modulation	CH	Pulse time(ms)	Dwell Time(ms)	Limit(ms)	Result
Dwell Time	8DPSK	Low	2.99	318.933	400	Pass
		Mid	2.95	314.667	400	Pass
		High	2.95	314.667	400	Pass


CH: 2402MHz

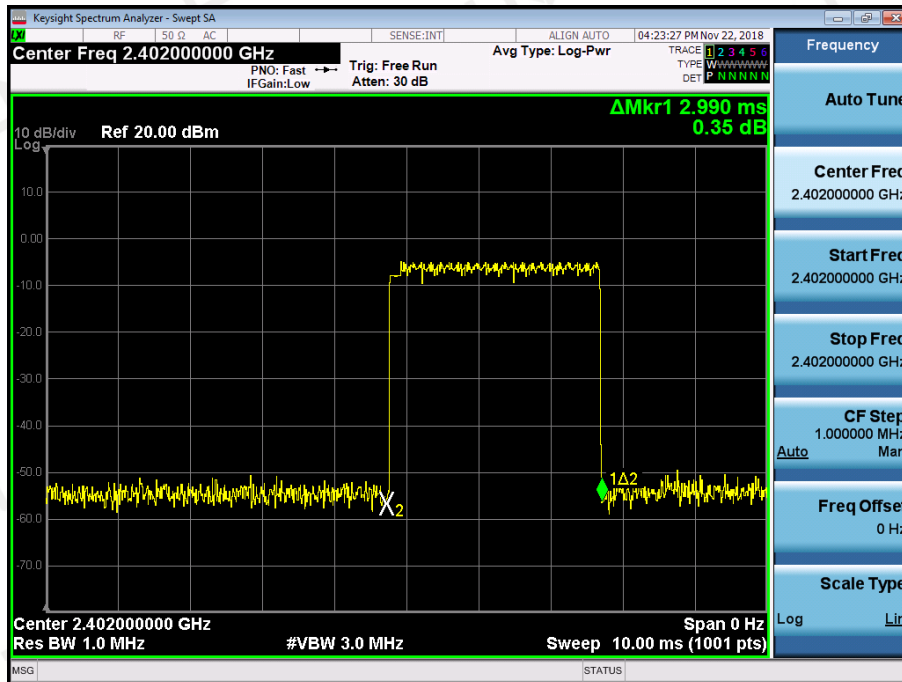

CH: 2441MHz

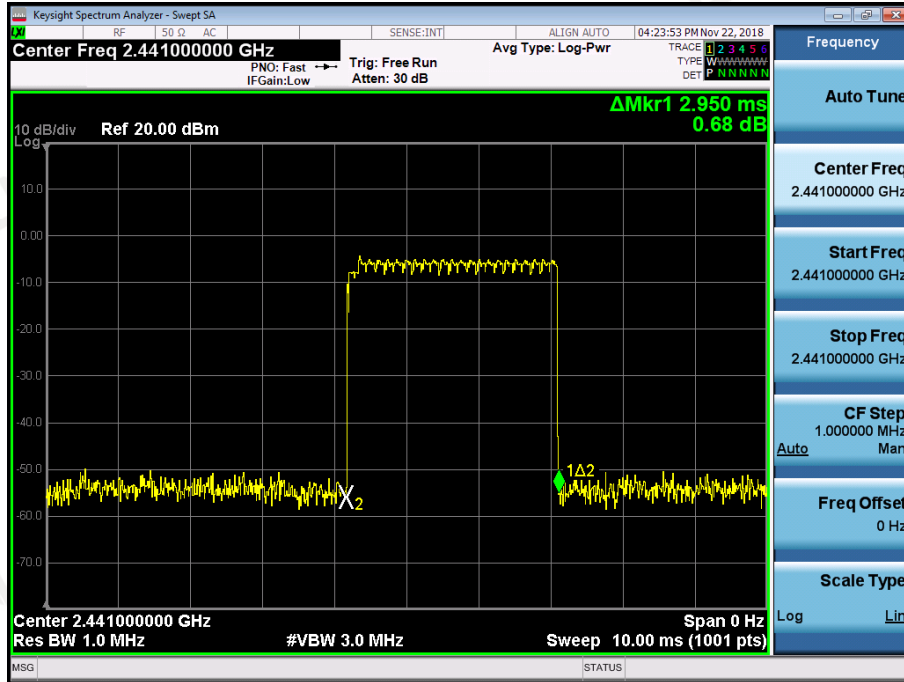

CH: 2480MHz

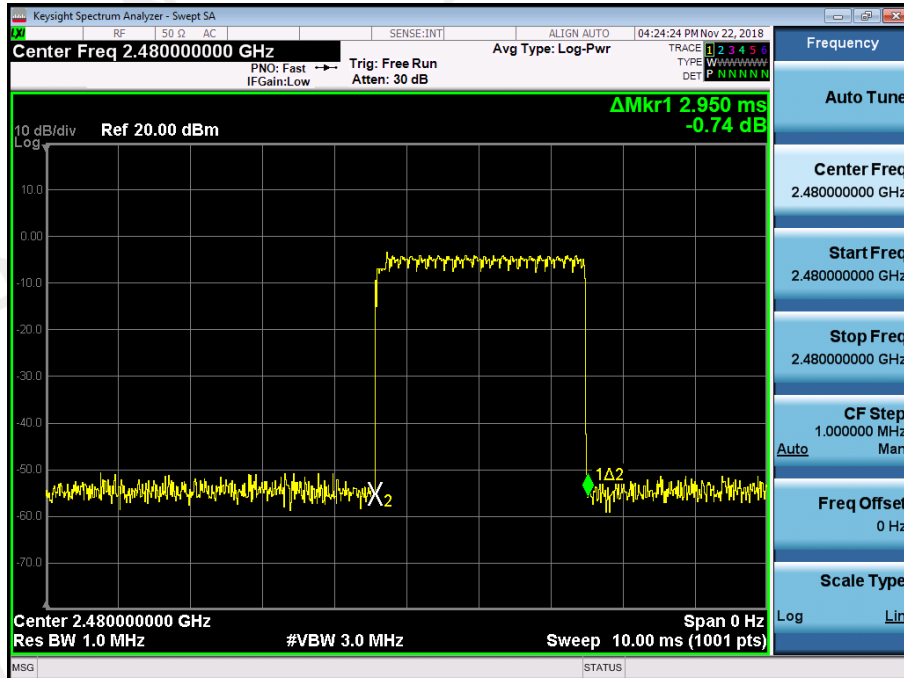

13. PSEUDORANDOM FREQUENCY HPPPING SEQUENCE

For 47 CFR Part 15C section 15.247 (a)(1) requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


TEUT Pseudorandom Frequency Hopping Sequence Requirement

The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

Number of shift register stages: 9


Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

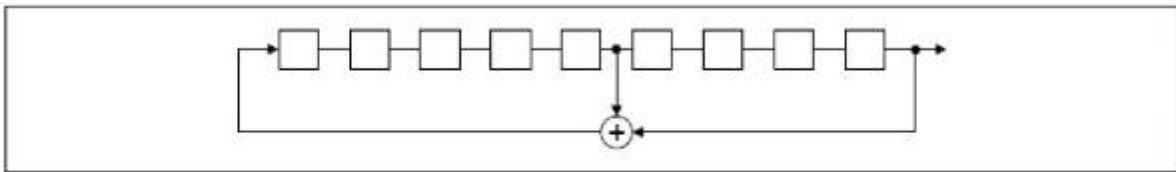

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

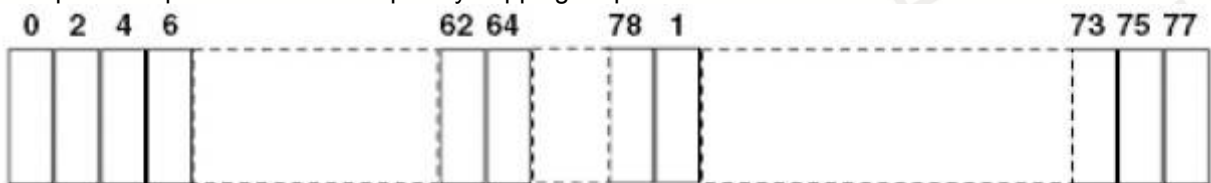

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

14. ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is an Internal Antenna, The directional gains of antenna used for transmitting is 0dBi.

ANTENNA:

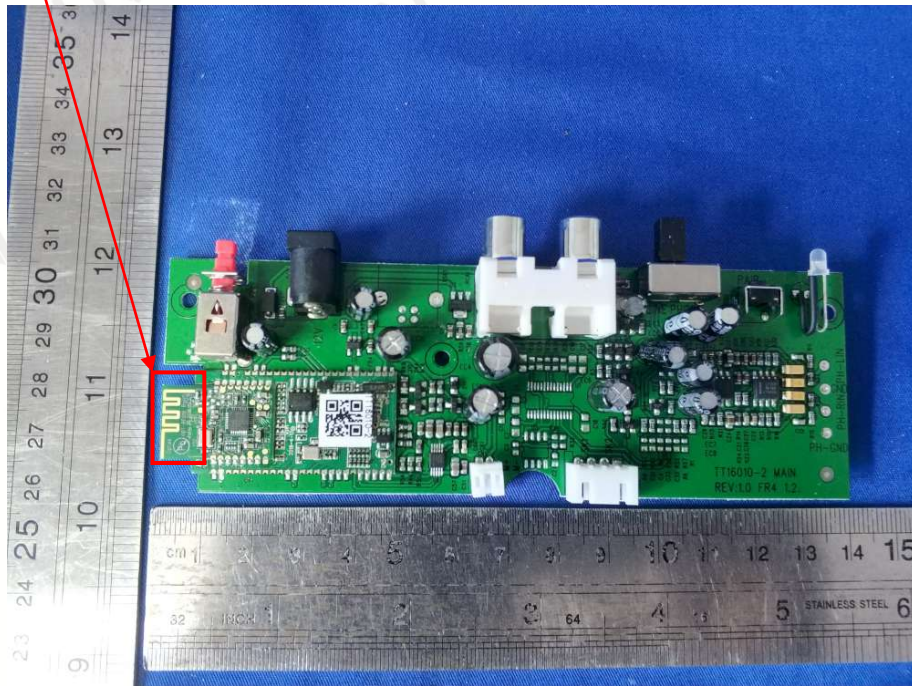

15. PHOTOGRAPH OF TEST

**Radiated Emission
(Below 1G)**



**Radiated Emission
(Above 1G)**



Conducted Emission



End of Report