

## **RF exposure Estimation**

#### 1. Introduction

Product: Wireless charger

Model no.: TC03

FCC ID: 2ANY2MTC03

Options and accessories: N/A

Rating: 5Vdc 1.0A Max supplied by an external adapter

**RF Transmission** 

117-175KHz

Frequency:

Antenna Type: Integrated coil antenna

Description of the EUT: The Equipment Under Test (EUT) is a wireless charger which operated

at 117-175kHz.

### 2. Limit and Guidelines on Exposure to Electromagnetic Fields

According to §1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)				
(A) Limits for Occupational/Controlled Exposure								
0.3-3.0	614	1.63	*100	6				
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6				
30-300	61.4	0.163	1.0	6				
300-1,500			f/300	6				
1,500-100,000			5	6				
(B) Limits for General Population/Uncontrolled Exposure								
0.3-1.34	614	1.63	*100	30				
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30				
30-300	27.5	0.073	0.2	30				
300-1,500			f/1500	30				
1,500-100,000			1.0	30				

f = frequency in MHz


<sup>\* =</sup> Plane-wave equivalent power density



# 3. Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Exposure Level Tester	Narda	ETL-400	K-0018	2020-05-16
B-Field Sensor	Narda	1Hz-400kHz	2300/90.10	2020-05-16

## 4. Test setup

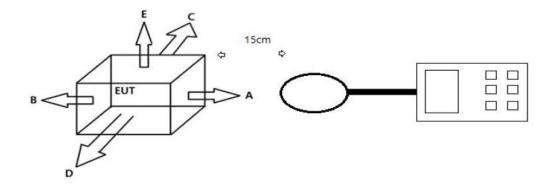

#### 5. Test Result

Project Manager

Electric Field Emissions							
Test Position	Test Distance (cm)	Measure Value (V/m)	Limit (V/m)	50% Limit (V/m)	Result		
Α	15	38.25	614	307	Pass		
В	15	39.40	614	307	Pass		
С	15	32.01	614	307	Pass		
D	15	35.55	614	307	Pass		
E	15	40.11	614	307	Pass		
Magnetic Field Emissions							
Test Position	Test Distance (cm)	Measure Value (A/m)	Limit (A/m)	50% Limit (A/m)	Result		
Α	15	0.102	1.63	0.815	Pass		
В	15	0.101	1.63	0.815	Pass		
С	15	0.077	1.63	0.815	Pass		
D	15	0.098	1.63	0.815	Pass		
Е	15	0.103	1.63	0.815	Pass		

Remark: test standard refers to KDB 680106 D01 v03.

Reviewed by: Prepared by: Tested by:

John Zhi Alan Xiong Tree Zhan

**Test Engineer** 

Project Engineer