



FCC LISTED, REGISTRATION  
 NUMBER: 720267

Informe de ensayo nº:  
 Test report No:

ISED LISTED REGISTRATION  
 NUMBER 4621A-2

**NIE: 55553RRF.001**

## Test report

USA FCC Part 15.247, 15.209  
 CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and  
 5725 - 5850 MHz.

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt  
 Local Area Network (LE-LAN) Devices.

General Requirements and Information for the Certification of Radio Apparatus.

<b>Identificación del objeto ensayado.....:</b> Identification of item tested	Electro-mechanic lock
<b>Marca .....</b> Trademark	Ojmar
<b>Modelo y/o referencia tipo .....</b> Model and /or type reference	NEXO NLX1
<b>Other identification of the product .....</b>	FCC ID: 2ANY7OJM002
<b>Final HW version .....</b>	Main board: Hw2.0 Antenna: Hw1.8
<b>Final SW version .....</b>	Not provided data
<b>Características .....</b> Features	Technologies -WIFI:  Lock, by default, Works with 802.11g protocol (Assuming that router is working in that protocol too). If router is working in 802.11b protocol, lock will work in 802.11b protocol too. Working channels are configurable (From 1 to 13). Common used channels are 1, 6 or 11 (One per system). WiFi module that is integrated in the lock does not support 802.11n standard.
<b>Solicitante .....</b> Applicant	OJMAR S.A. Polígono Industrial de Lerun s/n 20870, Elgoibar, Gipuzkoa, SPAIN
<b>Método de ensayo solicitado, norma.....:</b> Test method requested, standard	USA FCC Part 15.247 10-1-17 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 10-1-17 Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 4 (November 2014). Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 04/05/2017.  ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

<b>Resultado</b> .....	IN COMPLIANCE
Summary	
<b>Aprobado por (nombre / cargo y firma)</b> .....	A. Llamas
Approved by (name / position & signature)	RF Lab. Manager
<b>Fecha de realización</b> .....	2018-02-15
Date of issue	
<b>Formato de informe No.</b> .....	FDT08_20
Report template No	

# Index

Competences and guarantees.....	4
General conditions.....	4
Uncertainty .....	4
Usage of samples.....	5
Test sample description .....	5
Identification of the client .....	5
Testing period.....	6
Environmental conditions.....	6
Remarks and comments.....	7
Testing verdicts .....	8
Appendix A – Test result “WiFi 2.4 GHz (802.11b/g)” .....	9

## Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

DEKRA Testing and Certification is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: ISED 4621A-2.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

## General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

## Uncertainty

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification internal document PODT000.

## Usage of samples

Samples undergoing test have been selected by: **the client**

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
55553/032	Electro-mechanic lock	NEXO NLX1	---	2017-12-22

1. Sample S/01 has undergone following test(s).  
All radiated tests indicated in appendix A.

Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
55553/033	Electro-mechanic lock with temporary antenna connector	NEXO NLX1	---	2018-01-08

1. Sample S/02 has undergone following test(s).  
All conducted tests indicated in appendix A.

## Test sample description

RFID “locker lock” device @ 13,56 MHz power supplied by 4 AA alkaline non-rechargeable batteries. Includes NFC communication for maintenance purposes. Devices also includes a WiFi antenna @ 2.4GHz in order to communicate with an already certified router

Operation modes:

- On line: lock communicates with a card (RFID communication). After that Reading, lock communicates via WiFi with the server. This server is the one that grants or denies the card permissions and sends back an order to the lock in order to open/close/reject operation.
- Off line: Lock Works as a regular RFID lock. Once card is approached lock will perform the operation (No WiFi communication is made).

In both cases, NFC communication is made for maintenance purposes.

## Identification of the client

OJMAR S.A

Polígono Industrial de Lerun s/n

20870, Elgoibar, Gipuzkoa, SPAIN

## Testing period

The performed test started on 2017-12-22 and finished on 2018-01-08.

The tests have been performed at DEKRA Testing and Certification.

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %
<b>Shielding effectiveness</b>	> 100 dB
<b>Electric insulation</b>	> 10 kΩ
<b>Reference resistance to earth</b>	< 1 Ω

In the semianechoic chamber, the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar
<b>Shielding effectiveness</b>	> 100 dB
<b>Electric insulation</b>	> 10 kΩ
<b>Reference resistance to earth</b>	< 1 Ω
<b>Normal site attenuation (NSA)</b>	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
<b>Field homogeneity</b>	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar
<b>Shielding effectiveness</b>	> 100 dB
<b>Electric insulation</b>	> 10 kΩ
<b>Reference resistance to earth</b>	< 1 Ω

## Remarks and comments

1; The tests have been performed by the technical personnel: José Alberto Aranda.

2: Used instrumentation:

### Conducted Measurements

	Last Cal. date	Cal. due date
1. Spectrum analyser Agilent E4440A	2017/10	2019/10
2. Signal and spectrum analyzer R&S FSV40	2017/07	2019/07
3. Wideband Power sensor R&S NRP-Z81	2017/04	2019/04

### Radiated Measurements

	Last Cal. date	Cal. due date
1. Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2. BiconicalLog antenna ETS LINDGREN 3142E	2017/07	2020/04
3. Multi Device Controller EMCO 2090	N.A.	N.A.
4. Double-ridge Guide Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2016/11	2019/11
5. Broadband Horn antenna 18-40 GHz SCHWARZBECK BBHA 9170	2017/03	2020/03
6. EMI Test Receiver R&S ESU 40	2016/03	2018/03
7. Spectrum analyser Rohde & Schwarz FSW50	2015/12	2017/12
8. RF pre-amplifier 30 MHz-6 GHz BONN BLNA 0360-01N	2017/07	2018/07
9. RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-1M	2016/02	2018/02
10. RF pre-amplifier 18-40 GHz BONN ELEKTRONIK BLMA 1840-1M	2015/12	2017/12

## Testing verdicts

<b>Not applicable</b> .....	N/A
<b>Pass</b> .....	P
<b>Fail</b> .....	F
<b>Not measured</b> .....	N/M

### 1. WiFi 2.4 GHz (802.11b/g).

FCC PART 15 PARAGRAPH		VERDICT			
		NA	P	F	NM
Section 15.247 Subclause (a) (2) / RSS-247 5.2. (a)	6 dB Bandwidth		P		
Section 15.247 Subclause (b) / RSS-247 5.4. (d)	Maximum output power and antenna gain		P		
Section 15.247 Subclause (d) / RSS-247 5.5.	Emission limitations conducted (Transmitter)		P		
Section 15.247 Subclause (d) / RSS-247 5.5.	Band-edge emissions compliance (Transmitter)		P		
Section 15.247 Subclause (e) / RSS-247 5.2. (b)	Power spectral density		P		
Section 15.247 Subclause (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)		P		



## Appendix A – Test result “WiFi 2.4 GHz (802.11b/g)”

## INDEX

TEST CONDITIONS .....	11
Occupied Bandwidth .....	14
Section 15.247 Subclause (a) (2) / RSS-247 5.2. (a). 6 dB Bandwidth. 6 dB Bandwidth .....	18
Section 15.247 Subclause (b) / RSS-247 5.4. (d). Maximum output power and antenna gain .....	22
Section 15.247 Subclause (d) / RSS-247 5.5. Emission limitations conducted (Transmitter) .....	23
Section 15.247 Subclause (d) / RSS-247 5.5. Band-edge emissions compliance (Transmitter) .....	29
Section 15.247 Subclause (e) / RSS-247 5.2 (b). Power spectral density .....	31
Section 15.247 Subclause (d) / RSS-247 5.5. Emission limitations radiated (Transmitter) .....	35

## TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 6.0 \text{ Vdc}$$

$$V_{\text{max}} = \text{N/A}$$

$$V_{\text{min}} = \text{N/A}$$

The subscripts nom, min and max indicate voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

Type of power supply = DC voltage from alkaline batteries.

Type of antenna = Integral antenna

Operating Temperature Range (°C):

$$T_n = +15 \text{ to } +35$$

N/A: Not Applicable.

### TEST FREQUENCIES:

For WiFi 802.11b/g:

Lowest channel (1): 2412 MHz

Middle channel (6): 2437 MHz

Highest channel (11): 2462 MHz

The test set-up was made in accordance to the general provisions of FCC DTS Measurement 558074 D01 DTS Meas Guidance v04 dated 04/05/2017.

The sample was used to configure the EUT to continuously transmit at a specified output power in all channels with different modes and modulation schemes.

The field strength at the band edges was evaluated for each mode for the channel under test.

### CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer.



### RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).


For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission.


It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

### Radiated measurements setup $f < 1$ GHz

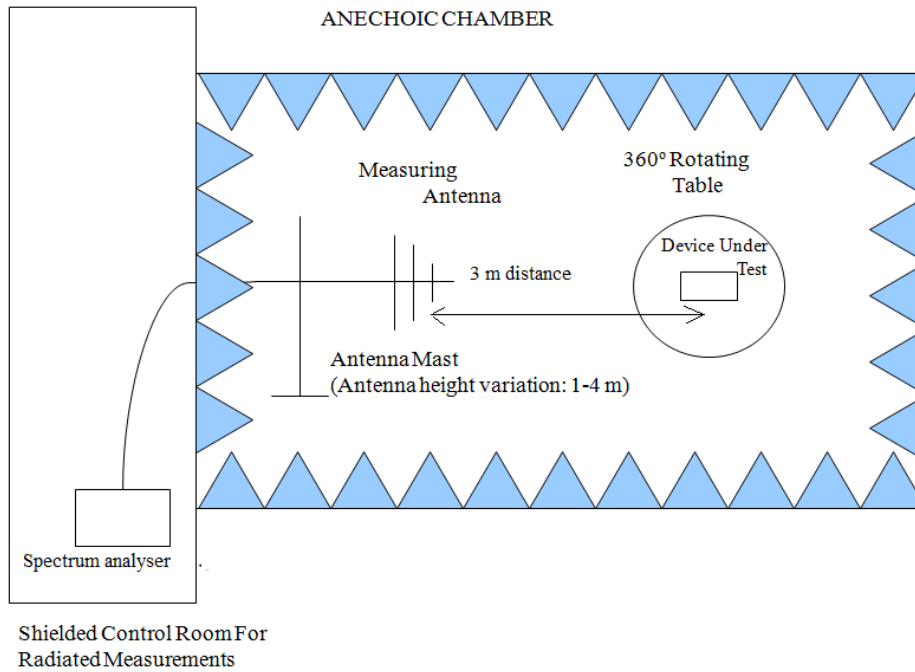

### Radiated measurements setup $f > 1$ GHz

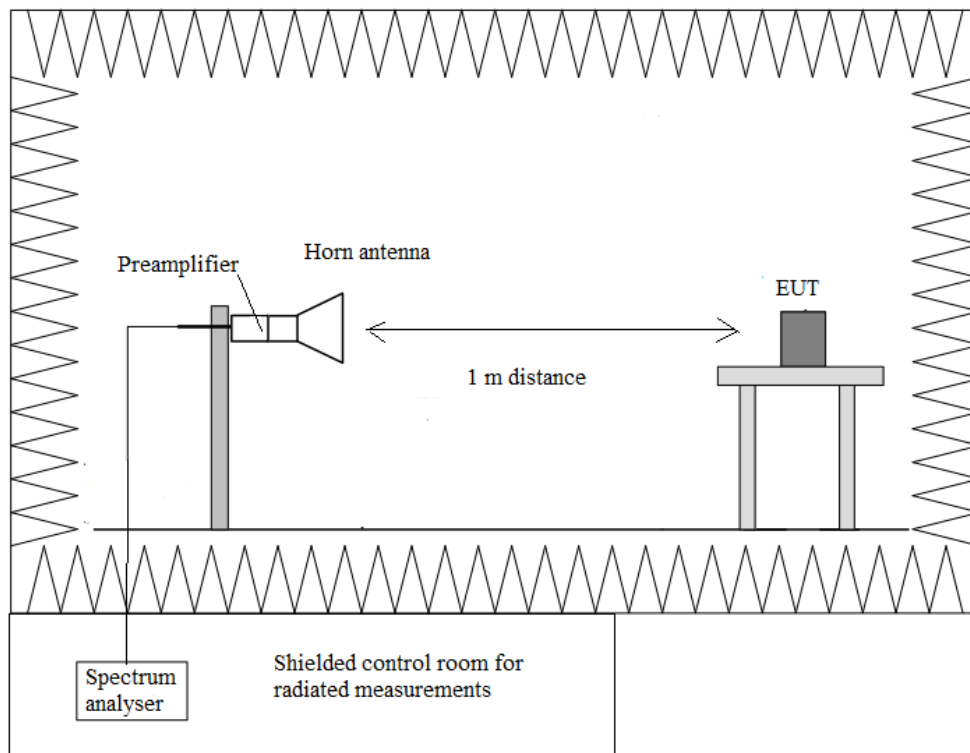

## Occupied Bandwidth

### RESULTS

(see next plots)

#### Mode B


	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
99% bandwidth (MHz)	14.4457	14.3929	14.4998
-26 dBc bandwidth (MHz)	17.7670	17.8330	17.7320
Measurement uncertainty (kHz)	<±50		

#### Mode G


	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
99% bandwidth (MHz)	16.7407	16.8482	16.6929
-26 dBc bandwidth (MHz)	23.0280	24.5430	23.2320
Measurement uncertainty (kHz)	<±50		

Mode B


Lowest Channel

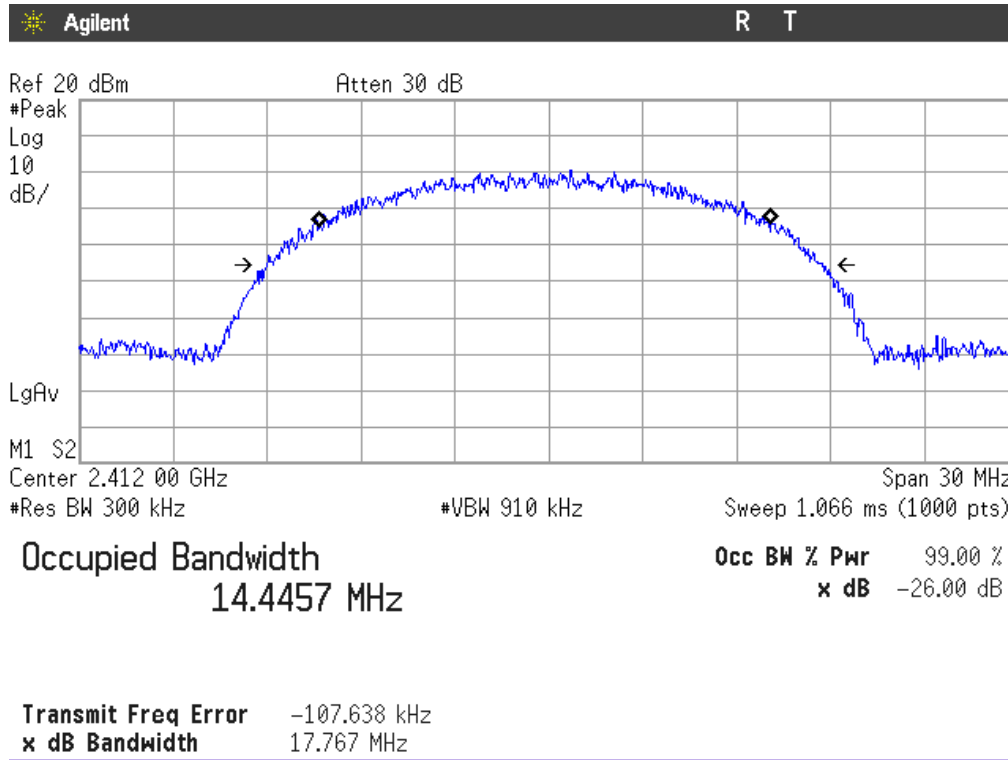

Middle Channel

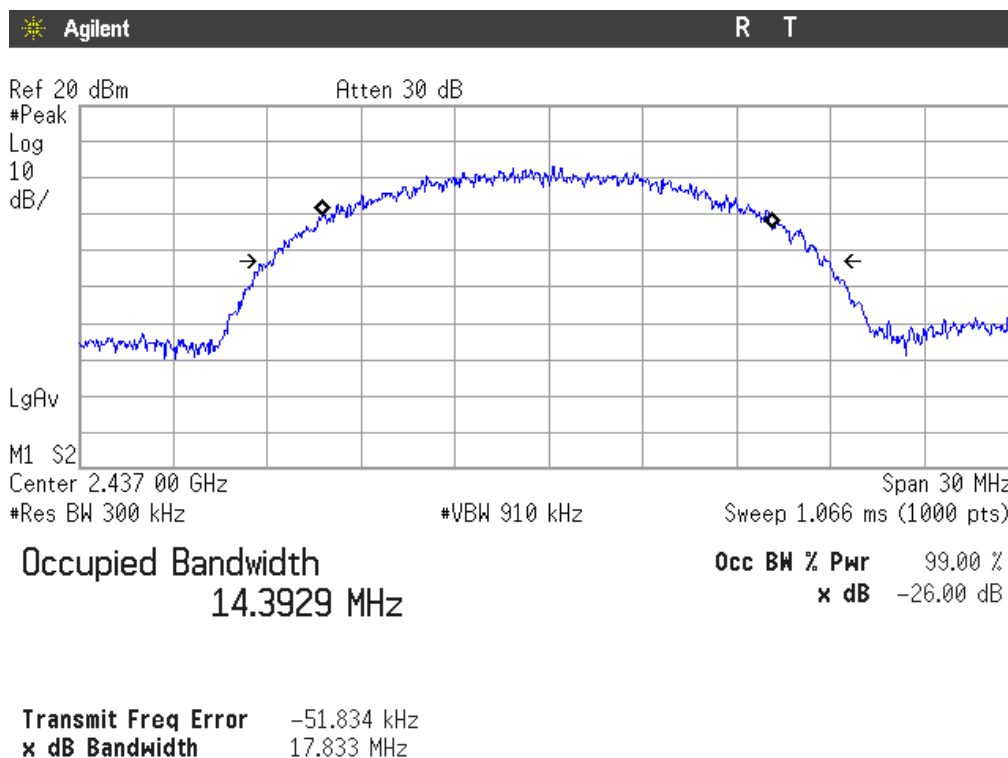


### Highest channel

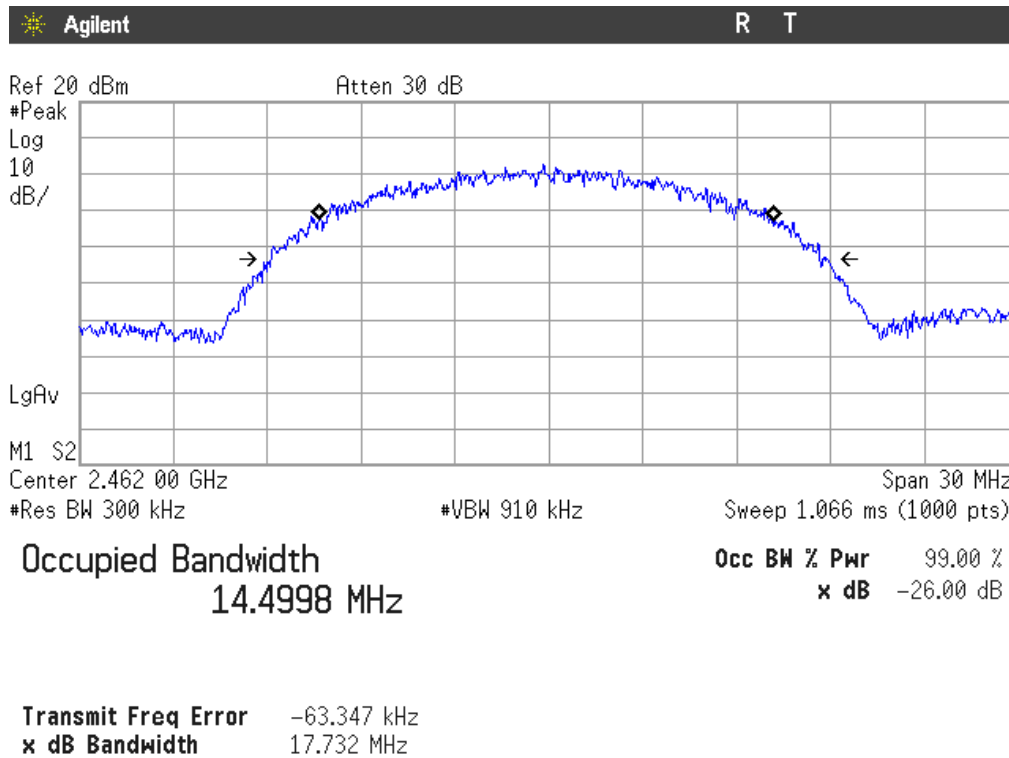


### Mode G

### Lowest Channel

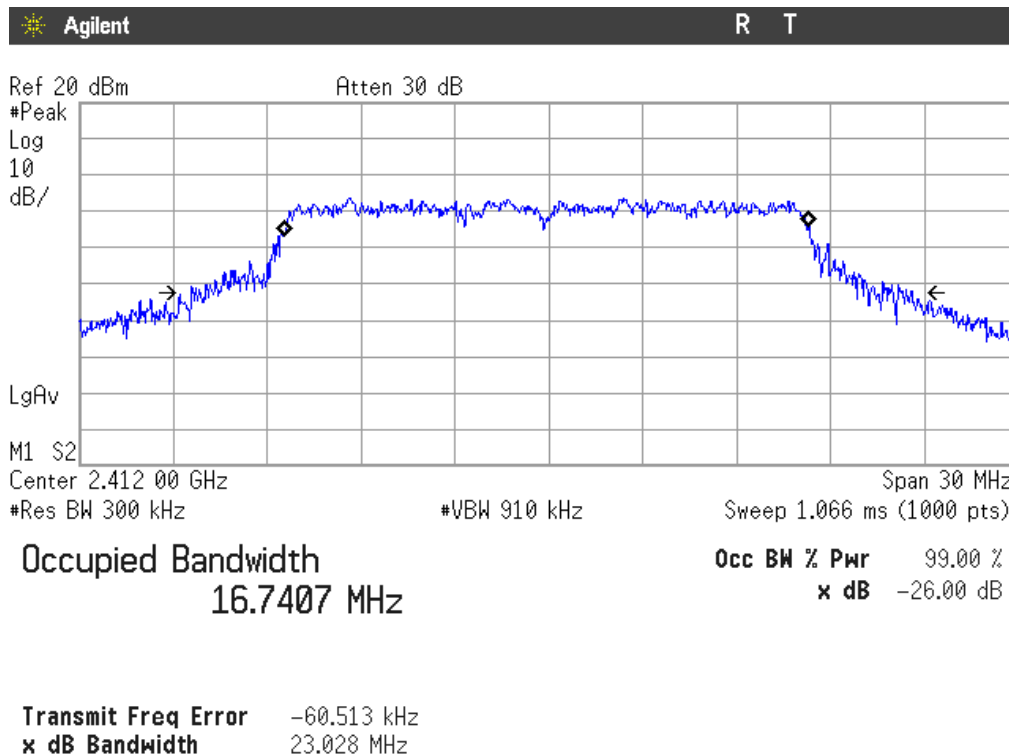




### Middle Channel

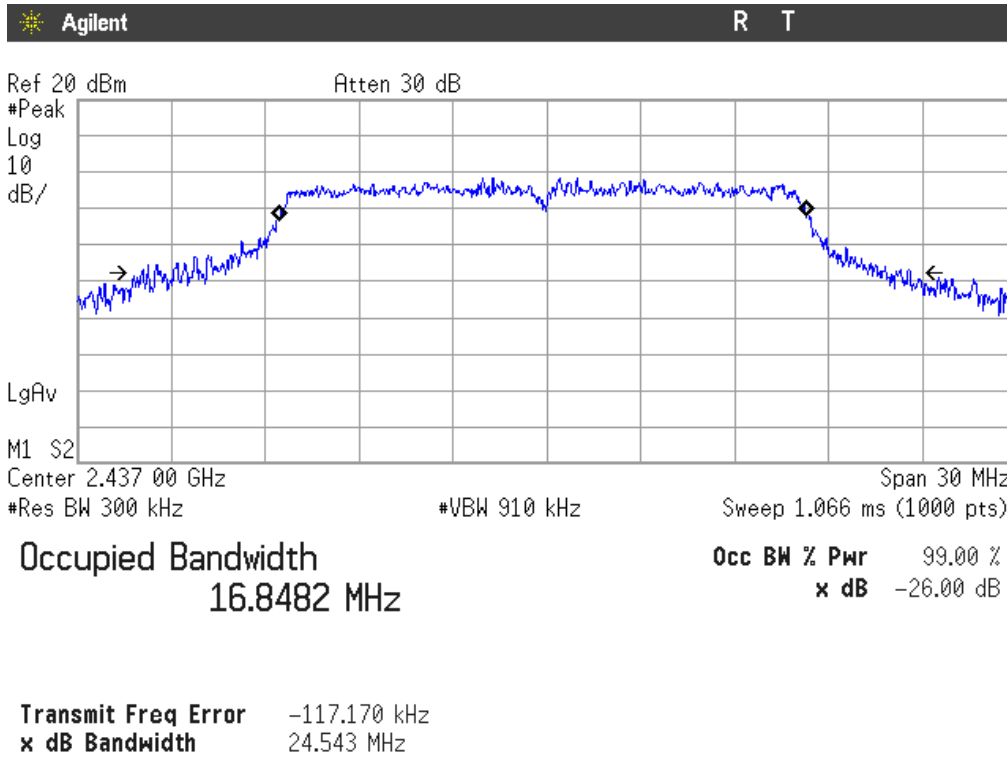

### Highest Channel

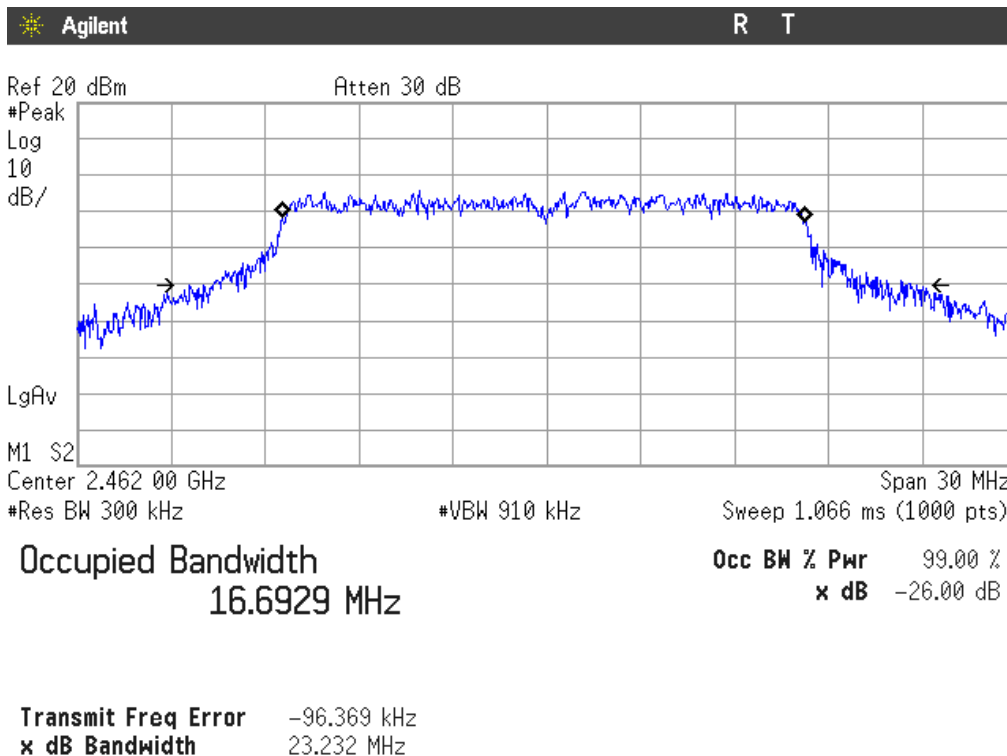

**Section 15.247 Subclause (a) (2) / RSS-247 5.2. (a). 6 dB Bandwidth. 6 dB Bandwidth**

SPECIFICATION

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

6 dB Bandwidth (see next plots).

Mode B

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6 dB Spectrum bandwidth (MHz)	9.850	9.790	10.130
Measurement uncertainty (kHz)	<±65.0		

Mode G


	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6 dB Spectrum bandwidth (MHz)	16.436	16.016	16.356
Measurement uncertainty (kHz)	<±65.0		

Verdict: PASS


6 dB BANDWIDTH.

Mode B


Lowest Channel

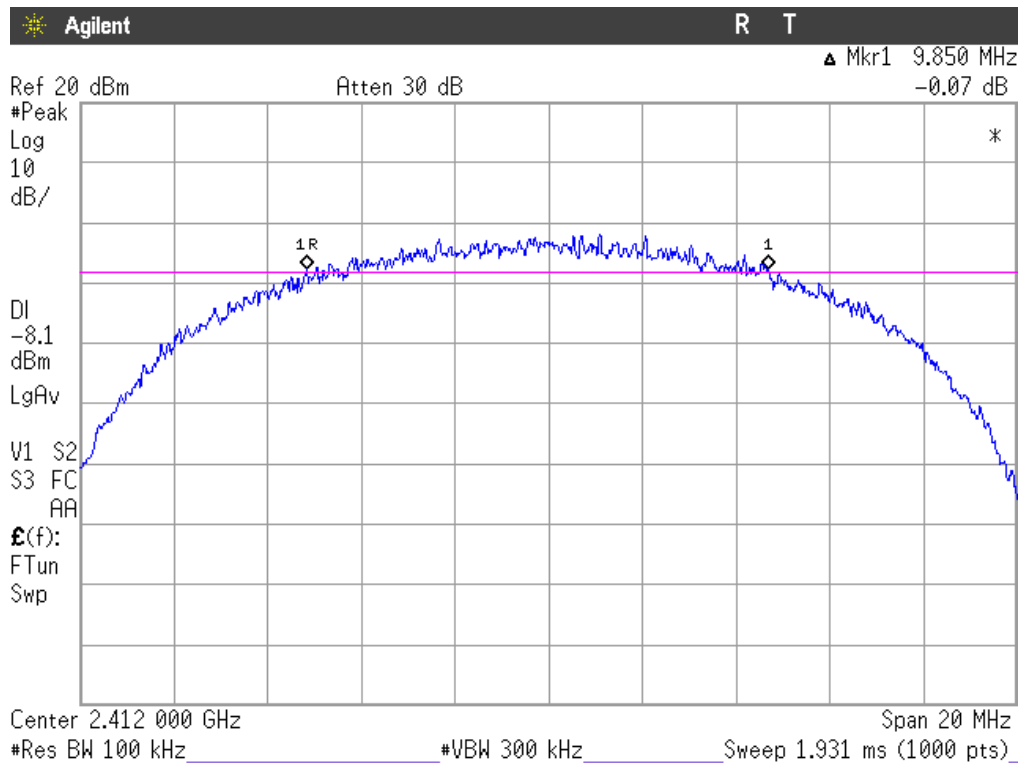

Middle Channel

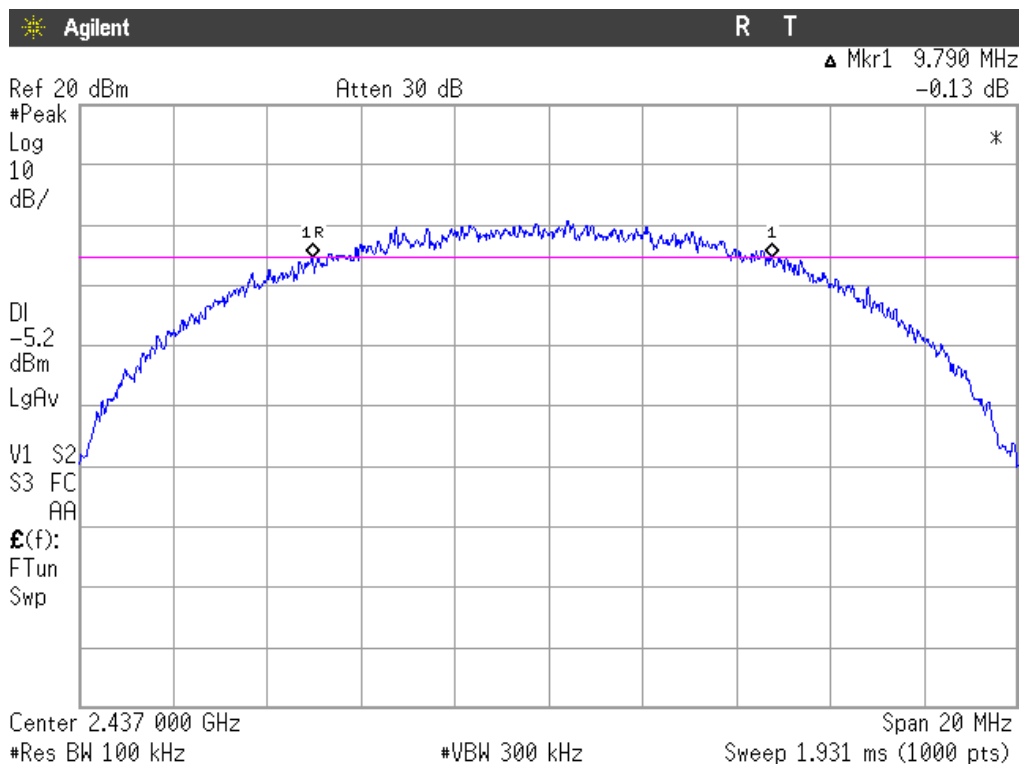


### Highest Channel

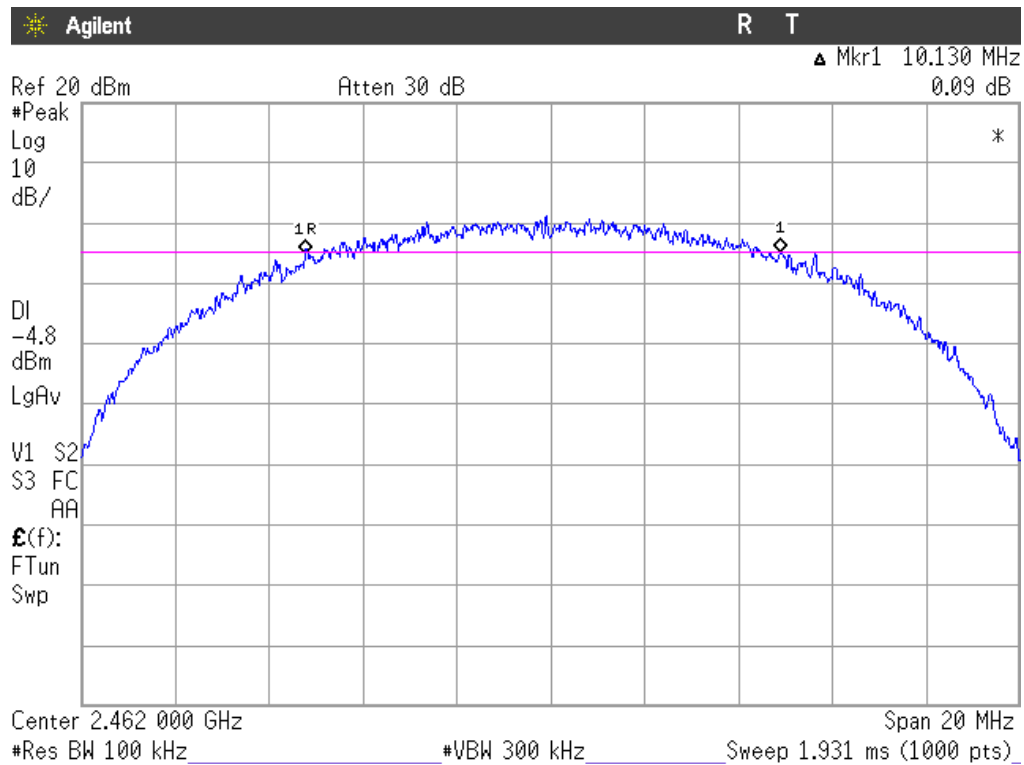


### Mode G


### Lowest Channel

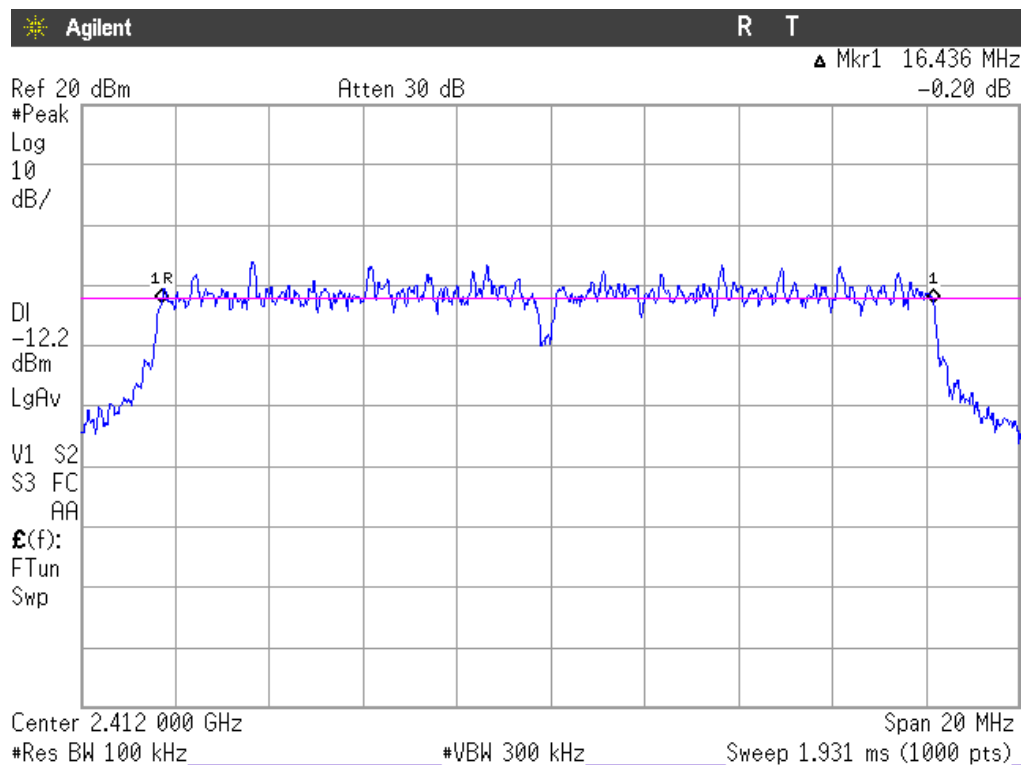

### Middle Channel

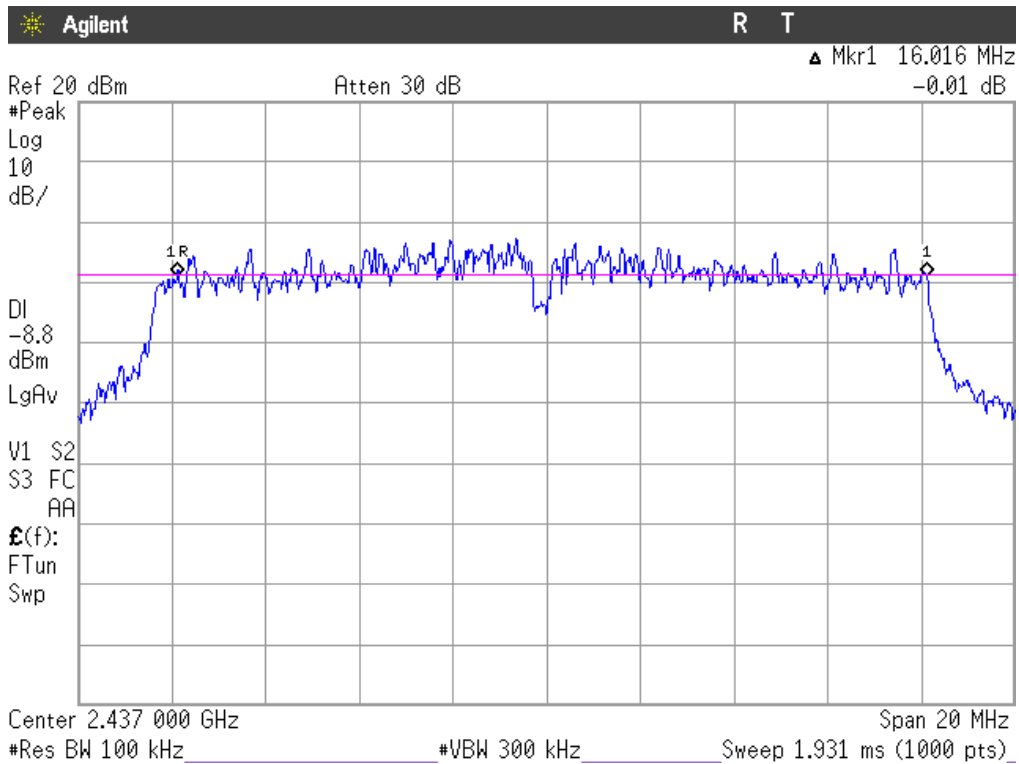

### Highest Channel

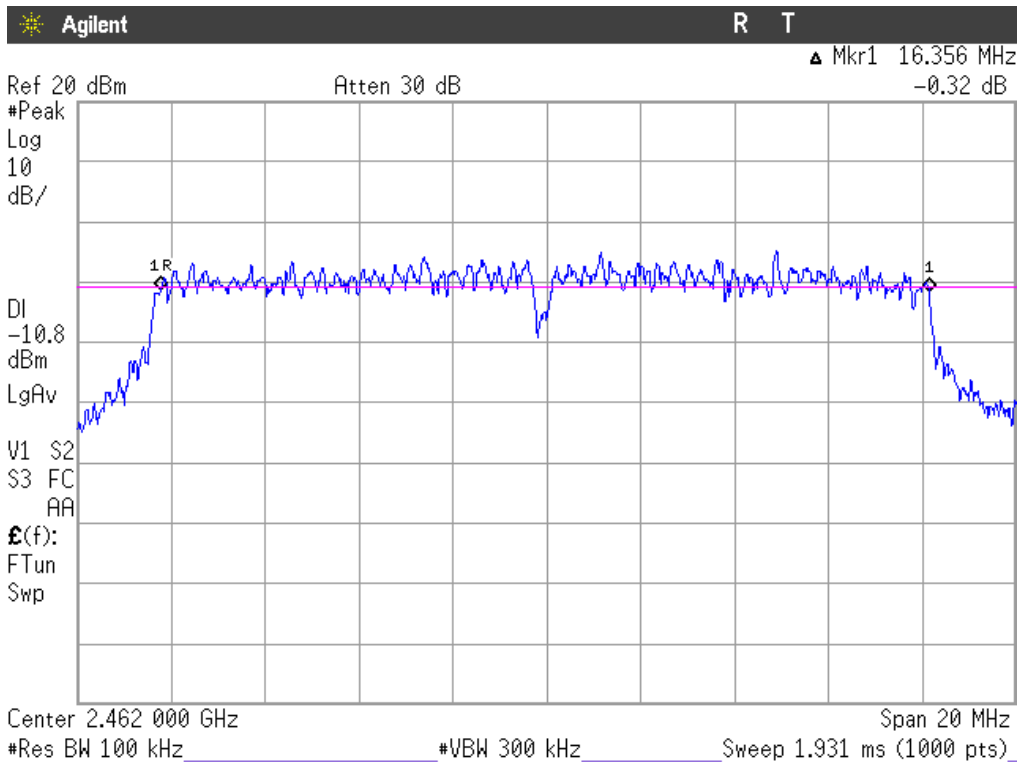

**Section 15.247 Subclause (b) / RSS-247 5.4. (d). Maximum output power and antenna gain**

**SPECIFICATION**

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).

The e.i.r.p. shall not exceed 4 W (36 dBm) (Canada).

**RESULTS**

For all modes, the maximum conducted output power was measured using the method according to point 9.1.3 (PKPM1 Peak-reading power meter method) of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Maximum declared antenna gain: 2.0 dBi.

**Mode B: Peak Conducted Output Power:**

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Maximum conducted power (dBm)	10.81	11.04	12.48
Maximum EIRP power (dBm)	12.81	13.04	14.48
Measurement uncertainty (dB)	<±0.33		

**Mode G: Peak Conducted Output Power:**

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Maximum conducted power (dBm)	13.15	13.57	14.13
Maximum EIRP power (dBm)	15.15	15.57	16.13
Measurement uncertainty (dB)	<±0.33		

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Verdict: PASS

**Section 15.247 Subclause (d) / RSS-247 5.5. Emission limitations conducted (Transmitter)**

**SPECIFICATION**

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

**RESULTS:**

Reference Level Measurement

Mode B

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Reference Level Measurement (dBm)	-0.17	1.14	1.60
Measurement uncertainty (dB)	<±0.78		

Mode G

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Reference Level Measurement (dBm)	-2.30	-1.47	-0.11
Measurement uncertainty (dB)	<±0.78		

Mode B

Lowest Channel

Lowest frequency 2412 MHz	Limit (dBm)
All peaks are more than 20 dB below the limit.	-20.17

Middle Channel

Middle frequency 2437 MHz	Limit (dBm)
All peaks are more than 20 dB below the limit.	-18.86

Highest Channel

Spurious frequency (MHz)	Emission Level (dBm)	Limit (dBm)
882.73	-32.72	-18.40
1890.68	-38.06	-18.40
Measurement uncertainty (dB)	<±0.78	

Mode G

Lowest Channel

Spurious frequency (MHz)	Emission Level (dBm)	Limit (dBm)
883.56	-35.72	-22.30
1784.14	-40.46	-22.30
Measurement uncertainty (dB)	<±0.78	

Middle Channel

Spurious frequency (MHz)	Emission Level (dBm)	Limit (dBm)
882.73	-33.01	-21.47
1890.68	-39.67	-21.47
Measurement uncertainty (dB)	<±0.78	




### Highest Channel

Spurious frequency (MHz)	Emission Level (dBm)	Limit (dBm)
882.73	-33.02	-20.11
Measurement uncertainty (dB)	<±0.78	

Verdict: PASS


## Mode B

### Lowest Channel

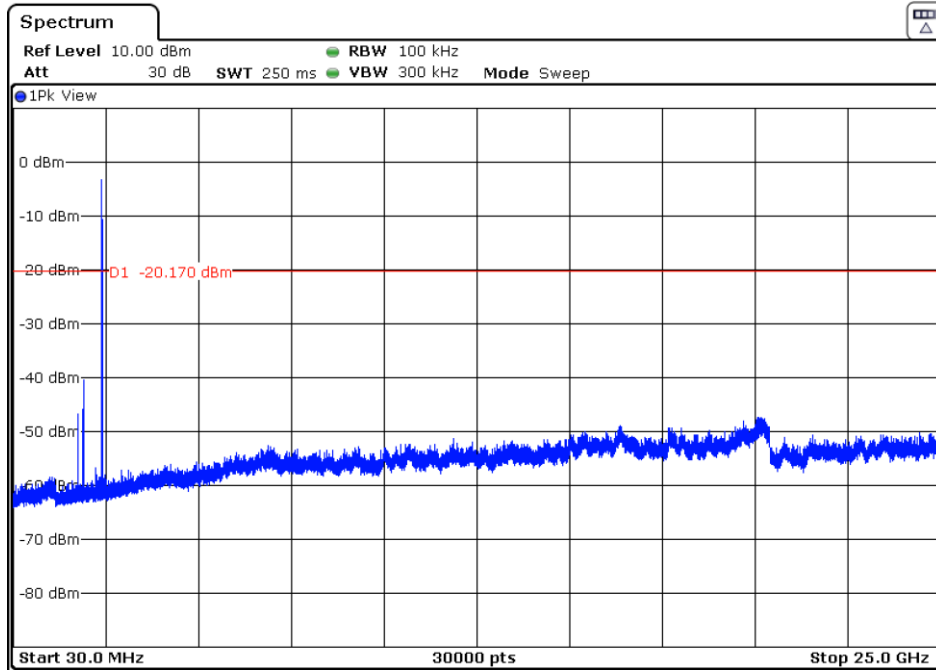


Note: The peak shown in the plot above the limit is the carrier frequency.

### Middle Channel

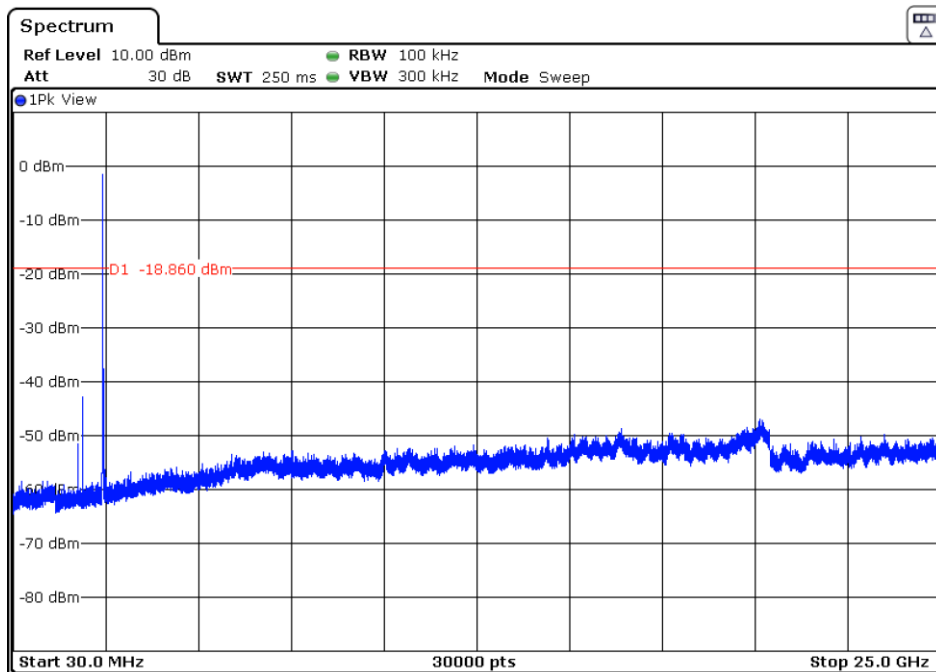

Note: The peak shown in the plot above the limit is the carrier frequency.


### Highest Channel

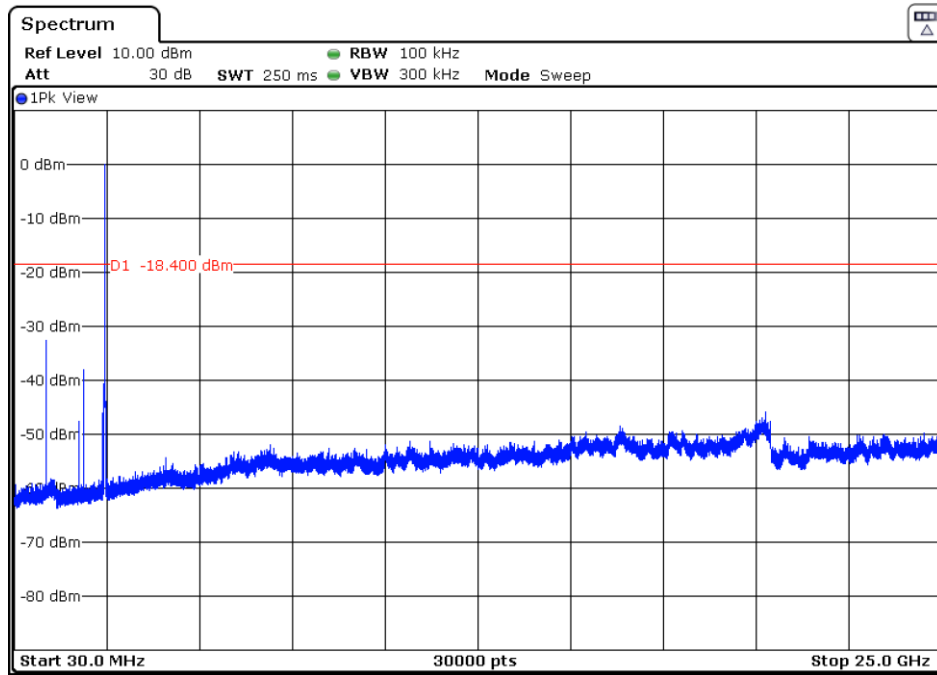

Note: The peak shown in the plot above the limit is the carrier frequency.


### Mode G

#### Lowest Channel

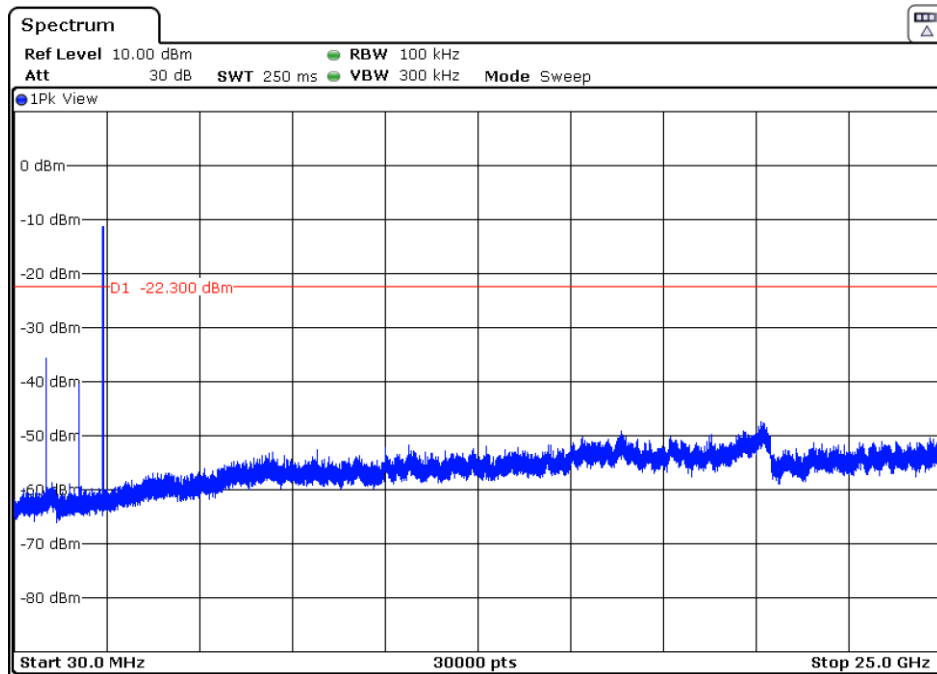


Note: The peak shown in the plot above the limit is the carrier frequency.

### Middle Channel

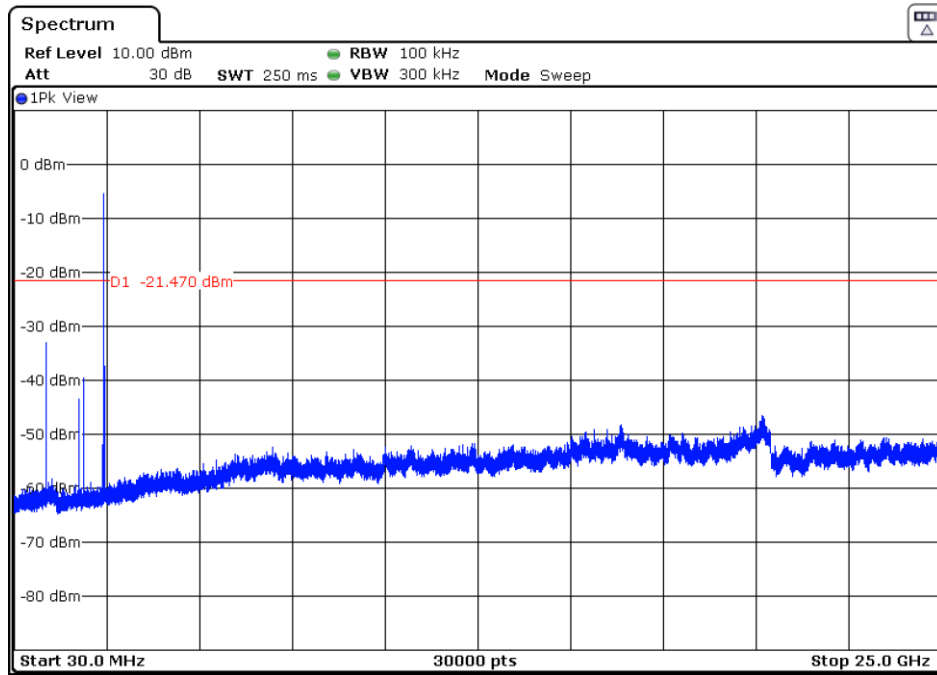

Note: The peak shown in the plot above the limit is the carrier frequency.

### Highest Channel

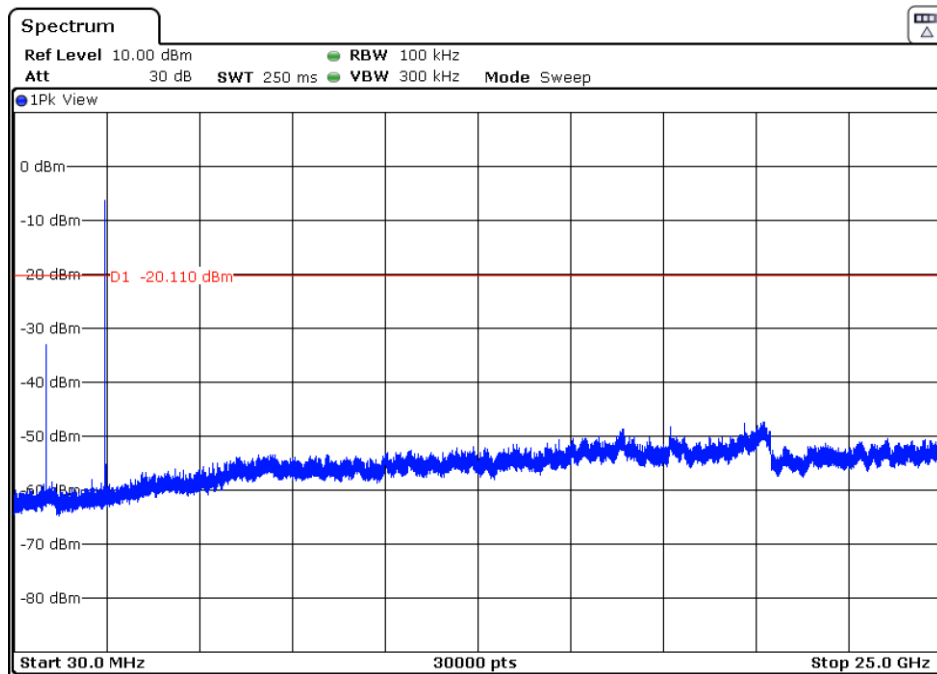

Note: The peak shown in the plot above the limit is the carrier frequency.

### Section 15.247 Subclause (d) / RSS-247 5.5. Band-edge emissions compliance (Transmitter)

#### SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.


#### RESULTS:

Note: Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

#### LOW FREQUENCY SECTION 2412 MHz (b/g)

##### Mode B


See next plot.

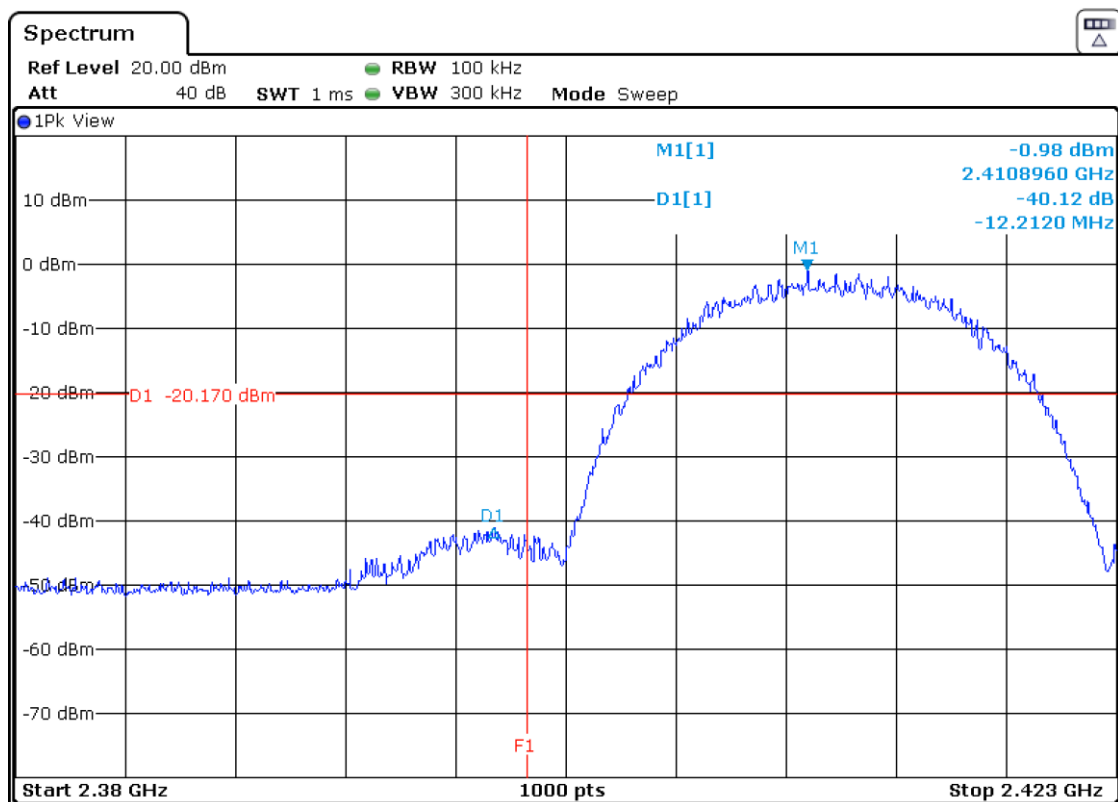

Verdict: PASS

### Mode G

See next plot.

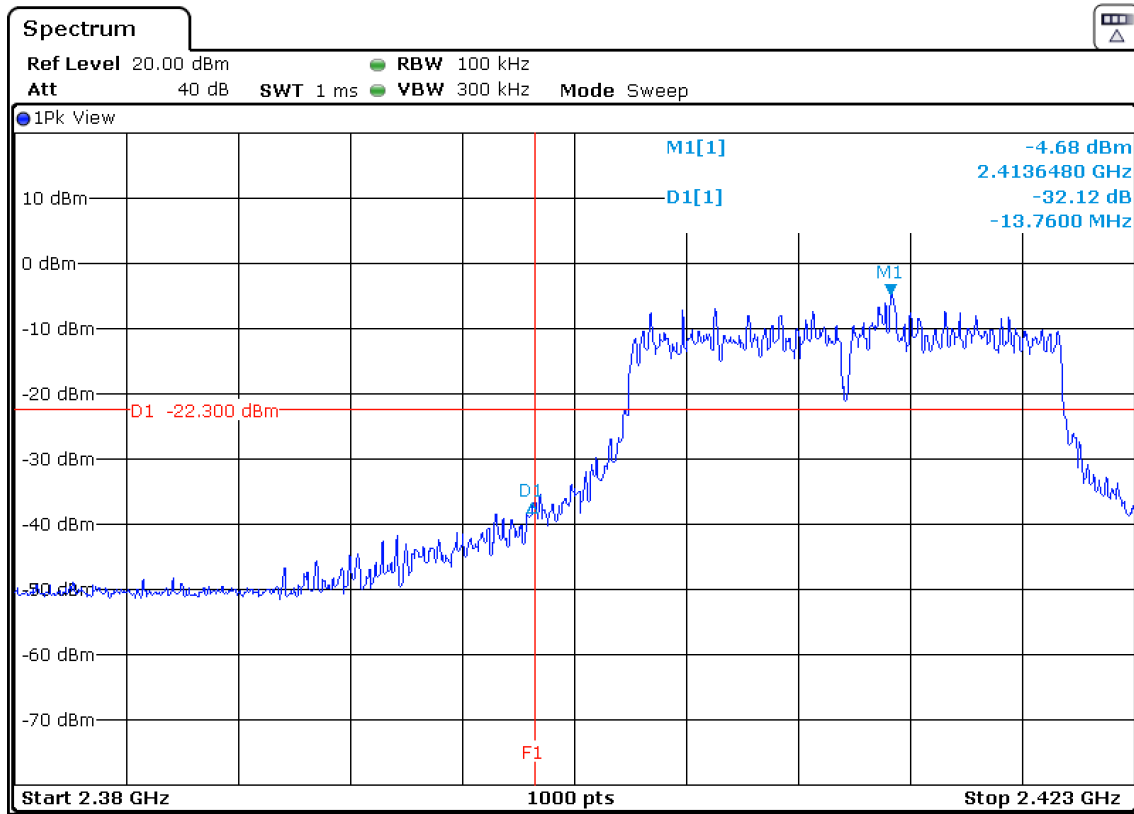

Verdict: PASS

**Section 15.247 Subclause (e) / RSS-247 5.2 (b). Power spectral density**

**SPECIFICATION**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**RESULTS**

The maximum power spectral density level in the fundamental emission was measured using the method PKPSD (Peak PSD) according to point 10.2. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

Power spectral density (see next plots).

**Mode B**

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Power spectral density (dBm)	-0.08	2.24	2.21
Measurement uncertainty (dB)	<±0.78		

**Mode G**


	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
Power spectral density (dBm)	-2.28	-2.11	-1.03
Measurement uncertainty (dB)	<±0.78		

Verdict: PASS


Power spectral density.

Mode B

Lowest Channel

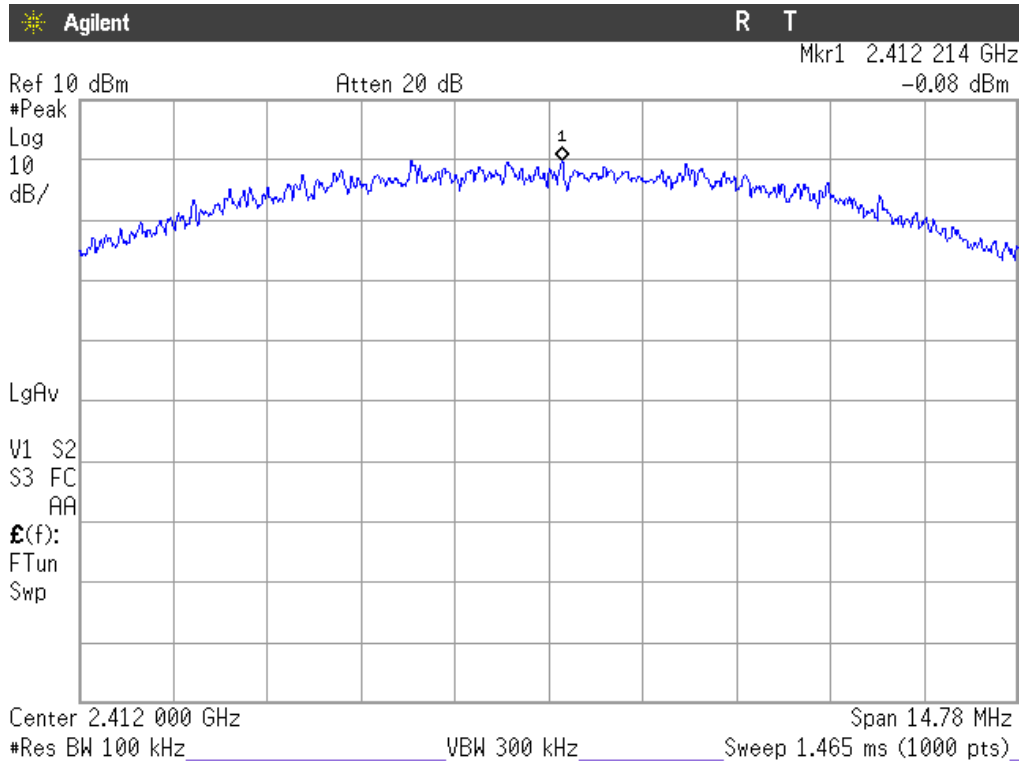


Middle Channel

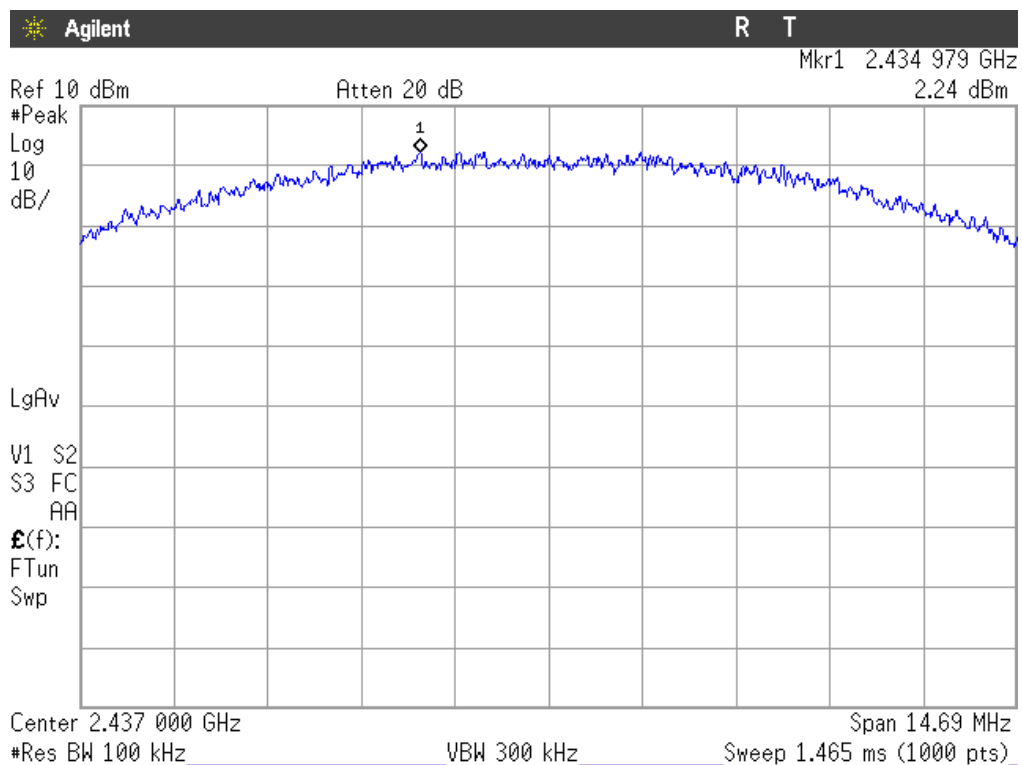




### Highest Channel

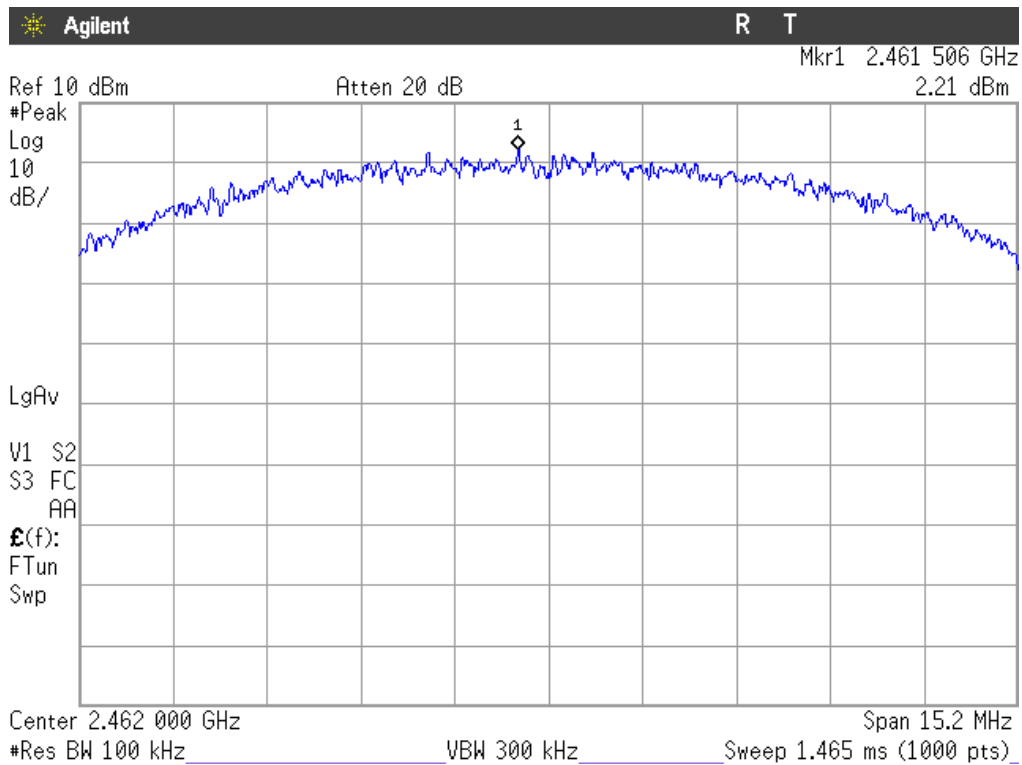


### Mode G


#### Lowest Channel

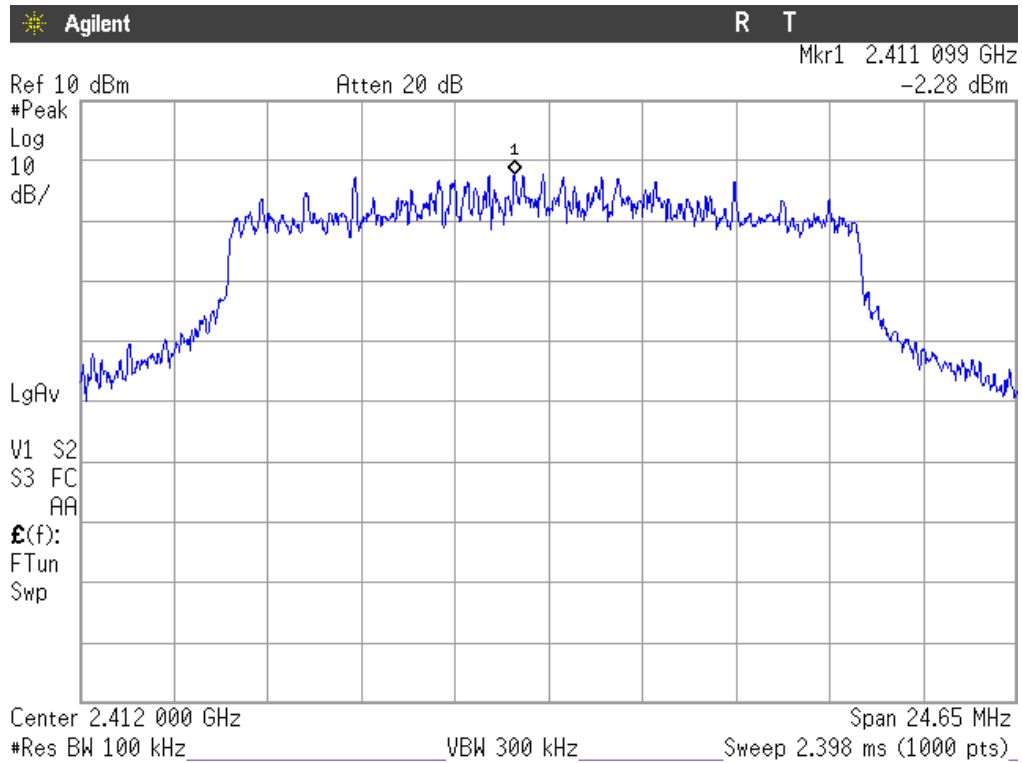

### Middle Channel

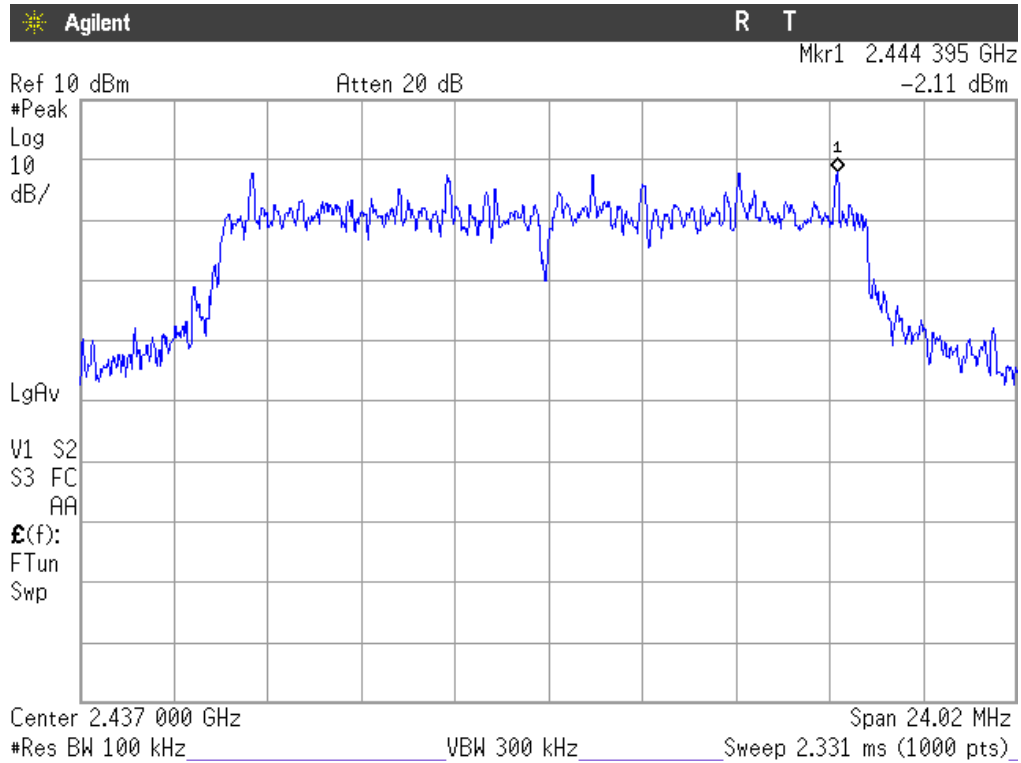

### Highest Channel

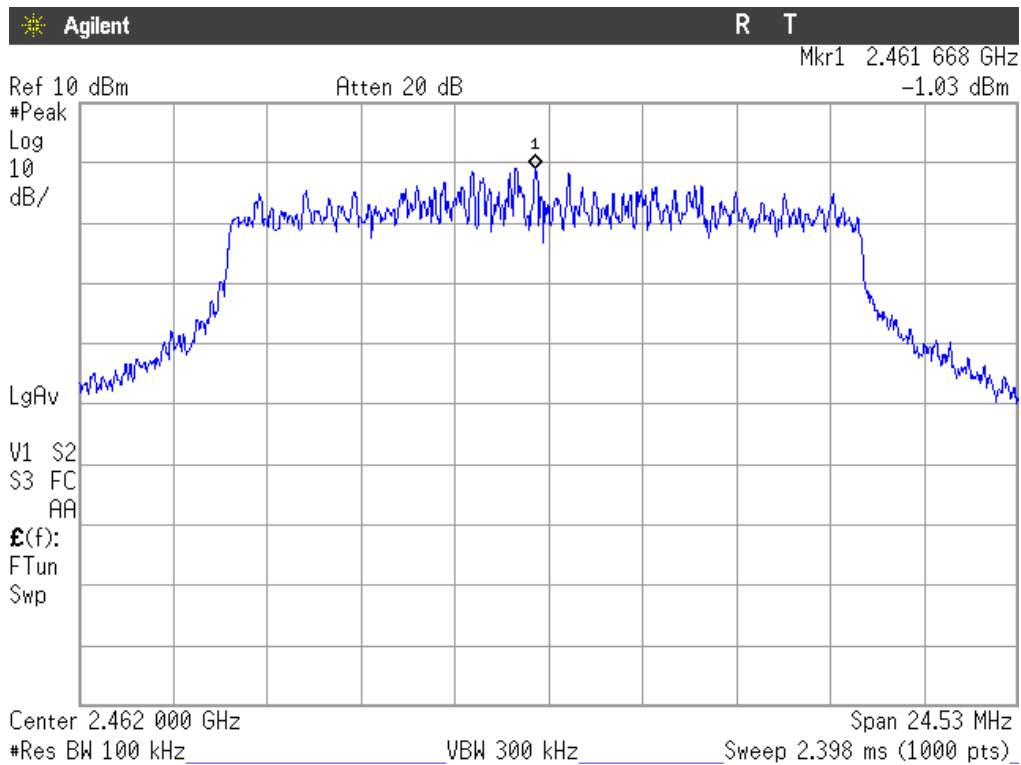

**Section 15.247 Subclause (d) / RSS-247 5.5. Emission limitations radiated (Transmitter)**

**SPECIFICATION**

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength ( $\text{dB}\mu\text{V/m}$ )	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

**RESULTS:**

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

### Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel selected in the EUT.

Spurious levels operating (radiated) closest to limit.

#### Mode B

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Measurement Uncertainty (dB)
167.74	V	Quasi-peak	30.25	$\pm 3.88$
177.83	H	Quasi-peak	24.60	$\pm 3.88$
400.06	V	Quasi-peak	36.60	$\pm 3.88$
500.01	V	Quasi-peak	35.00	$\pm 3.88$
625.05	H	Quasi-peak	32.90	$\pm 3.88$
750.03	H	Quasi-peak	27.30	$\pm 3.88$
875.06	V	Quasi-peak	33.90	$\pm 3.88$

#### Mode G

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Measurement Uncertainty (dB)
170.80	V	Quasi-peak	33.00	$\pm 3.88$
374.98	H	Quasi-peak	24.60	$\pm 3.88$
405.83	V	Quasi-peak	34.20	$\pm 3.88$
500.01	V	Quasi-peak	32.50	$\pm 3.88$
624.99	H	Quasi-peak	36.60	$\pm 3.88$
640.03	V	Quasi-peak	34.50	$\pm 3.88$
875.06	V	Quasi-peak	36.10	$\pm 3.88$

## Frequency range 1 GHz-25 GHz.

The results in the next tables show the maximum measured levels in the 1-25 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

The field strength at the band edges was evaluated for each mode for the channel under test.

Spurious signals with peak levels above the average limit (54 dB $\mu$ V/m at 3 m) are measured with AVG detector for checking compliance with the average limit.

### 1. WiFi 2.4GHz 802.11

1.1. CHANNEL 1: LOW (2412 MHz). Out-of-band spurious emissions in the 1-25 GHz and inside restricted band 2.31-2.39 GHz.

Mode B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Measurement Uncertainty (dB)
6.4318	V	Peak	42.6	$\pm 4.87$

Mode G

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Measurement Uncertainty (dB)
6.4317	H	Peak	41.90	$\pm 4.87$

1.2. CHANNEL 6: MIDDLE (2437 MHz). Out-of-band spurious emissions in the 1-25 GHz.

Mode B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Measurement Uncertainty (dB)
6.4852	H	Peak	43.24	$\pm 4.87$

Mode G

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Measurement Uncertainty (dB)
6.4852	H	Peak	41.49	$\pm 4.87$

1.3. CHANNEL 11: HIGH (2462 MHz). Out-of-band spurious emissions in the 1-25 GHz and inside restricted band 2.4835-2.5 GHz.

Mode B

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Measurement Uncertainty (dB)
2.4864	V	Peak	53.70	$\pm 4.87$
6.5652	V	Peak	43.01	$\pm 4.87$


Mode G

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Measurement Uncertainty (dB)
6.5652	V	Peak	42.28	$\pm 4.87$


Verdict: PASS

### FREQUENCY RANGE 30 MHz-1000 MHz.

Mode B (this plot is valid for all three channels).

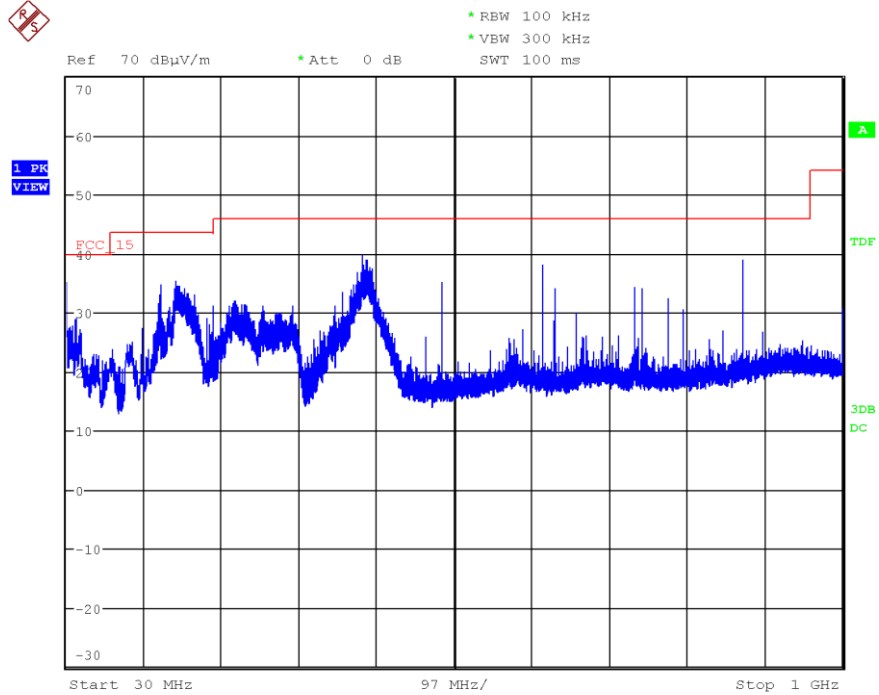


Mode G (this plot is valid for all three channels).

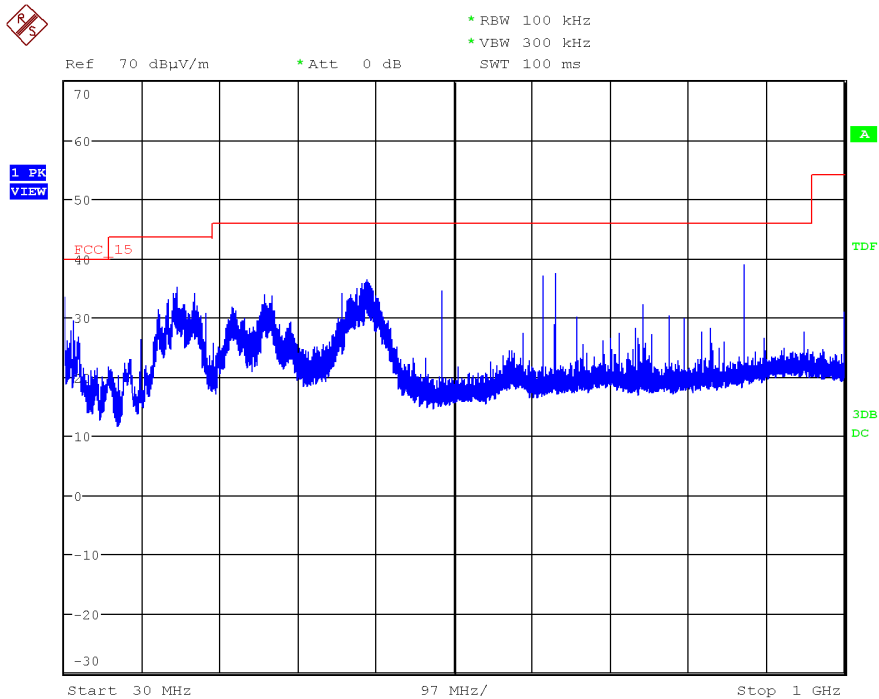

FREQUENCY RANGE 1 GHz to 3 GHz.


1. WiFi 2.4GHz 802.11

Mode B: CHANNEL 1 (2412 MHz).

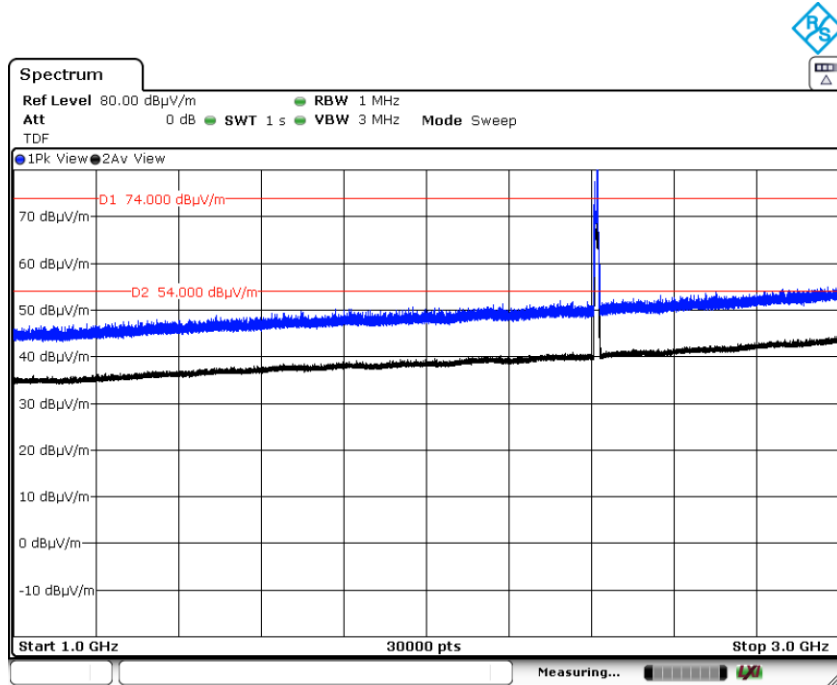

Note: The peak above the limit is the carrier frequency.


Mode G: CHANNEL 1 (2412 MHz).

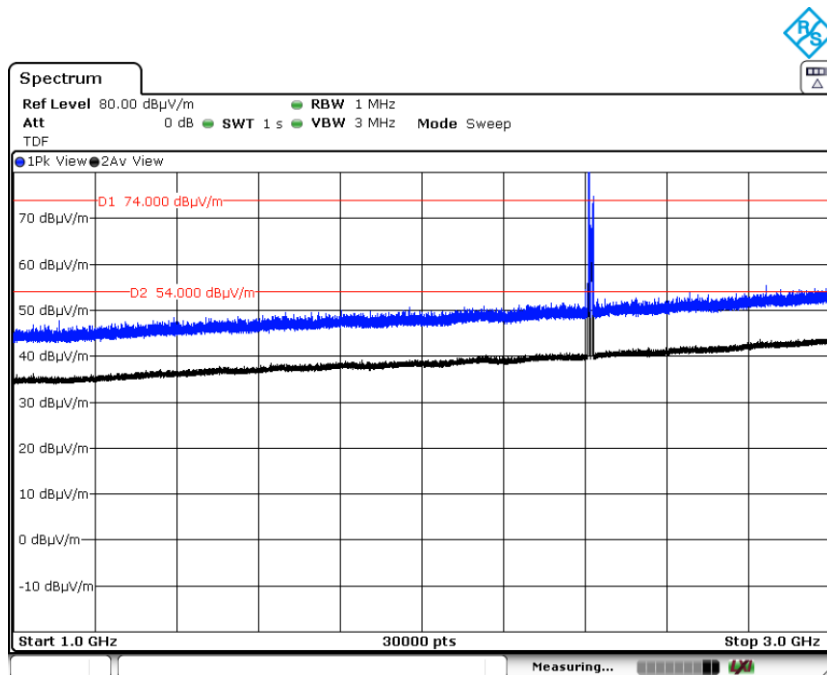

Note: The peak above the limit is the carrier frequency.




Mode B: CHANNEL 6 (2437 MHz).

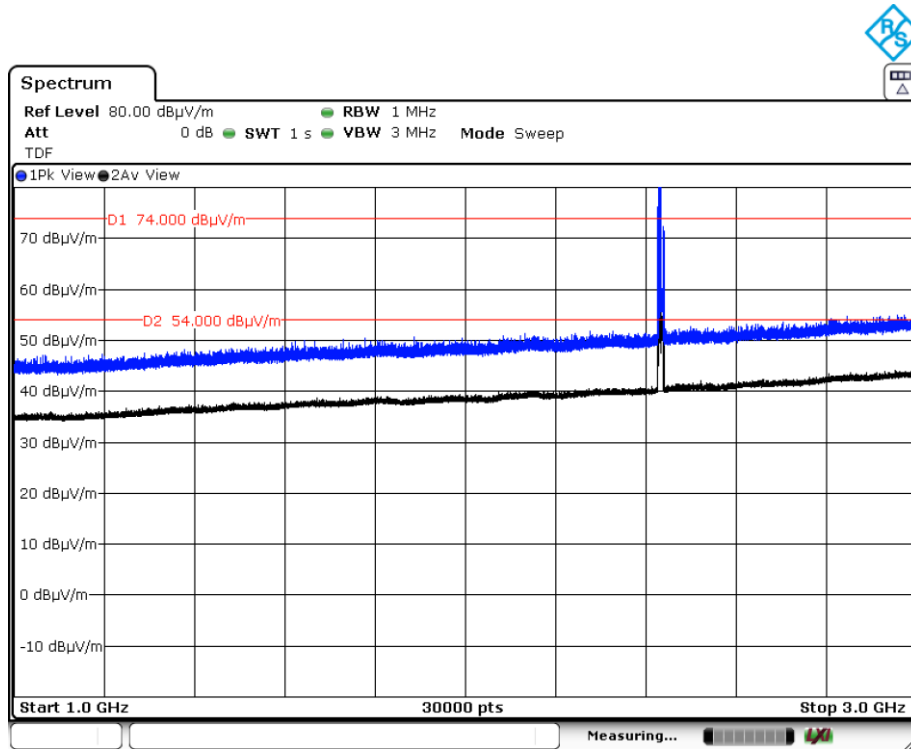


Note: The peak above the limit is the carrier frequency.

Mode G: CHANNEL 6 (2437 MHz).

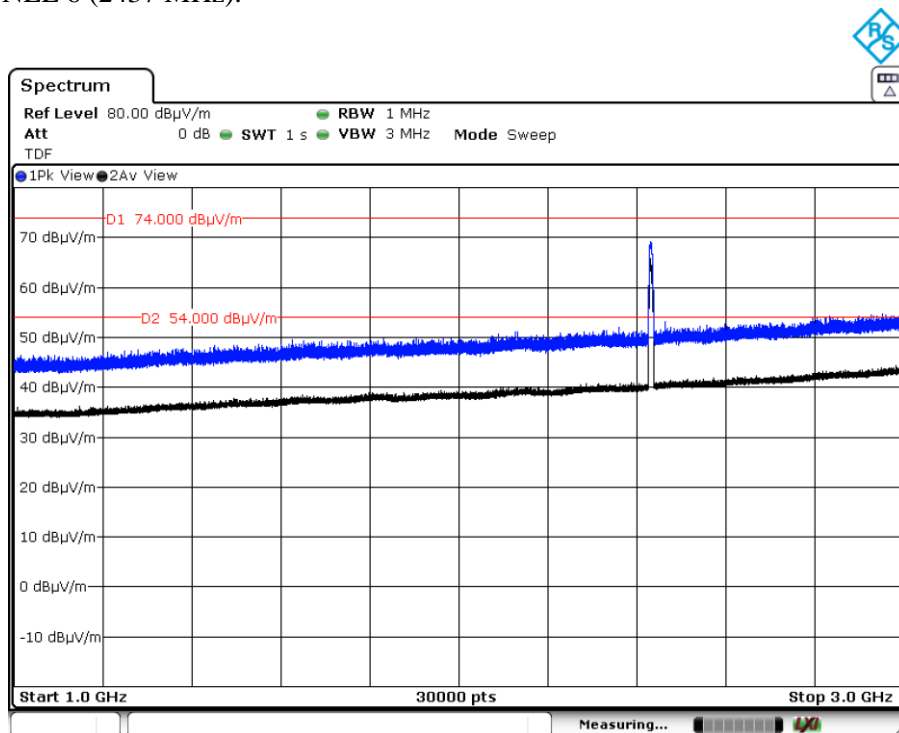


Note: The peak above the limit is the carrier frequency.

Mode B: CHANNEL 11 (2462 MHz).

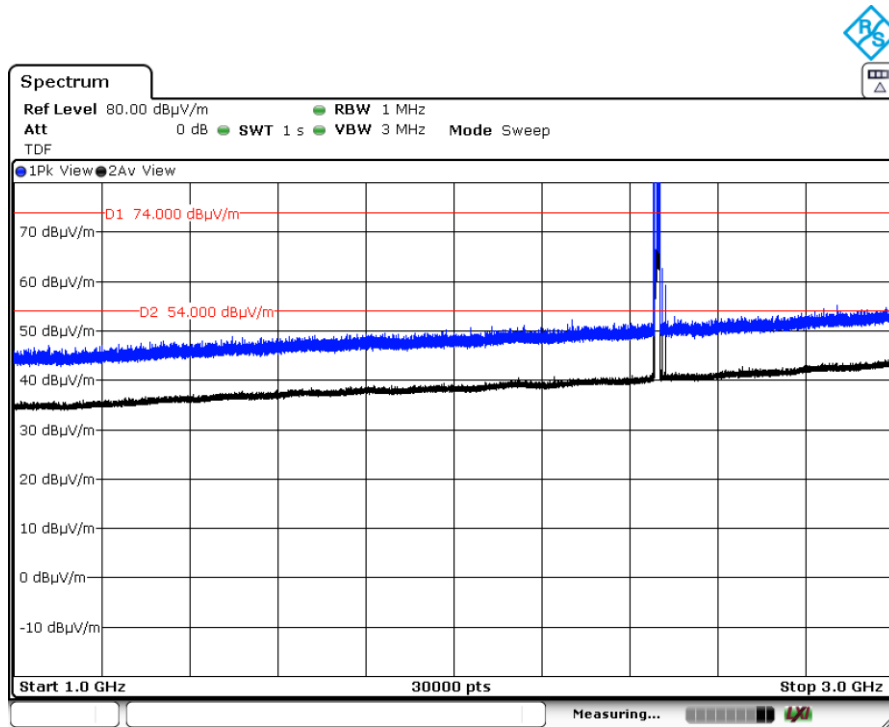

Note: The peak above the limit is the carrier frequency.

Mode G: CHANNEL 11 (2462 MHz).

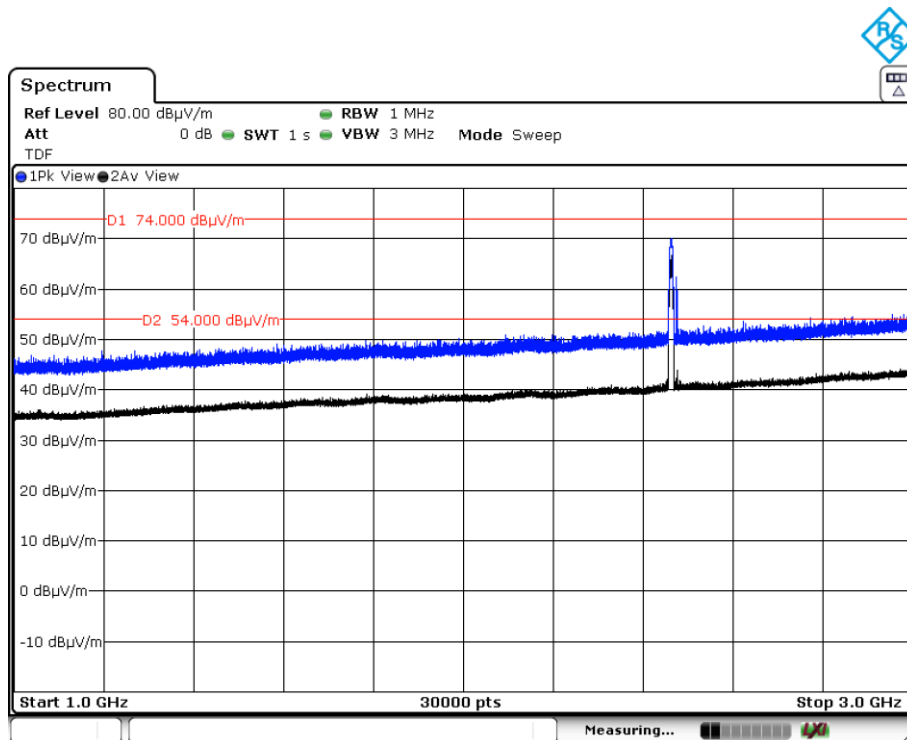


Note: The peak above the limit is the carrier frequency.


FREQUENCY RANGE 3 GHz to 18 GHz.

1. WiFi 2.4GHz 802.11


Mode B: CHANNEL 1 (2412 MHz).

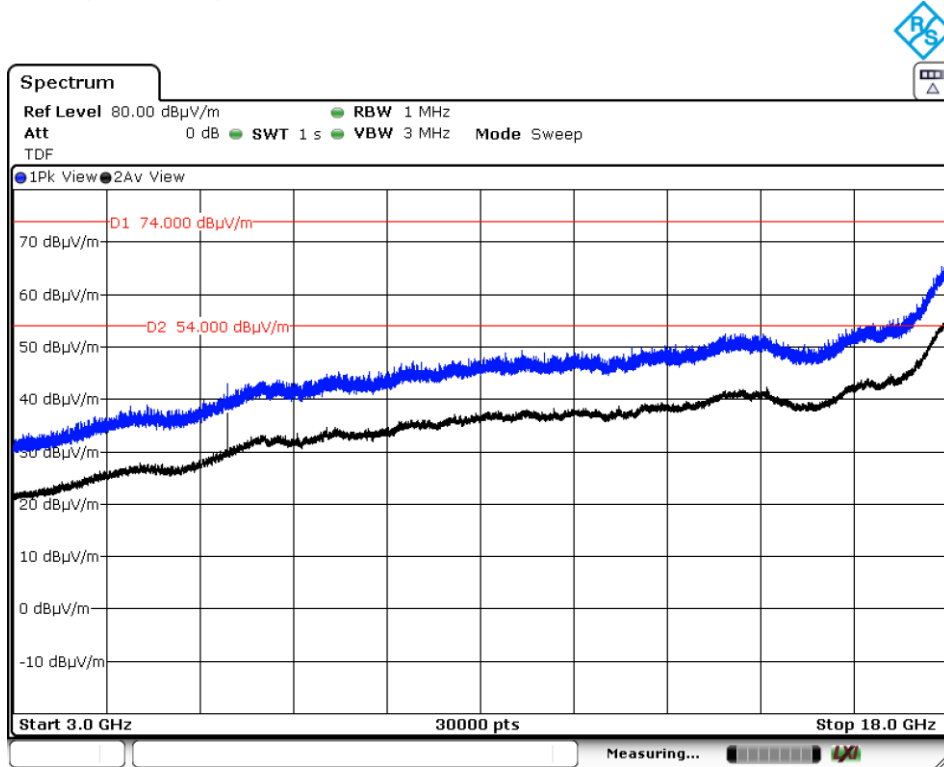


Mode G: CHANNEL 1 (2412 MHz).

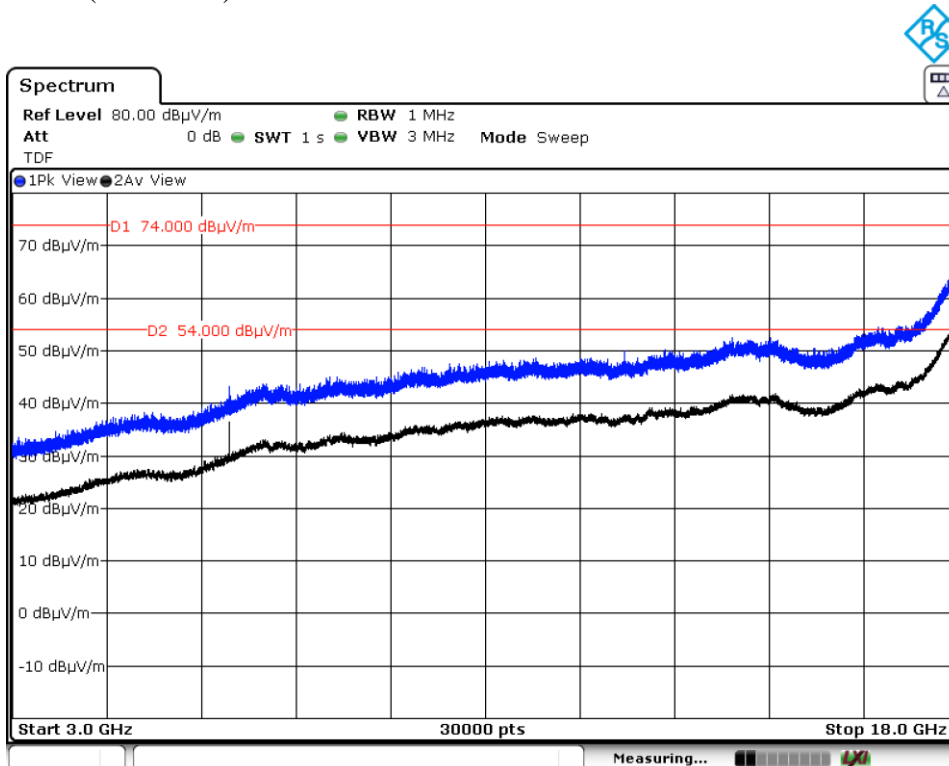


Mode B: CHANNEL 6 (2437 MHz).

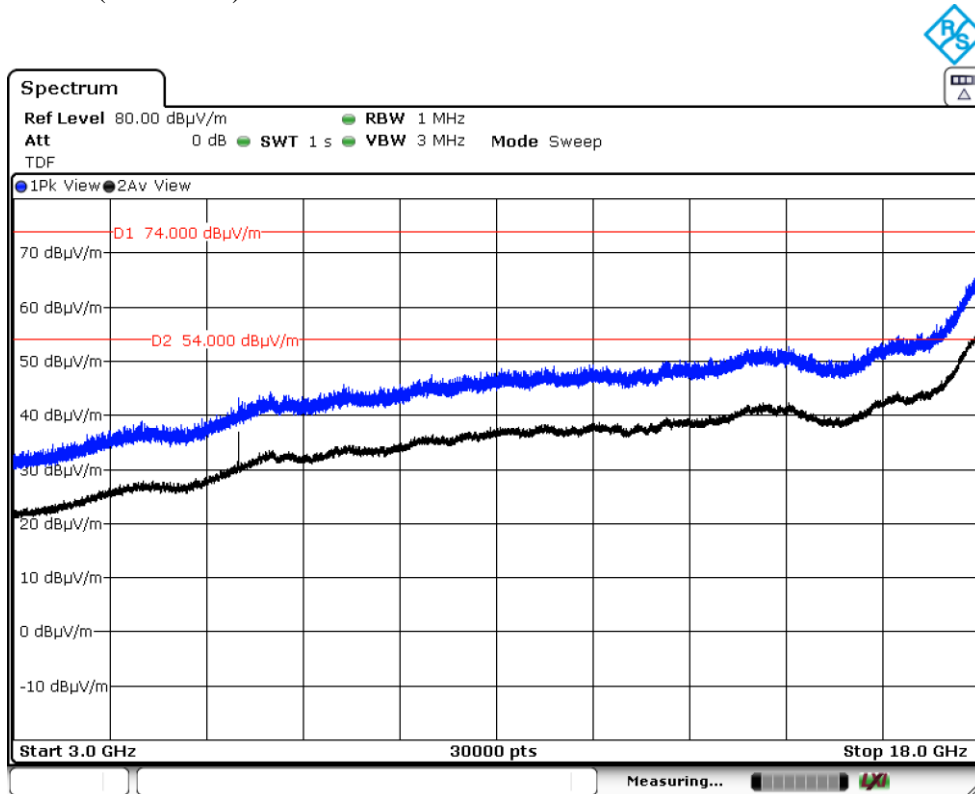


Mode G: CHANNEL 6 (2437 MHz).

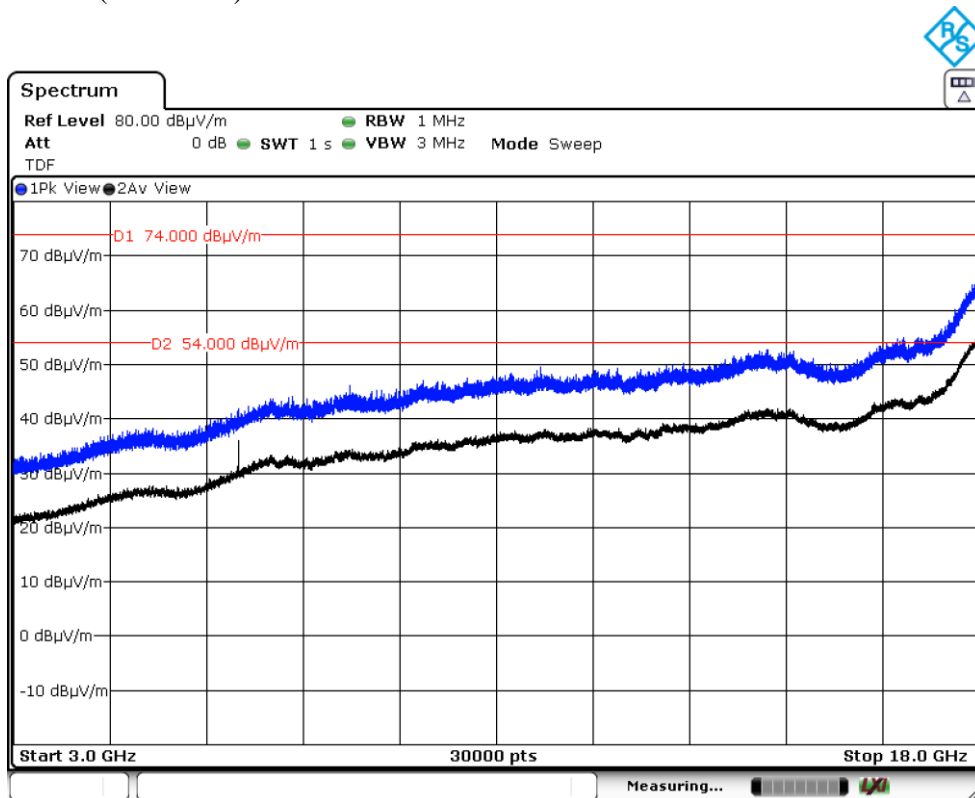

Mode B: CHANNEL 11 (2462 MHz).

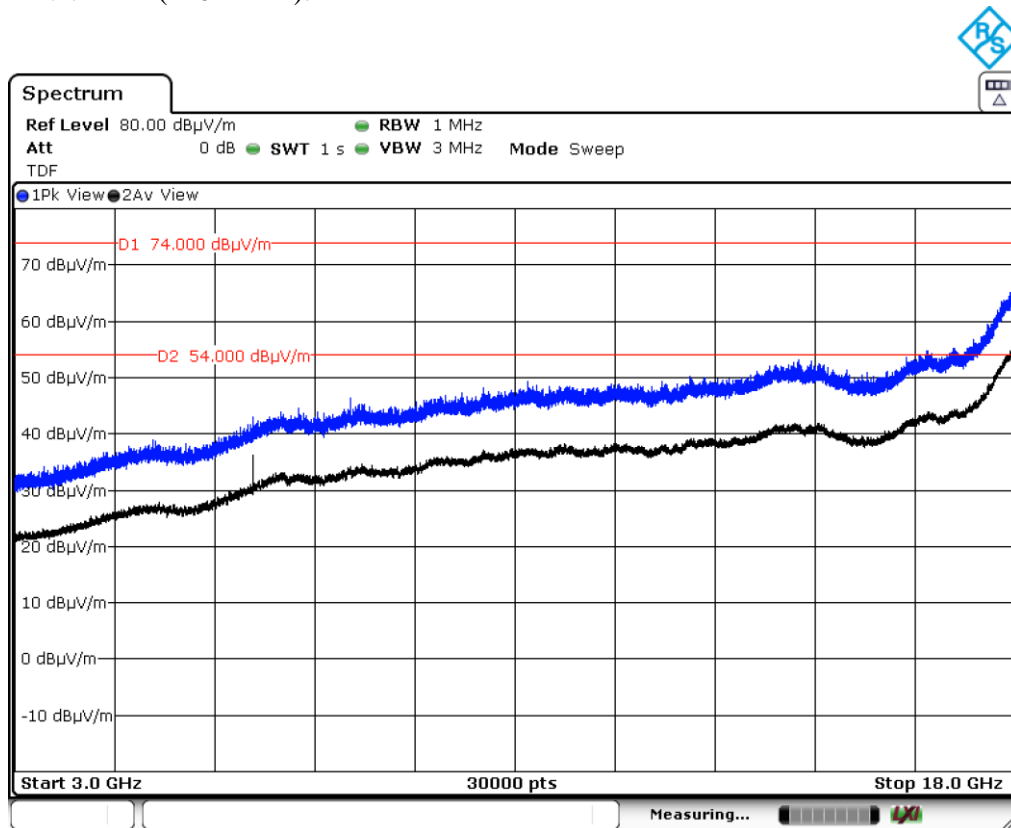


Mode G: CHANNEL 11 (2462 MHz).

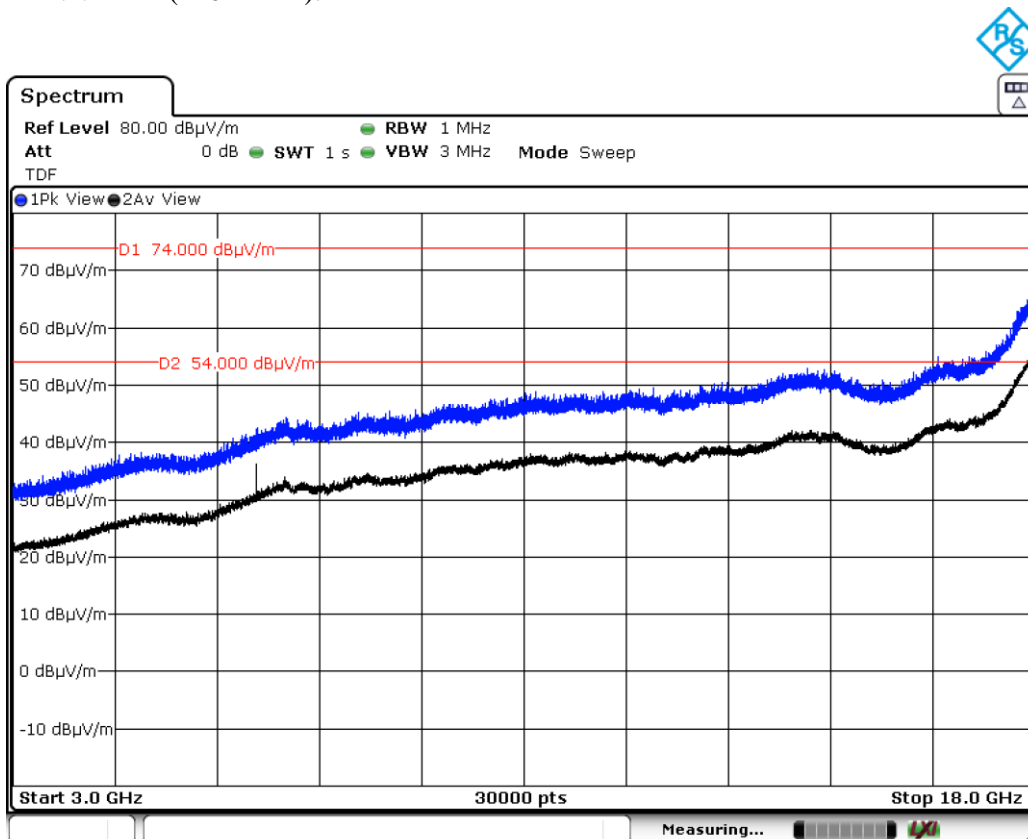


FREQUENCY RANGE 18 GHz to 26 GHz.

### 1. WiFi 2.4GHz 802.11

Mode B (this plot is valid for all three channels).

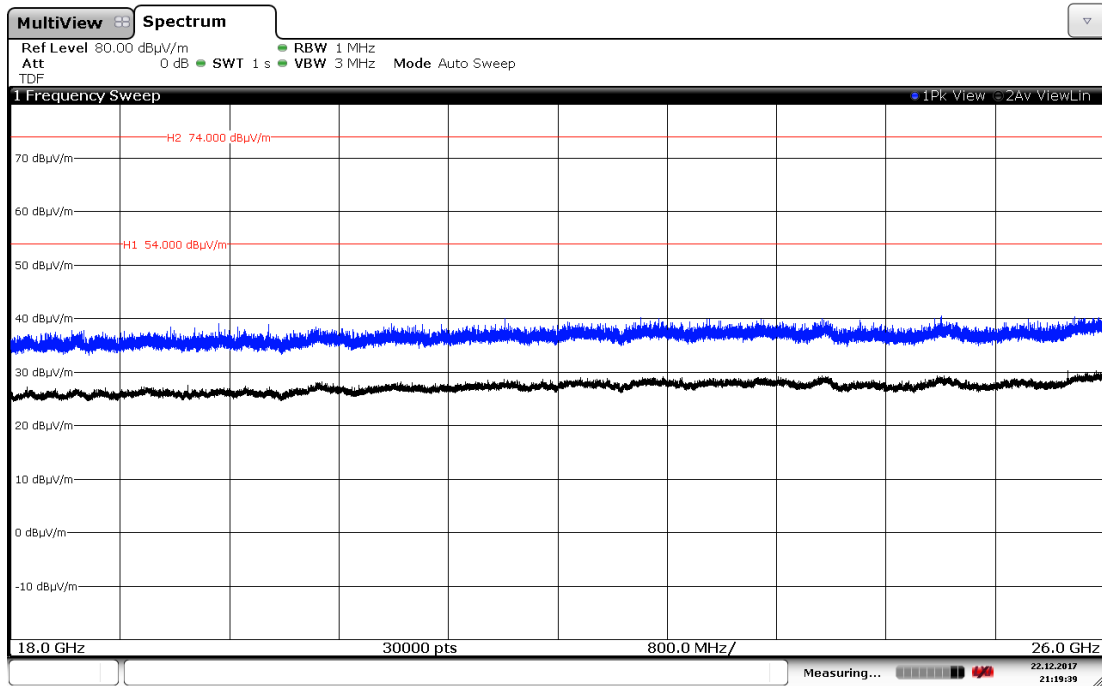


Mode G (this plot is valid for all three channels).

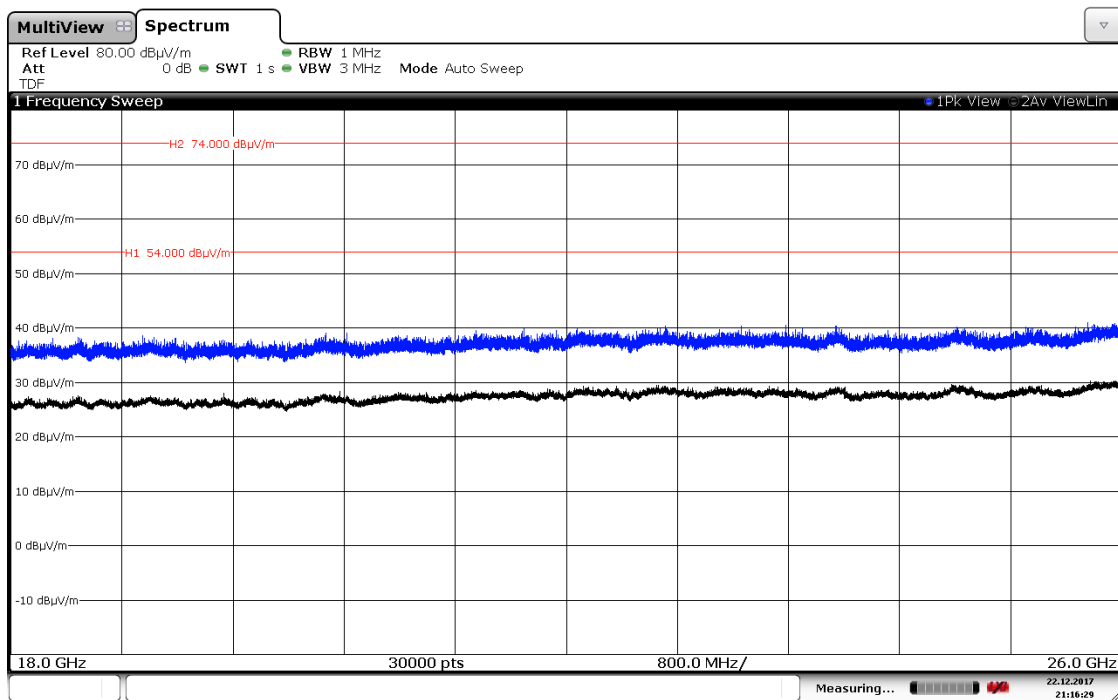


FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)

1. WiFi 2.4GHz 802.11

Mode B: CHANNEL 1 (2412 MHz).

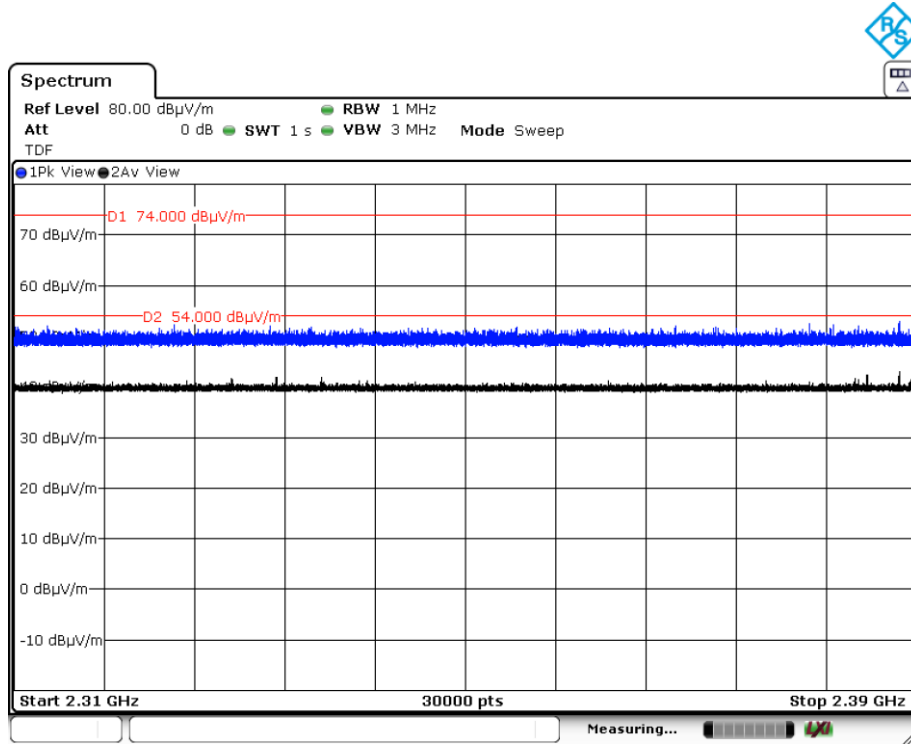


Mode G: CHANNEL 1 (2412 MHz).

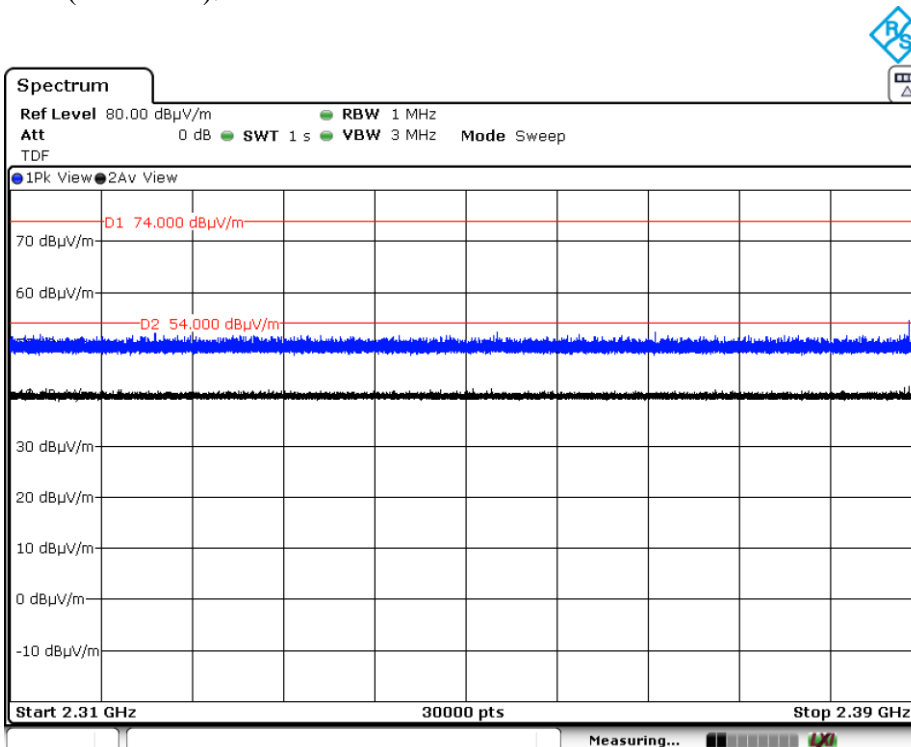

FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)

1. WiFi 2.4GHz 802.11

Mode B: CHANNEL 11 (2462 MHz).

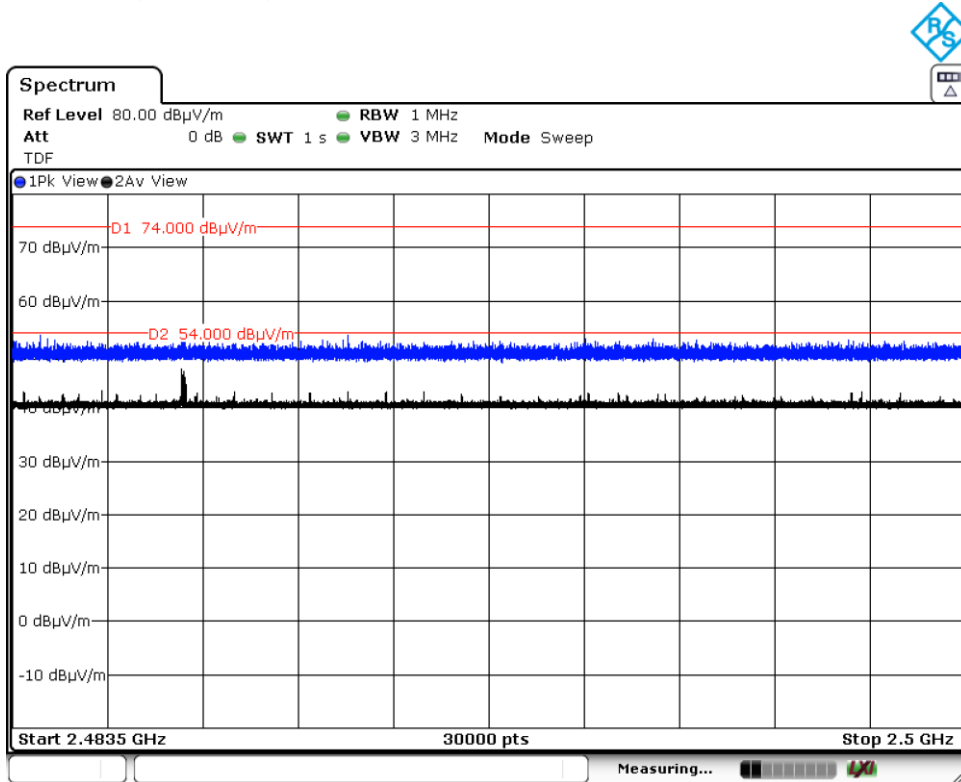

Mode G: CHANNEL 11 (2462 MHz).

