


TEST REPORT

Report No.	CISRR240516078
Project No.	CISR240516078
FCC ID	2ANYD-SHS2438
Applicant	Shenzhen Sanhesheng Electronic CO.,LTD.
Address	Room 205, Yuxing Technology Park Building, Third Industrial Zone,Nanchang Community, Xixiang Street, Bao 'an District, Shenzhen,China
Manufacturer	Shenzhen Sanhesheng Electronic CO.,LTD.
Address	Room 205, Yuxing Technology Park Building, Third Industrial Zone,Nanchang Community, Xixiang Street, Bao 'an District, Shenzhen,China
Product Name	ROTATING SUSPENSION LAMP
Trade Mark	
Model/Type reference	SHS-2438
Listed Model(s)	--
Standard	FCC Part 15 Subpart C
Test date	May 16, 2024 ~ June 11, 2024
Issue date	June 12, 2024
Test result	Complied

Rory Huang

Genry Long

Prepared by: Rory Huang

Approved by: Genry Long

The test results relate only to the tested samples.

The test report should not be reproduced except in full without the written approval of Shenzhen Bangce Testing Technology Co., Ltd.

Contents

1. REPORT VERSION	3
2. SUMMARY OF TEST RESULT	4
3. SUMMARY	5
3.1. Product Description	5
3.2. Radio Specification Description	5
3.3. Modification of EUT	6
3.4. Testing Site	6
3.5. Field Strength Calculation	6
3.6. DISTURBANCE Calculation	6
4. TEST CONFIGURATION	7
4.1. Test mode	7
4.2. Support unit used in test configuration and system	7
4.3. Test sample information	7
4.4. Testing environmental condition	8
4.5. Statement of the measurement uncertainty	8
4.6. Equipment Used during the Test	9
5. TEST CONDITIONS AND RESULTS	10
5.1. AC Conducted Emission	10
5.2. 20 dB Bandwidth	13
5.3. Radiated Spurious Emission	15
6. TEST SETUP PHOTOS	20
7. EXTERNAL AND INTERNAL PHOTOS	20
7.1 External photos	20
7.2 Internal photos	20

1. REPORT VERSION

Version No.	Issue date	Description
00	June 12, 2024	Original

2. SUMMARY OF TEST RESULT


Report clause	Test Item	Standard Requirement	Result
5.2	AC Conducted Emission	15.207	PASS
5.4	20 dB Bandwidth	15.215	PASS
5.13	Radiated Spurious Emission	15.209	PASS

Note:

- The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Product Description

Main unit information:	
Product Name:	ROTATING SUSPENSION LAMP
Trade Mark:	
Model No.:	SHS-2438
Listed Model(s):	--
Power supply:	Input: DC 5V/3A, 9V/2A, 12V/1.5A Wireless charge output: 5W/7.5W/10W/15W
Hardware version:	V1.0
Software version:	V1.0

3.2. Radio Specification Description

Technology:	Wireless Charging
Modulation:	Continuous Wave
Operation frequency:	110.1kHz-205kHz
Antenna type:	Coil Antenna
Antenna gain:	0dBi

3.3. Modification of EUT

No modifications are made to the EUT during all test items.

3.4. Testing Site

Laboratory Name	Shenzhen Bangce Testing Technology Co., Ltd.
Laboratory Location	101, building 10, Yunli Intelligent Park, Shutianpu community, Matian Street, Guangming District, Shenzhen, Guangdong, China
FCC registration number	736346

3.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

3.6. DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

4. TEST CONFIGURATION

4.1. Test mode

Test Mode:	
Mode 1	AC/DC Adapter(DC 5V/3A)+EUT +Mobile phone (Battery Status: <1%)
Mode 2	AC/DC Adapter(DC 5V/3A)+EUT+ Mobile phone (Battery Status: <50%)
Mode 3	AC/DC Adapter(DC 5V/3A)+EUT+ Mobile phone (Battery Status: <100%)
Mode 4	AC/DC Adapter(DC 9V/2A)+EUT + Mobile phone (Battery Status: <1%)
Mode 5	AC/DC Adapter(DC 9V/2A)+EUT + Mobile phone (Battery Status: <50%)
Mode 6	AC/DC Adapter(DC 9V/2A)+EUT + Mobile phone (Battery Status: <100%)
Mode 7	AC/DC Adapter(DC 12V/1.5A)+EUT + Mobile phone (Battery Status: <1%)
Mode 8	AC/DC Adapter(DC 12V/1.5A)+EUT + Mobile phone (Battery Status: <50%)
Mode 9	AC/DC Adapter(DC 12V/1.5A)+EUT + Mobile phone (Battery Status: <100%)
Mode 10	EUT + Mobile phone (Wireless Output: 5W(Battery Status: <1%))
Mode 11	EUT + Mobile phone (Wireless Output: 5W(Battery Status: <50%))
Mode 12	EUT + Mobile phone (Wireless Output: 5W(Battery Status: <100%))
Mode 13	EUT + Mobile phone (Wireless Output: 7.5W(Battery Status: <1%))
Mode 14	EUT + Mobile phone (Wireless Output: 7.5W(Battery Status: <50%))
Mode 15	EUT + Mobile phone (Wireless Output: 7.5W(Battery Status: <100%))
Mode 16	EUT + Mobile phone (Wireless Output: 10W(Battery Status: <1%))
Mode 17	EUT + Mobile phone (Wireless Output: 10W(Battery Status: <50%))
Mode 18	EUT + Mobile phone (Wireless Output: 10W(Battery Status: <100%))
Mode 19	EUT + Mobile phone (Wireless Output: 15W(Battery Status: <1%))
Mode 20	EUT + Mobile phone (Wireless Output: 15W(Battery Status: <50%))
Mode 21	EUT + Mobile phone (Wireless Output: 15W(Battery Status: <100%))
Remark: – All test modes were pre-tested, but we only recorded the worst case in this report. – The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.	

4.2. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Item	Equipment name	Trade Name	Model No.
1	Adapter	Huawei	HW-05002000C
2	Mobile phone	Phone	V30pro

4.3. Test sample information

Type	Sample no.
Engineer sample	CISR240516078-1#
Normal sample	CISR240516078-2#

4.4. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.5. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	1.63dB
2	99% Occupied Bandwidth	0.002%
3	Radiated Spurious Emission	3.76dB for 30MHz-1GHz 3.80dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.6. Equipment Used during the Test

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	SKET	9.3*6.3*6	N/A	2021.10.15	3Year
Spectrum analyzer	Agilent	N9020A	MY50530263	2024.01.08	1Year
Receiver	ROHDE&SCHWARZ	ESCI	100853	2024.01.08	1Year
Spectrum analyzer	R&S	FSV-40N	/	2024.01.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9163	1463	2023.01.09	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2487	2023.01.09	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	2023.01.09	2Year
RF Cable	Tonscend	Cable 1	/	2024.01.08	1Year
RF Cable	Tonscend	Cable 2	/	2024.01.08	1Year
RF Cable	SKET	Cable 3	/	2024.01.08	1Year
Pre-amplifier	Tonscend	TAP9K3G32	AP21G806153	2024.01.08	1Year
Pre-amplifier	Tonscend	TAP01018050	AP22E806229	2024.01.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8127	/	2024.01.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	2024.01.08	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	1130	2023.01.09	2 Year
Preamplifier	Tonscend	TAP18040048	AP21C806126	2024.01.08	1 Year
Antenna tower	SKET	Bk-4AT-BS	AT2021040101-V1	N/A	N/A
variable-frequency power source	Pinhong	PH1110	/	2024.01.08	1 Year
6dB Attenuator	SKET	DC-6G	/	N/A	N/A
Artificial power network	Schwarzbeck	NSLK8127	8127-01096	2024.01.08	1 Year
EMI Test Receiver	Rohde&schwarz	ESCI7	100853	2024.01.08	1 Year
8-wire Impedance Stabilization Network	Schwarzbeck	NTFM 8158	8158-00337	2024.01.08	1 Year
Antenna tower	SKET	Bk-4AT-BS	AT2021040101-V1	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. AC Conducted Emission


Limit:

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test configuration:

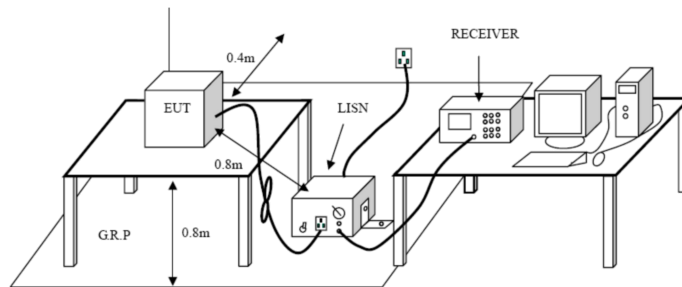

Test procedure:

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.


Test mode:

Refer to the clause 4.1


Result:

Passed

Have pre-scan all test channel, found Mode 7 which it was worst case, so only show the worst case's data on this report.

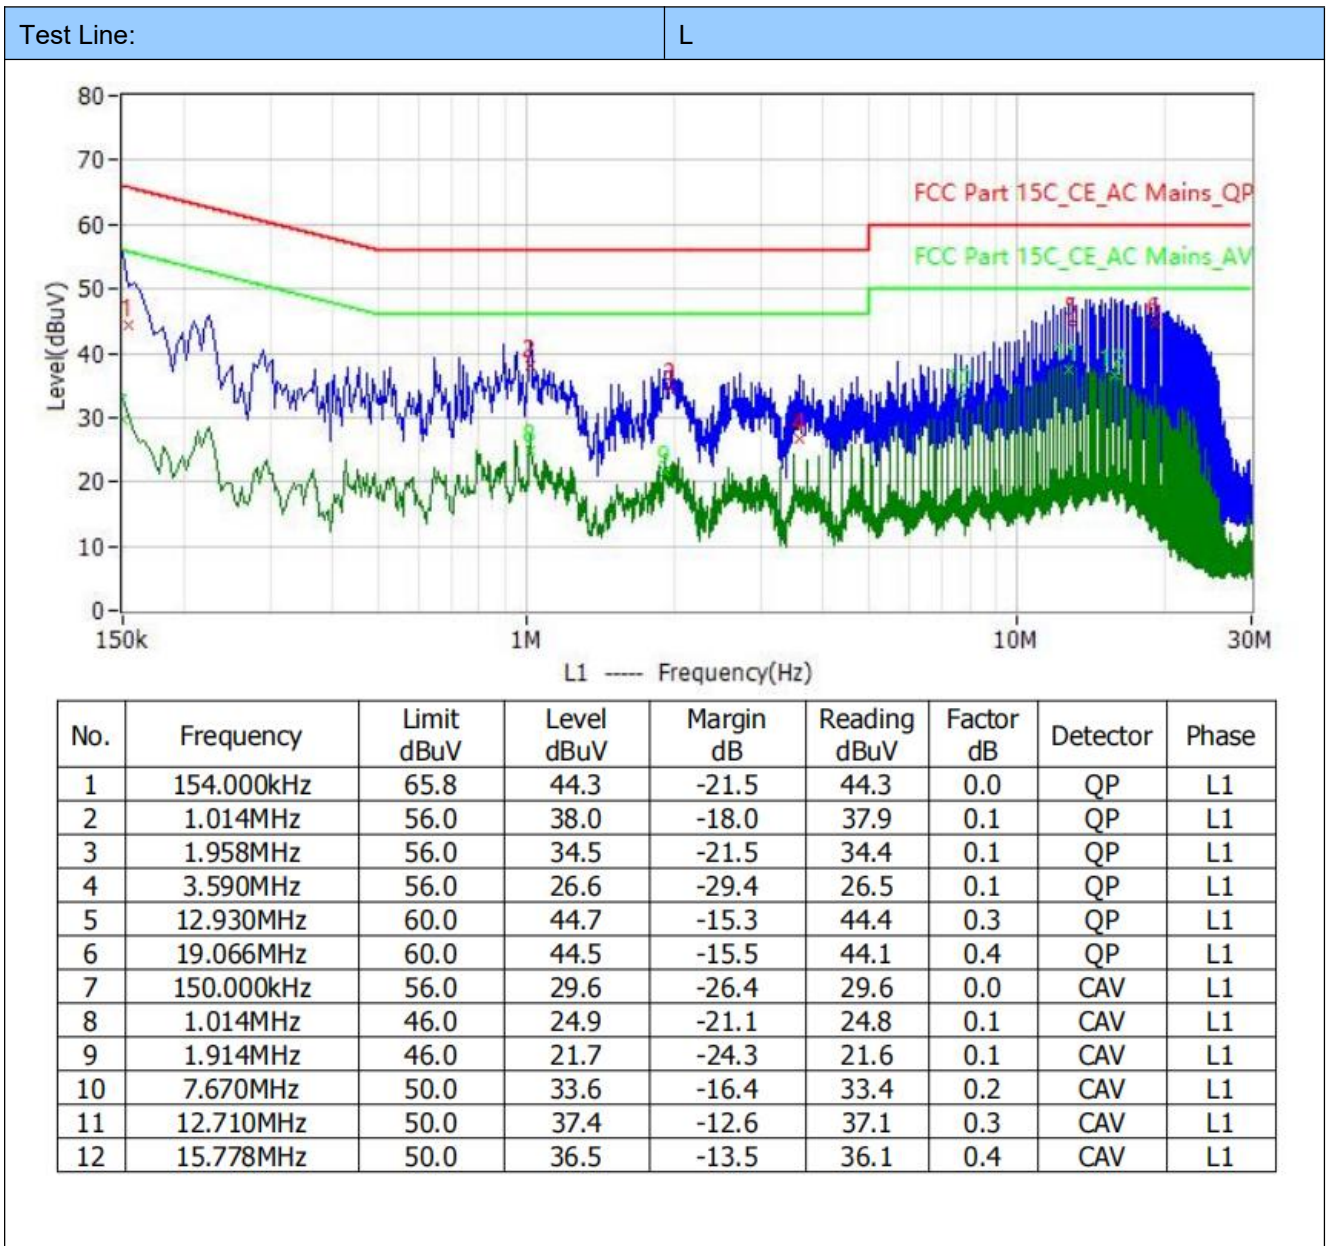

Test Line: N

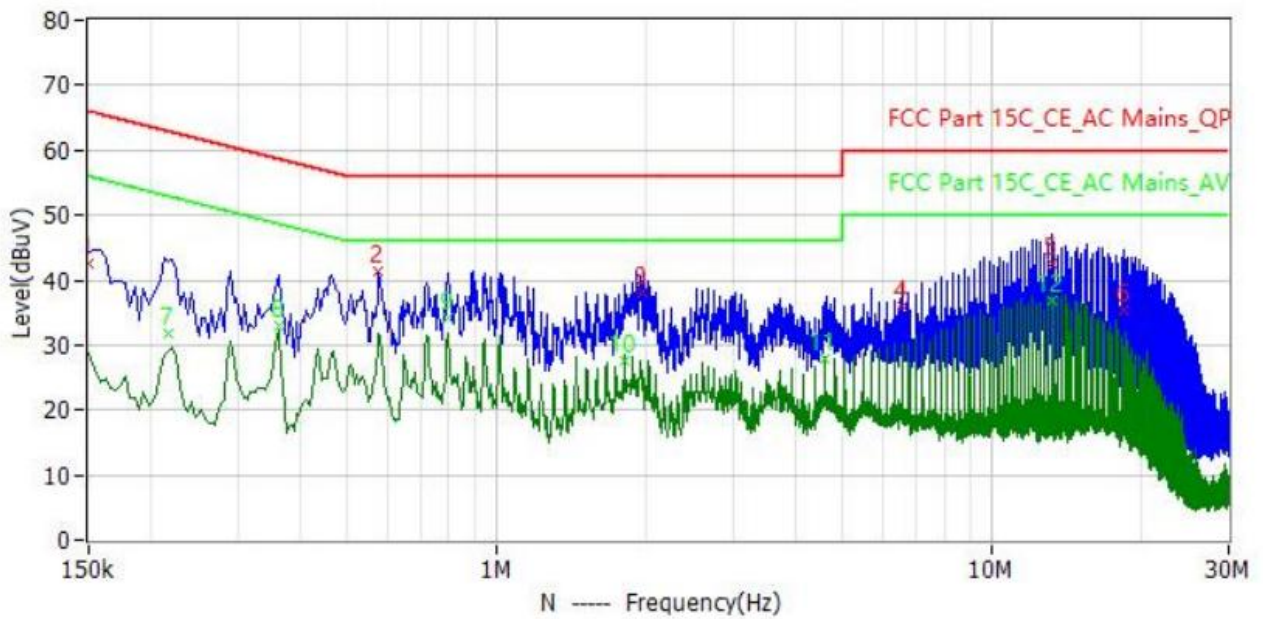

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Reading dBuV	Factor dB	Detector	Phase
1	150.000kHz	66.0	42.6	-23.4	42.6	0.0	QP	N
2	578.000kHz	56.0	41.2	-14.8	41.1	0.1	QP	N
3	1.958MHz	56.0	38.1	-17.9	38.0	0.1	QP	N
4	6.574MHz	60.0	36.0	-24.0	35.8	0.2	QP	N
5	13.146MHz	60.0	42.5	-17.5	42.1	0.4	QP	N
6	18.398MHz	60.0	35.4	-24.6	34.9	0.5	QP	N
7	218.000kHz	52.9	31.8	-21.1	31.8	0.0	CAV	N
8	362.000kHz	48.7	33.0	-15.7	32.9	0.1	CAV	N
9	794.000kHz	46.0	34.3	-11.7	34.2	0.1	CAV	N
10	1.806MHz	46.0	27.5	-18.5	27.4	0.1	CAV	N
11	4.602MHz	46.0	27.8	-18.2	27.6	0.2	CAV	N
12	13.146MHz	50.0	37.0	-13.0	36.6	0.4	CAV	N


Note:

1. Factor = LISN Factor + Cable Factor
2. Level= Reading + Factor
3. Margin= Level – Limit

5.2. 20 dB Bandwidth

Limit:

Test configuration:

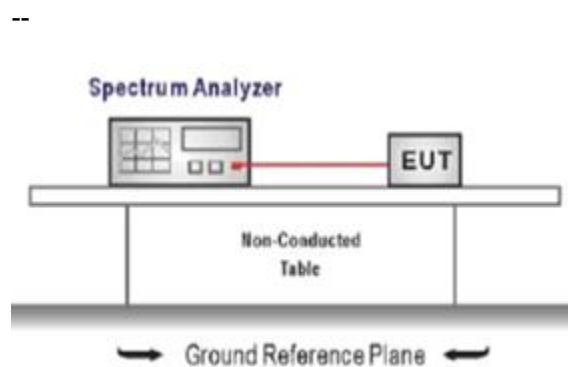

Test procedure:

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


Test mode:

Refer to the clause 4.1

Result:

Passed

Test Result :

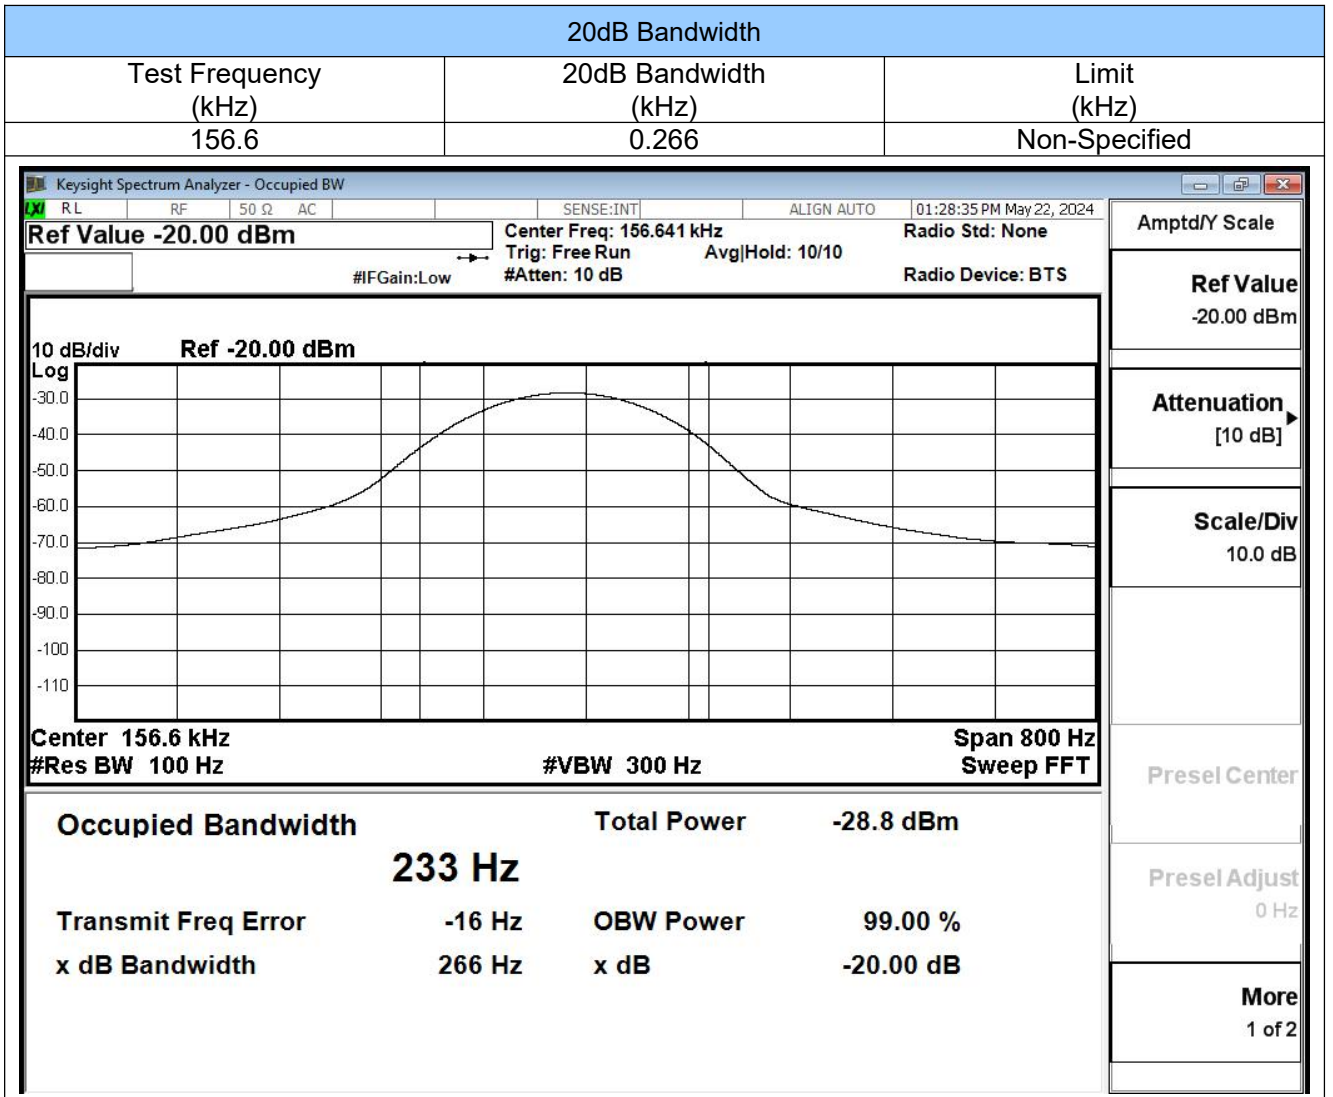

5.3. Radiated Spurious Emission

Limit:

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak

Test configuration:

9kHz~30MHz

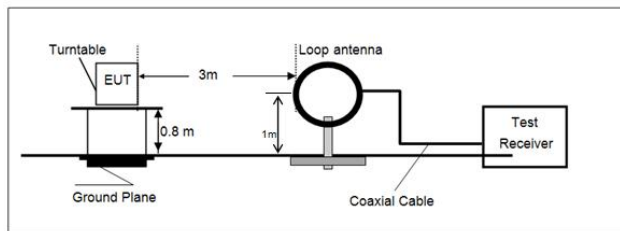

30 MHz ~ 1 GHz

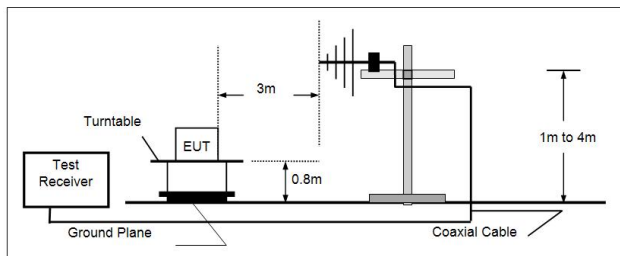

Test procedure:

1. The EUT was setup and tested according to ANSI C63.10.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Test mode:

Refer to the clause 4.1

Result:**Passed**


Note:

- 1) $\text{Level} = \text{Reading} + \text{Factor/Transd}$; $\text{Factor/Transd} = \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$
- 2) $\text{Margin} = \text{Limit} - \text{Level}$
- 3) The other emission levels were very low against the limit.
- 4) This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

For 9 kHz ~ 30 MHz

Have pre-scan all test channel, found Mode 7 which it was worst case, so only show the worst case's data on this report.

0°

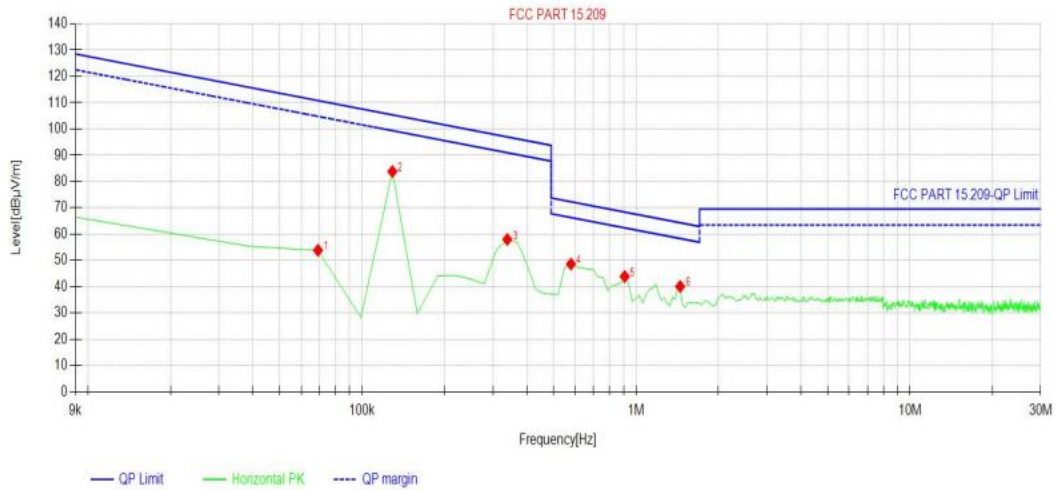


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Polarity	Verdict
1	0.069	33.55	53.89	20.34	110.83	56.94	Horizontal	PASS
2	0.129	63.65	83.85	20.20	105.39	21.54	Horizontal	PASS
3	0.3389	37.80	58.03	20.23	97.00	38.97	Horizontal	PASS
4	0.5788	28.45	48.66	20.21	72.35	23.69	Horizontal	PASS
5	0.9087	23.60	43.94	20.34	68.44	24.50	Horizontal	PASS
6	1.4486	19.67	40.15	20.48	64.39	24.24	Horizontal	PASS

For 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found Mode 7 which it was worst case, so only show the worst case's data on this report.


Polarization: Horizontal

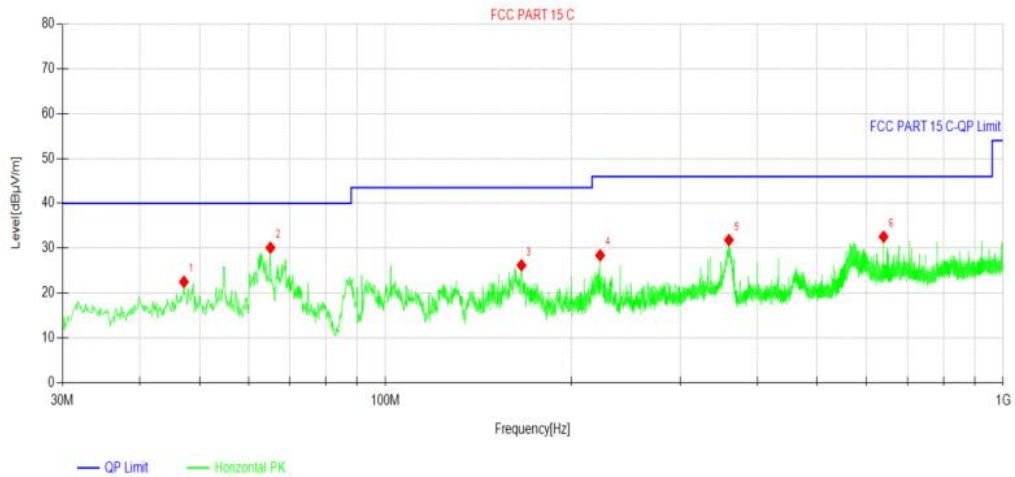

Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Polarity	Verdict
1	47.169	6.98	22.50	15.52	40.00	17.50	Horizontal	PASS
2	65.114	17.29	30.10	12.81	40.00	9.90	Horizontal	PASS
3	165.994	15.16	26.20	11.04	43.50	17.30	Horizontal	PASS
4	222.545	14.38	28.42	14.04	46.00	17.58	Horizontal	PASS
5	359.703	14.45	31.82	17.37	46.00	14.18	Horizontal	PASS
6	640.033	10.18	32.55	22.37	46.00	13.45	Horizontal	PASS

Polarization: Vertical

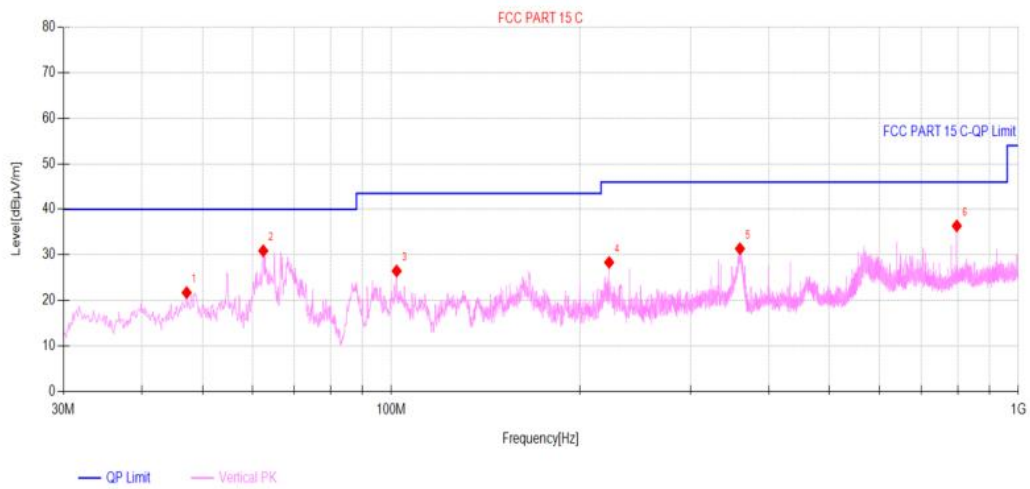

Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Polarity	Verdict
1	47.169	6.19	21.71	15.52	40.00	18.29	Vertical	PASS
2	62.495	17.46	30.90	13.44	40.00	9.10	Vertical	PASS
3	101.974	12.80	26.47	13.67	43.50	17.03	Vertical	PASS
4	222.545	14.31	28.35	14.04	46.00	17.65	Vertical	PASS
5	359.703	13.99	31.36	17.37	46.00	14.64	Vertical	PASS
6	797.658	12.16	36.37	24.21	46.00	9.63	Vertical	PASS

6. TEST SETUP PHOTOS

Please refer to separated files for Test Setup Photos of the EUT.

7. EXTERNAL AND INTERNAL PHOTOS

7.1 External photos

Please refer to separated files for External Photos of the EUT.

7.2 Internal photos

Please refer to separated files for Internal Photos of the EUT.

-----End of the report-----