

# RF Exposure evaluation

FCC ID	2ANYD-SHS2438
Product Name	ROTATING SUSPENSION LAMP
Model/Type reference	SHS-2438
Exposure category	General population/uncontrolled environment
EUT Type	Production Unit
Device Type	Mobile Device

## 1. Reference

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v04: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1091: Radiofrequency radiation exposure evaluation: mobile devices

FCC CFR 47 part 18.107: Industrial, Scientific, and Medical Equipment

## 2. Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz


\*=Plane-wave equivalent power density

According to FCC KDB 680106 D01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section 1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-Field	*/*	B-Field
Frequency	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	$824/f (=27.5_{30\text{MHz}})$	$2.19/f (=0.073_{30\text{MHz}})$	--

A KDB inquire was required to determine/confirm the applicable limits below 100 kHz.

### 3. Test Setup Diagram

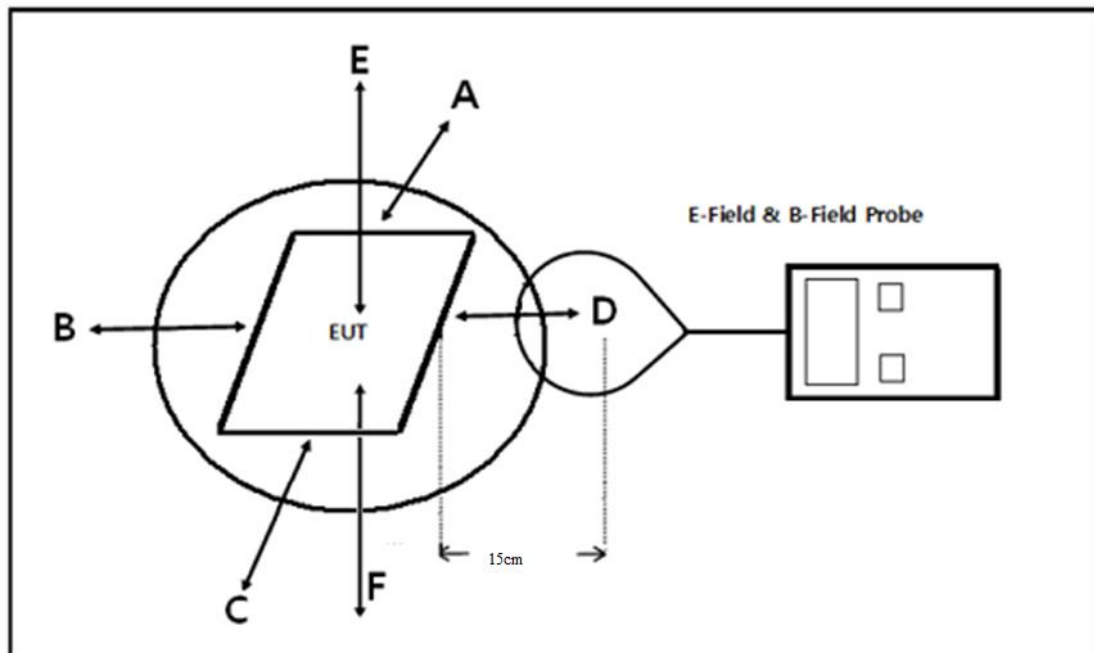

## 4. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2024-1-07	2025-1-06
B-Field Probe	Narda	ELT-400	M-1154	2024-1-07	2025-1-06

## 5. Support equipment List

Manufacturer	Description	Model	Serial Number
Honor	Phone	V30pro	--
Huawei	Adapter	HW-05002000C	--

Note: Auxiliary equipment is provided by the laboratory.

## 6. Measurement Procedure

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance (15cm and 20cm) which is between the edges of the charger and the geometric center of probe.
- c) The turn table was rotated 360d degree to search of highest strength.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- e) The EUT were measured according to the dictates of KDB 680106D01v04.

## 7. Equipment Approval Considerations

The EUT does comply with item 5.2 of KDB 680106 D01v04 as follows table;

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110.1kHz - 205kHz
The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes	The maximum output power of the primary coil is 15W.
A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes	Client device is placed directly in contact with the transmitter.
Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	Yes	EUT is a mobile device
The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes	Fulfil requirements
For systems with more than one radiating structure, the conditions specified in (5) must be met when the	Yes	EUT has only one coil

<p>system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.</p>		
---	--	--

## 8. E and H field Strength

Test Modes		
Mode 1	AC/DC Adapter(DC 5V/3A)+EUT +Mobile phone (Battery Status: <1%)	Pre-tested
Mode 2	AC/DC Adapter(DC 5V/3A)+EUT+ Mobile phone (Battery Status: <50%)	Pre-tested
Mode 3	AC/DC Adapter(DC 5V/3A)+EUT+ Mobile phone (Battery Status: <100%)	Pre-tested
Mode 4	AC/DC Adapter(DC 9V/2A)+EUT + Mobile phone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter(DC 9V/2A)+EUT + Mobile phone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter(DC 9V/2A)+EUT + Mobile phone (Battery Status: <100%)	Pre-tested
Mode 7	AC/DC Adapter(DC 12V/1.5A)+EUT + Mobile phone (Battery Status: <1%)	Record
Mode 8	AC/DC Adapter(DC 12V/1.5A)+EUT + Mobile phone (Battery Status: <50%)	Record
Mode 9	AC/DC Adapter(DC 12V/1.5A)+EUT + Mobile phone (Battery Status: <100%)	Record
Mode 10	EUT + Mobile phone (Wireless Output: 5W(Battery Status: <1%) )	Pre-tested
Mode 11	EUT + Mobile phone (Wireless Output: 5W(Battery Status: <50%) )	Pre-tested
Mode 12	EUT + Mobile phone (Wireless Output: 5W(Battery Status: <100%) )	Pre-tested
Mode 13	EUT + Mobile phone (Wireless Output: 7.5W(Battery Status: <1%) )	Pre-tested
Mode 14	EUT + Mobile phone (Wireless Output: 7.5W(Battery Status: <50%) )	Pre-tested
Mode 15	EUT + Mobile phone (Wireless Output: 7.5W(Battery Status: <100%) )	Pre-tested
Mode 16	EUT + Mobile phone (Wireless Output: 10W(Battery Status: <1%) )	Pre-tested
Mode 17	EUT + Mobile phone (Wireless Output: 10W(Battery Status: <50%) )	Pre-tested
Mode 18	EUT + Mobile phone (Wireless Output: 10W(Battery Status: <100%) )	Pre-tested
Mode 19	EUT + Mobile phone (Wireless Output: 15W(Battery Status: <1%) )	Pre-tested
Mode 20	EUT + Mobile phone (Wireless Output: 15W(Battery Status: <50%) )	Pre-tested
Mode 21	EUT + Mobile phone (Wireless Output: 15W(Battery Status: <100%) )	Pre-tested
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Load mode	Frequency Range (KHz)	Field Strength	Measured E - Field Strength Values (V/m)					50% Limits	Limits
			Measured H - Field Strength Values (A/m)						
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 7	110.1~205.0	uT	0.123	0.104	0.102	0.106	0.108	--	--
Mode 7	110.1~205.0	A/m	0.098	0.083	0.082	0.085	0.086	0.815	1.63
Mode 7	110.1~205.0	V/m	36.017	39.465	43.125	39.403	42.855	307.0	614.0
Mode 8	110.1~205.0	uT	0.114	0.095	0.093	0.097	0.099	--	--
Mode 8	110.1~205.0	A/m	0.091	0.076	0.074	0.078	0.079	0.815	1.63
Mode 8	110.1~205.0	V/m	33.609	36.833	40.335	36.782	40.017	307.0	614.0
Mode 9	110.1~205.0	uT	0.109	0.090	0.088	0.092	0.094	--	--
Mode 9	110.1~205.0	A/m	0.087	0.072	0.070	0.074	0.075	0.815	1.63
Mode 9	110.1~205.0	V/m	34.990	38.096	40.402	37.707	39.385	307.0	614.0


H-Field Strength at 20cm from the top surface of the EUT  
TM7~TM9

Charging Battery Level	Unit	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position E		
1%	uT	0.107	--	--
1%	A/m	0.086	0.815	1.63
50%	uT	0.093	--	--
50%	A/m	0.074	0.815	1.63
99%	uT	0.068	--	--
99%	A/m	0.055	0.815	1.63

Note: 1A/m=1.25uT


## 9. Test Setup Photos

Test Position A - Exposure photo from side edge surface-Rear

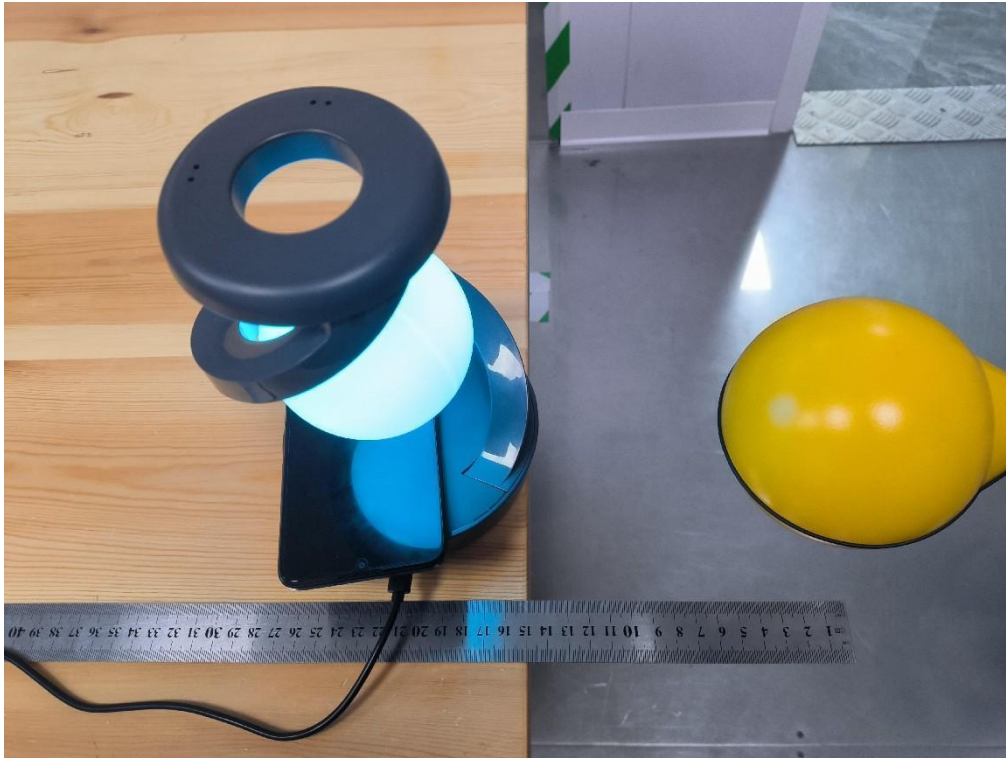

(TM7)

Test Position B - Exposure photo from side edge surface-Left

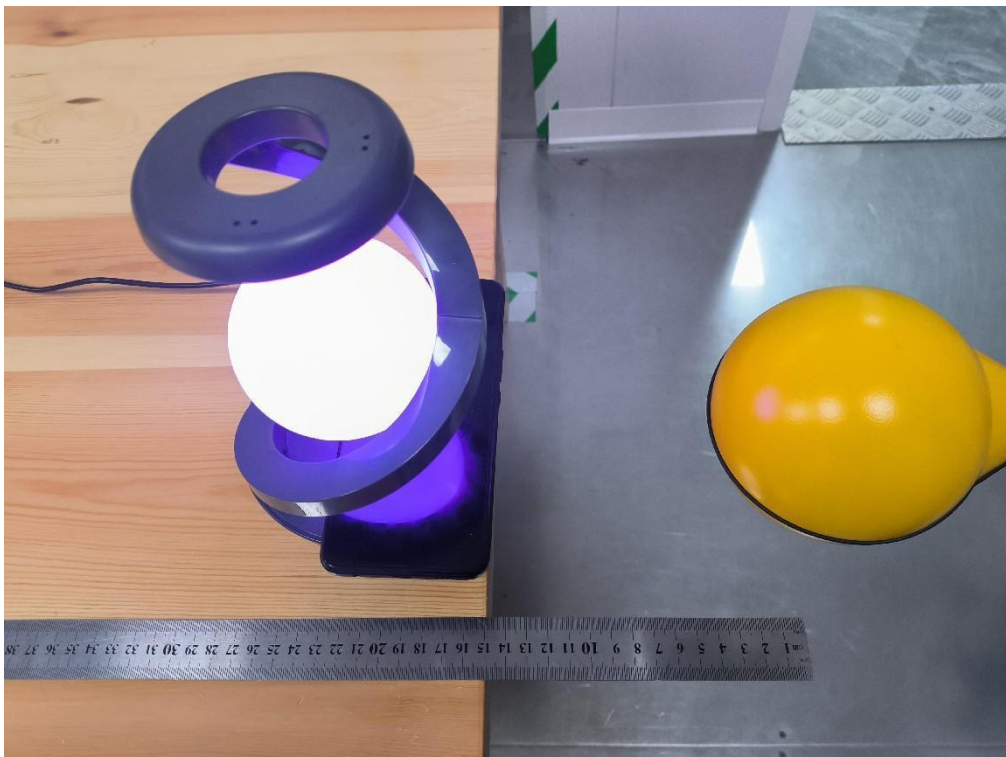

(TM7)




Test Position C - Exposure photo from side edge surface-Front



(TM7)

Test Position D - Exposure photo from side edge surface-Right

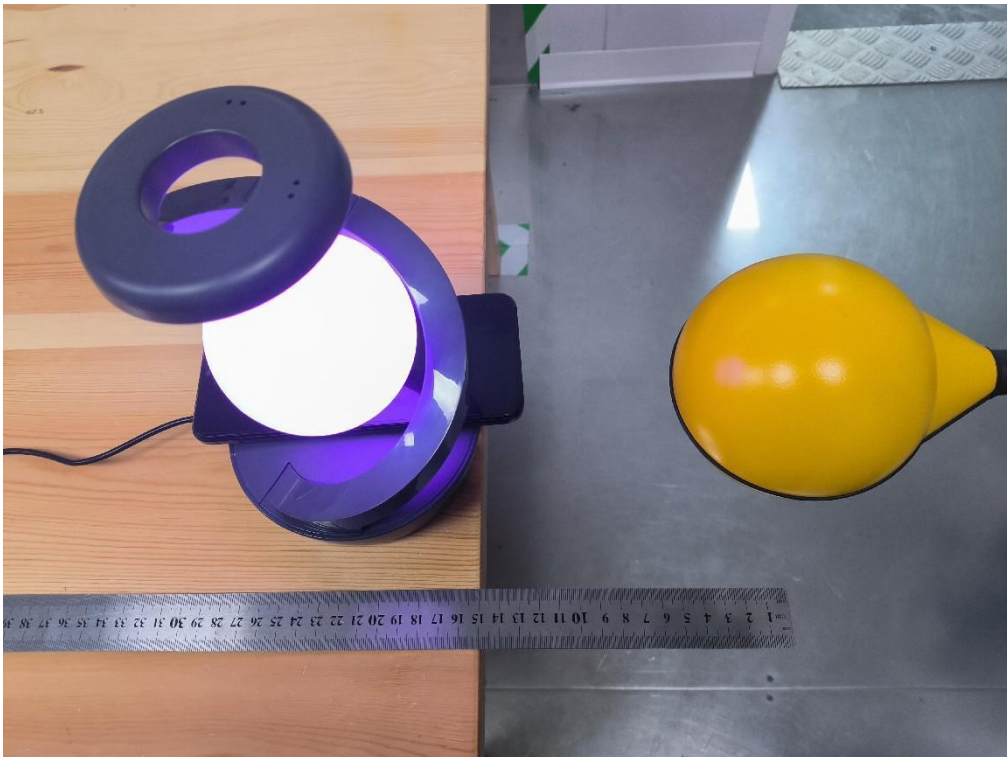

(TM7)

Test Position E - Exposure photo from top surface (15cm)



(TM7)

Test Position E- Exposure photo from top surface (20cm)



(TM7)

-----End of the report-----