

# RADIO TEST REPORT – 486663-2TRFWL

Type of assessment:

**Final product testing**

Applicant:

**Egicon Srl**

**Via Posta Vecchia, 36 – 41037 Mirandola (MO) – Italy**

Product:

**Dashboard for motorcycle with integrated RFID reader**

Model:

**RTADE001**

FCC ID:

**2ANYI-RTADE001**

IC Registration number:

**23285-RTADE001**

Specifications:

- ◆ FCC 47 CFR Part 15 Subpart C
- ◆ RSS-210, Issue 10, December 2019

Date of issue: **November 4, 2022**

**P. Barbieri**

Tested by



Signature

**D. Guarnone**

Reviewed by



Signature

This test report shall not be partially reproduced without the prior written consent of Nemko S.p.A. The phase of sampling of equipment under test is carried out by the customer. Results indicated in this test report refer exclusively to the tested samples and apply to the sample as received. This Test Report, when bearing the Nemko name and logo is only valid when issued by a Nemko laboratory, or by a laboratory having special agreement with Nemko.

#### Test location

---

Company name	Nemko Spa
Address	Via del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+39 039 220 12 01
Facsimile	+39 039 220 12 21
Website	www.nemko.com
Site number	682159 and 9109A

#### Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Spa ISO/IEC 17025 accreditation.

#### Copyright notification

---

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

# Table of contents

<b>Table of contents</b> .....	<b>3</b>
<b>Section 1. Report summary</b> .....	<b>4</b>
1.1 Applicant and manufacturer.....	4
1.2 Test specifications.....	4
1.3 Test methods.....	4
1.4 Statement of compliance.....	4
1.5 Exclusions.....	4
1.6 Test report revision history.....	4
<b>Section 2. Summary of test results</b> .....	<b>5</b>
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 IC RSS-GEN, Issue 5, test results.....	5
2.3 IC RSS-210, Issue 10, test results.....	5
<b>Section 3. Equipment under test (EUT) details</b> .....	<b>6</b>
3.1 Sample information.....	6
3.2 EUT information.....	6
3.3 Technical information.....	6
3.4 Product description and theory of operation.....	6
3.5 EUT exercise details.....	6
3.6 EUT setup photos.....	7
3.7 Equipment Used During Test.....	7
<b>Section 4. Engineering considerations</b> .....	<b>8</b>
4.1 Modifications incorporated in the EUT.....	8
4.2 Technical judgment.....	8
4.3 Deviations from laboratory tests procedures.....	8
<b>Section 5. Test conditions</b> .....	<b>9</b>
5.1 Atmospheric conditions.....	9
5.2 Power supply range.....	9
<b>Section 6. Measurement uncertainty</b> .....	<b>10</b>
6.1 Uncertainty of measurement.....	10
<b>Section 7. Test equipment</b> .....	<b>11</b>
7.1 Test equipment list.....	11
<b>Section 8. Testing data</b> .....	<b>12</b>
8.1 RSS-Gen 8.11 Frequency stability.....	12
8.2 RSS-Gen 6.7 Occupied bandwidth.....	13
8.3 FCC 15.209(a) and RSS-210, Radiated emissions limits.....	15
<b>Section 9. Block diagrams of test set-ups and EUT photos</b> .....	<b>23</b>
9.1 Radiated emissions set-up below 30 MHz.....	23
9.2 Radiated emissions set-up below 1 GHz.....	24
9.3 Set-up photos.....	25
9.4 EUT photos.....	26

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

Applicant name	Egicon Srl
Applicant address	Via Posta Vecchia, 36 – 41037 Mirandola (MO) – Italy
Manufacture name	Same as applicant
Manufacture address	Same as applicant

### 1.2 Test specifications

---

FCC 47 CFR Part 15, Subpart C	Intentional radiators
RSS-210, Issue 10, Section 7	General field strength limits

### 1.3 Test methods

---

ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-Gen, Issue 5 (April 2018) + Amendment 1 (March 2019) + Amendment 2 (February 2021)	General Requirements for Compliance of Radio Apparatus

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

Revision #	Details of changes made to test report
486663-2TRFWL	Original report issued

## Section 2. Summary of test results

---

### 2.1 FCC Part 15 Subpart C, general requirements test results

---

Part	Test description	Verdict
§15.207(a)	Conducted limits	Not applicable <sup>1</sup>
§15.31	Variation of power source	Pass <sup>2</sup>
§15.31(m)	Number of tested frequencies	Pass <sup>3</sup>
§15.203	Antenna requirement	Pass <sup>4</sup>
§15.209	Radiated emission limits; general requirements.	Pass

Notes: <sup>1</sup> The EUT is supplied by the vehicle battery.

<sup>2</sup> Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed.

<sup>3</sup> The EUT use only one transmitting frequency

<sup>4</sup> The Antennas are located within the enclosure of EUT and not user accessible.

### 2.2 IC RSS-GEN, Issue 5, test results

---

Part	Test description	Verdict
6.7	Occupied bandwidth	Pass
8.8	AC power lines conducted emission limits	Not applicable <sup>1</sup>
8.9	Transmitter emission limits	Pass
8.11	Transmitter frequency stability	Pass

Notes: <sup>1</sup> The EUT is supplied by the vehicle battery.

<sup>2</sup> The EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

### 2.3 IC RSS-210, Issue 10, test results

---

Part	Test description	Verdict
7.2	General field strength limits	Pass
7.3	Transmitters with Wanted Emissions that are Within the General Field Strength Limits	Pass

Notes: None

## Section 3. Equipment under test (EUT) details

---

### 3.1 Sample information

---

Receipt date	October 24, 2022
Nemko sample ID number	486663

### 3.2 EUT information

---

Product name	Dashboard for motorcycle with integrated RFID reader
Model	RTADE001
Model variant	--
Serial number	000023

### 3.3 Technical information

---

Operating frequency	134.2 kHz
Modulation type	FSK
Occupied bandwidth (99 %)	9.85 kHz
Field strength, dB $\mu$ V/m @ 3 m	73.6 dB $\mu$ V/m
Emission designator	F1D
Power requirements	12 V DC from vehicular battery
Antenna information	The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.

### 3.4 Product description and theory of operation

---

The EUT is a dashboard with RFID transponder (reader) exclusive use on Ducati motorcycles and perform the motorcycle board function for reading analog and digital input signals, activating analogue and digital outputs, CAN line communication with other electronic devices on board and display useful information to the driver with LCD and LED.

### 3.5 EUT exercise details

---

The EUT has been tested forced in continuous transmission mode by a dedicated firmware preinstalled by the manufacturer. Firmware version: 11

### 3.6 EUT setup photos

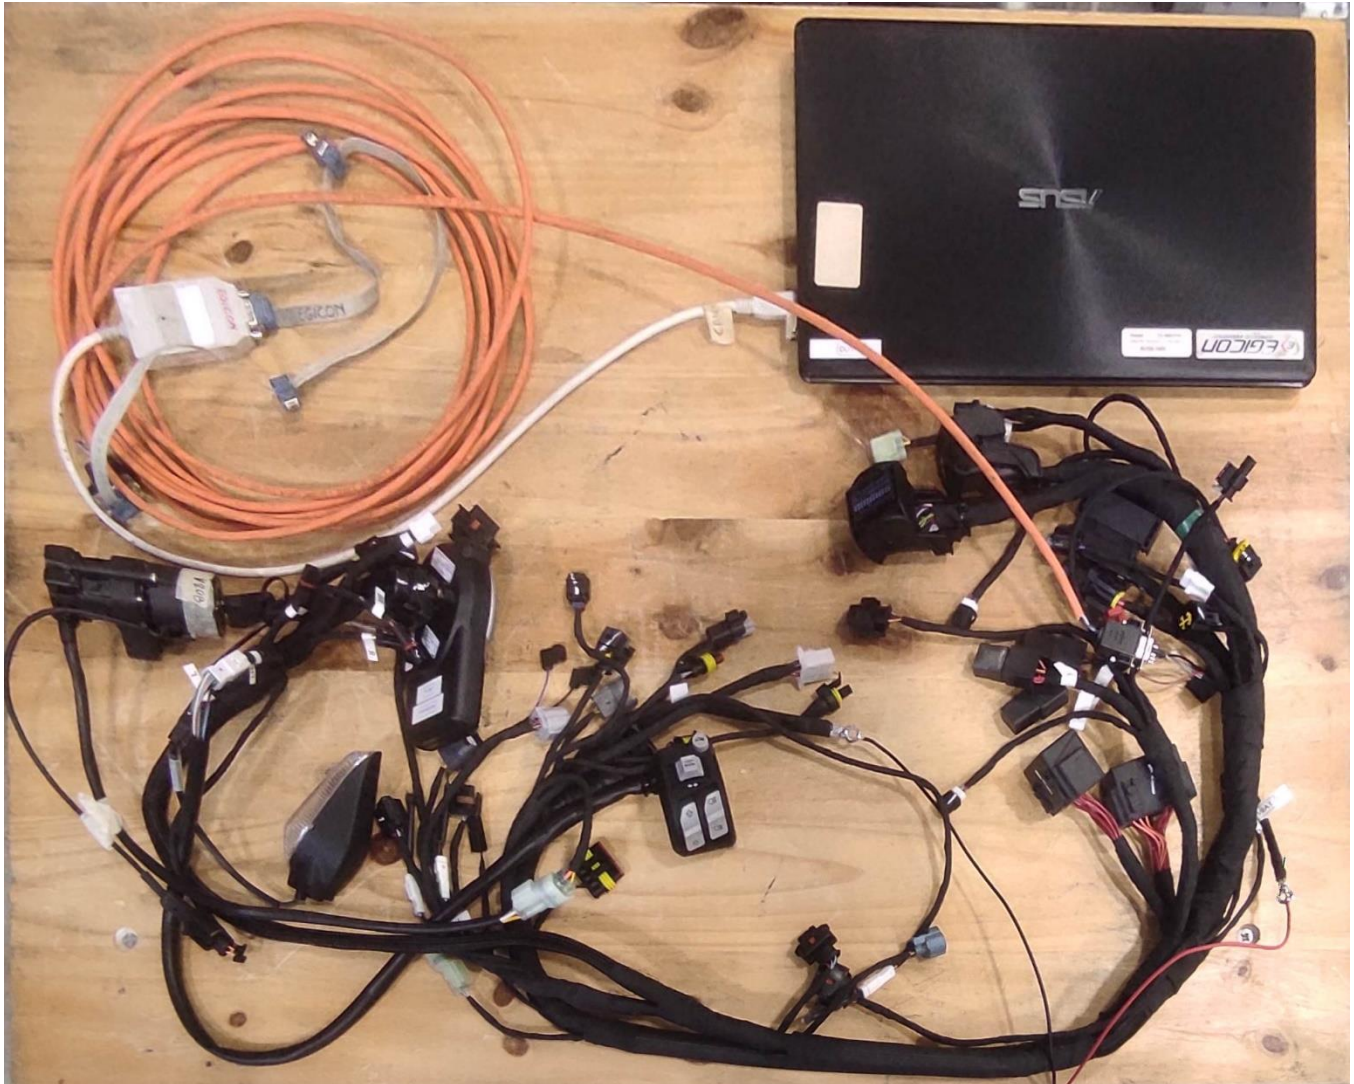


Figure 3.6-1: Setup photos

### 3.7 Equipment Used During Test

Table 3.7-1: Equipment Used During Test

Description	Brand name	Model/Part number	Serial number
Original cable and accessories	Ducati	--	--
PC with CAN TO USB converter	Asus	P550C	--

## Section 4. Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

None

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.



## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

Temperature	15 °C – 35 °C
Relative humidity	20 % – 75 %
Air pressure	86 kPa (860 mbar) – 106 kPa (1060 mbar)

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

The following instruments are used to monitor the environmental conditions:

Equipment	Manufacturer	Model no.	Asset no.	Cal date	Next cal.
Thermo-hygrometer data loggers	Testo	175-H2	20012380/305	2020-12	2022-12
Thermo-hygrometer data loggers	Testo	175-H2	38203337/703	2020-12	2022-12
Barometer	Castle	GPB 3300	072015	2022-04	2023-04

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 15\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

### 6.1 Uncertainty of measurement

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002.

The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
		Carrier power RF Output Power	0.009 MHz ÷ 30 MHz	1.1 dB	(1)
			30 MHz ÷ 18 GHz	1.5 dB	(1)
			18 MHz ÷ 40 GHz	3.0 dB	(1)
			40 MHz ÷ 140 GHz	5.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.4 dB	(1)
		Conducted spurious emissions	0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter– Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
		Dwell time	-	3%	(1)
	Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)	
	Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)	
	Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)	
	Radiated	Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
26.5 GHz ÷ 66 GHz			8.0 dB	(1)	
66 GHz ÷ 220 GHz			10 dB	(1)	
Effective radiated power transmitter		10 kHz ÷ 26.5 GHz	6.0 dB	(1)	
		26.5 GHz ÷ 66 GHz	8.0 dB	(1)	
66 GHz ÷ 220 GHz	10 dB	(1)			

#### NOTES:

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$ , which for a normal distribution corresponds to a coverage probability of approximately 95 %

## Section 7. Test equipment

### 7.1 Test equipment list

*Table 7.1-1: Equipment list*

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI Receiver	Rohde & Schwarz	ESW44	101620	2022-08	2023-08
EMI Receiver	Rohde & Schwarz	ESU8	100202	2022-09	2023-09
Antenna Loop Attiva	Teseq	HLA6121+PI6121	45749	2020-07	2023-07
Antenna Trilog 25MHz - 8GHz	Schwarzbeck Mess-Elektronik	VULB9162	9162-025	2021-07	2024-07
Controller	Maturo	FCU3.0	10041	NCR	NCR
Tilt antenna mast	Maturo	TAM4.0-E	10042	NCR	NCR
Turntable	Maturo	TT4.0-5T	2.527	NCR	NCR
Semi-anechoic chamber	Nemko S.p.a.	10m semi-anechoic chamber	530	2021-09	2023-09
Climatic Chamber	MSL	EC500DA	15022	2022-02	2023-02

Notes: NCR - no calibration required, VOU - verify on use

## Section 8. Testing data

### 8.1 RSS-Gen 8.11 Frequency stability

#### 8.1.1 Definitions and limits

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

#### 8.1.2 Test summary

Verdict	Pass		
Tested by	P. Barbieri	Test date	November 4, 2022

#### 8.1.3 Observations, settings and special notes

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	≥1 % of emission bandwidth
Video bandwidth	RBW × 3
Trace mode	Max Hold

#### 8.1.4 Test equipment used

Equipment	Manufacturer	Model no.	Asset no.
EMI Receiver	Rohde & Schwarz	ESW44	101620
Climatic Chamber	MSL	EC500DA	15022

#### 8.1.5 Test data

Test conditions	Frequency, kHz	Frequency drift, ±ppm	Limit, ±ppm	Margin, ppm
+50 °C, Nominal	134.448717949	-77.5	--	--
+40 °C, Nominal	134.450745652	-62.4	--	--
+30 °C, Nominal	134.455372156	-28.0	--	--
+20 °C, +15 %	134.459134615	0.0	--	--
+20 °C, Nominal	134.459134615	Reference	Reference	Reference
+20 °C, -15 %	134.459134615	0.0	--	--
+10 °C, Nominal	134.462355314	24.0	--	--
-0 °C, Nominal	134.465544872	47.7	--	--
-10 °C, Nominal	134.467147436	59.6	--	--
-20 °C, Nominal	134.471942308	95.3	--	--

Note: frequency drift was calculated as follows:

$$\text{Frequency drift (ppm)} = ((F_{\text{measured}} - F_{\text{reference}}) \div F_{\text{reference}}) \times 1 \times 10^6$$

## 8.2 RSS-Gen 6.7 Occupied bandwidth

### 8.2.1 Definitions and limits

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

The following conditions shall be observed for measuring the occupied bandwidth:

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

### 8.2.2 Test summary

Verdict	Pass		
Tested by	P. Barbieri	Test date	October 31, 2022

### 8.2.3 Observations, settings and special notes


Spectrum analyser settings:

Resolution bandwidth:	1% to 5% of the actual occupied
Video bandwidth:	$\geq 3 \times \text{RBW}$
Detector mode:	Peak
Trace mode:	Max Hold

### 8.2.4 Test equipment used

Equipment	Manufacturer	Model no.	Asset no.
EMI Receiver	Rohde & Schwarz	ESW44	101620
Antenna Loop Attiva+Power Inserter	Teseq	HLA6121+PI6121	45749
Controller	Maturo	FCU3.0	10041
Tilt antenna mast	Maturo	TAM4.0-E	10042
Turntable	Maturo	TT4.0-5T	2.527
Semi-anechoic chamber	Nemko S.p.a.	10m semi-anechoic chamber	530

8.2.5 Test data

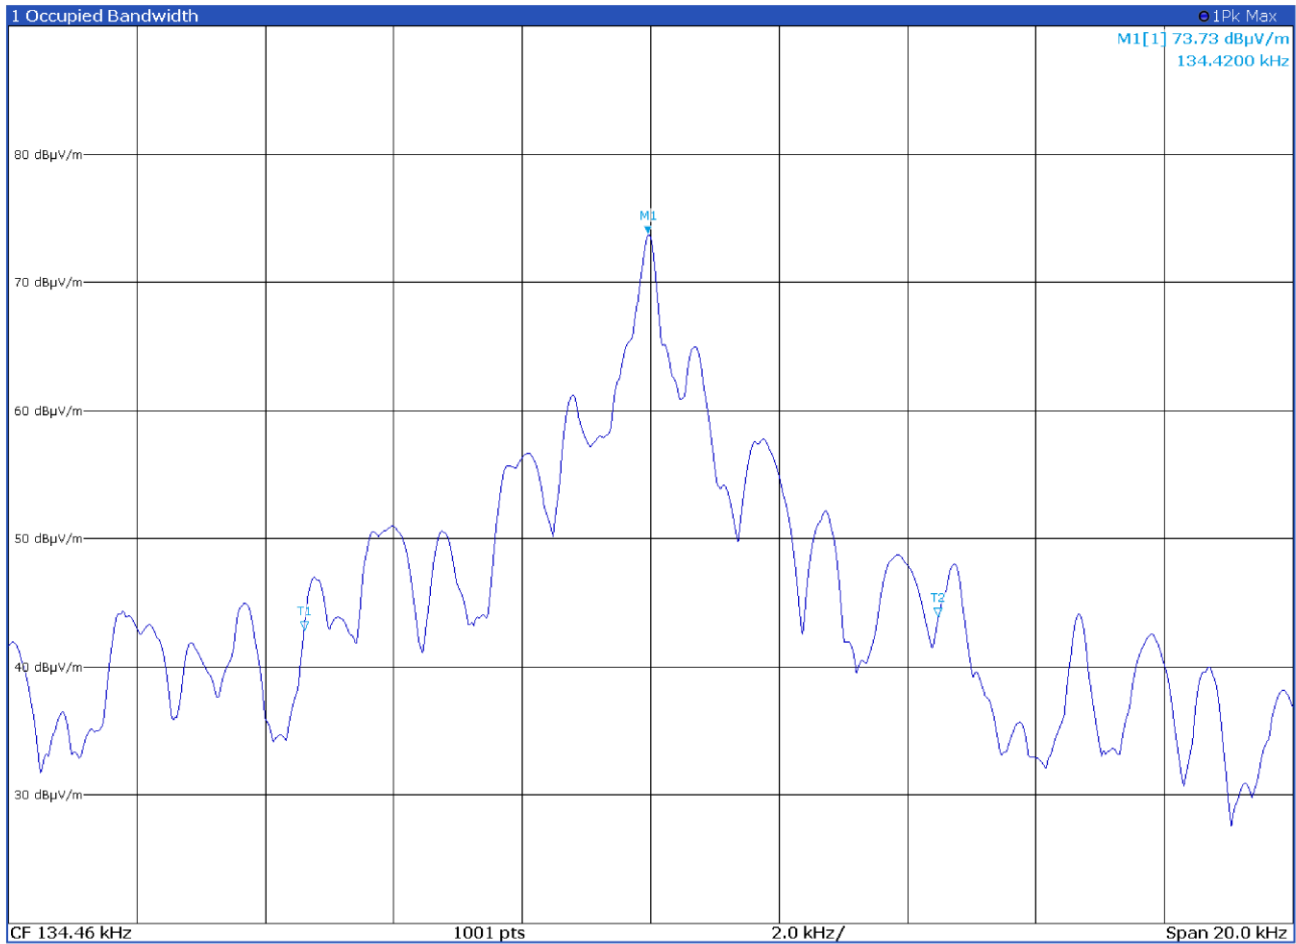

2 Marker Table						
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		1	<b>134.42 kHz</b>	<b>73.73 dBµV/m</b>	Occ Bw	<b>9.852017332 kHz</b>
T1		1	129.0752 kHz	42.87 dBµV/m	Occ Bw Centroid	134.001226723 kHz
T2		1	138.9272 kHz	43.91 dBµV/m	Occ Bw Freq Offset	-458.773277255 Hz

Table 8.2-1: 99 % bandwidth results

Modulation	99 % bandwidth
FSK	9.85 kHz

## 8.3 FCC 15.209(a) and RSS-210, Radiated emissions limits

### 8.3.1 Definitions and limits

**FCC:**

- (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the Table 8.3-1 below.
- (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
- (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

**IC:**

Unless otherwise indicated, equipment for which emissions fall within the restricted frequency bands listed in RSS-Gen shall comply with the provisions set forth in RSS-Gen.

RSS-Gen includes the general field strength limits of unwanted emissions, where applicable, for transmitters and receivers operating in accordance with the provisions specified in this standard.

Unless otherwise indicated, unwanted emissions of transmitters and receivers are permitted to fall within the restricted frequency bands listed in RSS-Gen and the TV bands 54-72 MHz, 76-88 MHz, 174-216 MHz and 470-602 MHz; however, fundamental emissions are prohibited in these bands, except where equipment operation is permitted in the applicable RSS.

Transmitters whose wanted and unwanted emissions fall within the general field strength limits specified in RSS-Gen may operate licence-exempt in any of the frequency bands, other than the restricted frequency bands listed in RSS-Gen and the TV bands 54-72 MHz, 76-88 MHz, 174-216 MHz and 470-602 MHz, and shall be certified under RSS-210. Under no circumstances shall the level of any unwanted emissions exceed the level of the fundamental emissions

Devices operating below 490 kHz for which all emissions are at least 40 dB below the general field strength limit listed in RSS-Gen (for transmitters at frequencies below 30 MHz) are Category II devices and are subject to the requirements specified in RSS-310, Licence-Exempt Radio Apparatus: Category II Equipment.

**Table 8.3-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Definitions and limits, continued

**Table 8.3-2: IC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	12.51975–12.52025	399.9–410	5.35–5.46
2.1735–2.1905	12.57675–12.57725	608–614	7.25–7.75
3.020–3.026	13.36–13.41	960–1427	8.025–8.5
4.125–4.128	16.42–16.423	1435–1626.5	9.0–9.2
4.17725–4.17775	16.69475–16.69525	1645.5–1646.5	9.3–9.5
4.20725–4.20775	16.80425–16.80475	1660–1710	10.6–12.7
5.677–5.683	25.5–25.67	1718.8–1722.2	13.25–13.4
6.215–6.218	37.5–38.25	2200–2300	14.47–14.5
6.26775–6.26825	73–74.6	2310–2390	15.35–16.2
6.31175–6.31225	74.8–75.2	2655–2900	17.7–21.4
8.291–8.294	108–138	3260–3267	22.01–23.12
8.362–8.366	156.52475–156.52525	3332–3339	23.6–24.0
8.37625–8.38675	156.7–156.9	3345.8–3358	31.2–31.8
8.41425–8.41475	240–285	3500–4400	36.43–36.5
12.29–12.293	322–335.4	4500–5150	Above 38.6

Note: Certain frequency bands listed in Table 8.3-2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

**Table 8.3-3: FCC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.3.2 Test summary

Verdict	Pass		
Tested by	P. Barbieri	Test date	October 31, 2022



### 8.3.3 Observations, settings and special notes

---

The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic.  
 Radiated measurements were performed at a distance of 3 m

Receiving settings for radiated measurements below 150 kHz:

Resolution bandwidth:	200 Hz
Detector mode:	Peak
Trace mode:	Max Hold

Receiving settings for radiated measurements below 30 MHz:

Resolution bandwidth:	9 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Receiving settings for radiated measurements below 1 GHz:

Resolution bandwidth:	120 kHz
Detector mode:	Peak
Trace mode:	Max Hold

### 8.3.4 Test equipment used

---

Equipment	Manufacturer	Model no.	Asset no.
EMI Receiver	Rohde & Schwarz	ESW44	101620
Antenna Loop Attiva+Power Inserter	Teseq	HLA6121+PI6121	45749
Antenna Trilog 25MHz - 8GHz	Schwarzbeck Mess-Elektronik	VULB9162	9162-025
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STLP 9148-152
Broadband Amplifier	Schwarzbeck Mess-Elektronik	BBV9718	BBV9718-137
Controller	Maturo	FCU3.0	10041
Tilt antenna mast	Maturo	TAM4.0-E	10042
Turntable	Maturo	TT4.0-5T	2.527
Semi-anechoic chamber	Nemko S.p.a.	10m semi-anechoic chamber	530

8.3.5 Test data

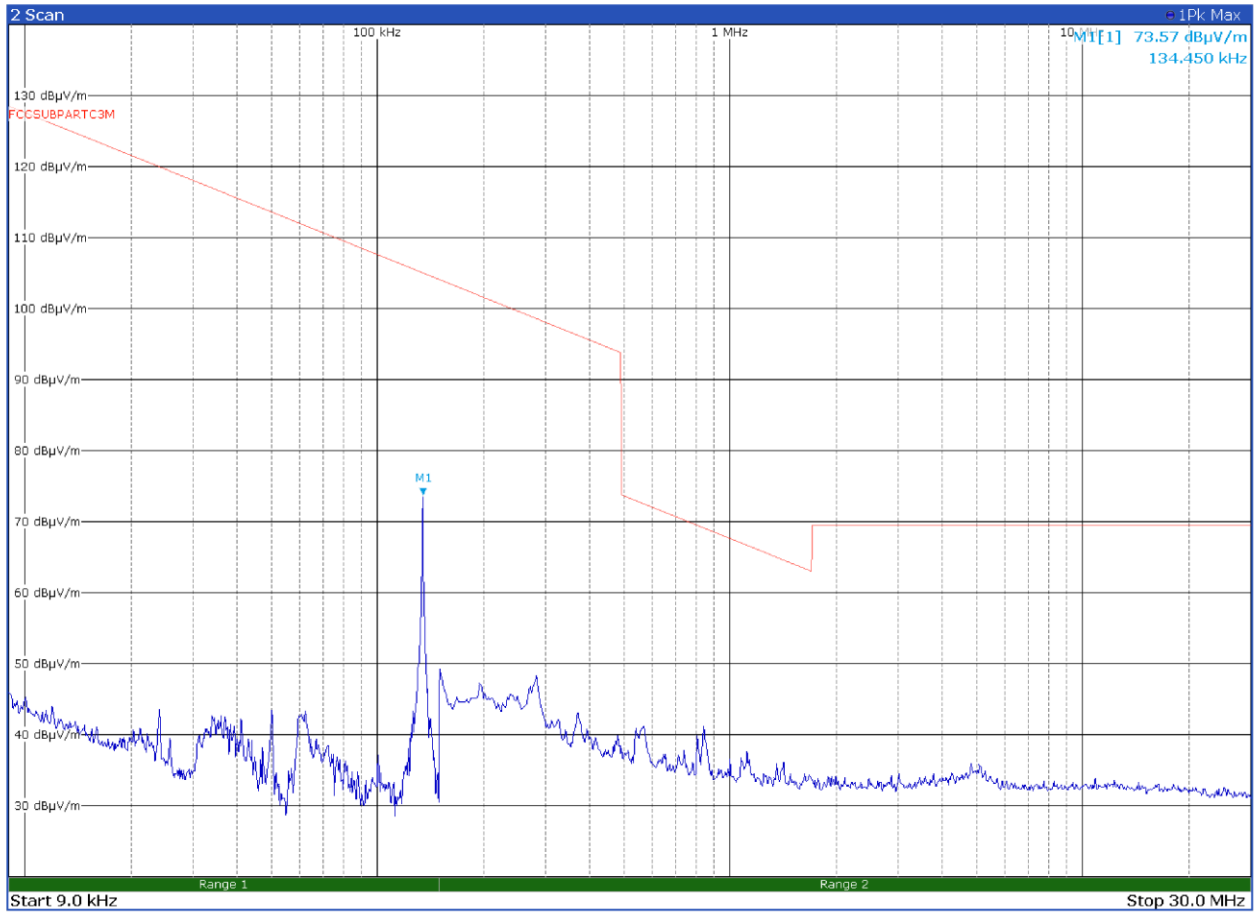


Figure 8.3-1: Radiated emissions with antenna loop

Test data, continued

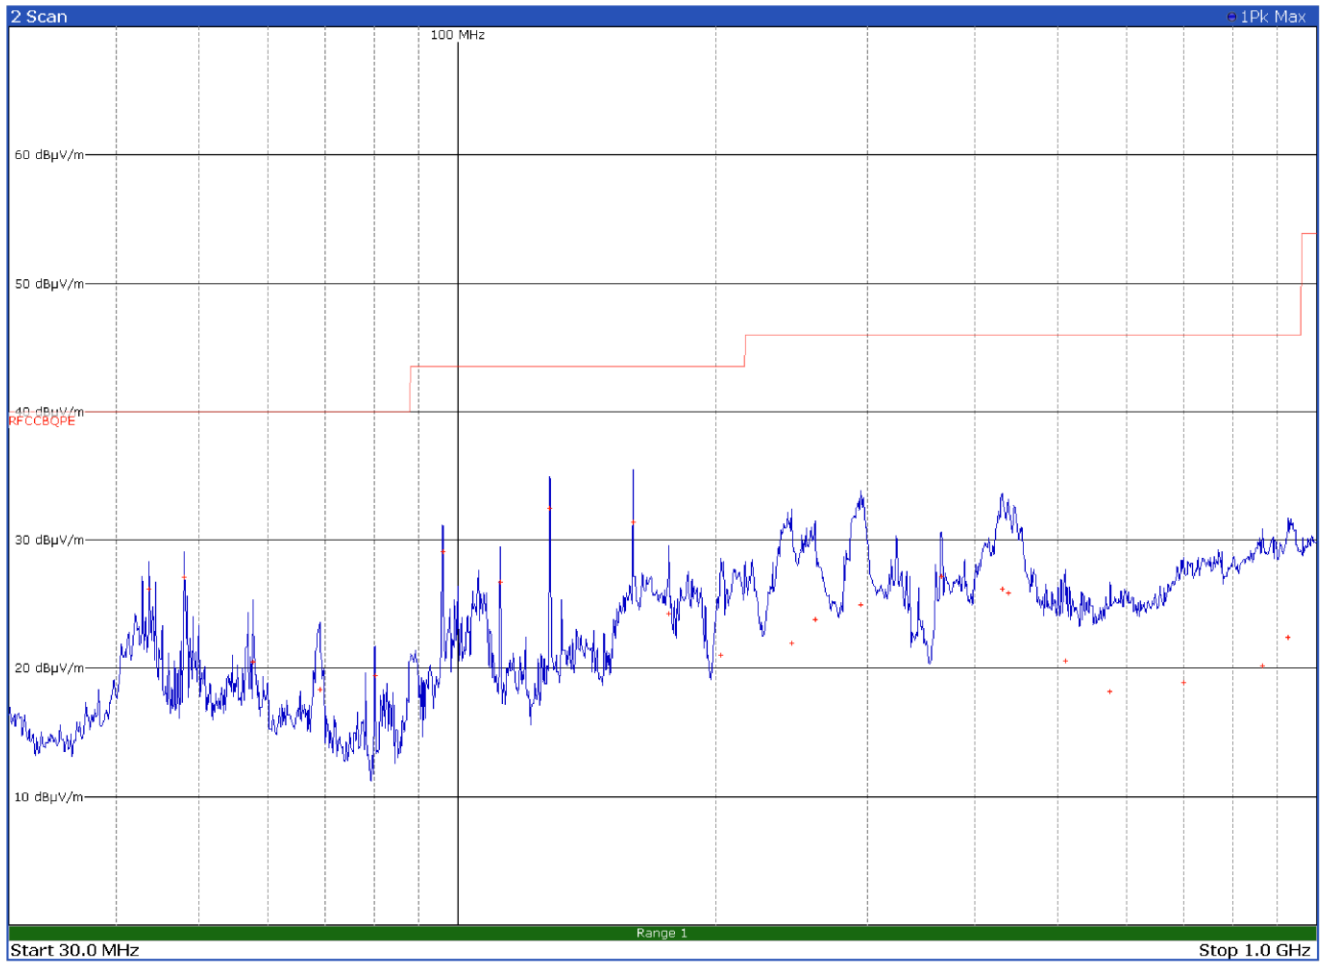


Figure 8.3-2: Radiated emissions with antenna in horizontal polarization

Test data, continued

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
43.6800	26.2	40.0	-13.8	QP
48.0000	27.2	40.0	-12.8	QP
57.7200	20.6	40.0	-19.4	QP
69.0300	18.4	40.0	-21.6	QP
80.0100	19.4	40.0	-20.6	QP
96.0000	29.2	43.5	-14.3	QP
111.9900	26.7	43.5	-16.8	QP
128.0100	32.5	43.5	-11.0	QP
159.9900	31.4	43.5	-12.1	QP
175.9800	24.3	43.5	-19.2	QP
202.4700	21.1	43.5	-22.4	QP
244.6500	22.0	46.0	-24.0	QP
260.5800	23.8	46.0	-22.2	QP
294.5400	25.0	46.0	-21.0	QP
365.1900	27.2	46.0	-18.8	QP
430.3500	26.2	46.0	-19.8	QP
437.2500	25.9	46.0	-20.1	QP
510.0000	20.6	46.0	-25.4	QP
574.9800	18.3	46.0	-27.7	QP
699.7800	19.0	46.0	-27.0	QP
865.7100	20.2	46.0	-25.8	QP
927.3000	22.5	46.0	-23.5	QP

Test data, continued

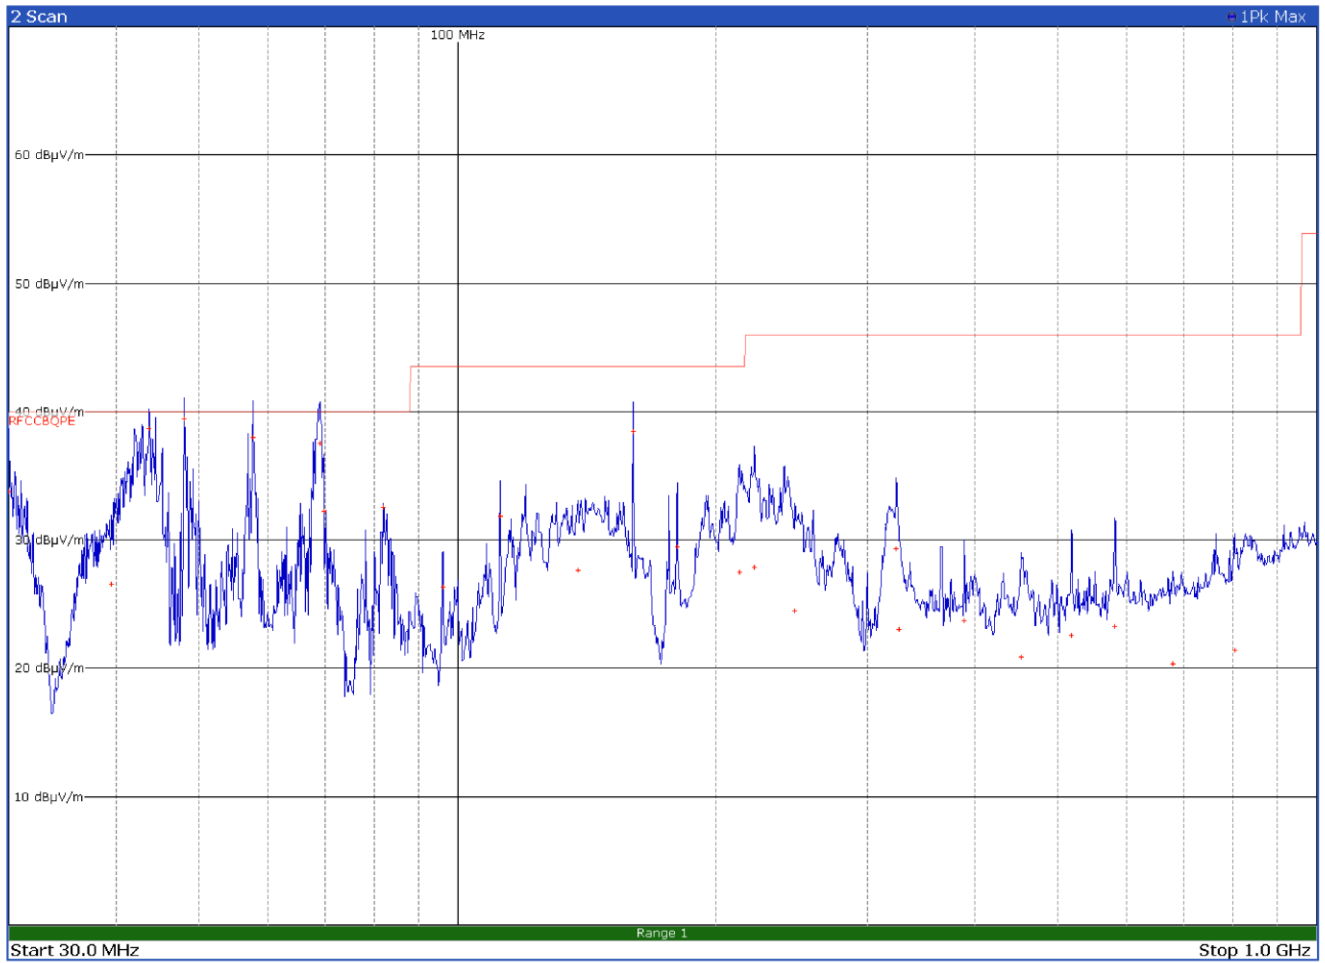



Figure 8.3-3: Radiated emissions with antenna in vertical polarization

Test data, continued


Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
30.0000	33.8	40.0	-6.2	QP
39.5100	26.6	40.0	-13.4	QP
43.6800	38.7	40.0	-1.3	QP
48.0000	39.5	40.0	-0.5	QP
57.7200	38.1	40.0	-1.9	QP
69.0300	37.6	40.0	-2.4	QP
69.7800	32.3	40.0	-7.7	QP
81.9000	32.6	40.0	-7.4	QP
96.0000	26.4	43.5	-17.1	QP
111.9900	31.9	43.5	-11.6	QP
137.9700	27.7	43.5	-15.8	QP
159.9900	38.5	43.5	-5.0	QP
180.0300	29.5	43.5	-14.0	QP
212.6100	27.5	43.5	-16.0	QP
221.4900	27.9	46.0	-18.1	QP
246.9600	24.5	46.0	-21.5	QP
324.1200	29.4	46.0	-16.6	QP
326.7600	23.1	46.0	-22.9	QP
388.7700	23.8	46.0	-22.2	QP
453.1200	20.9	46.0	-25.1	QP
518.7900	22.6	46.0	-23.4	QP
582.6300	23.3	46.0	-22.7	QP
680.0100	20.4	46.0	-25.6	QP
802.5000	21.5	46.0	-24.5	QP

## Section 9. Block diagrams of test set-ups and EUT photos

### 9.1 Radiated emissions set-up below 30 MHz

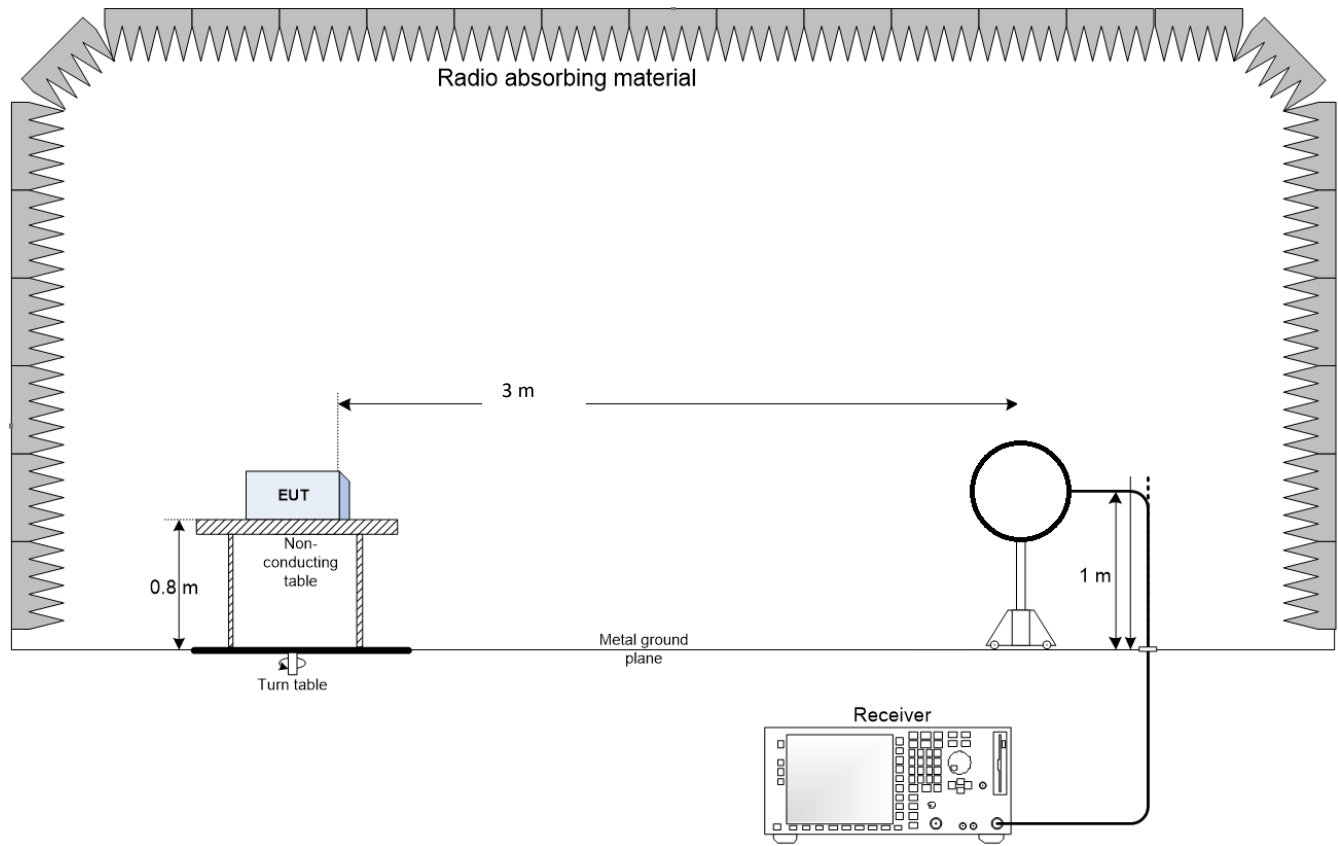



### 9.2 Radiated emissions set-up below 1 GHz

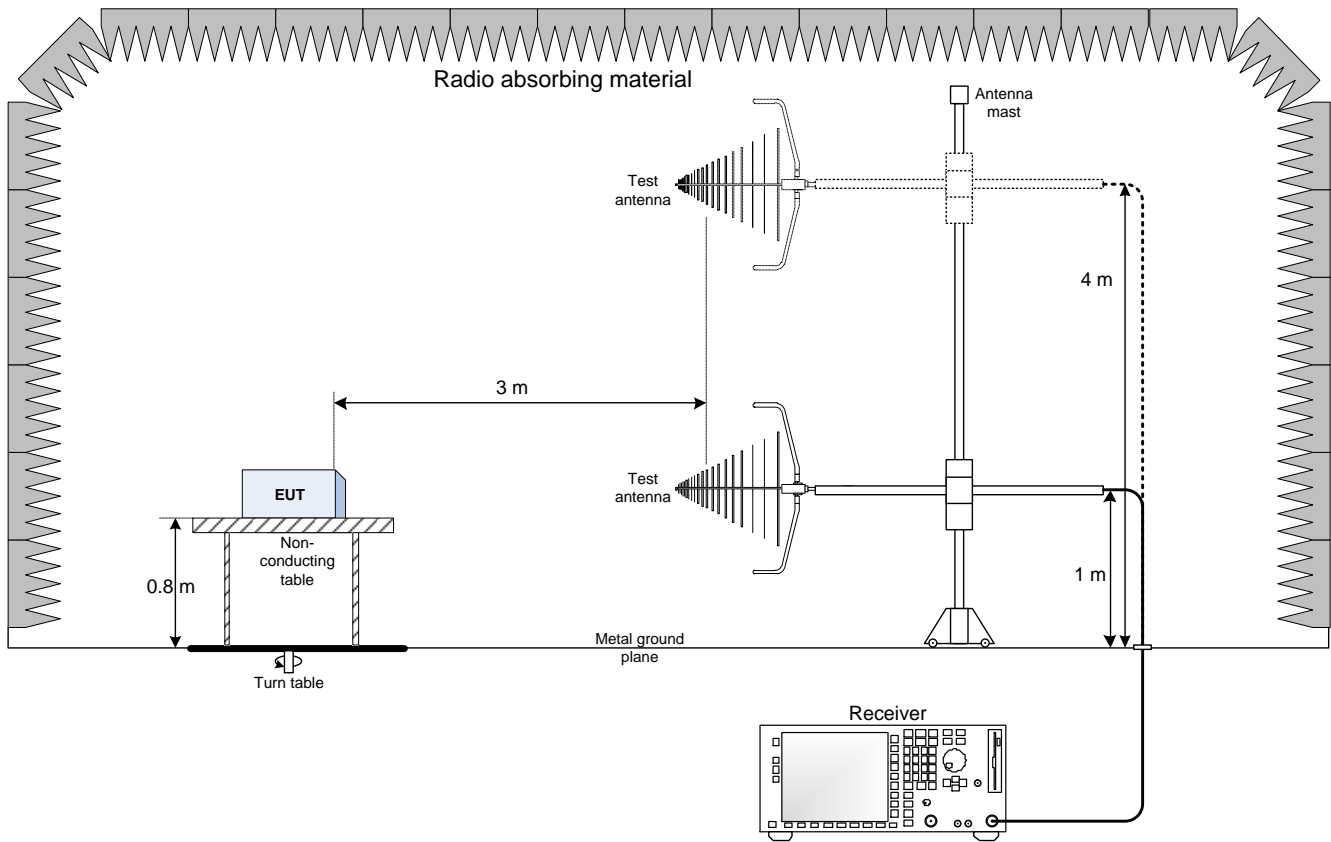



### 9.3 Set-up photos

---

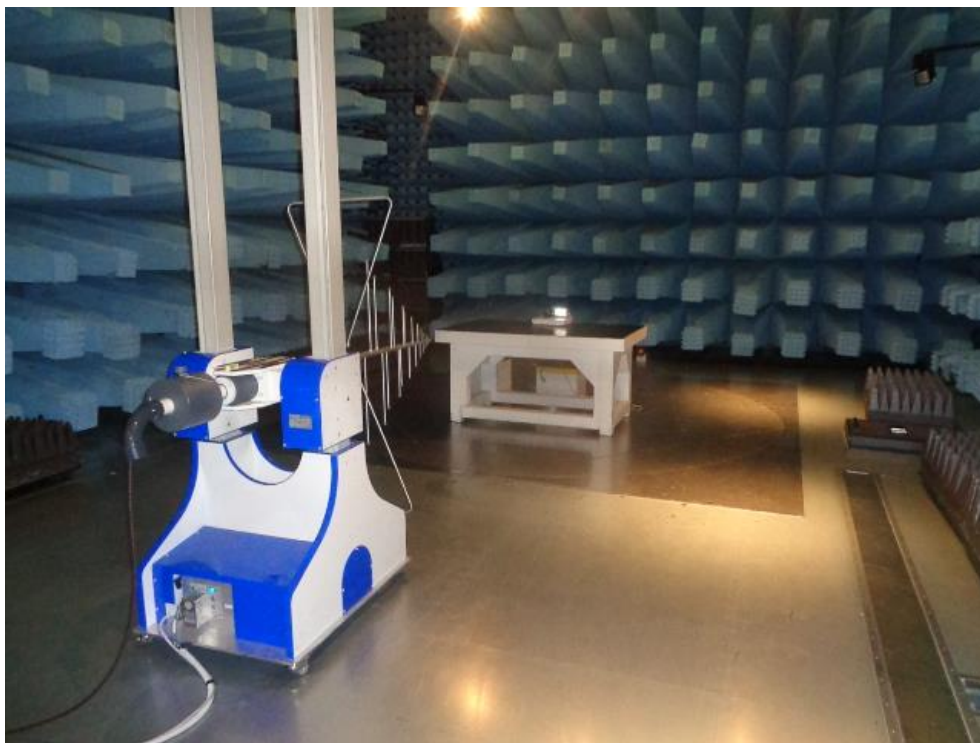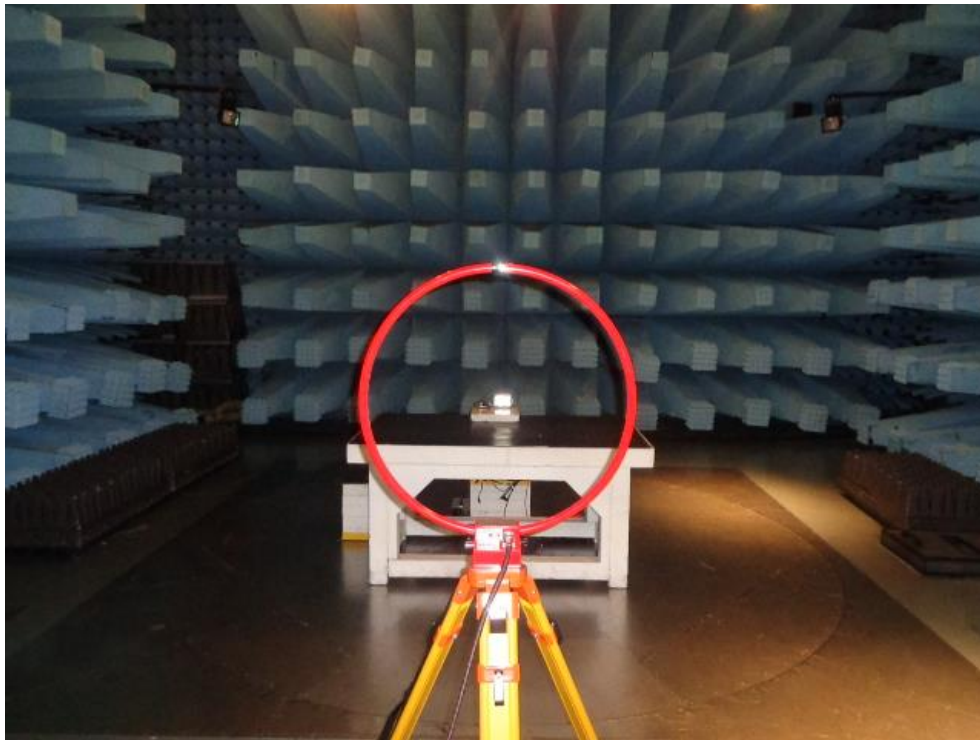

### 9.4 EUT photos

---





End of report