



# FCC RF Test Report

**APPLICANT** : Microstrip LLC  
**EQUIPMENT** : Digital Media Receiver  
**MODEL NAME** : DW84JL  
**FCC ID** : 2ANZL-2474  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The testing was completed on May 05, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : 2ANZL-2474

Page Number : 1 of 38

Report Issued Date : Jun. 21, 2018

Report Version : Rev. 02

Report Template No.: BU5-FR15CZIGBEE Version 1.0



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

1.1 Applicant .....5

1.2 Product Feature of Equipment Under Test .....5

1.3 Product Specification of Equipment Under Test .....5

1.4 Modification of EUT .....5

1.5 Testing Location .....6

1.6 Applicable Standards .....6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....7**

2.1 Carrier Frequency Channel .....7

2.2 Descriptions of Test Mode.....7

2.3 Connection Diagram of Test System .....8

2.4 Support Unit used in test configuration and system.....10

2.5 EUT Operation Test Setup .....10

2.6 Measurement Results Explanation Example .....10

**3 TEST RESULT .....11**

3.1 6dB and 99% Bandwidth Measurement.....11

3.2 Output Power Measurement .....16

3.3 Power Spectral Density Measurement.....17

3.4 Conducted Band Edges and Spurious Emission Measurement .....22

3.5 Spurious Emission Measurement in the Restricted Band.....29

3.6 AC Conducted Emission Measurement .....33

3.7 Antenna Requirements.....35

**4 LIST OF MEASURING EQUIPMENT .....36**

**5 UNCERTAINTY OF EVALUATION .....38**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX E. DUTY CYCLE PLOTS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass
3.1	-	99% Bandwidth	-	Pass
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass
3.6	15.207	AC Conducted Emission	15.207(a)	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass



# 1 General Description

## 1.1 Applicant

Microstrip LLC

83 Wooster Heights Rd, Suite 125, Danbury, Connecticut, 06810

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	DW84JL
FCC ID	2ANZL-2474
EUT supports Radios application	Zigbee WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE

## 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Channel Spacing	5 MHz
Maximum Output Power to Antenna	18.91 dBm (0.0778 W)
99% Occupied Bandwidth	2.250MHz
Antenna Type / Gain	Fixed Internal Antenna type with gain 2.31 dBi
Type of Modulation	250 kbps

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH11-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480

### 2.2 Descriptions of Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
<b>Conducted TCs</b>	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH17_2435 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH26_2480 MHz
<b>Radiated TCs</b>	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH17_2435 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH26_2480 MHz
<b>AC Conducted Emission</b>	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + Music Streaming + Adapter Mode 2 :Zigbee Link + Adapter

### 2.3 Connection Diagram of Test System

<Zigbee Tx Mode>

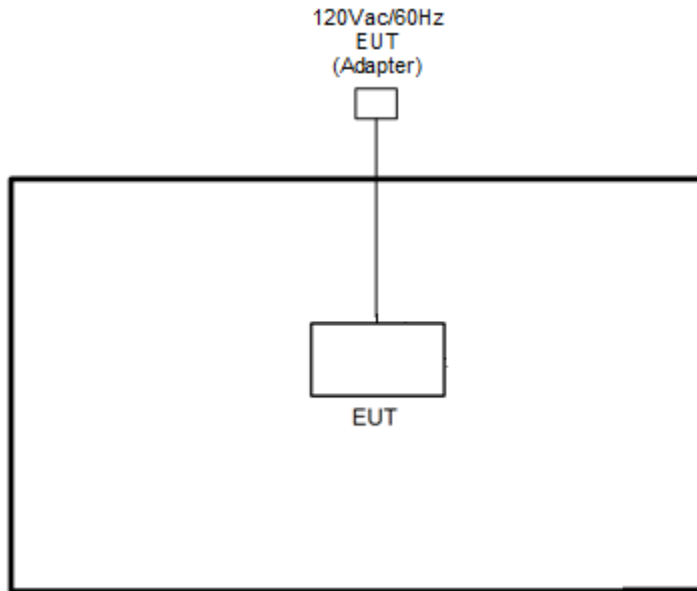


<AC Conducted Emission Mode>

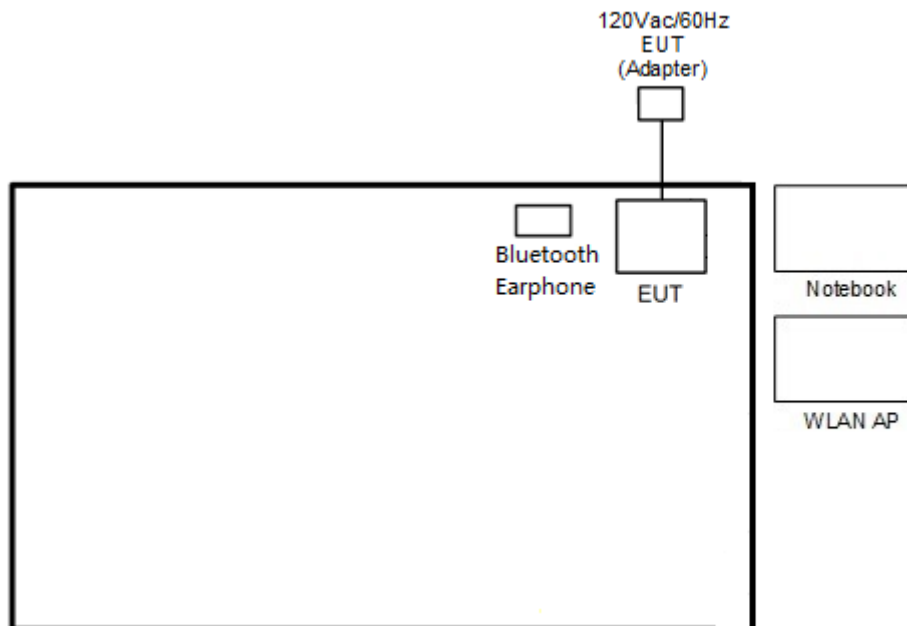



<AC Conducted Emission with Zigbee Link Mode>

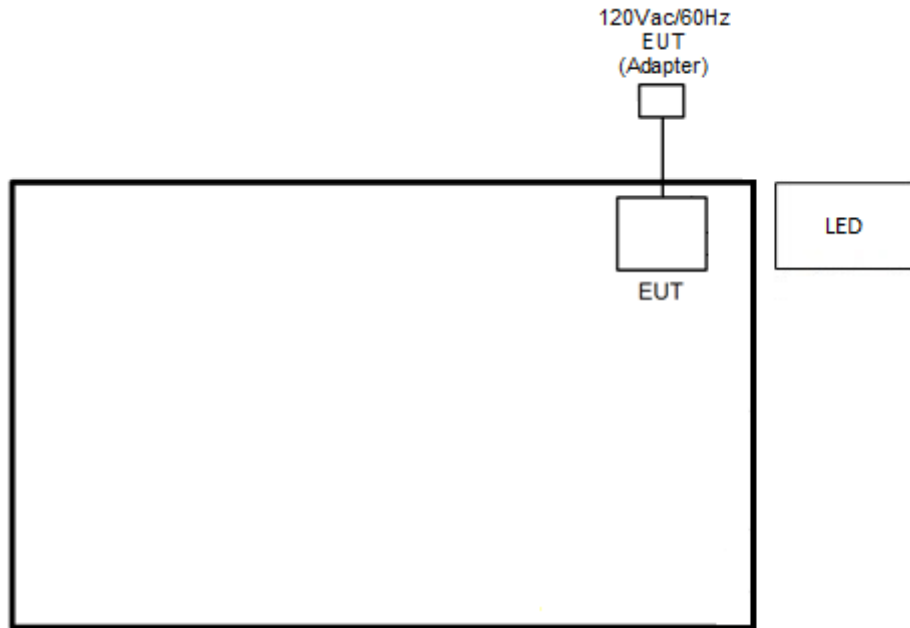

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	LED	OSRAM	HPQA P0-2 43ZB	DZO-IQHOME	N/A	N/A

## 2.5 EUT Operation Test Setup

The RF test items, utility “special software tool” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Bandwidth


Test data refer to Appendix A.

#### 6 dB Bandwidth Plot on Channel 11

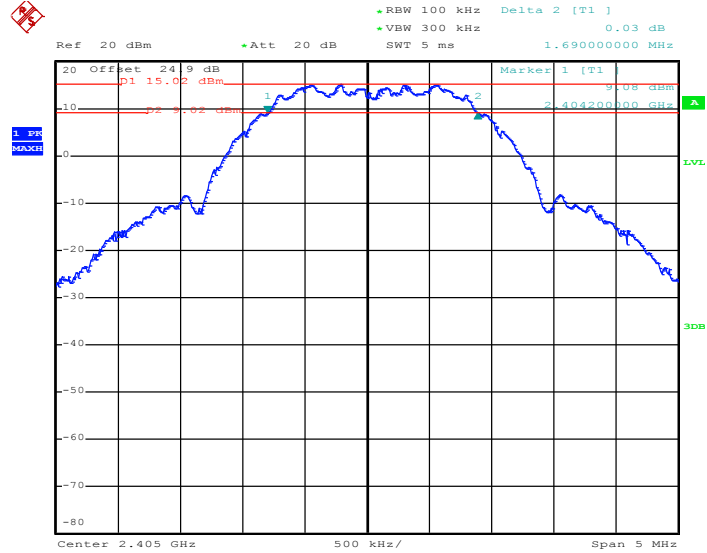

Date: 5.MAY.2018 04:57:07


#### 6 dB Bandwidth Plot on Channel 17

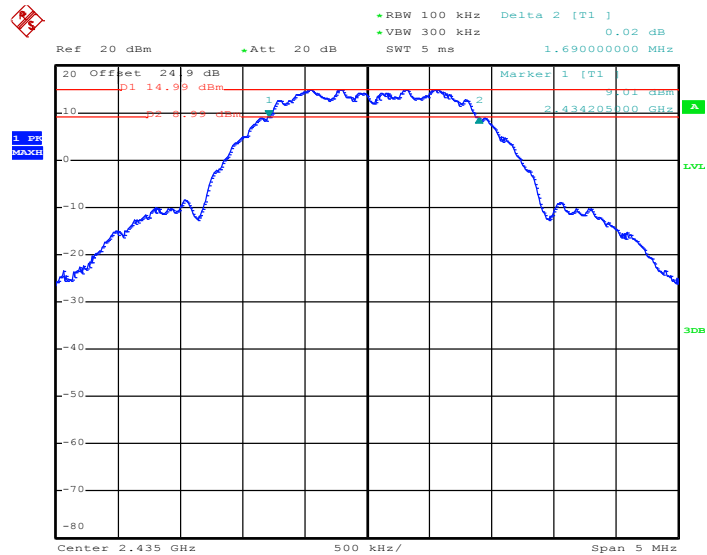

Date: 5.MAY.2018 05:07:58




6 dB Bandwidth Plot on Channel 25

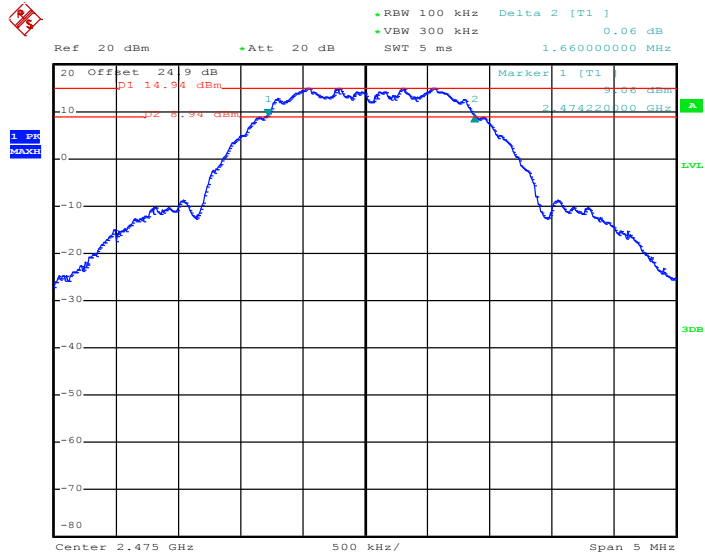

Date: 5.MAY.2018 05:42:47

6 dB Bandwidth Plot on Channel 26

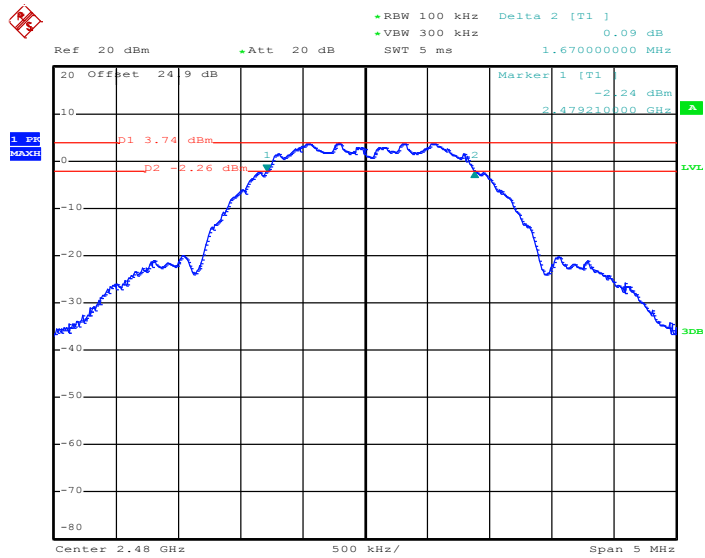


Date: 5.MAY.2018 05:36:22



### 3.1.6 Test Result of 99% Occupied Bandwidth


Test data refer to Appendix A.

#### 99% Bandwidth Plot on Channel 11

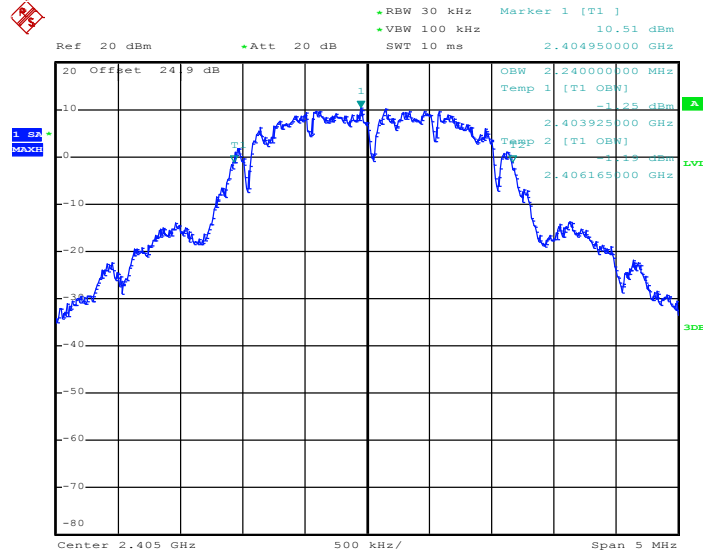

Date: 5.MAY.2018 05:05:36


#### 99% Occupied Bandwidth Plot on Channel 17

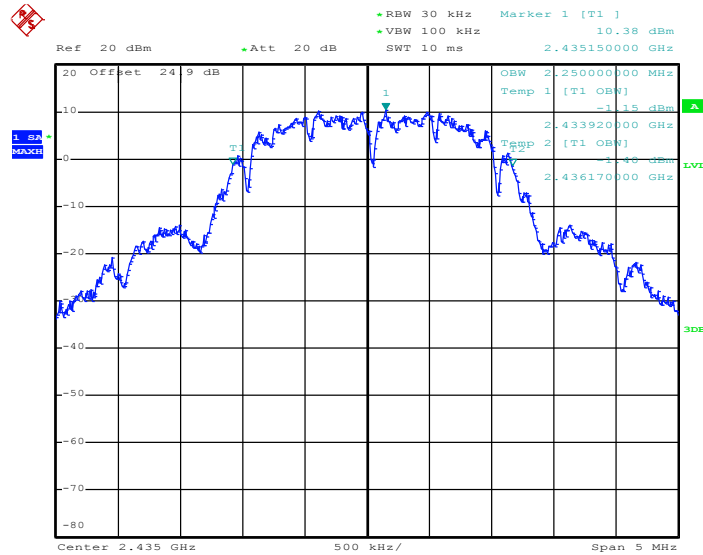

Date: 5.MAY.2018 05:10:55




99% Occupied Bandwidth Plot on Channel 25

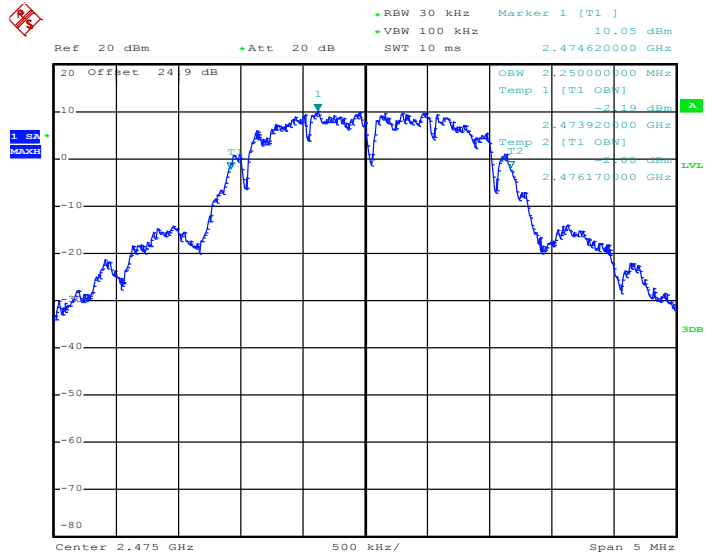

Date: 5.MAY.2018 05:44:53

99% Occupied Bandwidth Plot on Channel 26

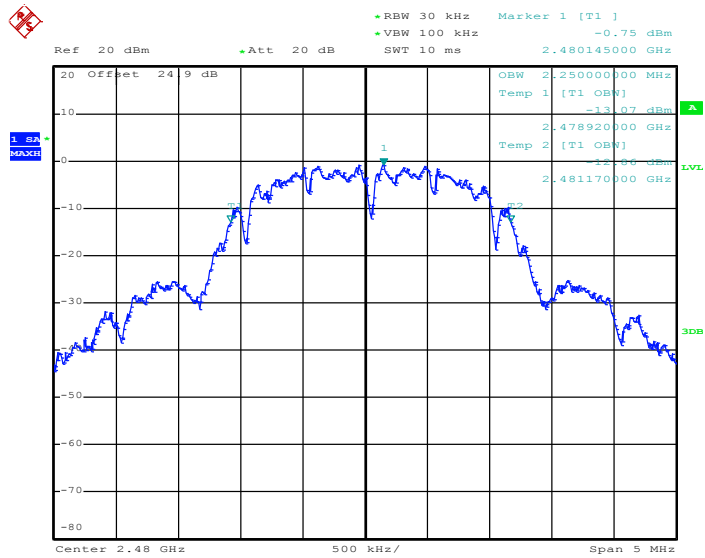

Date: 5.MAY.2018 05:39:56

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

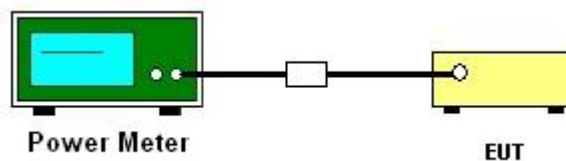

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

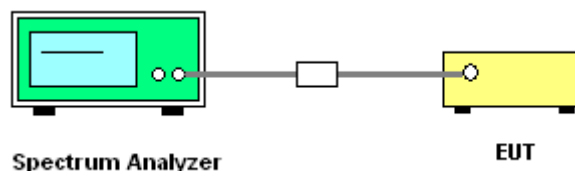


#### 3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.




### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 11

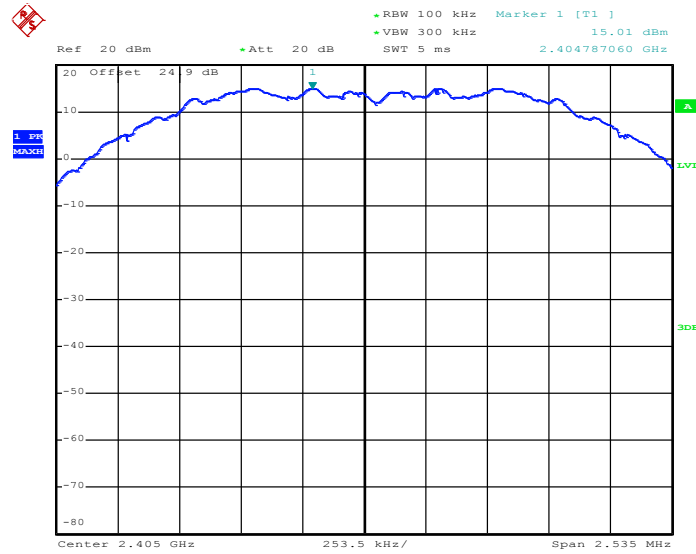

Date: 5.MAY.2018 04:58:35


PSD 100kHz Plot on Channel 17

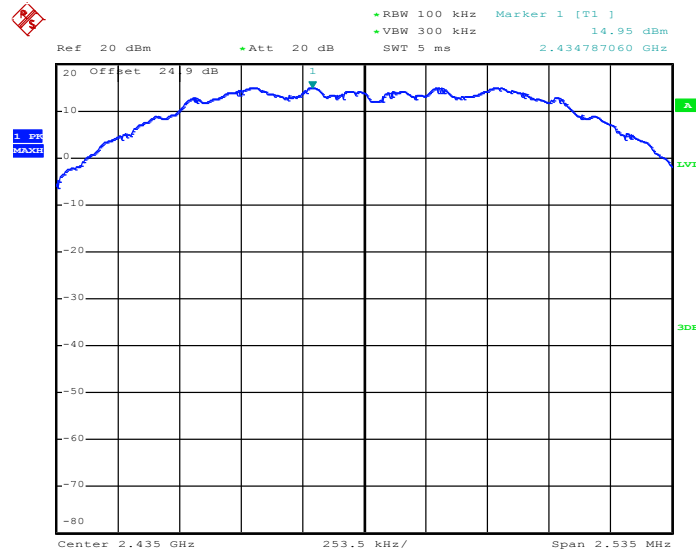

Date: 5.MAY.2018 05:09:10




PSD 100kHz Plot on Channel 25

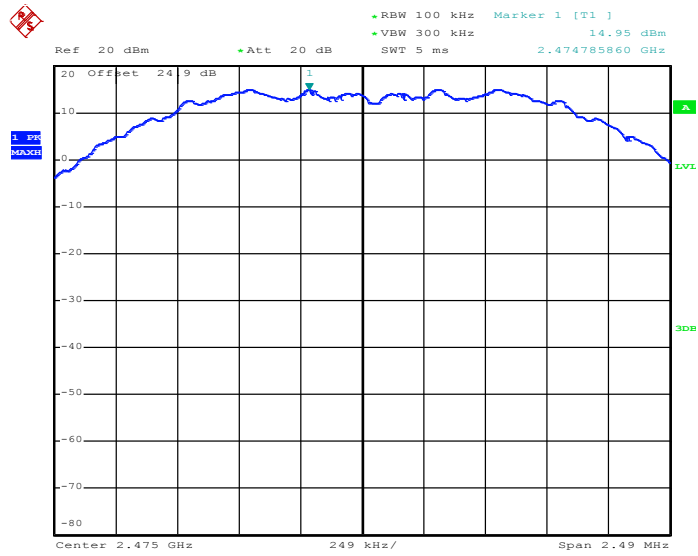

Date: 5.MAY.2018 05:43:59

PSD 100kHz Plot on Channel 26

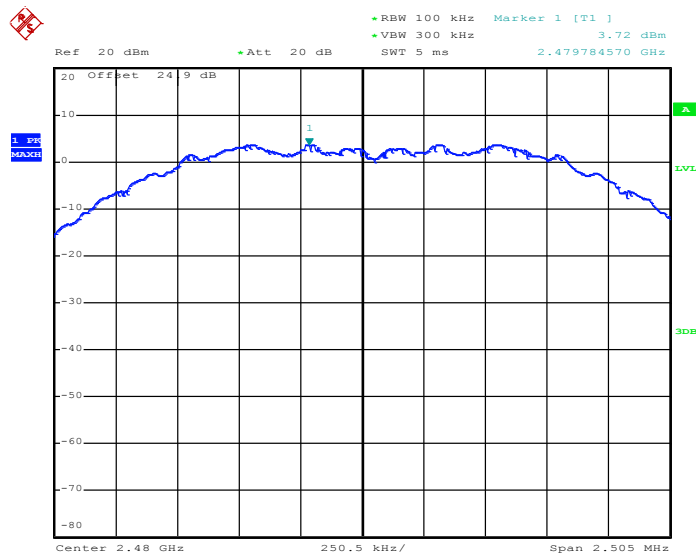


Date: 5.MAY.2018 05:37:35




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 11

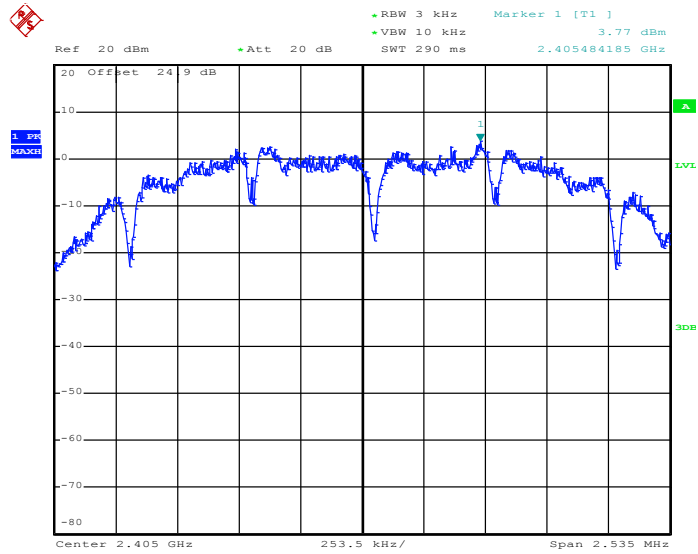

Date: 5.MAY.2018 04:57:42


PSD 3kHz Plot on Channel 17

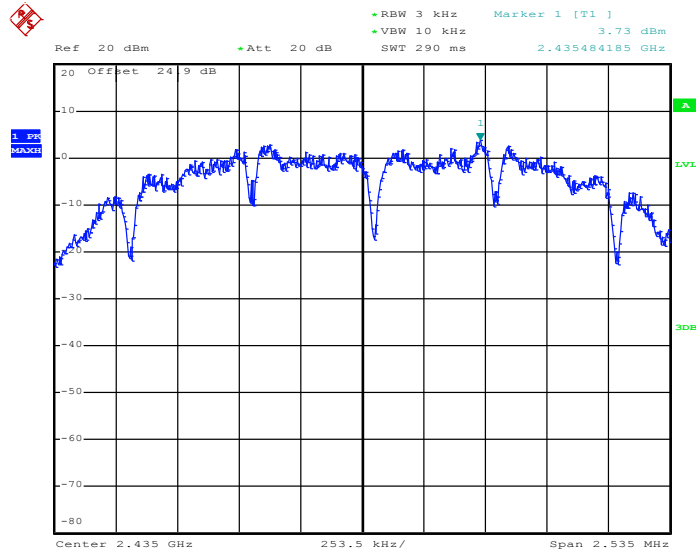

Date: 5.MAY.2018 05:08:36




PSD 3kHz Plot on Channel 25

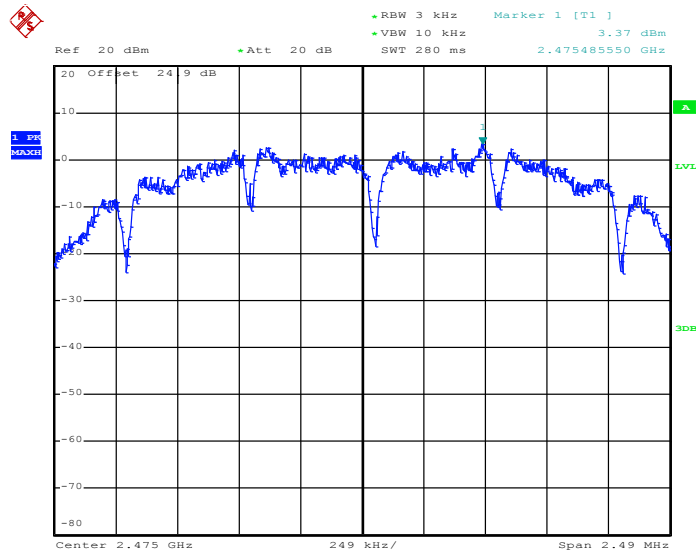

Date: 5.MAY.2018 05:43:17

PSD 3kHz Plot on Channel 26

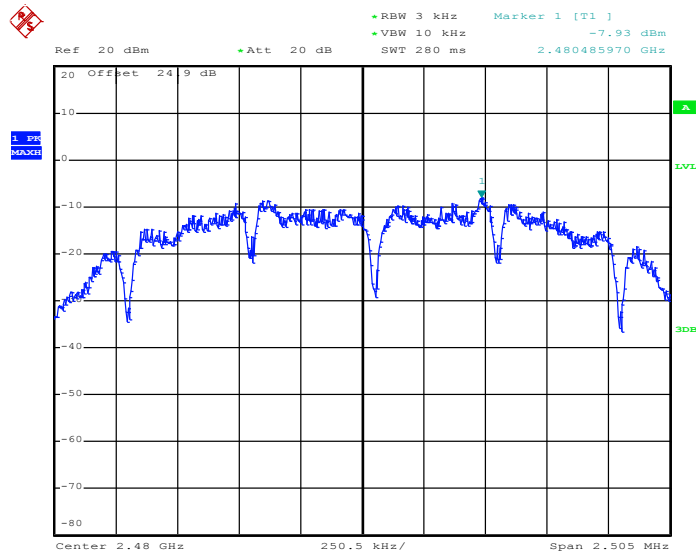

Date: 5.MAY.2018 05:37:01

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

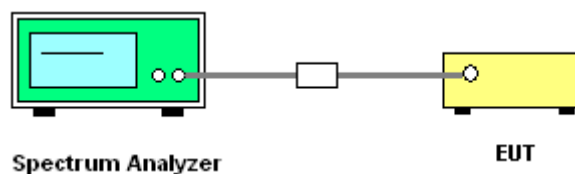




### 3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 11

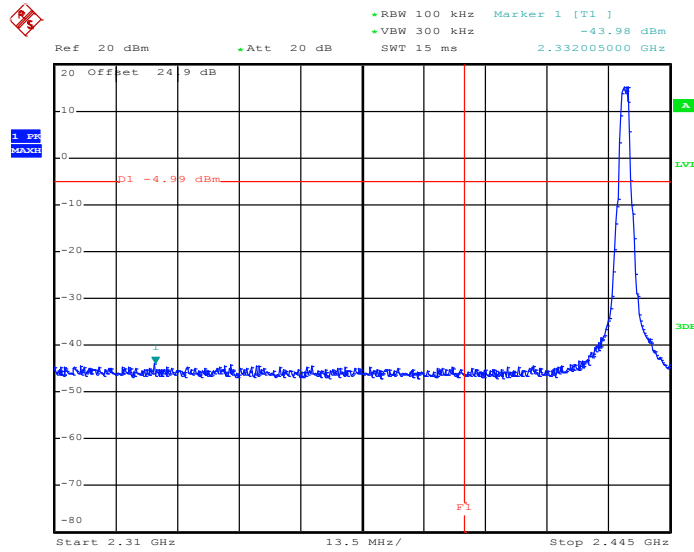

Date: 5.MAY.2018 05:57:28


High Band Edge Plot on Channel 25

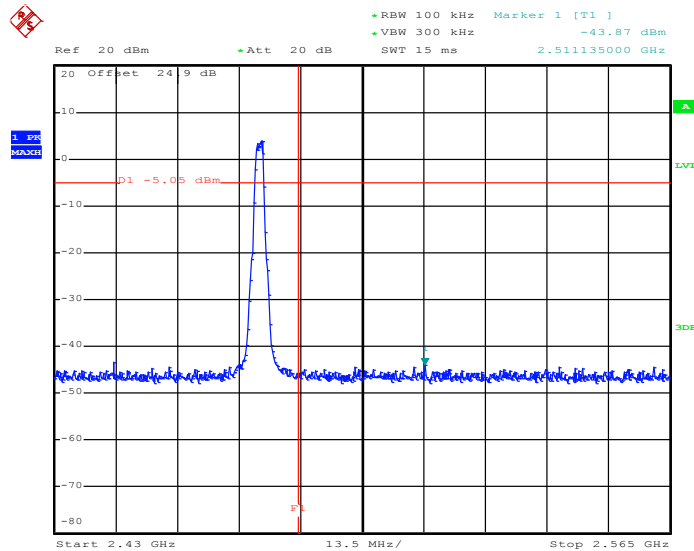

Date: 5.MAY.2018 06:06:00



### High Band Edge Plot on Channel 26

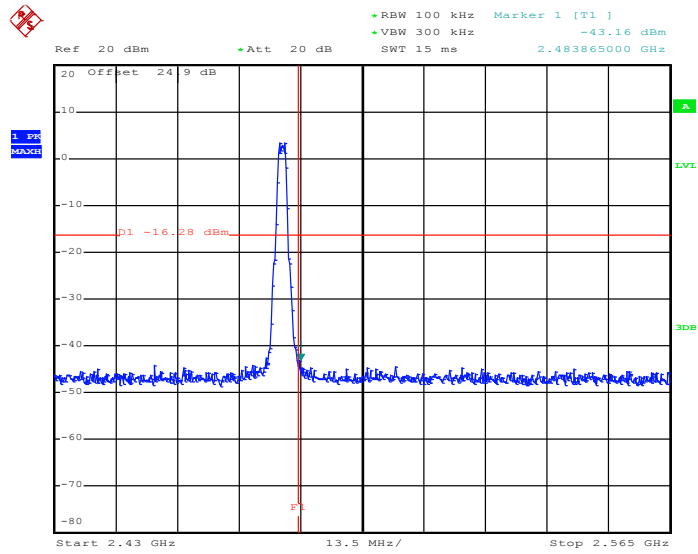


Date: 5.MAY.2018 06:01:27






### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 11

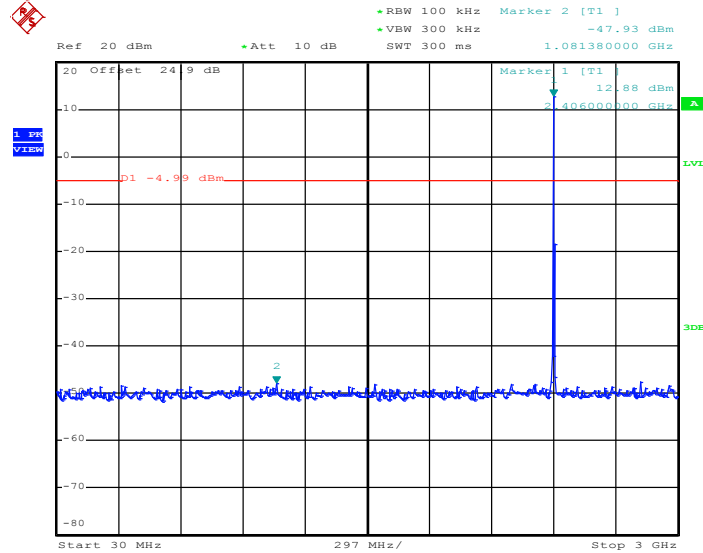

Date: 5.MAY.2018 05:04:53


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 11

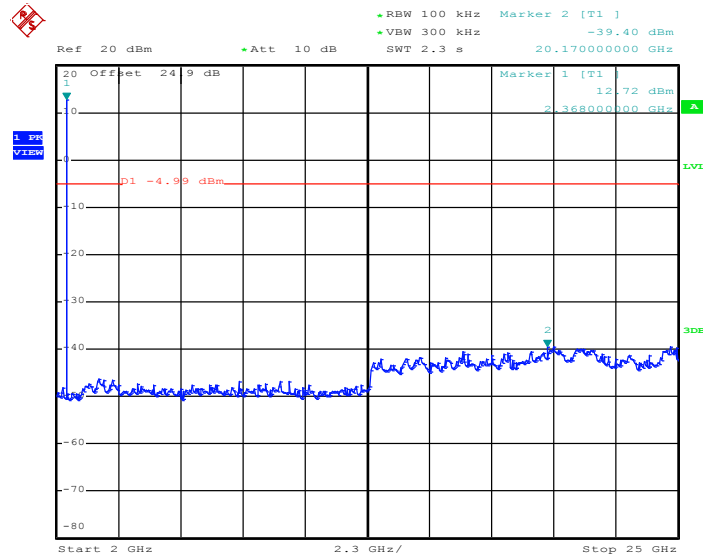

Date: 5.MAY.2018 05:05:19




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 17

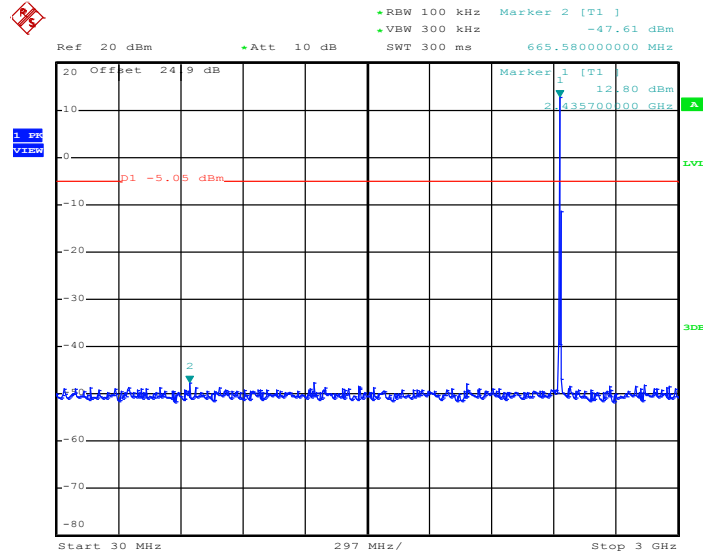

Date: 5.MAY.2018 05:09:33


### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 17

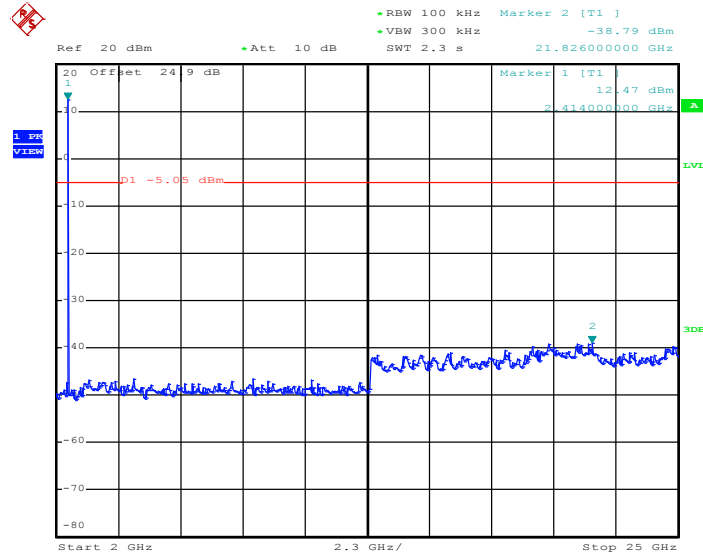

Date: 5.MAY.2018 05:09:56




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 25

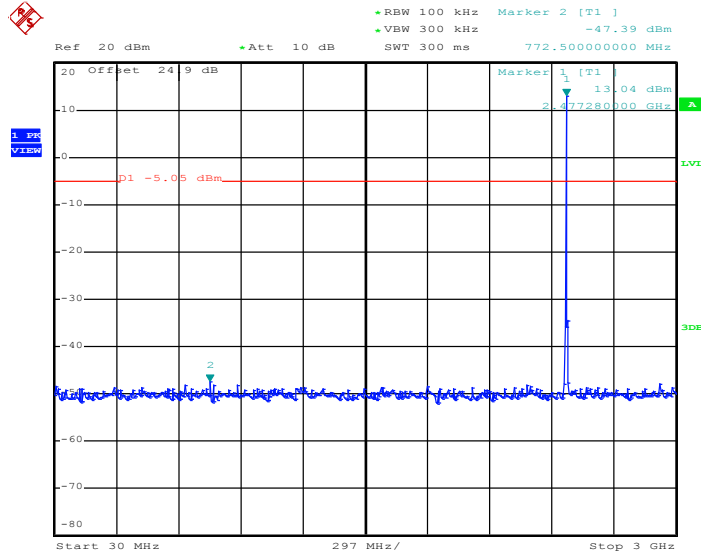

Date: 5.MAY.2018 05:44:17


### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 25

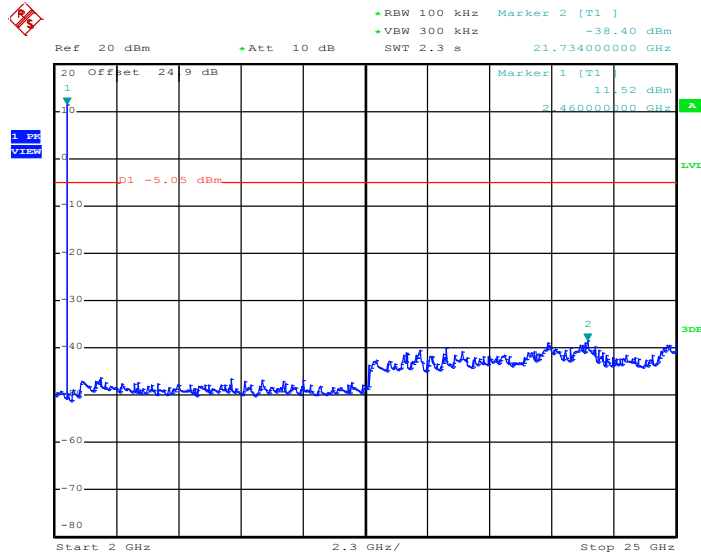

Date: 5.MAY.2018 05:44:31




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 26

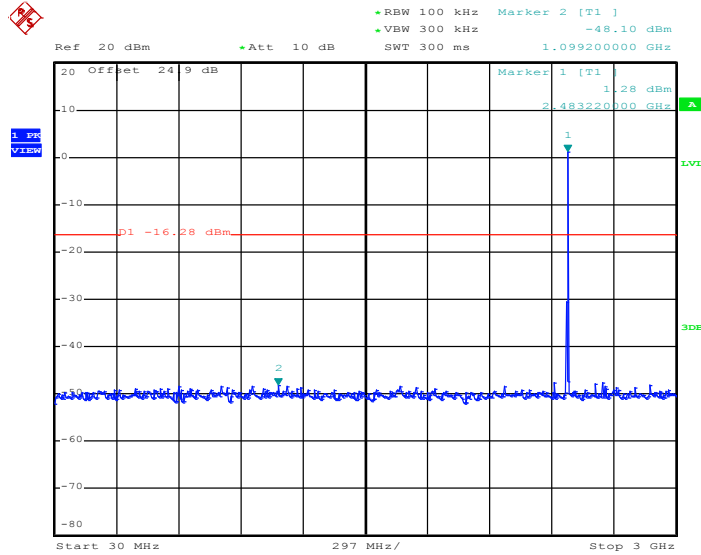

Date: 5.MAY.2018 05:39:05

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 26

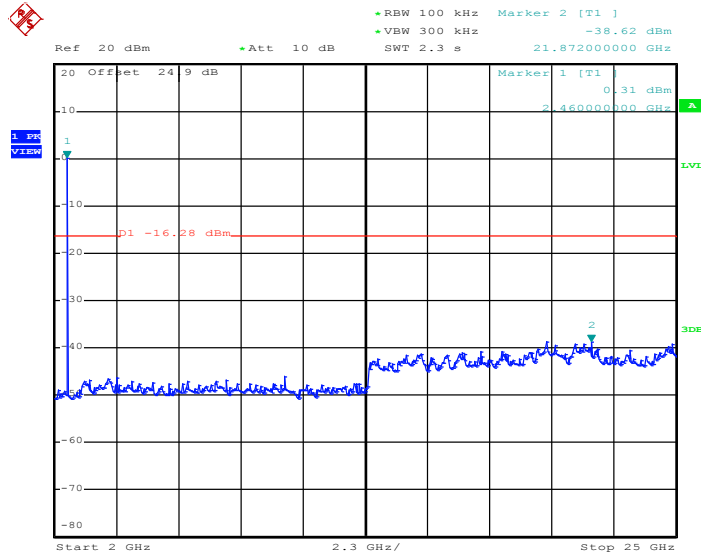

Date: 5.MAY.2018 05:39:19



### 3.5 Spurious Emission Measurement in the Restricted Band

#### 3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For Conducted Measurement:

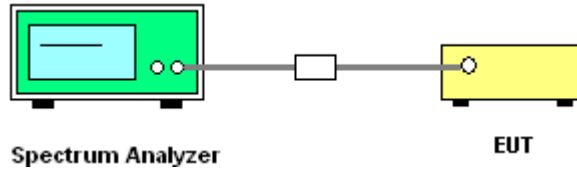


For radiated emissions below 30MHz

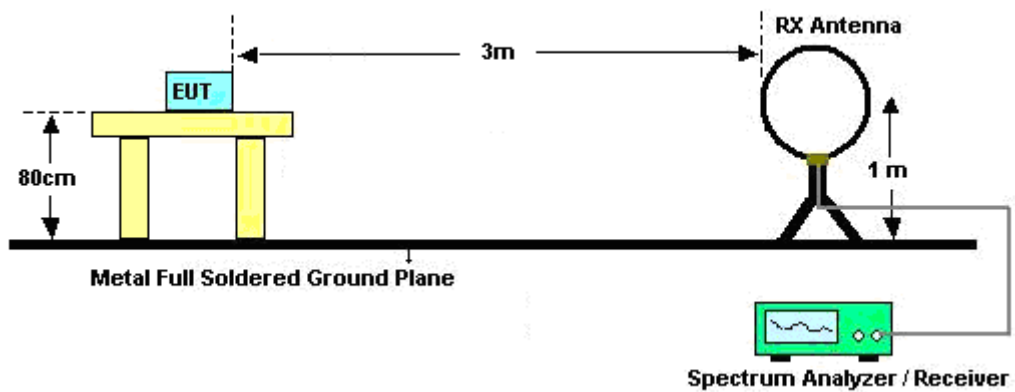

For radiated emissions from 30MHz to 1GHz

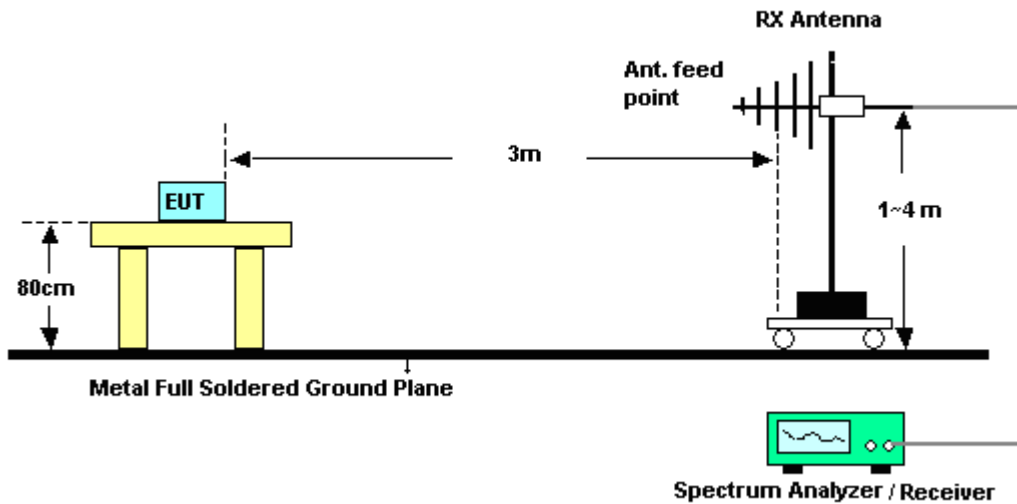

For radiated emissions above 1GHz

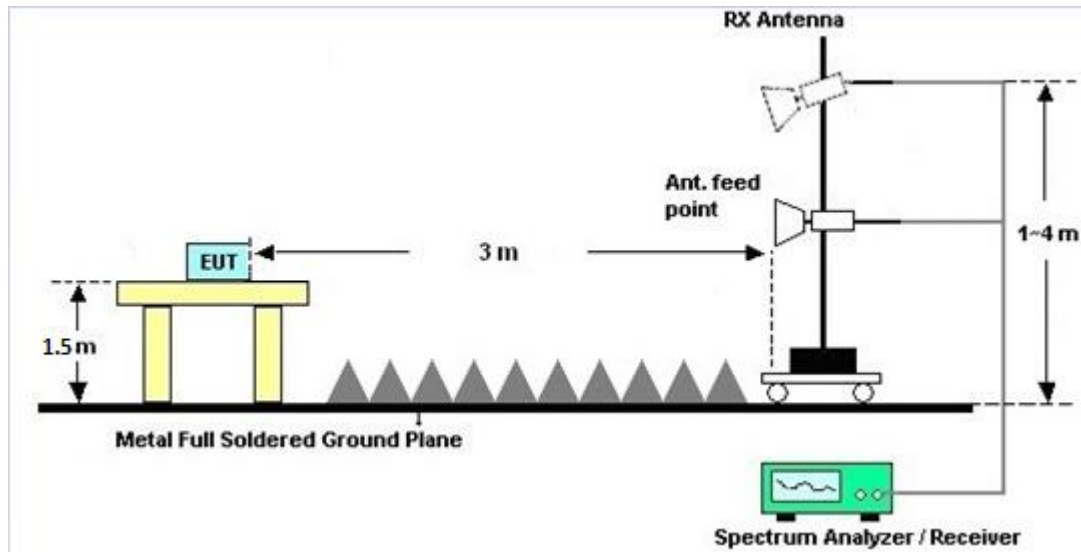

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.





### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

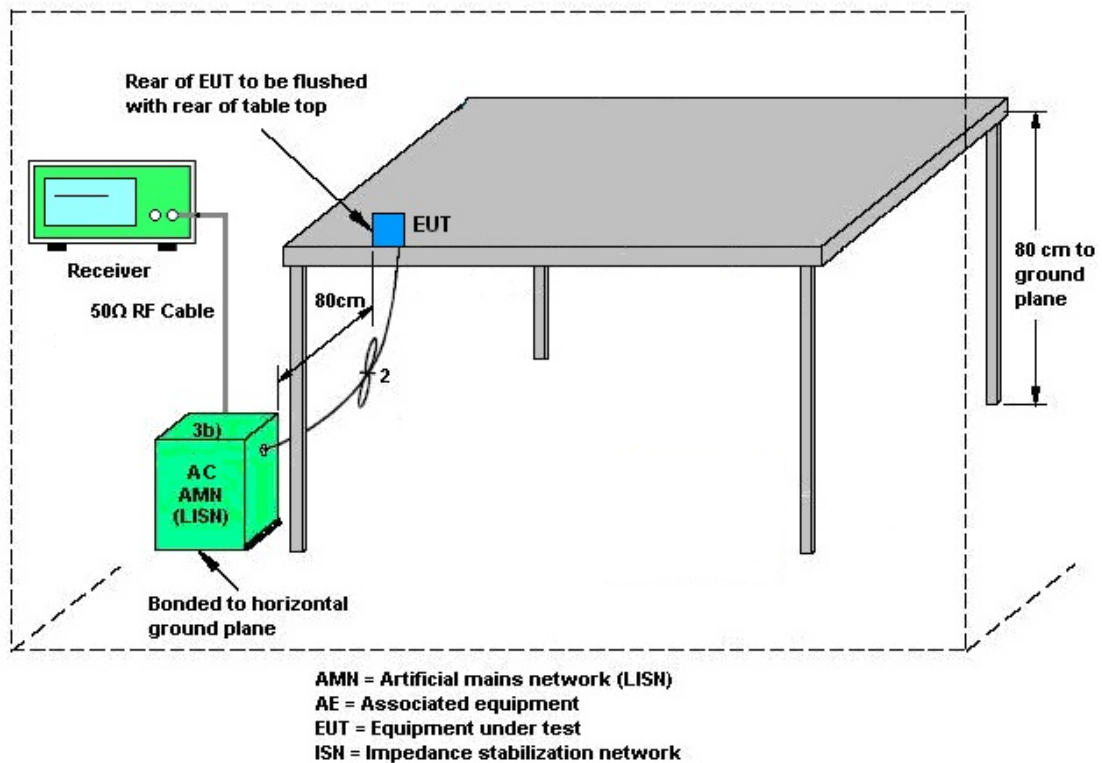

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 20, 2017	Apr. 17, 2018 ~ May 05, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 20, 2017	Apr. 17, 2018 ~ May 05, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	Nov. 13, 2017	Apr. 17, 2018 ~ May 05, 2018	Nov. 12, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Mar. 01, 2018	Apr. 17, 2018 ~ May 05, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 21, 2018~ Apr. 22, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Apr. 21, 2018~ Apr. 22, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Apr. 21, 2018~ Apr. 22, 2018	Nov. 29, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 08, 2017	Apr. 21, 2018~ Apr. 22, 2018	Dec. 07, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 21, 2018~ Apr. 22, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Apr. 21, 2018~ Apr. 22, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Apr. 21, 2018~ Apr. 22, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Apr. 20, 2018 ~ May 03, 2018	Jul. 17, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Jan. 16, 2018	Apr. 20, 2018 ~ May 03, 2018	Jan. 15, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 14, 2017	Apr. 20, 2018 ~ May 03, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Oct. 16, 2017	Apr. 20, 2018 ~ May 03, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Apr. 20, 2018 ~ May 03, 2018	Nov. 22, 2018	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Jan. 16, 2018	Apr. 20, 2018 ~ May 03, 2018	Jan. 15, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 19, 2017	Apr. 20, 2018 ~ May 03, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Apr. 20, 2018 ~ May 03, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Apr. 20, 2018 ~ May 03, 2018	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 22, 2017	Apr. 20, 2018 ~ May 03, 2018	May 21, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 27, 2017	Apr. 20, 2018 ~ May 03, 2018	Nov. 26, 2018	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Preamplifier	Jet-Power	JPA0118-55-303	1710001800054001	1GHz~18GHz	Apr. 16, 2018	Apr. 20, 2018 ~ May 03, 2018	Apr. 15, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4	9K-30M	Mar. 20, 2018	Apr. 20, 2018 ~ May 03, 2018	Mar. 19, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4	30M-18G	Mar. 15, 2018	Apr. 20, 2018 ~ May 03, 2018	Mar. 14, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2589/2	30M-18G	Mar. 15, 2018	Apr. 20, 2018 ~ May 03, 2018	Mar. 14, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	2.7G High Pass	Sep. 18, 2017	Apr. 20, 2018 ~ May 03, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40S S	SN11	1G Low Pass	Sep. 18, 2017	Apr. 20, 2018 ~ May 03, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Test Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Apr. 20, 2018 ~ May 03, 2018	N/A	Radiation (03CH11-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.7
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.5
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Rebecca Li / Luffy Lin	Temperature:	21-25	°C
Test Date:	2018/4/17-2018/05/05	Relative Humidity:	51-54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250K	1	11	2405	2.240	1.690	0.50	Pass
Zigbee	250K	1	17	2435	2.250	1.690	0.50	Pass
Zigbee	250K	1	25	2475	2.250	1.660	0.50	Pass
Zigbee	250K	1	26	2480	2.250	1.670	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250K	1	11	2405	18.91	30.00	2.31	21.22	36.00	Pass
Zigbee	250K	1	17	2435	18.80	30.00	2.31	21.11	36.00	Pass
Zigbee	250K	1	25	2475	18.76	30.00	2.31	21.07	36.00	Pass
Zigbee	250K	1	26	2480	8.09	30.00	2.31	10.40	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
Zigbee	250K	1	11	2405	0.00	18.71
Zigbee	250K	1	17	2435	0.00	18.60
Zigbee	250K	1	25	2475	0.00	18.55
Zigbee	250K	1	26	2480	0.00	7.82

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250K	1	11	2405	15.01	3.77	2.31	8.00	Pass
Zigbee	250K	1	17	2435	14.95	3.73	2.31	8.00	Pass
Zigbee	250K	1	25	2475	14.95	3.37	2.31	8.00	Pass
Zigbee	250K	1	26	2480	3.72	-7.93	2.31	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



## Appendix B. AC Conducted Emission Test Results


Test Engineer :	Shareef Yu	Temperature :	21~25°C
		Relative Humidity :	51~55%



## EUT Information

Report NO : 7D0544-01  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

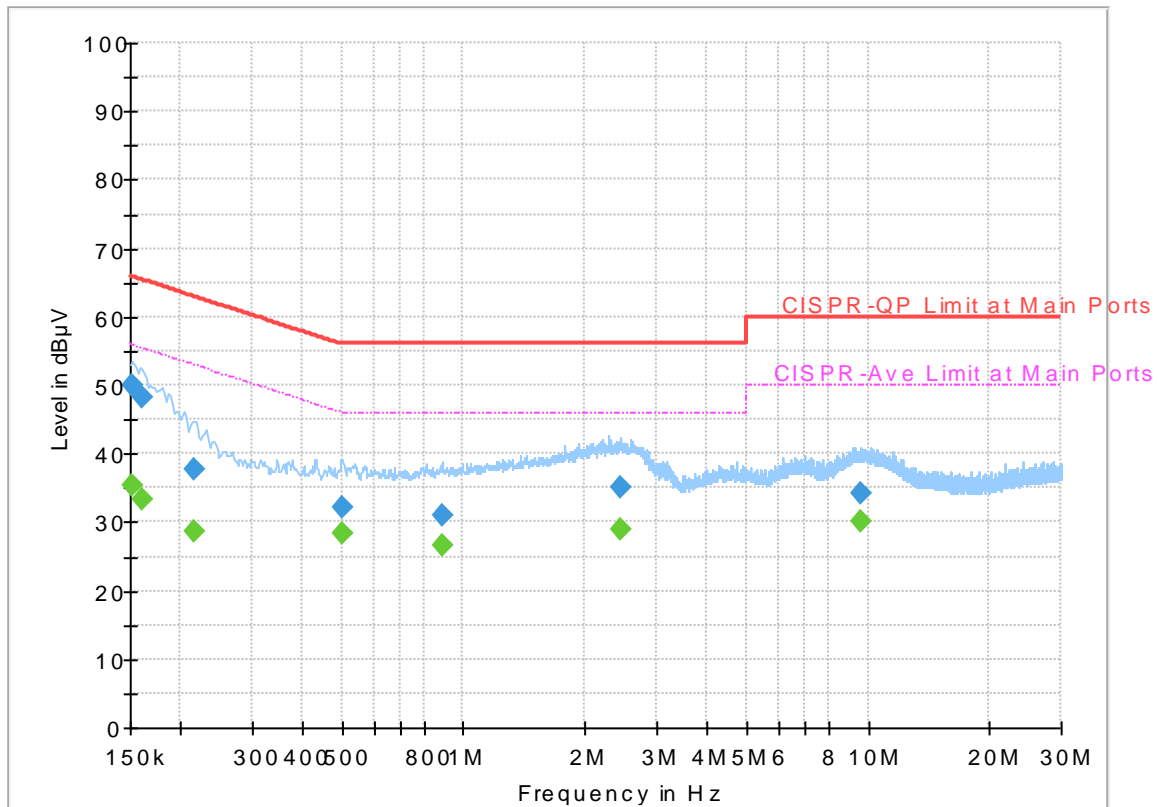


## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	35.32	55.88	20.56	L1	OFF	19.5
0.152250	49.93	---	65.88	15.95	L1	OFF	19.5
0.161250	---	33.28	55.40	22.12	L1	OFF	19.5
0.161250	48.22	---	65.40	17.18	L1	OFF	19.5
0.215250	---	28.64	53.00	24.36	L1	OFF	19.5
0.215250	37.74	---	63.00	25.26	L1	OFF	19.5
0.501000	---	28.25	46.00	17.75	L1	OFF	19.5
0.501000	32.15	---	56.00	23.85	L1	OFF	19.5
0.883500	---	26.70	46.00	19.30	L1	OFF	19.5
0.883500	31.01	---	56.00	24.99	L1	OFF	19.5
2.445000	---	28.84	46.00	17.16	L1	OFF	19.5
2.445000	35.19	---	56.00	20.81	L1	OFF	19.5
9.609000	---	30.06	50.00	19.94	L1	OFF	19.7
9.609000	34.13	---	60.00	25.87	L1	OFF	19.7

## EUT Information

Report NO : 7D0544-01  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

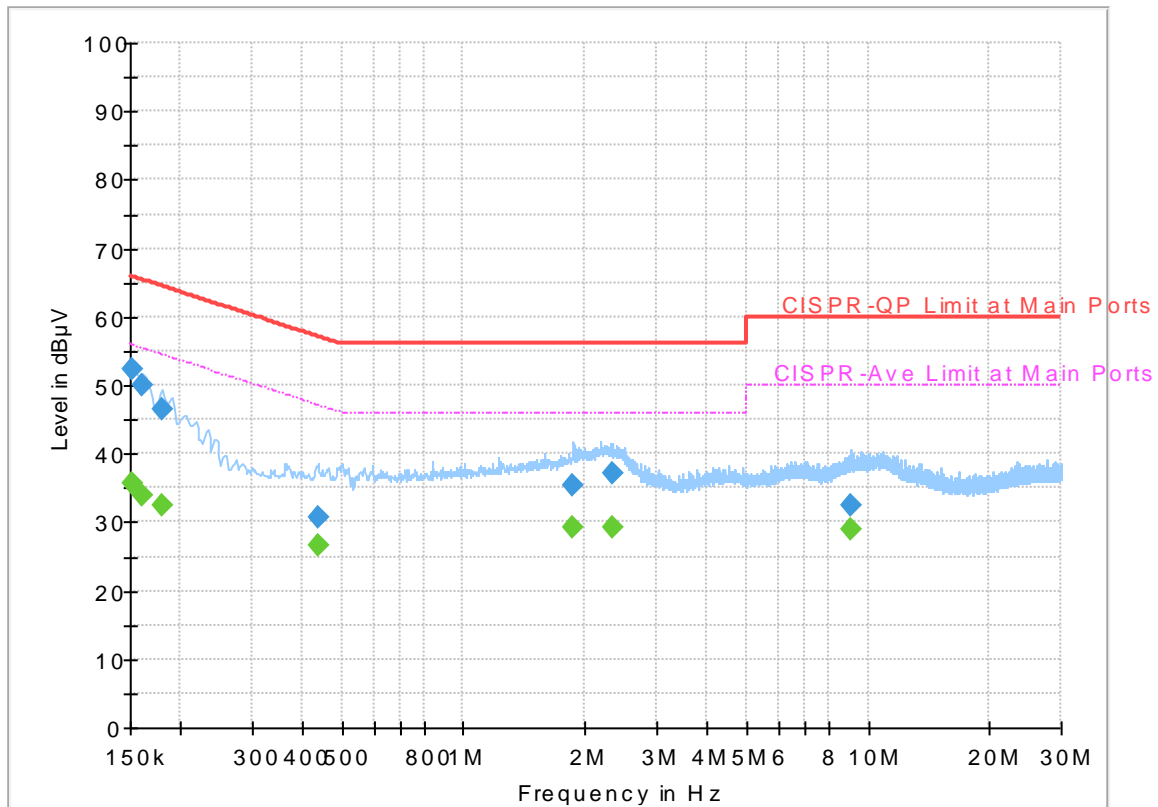


## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	35.59	55.88	20.29	N	OFF	19.5
0.152250	52.22	---	65.88	13.66	N	OFF	19.5
0.161250	---	33.88	55.40	21.52	N	OFF	19.5
0.161250	49.90	---	65.40	15.50	N	OFF	19.5
0.179250	---	32.34	54.52	22.18	N	OFF	19.5
0.179250	46.38	---	64.52	18.14	N	OFF	19.5
0.438000	---	26.73	47.10	20.37	N	OFF	19.5
0.438000	30.76	---	57.10	26.34	N	OFF	19.5
1.871250	---	29.31	46.00	16.69	N	OFF	19.6
1.871250	35.47	---	56.00	20.53	N	OFF	19.6
2.339250	---	29.26	46.00	16.74	N	OFF	19.5
2.339250	37.02	---	56.00	18.98	N	OFF	19.5
9.051000	---	28.82	50.00	21.18	N	OFF	19.7
9.051000	32.48	---	60.00	27.52	N	OFF	19.7

## EUT Information

Report NO : 7D0544-01  
 Test Mode : Mode 2  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

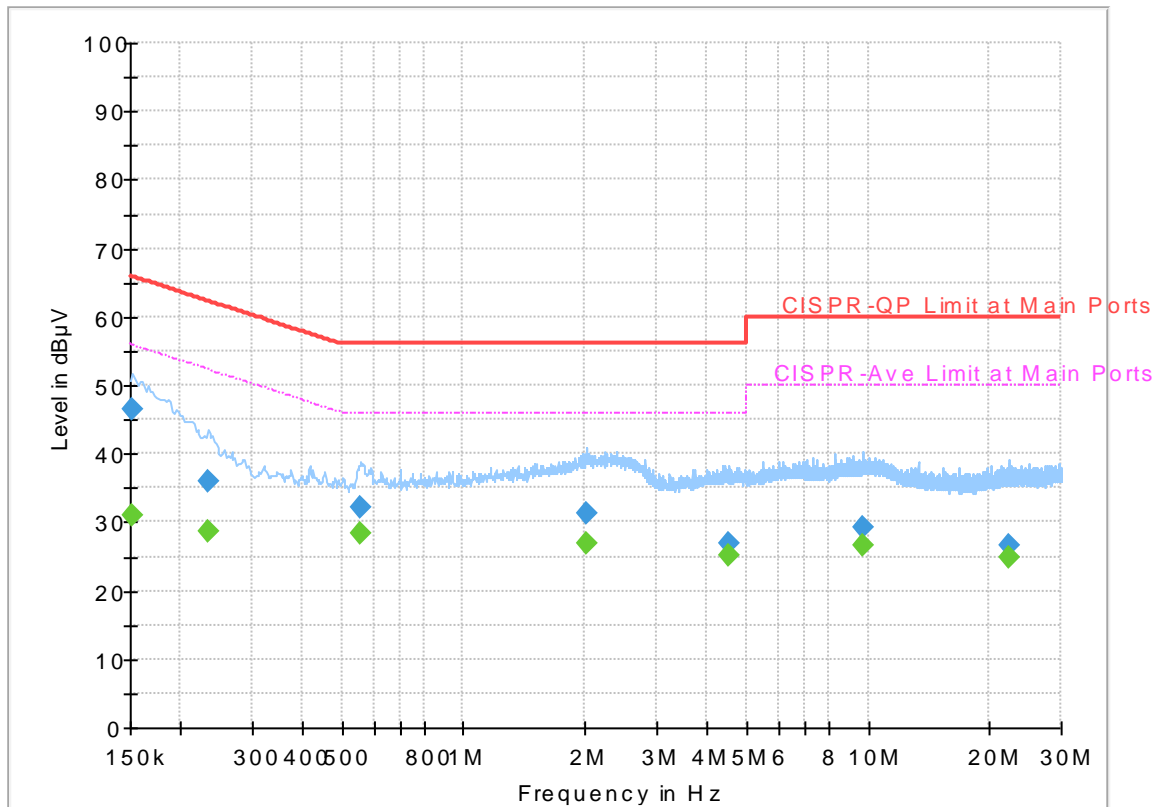


## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	31.12	55.88	24.76	L1	OFF	19.5
0.152250	46.45	---	65.88	19.43	L1	OFF	19.5
0.233250	---	28.67	52.33	23.66	L1	OFF	19.5
0.233250	35.92	---	62.33	26.41	L1	OFF	19.5
0.557250	---	28.24	46.00	17.76	L1	OFF	19.5
0.557250	32.19	---	56.00	23.81	L1	OFF	19.5
2.010750	---	26.77	46.00	19.23	L1	OFF	19.6
2.010750	31.24	---	56.00	24.76	L1	OFF	19.6
4.512750	---	25.15	46.00	20.85	L1	OFF	19.6
4.512750	26.86	---	56.00	29.14	L1	OFF	19.6
9.676500	---	26.61	50.00	23.39	L1	OFF	19.7
9.676500	29.18	---	60.00	30.82	L1	OFF	19.7
22.416000	---	24.97	50.00	25.03	L1	OFF	19.8
22.416000	26.51	---	60.00	33.49	L1	OFF	19.8

# EUT Information

Report NO : 7D0544-01  
 Test Mode : Mode 2  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

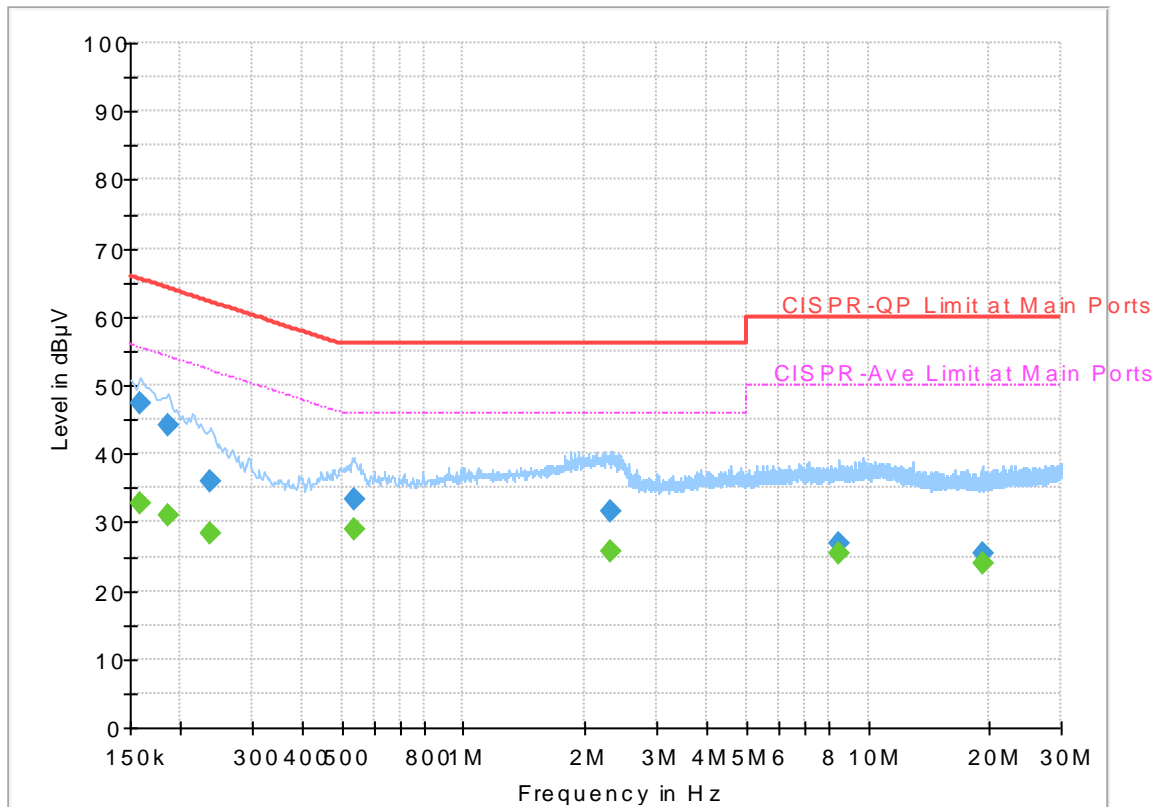

## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	32.86	55.52	22.66	N	OFF	19.5
0.159000	47.42	---	65.52	18.10	N	OFF	19.5
0.186000	---	30.99	54.21	23.22	N	OFF	19.5
0.186000	44.14	---	64.21	20.07	N	OFF	19.5
0.237750	---	28.31	52.17	23.86	N	OFF	19.5
0.237750	36.05	---	62.17	26.12	N	OFF	19.5
0.537000	---	28.88	46.00	17.12	N	OFF	19.5
0.537000	33.38	---	56.00	22.62	N	OFF	19.5
2.314500	---	25.62	46.00	20.38	N	OFF	19.5
2.314500	31.60	---	56.00	24.40	N	OFF	19.5
8.488500	---	25.37	50.00	24.63	N	OFF	19.7
8.488500	27.03	---	60.00	32.97	N	OFF	19.7
19.128750	---	24.12	50.00	25.88	N	OFF	19.9
19.128750	25.52	---	60.00	34.48	N	OFF	19.9



### Appendix C. Radiated Spurious Emission

Test Engineer :	Hao Hsu, Chuan Zhu, and Ken Wu	Temperature :	22~25°C
		Relative Humidity :	52~57%

2.4GHz 2400~2483.5MHz

ZIGBEE (Band Edge @ 3m)

ZIGBEE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
ZIGBEE CH 11 2405MHz		2367.435	52.51	-21.49	74	42.85	27.04	16.22	33.6	257	74	P	H
		2367.225	44.1	-9.9	54	34.44	27.04	16.22	33.6	257	74	A	H
	*	2405	115.12	-	-	105.24	27.18	16.29	33.59	257	74	P	H
	*	2405	112.99	-	-	103.11	27.18	16.29	33.59	257	74	A	H
		2382.135	52.91	-21.09	74	43.13	27.09	16.29	33.6	206	105	P	V
		2367.33	42.51	-11.49	54	32.85	27.04	16.22	33.6	206	105	A	V
	*	2405	112.51	-	-	102.63	27.18	16.29	33.59	206	105	P	V
	*	2405	110.34	-	-	100.46	27.18	16.29	33.59	206	105	A	V
ZIGBEE CH 17 2435MHz		2376.88	51.66	-22.34	74	41.95	27.09	16.22	33.6	270	71	P	H
		2389.84	41.21	-12.79	54	31.38	27.13	16.29	33.59	270	71	A	H
	*	2435	115.98	-	-	106.04	27.22	16.31	33.59	270	71	P	H
	*	2435	113.86	-	-	103.92	27.22	16.31	33.59	270	71	A	H
		2485.68	52.11	-21.89	74	42.01	27.36	16.32	33.58	270	71	P	H
		2490.32	41.59	-12.41	54	31.45	27.4	16.32	33.58	270	71	A	H
		2385.84	52.89	-21.11	74	43.07	27.13	16.29	33.6	159	104	P	V
		2385.36	41.1	-12.9	54	31.32	27.09	16.29	33.6	159	104	A	V
	*	2435	113.08	-	-	103.14	27.22	16.31	33.59	159	104	P	V
	*	2435	110.93	-	-	100.99	27.22	16.31	33.59	159	104	A	V
		2490.48	52.81	-21.19	74	42.67	27.4	16.32	33.58	159	104	P	V
		2483.92	41.46	-12.54	54	31.37	27.36	16.31	33.58	159	104	A	V



<b>ZIGBEE CH 25 2475MHz</b>	*	2475	116.88	-	-	106.79	27.36	16.31	33.58	271	70	P	H
	*	2475	114.74	-	-	104.65	27.36	16.31	33.58	271	70	A	H
		2483.88	61.23	-12.77	74	51.14	27.36	16.31	33.58	271	70	P	H
		2483.52	51.52	-2.48	54	41.43	27.36	16.31	33.58	271	70	A	H
	*	2475	114.53	-	-	104.44	27.36	16.31	33.58	218	101	P	V
	*	2475	112.39	-	-	102.3	27.36	16.31	33.58	218	101	A	V
		2483.92	57.78	-16.22	74	47.69	27.36	16.31	33.58	218	101	P	V
		2483.52	49.11	-4.89	54	39.02	27.36	16.31	33.58	218	101	A	V
<b>ZIGBEE CH 26 2480MHz</b>	*	2480	105.59	-	-	95.5	27.36	16.31	33.58	271	70	P	H
	*	2480	103.45	-	-	93.36	27.36	16.31	33.58	271	70	A	H
		2483.6	61.24	-12.76	74	51.15	27.36	16.31	33.58	271	70	P	H
		2483.52	52.69	-1.31	54	42.6	27.36	16.31	33.58	271	70	A	H
	*	2480	104.38	-	-	94.29	27.36	16.31	33.58	218	101	P	V
	*	2480	102.31	-	-	92.22	27.36	16.31	33.58	218	101	A	V
		2483.52	60.25	-13.75	74	50.16	27.36	16.31	33.58	218	101	P	V
		2483.52	51.31	-2.69	54	41.22	27.36	16.31	33.58	218	101	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
ZIGBEE (Harmonic @ 3m)**

ZIGBEE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
<b>ZIGBEE CH 11 2405MHz</b>		4810	54.18	-19.82	74	70.16	31.26	10.03	57.27	215	267	P	H
		4810	49.17	-4.83	54	65.15	31.26	10.03	57.27	215	267	A	H
		4810	54.12	-19.88	74	70.1	31.26	10.03	57.27	100	280	P	V
		4810	48.89	-5.11	54	64.87	31.26	10.03	57.27	100	280	A	V
<b>ZIGBEE CH 17 2435MHz</b>		4870	54.6	-19.4	74	70.39	31.38	10	57.17	104	21	P	H
		4870	49.28	-4.72	54	65.07	31.38	10	57.17	104	21	A	H
		7305	42.03	-31.97	74	51.24	36.28	11.78	57.27	100	0	P	H
		4870	58.65	-15.35	74	74.44	31.38	10	57.17	185	275	P	V
		4870	50.92	-3.08	54	66.71	31.38	10	57.17	185	275	A	V
		7305	42.7	-31.3	74	51.91	36.28	11.78	57.27	100	0	P	V
<b>ZIGBEE CH 25 2475MHz</b>		4950	53.43	-20.57	74	69.02	31.51	9.97	57.07	108	19	P	H
		4950	48.53	-5.47	54	64.12	31.51	9.97	57.07	108	19	A	H
		7425	41.83	-32.17	74	50.99	36.55	11.71	57.42	100	0	P	H
		4950	54.61	-19.39	74	70.2	31.51	9.97	57.07	184	271	P	V
		4950	49.81	-4.19	54	65.4	31.51	9.97	57.07	184	271	A	V
		7425	42.29	-31.71	74	51.45	36.55	11.71	57.42	100	0	P	V
<b>ZIGBEE CH 26 2480MHz</b>		4960	45.64	-28.36	74	61.18	31.54	9.97	57.05	100	0	P	H
		7440	42.55	-31.45	74	51.68	36.59	11.72	57.44	100	0	P	H
		4960	46.61	-27.39	74	62.15	31.54	9.97	57.05	100	0	P	V
		7440	43.14	-30.86	74	52.27	36.59	11.72	57.44	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz ZIGBEE (LF)

ZIGBEE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz ZIGBEE LF		88.86	27.34	-16.16	43.5	44.13	14.45	1.24	32.48	-	-	P	H
		93.72	25.26	-18.24	43.5	41.46	15.04	1.24	32.48	-	-	P	H
		214.95	30.34	-13.16	43.5	45.91	15.04	1.78	32.39	-	-	P	H
		430.2	25.34	-20.66	46	32.35	22.66	2.68	32.35	-	-	P	H
		766.9	30.26	-15.74	46	31.02	27.94	3.58	32.28	-	-	P	H
		947.5	33.84	-12.16	46	30.62	30.46	3.99	31.23	100	0	P	H
		40.8	33.08	-6.92	40	46.06	18.68	0.83	32.49	-	-	P	V
		45.93	34.25	-5.75	40	49.58	16.14	1.02	32.49	100	281	P	V
		63.48	29.22	-10.78	40	48.99	11.69	1.03	32.49	-	-	P	V
		429.5	24.72	-21.28	46	31.74	22.64	2.68	32.34	-	-	P	V
		573.7	29.69	-16.31	46	33.38	25.63	3.12	32.44	-	-	P	V
	958.7	33.87	-12.13	46	29.89	31.02	4.08	31.12	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Hao Hsu, Chuan Zhu, and Ken Wu	Temperature :	22~25°C
		Relative Humidity :	52~57%





**Note symbol**

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ 3m)

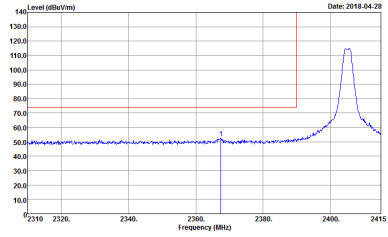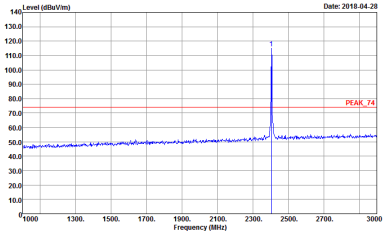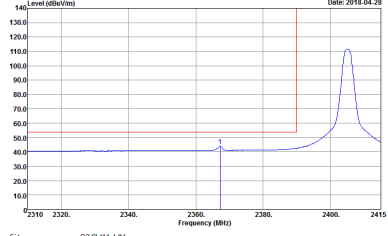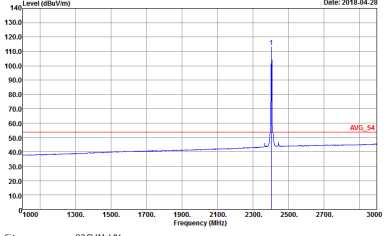Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH11 2405MHz	
1	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 7D0544-01</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 7D0544-01</p>
<b>Avg.</b>	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 7D0544-01</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 7D0544-01</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH11 2405MHz	
1	Vertical	Fundamental
<b>Peak</b>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>
<b>Avg</b>	<p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL            : RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>	<p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF VERTICAL            : RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>







Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH17 2435MHz - L	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0544-01</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0544-01</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0544-01</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0544-01</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH17 2435MHz - R	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWF:Auto            Detector : Peak            Project : 7D0544-01</p>	Left blank
Avg.	<p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:0.010kHz SWF:Auto            Detector : Peak            Project : 7D0544-01</p>	Left blank

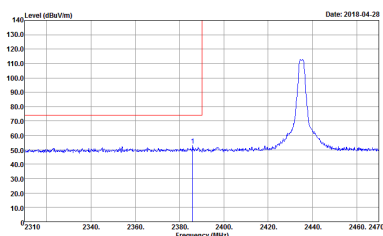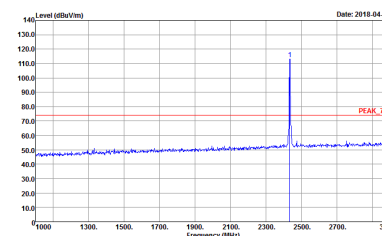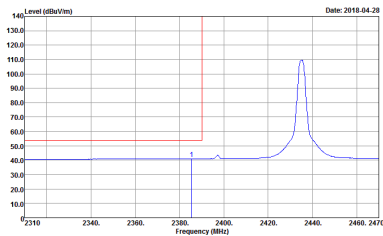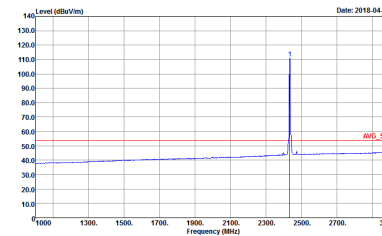





Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH17 2435MHz - L	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>
Avg.	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>









Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH17 2435MHz - R	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWF:Auto            Detector : Peak            Project : 7D0544-01</p>	Left blank
Avg.	<p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWF:Auto            Detector : Peak            Project : 7D0544-01</p>	Left blank

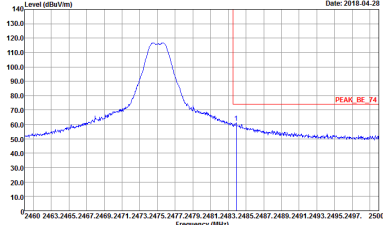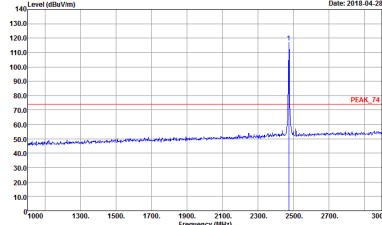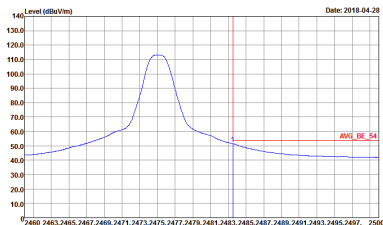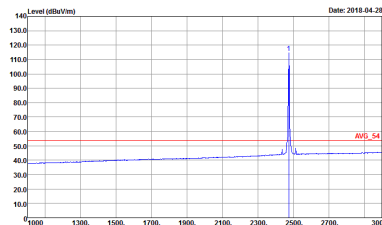

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH25 2475MHz	
1	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>
<b>Avg.</b>	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>

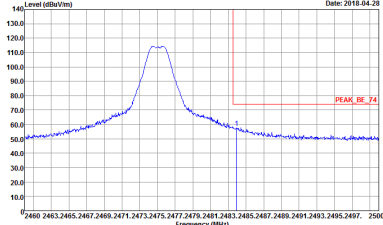
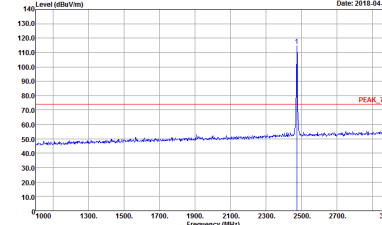
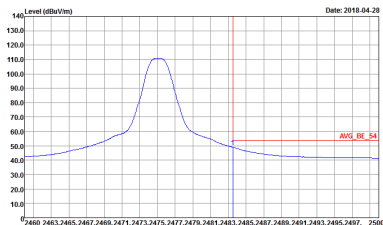
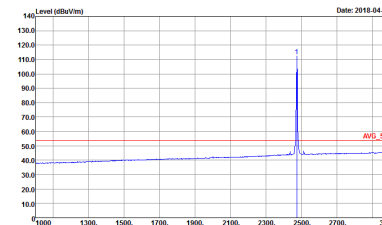


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH25 2475MHz	
1	Vertical	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>
<b>Avg.</b>	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak            Project : 7D0544-01</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH26 2480MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D0544-01            Setting : 9</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D0544-01            Setting : 9</p>
<b>Avg.</b>	<p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 7D0544-01            Setting : 9</p>	<p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 7D0544-01            Setting : 9</p>

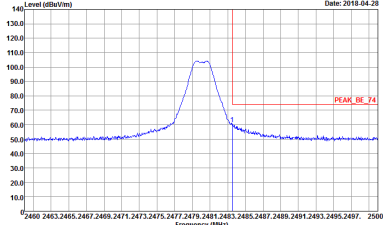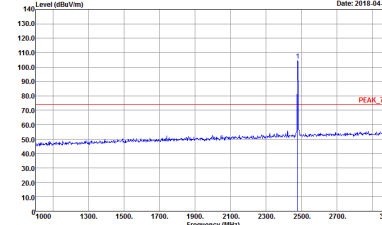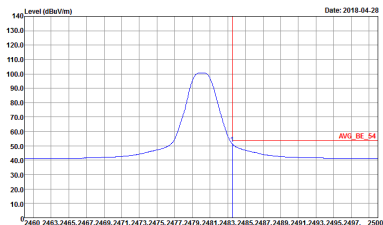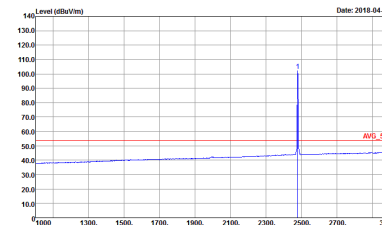

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	Zigbee CH26 2480MHz	
1	Vertical	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D0544-01            Setting : 9</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D0544-01            Setting : 9</p>
<b>Avg.</b>	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 7D0544-01            Setting : 9</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 7D0544-01            Setting : 9</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	Zigbee CH11 2405MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Site : 03CH11-1F            Condition : PEAK_74 3m HORN 91200-1F HORIZONTAL            Detector : Peak            Project : 7D0544-01</p>	<p>Site : 03CH11-1F            Condition : PEAK_74 3m HORN 91200-1F VERTICAL            Detector : Peak            Project : 7D0544-01</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	Zigbee CH17 2435MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 7D0544-01</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 7D0544-01</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	Zigbee CH25 2475MHz	
1	Horizontal	Vertical
Peak	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 700544-01</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 700544-01</p>





Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	Zigbee CH26 2480MHz	
1	Horizontal	Vertical
Peak	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 7D0544-01            Setting : 9</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 7D0544-01            Setting : 9</p>



Emission below 1GHz


2.4GHz Zigbee (LF)

Zigbee	2.4GHz 2400~2483.5MHz	
ANT	Zigbee LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-4#Y Condition : QP_3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 7D0544-01</p>	<p>Site : 03CH11-4#Y Condition : QP_3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 7D0544-01</p>

## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Zigbee	100.00	-	-	10Hz	0.00

### Zigbee

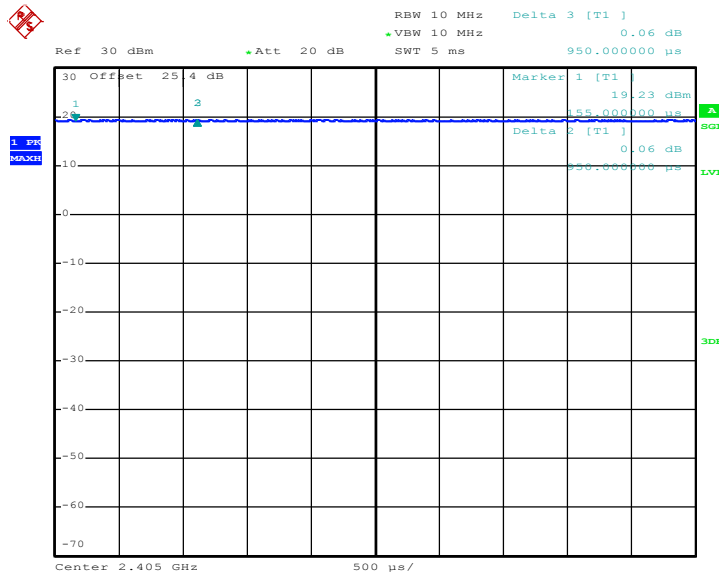

Date: 17.APR.2018 14:43:54