

Test Report

FCC ID:2AO23-QIC36

Date of issue: July 31, 2020

Report number: MTi20063005-5E1

Sample description: Wireless Charging Pad

Model(s): QIC36, PW013

Applicant: Chug, Inc.

Address: 7157 Shady Oak Road, Eden Prairie, MN 55344, USA

Date of test: July 02, 2020 – July 21, 2020

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

Table of Contents

1	GENERAL INFORMATION	4
1.1	FEATURE OF EQUIPMENT UNDER TEST (EUT).....	4
1.2	TEST MODE	4
1.3	EUT TEST SETUP.....	5
1.4	ANCILLARY EQUIPMENT	5
2	SUMMARY OF TEST RESULT	6
2.1	OPERATION CHANNEL LIST	6
2.2	TEST CHANNEL	6
3	TEST FACILITIES AND ACCREDITATIONS	7
3.1	TEST LABORATORY	7
3.2	ENVIRONMENTAL CONDITIONS	7
3.3	MEASUREMENT UNCERTAINTY.....	7
3.4	TEST SOFTWARE	7
4	LIST OF TEST EQUIPMENT	8
5	TEST RESULTS.....	9
5.1	ANTENNA REQUIREMENT	9
5.1.1	<i>Standard requirement</i>	9
5.1.2	<i>EUT Antenna</i>	9
5.2	CONDUCTED EMISSION	10
5.2.1	<i>Limits</i>	10
5.2.2	<i>Test Procedures</i>	10
5.2.3	<i>Test Setup</i>	10
5.2.4	<i>Test Result</i>	10
5.3	RADIATED EMISSION.....	13
5.3.1	<i>Limits</i>	13
5.3.2	<i>Test Procedures</i>	14
5.3.3	<i>Test Setup</i>	15
5.3.4	<i>Test Result</i>	15
5.4	OCCUPIED BANDWIDTH.....	19
5.5	TEST METHOD.....	19
5.6	TEST RESULT	19
	PHOTOGRAPHS OF THE TEST SETUP	21
	PHOTOGRAPHS OF THE EUT.....	23

Test Result Certification

Applicant's name: Chug, Inc.

Address: 7157 Shady Oak Road, Eden Prairie, MN 55344, USA

Manufacture's name: SHENZHEN RIHUIDA ELECTRONICS CO., LTD.

Address: The 01st, 02nd, 03rd And 04th Floors Of The A3, 4 Building Of Fuzhong Industrial Park, Huaide Community, Fuyong Street, Bao'an District, Shenzhen City, Guangdong Province, China.

Product name: Wireless Charging Pad

Trademark: heyday

Model name: QIC36, PW013

Standards: FCC Part 15C

Test procedure: ANSI C63.10-2013

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


Tested by:



Demi Mu

July 21, 2020

Reviewed by:



Leo Su

July 31, 2020

Approved by:



Tom Xue

July 31, 2020

1 GENERAL INFORMATION

1.1 Feature of equipment under test (EUT)

Product name:	Wireless Charging Pad
Model name:	QIC36
Series model:	PW013
Deference in serial model:	All the model are the same circuit and RF module, except the model No..
Operation frequency:	115–300kHz
Modulation type:	Load modulation
Antenna type:	Coil Antenna
Power supply:	DC 15V from adapter AC 120V/60Hz
Battery:	N/A
Adapter information:	Model:J53001A Input:100-240V 50/60Hz 0.6A Output: DC 5V 3A,9V 3A,12V 2.5A,15V 2A,20V 1.5A
EUT serial number:	MTi20063005-5-S0001

1.2 Test mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test mode	Description
Mode 1	TX

Note:

1: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode for EMI, and its test data was showed.

2: EUT is tested under full load.

1.3 EUT test setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary equipment

Equipment	Model	Spec.	Manufacturer
Adapter	J53001A	/	Dongguan Xunyue Electronics Co., Ltd
Cable	/	1.83m	
Load 1	/	/	/
Load 2	/	/	/

2 Summary of Test Result

Item	FCC Part No.	Description of Test	Result
1	FCC PART 15.203	Antenna requirement	Pass
2	FCC PART 15.207	Conducted emission	Pass
3	FCC PART 15.209	Radiated emission	Pass
4	FCC Part 15.215	20dB bandwidth	Pass

2.1 Operation channel list

Coil1:

Channel	Frequency (kHz)
Low	115
Middle	128
High	300

Coil2:

Channel	Frequency (kHz)
Low	115
Middle	130
High	300

2.2 Test channel

Coil1:

Channel	Frequency (kHz)
Middle	128

Coil2:

Channel	Frequency (kHz)
Middle	130

3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2xUc(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree
Humidity	± 5 %

3.4 Test software

Software Name	Manufacturer	Model	Version
RF Test System	Shenzhen JS tonscond co., ltd	JS1120-3	2.5.77.0418

4 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI7	100314	2019/10/09	2020/10/08
MTI-E006	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-872	2019/10/15	2020/10/14
MTI-E014	amplifier	Hewlett-Packard	8447D	3113A06150	2019/10/09	2020/10/08
MTI-E036	Single path vehicle AMN(LISN)	Schwarzbeck	NNBM 8124	01175	2019/10/09	2020/10/08
MTI-E038	Low noise active vertical monopole antenna	Schwarzbeck	VAMP 9243	#565	2019/10/16	2020/10/15
MTI-E039	Biconical antenna	Schwarzbeck	BBA 9106	#164	2019/10/15	2020/10/14
MTI-E041	MXG Vector Signal Generator	Agilent	N5182A	MY49060455	2020/04/16	2021/04/15
MTI-E042	ESG Series Analog signal generator	Agilent	E4421B	GB40051240	2020/05/21	2021/05/20
MTI-E044	Thermometer clock humidity monitor	-	HTC-1	/	2020/04/17	2021/04/16
MTI-E062	Log Periodic Antenna	Schwarzbeck	VUSLP 9111B	#312	2020/04/11	2022/04/10
MTI-E063	Log Periodic Dipole Array Antenna	ETS-LINDGREN	3148B	00224524	2020/04/11	2022/04/10
MTI-E065	Amplifier	EMtrace	RP06A	00117	2020/04/29	2021/04/28
MTI-E071	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2020/10/25	2020/10/24
MTI-E076	EMI Test Receiver	Rohde&schwarz	ESIB26	100273	2020/04/16	2021/04/15
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2020/04/16	2021/04/15
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2020/04/16	2021/04/15
MTI-E093	Artificial mains network	3ctest	LISN J50	ES3911805	2020/04/16	2021/04/15
MTI-E096	Power amplifier	Space-Dtronics	EWLNA0118G-P40	1852001	2020/04/29	2021/04/28
MTI-E097	Current Probe	SOLAR ELECTRONICS CO.	9207-1	220095-1	2020/04/17	2021/04/16
MTI-E098	Loop Sensor	SOLAR ELECTRONICS CO.	7334-1	220095-2	2020/04/21	2021/04/20

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

5 Test Results

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 EUT Antenna

The EUT antenna is Coil Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted emission

5.2.1 Limits

For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.5 -5	56	46
5 -30	60	50

Note:

the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.2.2 Test Procedures

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.


Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item – photographs of the test setup.

5.2.3 Test Setup

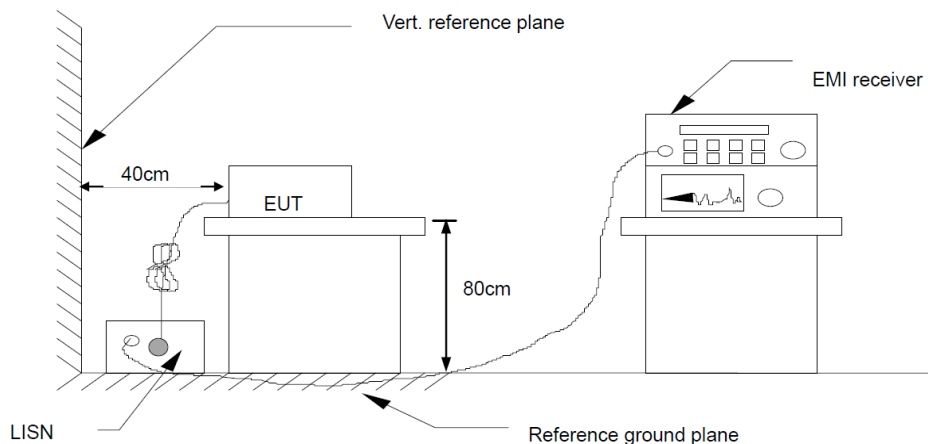


5.2.4 Test Result

Note: After evaluating the conducted emission of 120V and 240V, and the emission of 120V

represents the worst case, the report only reflects the worst mode


EUT:	Wireless Charging Pad	Model Name:	QIC36
Pressure:	101kPa	Phase:	L
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

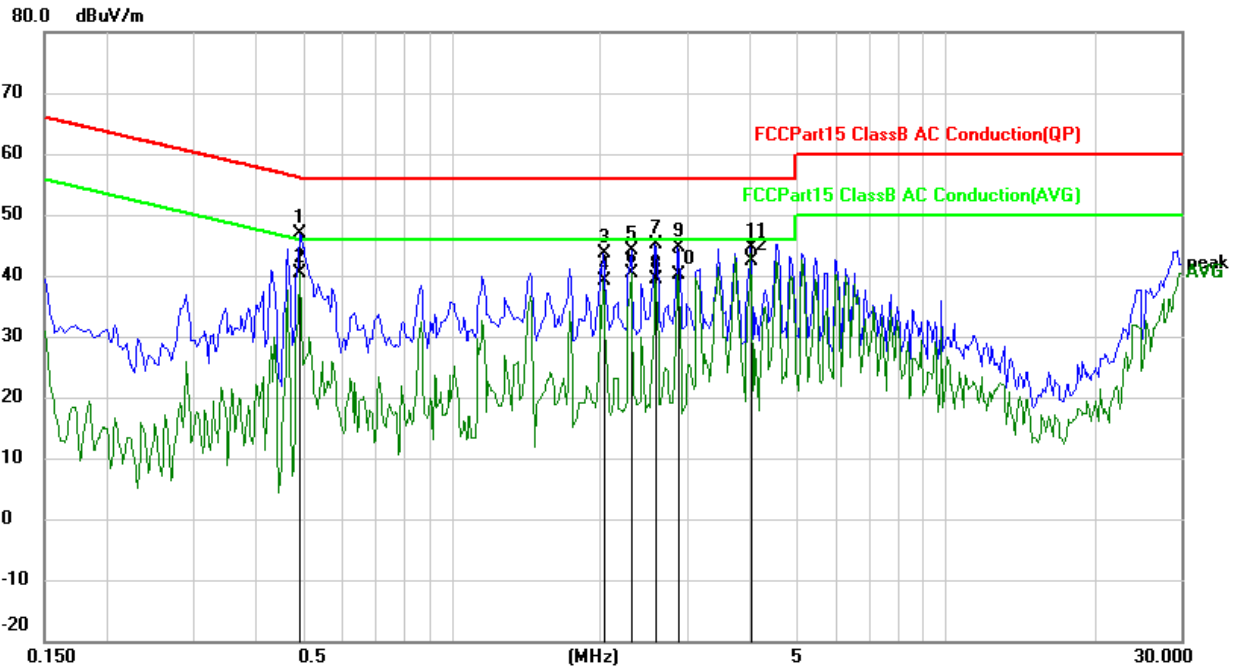

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.4938	37.11	9.88	46.99	56.10	-9.11	QP
2		0.4938	30.40	9.88	40.28	46.10	-5.82	AVG
3		2.0250	33.61	9.97	43.58	56.00	-12.42	QP
4		2.0250	29.06	9.97	39.03	46.00	-6.97	AVG
5		2.3141	34.26	9.98	44.24	56.00	-11.76	QP
6		2.3141	30.44	9.98	40.42	46.00	-5.58	AVG
7		2.5913	35.14	9.99	45.13	56.00	-10.87	QP
8		2.5913	29.40	9.99	39.39	46.00	-6.61	AVG
9		2.8804	34.54	9.99	44.53	56.00	-11.47	QP
10		2.8804	30.26	9.99	40.25	46.00	-5.75	AVG
11		4.0352	34.69	10.03	44.72	56.00	-11.28	QP
12	*	4.0352	32.27	10.03	42.30	46.00	-3.70	AVG



EUT:	Wireless Charging Pad	Model Name:	QIC36
Pressure:	101kPa	Phase:	N
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

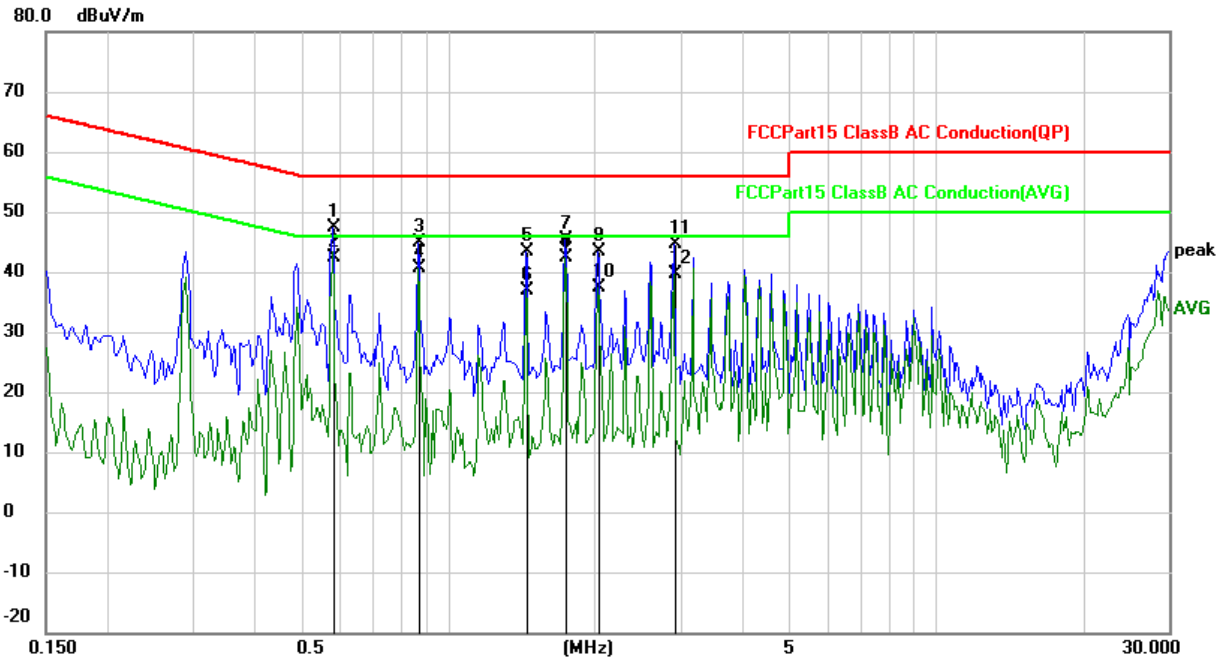

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.5797	37.54	9.89	47.43	56.00	-8.57	QP
2	*	0.5797	32.61	9.89	42.50	46.00	-3.50	AVG
3		0.8688	34.85	9.93	44.78	56.00	-11.22	QP
4		0.8688	30.82	9.93	40.75	46.00	-5.25	AVG
5		1.4469	33.30	9.96	43.26	56.00	-12.74	QP
6		1.4469	26.96	9.96	36.92	46.00	-9.08	AVG
7		1.7398	35.31	9.97	45.28	56.00	-10.72	QP
8		1.7398	32.46	9.97	42.43	46.00	-3.57	AVG
9		2.0288	33.47	9.97	43.44	56.00	-12.56	QP
10		2.0288	27.50	9.97	37.47	46.00	-8.53	AVG
11		2.9000	34.62	9.99	44.61	56.00	-11.39	QP
12		2.9000	29.54	9.99	39.53	46.00	-6.47	AVG

5.3 Radiated emission

5.3.1 Limits

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

The limit for radiated test was performed according to FCC PART 15C.

The tighter limit applies at the band edges.

Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP


5.3.2 Test Procedures

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
- h. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

5.3.3 Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

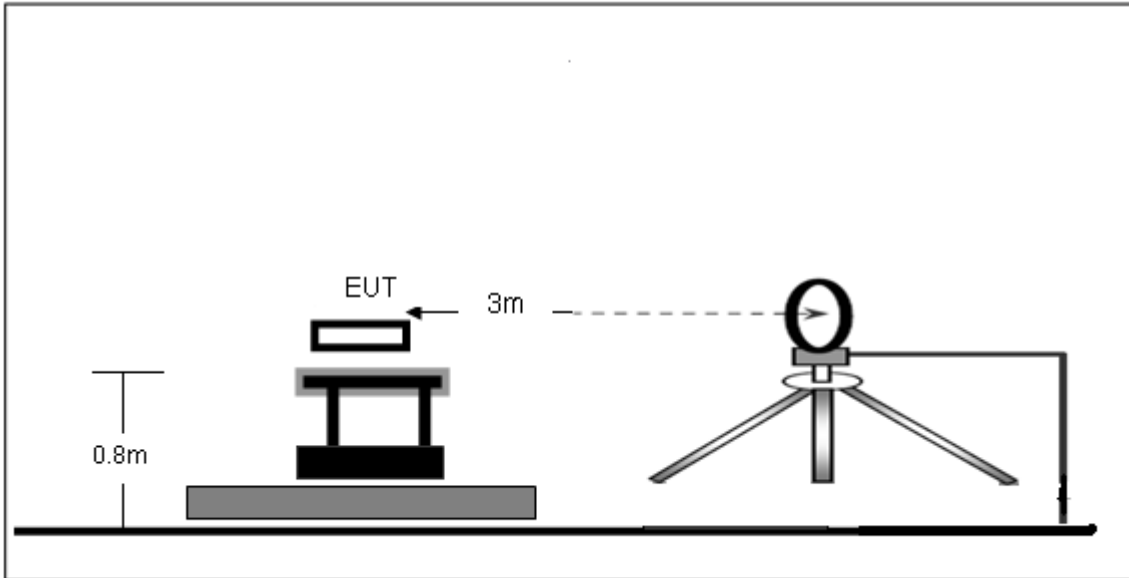


Radiated Emission Test-Up Frequency 30MHz~1GHz

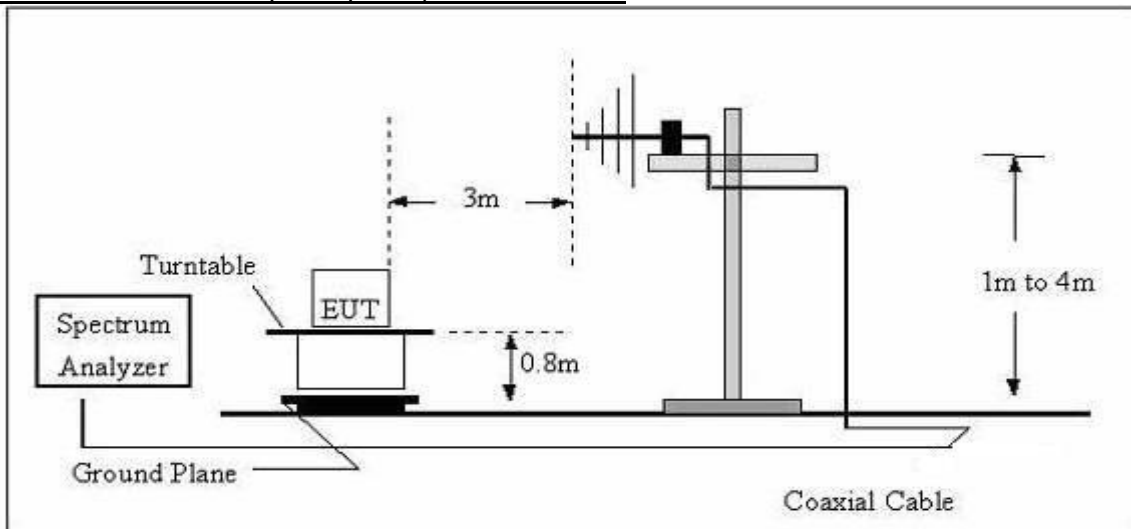

5.3.4 Test Result

Frequency range (9kHz – 30MHz)


EUT:	Wireless Charging Pad	Model Name:	QIC36
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	DC 15V from adapter AC 120V/60Hz		

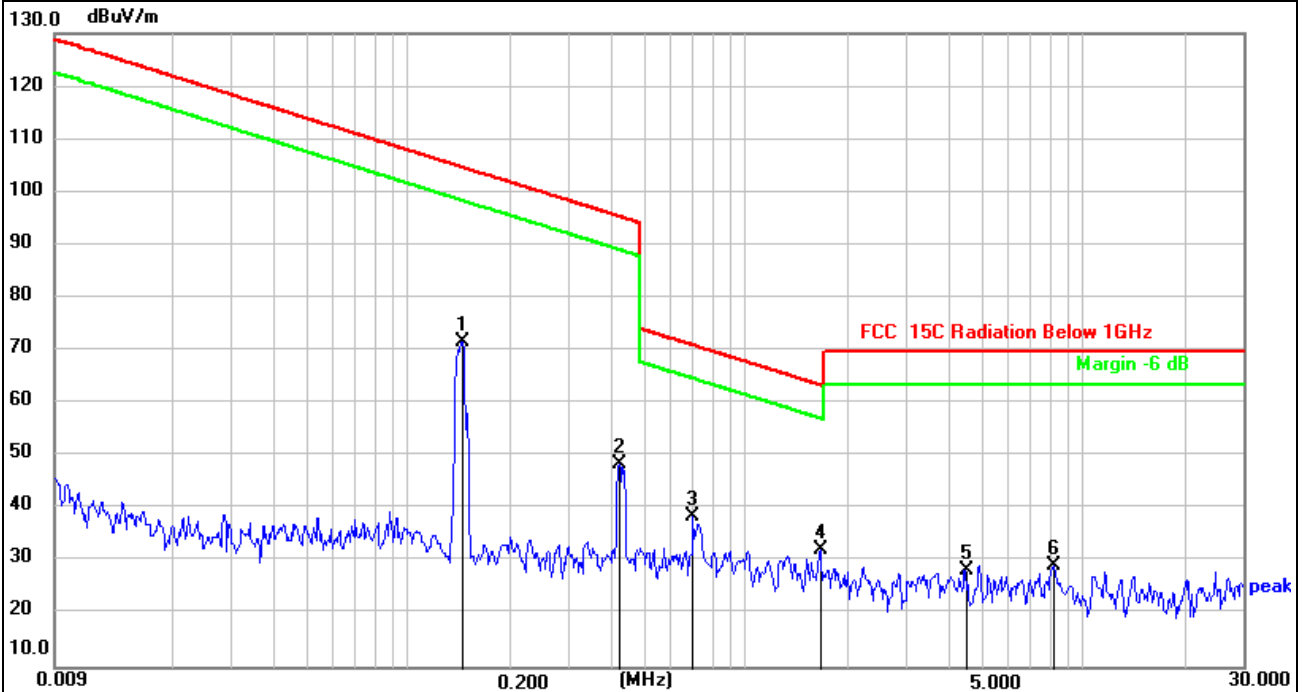

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1454	51.45	20.11	71.56	104.35	-32.79	QP
2	0.4242	28.34	20.30	48.64	95.05	-46.41	QP
3	0.7015	18.13	20.44	38.57	70.69	-32.12	QP
4 *	1.6710	11.91	20.46	32.37	63.17	-30.80	QP
5	4.4954	8.26	20.26	28.52	69.50	-40.98	QP
6	8.1932	8.78	20.43	29.21	69.50	-40.29	QP

Frequency range (30MHz – 1GHz)


EUT:	Wireless Charging Pad	Model Name:	QIC36
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

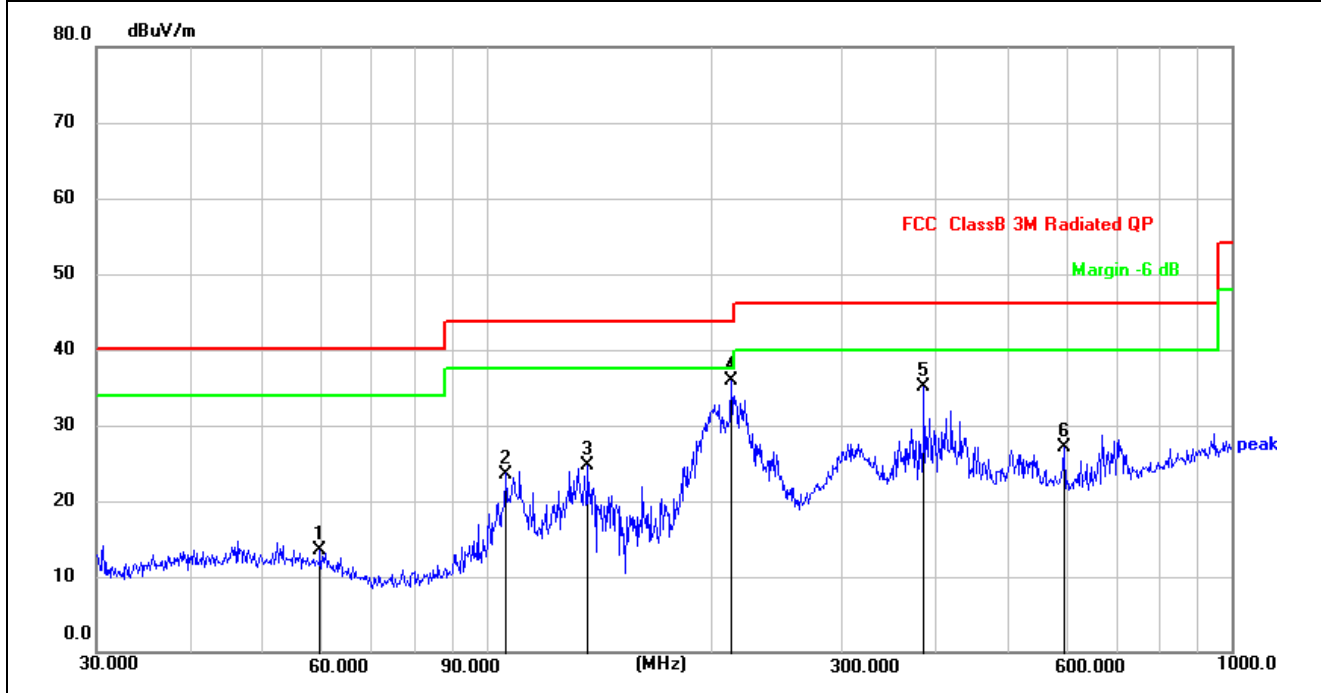

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	59.8588	28.50	-15.08	13.42	40.00	-26.58	QP
2	106.0126	38.62	-15.05	23.57	43.50	-19.93	QP
3	136.9391	42.22	-17.59	24.63	43.50	-18.87	QP
4 *	213.0151	49.48	-13.63	35.85	43.50	-7.65	QP
5	386.6338	44.76	-9.68	35.08	46.00	-10.92	QP
6	595.1329	32.73	-5.63	27.10	46.00	-18.90	QP



EUT:	Wireless Charging Pad	Model Name:	QIC36
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

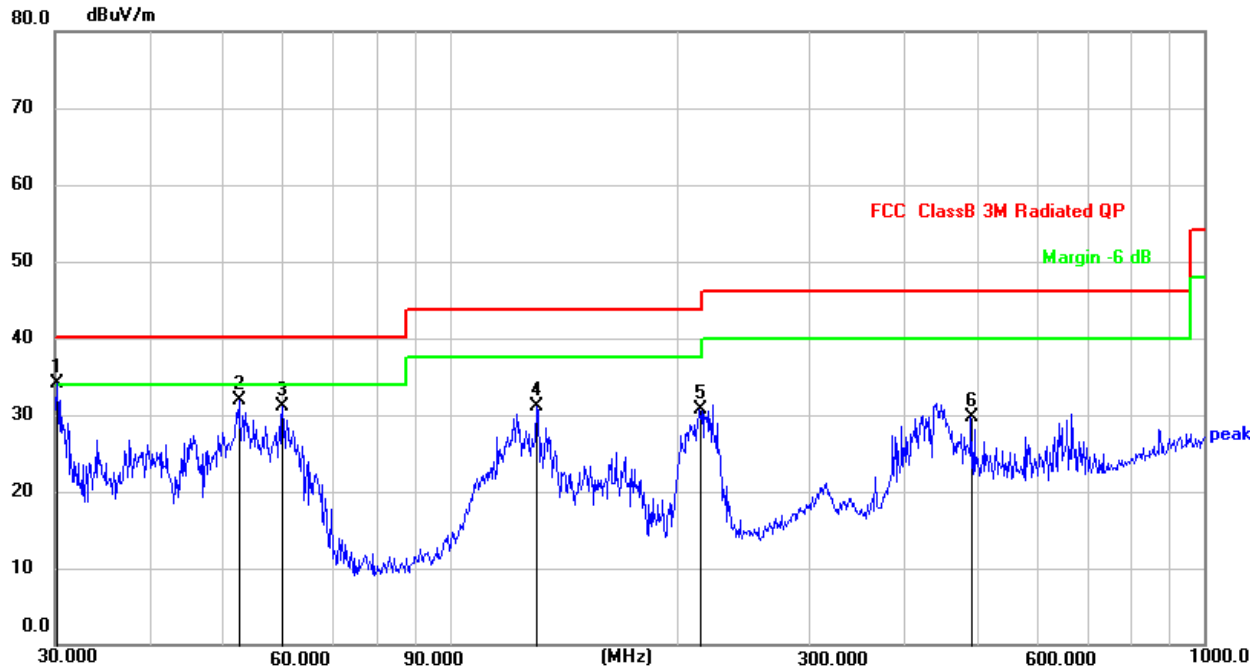

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	30.2111	51.10	-17.01	34.09	40.00	-5.91	QP
2	52.5753	46.15	-14.29	31.86	40.00	-8.14	QP
3	60.0691	46.29	-15.12	31.17	40.00	-8.83	QP
4	130.3789	48.53	-17.34	31.19	43.50	-12.31	QP
5	214.5143	44.25	-13.60	30.65	43.50	-12.85	QP
6	490.7447	37.39	-7.64	29.75	46.00	-16.25	QP

5.4 Occupied bandwidth

5.5 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

5.6 Test result

Coil 1:

Frequency (kHz)	20dB emission bandwidth (kHz)	99% occupied bandwidth (kHz)
128	8.355	8.970


Test plots as below:

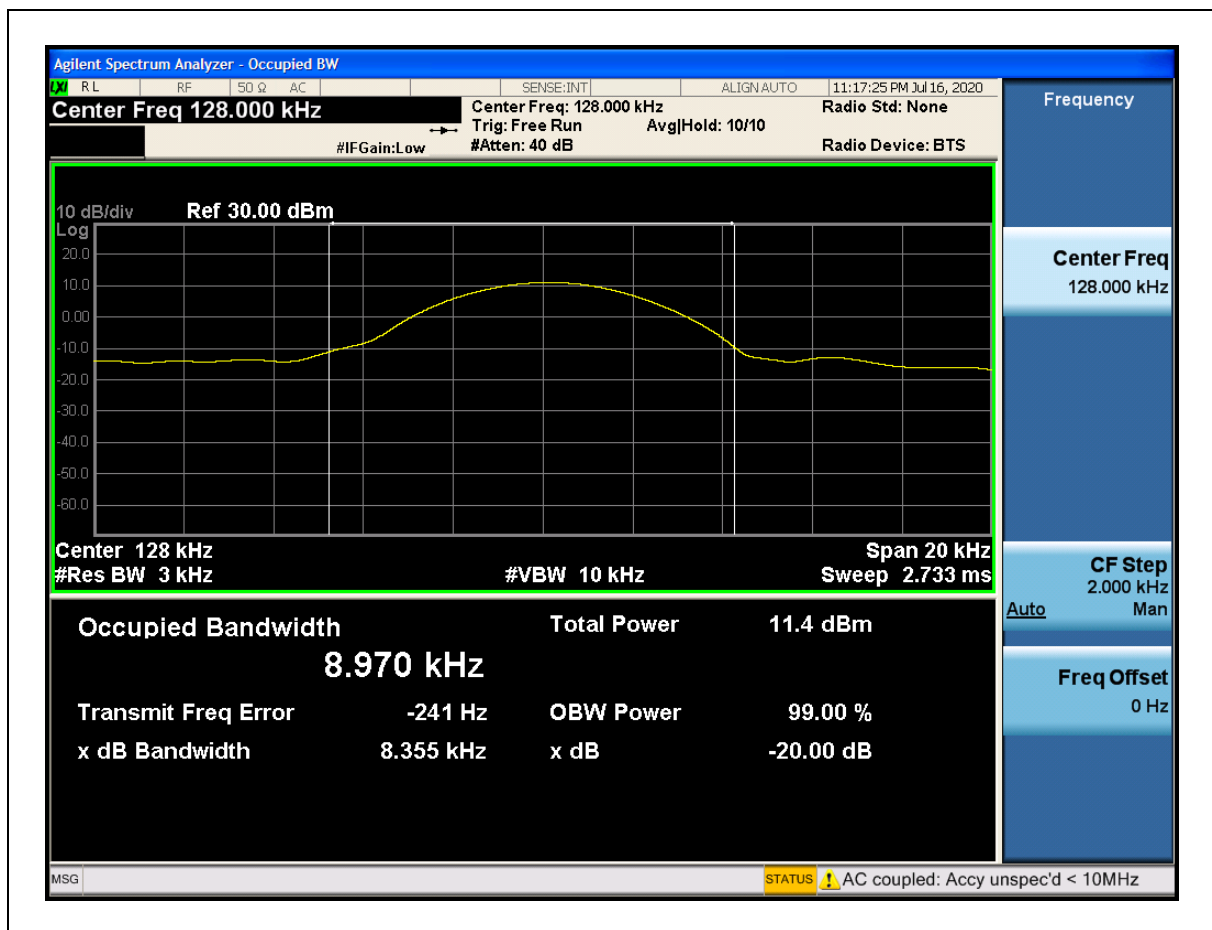

Coil 2:



Frequency (kHz)	20dB emission bandwidth (kHz)	99% occupied bandwidth (kHz)
130	8.938	11.379

Test plots as below:

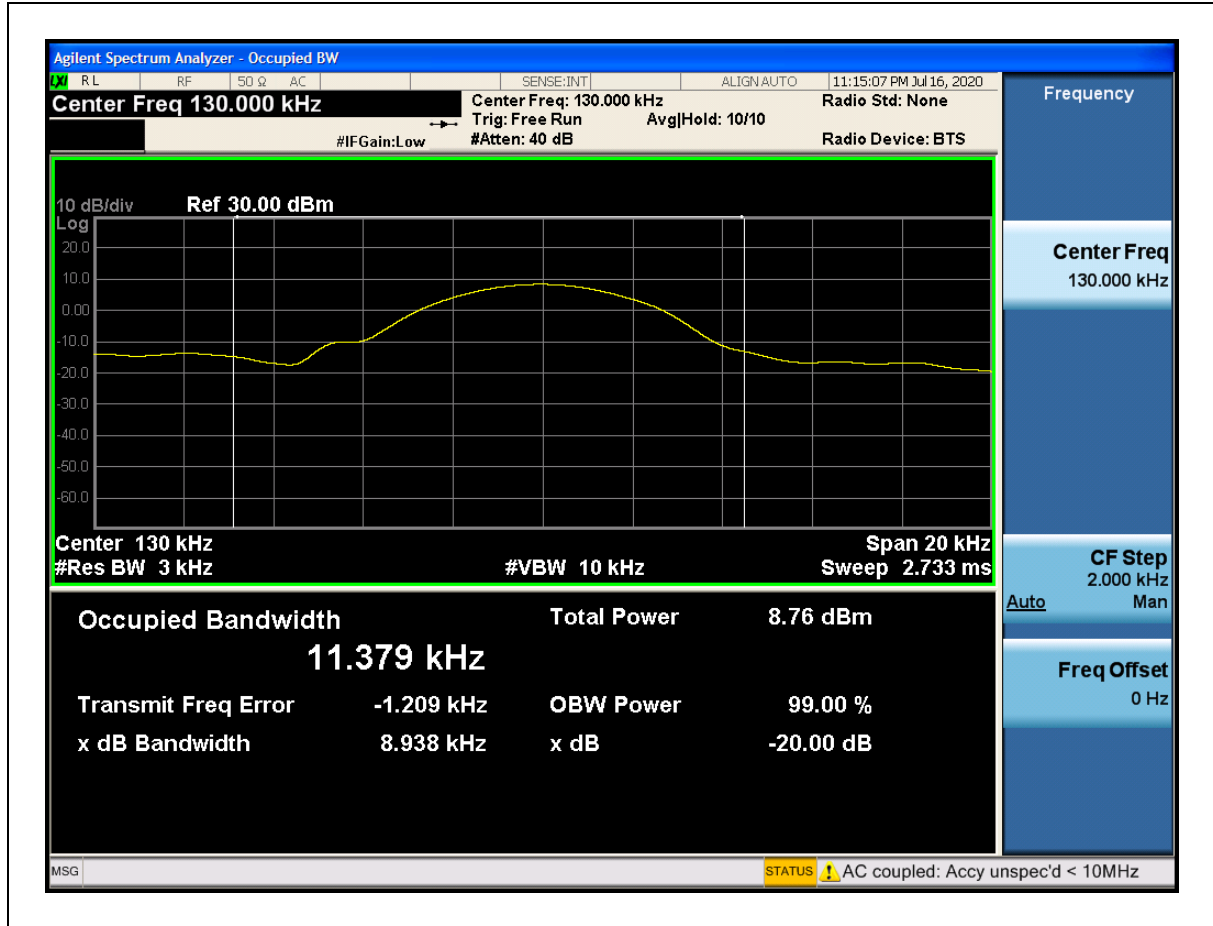

Photographs of the Test Setup

Radiated emission

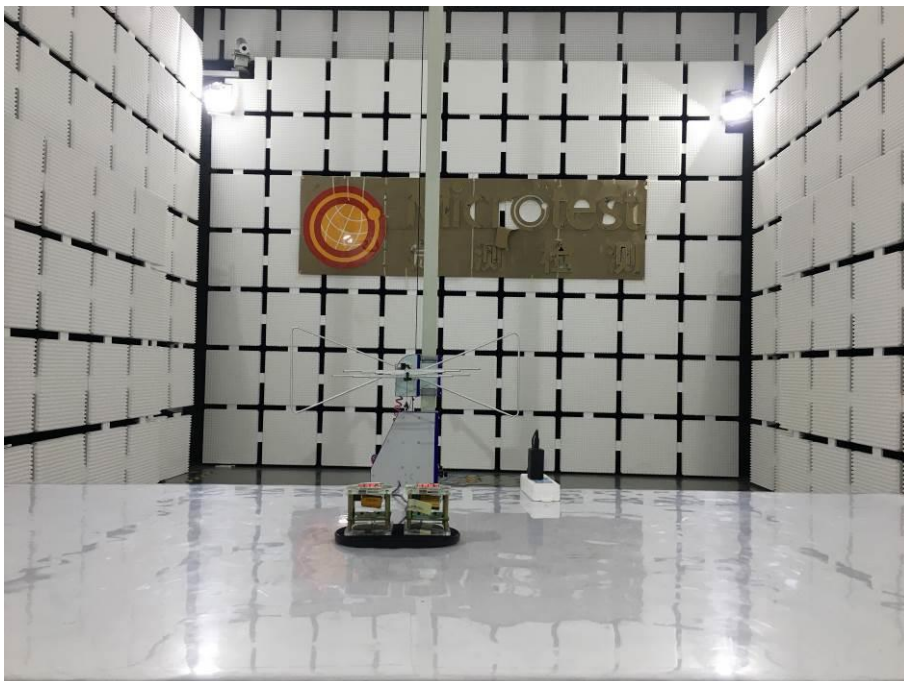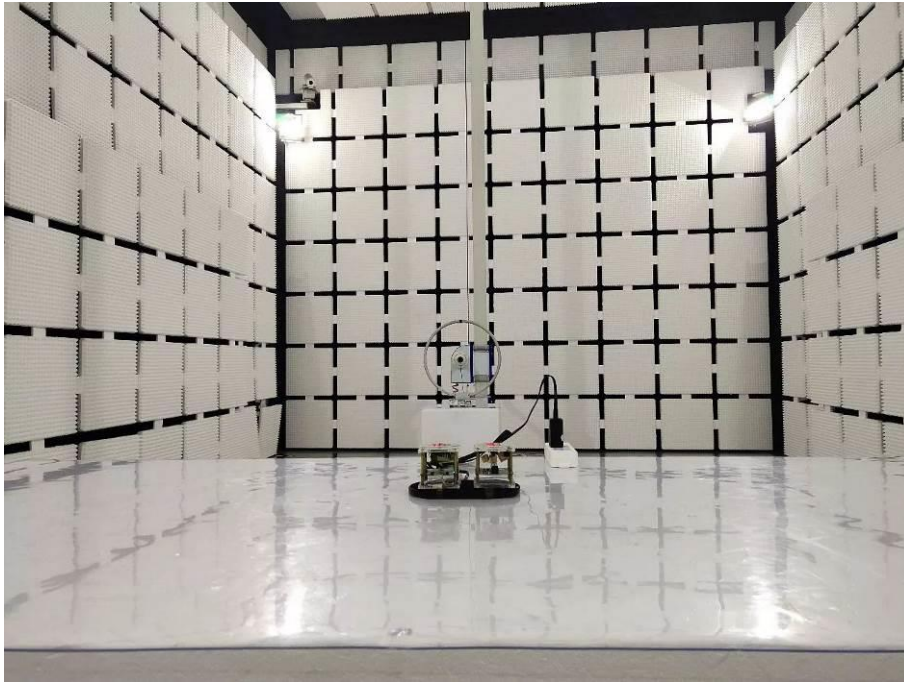



Conducted emission



Photographs of the EUT

See the APPENDIX 1: EUT PHOTOS in the report No.: MTi20063005-5E1-1.

----END OF REPORT----