



FCC SAR TEST REPORT

Report No.: STS2008285H01

Issued for

Innowi Inc.

3240 Scott Blvd, Santa Clara, CA - 95054

Product Name:	CB_UWA6N4C_47
Brand Name:	Innowi
Model Name:	mBadge
Series Model:	N/A
FCC ID:	2AO2Y-IWCHTB101
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Body: 1.241 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





Test Report Certification

Applicant's name : Innowi Inc.
 Address : 3240 Scott Blvd, Santa Clara, CA - 95054
Manufacturer's Name : Innowi Inc.
 Address : 3240 Scott Blvd, Santa Clara, CA - 95054

Product description

Product name : CB_UWA6N4C_47
 Brand name : Innowi
 Model name : mBadge
 Series Model..... : N/A

Standards..... : ANSI/IEEE Std. C95.1-1992
 FCC 47 CFR Part 2 (2.1093)
 IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test :
 Date (s) of performance of tests..... : 27 Aug. 2020~28 Aug. 2020
 Date of Issue..... : 04 Sep. 2020
 Test Result..... : **Pass**

Testing Engineer : Aaron Bu.
 (Aaron Bu)

Technical Manager : Sean She
 (Sean She)

Authorized Signatory : Vita Li
 (Vita Li)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	6
1.3 Test Factory	6
2. Test Standards and Limits	7
3. SAR Measurement System	8
3.1 Definition of Specific Absorption Rate (SAR)	8
3.2 SAR System	8
4. Tissue Simulating Liquids	11
4.1 Simulating Liquids Parameter Check	11
5. SAR System Validation	13
5.1 Validation System	13
5.2 Validation Result	13
6. SAR Evaluation Procedures	14
7. EUT Antenna Location Sketch	15
7.1 SAR test exclusion consider table	16
8. EUT Test Position	20
8.1 Body-worn Position Conditions:	20
8.2 Hotspot mode exposure position condition	20
9. Uncertainty	21
9.1 Measurement Uncertainty	21
9.2 System validation Uncertainty	22
10. Conducted Power Measurement	23
10.1 Test Result	23
11. EUT and Test Setup Photo	27
11.1 EUT Photo	27
11.2 Setup Photo	30
12. SAR Result Summary	32
12.1 Body-worn and Hotspot SAR	32
12.1 Limbs and Hotspot SAR	35
13. Equipment List	39
Appendix A. System Validation Plots	40
Appendix B. SAR Test Plots	50
Appendix C. Probe Calibration and Dipole Calibration Report	65



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	04 Sep. 2020	STS2008285H01	ALL	Initial Issue

Note: **Format version** of the report -V01





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	CB_UWA6N4C_47			
Brand Name	Innowi			
Model Name	mBadge			
Series Model	N/A			
Model Difference	N/A			
Battery	Rated Voltage: 3.85V Charge Limit: 4.4V Capacity: 3930mAh			
Device Category	Portable			
Product stage	Production unit			
RF Exposure Environment	General Population / Uncontrolled			
Hardware Version	R1.0			
Software Version	N/A			
Frequency Range	WLAN802.11b/g/n(HT20): 2412~2462MHz WLAN 802.11n(HT40): 2422~2452MHz WLAN 802.11a/n/ac(HT20/40/80): 5150~5250 MHz; WLAN 802.11a/n/ac(HT20/40/80): 5250~5350 MHz; WLAN 802.11a/n/ac(HT20/40/80): 5500~5700 MHz; WLAN 802.11a/n/ac(HT20/40/80): 5725~5875 MHz; Bluetooth: 2402~ 2480MHz			
Max. Reported SAR	Band	Mode	Body Worn and Hotspot(W/kg)	Limbs and Hotspot(W/kg)
	DTS	2.4G WLAN ANT A	0.125	0.046
	DTS	2.4G WLAN ANT B	0.090	0.039
	DTS	2.4G WLAN MIMO	0.201	0.088
	NII	5.2G WLAN ANT A	0.562	0.182
	NII	5.2G WLAN ANT B	0.466	0.470
	NII	5.2G WLAN MIMO	1.018	0.321
	NII	5.3G WLAN ANT A	0.684	0.199
	NII	5.3G WLAN ANT B	0.395	0.108
	NII	5.3G WLAN MIMO	1.083	0.303
	NII	5.6G WLAN ANT A	0.736	0.219
	NII	5.6G WLAN ANT B	0.230	0.050
	NII	5.6G WLAN MIMO	1.241	0.323
	NII	5.8G WLAN ANT A	0.683	0.209
	NII	5.8G WLAN ANT B	0.152	0.032
	NII	5.8G WLAN MIMO	0.726	0.210
	DSS	Bluetooth ^{Note}	0.115	
	Limit		1.6W/kg	2.0W/kg
FCC Equipment Class	Part 15 Spread Spectrum Transmitter (DSS) Digital Transmission System (DTS) Unlicensed National Information Infrastructure TX (NII)			



Operating Mode:	WLAN: 802.11 a/b/g/n(HT20)ac(VHT20) /n(HT40)/ac(VHT40)/ac(VHT80) Bluetooth: 5.0+EDR (GFSK + π /4DQPSK+8DPSK) BLE:GFSK
Antenna Specification:	2.4G WLAN Ant A:PIFA Antenna 2.4G WLAN Ant B:PCB Antenna 5G WLAN Ant A:PCB Antenna 5G WLAN Ant B:PIFA Antenna BT: PIFA Antenna
Hotspot Mode	Support
DTM Mode	Not Support
Note: 1. Bluetooth SAR was estimated 2. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power	

1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01



2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
8	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
9	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

<p>NOTE</p> <p>GENERAL POPULATION/UNCONTROLLED EXPOSURE</p> <p>PARTIAL BODY LIMIT</p> <p>1.6 W/kg</p>

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

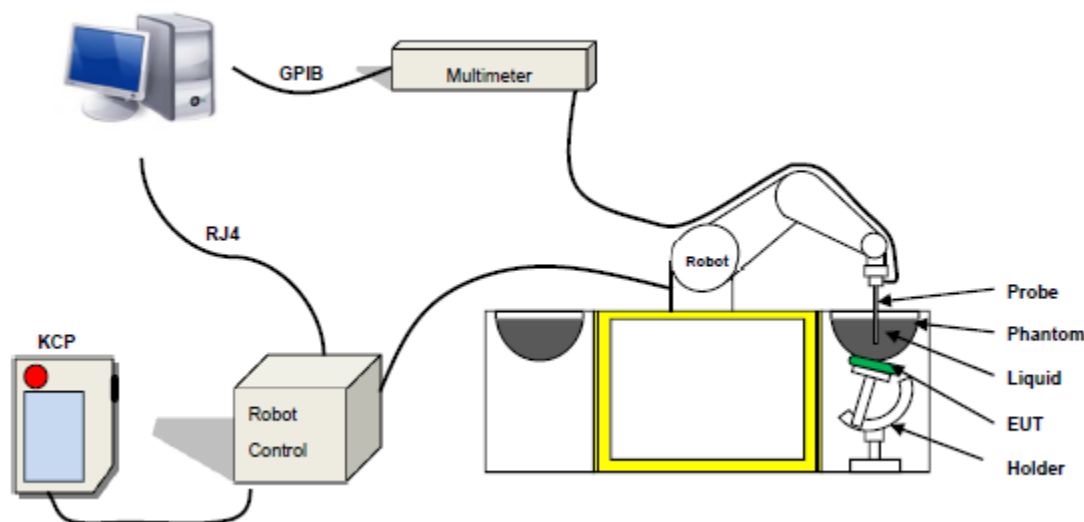

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 41/18 EPG0334 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 450 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder

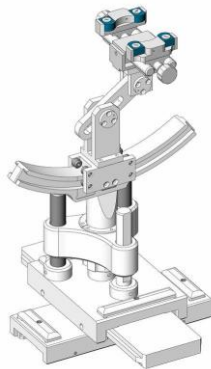

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

4. Tissue Simulating Liquids



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Head Tissue

Frequency (MHz)	cellulose	DGBE	HEC	NaCl	Preventol	Sugar	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	0.2	/	/	1.4	0.2	57.0	/	41.1	0.89	41.9
835	0.2	/	/	1.4	0.2	57.9	/	40.3	0.90	41.5
900	0.2	/	/	1.4	0.2	57.9	/	40.3	0.97	41.5
1800	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
1900	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
2000	/	44.5	/	0.3	/	/	/	55.2	1.4	40.0
2450	/	44.9	/	0.1	/	/	/	55.0	1.80	39.2
2600	/	45.0	/	0.1	/	/	/	54.9	1.96	39.0

Body Tissue

Frequency (MHz)	cellulose	DGBE	HEC	NaCl	Preventol	Sugar	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	0.2	/	/	0.9	0.1	47.2	/	51.7	0.96	55.5
835	0.2	/	/	0.9	0.1	48.2	/	50.8	0.97	55.2
900	0.2	/	/	0.9	0.1	48.2	/	50.8	1.05	55.0
1800	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
1900	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
2000	/	29.4	/	0.4	/	/	/	70.2	1.52	53.3
2450	/	31.3	/	0.1	/	/	/	68.6	1.95	52.7
2600	/	31.7	/	0.1	/	/	/	68.2	2.16	52.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ	
			S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS**

Date	Ambient condition		Head Simulating Liquid		Parameters	Target	Measured	Deviation [%]	Limited [%]
	Temp. [°C]	Humidity [%]	Frequency	Temp. [°C]					
2020-08-27	22.9	52	2450 MHz	22.7	Permittivity:	52.7	52.65	-0.09	±5
					Conductivity:	1.95	1.88	-3.59	±5
2020-08-28	23.4	54	5200 MHz	23.1	Permittivity	49.0	48.69	-0.63	±5
					Conductivity	5.30	5.42	2.26	±5
2020-08-28	23.4	54	5300 MHz	23.1	Permittivity	48.7	48.85	0.31	±5
					Conductivity	5.53	5.62	1.63	±5
2020-08-28	23.4	54	5600 MHz	23.1	Permittivity	48.5	48.62	0.25	±5
					Conductivity	5.65	5.48	-3.01	±5
2020-08-28	23.4	54	5800 MHz	23.1	Permittivity	48.2	48.51	0.64	±5
					Conductivity	6.00	5.89	-1.83	±5




5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

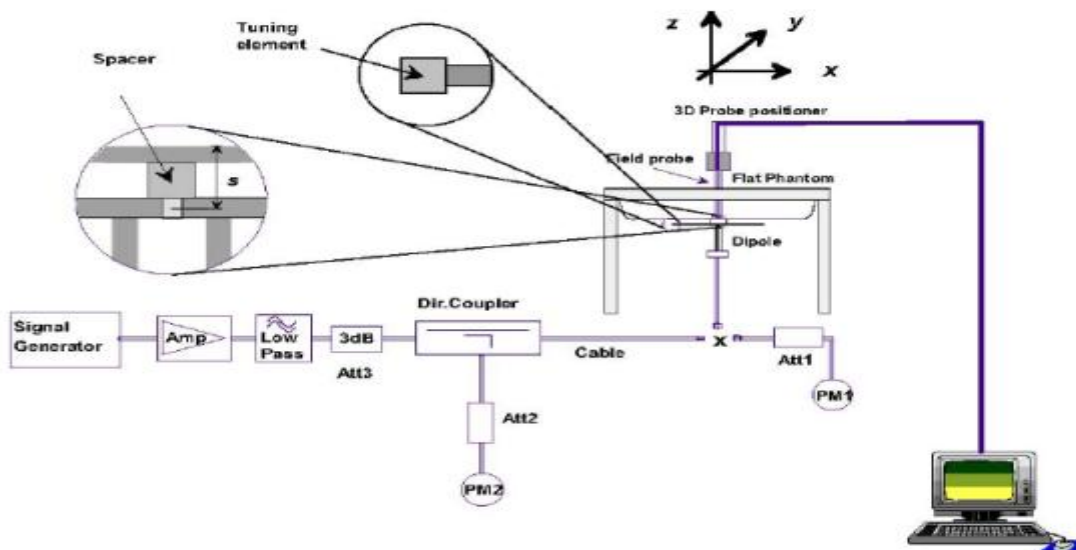

5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg/W)	Target (W/Kg/W)	Tolerance(%)	Date
2450	100	5.345	53.45	54.70	-2.29	2020-08-27
5200	100	15.870	158.70	163.88	-3.16	2020-08-28
5300	100	16.895	168.95	172.23	-1.90	2020-08-28
5600	100	18.369	183.69	181.28	1.33	2020-08-28
5800	100	18.541	185.41	188.95	-1.87	2020-08-28

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.


➤ Area Scan & Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a CB_UWA6N4C_47, support GSM/WCDMA/LTE/WIFI/BT mode.

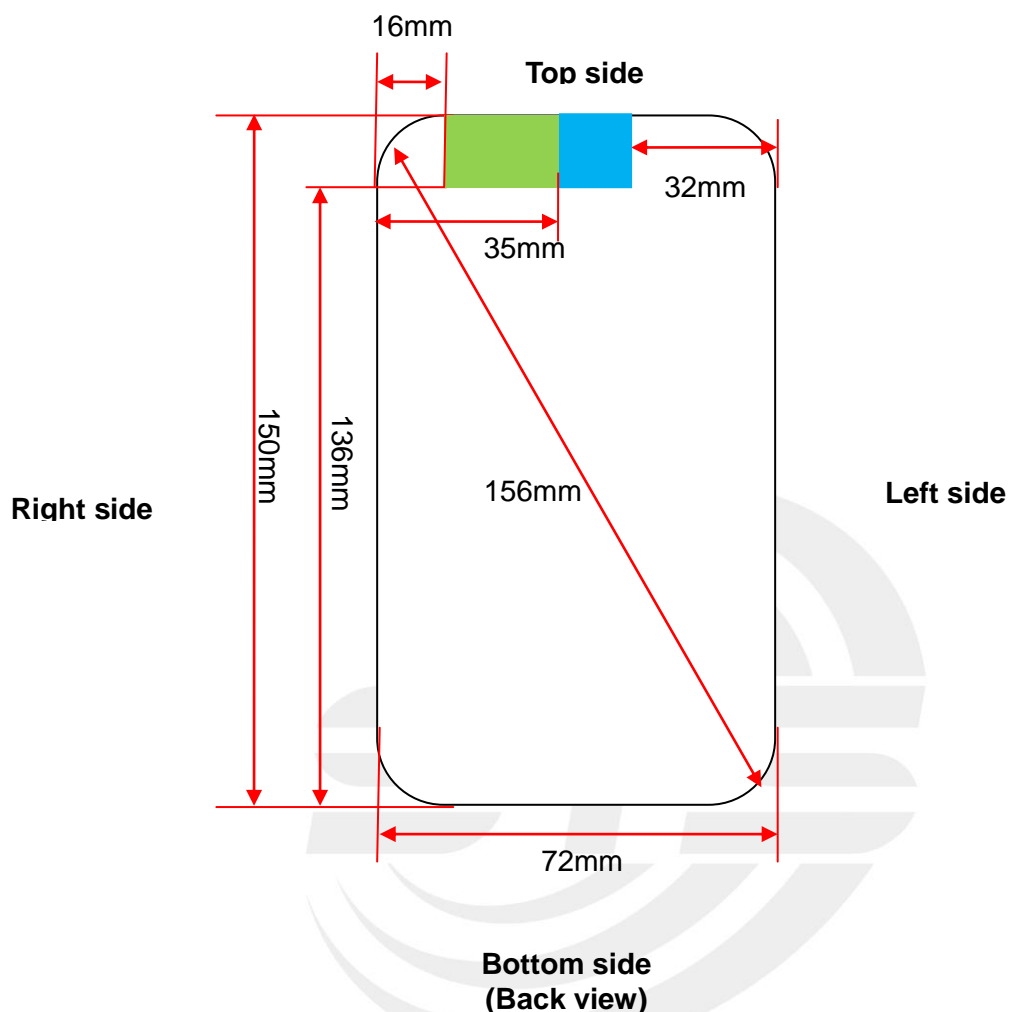

 2.4G WLAN Ant B /5 G WLAN Ant A

 2.4G WLAN Ant A /5 G WLAN Ant B/BT

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.

Band	Test position configurations					
	Front	Back	Right edge	Left edge	Top edge	Bottom edge
2.4G WLAN Ant B /5 G WLAN Ant A	<5mm	<5mm	35mm	32mm	<5mm	136mm
2.4G WLAN Ant A /5 G WLAN Ant B/BT	<5mm	<5mm	16mm	30mm	<5mm	136mm



7.1 SAR test exclusion consider table

The WIFI/BT SAR evaluation of Maximum power (dBm) summing tolerance (antenna A/B/BT)

Exposure Position	Wireless Interface	2.4G WIFI		BT	
	Ant	A	B	/	
	Calculated Frequency	2412	2412	2402	
	Maximum power (dBm)	13.43	13.23	4.45	
	Maximum rated power(mW)	22.029	21.038	2.786	
	Front	Separation distance (mm)	0	0	0
		exclusion threshold	10	10	10
Testing required?		YES	YES	NO	
Back	Separation distance (mm)	0	0	0	
	exclusion threshold	10	10	10	
	Testing required?	YES	YES	NO	
Right edge	Separation distance (mm)	16	35	16	
	exclusion threshold	29	48	29	
	Testing required?	NO	NO	NO	
Left edge	Separation distance (mm)	32	32	32	
	exclusion threshold	57	48	57	
	Testing required?	NO	NO	NO	
Top edge	Separation distance (mm)	0	0	0	
	exclusion threshold	10	10	10	
	Testing required?	YES	YES	NO	
Bottom edge	Separation distance (mm)	136	136	136	
	exclusion threshold	896	896	896	
	Testing required?	NO	NO	NO	



Exposure Position	Wireless Interface	5.2G WIFI		5.3G WIFI	
	Ant	A	B	A	B
Exposure Position	Calculated Frequency	5200	5200	5320	5320
	Maximum power (dBm)	12.13	11.59	12.62	11.91
	Maximum rated power(mW)	16.331	14.421	18.281	15.524
Front	Separation distance (mm)	0	0	0	0
	exclusion threshold	7	7	6	6
	Testing required?	YES	YES	YES	YES
Back	Separation distance (mm)	0	0	0	0
	exclusion threshold	7	7	6	6
	Testing required?	YES	YES	YES	YES
Right edge	Separation distance (mm)	35	16	35	16
	exclusion threshold	46	20	45	19
	Testing required?	NO	NO	NO	NO
Left edge	Separation distance (mm)	32	32	32	32
	exclusion threshold	39	39	39	39
	Testing required?	NO	NO	NO	NO
Top edge	Separation distance (mm)	0	0	0	0
	exclusion threshold	7	7	6	6
	Testing required?	YES	YES	YES	YES
Bottom edge	Separation distance (mm)	136	136	136	136
	exclusion threshold	866	866	865	865
	Testing required?	NO	NO	NO	NO



Exposure Position	Wireless Interface	5.6G WIFI		5.8G WIFI	
	Ant	A	B	A	B
Exposure Position	Calculated Frequency	5700	5670	5745	5745
	Maximum power (dBm)	13.55	13.22	13.13	12.53
	Maximum rated power(mW)	22.646	20.989	20.559	17.906
	Separation distance (mm)	0	0	0	0
Front	exclusion threshold	6	6	6	6
	Testing required?	YES	YES	YES	YES
	Separation distance (mm)	0	0	0	0
Back	exclusion threshold	6	6	6	6
	Testing required?	YES	YES	YES	YES
	Separation distance (mm)	35	16	35	16
Right edge	exclusion threshold	45	19	44	49
	Testing required?	NO	NO	NO	NO
	Separation distance (mm)	32	32	32	32
Left edge	exclusion threshold	39	39	37	37
	Testing required?	NO	NO	NO	NO
	Separation distance (mm)	0	0	0	0
Top edge	exclusion threshold	6	6	6	6
	Testing required?	YES	YES	YES	YES
	Separation distance (mm)	136	136	136	136
Bottom edge	exclusion threshold	865	865	862	862
	Testing required?	NO	NO	NO	NO

**Note:**


1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm, 25mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:
$$\left[\frac{\text{max.power of channel, including tune-up tolerance, Mw}}{\text{min. test separation distance, mm}} \right] \times \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 $f(\text{GHz})$ is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison
For <50mm distance, we just calculate mW of the exclusion threshold value(3.0) to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
 - a) [threshold at 50mm in step 1] + (test separation distance - 50mm) * (f (MHz)/150) mW, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step 1] + (test separation distance - 50mm) * 10 mW at > 1500MHz and $\leq 6\text{GHz}$
6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.

8. EUT Test Position

This EUT was tested in Front Face and Rear Face.


8.1 Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

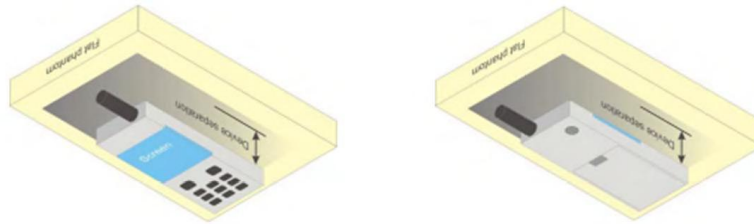

8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

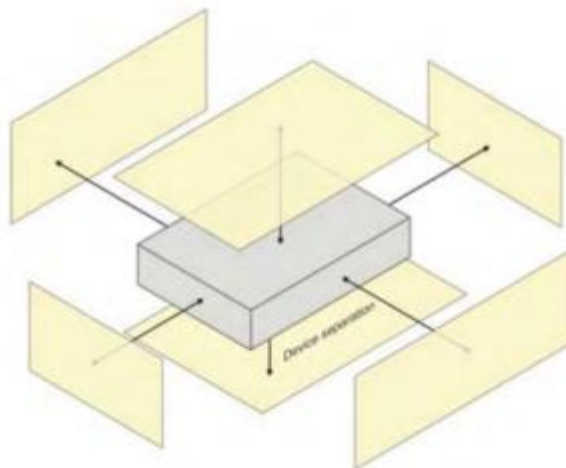



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	3	N	1	1	1	3	3	∞
SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)		K=2				19.58	19.18	



9.2 System validation Uncertainty

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source								
Deviation of experimental dipole from numerical dipole	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up								
Phantom uncertainty (shape and thickness uncertainty)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)		K=2				19.44	19.04	



10. Conducted Power Measurement

10.1 Test Result

WLAN

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11b	1	2412	13.43	13.23	N/A
	6	2437	13.33	12.96	N/A
	11	2462	12.67	12.54	N/A
802.11g	1	2412	12.51	12.36	N/A
	6	2437	12.56	12.19	N/A
	11	2462	12.02	11.94	N/A
802.11 n-HT20	1	2412	12.36	12.21	15.30
	6	2437	12.29	12.00	15.16
	11	2462	11.93	11.73	14.84
802.11 n-HT40	1	2412	12.41	12.30	15.37
	6	2437	12.72	12.21	15.48
	11	2462	12.01	11.69	14.86

WLAN (5.2Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11a	36	5180	11.96	11.57	/
	40	5200	12.13	11.59	/
	48	5240	11.91	11.55	/
802.11 n-HT20	36	5180	11.85	11.43	14.81
	40	5200	11.96	11.48	14.89
	48	5240	11.80	11.44	14.79
802.11 n-HT40	38	5190	11.82	11.51	14.99
	46	5230	12.03	11.49	15.09
802.11 ac-VHT20	36	5180	11.83	11.45	14.81
	40	5200	12.00	11.41	14.88
	48	5240	11.79	11.49	14.81
802.11 ac-VHT40	38	5190	11.84	11.39	14.99
	46	5230	12.00	11.32	15.04
802.11 ac-VHT80	42	5210	10.27	9.98	13.41

**WLAN (5.3Gband)**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11a	52	5260	12.18	11.73	/
	60	5300	12.14	11.80	/
	64	5320	12.62	11.91	/
802.11 n-HT20	52	5260	11.99	11.67	14.99
	60	5300	12.01	11.71	15.02
	64	5320	12.48	11.82	15.32
802.11 n-HT40	54	5270	12.16	11.57	15.21
	62	5310	11.87	11.76	15.15
802.11 ac-VHT20	52	5260	12.00	11.68	15.01
	60	5300	12.03	11.71	15.04
	64	5320	12.45	11.77	15.29
802.11 ac-VHT40	54	5270	12.11	11.76	15.27
	62	5310	11.86	11.83	15.17
802.11 ac-VHT80	58	5290	10.03	9.74	13.54

WLAN (5.6Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11a	100	5500	12.51	11.98	/
	116	5580	13.13	12.56	/
	140	5700	13.55	13.13	/
802.11 n-HT20	100	5500	12.25	11.76	15.16
	116	5580	12.99	12.40	15.85
	140	5700	13.40	13.00	16.35
802.11 n-HT40	102	5510	12.52	11.89	15.60
	110	5550	12.55	12.05	15.69
	134	5670	13.37	13.22	16.68
802.11 ac-VHT20	100	5500	12.26	11.71	15.17
	116	5580	12.93	12.42	15.86
	140	5700	13.40	12.96	16.36
802.11 ac-VHT40	102	5510	12.51	11.81	15.46
	110	5550	12.56	12.03	15.59
	134	5670	13.40	13.17	16.58
802.11 ac-VHT80	106	5530	10.23	9.84	13.68
	122	5610	10.93	10.53	14.37

**WLAN (5.8Gband)**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11a	149	5745	13.13	12.53	/
	157	5785	12.92	11.61	/
	165	5825	12.37	11.27	/
802.11 n-HT20	149	5745	12.97	12.42	15.871
	157	5785	12.82	11.39	15.331
	165	5825	12.18	11.26	14.912
802.11 n-HT40	151	5755	13.04	12.38	16.078
	159	5795	12.66	11.39	15.427
802.11 ac-VHT20	149	5745	12.98	12.42	15.886
	157	5785	12.83	11.38	15.342
	165	5825	12.13	11.03	14.792
802.11 ac-VHT40	151	5755	12.98	12.31	16.012
	159	5795	12.70	11.42	15.461
802.11 ac-VHT80	155	5775	10.27	9.98	13.762

**Bluetooth**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	4.45
	39	2441	4.17
	78	2480	4.13
$\pi/4$ -DQPSK(2Mbps)	0	2402	1.11
	39	2441	0.76
	78	2480	0.85
8DPSK(3Mbps)	0	2402	1.12
	39	2441	0.77
	78	2480	0.84


BLE

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	-0.69
	19	2440	-1.22
	39	2480	-2.29
GFSK(2Mbps)	0	2402	-3.87
	19	2440	-4.43
	39	2480	-5.47

11. EUT and Test Setup Photo

11.1 EUT Photo


Front side

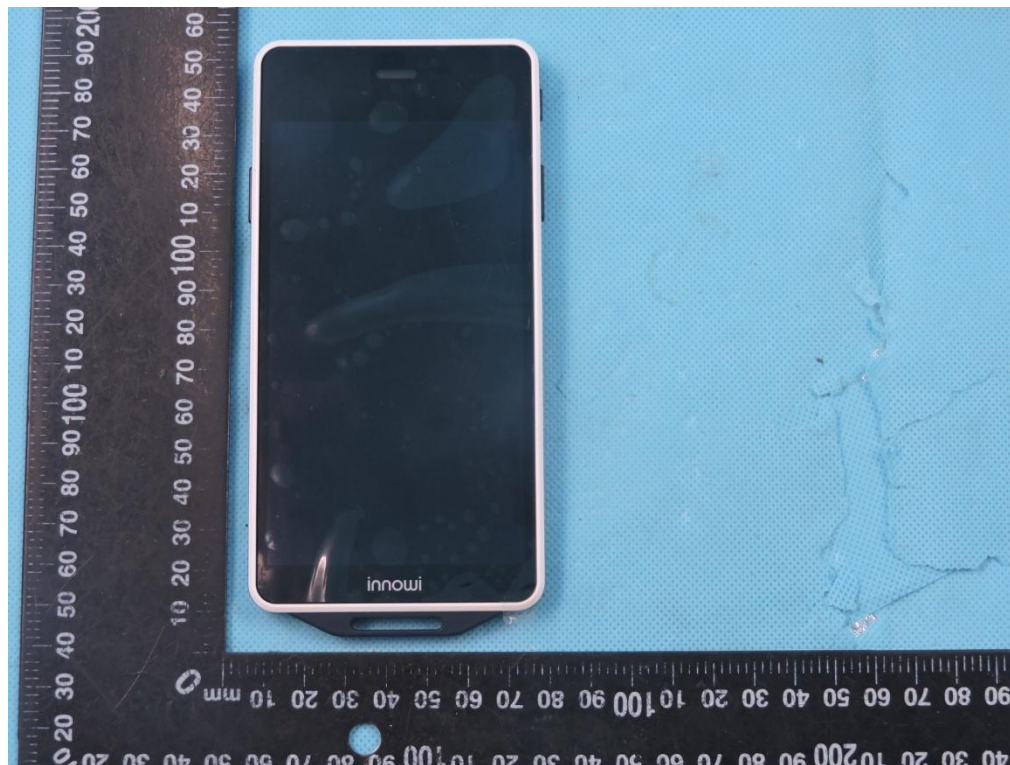

Back side



Top side

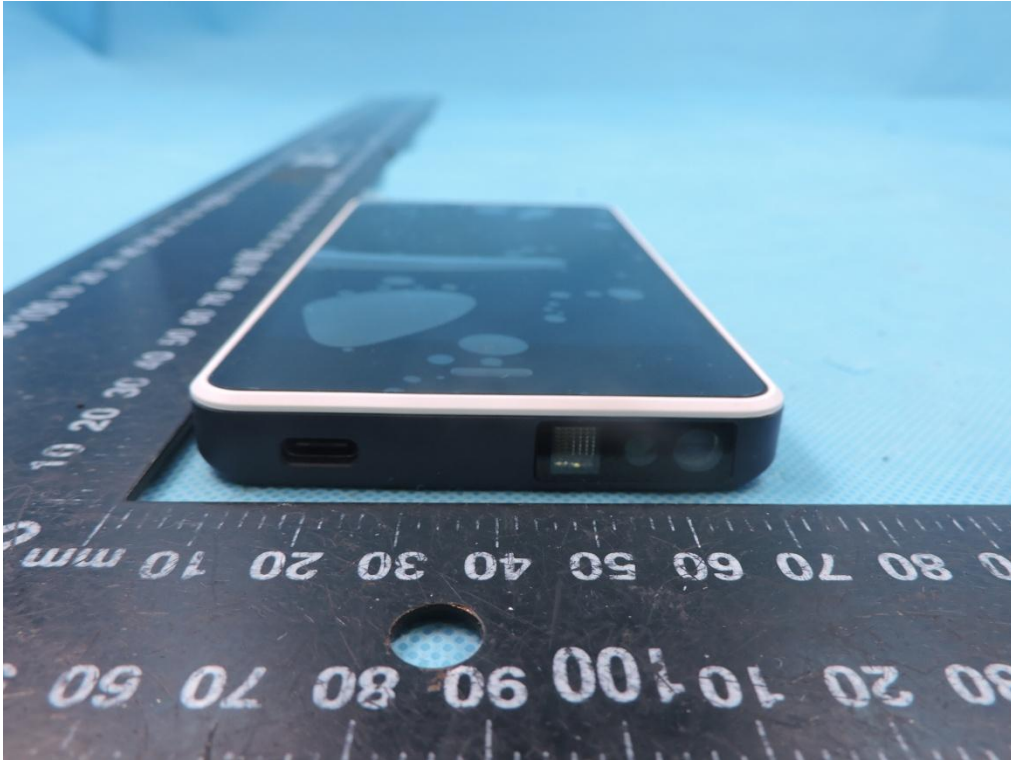


Bottom side



Left side



Right side

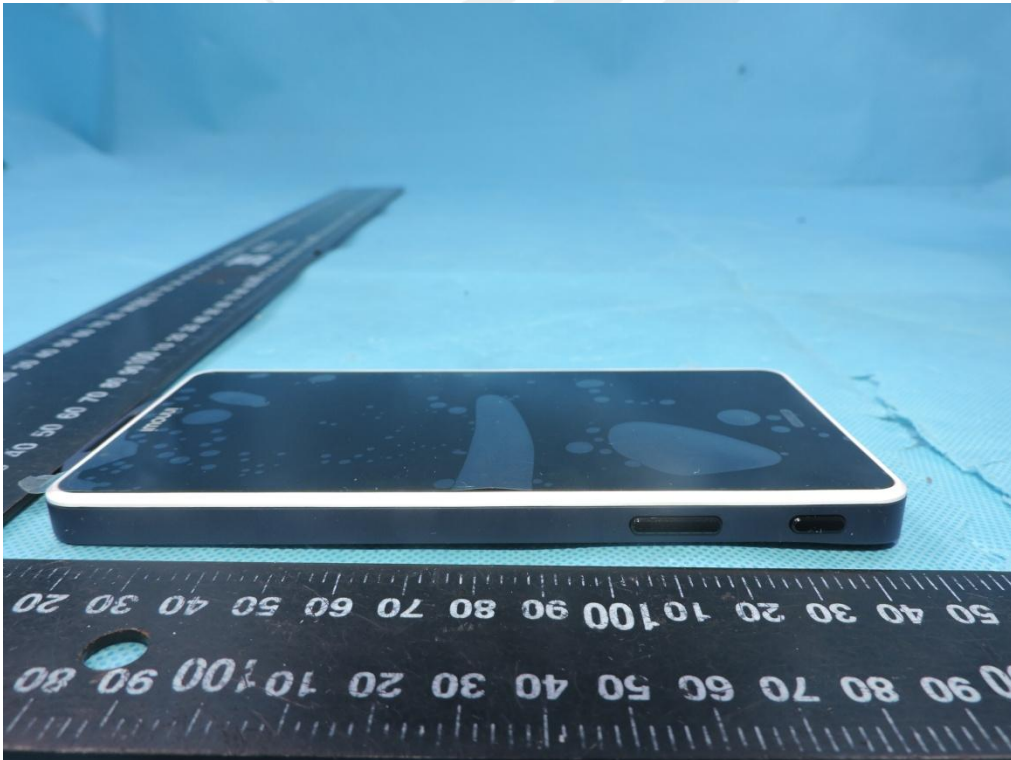

11.2 Setup Photo

Body Front side(separation distance is 0mm)




Body Back side(separation distance is 0mm)



Body top side(separation distance is 0mm)



Liquid depth (15 cm)

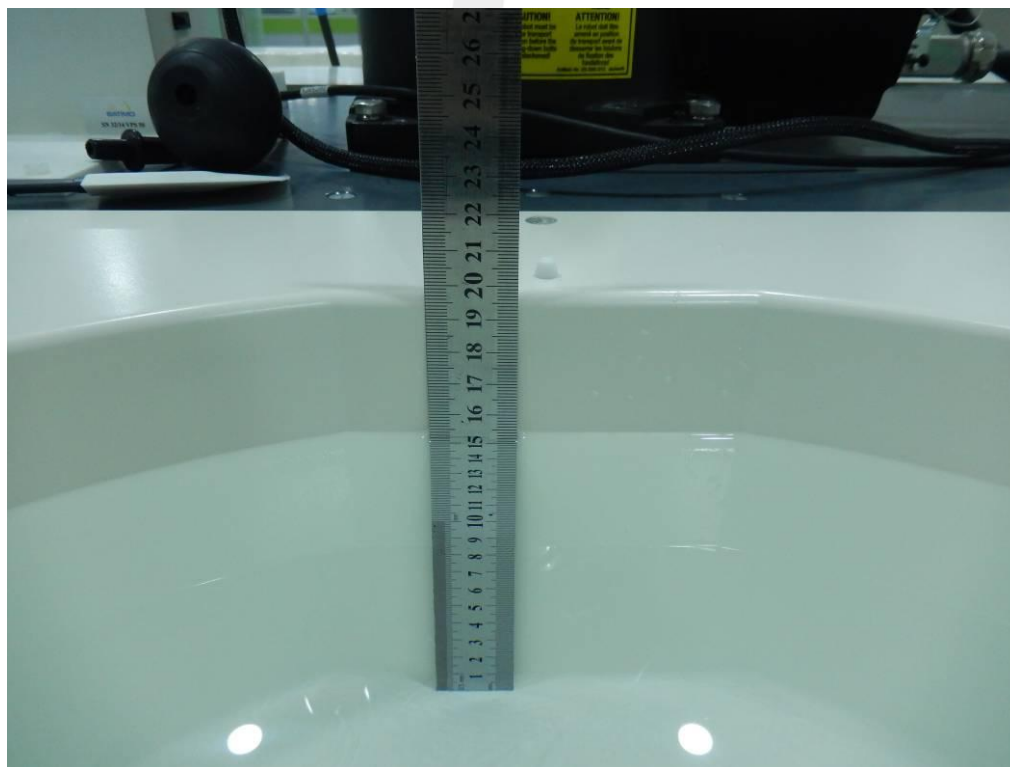



12. SAR Result Summary

12.1 Body-worn and Hotspot SAR

Ant A :

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11b	Front side	1	0.084	-0.71	14	13.43	100	0.096	
		Back side	1	0.110	2.30	14	13.43	100	0.125	1
		Top side	1	0.035	1.17	14	13.43	100	0.040	
5.2G WLAN	802.11a	Front side	40	0.341	-2.86	12.5	12.13	100	0.371	
		Back side	40	0.516	-2.20	12.5	12.13	100	0.562	2
		Top side	40	0.152	2.30	12.5	12.13	100	0.166	
5.3G WLAN	802.11a	Front side	64	0.392	3.80	13	12.62	100	0.428	
		Back side	64	0.627	-3.41	13	12.62	100	0.684	3
		Top side	64	0.201	0.39	13	12.62	100	0.219	
5.6G WLAN	802.11a	Front side	140	0.264	3.41	14	13.55	100	0.293	
		Back side	140	0.664	-0.10	14	13.55	100	0.736	4
		Top side	140	0.115	-1.65	14	13.55	100	0.128	
5.8G WLAN	802.11a	Front side	149	0.274	-0.74	13.5	13.13	100	0.298	
		Back side	149	0.627	1.47	13.5	13.13	100	0.683	5
		Top side	149	0.132	-1.91	13.5	13.13	100	0.144	



Ant B :

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11b	Front side	1	0.025	3.87	14	13.23	100	0.030	/
		Back side	1	0.079	-3.31	14	13.23	100	0.090	6
		Top side	1	0.018	-1.02	14	13.23	100	0.021	/
5.2G WLAN	802.11a	Front side	40	0.235	-3.06	12	11.59	100	0.258	/
		Back side	40	0.428	-2.72	12	11.59	100	0.455	7
		Top side	40	0.065	2.85	12	11.59	100	0.071	/
5.3G WLAN	802.11a	Front side	64	0.208	-2.41	12	11.91	100	0.212	/
		Back side	64	0.362	0.86	12	11.91	100	0.395	8
		Top side	64	0.124	2.13	12	11.91	100	0.127	/
5.6G WLAN	802.11n40	Front side	134	0.143	-0.98	13.5	13.13	100	0.156	/
		Back side	134	0.207	-3.62	13.5	13.13	100	0.230	9
		Top side	134	0.076	-2.50	13.5	13.13	100	0.083	/
5.8G WLAN	802.11a	Front side	149	0.084	-2.37	13	12.53	100	0.094	/
		Back side	149	0.140	-3.82	13	12.53	100	0.152	10
		Top side	149	0.062	-1.37	13	12.53	100	0.069	/

**MIMO :**

Band	Mode	Test Position	Ch.	Result 10g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11n	Front side	6	0.126	2.20	16	15.48	100	0.142	/
		Back side	6	0.176	2.20	16	15.48	100	0.201	11
		Top side	6	0.095	3.57	16	15.48	100	0.107	/
5.2G WLAN	802.11n	Front side	46	0.562	2.54	15.5	15.09	100	0.618	/
		Back side	46	0.935	1.42	15.5	15.09	100	1.018	12
		Top side	46	0.332	-2.85	15.5	15.09	100	0.365	/
5.3G WLAN	802.11n	Front side	64	0.518	-1.96	15.5	15.32	100	0.540	/
		Back side	64	0.992	1.89	15.5	15.32	100	1.083	13
		Top side	64	0.326	3.37	15.5	15.32	100	0.340	/
5.6G WLAN	802.11n	Front side	134	0.658	2.10	17	16.68	100	0.708	/
		Back side	134	1.119	-1.19	17	16.68	100	1.241	14
		Top side	134	0.426	-0.17	17	16.68	100	0.459	/
5.8G WLAN	802.11n	Front side	151	0.358	1.61	16.5	16.078	100	0.395	/
		Back side	151	0.667	-0.08	16.5	16.078	100	0.726	15
		Top side	151	0.152	-1.83	16.5	16.078	100	0.168	/

General Note:

1. For IEEE802.11a/b/g SAR testing, highest average RF output power channel for the lowest data rate for 802.11a/b were selected for SAR evaluation. 802.11g were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11a/b mode.
2. For IEEE802.11n, SAR testing can be conducted on channel with the highest output power when taking into consideration tune-up tolerance for same test configuration that was identified during SAR evaluations for IEEE802.11a/b/g (as applicable) provided bandwidth and test position are the same.
3. For IEEE802.11n with multiple channel BW configurations, highest channel BW configuration with highest output power limit shall be tested.
4. Testing of lower BW configurations is not required when the maximum average output of the default test channels in each lower BW configuration is less than 1/4dB higher than the default test channel in the highest BW configuration.



12.2 Limbs and Hotspot SAR

Ant A :

Band	Mode	Test Position	Ch.	Result 10g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11b	Front side	1	0.038	0.35	14	13.43	100	0.043	/
		Back side	1	0.040	-2.15	14	13.43	100	0.046	1
		Top side	1	0.024	2.40	14	13.43	100	0.027	/
5.2G WLAN	802.11a	Front side	40	0.115	3.92	12.5	12.13	100	0.125	/
		Back side	40	0.167	-1.93	12.5	12.13	100	0.182	2
		Top side	40	0.082	3.72	12.5	12.13	100	0.089	/
5.3G WLAN	802.11a	Front side	64	0.137	2.88	13	12.62	100	0.150	/
		Back side	64	0.182	-3.81	13	12.62	100	0.199	3
		Top side	64	0.094	3.62	13	12.62	100	0.103	/
5.6G WLAN	802.11a	Front side	140	0.128	-0.98	14	13.55	100	0.142	/
		Back side	140	0.197	1.06	14	13.55	100	0.219	4
		Top side	140	0.113	-0.06	14	13.55	100	0.125	/
5.8G WLAN	802.11a	Front side	149	0.162	2.86	13.5	13.13	100	0.176	/
		Back side	149	0.192	3.74	13.5	13.13	100	0.209	5
		Top side	149	0.114	-0.71	13.5	13.13	100	0.124	/



Ant B :

Band	Mode	Test Position	Ch.	Result 10g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11b	Front side	1	0.024	3.66	14	13.23	100	0.029	/
		Back side	1	0.033	-0.47	14	13.23	100	0.039	6
		Top side	1	0.016	2.14	14	13.23	100	0.019	/
5.2G WLAN	802.11a	Front side	40	0.268	3.03	12	11.59	100	0.295	/
		Back side	40	0.428	1.29	12	11.59	100	0.470	7
		Top side	40	0.154	1.75	12	11.59	100	0.169	/
5.3G WLAN	802.11a	Front side	64	0.085	-2.03	12	11.91	100	0.087	/
		Back side	64	0.106	0.47	12	11.91	100	0.108	8
		Top side	64	0.062	0.71	12	11.91	100	0.063	/
5.6G WLAN	802.11n40	Front side	134	0.035	0.11	13.5	13.13	100	0.038	/
		Back side	134	0.046	-3.42	13.5	13.13	100	0.050	9
		Top side	134	0.022	-2.56	13.5	13.13	100	0.024	/
5.8G WLAN	802.11a	Front side	149	0.024	1.49	13	12.53	100	0.027	/
		Back side	149	0.029	-3.40	13	12.53	100	0.032	10
		Top side	149	0.012	-0.87	13	12.53	100	0.013	/

**MIMO :**

Band	Mode	Test Position	Ch.	Result 10g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11n	Front side	6	0.052	3.60	16	15.48	100	0.059	/
		Back side	6	0.078	2.16	16	15.48	100	0.088	11
		Top side	6	0.035	-2.10	16	15.48	100	0.039	/
5.2G WLAN	802.11n	Front side	46	0.241	-1.12	15.5	15.09	100	0.265	/
		Back side	46	0.292	0.42	15.5	15.09	100	0.321	12
		Top side	46	0.154	1.30	15.5	15.09	100	0.169	/
5.3G WLAN	802.11n	Front side	64	0.206	-1.48	15.5	15.32	100	0.215	/
		Back side	64	0.291	3.70	15.5	15.32	100	0.303	13
		Top side	64	0.138	-0.31	15.5	15.32	100	0.144	/
5.6G WLAN	802.11n	Front side	134	0.235	-3.31	17	16.68	100	0.253	/
		Back side	134	0.300	-2.41	17	16.68	100	0.323	14
		Top side	134	0.164	2.29	17	16.68	100	0.177	/
5.8G WLAN	802.11n	Front side	151	0.128	3.84	16.5	16.078	100	0.141	/
		Back side	151	0.191	0.85	16.5	16.078	100	0.210	15
		Top side	151	0.096	3.80	16.5	16.078	100	0.106	/

Note:

- The test separation of all above table is 0mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was 0.133 W/Kg for Body)
- When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
- Bluetooth and WLAN can't simultaneous transmission at the same time.



Repeated SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
5.2GWLAN	802.11n40	Back Side	46	0.924	-1.65	15.5	15.09	1.014	/
5.3GWLAN	802.11ac20	Back Side	64	0.974	1.93	15.5	15.32	1.015	/
5.6GWLAN	802.11n40	Back Side	134	1.088	0.68	17	16.68	1.171	

12.3 repeated SAR measurement

Band	BW (MHz)	Test Position	Ch.	Original Measured SAR 1g(mW/g)	1st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
5.2GWLAN	802.11n40	Back Side	46	0.935	0.924	1.01	-	-	-
5.3GWLAN	802.11ac20	Back Side	64	0.992	0.974	1.02	-	-	-
5.6GWLAN	802.11n40	Back Side	134	1.119	1.088	1.03	-	-	-

Note:

1. Per KDB 865664 D01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/Kg$.
2. Per KDB 865664 D01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/Kg$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45W/Kg$
4. The ratio is the difference in percentage between original and repeated measured SAR.

Estimated SAR		Maximum Power		Antenna to user(mm)	Frequency(GHz)	Stand Alone SAR(1g) [W/kg]
		dBm	mW			
Bluetooth	Body	4.45	2.786	5	2.480	0.115



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
2450MHzDipole	MVG	SID2450	SN 30/14 DIP2G450-335	2020.07.14	2023.07.13
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2020.07.14	2023.07.13
E-Field Probe	MVG	SSE2	SN 41/18 EPGO334	2020.06.03	2021.06.02
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2019.11.25	2020.11.24
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2019.10.11	2020.10.10
Multi Meter	Keithley	Multi Meter 2000	4050073	2019.10.11	2020.10.10
Signal Generator	Agilent	N5182A	MY50140530	2019.10.09	2020.10.08
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2019.10.09	2020.10.08
Wireless Communication Test Set	R&S	CMW500	117239	2019.10.09	2020.10.08
Power Amplifier	DESAY	ZHL-42W	9638	2019.10.09	2020.10.08
Power Meter	R&S	NRP	100510	2019.10.16	2020.10.15
Power Meter	Agilent	E4419B	QB43312265	2019.10.12	2020.10.11
Power Sensor	R&S	NRP-Z11	101919	2019.10.12	2020.10.11
Power Sensor	HP	E9300A	US39210170	2019.10.09	2020.10.08
Temperature hygrometer	SuWei	SW-108	N/A	2019.10.13	2020.10.12
Thermograph	Elitech	RC-4	S/N EF7176501537	2019.10.11	2020.10.10

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On an annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value
Return-loss in within 20% of calibrated measurement

Appendix A. System Validation Plots

System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2020-08-27

Experimental conditions.




Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	52.65
Conductivity (S/m)	1.88
Power drift (%)	-2.29
Probe	SN 41/18 EPGO334
ConvF	2.02
Crest factor:	1:1

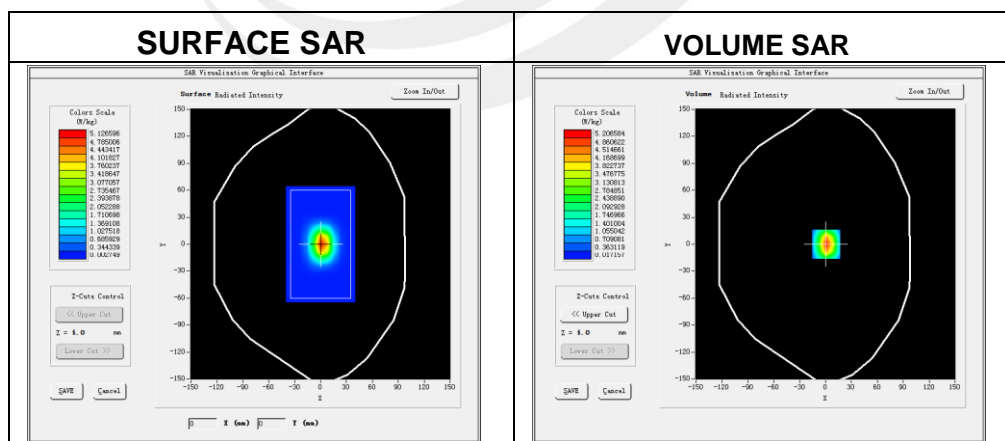

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.497058
SAR 1g (W/Kg)	5.344925

Z Axis Scan

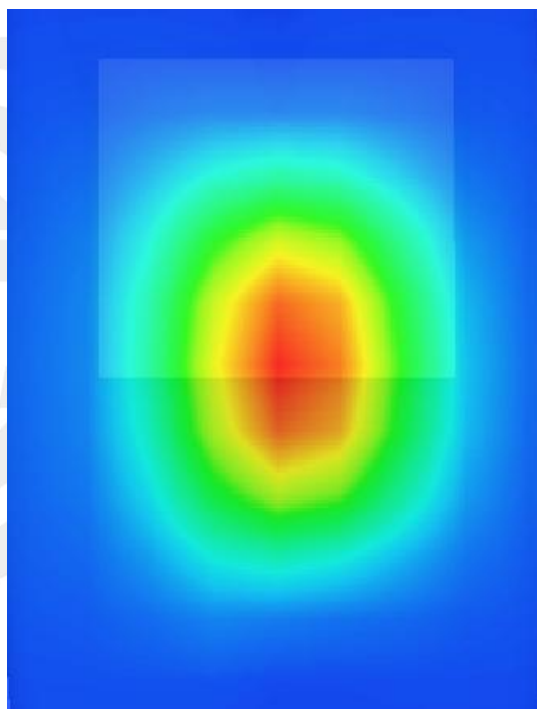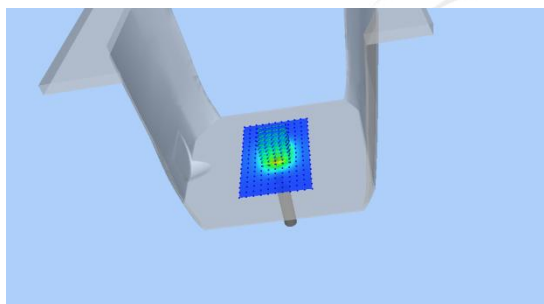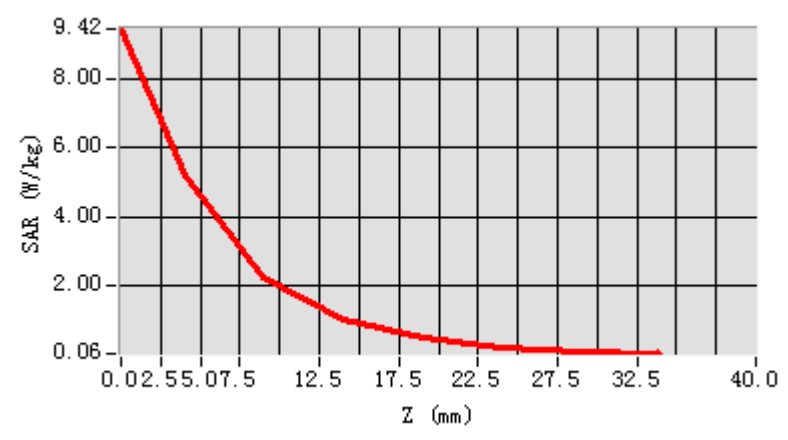

System Performance Check Data(5200MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-08-28

Experimental conditions.


Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	48.69
Conductivity (S/m)	5.42
Power drift (%)	-3.16
Probe	SN 41/18 EPGO334
ConvF	1.92
Crest factor:	1:1

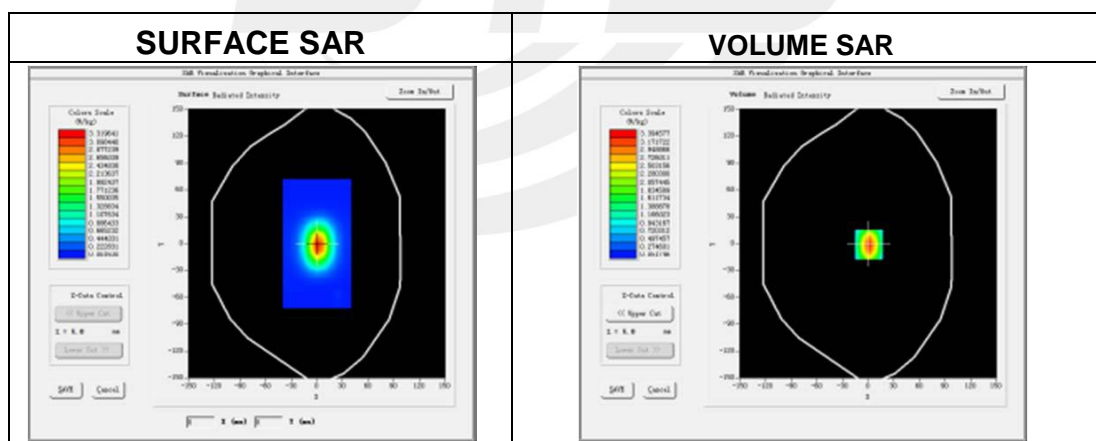

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.724125
SAR 1g (W/Kg)	15.870438

Z Axis Scan

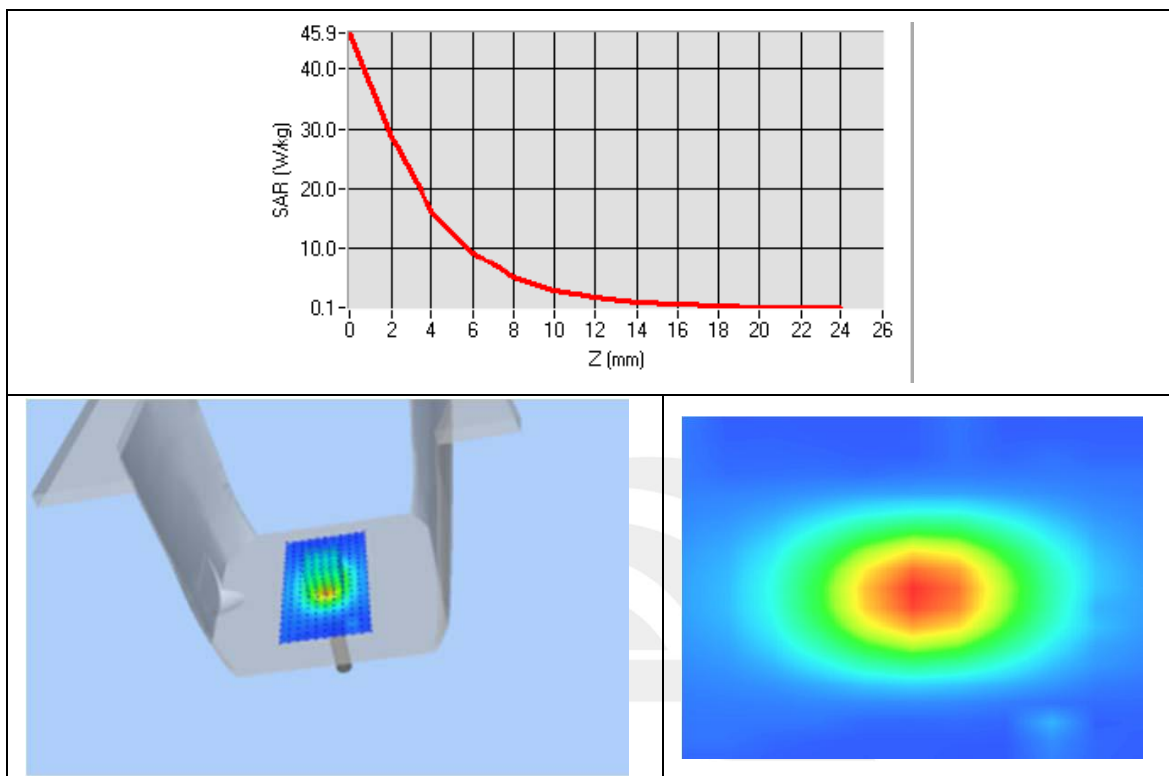

System Performance Check Data(5300MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-08-28

Experimental conditions.


Device Position	Validation plane
Band	5300 MHz
Channels	-
Signal	CW
Frequency (MHz)	5400
Relative permittivity	48.85
Conductivity (S/m)	5.62
Power drift (%)	-1.90
Probe	SN 41/18 EPGO334
ConvF	2.12
Crest factor:	1:1

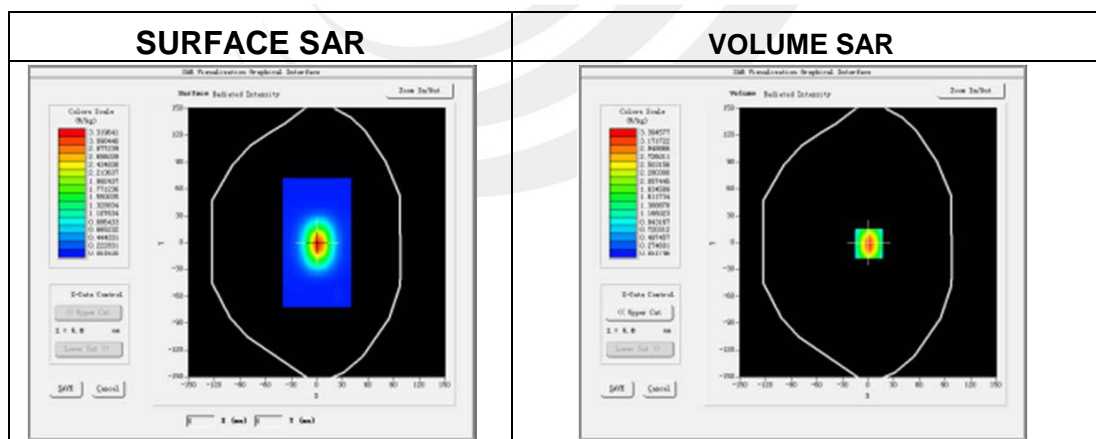

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.830216
SAR 1g (W/Kg)	16.894975

Z Axis Scan

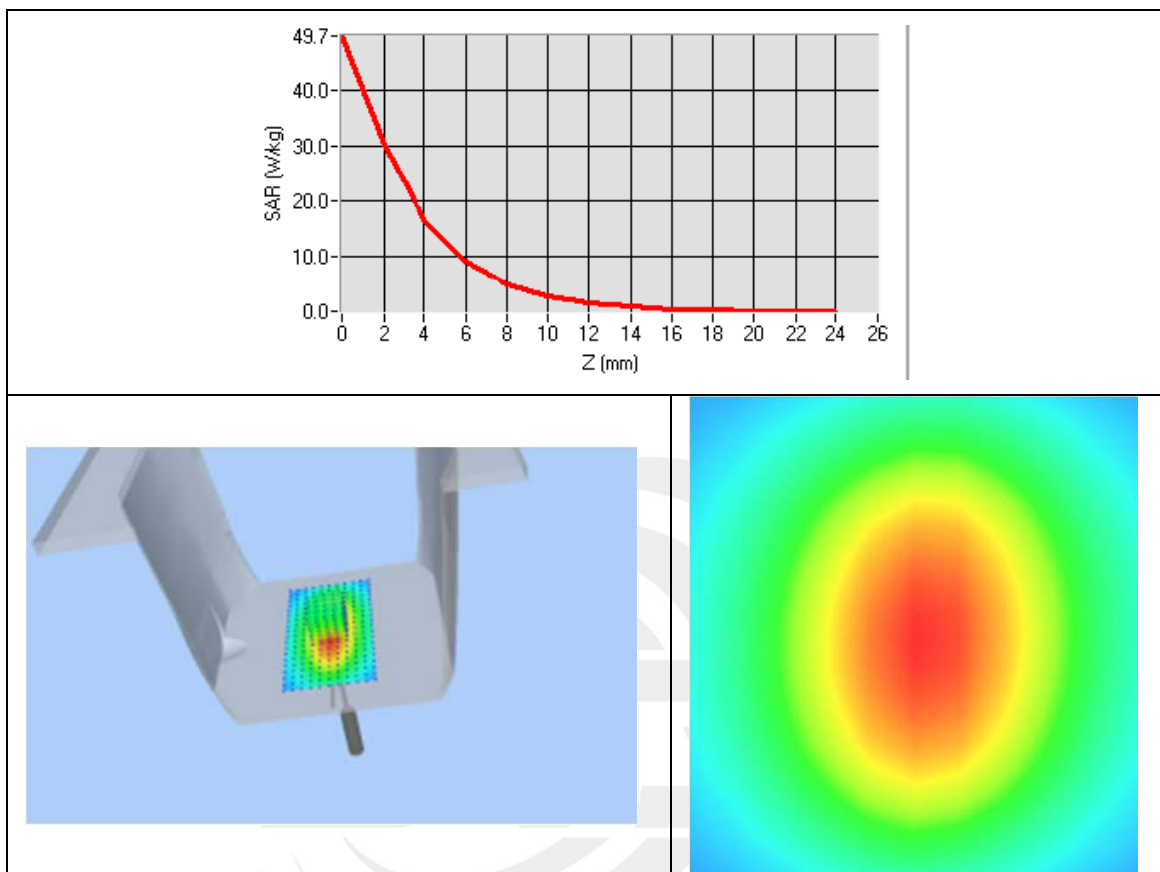

System Performance Check Data(5600MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-08-28

Experimental conditions.


Device Position	Validation plane
Band	5600 MHz
Channels	-
Signal	CW
Frequency (MHz)	5600
Relative permittivity	48.62
Conductivity (S/m)	5.48
Power drift (%)	1.86
Probe	SN 41/18 EPGO334
ConvF	2.21
Crest factor:	1:1

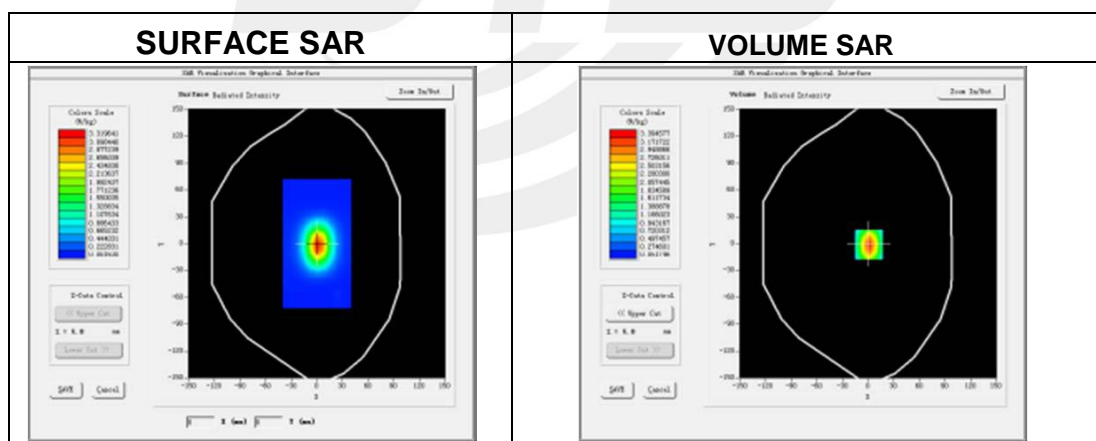

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	6.251475
SAR 1g (W/Kg)	18.369121

Z Axis Scan

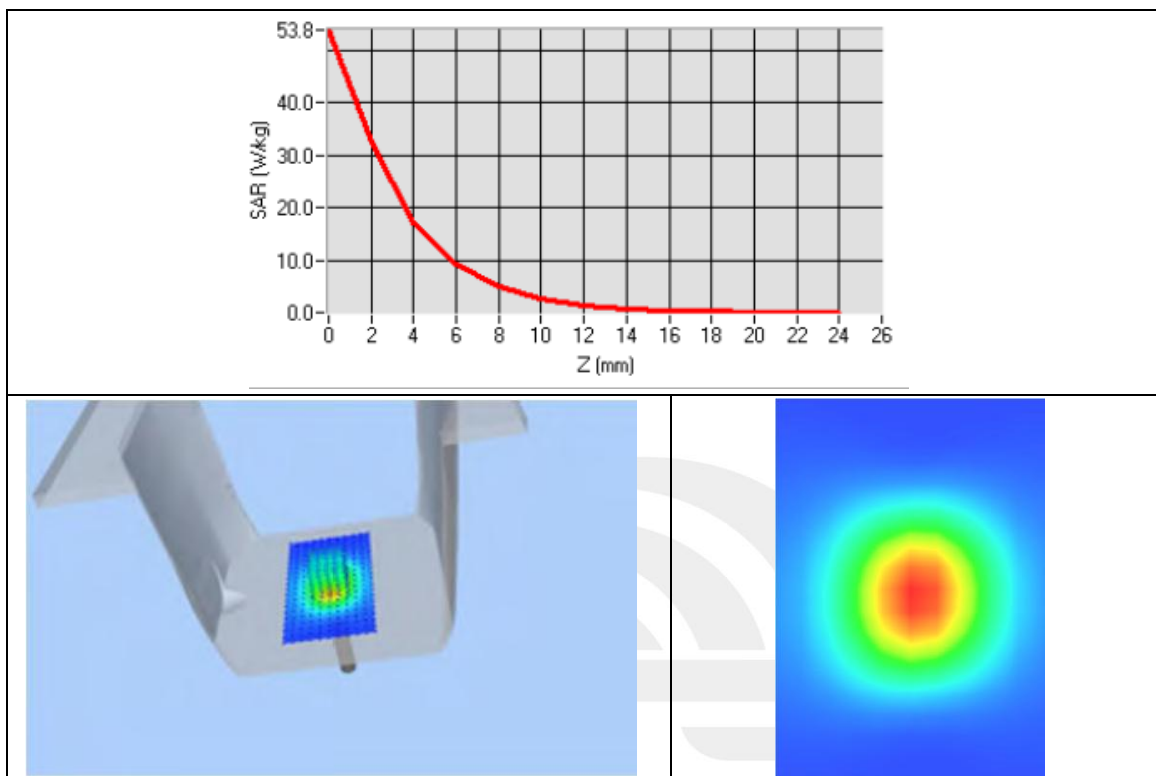

System Performance Check Data(5800MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2020-08-28

Experimental conditions.


Device Position	Validation plane
Band	5800 MHz
Channels	-
Signal	CW
Frequency (MHz)	5800
Relative permittivity	48.51
Conductivity (S/m)	5.89
Power drift (%)	-1.00
Probe	SN 41/18 EPGO334
ConvF	2.06
Crest factor:	1:1

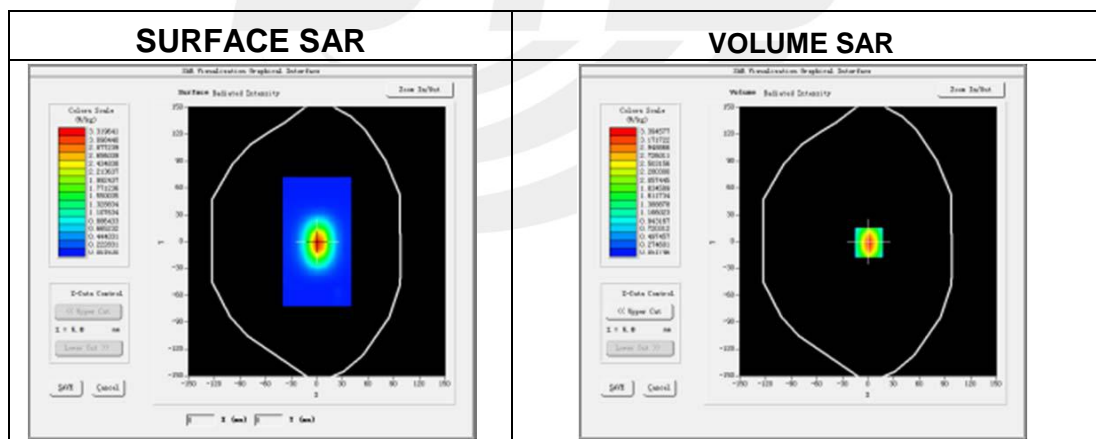

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	6.032685
SAR 1g (W/Kg)	18.541394

Z Axis Scan

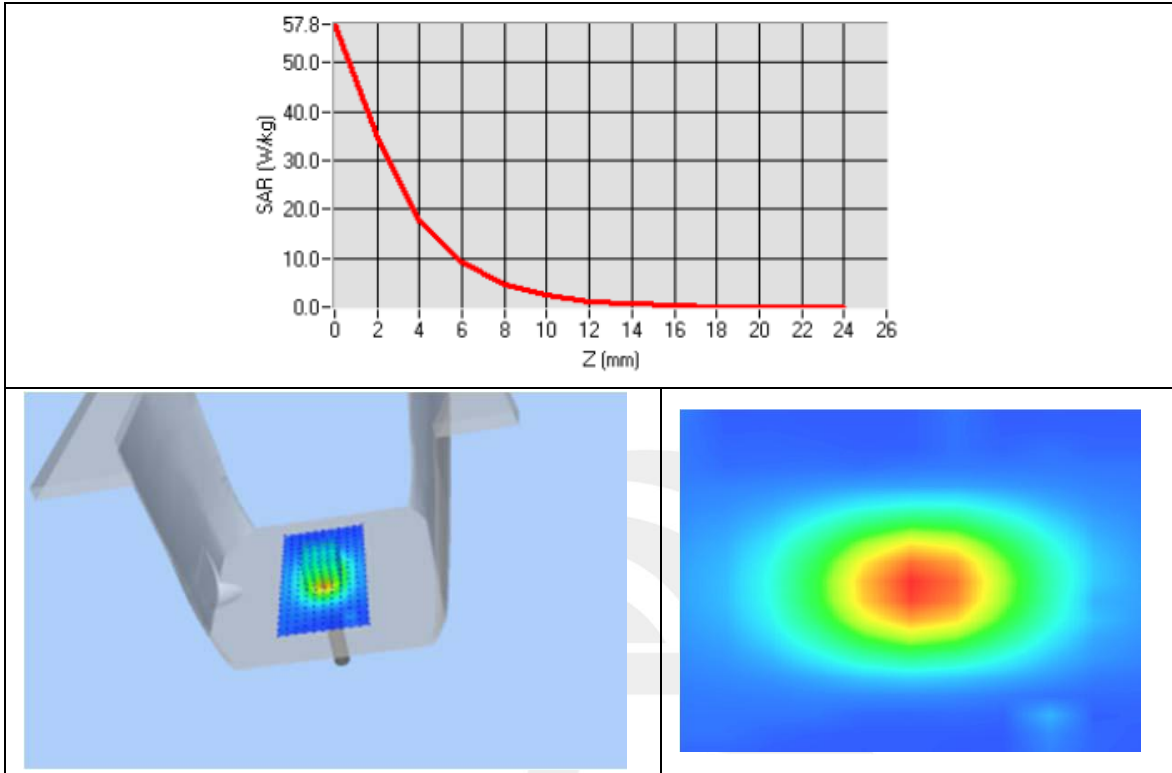


Appendix B. SAR Test Plots

Plot 1: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-27
Probe	SN 41/18 EPGO334
ConvF	2.02
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Channels	Middle
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	52.65
Conductivity (S/m)	1.88

Maximum location: X=-8.00, Y=-15.00
SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.039983
SAR 1g (W/Kg)	0.110341

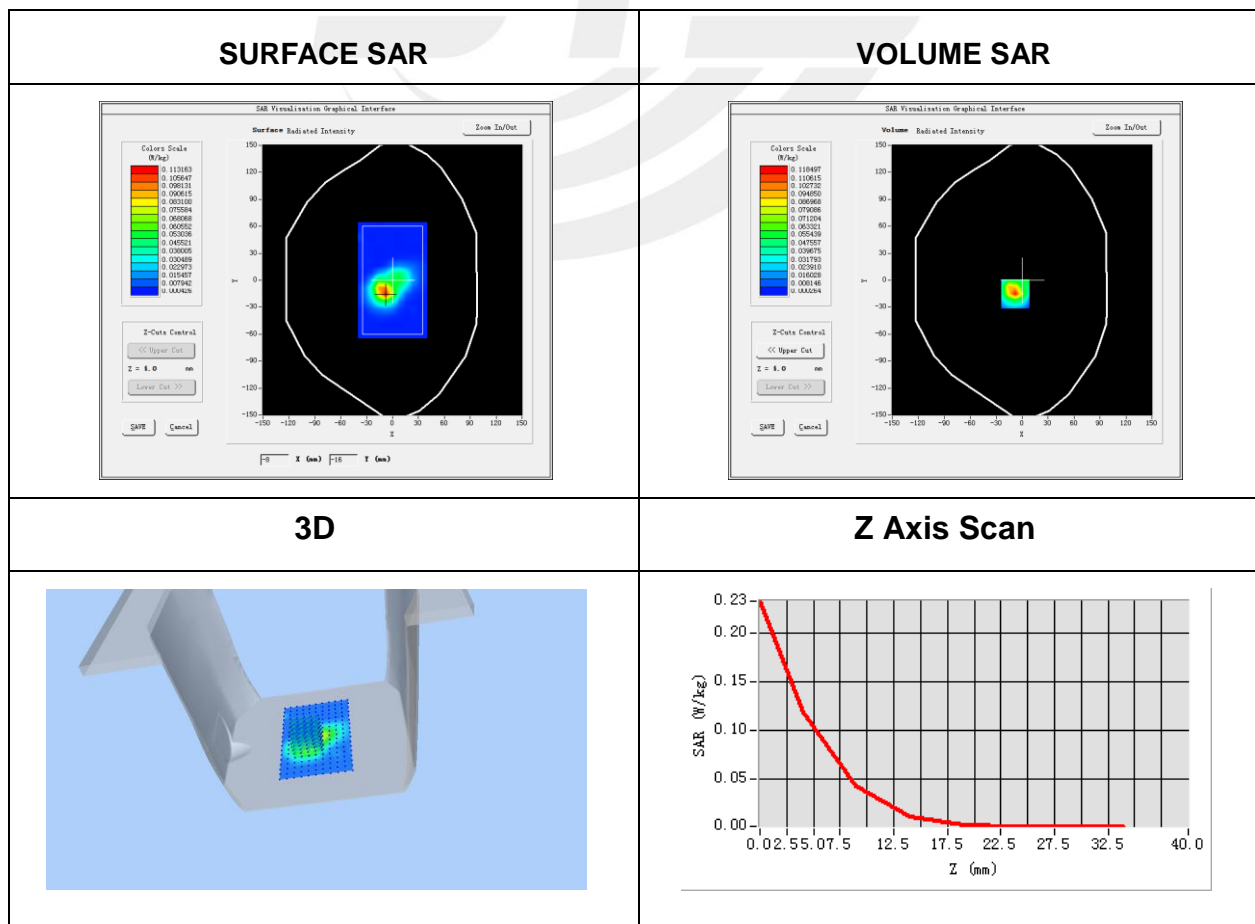


Plot 2: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	1.92
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	40
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	48.69
Conductivity (S/m)	5.42

Maximum location: X=-6.00, Y=1.00
SAR Peak: 1.78 W/kg

SAR 10g (W/Kg)	0.167456
SAR 1g (W/Kg)	0.516396

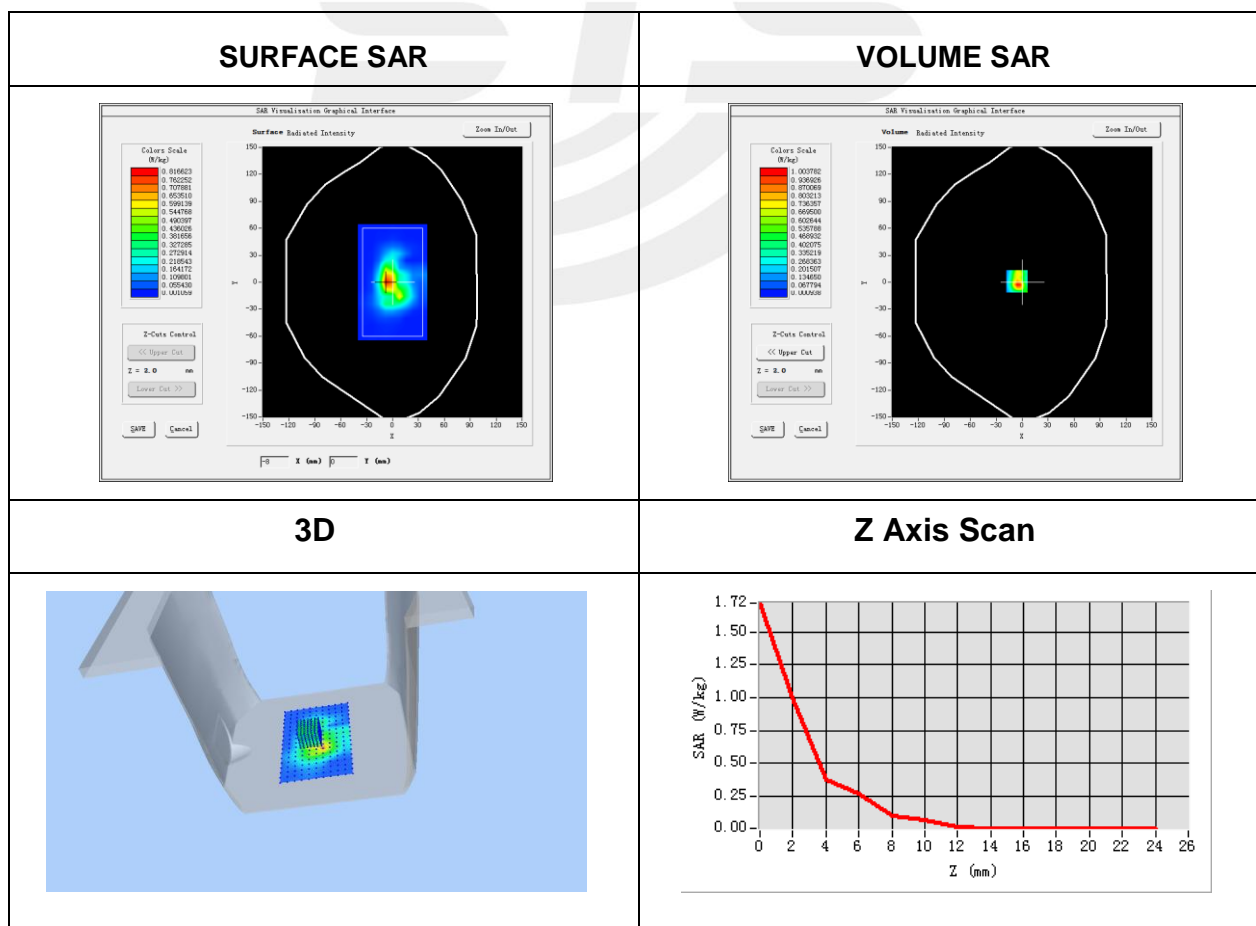


Plot 3: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.12
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	64
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5320
Relative permittivity (real part)	48.85
Conductivity (S/m)	5.62

Maximum location: X=8.00, Y=-15.00
SAR Peak: 2.56 W/kg

SAR 10g (W/Kg)	0.182324
SAR 1g (W/Kg)	0.627139

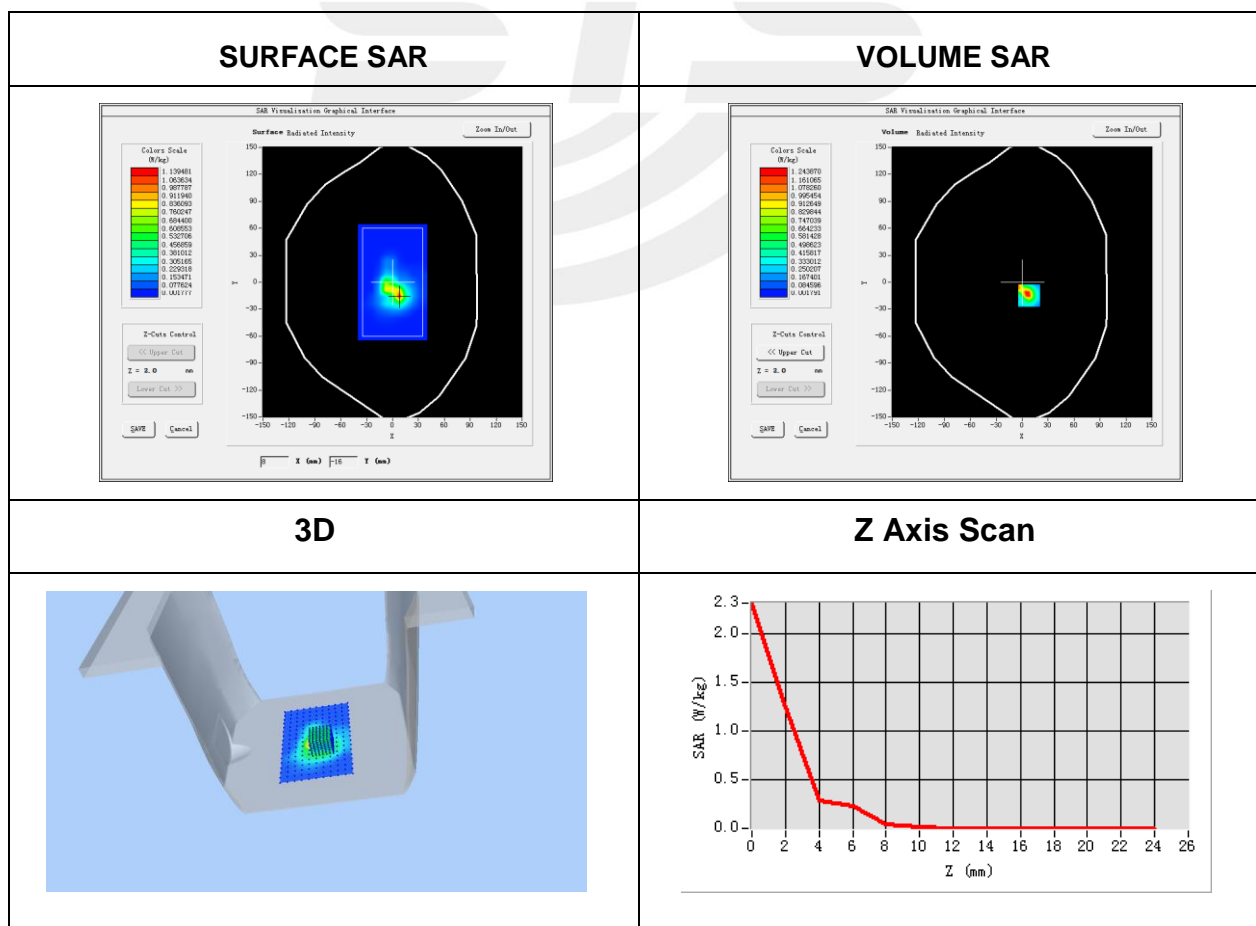


Plot 4: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.21
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	140
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5700
Relative permittivity (real part)	48.62
Conductivity (S/m)	5.48

Maximum location: X=8.00, Y=-15.00
SAR Peak: 2.64 W/kg

SAR 10g (W/Kg)	0.196948
SAR 1g (W/Kg)	0.663843

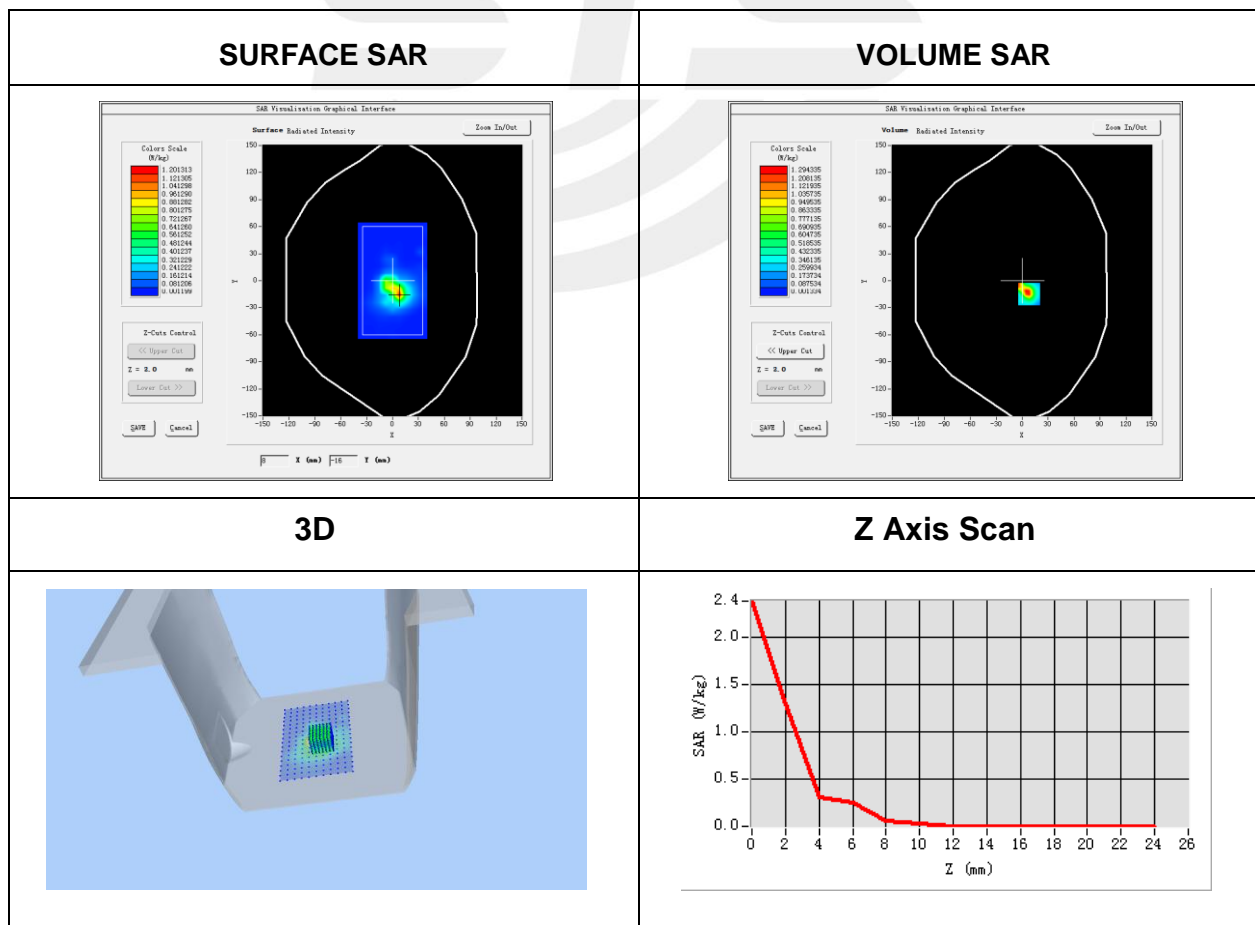


Plot 5: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.06
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	149
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	48.51
Conductivity (S/m)	5.89

Maximum location: X=-6.00, Y=0.00
SAR Peak: 2.18 W/kg

SAR 10g (W/Kg)	0.191871
SAR 1g (W/Kg)	0.626590

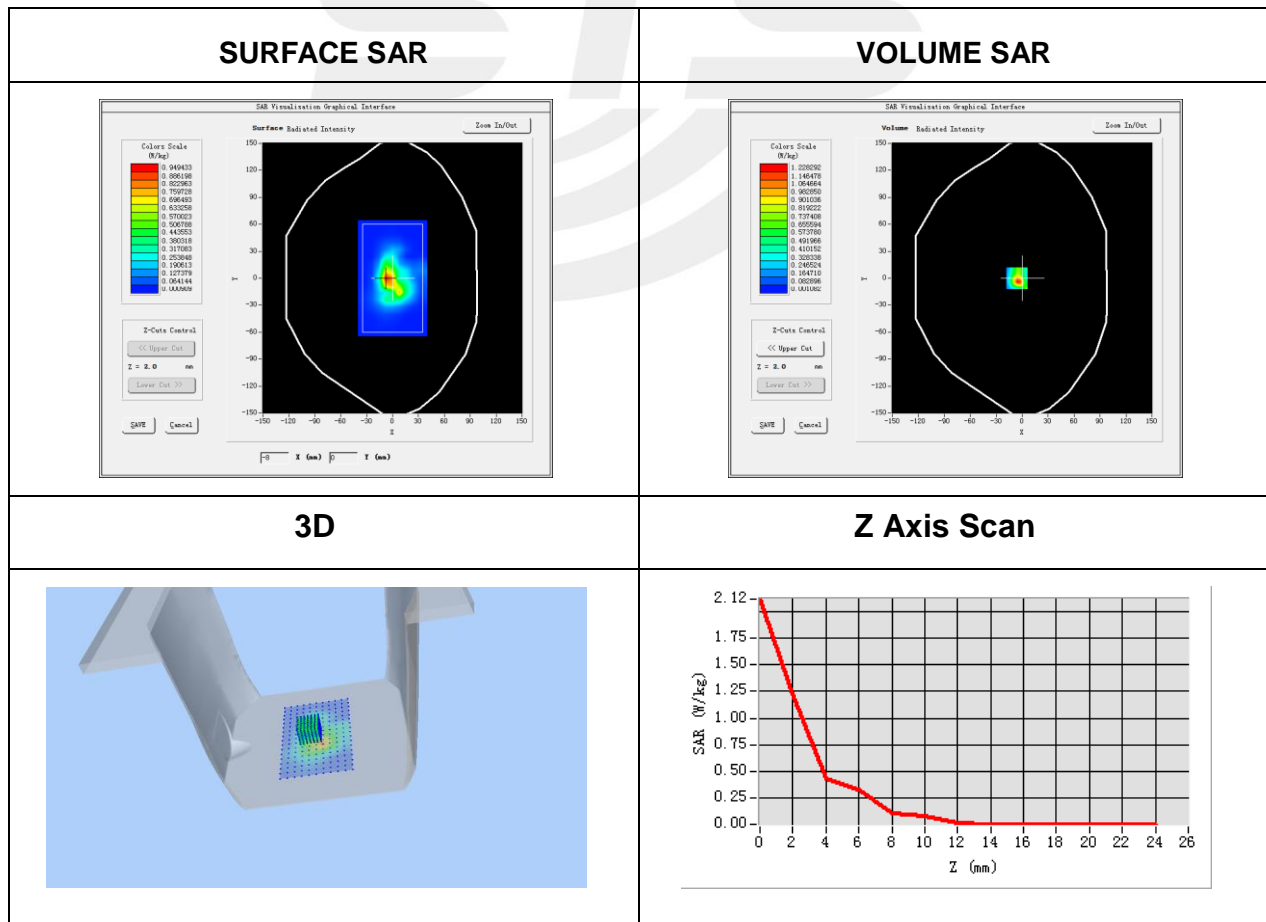


Plot 6: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-27
Probe	SN 41/18 EPGO334
ConvF	2.02
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Channels	Middle
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	52.65
Conductivity (S/m)	1.88

Maximum location: X=0.00, Y=6.00
SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.033075
SAR 1g (W/Kg)	0.078615

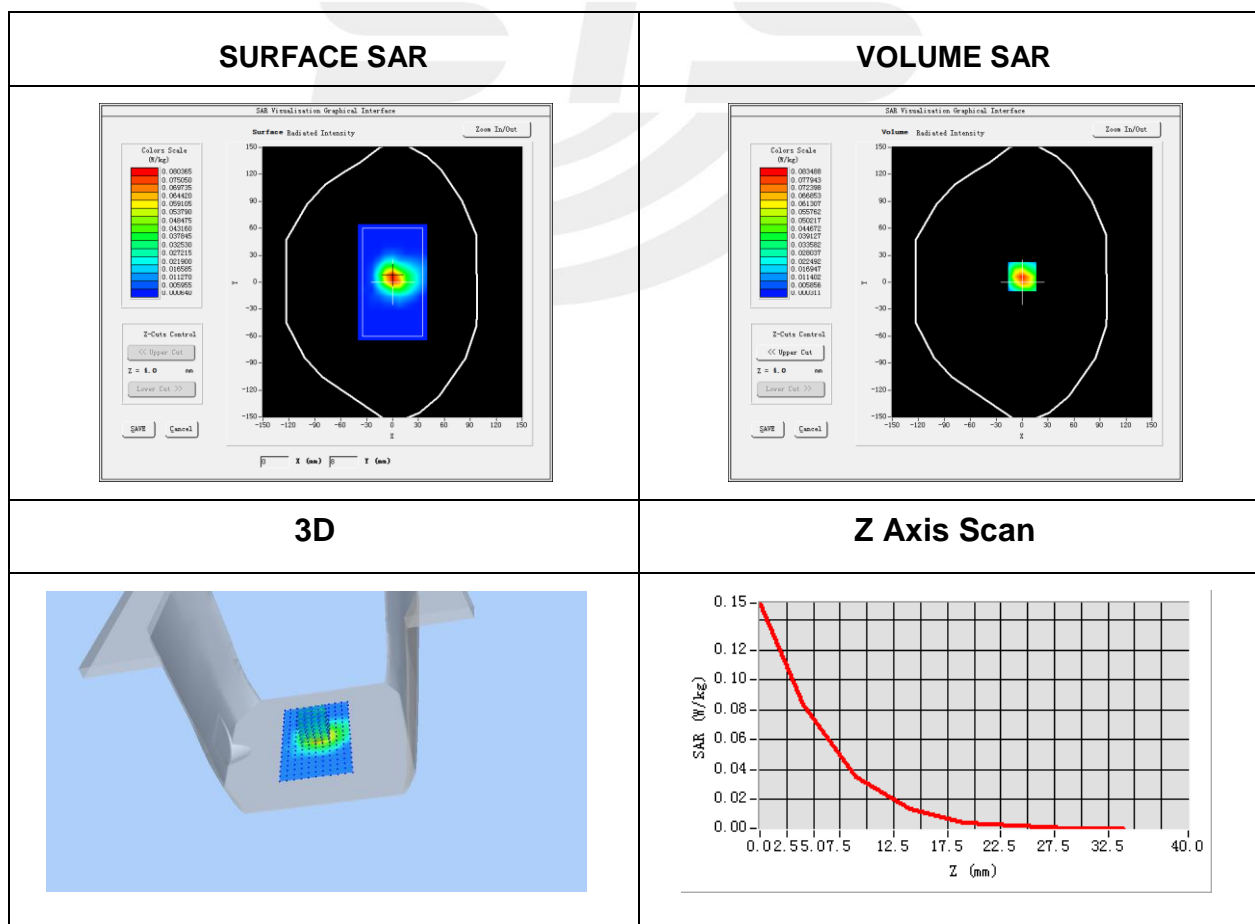


Plot 7: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	1.92
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	40
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	48.69
Conductivity (S/m)	5.42

Maximum location: X=-6.00, Y=9.00
 SAR Peak: 1.47 W/kg

SAR 10g (W/Kg)	0.120132
SAR 1g (W/Kg)	0.428065

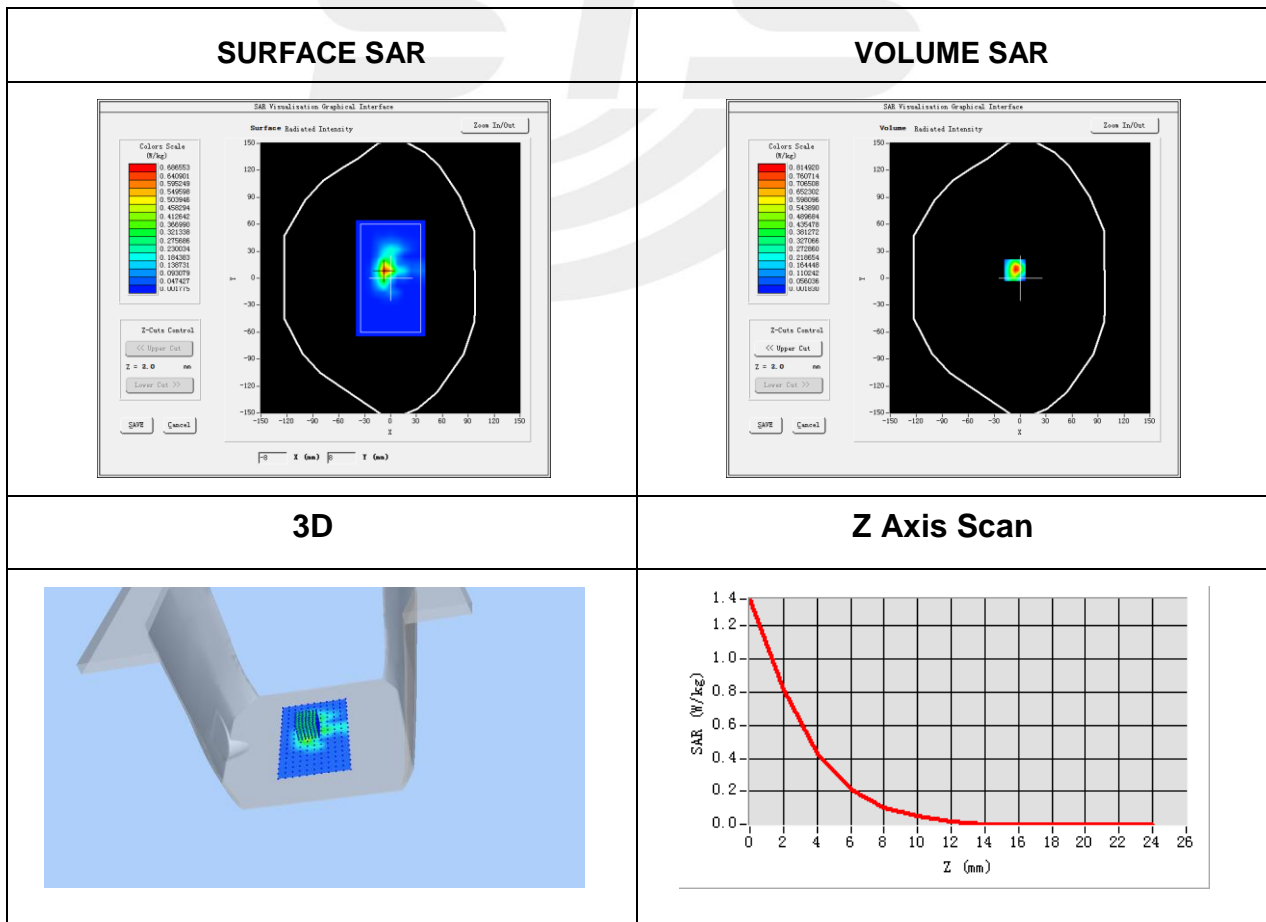


Plot 8: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.12
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	64
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5320
Relative permittivity (real part)	48.82
Conductivity (S/m)	5.62

Maximum location: X=-6.00, Y=8.00
SAR Peak: 1.26 W/kg

SAR 10g (W/Kg)	0.105534
SAR 1g (W/Kg)	0.361731

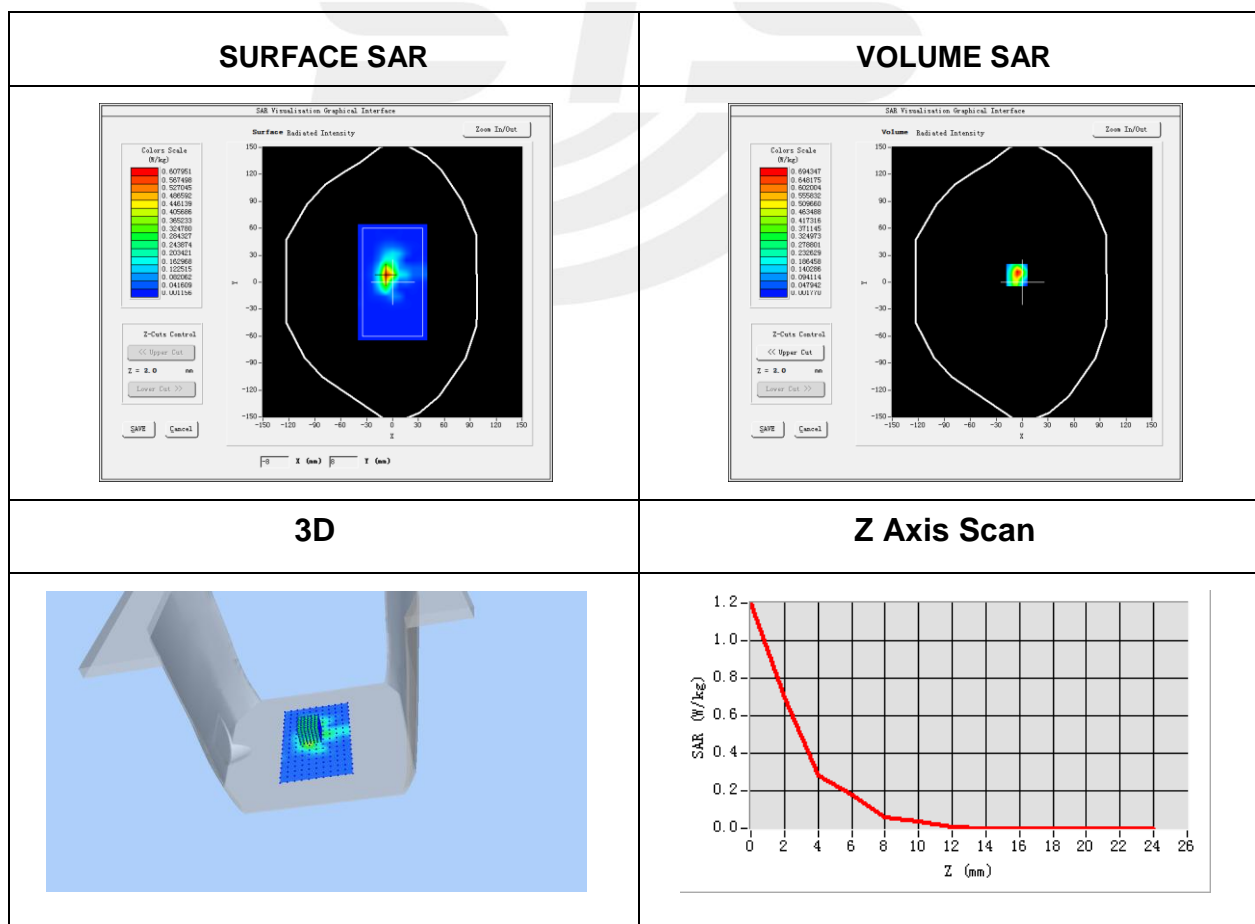


Plot 9: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.21
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n40 ISM
Channels	134
Signal	IEEE802.n40 (Crest factor: 1.0)
Frequency (MHz)	5670
Relative permittivity (real part)	48.62
Conductivity (S/m)	5.48

Maximum location: X=-8.00, Y=-7.00
 SAR Peak: 0.92 W/kg

SAR 10g (W/Kg)	0.045560
SAR 1g (W/Kg)	0.207331

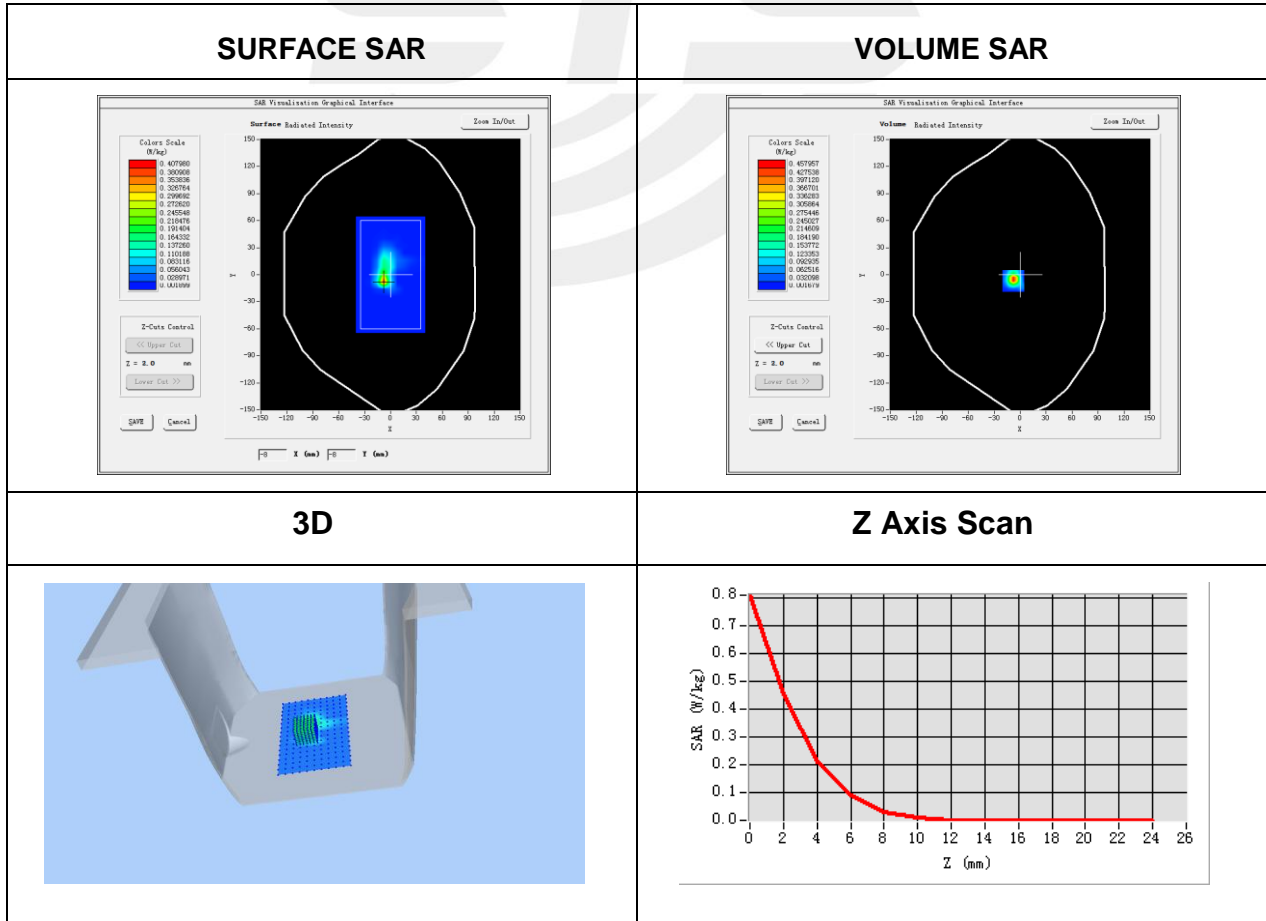


Plot 10: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.06
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	149
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	48.51
Conductivity (S/m)	5.89

Maximum location: X=-8.00, Y=-7.00
SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.028731
SAR 1g (W/Kg)	0.139537

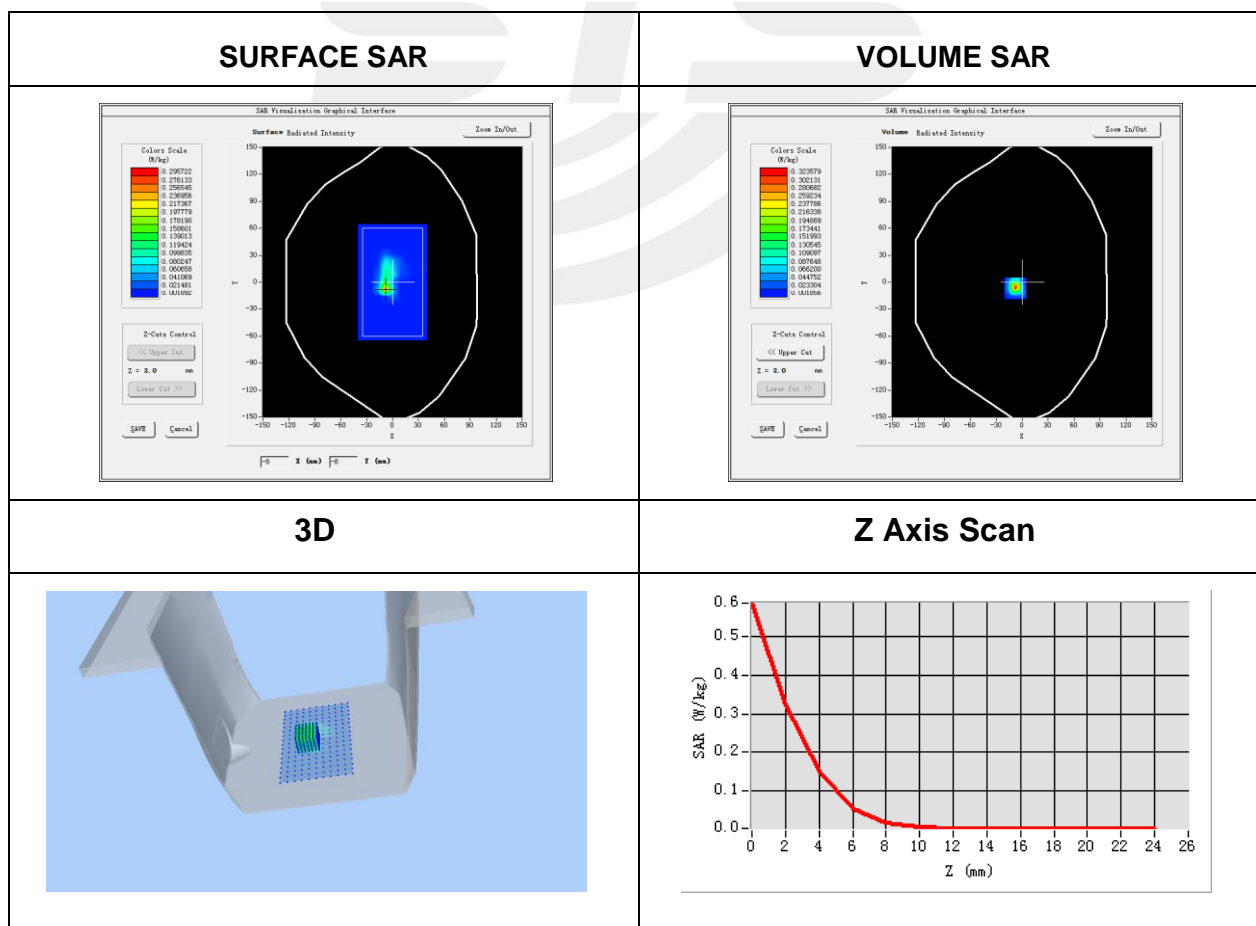


Plot 11: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-27
Probe	SN 41/18 EPGO334
ConvF	2.02
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n40 ISM
Channels	Middle
Signal	IEEE802.n40 (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	52.65
Conductivity (S/m)	1.88

Maximum location: X=5.00, Y=0.00
SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.078082
SAR 1g (W/Kg)	0.176144

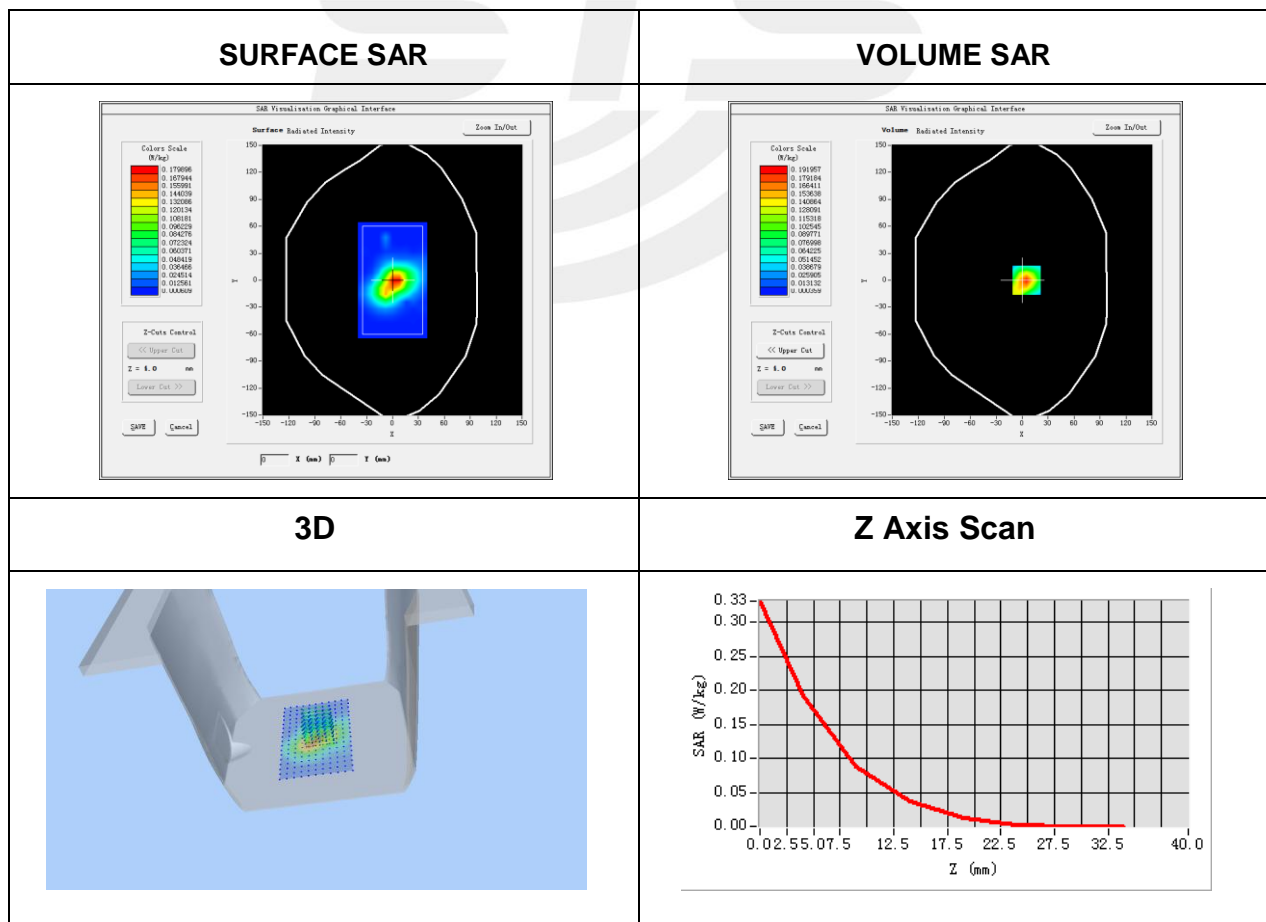


Plot 12: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	1.92
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n ISM
Channels	46
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5230
Relative permittivity (real part)	48.69
Conductivity (S/m)	5.42

Maximum location: X=8.00, Y=24.00
SAR Peak: 3.15 W/kg

SAR 10g (W/Kg)	0.292062
SAR 1g (W/Kg)	0.934733

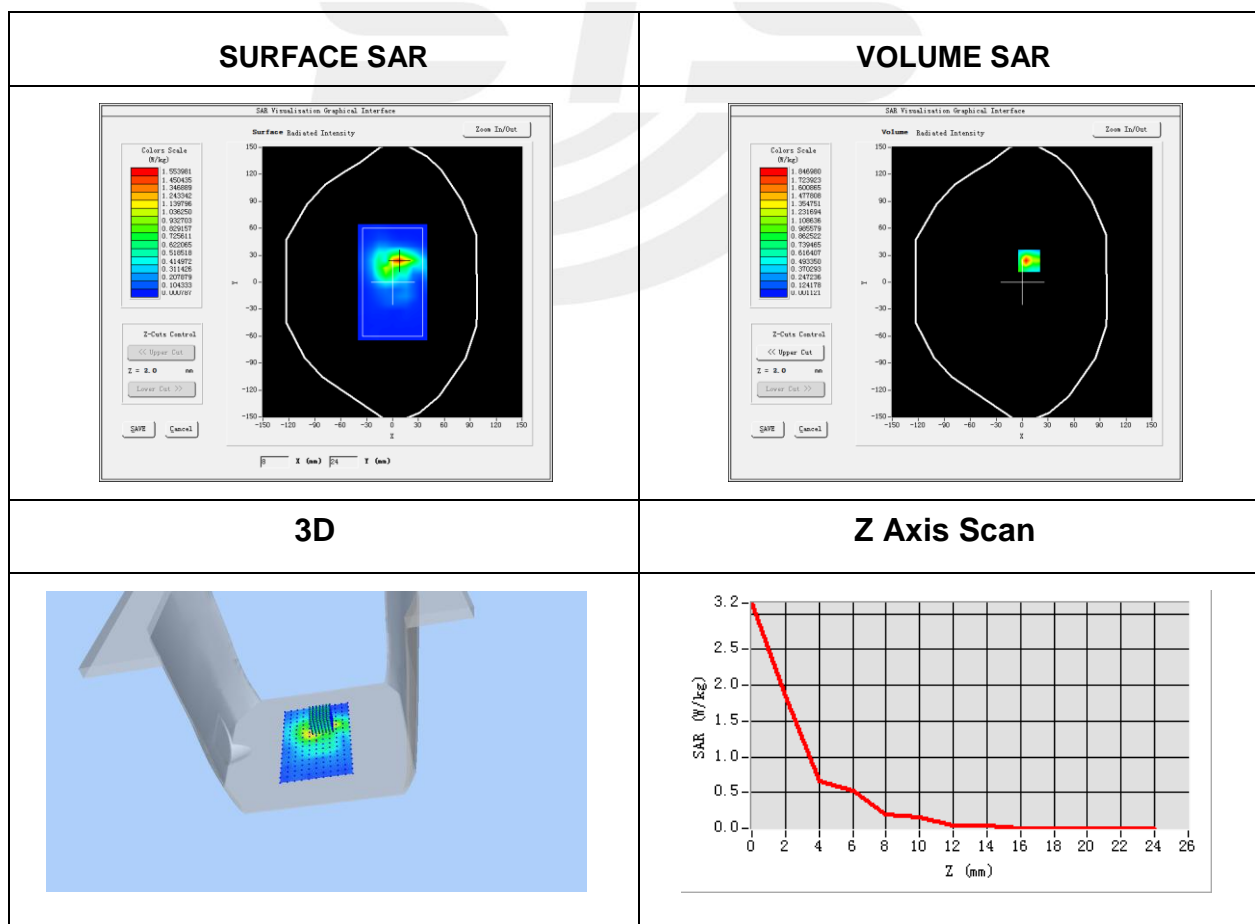


Plot 13: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.12
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11ac ISM
Channels	64
Signal	IEEE802.ac (Crest factor: 1.0)
Frequency (MHz)	5320
Relative permittivity (real part)	48.85
Conductivity (S/m)	5.62

Maximum location: X=3.00, Y=24.00
 SAR Peak: 3.51 W/kg

SAR 10g (W/Kg)	0.291203
SAR 1g (W/Kg)	0.991955

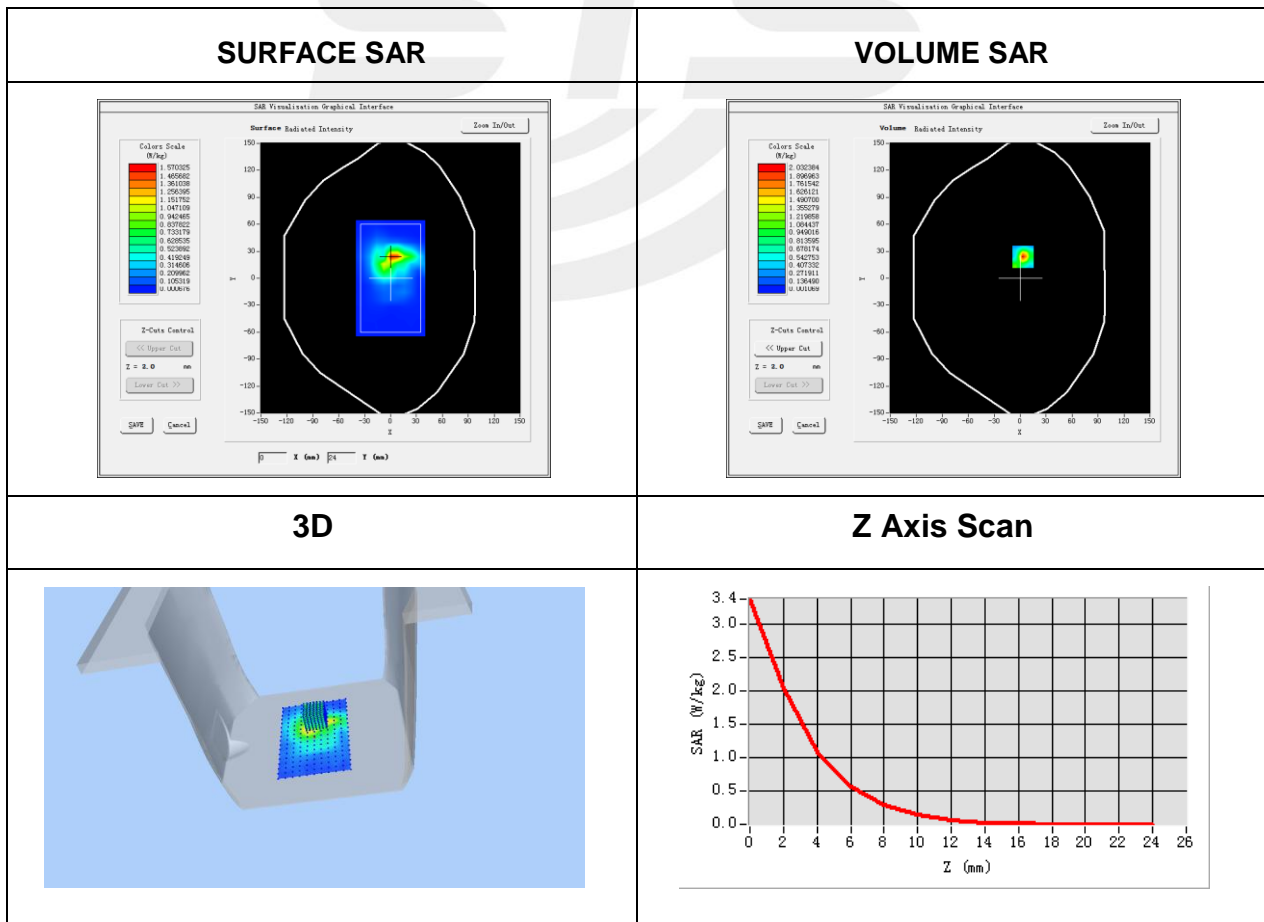


Plot 14: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.21
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	134
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5670
Relative permittivity (real part)	48.62
Conductivity (S/m)	5.48

Maximum location: X=0.00, Y=24.00
SAR Peak: 4.15 W/kg

SAR 10g (W/Kg)	0.300159
SAR 1g (W/Kg)	1.119370

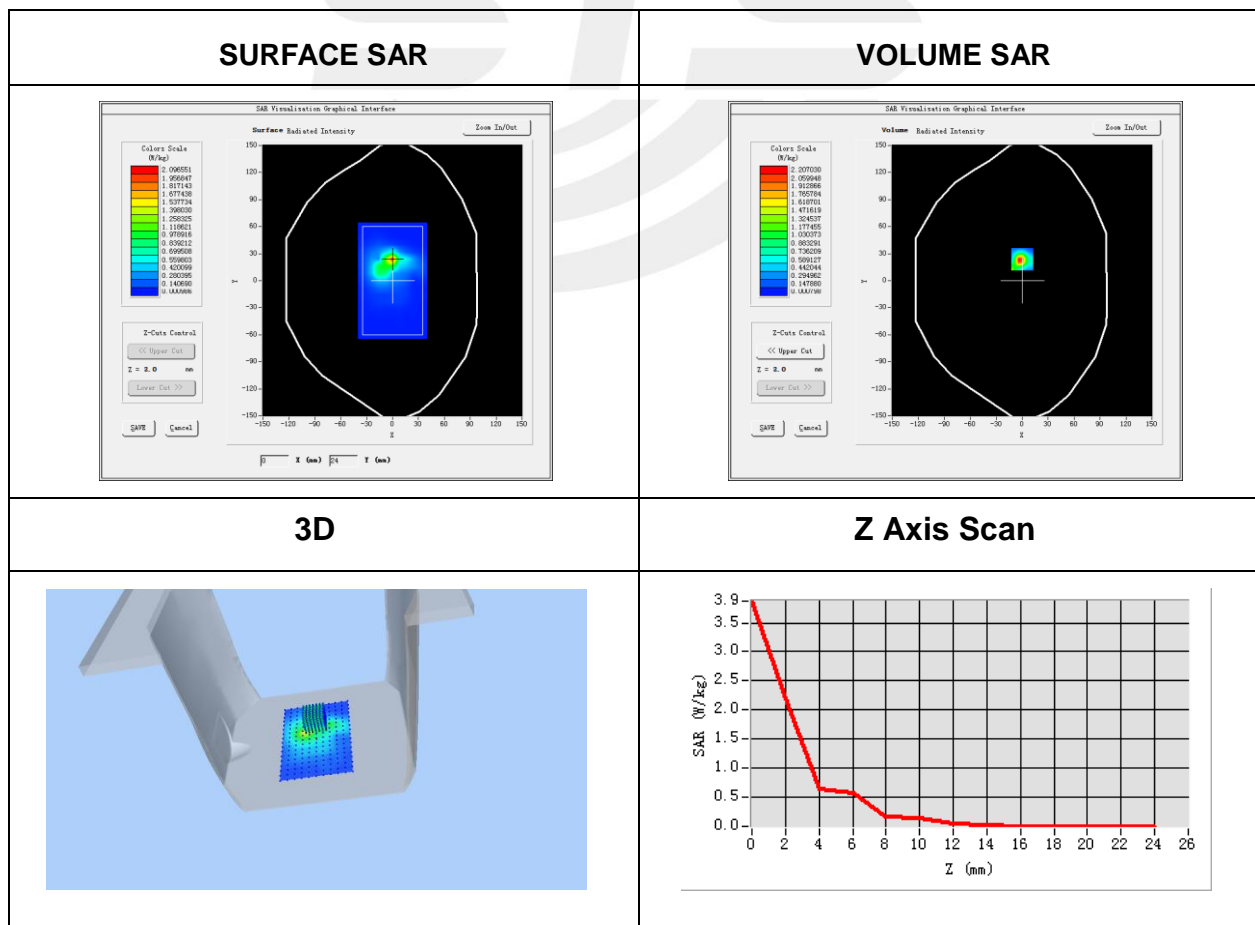


Plot 15: DUT: CB_UWA6N4C_47; EUT Model: mBadge

Test Date	2020-08-28
Probe	SN 41/18 EPGO334
ConvF	2.06
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Channels	151
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5755
Relative permittivity (real part)	48.51
Conductivity (S/m)	5.89

Maximum location: X=8.00, Y=-15.00
SAR Peak: 2.69 W/kg

SAR 10g (W/Kg)	0.190699
SAR 1g (W/Kg)	0.666730

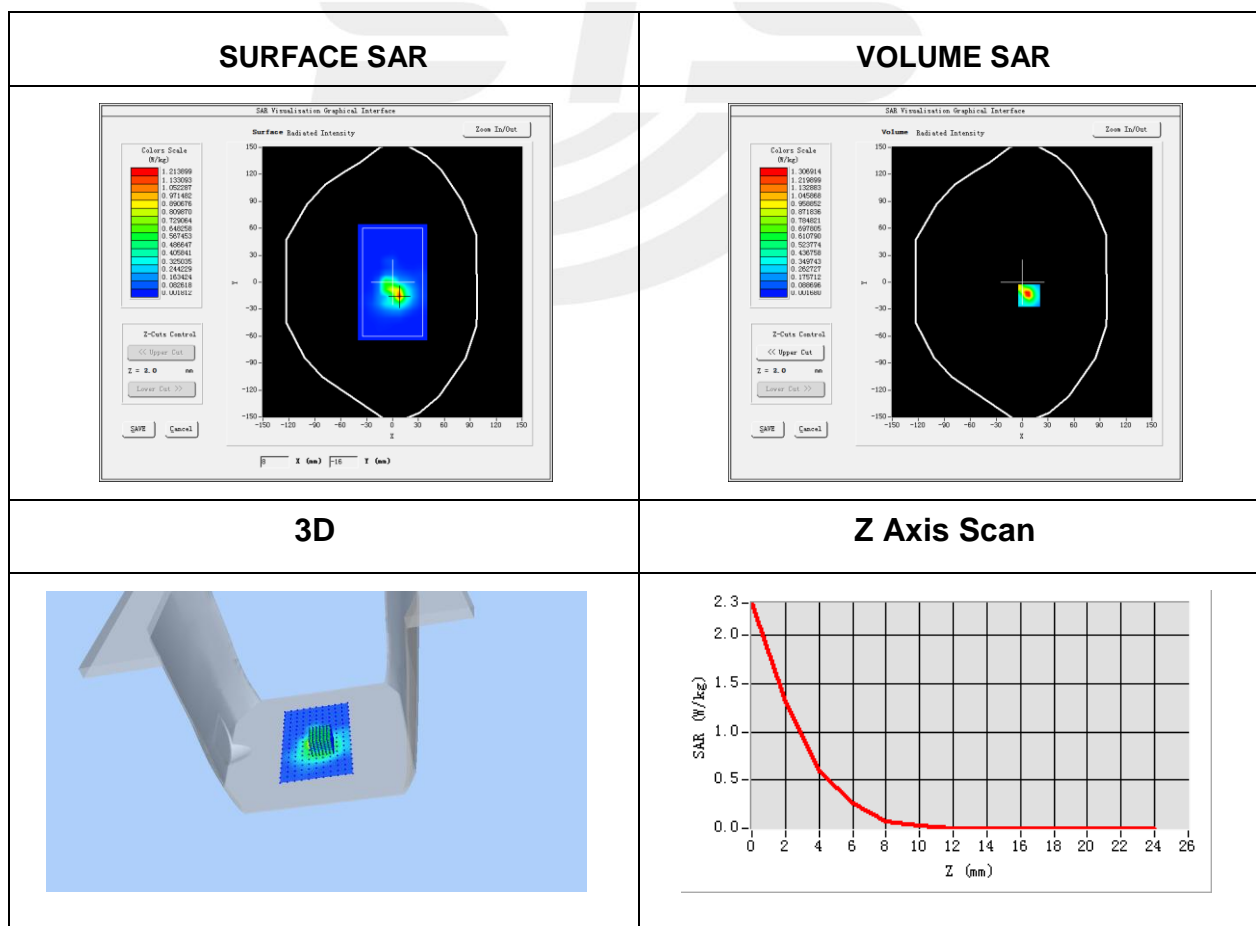



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

