

Test report No:
 NIE: 67313RRF.004

Partial Test report

REFERENCE STANDARD: USA FCC Part 90

(*) Identification of item tested	Vaisala Beacon Station BWS500
(*) Trademark	BSW500
(*) Model and /or type reference	EGW501
Other identification of the product	SW version: V0708_01.002.01.002 HW version: D FCC ID: 2AO39-EGW501 IC: 23830-EGW501
(*) Features	GSM, WCDMA, LTE
Applicant	Vaisala Oyj Vanha Nurmijärventie 21, 01670 Vantaa FINLAND
Test method requested, standard	USA FCC Part 90 (10-1-19 Edition). ANSI C63.26-2015. KDB 971168 D01 Power Meas License Digital Systems v03r01, April. 2018.
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager
Date of issue	2021-03-22
Report template No	FDT08_23 (*) "Data provided by the client"

Index

Competences and guarantees	3
General conditions	3
Uncertainty	3
Data provided by the client.....	3
Usage of samples	4
Test sample description	5
Identification of the client.....	6
Testing period and place.....	6
Document history	6
Environmental conditions	6
Remarks and comments	7
Testing verdicts.....	8
Summary	8
Appendix A: Test results for FCC PART 90.....	9

Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model EGW501 is a compact weather station for environmental monitoring. The complete solution provides measurements, data collection, and data visualization in one package. Vaisala Beacon Station includes Vaisala Beacon Edge Gateway EGW501, a multi parameter Vaisala Weather Transmitter WXT536, powering equipment, and mounting accessories. To maximize ease-of-use, the station comes with a data plan and a variety of service packages to choose from.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
67313/002	Vaisala Beacon Station BWS500	EGW501	S5053426	2021/02/02
65531/006	Weather Transmitter	WXT536	S3240235	2020/10/01
65531/038	Power Supply Unit	PSU501	S3926080	2020/10/14

Auxiliary elements used with the Sample S/01:

Control Nº	Description	Model	Serial Nº	Date of reception
65531/013	Load	--	--	2020/10/01
65531/015	WXT cable	--	--	2020/10/01
65531/017	DC out cable	--	--	2020/10/01
65531/021	DC in cable	--	--	2020/10/01
65531/039	Power Cable	--	--	2020/10/14

Sample S/01 has undergone the following test(s): All radiated tests indicated in Appendix A.

Test sample description

Ports..... :	Port name and description	Cable				
		Specified length [m]	Attached during test	Shielded		
	PSU501	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
	PSU502	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
	WXT	10	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
Supplementary information to the ports..... :	Connecting power cable to gateway turns station automatically on if power is available from battery or other power source. Other ports reserved future use.					
Rated power supply	Voltage and Frequency	Reference poles				
		L1	L2	L3	N	PE
	<input checked="" type="checkbox"/> AC: 100 – 240 V	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> DC: 9 – 32 V						
Rated Power	--					
Clock frequencies.....	max. 2GHz					
Other parameters	--					
Software version	V0708_01.002.01.002					
Hardware version	D					
Dimensions in cm (L x W x D).....	306 x 184 x 156					
Mounting position	<input type="checkbox"/>	Table top equipment				
	<input checked="" type="checkbox"/>	Wall/Ceiling mounted equipment				
	<input type="checkbox"/>	Floor standing equipment				
	<input type="checkbox"/>	Hand-held equipment				
	<input type="checkbox"/>	Other:				
Modules/parts.....	Module/parts of test item	Type	Manufacturer			
	--					
Accessories (not part of the test item)	Description	Type	Manufacturer			
	PSU501, AC power supply	PSU501	Vaisala Oyj			
	PSU502, DC solar power supply	PSU502	Vaisala Oyj			
	WXT536, Weather transmitter	WXT536	Vaisala Oyj			
Documents as provided by the applicant	Description	File name	Issue date			
	--					

Identification of the client

Vaisala Oyj
Vanha Nurmijärventie 21, 01670 Vantaa FINLAND

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-02-03
Date (finish)	2021-02-05

Document history

Report number	Date	Description
67313RRF.004	2021-03-22	First release

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: José Manuel Jimenez, Pablo Redondo and Alfonso Gutiérrez.

Used instrumentation:

Radiated Measurements

		Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N.A.	N.A.
2.	Shielded Room ETS LINDGREN S101	N.A.	N.A.
3.	Biconical/Log Antenna ETS LINDGREN 3142E	2020/04	2023/04
4.	EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2019/10	2021/10
5.	Broadband Horn antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2019/11	2022/11
6.	RF Pre-amplifier 1-18 GHz BONN ELEKTRONIK BLMA 0118-1M	2020/05	2021/05
7.	Signal and Spectrum Analyzer ROHDE AND SCHWARZ FSW 50	2020/07	2022/07
8.	Digital Multimeter FLUKE 175	2020/11	2021/11
9.	WIDEBAND RADIO COMMUNICATION TESTER ROHDE AND SCHWARZ CMW500	2021/02	2022/02

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

FCC PART 90 PARAGRAPH		
Requirement – Test case	Verdict	Remark
Clause 90.635 (b): RF output power	N/M	(1)
Clause 2.1047: Modulation characteristics	N/M	(1)
Clause 90.213: Frequency stability	N/M	(1)
Clause 2.1049: Occupied Bandwidth	N/M	(1)
Clause 90.691: Spurious emissions at antenna terminals	N/M	(1)
Clause 90.691: Radiated emissions	P	(2)
<u>Supplementary information and remarks:</u>		
(1) Test not requested.		
(2) Radiated spurious emissions tests were tested in the worst case.		

Appendix A: Test results for FCC PART 90

INDEX

TEST CONDITIONS.....	11
Radiated emissions	12

TEST CONDITIONS

POWER SUPPLY (V):

Vnominal = 110 Vac

Type of power supply = AC voltage

ANTENNA:

Type of antenna = Integral antenna.

Declared Gain for antenna = +1.60 dBi.

TEST FREQUENCIES:

LTE. QPSK AND 16QAM MODULATION (BAND 26)

	Channel (Frequency, MHz)				
	BW = 1.4 MHz	BW = 3 MHz	BW=5 MHz	BW=10 MHz	BW=15 MHz
Lowest	26697 (814.70)	26705 (815.5)	26715 (816.50)	26740 (819.00)	N/A
Middle	26740 (819.00)	26740 (819.00)	26740 (819.00)		N/A
Highest	26783 (823.30)	26775 (822.50)	26765 (821.50)		N/A

Results show below were performed in the worst case of modulation, and combination between bandwidth and Resource Blocks through a preliminary scan.

Radiated emissions

SPECIFICATION:

FCC §90.691:

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

METHOD:

The measurement was performed with the EUT inside an anechoic chamber.

The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded.

Measurement Limit:


According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB. P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43 + 10 \log(P_o)$, and the level in dBm relative P_o becomes:


$$P_o \text{ (dBm)} - [43 + 10 \log(P_o \text{ in mwatts}) - 30] = -13 \text{ dBm}$$

TEST SETUP:

Radiated measurements below 1 GHz.

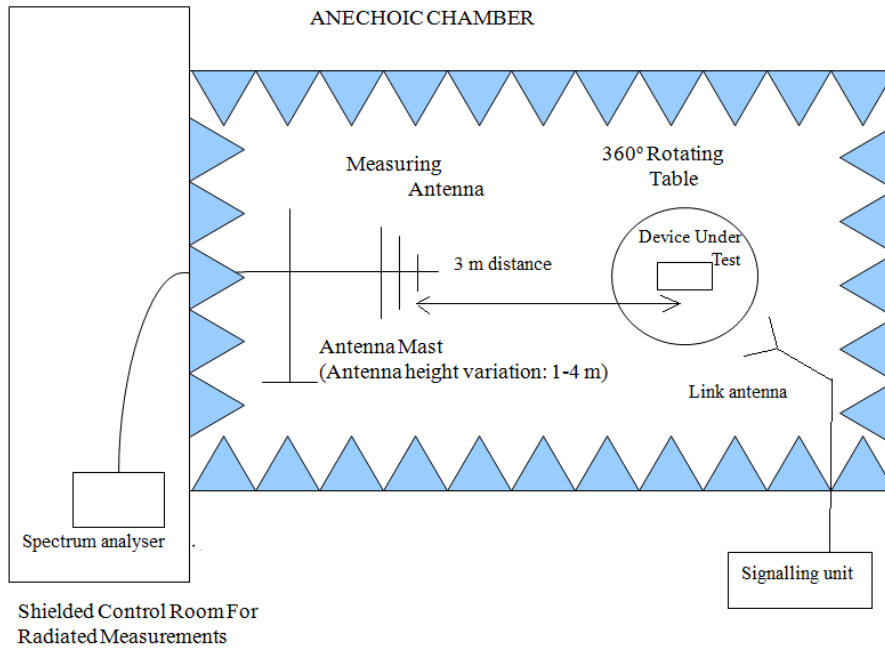

Radiated measurements above 1 GHz.

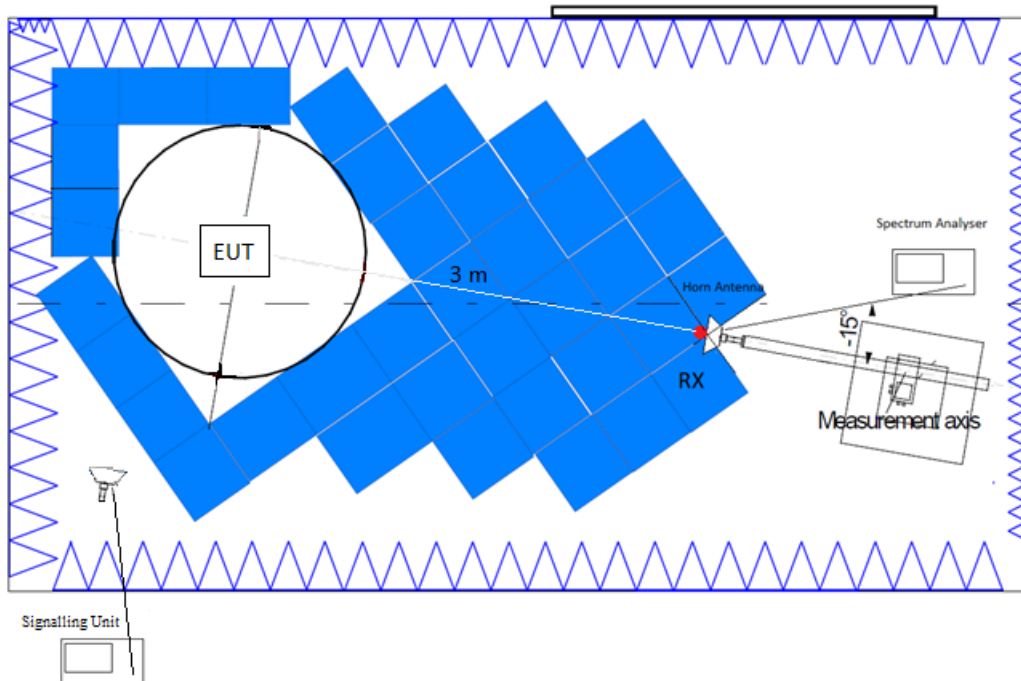

RESULTS:

LTE Band 26:

QPSK:

A preliminary scan determined BW=10 MHz, RB Size=1, RB Offset=24 as the worst case. The following tables and plots show the results for the worst case modulation.

- MIDDLE CHANNEL:

Frequency range 30 MHz - 1 GHz

No spurious frequencies at less than 20 dB below the limit.

Frequency range 1 - 10GHz


No spurious frequencies at less than 20 dB below the limit.

Measurement uncertainty (dB) < ± 4.65 for $f < 1$ GHz
< ± 4.98 for $f \geq 1$ GHz

Verdict: PASS



FREQUENCY RANGE 30 MHz - 1 GHz

- Middle Channel:

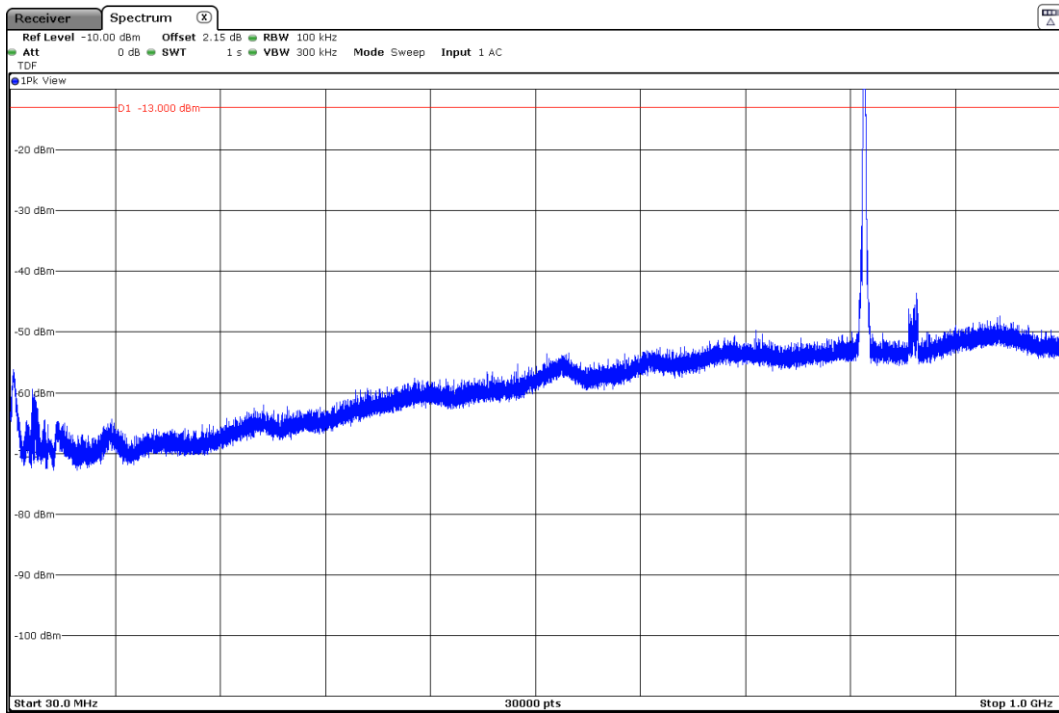

FREQUENCY RANGE 1 - 10 GHz

- Middle Channel:

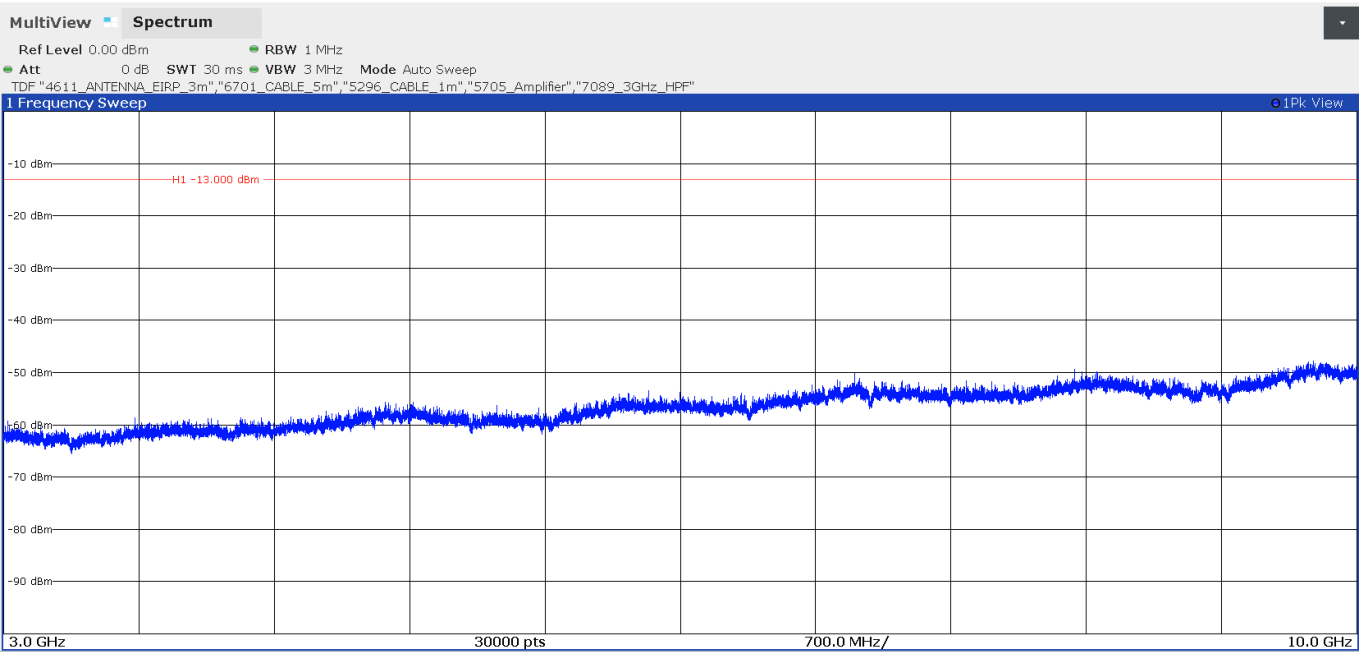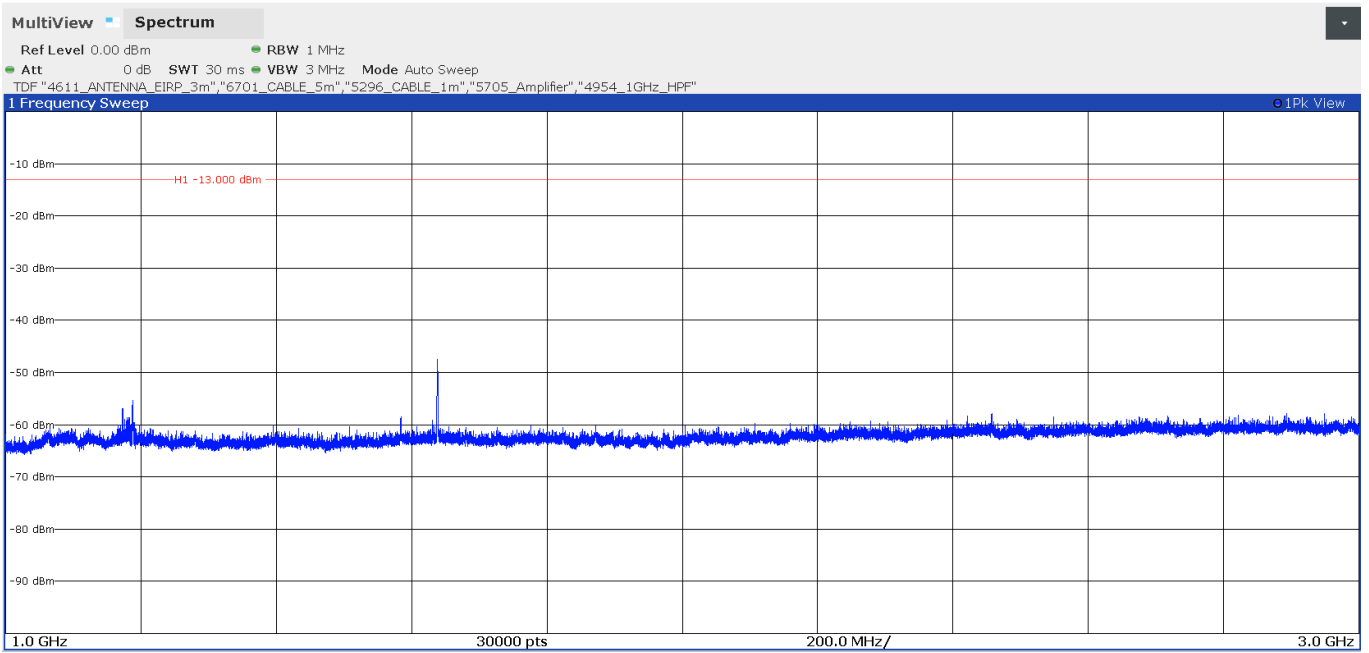

16QAM:

A preliminary scan determined BW=1.4 MHz, RB Size=3, RB Offset=1 as the worst case. The following tables and plots show the results for the worst case modulation.

- LOW CHANNEL:

Frequency range 30 MHz - 1 GHz

Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Detector	E.I.R.P (dBm)	Polarization
809.379	Peak	-29.19	V
811.319	Peak	-22.61	H

Frequency range 1 - 10GHz

No spurious frequencies at less than 20 dB below the limit.

- MIDDLE CHANNEL:

Frequency range 30 MHz - 1 GHz

No spurious frequencies at less than 20 dB below the limit.

Frequency range 1 - 10GHz

No spurious frequencies at less than 20 dB below the limit.

- HIGH CHANNEL:

Frequency range 30 MHz - 1 GHz

Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Detector	E.I.R.P (dBm)	Polarization
813.194	Peak	-33.57	H
824.349	Peak	-30.16	V

Frequency range 1 - 10GHz


No spurious frequencies at less than 20 dB below the limit.

Measurement uncertainty (dB) < ± 4.65 for $f < 1$ GHz
< ± 4.98 for $f \geq 1$ GHz


Verdict: PASS

FREQUENCY RANGE 30 MHz - 1 GHz


- Lowest Channel:

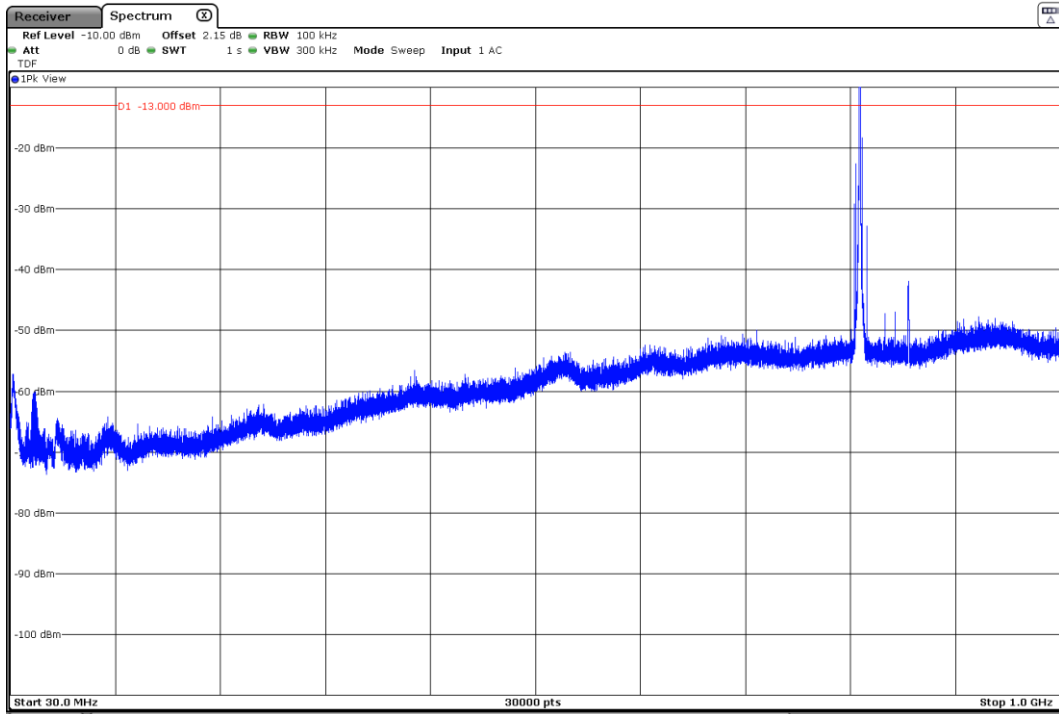

- Middle Channel:


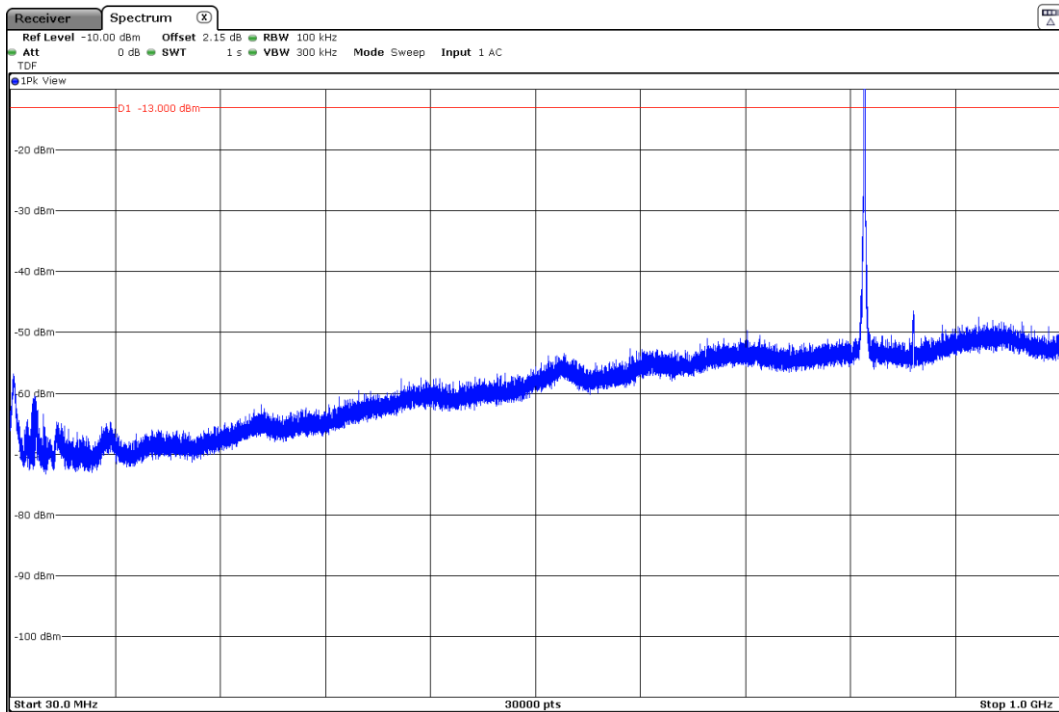


- High Channel:


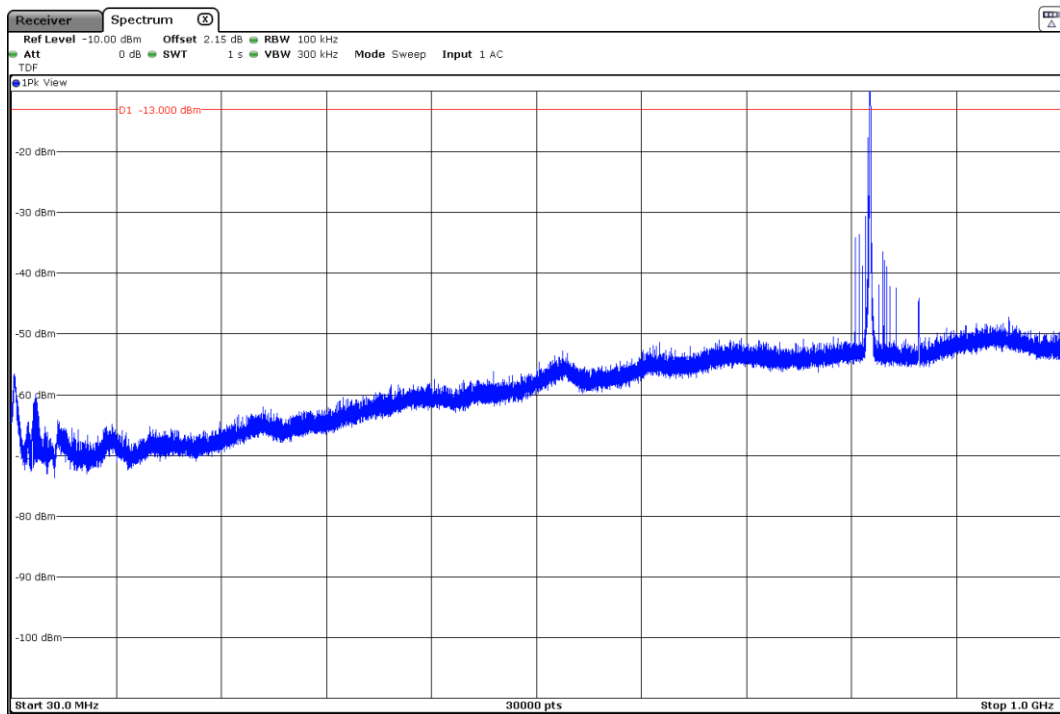


FREQUENCY RANGE 1 - 10 GHz

- Lowest Channel:

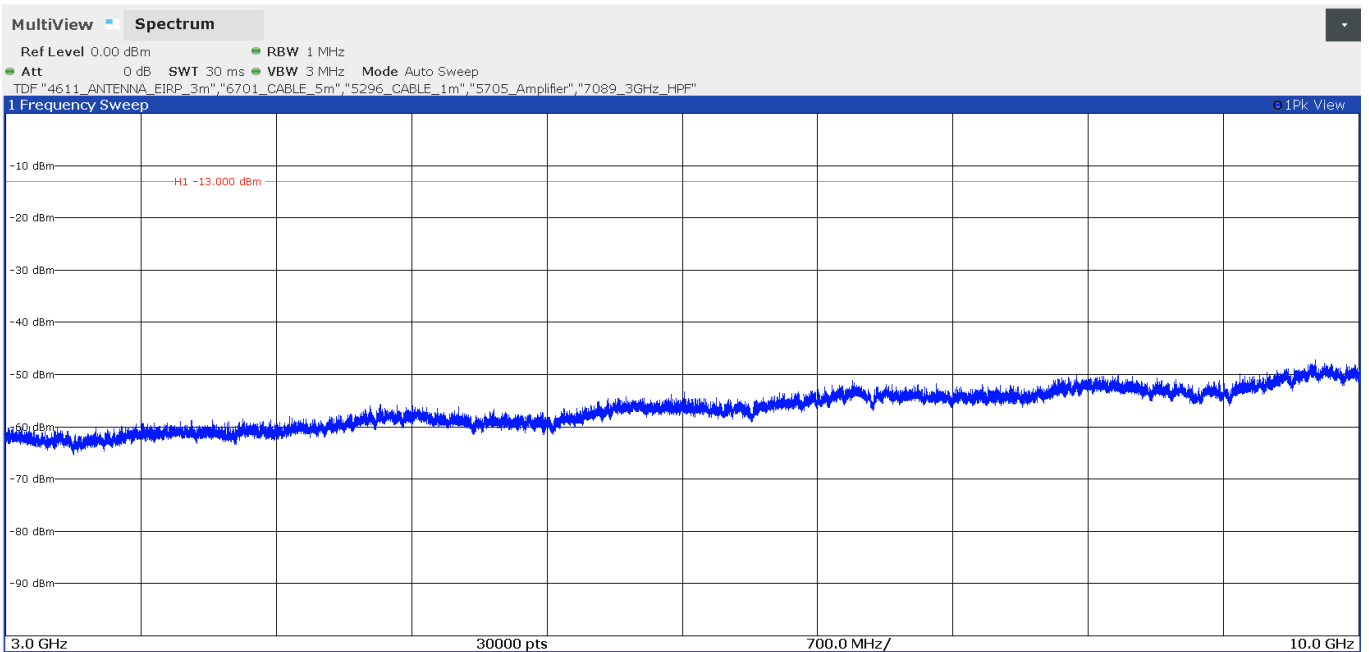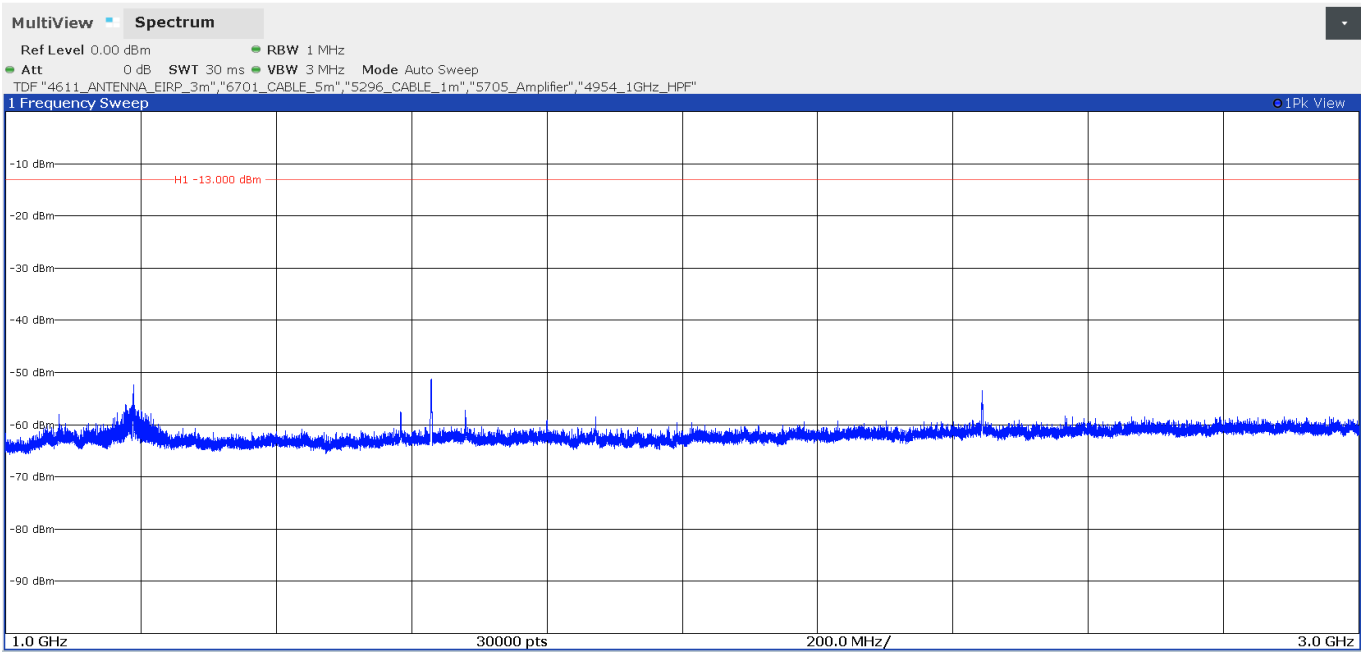

- Middle Channel:

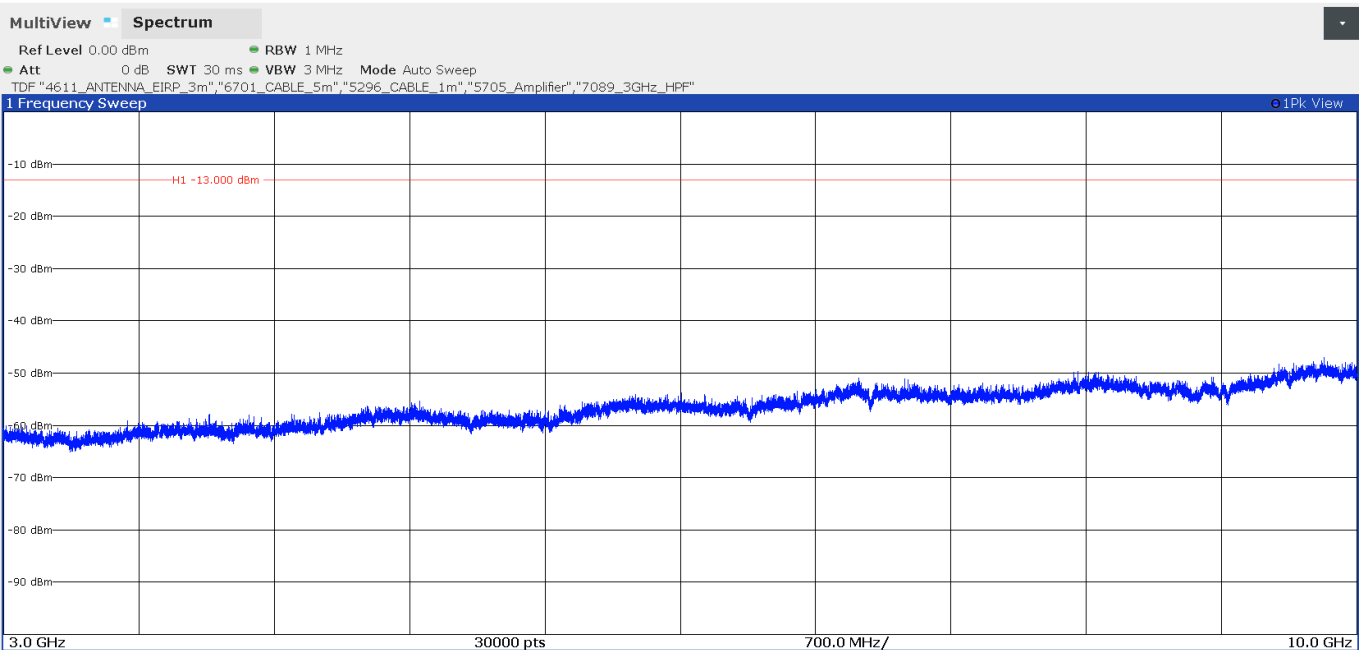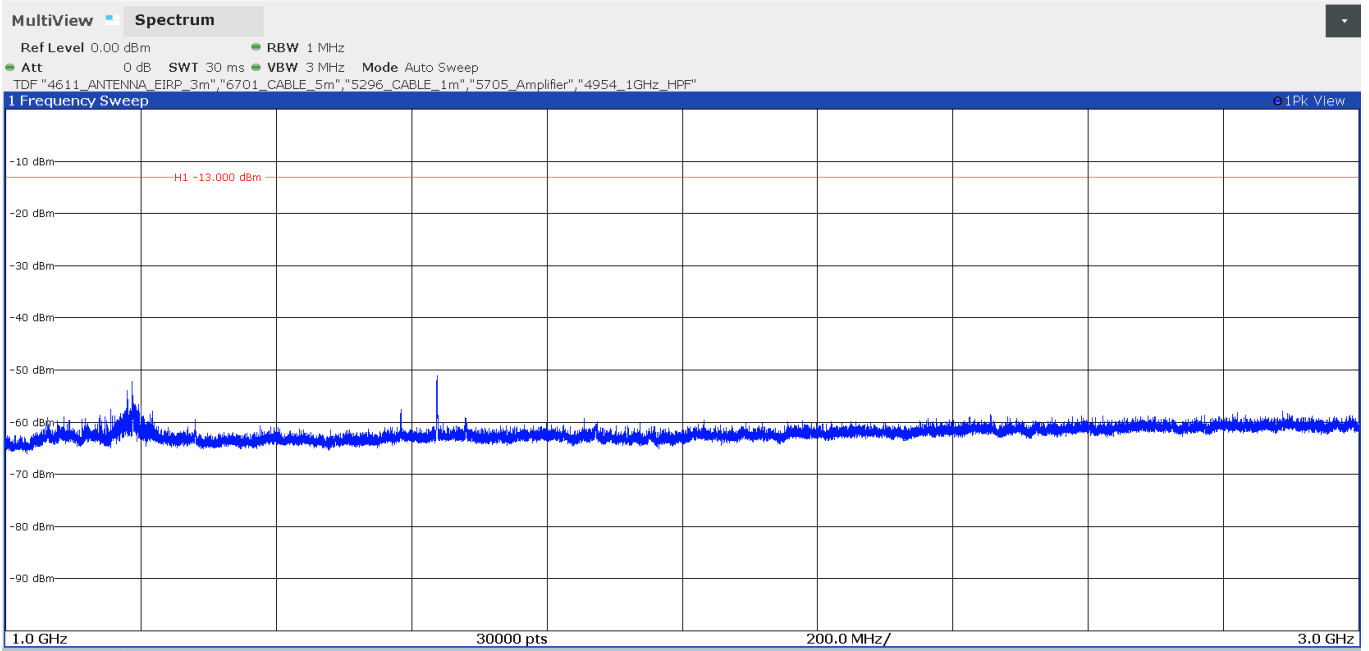

- Highest Channel:

