

Wi-Fi 2.4 GHz

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2.012$ S/m; $\epsilon_r = 52.683$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2017-07-20
- Probe: EX3DV4 - SN7314; ConvF(7.59, 7.59, 7.59); Calibrated: 2017-09-28;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2005

Rear(SAR 3)/802.11 b mode ch 11 5mm/Area Scan (14x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.164 W/kg


Rear(SAR 3)/802.11 b mode ch 11 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.383 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

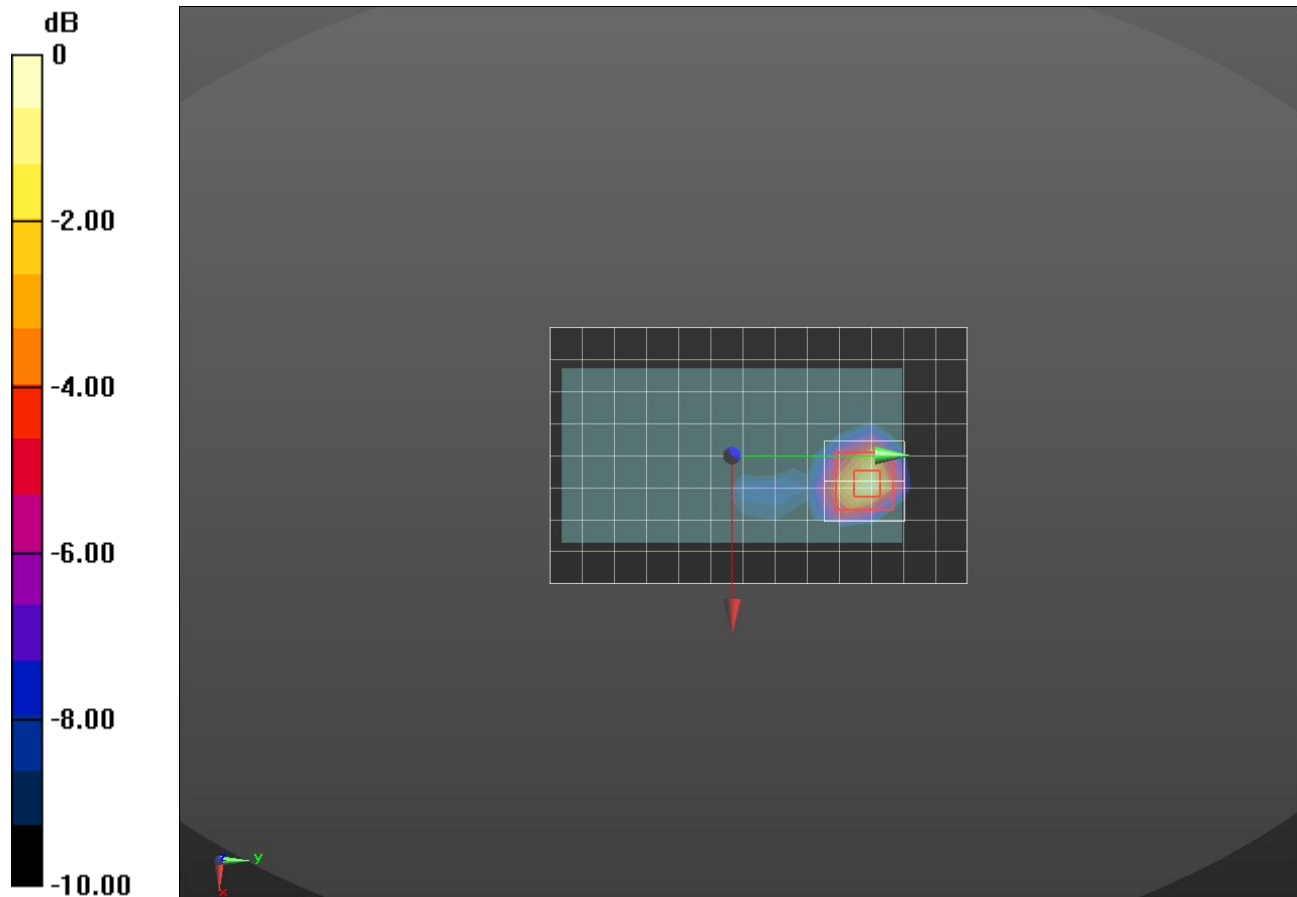

0 dB = 0.175 W/kg = -7.57 dBW/kg