


Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE


FCC Part 15 Certification Measurement


PRODUCT : IIoT Wifi Gateway
MODEL/Serial No. : WFS-205BW / Proto type
MULTIPLE MODEL : -
BRAND NAME :  ulala Lab
FCC ID : 2AO6A-WFS-205BW
APPLICANT : ulalaLAB,Inc.
No.614, 6F, 11-41, Simin-daero 327beon-gil, Dongan-gu,
Anyang-si, Gyeonggi-do, South Korea (14055)
Attn.: Sangchul Kim / Manager
MANUFACTURER : ulalaLAB,Inc.
No.614, 6F, 11-41, Simin-daero 327beon-gil, Dongan-gu,
Anyang-si, Gyeonggi-do, South Korea (14055)
FACTORY 1 : ulalaLAB,Inc.
No.614, 6F, 11-41, Simin-daero 327beon-gil, Dongan-gu,
Anyang-si, Gyeonggi-do, South Korea (14055)
FACTORY 2 : ShenZhen Puhua Technology Co.,Ltd
4/F, BLDG-A, DunFa Industrial Park, GuShu, Xixiang,
Baoan District, Shenzhen, China 518102
EQUIPMENT CLASS : DTS (Part 15 Digital Transmission System)
TYPE OF MODULATION : OFDM
FREQUENCY CHANNEL : 2 412 MHz to 2 462 MHz and Channel Spacing 5 MHz (11 Ch)
ANTENNA TYPE : Chip Antenna (Integral)
ANTENNA GAIN : 1.9 dBi max
RF POWER : 0.05 mW
RULE PART(S) : FCC Part 15 Subpart C
FCC PROCEDURE : ANSI C63.10-2013
TEST REPORT No. : ETLT180125.0010
DATES OF TEST : March 02, 2018 to March 07, 2018
REPORT ISSUE DATE : June 04, 2018
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

The IIoT Wifi Gateway, Model WFS-205BW has been tested in accordance with the measurement procedures specified in ANSI C63.10-2013 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247.

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by: 
Seok Lyong, Choi (Test Engineer)
June 04, 2018

Reviewed by: 
Kug Kyoung, Yoon (Chief Engineer)
June 04, 2018

ETL Inc.

Head office: #371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

Open site: #499-1, Sagot-ri, Seosin-myeon, Hwaseong-si, Gyeonggi-do, 445-882, Korea

Tel: 82-2-858-0786 Fax: 82-2-858-0788

Table of Contents

FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
 - 5.1 Summary of Test Results
 - 5.2 6 dB Bandwidth
 - 5.3 Maximum Peak Output Power
 - 5.4 Bandwidth of Frequency Band Edges
 - 5.5 Power Spectral Density
 - 5.6 Spurious Emissions
 - 5.7 Conducted Emissions Test
 - 5.8 Radio Frequency Exposure
6. Sample Calculation
7. List of test Equipment used for Measurement

FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission (EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name	: ulalaLAB,Inc.
Address	: No.614, 6F, 11-41, Simin-daero 327beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, South Korea (14055)
Attention	: Sangchul Kim / Manager

- **EUT Type** : IloT-Wifi-Gateway
- **Model Number** : WFS-205BW
- **S/N** : Proto type
- **Modulation Technique** : OFDM
- **Frequency Channel** : 2 412 MHz to 2 462 MHz and Channel Spacing 5 MHz (11 Ch)
- **Antenna Type** : Chip Antenna (Integral)
- **Antenna Gain** : 1.9 dBi max
- **RF Power** : 0.05 mW
- **Environmental of Tests** : Temperature: (16.9 ± 10.6) °C
Humidity: (39 ± 5) % R.H.
Atmospheric Pressure: (102.0 ± 0.9) kPa
- **FCC Rule Part(s)** : FCC Part 15 Subpart C
- **Test Procedure** : ANSI C63.10-2013
- **EQUIPMENT CLASS** : DTS (Part 15 Digital Transmission System)
- **Place of Tests** : ETL Inc. Testing Lab. (FCC Designation Number : KR0022)

Radiated Emission test 1;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea

Radiated Emission test 2 and Conducted Emission test;
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.10-2013 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.10-2013 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.10-2013) was used in determining radiated and conducted emissions from the ulalaLAB,Inc. Model: WFS-205BW

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the IIoT-Wifi Gateway (model: WFS-205BW).

2.2 General Specification

Specification	Value	Remark
Input Voltage	USB power supply DC 5 V / 1 A	
Power Consumption	10 W Under	Except Sensor
Operation temperature	(22.5 ± 52.5) °C	
Processor	ARM Cortex-M3 / M4	BLE / Wifi
Clock	48 MHz / 80 MHz	BLE / Wifi
RAM	28 kByte / 256 kByte	BLE / Wifi
ROM	128 kByte / 4 MByte	BLE / Wifi
Bluetooth	BLE only 4.0	
WiFi	802.11 b/g/n (20 MHz only)	
Security	WPA	
WiFi Max Throughput	13 Mbps	Application level
WiFi RX Sensitivity	-95.7 dBm / -74.0 dBm	1 DSSS / 54 OFDM
Antenna gain	Chip antenna 1.9 dBi	
High Internal Frequency	40 MHz	Wifi

3. DESCRIPTION OF TESTS

The tests documented in this report were performed in accordance with ANSI C63.10-2013 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.10-2013 "Measurement of Intentional radiators" The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1 GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site or SVSWR chamber at 3 m. The test equipment was placed on a styrofoam table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a table height for below 1GHz is 0.8 m, and for above 1GHz is 1.5 m. nonmetallic 1.0 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.2 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.10-2013 "measurement of intentional radiators" The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.3 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490 MHz - 0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.4 Antenna connection requirement

(1) According to §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4. TEST CONDITION

4.1 Test Configuration


The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

* This test was applied to X, Y, Z. and the worst result were investigated and reported.

4.2 Description of Test modes

IIoT Wifi Gateway that has the control software.

4.3 The setup drawing(s)

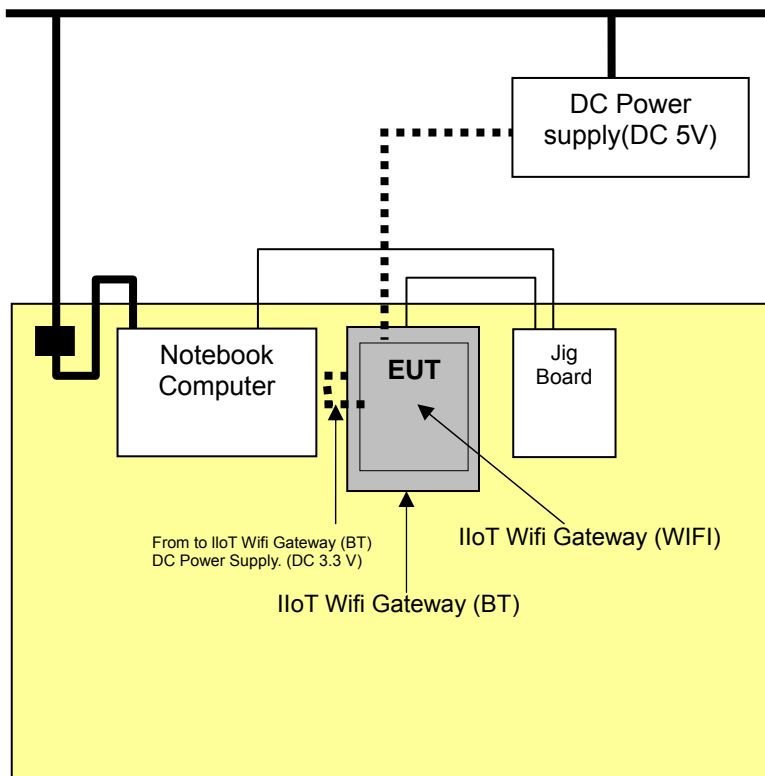

- : Signal Line
- : Power Line
- : Adapter
- : DC Line

4.4 Support Equipment Used

Description	Model Name	Serial No.	Manufacturer
IloT Wifi Gateway	WFS-205BW	NONE	ulalaLAB,Inc.
Notebook Computer	CQ35	CND9322TYH	HEWLET-PACKARD COMPANY
Adapter (for Notebook Computer)	PPP009C	F220881413024952	CHICONY POWER TECHNOLOGY (Chong QIng) CO., LTD.
DC POWER SUPPLY	DP30-03A	16110016	TOYO TECH

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

47 CFR Part 15, Subpart C	Measurement Required	Result
15.247(a)(2)	6 dB Bandwidth	Pass
15.247(b)(3)	Maximum Peak Output Power	Pass
15.247(d)	Bandwidth of Frequency Band Edges	Pass
15.247(e)	Power Spectral Density	Pass
15.209(a)	Spurious Emissions	Pass
15.207	Conducted Emissions	Pass *
15.203	Antenna connection requirement	Integral antenna which is permanently attached and cannot be replaced.
1.1307(b)(1)	RF Exposure	Pass

* This test was tested at DC Power Supply (EUT was connected DC Power Supply).

The data collected shows that the **ulalaLAB, Inc. / IIoT Wifi Gateway / WFS-205BW** complied with technical requirements of above rules part 15.207, 209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5.2 6 dB Bandwidth

EUT	IloT Wifi Gateway / WFS-205BW
Limit apply to	FCC Part 15.247(a)(2)
Test Date	March 02, 2018
Environmental of Test	(23.8 ± 1.6) °C, (42 ± 1) % R.H., (101.9 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

The maximum 6 dB bandwidth shall be at least 500 kHz.




Test Data

Mode	Frequency [MHz]	6 dB Bandwidth [kHz]	Limit
802.11b	2 412	9.100	> 500 kHz
	2 437	9.075	
	2 462	9.069	
802.11g	2 412	16.308	
	2 437	16.448	
	2 462	16.415	
802.11n(HT20)	2 412	17.097	
	2 437	17.444	
	2 462	16.946	




NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.
2. RBW 100 kHz, VBW 300 kHz, Sweep 1s.
3. Please see the measured plot in next page.




Plots of 6 dB Bandwidth (802.11b)

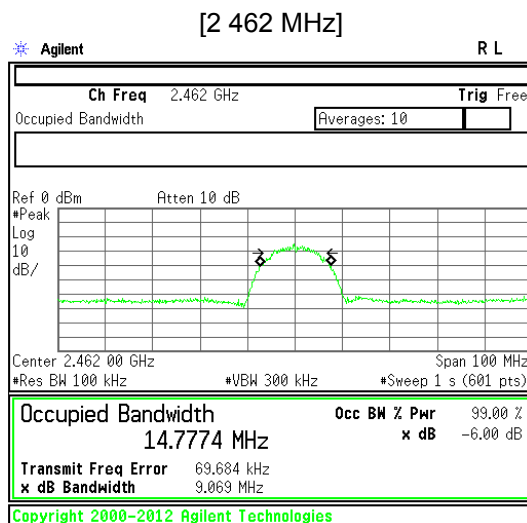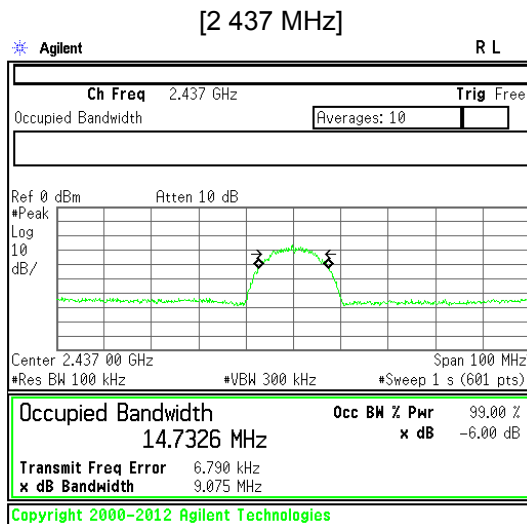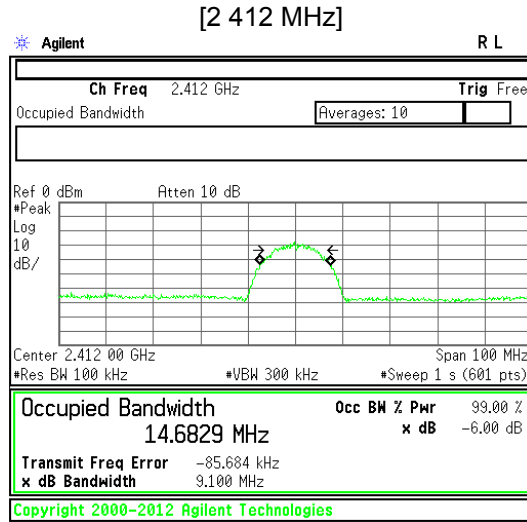

Plots of 6 dB Bandwidth (802.11g)

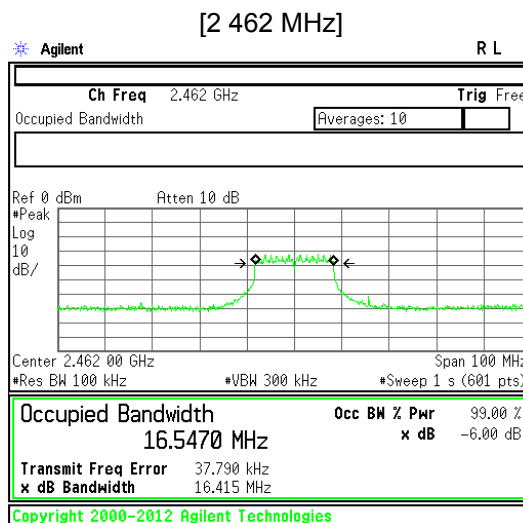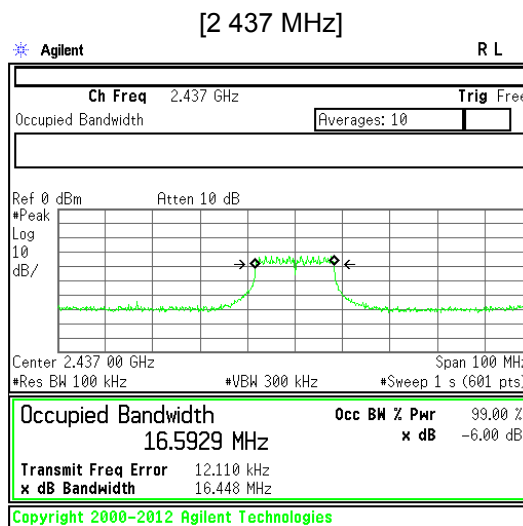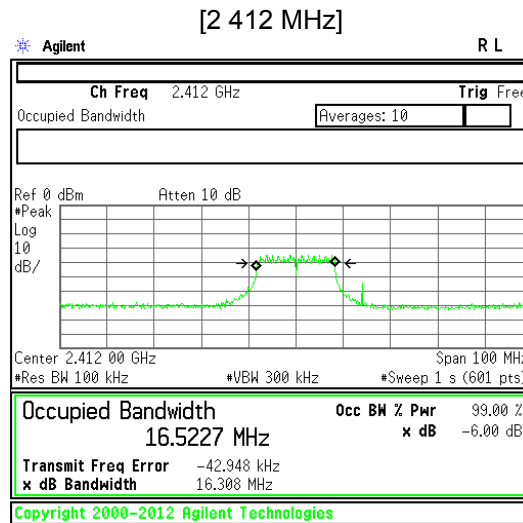

Plots of 6 dB Bandwidth (802.11n(HT20))

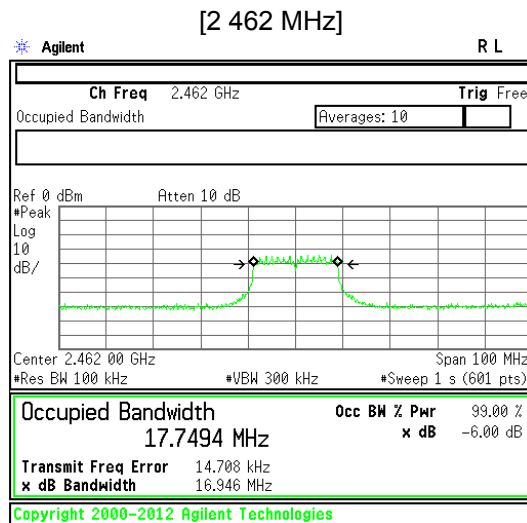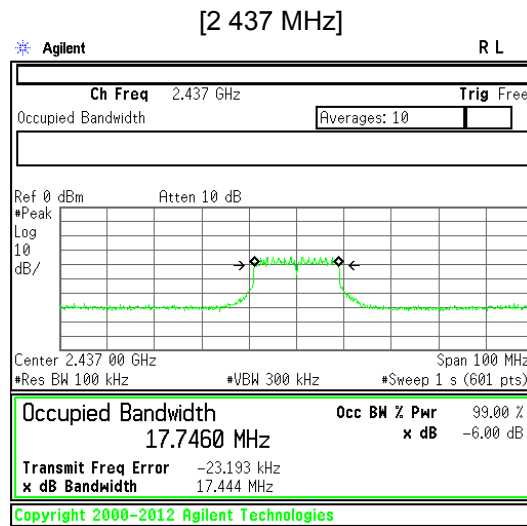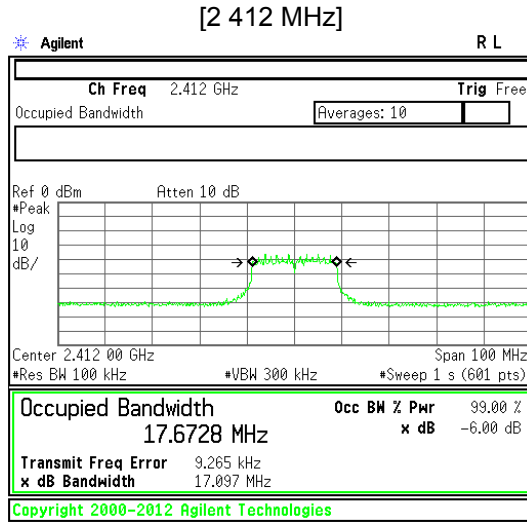

5.3 Maximum Peak Conducted Output Power

EUT	IloT Wifi Gateway / WFS-205BW
Limit apply to	FCC Part 15.247(b)(3)
Test Date	March 02, 2018
Environmental of Test	(24.1 ± 0.5) °C, (43 ± 0) % R.H., (101.9 ± 0.1) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2 400.0 MHz - 2 483.5 MHz band: 1 Watt

Test Data

Mode	Frequency [MHz]	Output Power [dBm]	Limit
802.11b	2 412	-14.19	< 30.00 dBm (1 W)
	2 437	-13.56	
	2 462	-13.62	
802.11g	2 412	-14.87	
	2 437	-13.23	
	2 462	-12.63	
802.11n(HT20)	2 412	-16.27	
	2 437	-14.55	
	2 462	-14.83	


NOTES:

1. Please see the measured plot in next page.

Plots of Output Power (802.11b)


[2 412 MHz]

Maximum value (Output Power)

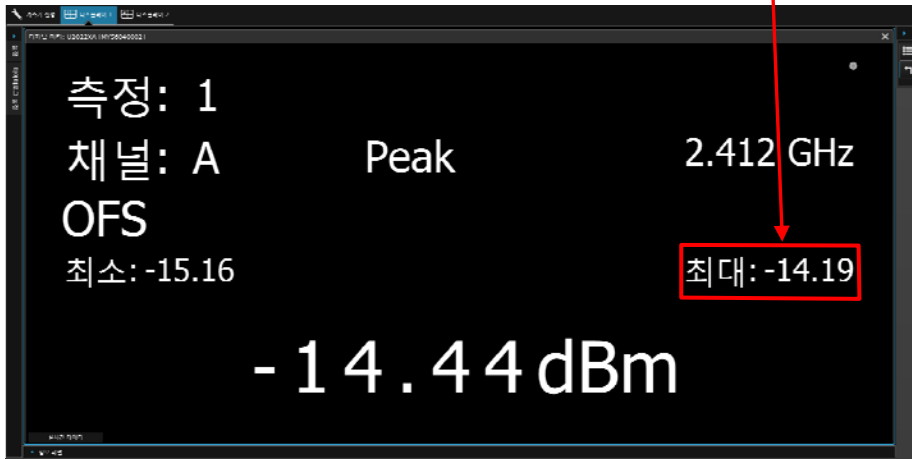


[2 437 MHz]

Maximum value (Output Power)

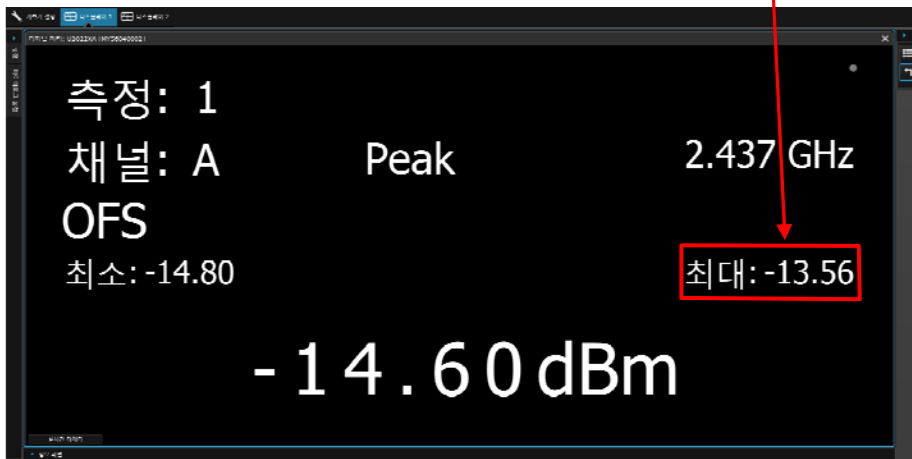

[2 462 MHz]


Maximum value (Output Power)

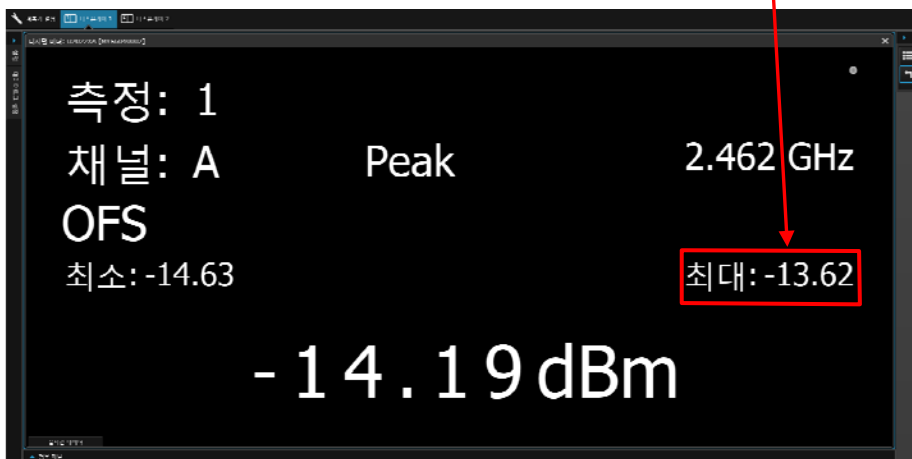

Plots of Output Power (802.11g)


[2 412 MHz]

Maximum value (Output Power)

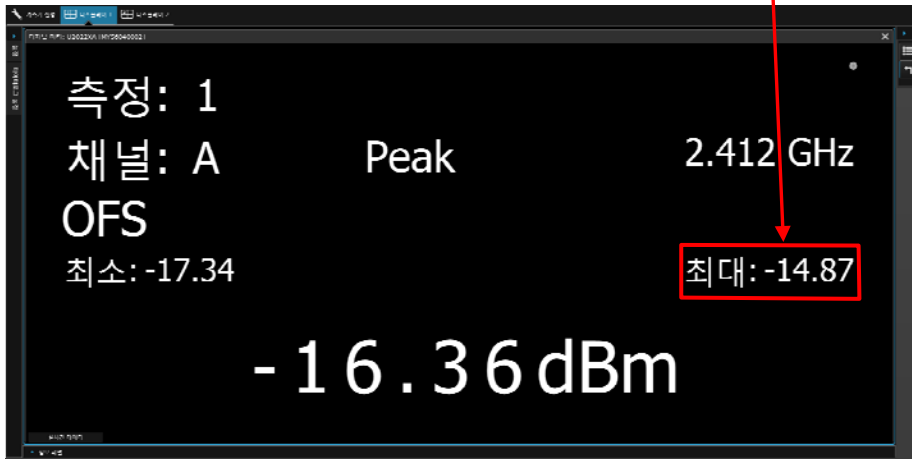


[2 437 MHz]

Maximum value (Output Power)

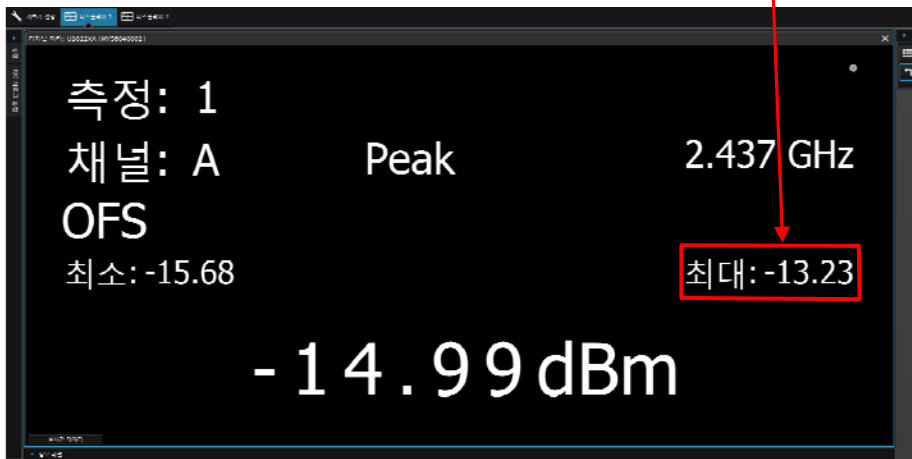

[2 462 MHz]

Maximum value (Output Power)

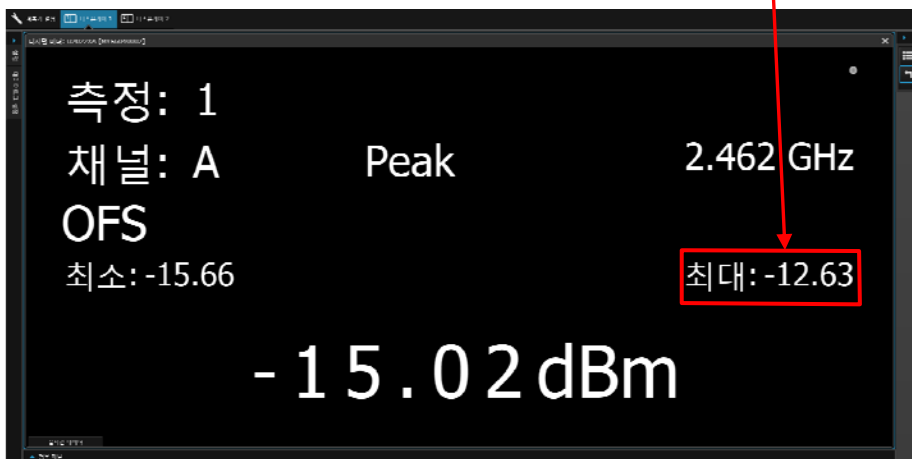

Plots of Output Power (802.11n(HT20))


[2 412 MHz]

Maximum value (Output Power)




[2 437 MHz]

Maximum value (Output Power)

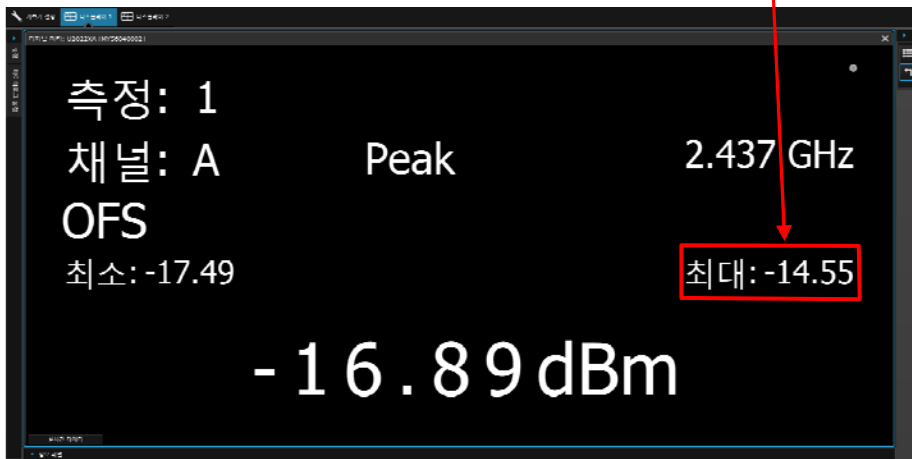

[2 462 MHz]

Maximum value (Output Power)

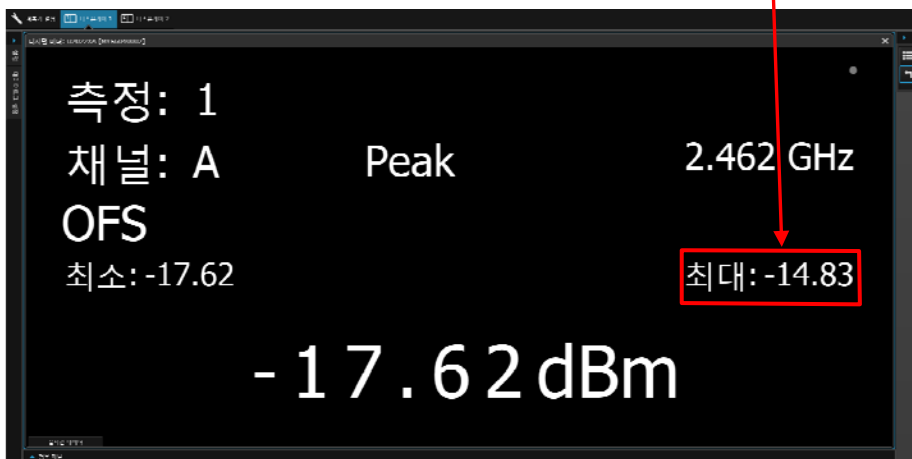

5.4 Bandwidth of Frequency Band Edges

EUT	IloT Wifi Gateway / WFS-205BW
Limit apply to	FCC Part 15.247(d)
Test Date	March 07, 2018
Environmental of Test	(24.2 ± 3.3) °C, (42 ± 2) % R.H., (102.6 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Results



- Refer to see the measured plot in next page.

NOTES:

1. The test was performed to make a direct field strength measurement at the band edge frequencies.

Plots of Bandwidth of Frequency Band Edges (802.11b)


Conducted

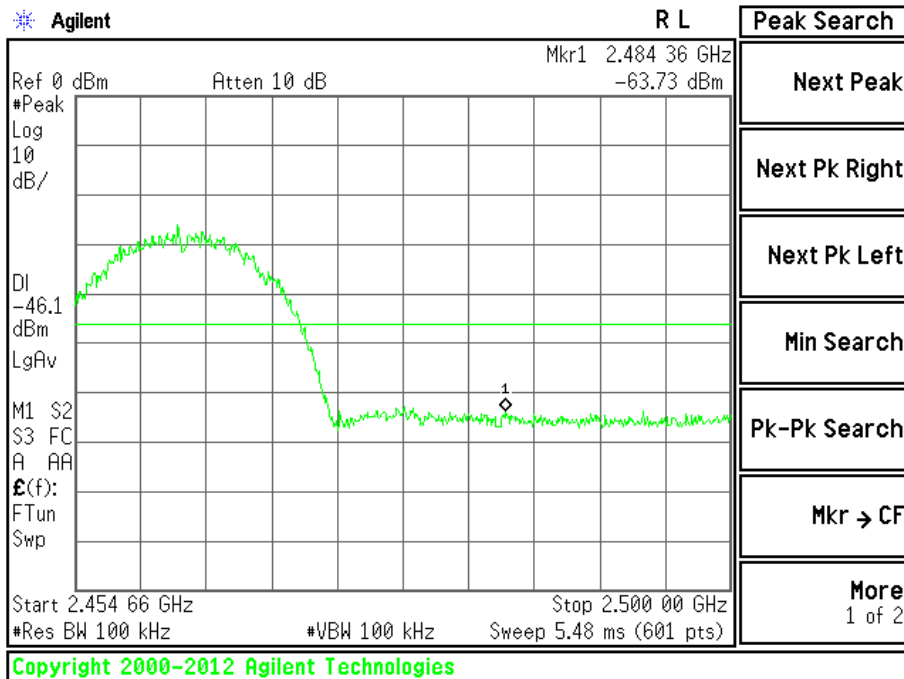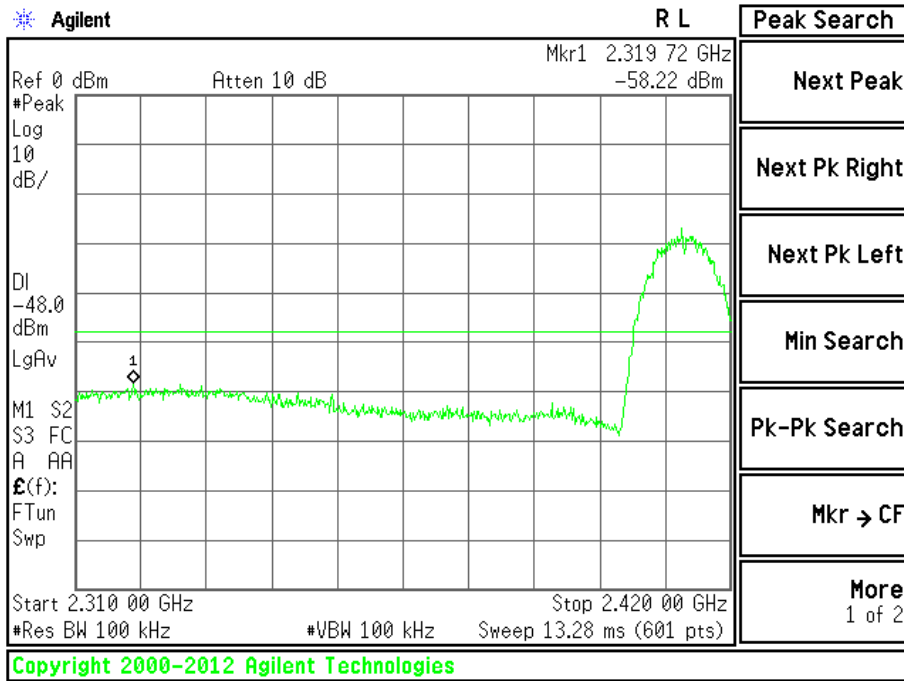

Radiated

Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Vertical)


— Peak Limit Line
— AV Limit Line

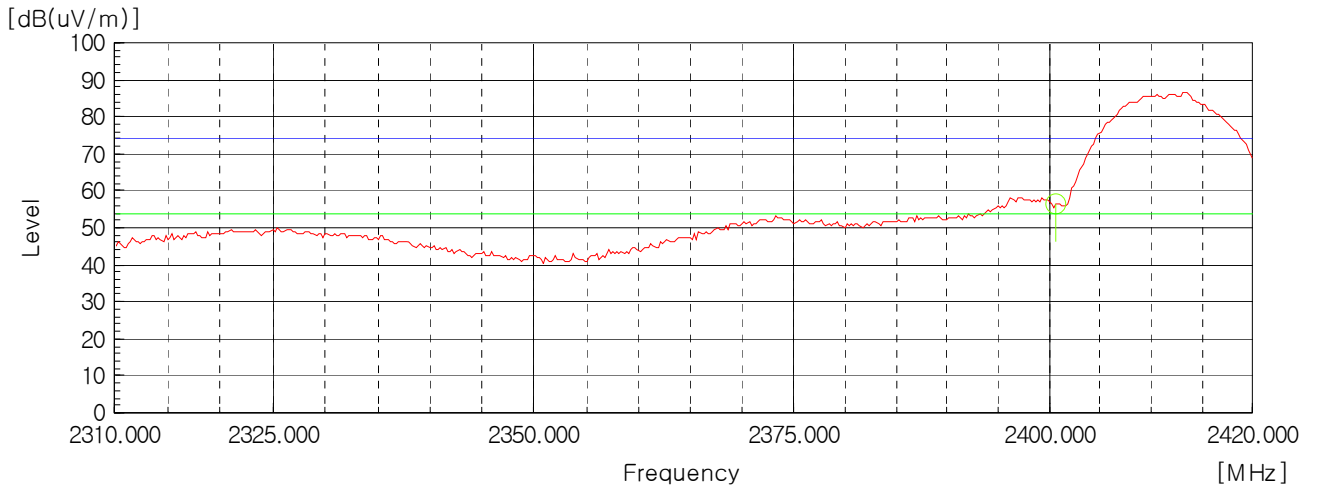

Frequency [MHz]	Result	Limit	Margin
2400.00	56.40	73.97	17.57

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Vertical)


— Peak Limit Line
— AV Limit Line

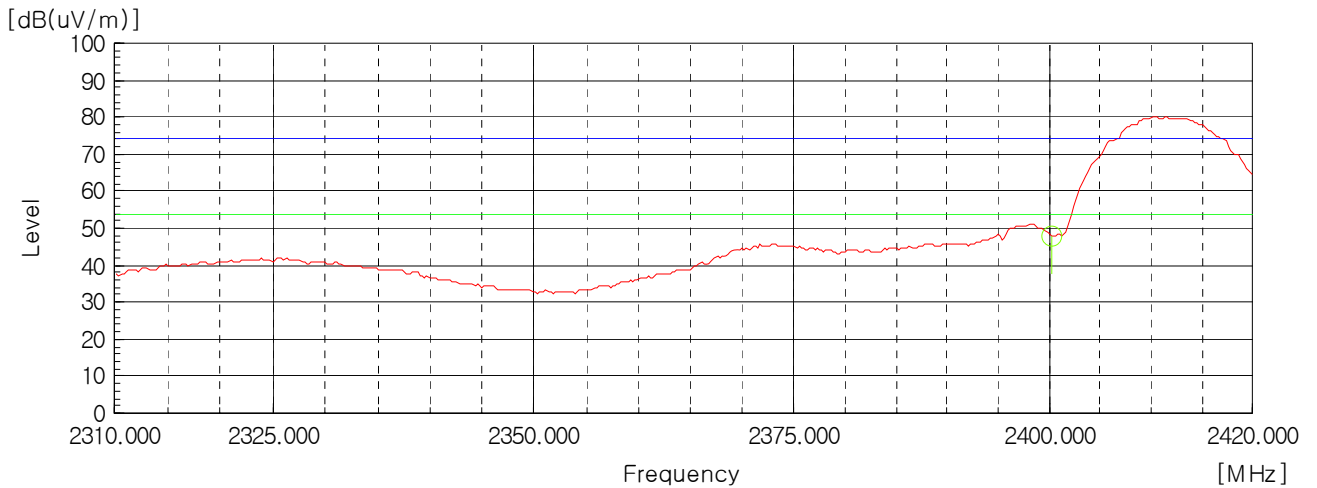

Frequency [MHz]	Result	Limit	Margin
2400.00	48.00	53.97	5.97

Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Vertical)


— Peak Limit Line
— AV Limit Line

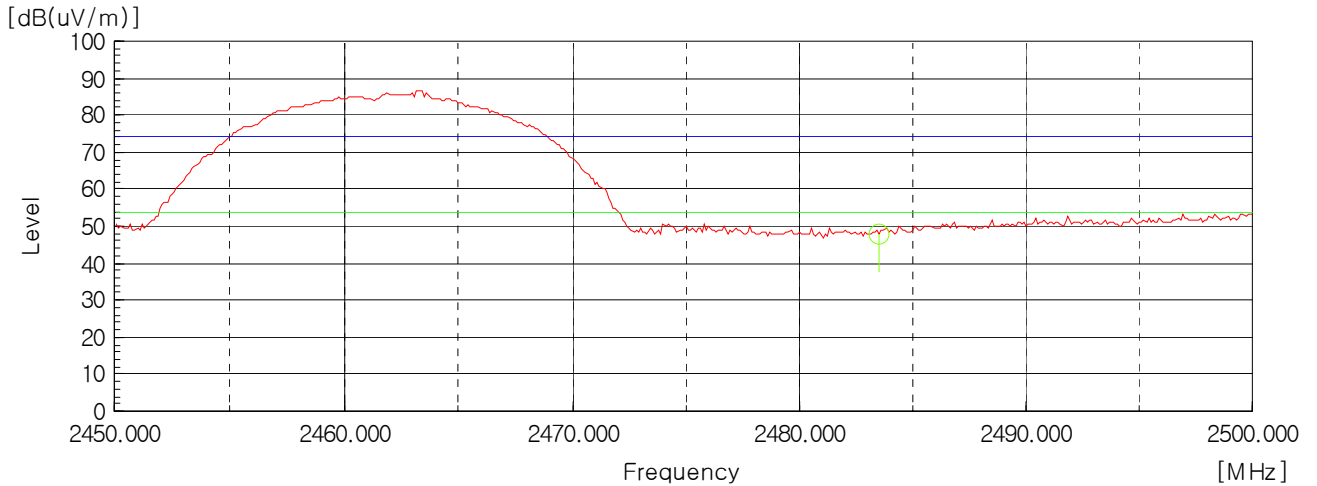

Frequency [MHz]	Result	Limit	Margin
2483.50	48.00	73.97	25.97

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Vertical)



— Peak Limit Line
— AV Limit Line

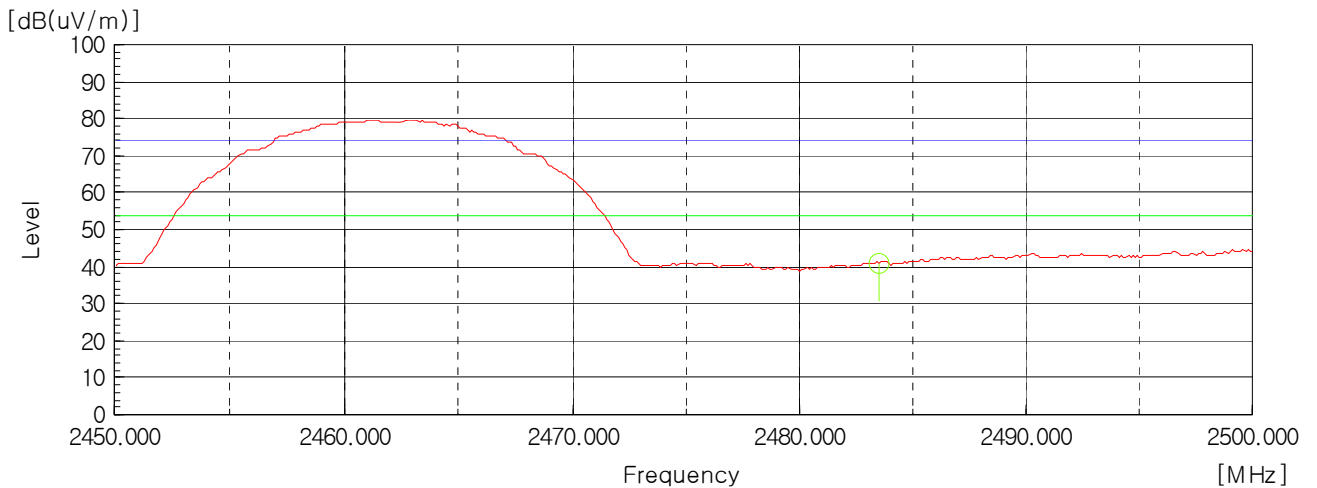

Frequency [MHz]	Result	Limit	Margin
2483.50	41.00	53.97	12.97

Plots of Bandwidth of Frequency Band Edges (802.11g)


Conducted

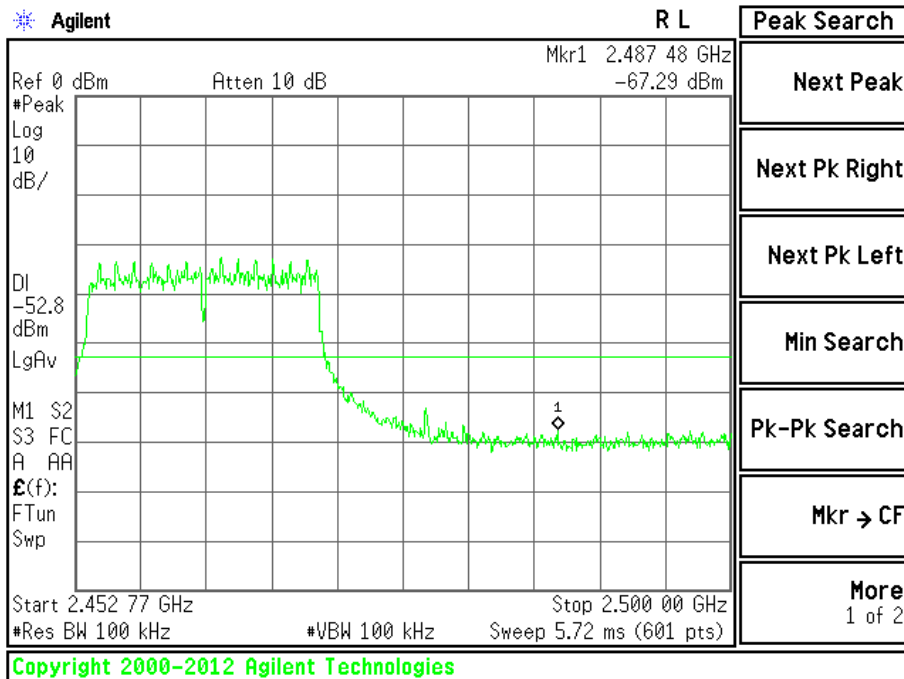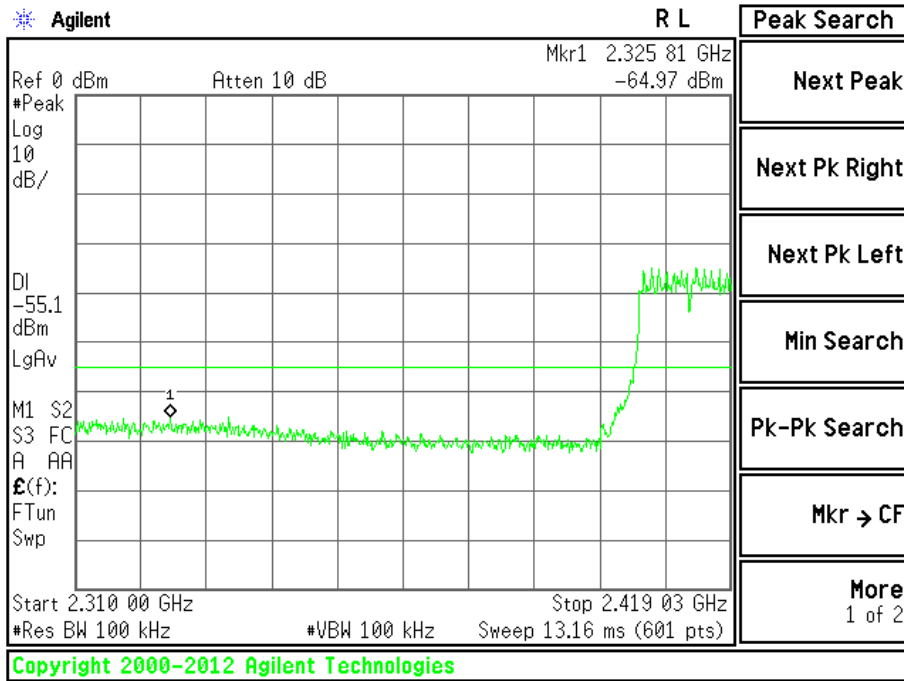

Radiated

Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Vertical)


— Peak Limit Line
— AV Limit Line

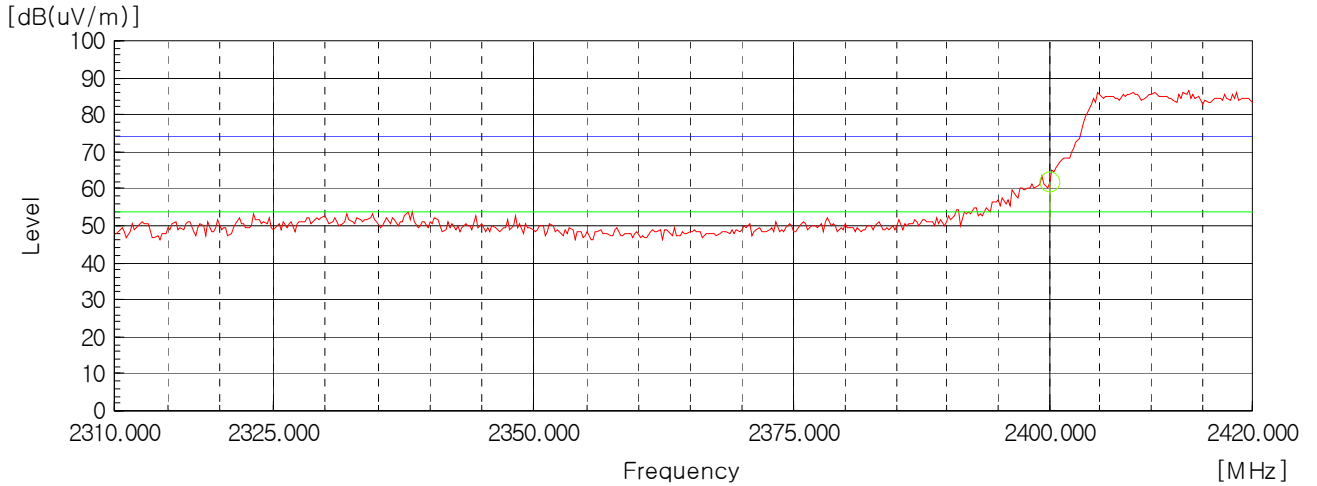

Frequency [MHz]	Result	Limit	Margin
2400.00	61.60	73.97	12.37

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Vertical)


— Peak Limit Line
— AV Limit Line

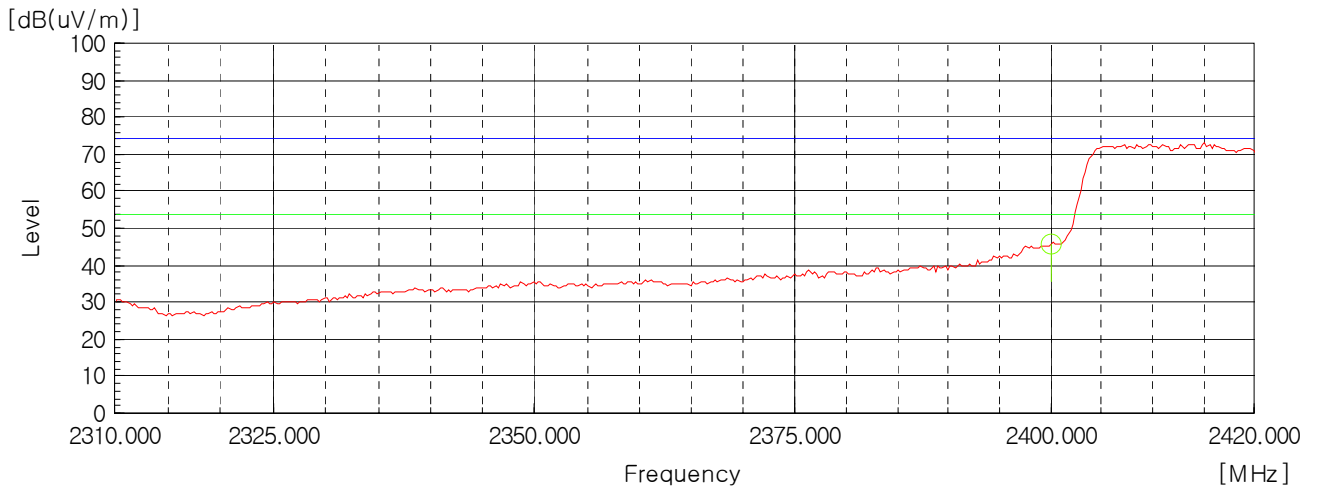

Frequency [MHz]	Result	Limit	Margin
2400.00	45.90	53.97	8.07

Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Vertical)


— Peak Limit Line
— AV Limit Line

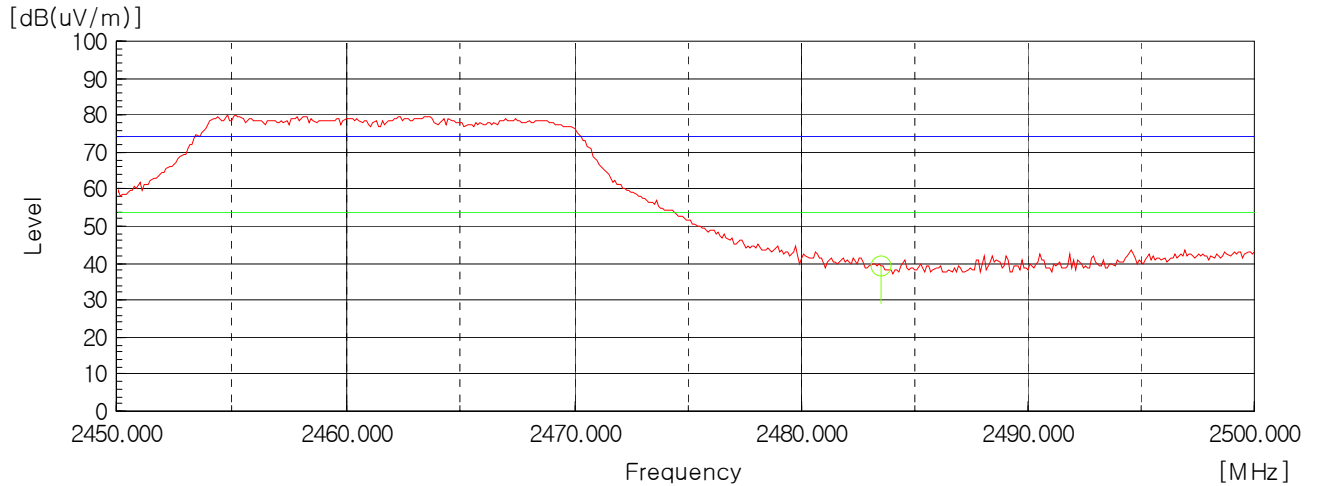

Frequency [MHz]	Result	Limit	Margin
2483.50	39.20	73.97	34.77

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Vertical)



— Peak Limit Line
— AV Limit Line

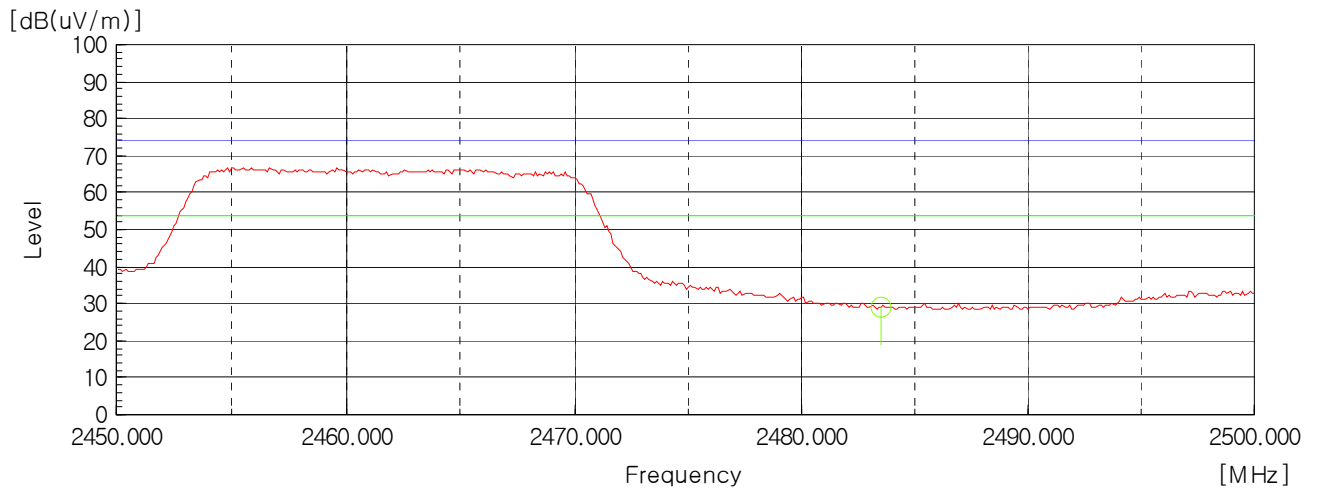

Frequency [MHz]	Result	Limit	Margin
2483.50	29.20	53.97	24.77

Plots of Bandwidth of Frequency Band Edges (802.11n(HT20))


Conducted

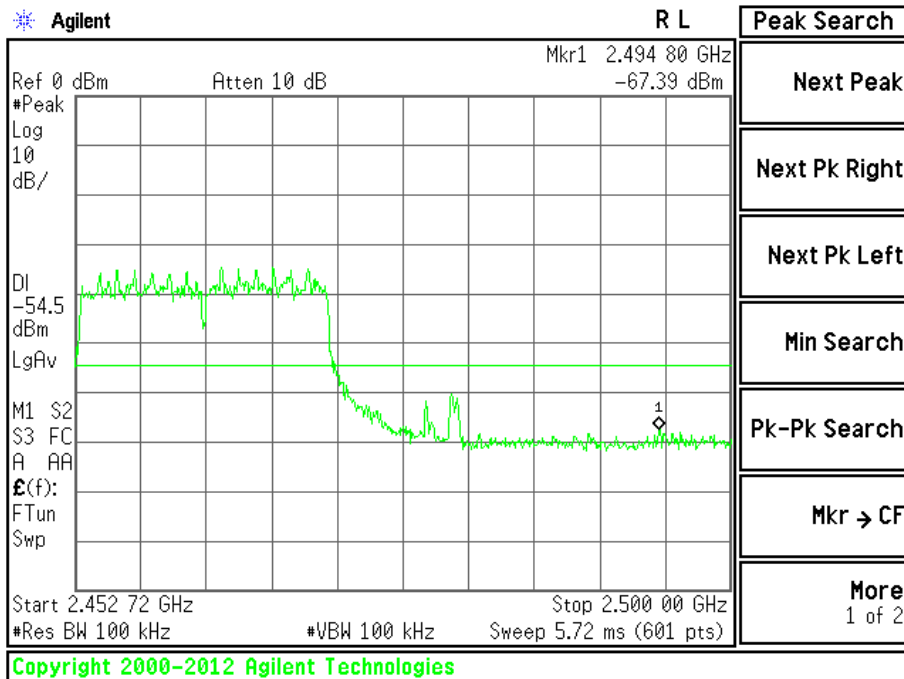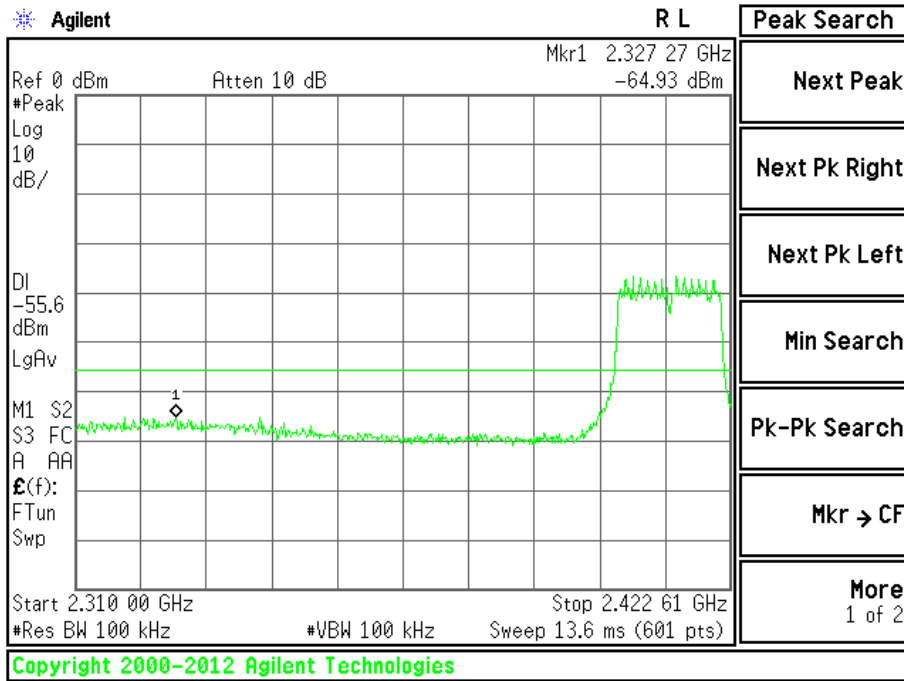

Radiated

Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Vertical)


— Peak Limit Line
— AV Limit Line

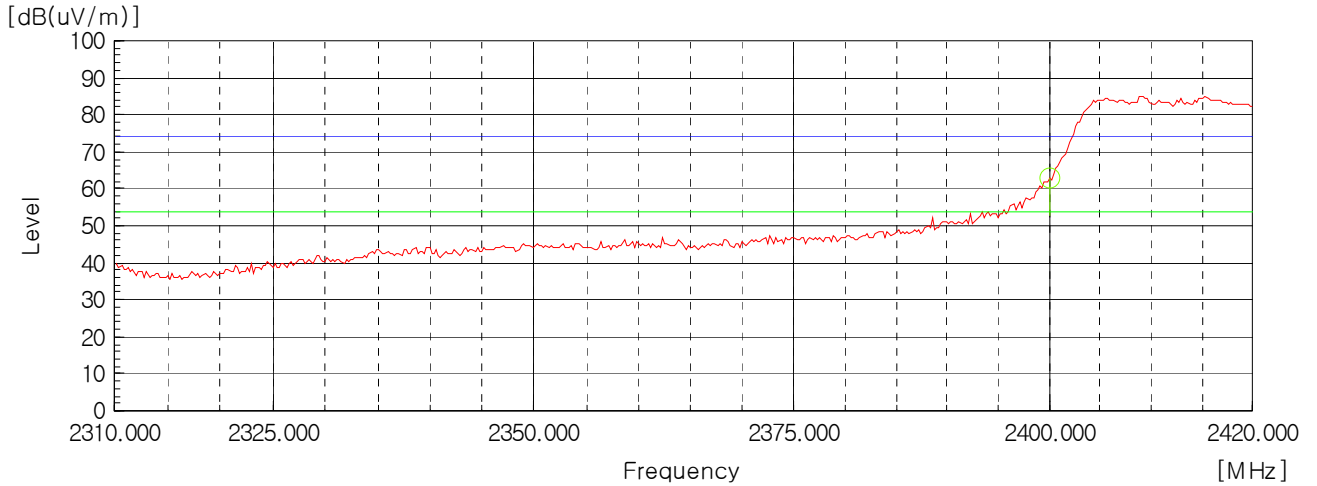

Frequency [MHz]	Result	Limit	Margin
2400.00	62.90	73.97	11.07

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Vertical)


— Peak Limit Line
— AV Limit Line

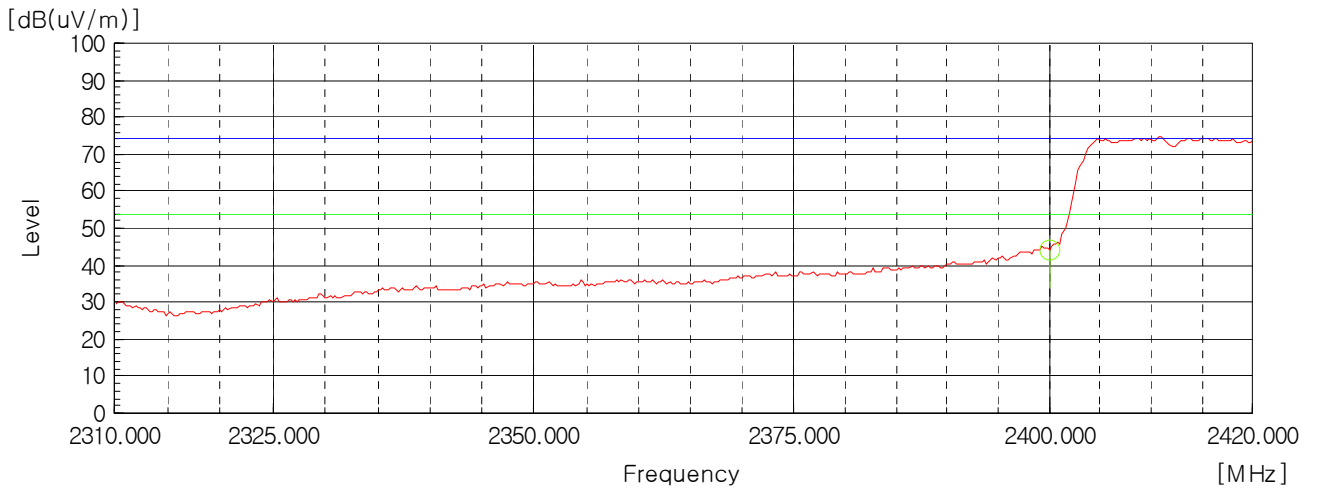

Frequency [MHz]	Result	Limit	Margin
2400.00	39.20	53.97	9.67

Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Vertical)


— Peak Limit Line
— AV Limit Line

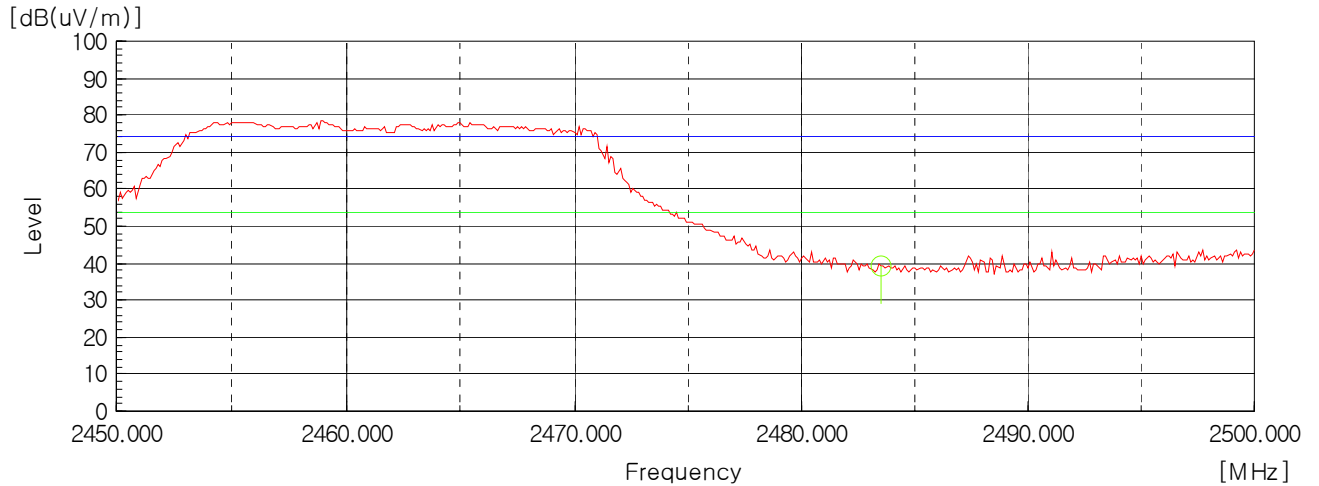

Frequency [MHz]	Result	Limit	Margin
2483.50	39.30	73.97	34.67

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Vertical)

— Peak Limit Line
— AV Limit Line

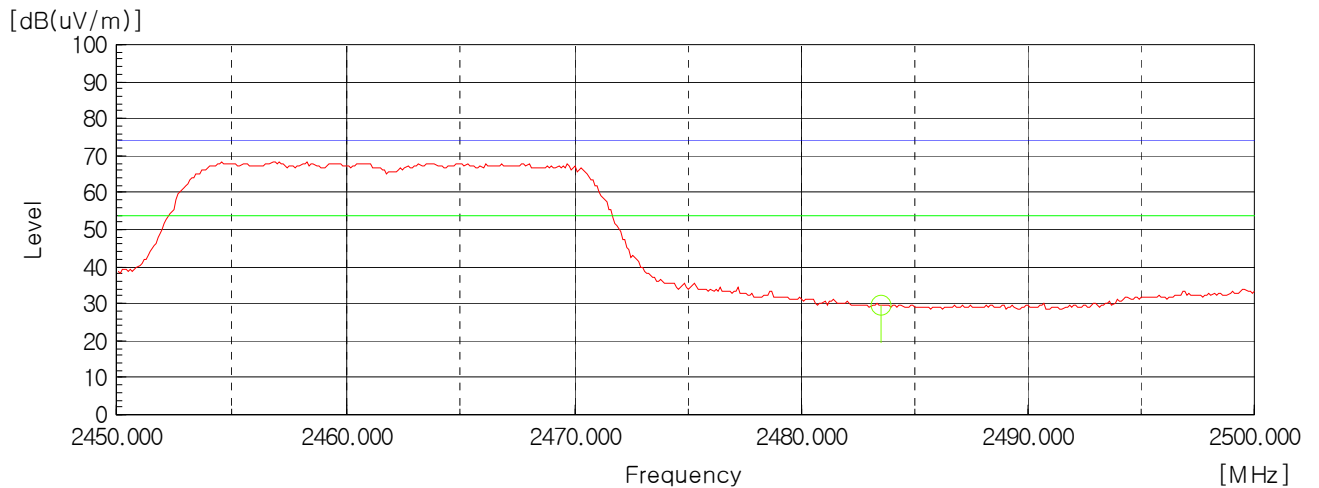

Frequency [MHz]	Result	Limit	Margin
2483.50	29.60	53.97	24.37

5.5 Power Spectral Density

EUT	IloT Wifi Gateway / WFS-205BW
Limit apply to	FCC Part 15.247(e)
Test Date	March 02, 2018
Environmental of Test	(22.8 ± 1.3) °C, (39 ± 1) % R.H., (101.8 ± 0.1) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Data


Mode	Frequency [MHz]	PSD [dBm]	Limit
802.11b	2 412	-26.87	8.00 dBm
	2 437	-25.89	
	2 462	-25.83	
802.11g	2 412	-34.61	
	2 437	-32.54	
	2 462	-32.47	
802.11n(HT20)	2 412	-36.27	
	2 437	-34.49	
	2 462	-34.35	

NOTES:


1. Measure power spectral density of relevant channel using spectrum analyzer.
2. RBW 3 kHz, VBW 10 kHz, span(=6 dB bandwidth x 1.5), Sweep time (= auto couple).
3. Please see the measured plot in next page.

Plots of Power Spectral Density (802.11b)


[2 412 MHz]

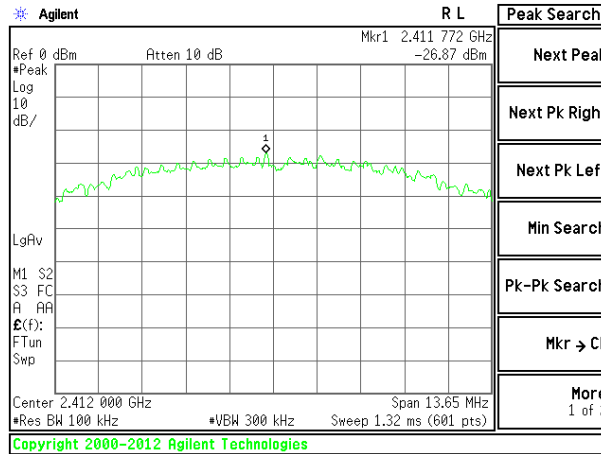

[2 437 MHz]

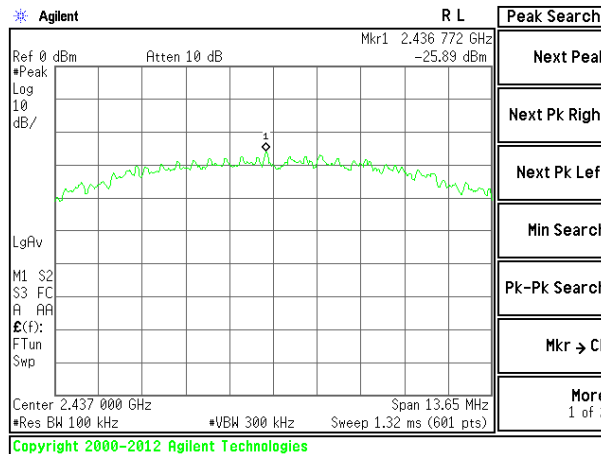


[2 462 MHz]

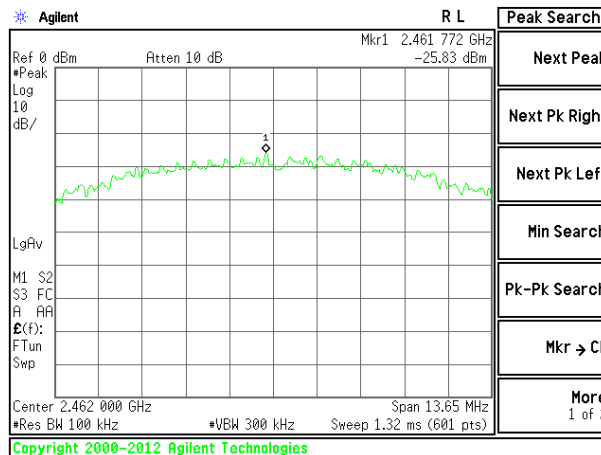


Plots of Power Spectral Density (802.11n(HT20))


[2 412 MHz]

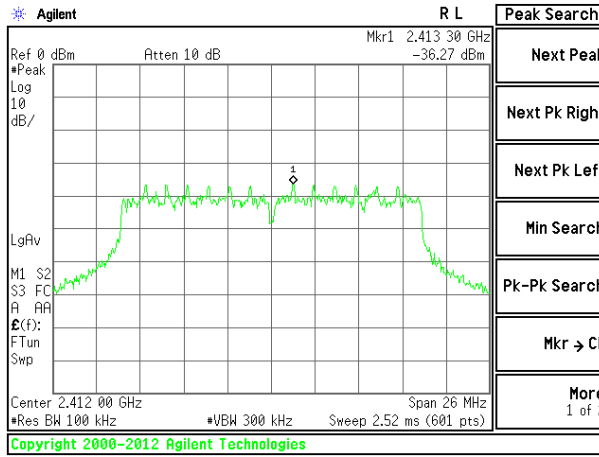

[2 437 MHz]

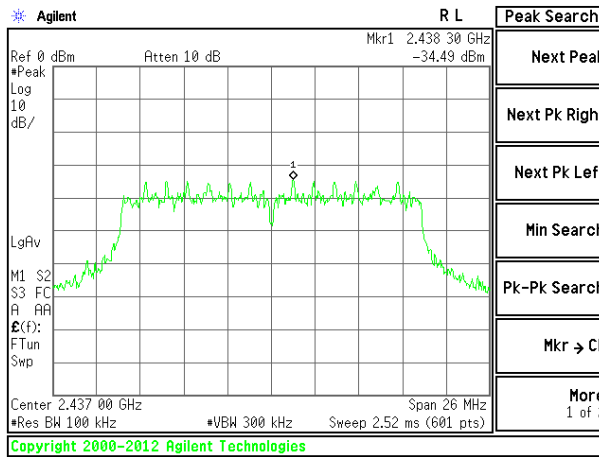

[2 462 MHz]

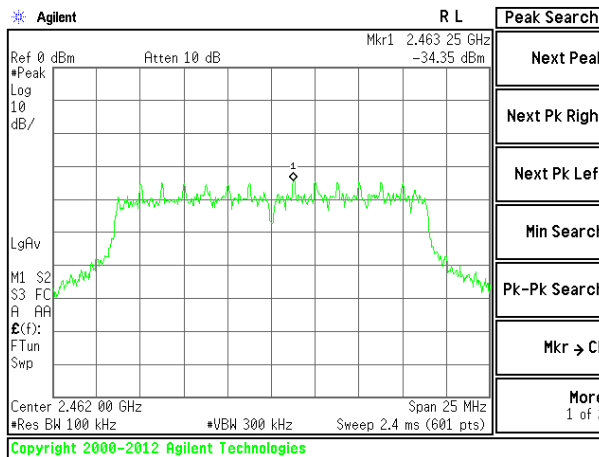

5.6 Spurious Emissions

EUT	IloT Wifi Gateway / WFS-205BW
Limit apply to	FCC Part 15.209
Operating Condition	Low CH, Middle CH, High CH Transmission
Result	Passed

Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [μ V/m]	Measurement Distance [m]
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Results

- Refer to see the measured plot in next page.

Radiated Emissions Test data

- 9 kHz to 1 GHz

Test Date	March 03, 2018
Environmental of Test	(10.5 ± 4.2) °C, (38 ± 4) % R.H., (101.3 ± 0.1) kPa


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (100 Hz, 9 kHz) (6 dB Bandwidth: 120 kHz)


- 802.11b

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
138.68	52.12	V	7.79	-31.93	100	27.98	43.50	15.52
142.50	54.76	V	7.77	-31.90	102	30.63	43.50	12.87
162.27	49.63	V	8.41	-31.75	102	26.29	43.50	17.21
323.50	48.06	H	14.23	-31.61	120	30.68	46.00	15.32
331.78	46.88	H	14.42	-31.59	119	29.71	46.00	16.29
361.54	46.77	H	15.11	-31.50	110	30.38	46.00	15.62

NOTES:

- * H : Horizontal polarization, ** V : Vertical polarization
- The cable loss value was included the Amp. Gain.
- Result = Reading + Antenna factor + Cable loss
- Margin = Limit - Result
- The measurement was performed for the frequency range above 9 kHz according to FCC Part 15.209.

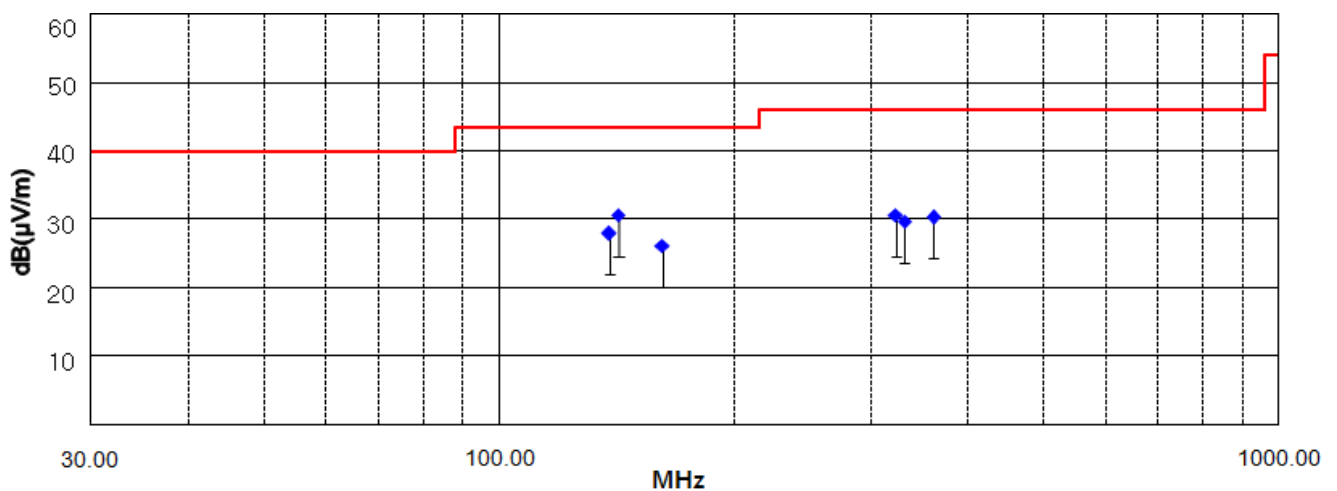


Quasi-peak 


- 802.11g

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
139.41	53.88	V	7.74	-31.93	100	29.69	43.50	13.81
239.51	47.21	V	12.66	-31.81	115	28.06	46.00	17.94
241.33	48.94	V	12.71	-31.81	115	29.84	46.00	16.16
295.87	50.56	H	13.63	-31.69	125	32.50	46.00	13.50
315.31	51.83	H	14.04	-31.64	120	34.23	46.00	11.77
325.15	53.20	H	14.27	-31.61	119	35.86	46.00	10.14

NOTES:

1. * H : Horizontal polarization, ** V : Vertical polarization
2. The cable loss value was included the Amp. Gain.
3. Result = Reading + Antenna factor + Cable loss
4. Margin = Limit - Result
5. The measurement was performed for the frequency range above 9 kHz according to FCC Part 15.209.

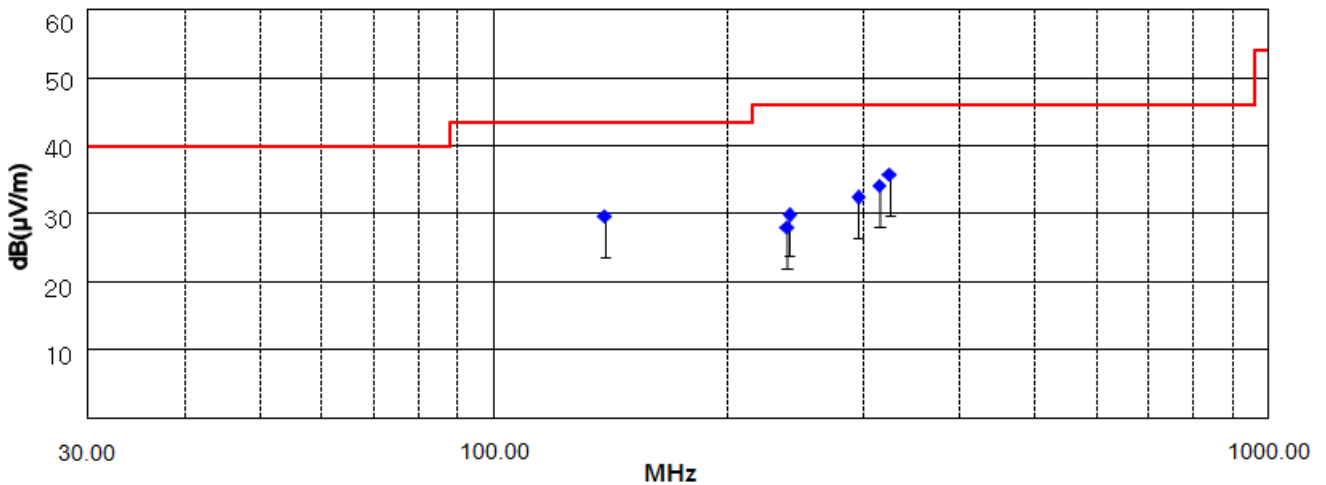


Quasi-peak 


- 802.11n(HT20)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
139.39	51.66	V	7.74	-31.93	100	27.47	43.50	16.03
240.87	38.64	V	12.70	-31.81	115	19.53	46.00	26.47
246.63	51.26	V	12.84	-31.82	115	32.28	46.00	13.72
295.23	54.65	H	13.62	-31.69	125	36.58	46.00	9.42
310.58	54.01	H	13.93	-31.65	125	36.29	46.00	9.71
329.06	50.24	H	14.36	-31.60	120	33.00	46.00	13.00

NOTES:

- * H : Horizontal polarization, ** V : Vertical polarization
- The cable loss value was included the Amp. Gain.
- Result = Reading + Antenna factor + Cable loss
- Margin = Limit - Result
- The measurement was performed for the frequency range above 9 kHz according to FCC Part 15.209.

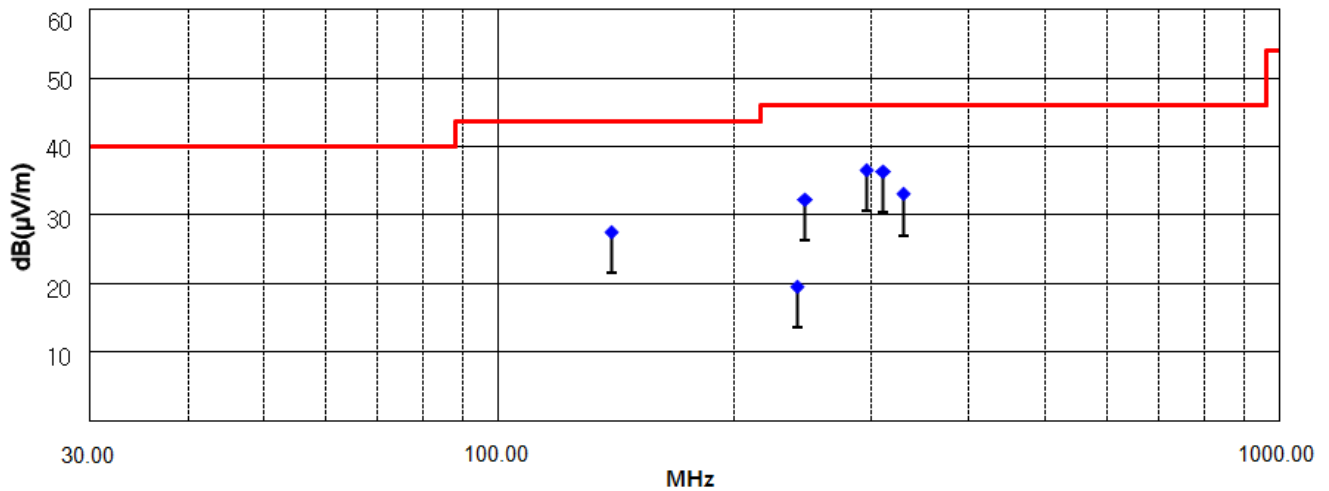

Quasi-peak 

- Above 1 GHz (1 GHz to 25 GHz)

Test Date	March 03, 2018
Environmental of Test	(12.6 ± 2.5) °C, (39 ± 3) % R.H., (101.2 ± 0.1) kPa

- 802.11b

1. Low CH (2 412 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 375.69	81.68	65.88	27.32	-46.07	62.93	47.13	73.97	53.97	11.04	6.84	H	150
2 520.71	85.49	65.23	27.76	-45.60	67.65	47.39	73.97	53.97	6.32	6.58	H	150
4 027.52	76.65	62.37	29.60	-45.60	60.65	46.37	73.97	53.97	13.32	7.60	V	150
4 828.76	75.40	61.52	31.12	-43.99	62.53	48.65	73.97	53.97	11.44	5.32	V	150
6 430.08	57.84	55.49	34.02	-42.69	49.17	46.82	73.97	53.97	24.80	7.15	V	150
23 846.44	43.26	30.64	37.93	-28.88	52.31	39.69	73.97	53.97	21.66	14.28	H	150

2. Middle CH (2 437 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 378.76	82.42	66.35	27.33	-46.06	63.69	47.62	73.97	53.97	10.28	6.35	H	150
2 517.87	84.80	63.29	27.75	-45.60	66.95	45.44	73.97	53.97	7.02	8.53	H	150
4 061.41	78.41	63.83	29.66	-45.52	62.55	47.97	73.97	53.97	11.42	6.00	V	150
4 876.06	71.96	56.67	31.20	-43.92	59.24	43.95	73.97	53.97	14.73	10.02	V	150
6 501.31	58.11	52.39	34.27	-42.59	49.79	44.07	73.97	53.97	24.18	9.90	V	150
23 248.18	43.24	31.34	38.05	-29.39	51.90	40.00	73.97	53.97	22.07	13.97	H	150

3. High CH (2 462 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 376.50	80.62	63.39	27.32	-46.07	61.87	44.64	73.97	53.97	12.10	9.33	H	150
2 549.26	84.41	65.16	27.80	-45.59	66.62	47.37	73.97	53.97	7.35	6.60	H	150
4 109.06	76.37	61.29	29.76	-45.42	60.71	45.63	73.97	53.97	13.26	8.34	H	150
4 921.94	68.28	57.67	31.28	-43.84	55.72	45.11	73.97	53.97	18.25	8.86	V	150
6 572.25	54.89	50.37	34.44	-42.50	46.83	42.31	73.97	53.97	27.14	11.66	V	150
23 943.11	43.50	31.23	37.91	-28.79	52.62	40.35	73.97	53.97	21.35	13.62	V	150

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Factor = Antenna factor + Cable loss + Preamp
3. Result = Reading + Factor
4. Margin = Limit - Result
5. Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
6. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
7. Spectrum setting:
 - a. Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - b. AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 kHz, Sweep = Auto

- 802.11g

1. Low CH (2 412 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 335.06	74.46	63.28	27.18	-46.23	55.41	44.23	73.97	53.97	18.56	9.74	H	150
2 513.19	80.26	66.76	27.75	-45.60	62.41	48.91	73.97	53.97	11.56	5.06	H	150
4 015.20	70.37	64.21	29.57	-45.63	54.31	48.15	73.97	53.97	19.66	5.82	H	150
4 815.88	58.34	53.09	31.09	-44.02	45.41	40.16	73.97	53.97	28.56	13.81	V	150
6 430.06	56.84	52.98	34.02	-42.69	48.17	44.31	73.97	53.97	25.80	9.66	V	150
23 315.48	43.20	31.37	38.04	-29.35	51.89	40.06	73.97	53.97	22.08	13.91	H	150

2. Middle CH (2 437 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 352.33	79.03	66.42	27.24	-46.16	60.11	47.50	73.97	53.97	13.86	6.47	H	150
2 537.76	81.06	67.63	27.78	-45.59	63.25	49.82	73.97	53.97	10.72	4.15	H	150
4 061.87	76.42	61.20	29.66	-45.52	60.56	45.34	73.97	53.97	13.41	8.63	H	150
4 874.69	63.72	54.04	31.19	-43.92	50.99	41.31	73.97	53.97	22.98	12.66	V	150
6 500.31	56.39	52.04	34.27	-42.59	48.07	43.72	73.97	53.97	25.90	10.25	V	150
23 628.93	43.16	30.95	37.97	-29.10	52.03	39.82	73.97	53.97	21.94	14.15	V	150

3. High CH (2 462 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 373.44	75.32	65.80	27.31	-46.08	56.55	47.03	73.97	53.97	17.42	6.94	H	150
2 551.18	81.16	64.27	27.80	-45.59	63.37	46.48	73.97	53.97	10.60	7.49	H	150
4 108.53	74.61	60.24	29.76	-45.42	58.95	44.58	73.97	53.97	15.02	9.39	H	150
4 932.41	61.37	46.68	31.29	-43.82	48.84	34.15	73.97	53.97	25.13	19.82	V	150
6 572.03	54.82	49.33	34.44	-42.50	46.76	41.27	73.97	53.97	27.21	12.70	V	150
24 183.69	43.23	30.86	37.98	-28.64	52.57	40.20	73.97	53.97	21.40	13.77	V	150

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Factor = Antenna factor + Cable loss + Preamp
3. Result = Reading + Factor
4. Margin = Limit - Result
5. Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
6. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
7. Spectrum setting:
 - a. Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - b. AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 kHz, Sweep = Auto

- 802.11n(HT20)

1. Low CH (2 412 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 325.37	76.21	68.46	27.15	-46.26	57.10	49.35	73.97	53.97	16.87	4.62	H	150
2 514.66	81.16	66.39	27.75	-45.60	63.31	48.54	73.97	53.97	10.66	5.43	H	150
4 027.27	70.67	61.25	29.60	-45.60	54.67	45.25	73.97	53.97	19.30	8.72	H	150
4 815.11	65.26	52.72	31.09	-44.02	52.33	39.79	73.97	53.97	21.64	14.18	V	150
6 430.82	58.83	52.39	34.02	-42.69	50.16	43.72	73.97	53.97	23.81	10.25	V	150
24 724.61	43.26	31.38	38.23	-28.29	53.20	41.32	73.97	53.97	20.77	12.65	V	150

2. Middle CH (2 437 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 348.03	80.62	66.46	27.23	-46.18	61.67	47.51	73.97	53.97	12.30	6.46	H	150
2 528.56	82.36	67.29	27.77	-45.60	64.53	49.46	73.97	53.97	9.44	4.51	H	150
4 062.18	76.62	64.23	29.67	-45.52	60.77	48.38	73.97	53.97	13.20	5.59	H	150
4 874.44	64.97	53.28	31.19	-43.92	52.24	40.55	73.97	53.97	21.73	13.42	V	150
6 471.95	57.77	53.73	34.17	-42.63	49.31	45.27	73.97	53.97	24.66	8.70	V	150
24 843.28	43.44	31.16	38.29	-28.18	53.55	41.27	73.97	53.97	20.42	12.70	V	150

3. High CH (2 462 MHz)

Frequency [MHz]	Reading [dB(μV)]		Ant. Factor [dB/m]	Cable - AMP Loss [dB]	Result [dB(μV/m)]		Limit [dB(μV/m)]		Margin [dB]		Polarity (*H/**V)	Height [cm]
	Peak	Average			Peak	Average	Peak	Average	Peak	Average		
2 365.94	74.63	65.80	27.28	-46.11	55.80	46.97	73.97	53.97	18.17	7.00	H	150
2 568.22	81.19	65.25	27.82	-45.58	63.43	47.49	73.97	53.97	10.54	6.48	H	150
4 097.49	74.31	63.88	29.74	-45.44	58.61	48.18	73.97	53.97	15.36	5.79	H	150
4 933.78	62.28	48.76	31.30	-43.82	49.76	36.24	73.97	53.97	24.21	17.73	V	150
6 571.06	58.14	55.36	34.44	-42.50	50.08	47.30	73.97	53.97	23.89	6.67	V	150
23 243.83	43.68	31.22	38.05	-29.39	52.34	39.88	73.97	53.97	21.63	14.09	V	150



NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Factor = Antenna factor + Cable loss + Preamp
3. Result = Reading + Factor
4. Margin = Limit - Result
5. Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
6. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
7. Spectrum setting:
 - a. Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - b. AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 kHz, Sweep = Auto



Plots of Spurious Emissions (Conducted Measurement) (802.11b)

Test Date	March 02, 2018
Environmental of Test	(24.1 ± 0.3) °C, (41 ± 1) % R.H., (101.8 ± 0.0) kPa



[CH Low]

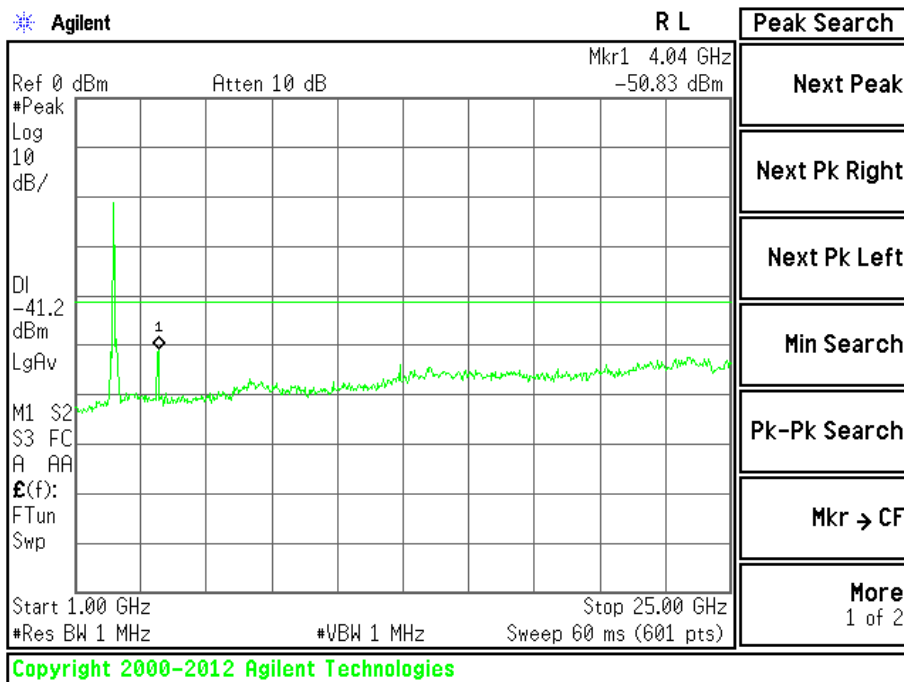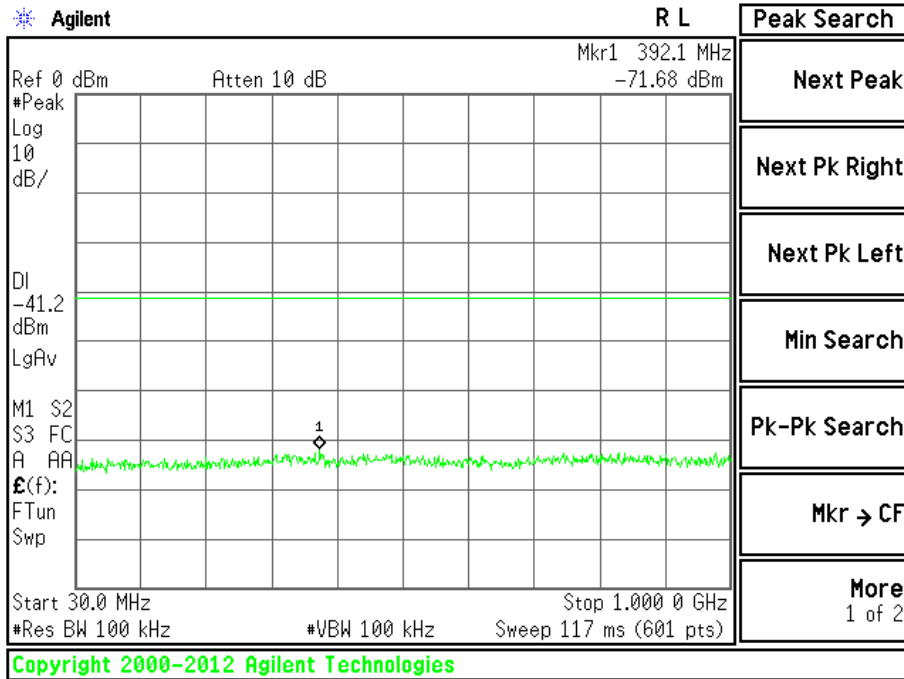

[CH Mid]

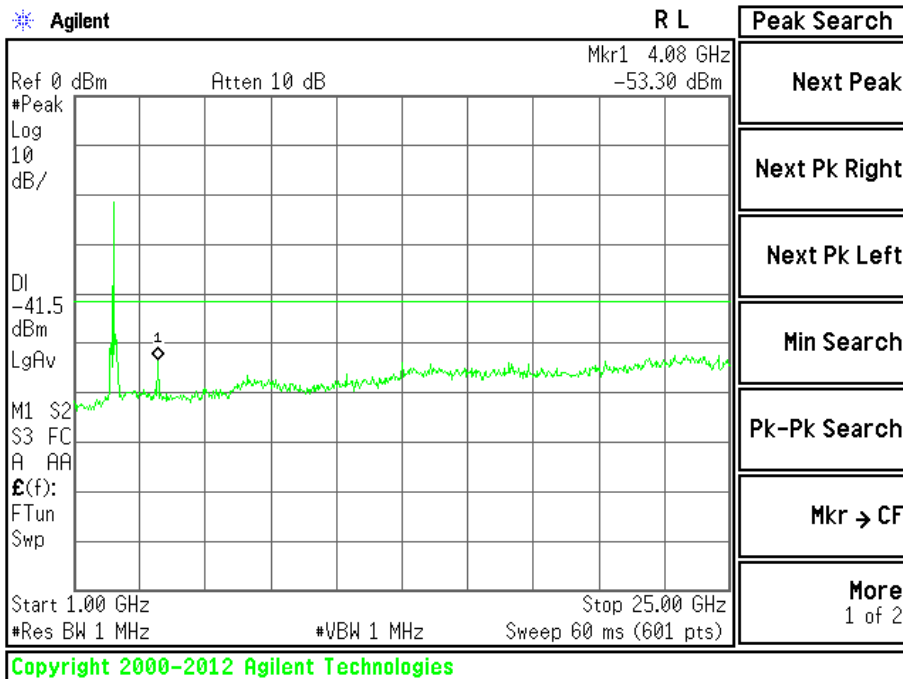
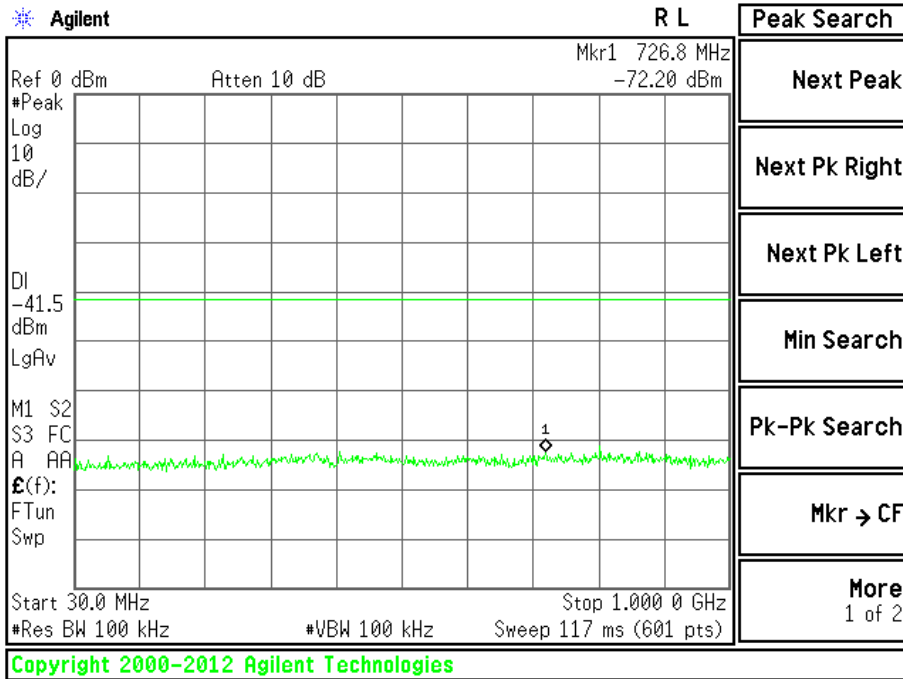


[CH High]

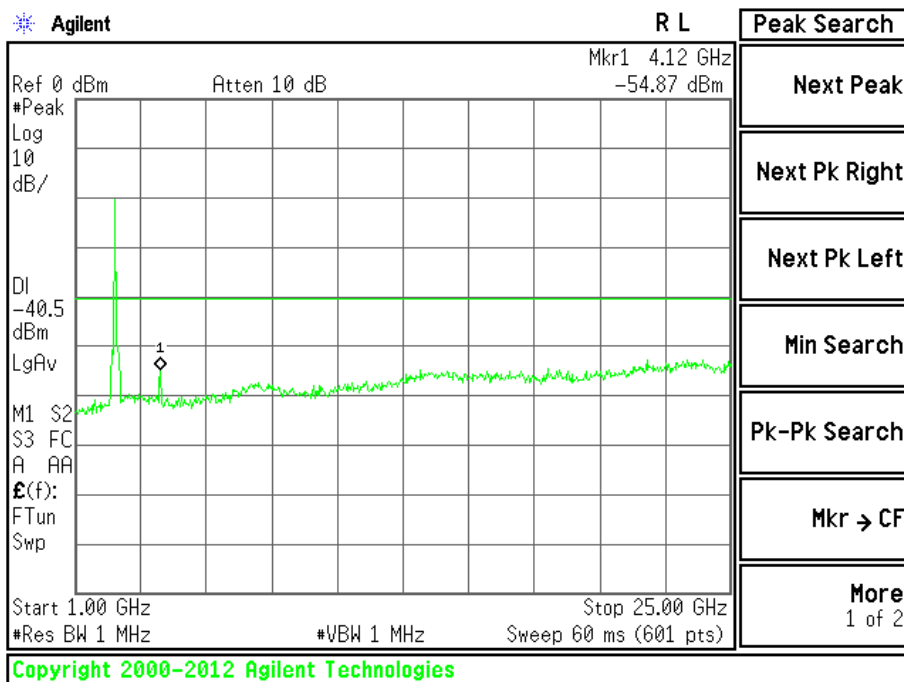
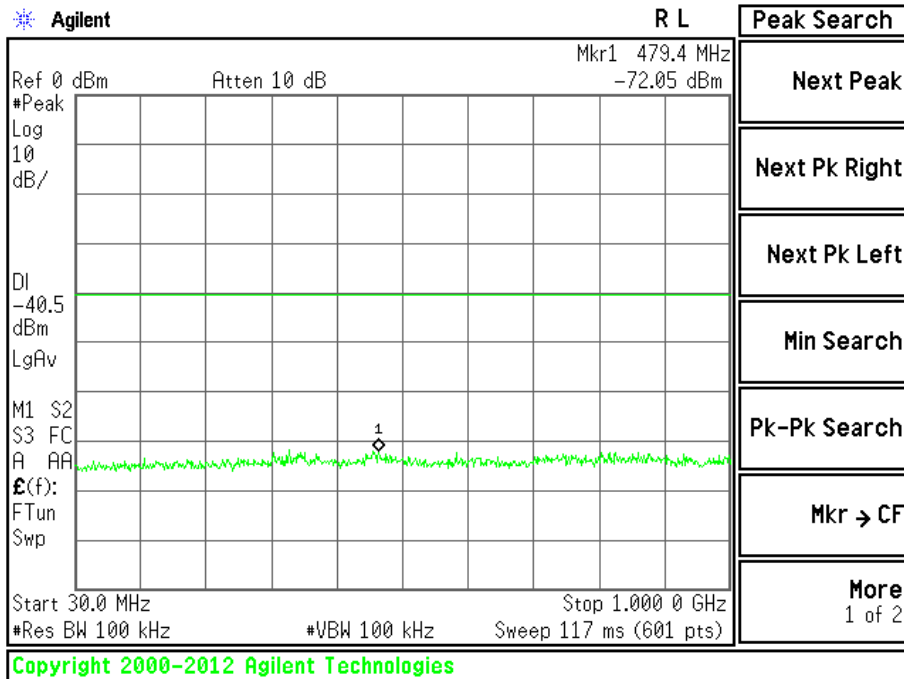


Plots of Spurious Emissions (Conducted Measurement) (802.11g)



[CH Low]

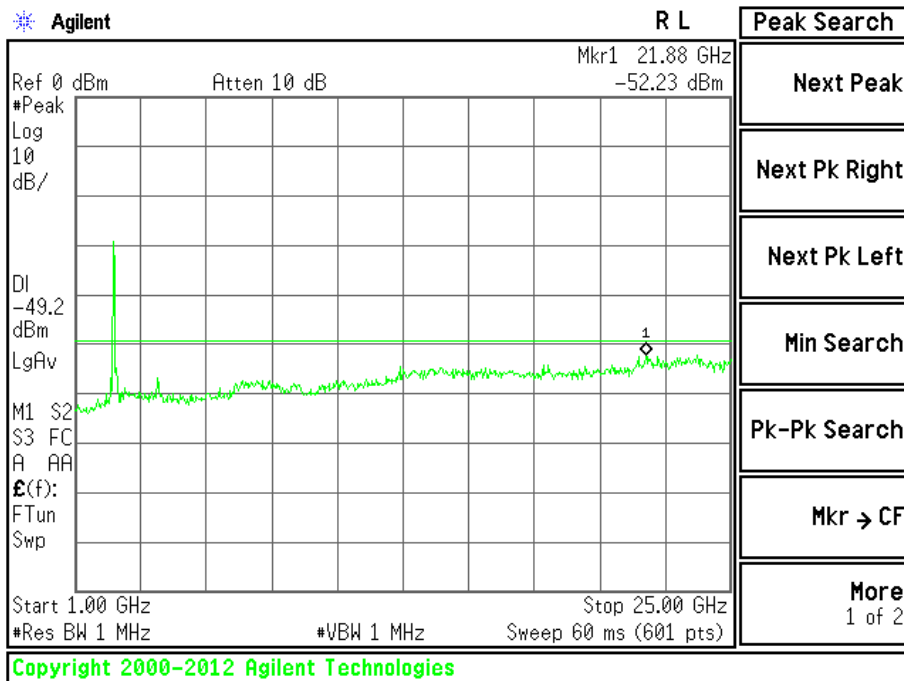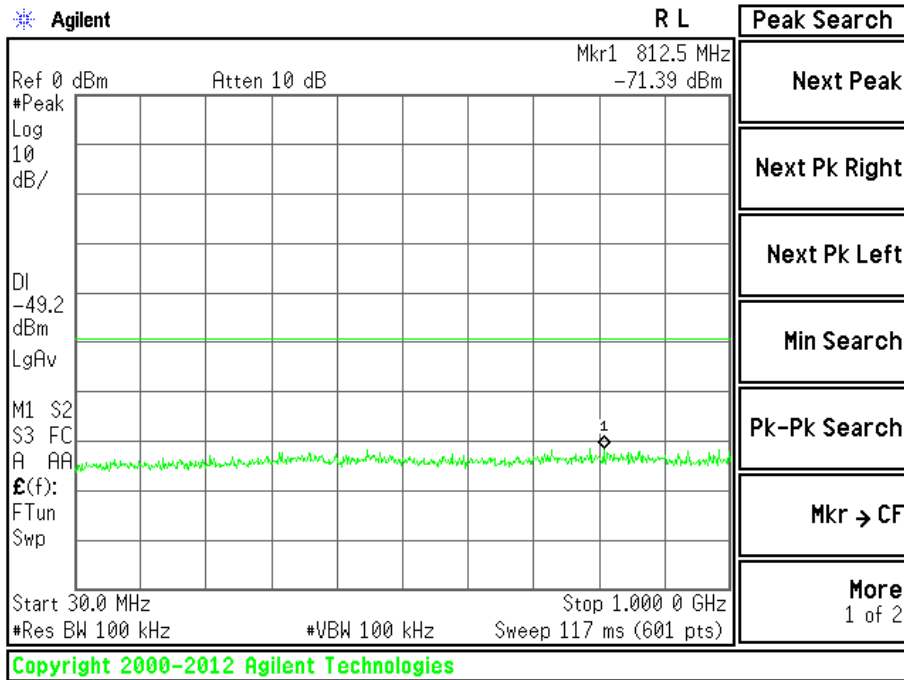

[CH Mid]

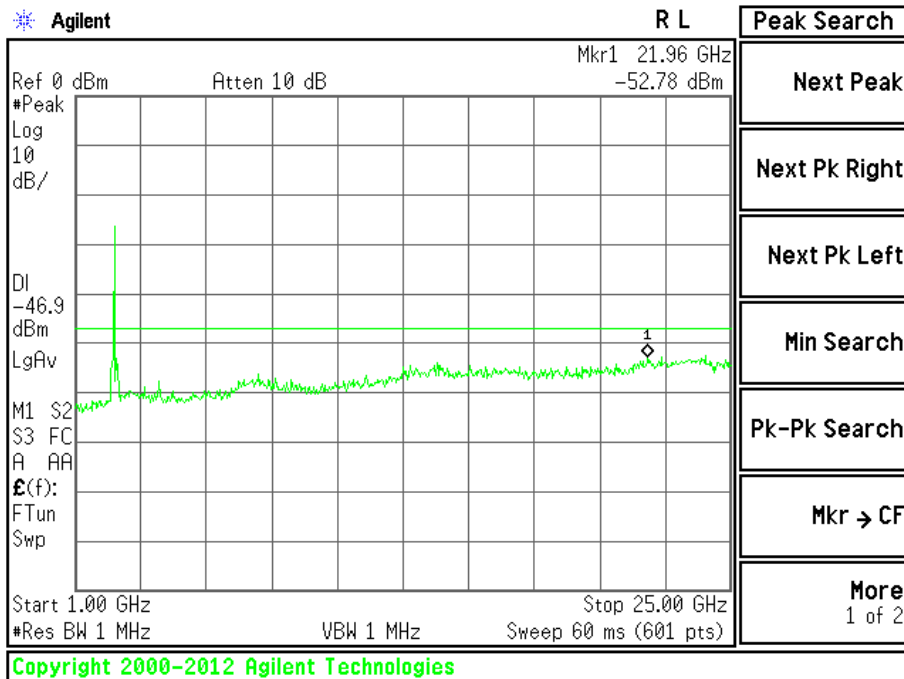
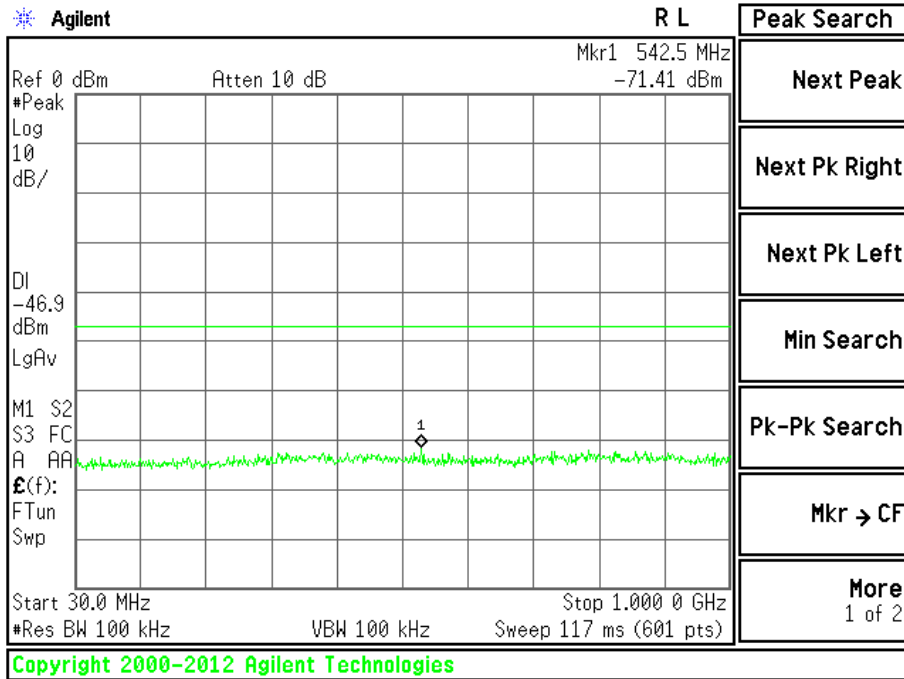


[CH High]

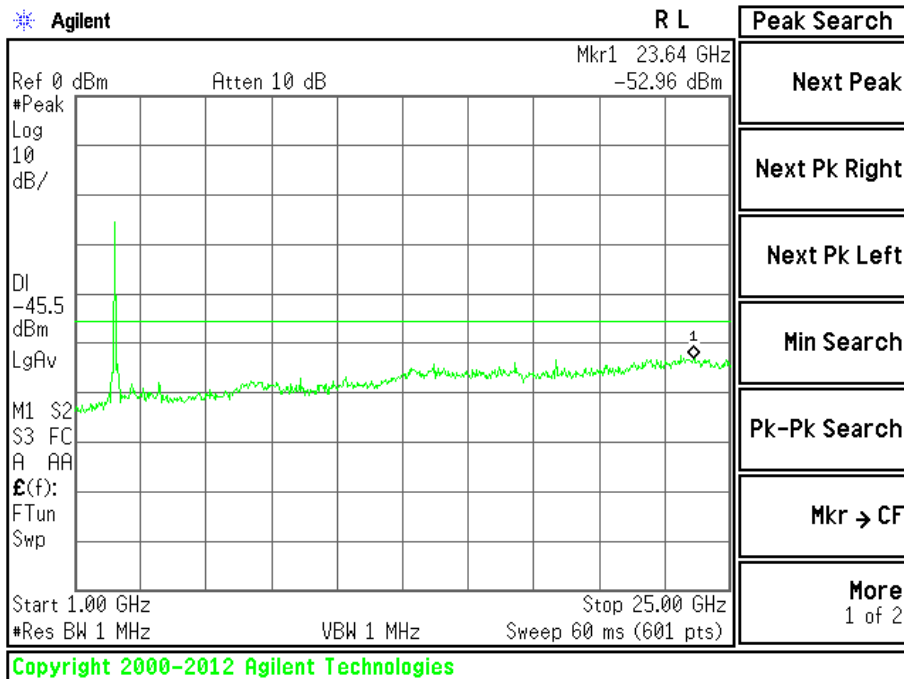
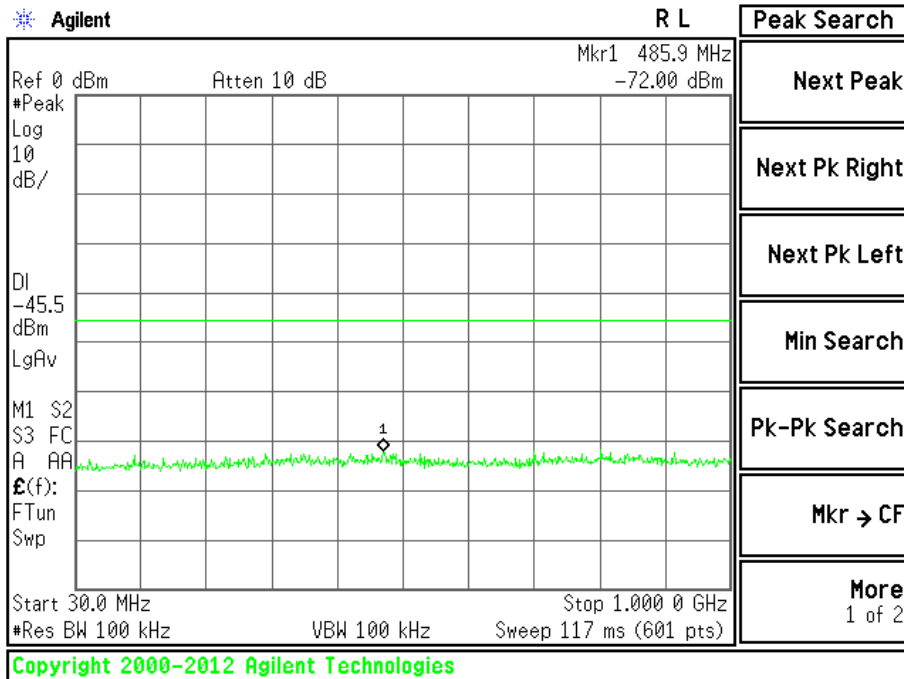


Plots of Spurious Emissions (Conducted Measurement) (802.11n(HT20))



[CH Low]

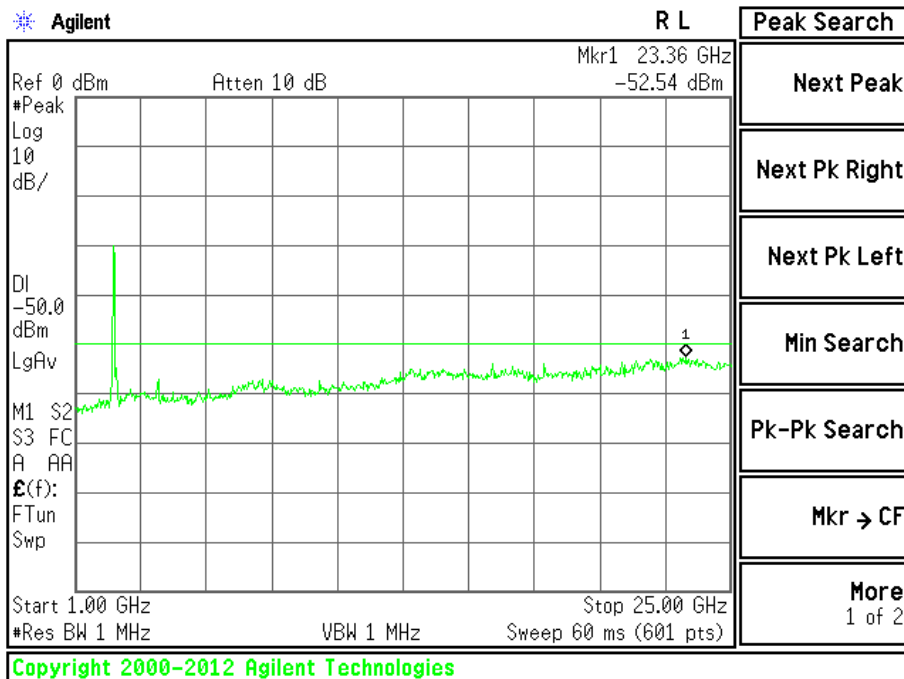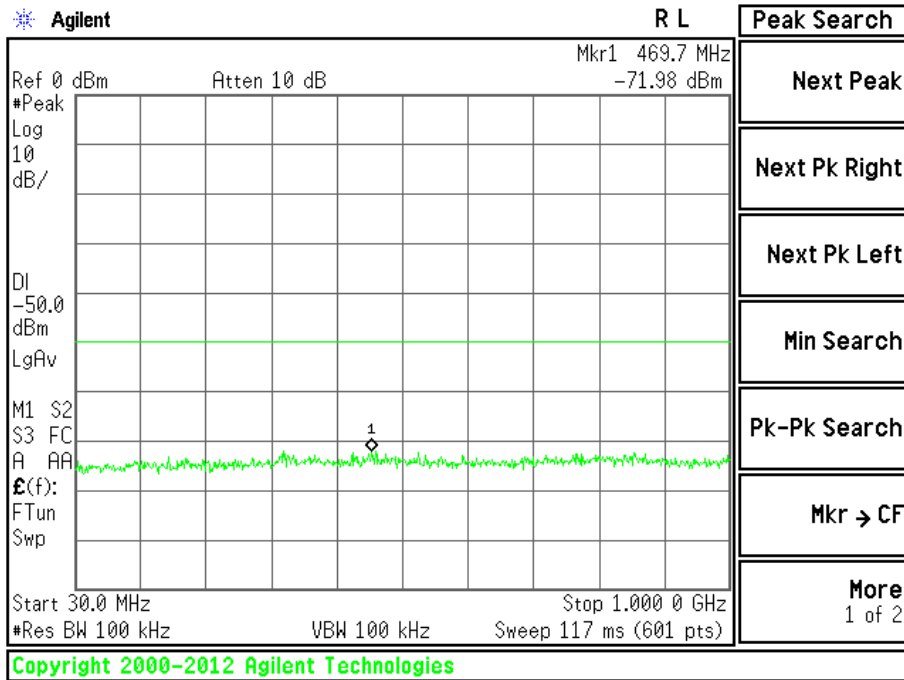

[CH Mid]

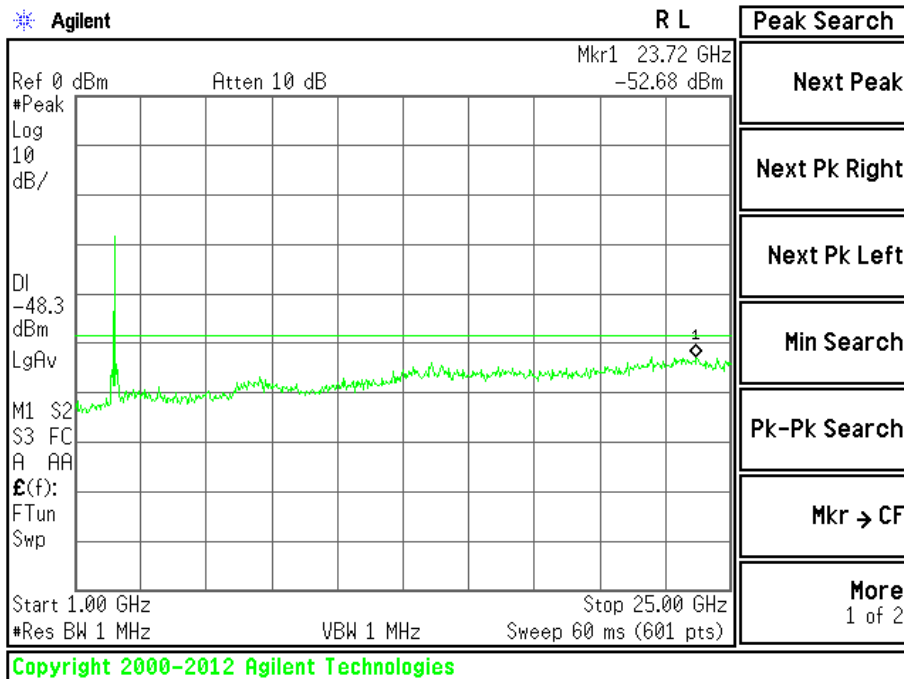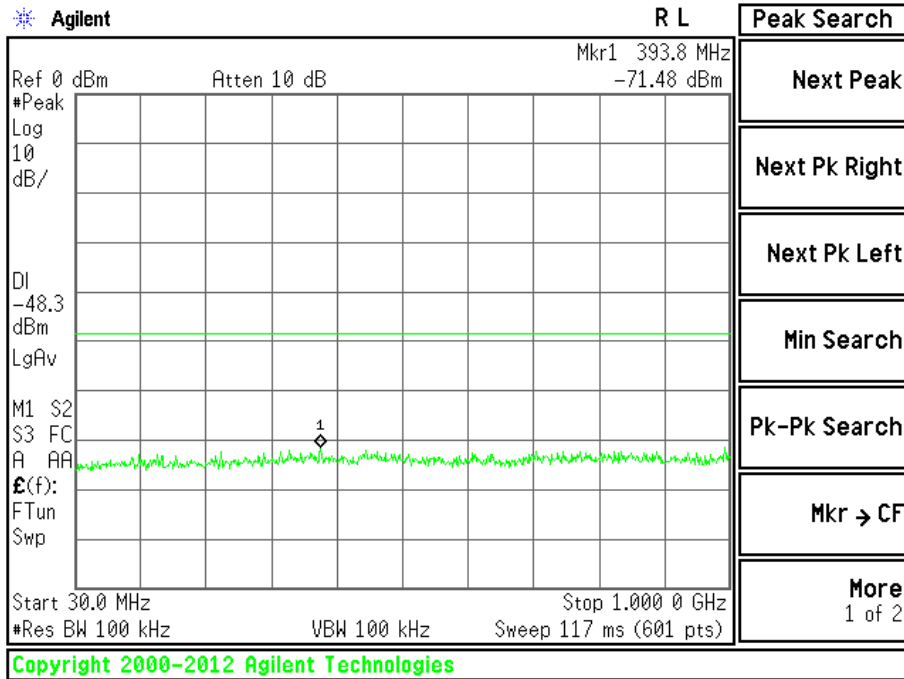

[CH High]

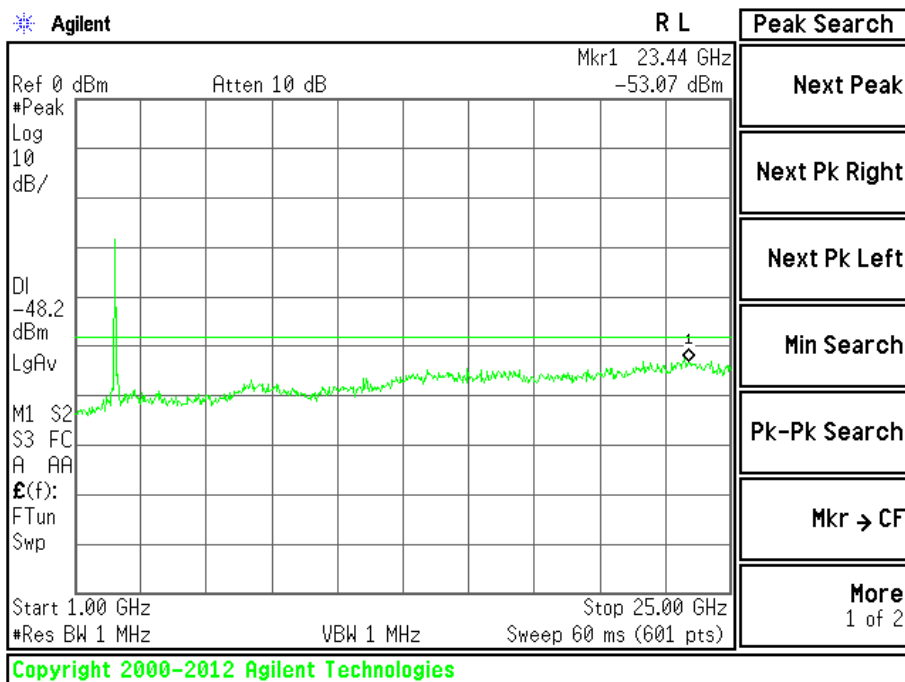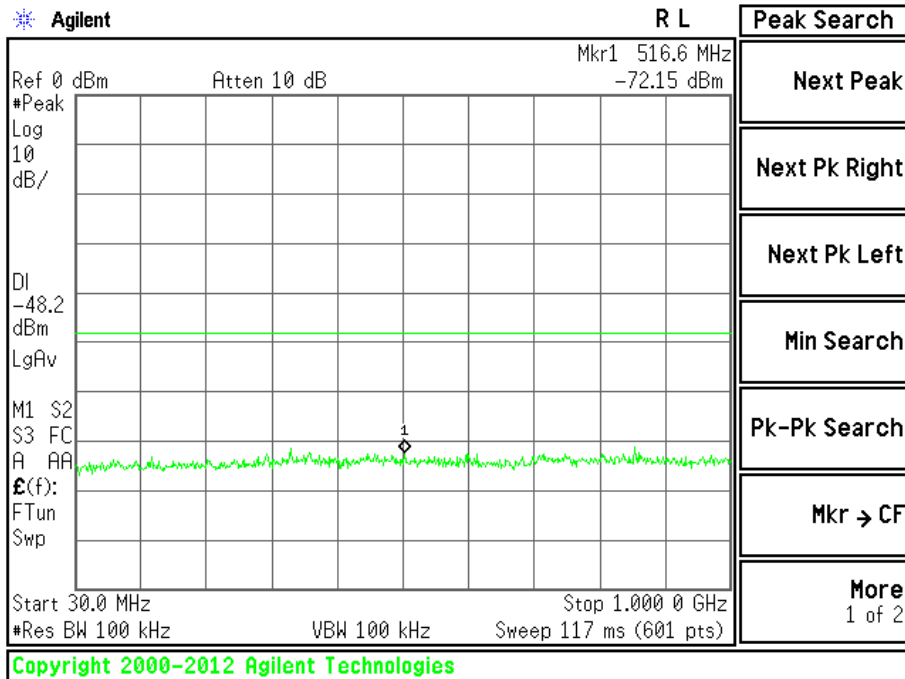

5.7 Conducted Emissions Measurement

EUT	IloT Wifi Gateway / WFS-205BW
Limit apply to	FCC Part 15.207
Test Date	March 06, 2018
Environmental of Test	(23.7 ± 1.0) °C, (38 ± 1) % R.H., (102.9 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed by 3.50 dB

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission [MHz]	Conducted limit [dB(μV)]	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

- Refer to see the measured plot in next page.

Conducted Emission Test Data

The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)


NOTES:

1. Please see the measured data and graph in next page.
2. The Level (Result) value was included the reading, LISN factor and cable loss.
3. Delta (Margin) value = Limit - Level (Result)
4. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.207.
5. If the Quasi-Peak limit is met when using a Peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the Quasi-Peak detector receiver is unnecessary.
6. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

Line: HOT

ETL EMC Laboratory
 Conducted Emission Test Result
 EUT: ETLT180125.0010
 Manuf:
 Op Cond:
 Operator:
 Test Spec:
 Comment: H

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Peaks: 16
 Acc Margin: 10 dB

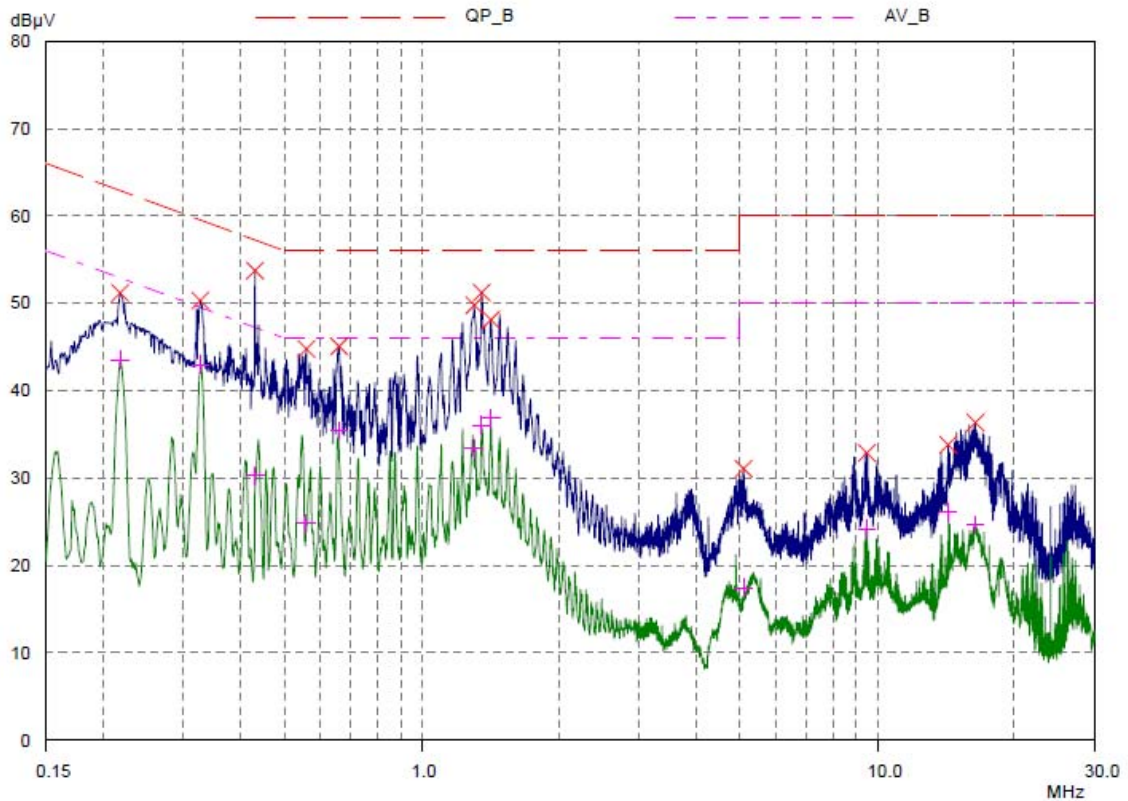

ETL EMC Laboratory
 Conducted Emission Test Result

EUT: ETLT180125.0010
 Manuf:
 Op Cond:
 Operator:
 Test Spec:
 Comment: H

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Peaks: 16
 Acc Margin: 10 dB

Peak Search Results

Frequency MHz	PK Level dBµV	PK Limit dBµV	PK Delta dB
0.218	51.16	62.89	11.73
0.327	50.30	59.53	9.23
0.431	53.73	57.23	3.50
0.559	44.74	56.00	11.26
0.659	45.04	56.00	10.96
1.305	49.75	56.00	6.25
1.355	51.20	56.00	4.80
1.42	48.09	56.00	7.91
5.09	31.06	60.00	28.94
9.485	32.86	60.00	27.14
14.31	33.80	60.00	26.20
16.42	36.33	60.00	23.67

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB
0.218	43.52	52.89	9.37
0.327	42.96	49.53	6.57
0.431	30.28	47.23	16.95
0.559	24.81	46.00	21.19
0.659	35.45	46.00	10.55
1.305	33.36	46.00	12.64
1.355	36.05	46.00	9.95
1.42	36.86	46.00	9.14
5.09	17.45	50.00	32.55
9.485	24.18	50.00	25.82
14.31	26.05	50.00	23.95
16.42	24.66	50.00	25.34


* limit exceeded

Line: Neutral

ETL EMC Laboratory
 Conducted Emission Test Result

EUT: ETLT180125.0010
 Manuf:
 Op Cond:
 Operator:
 Test Spec:
 Comment: N

Prescan Measurement:	Detectors:	X PK / + AV
	Meas Time:	see scan settings
	Peaks:	16
	Acc Margin:	10 dB

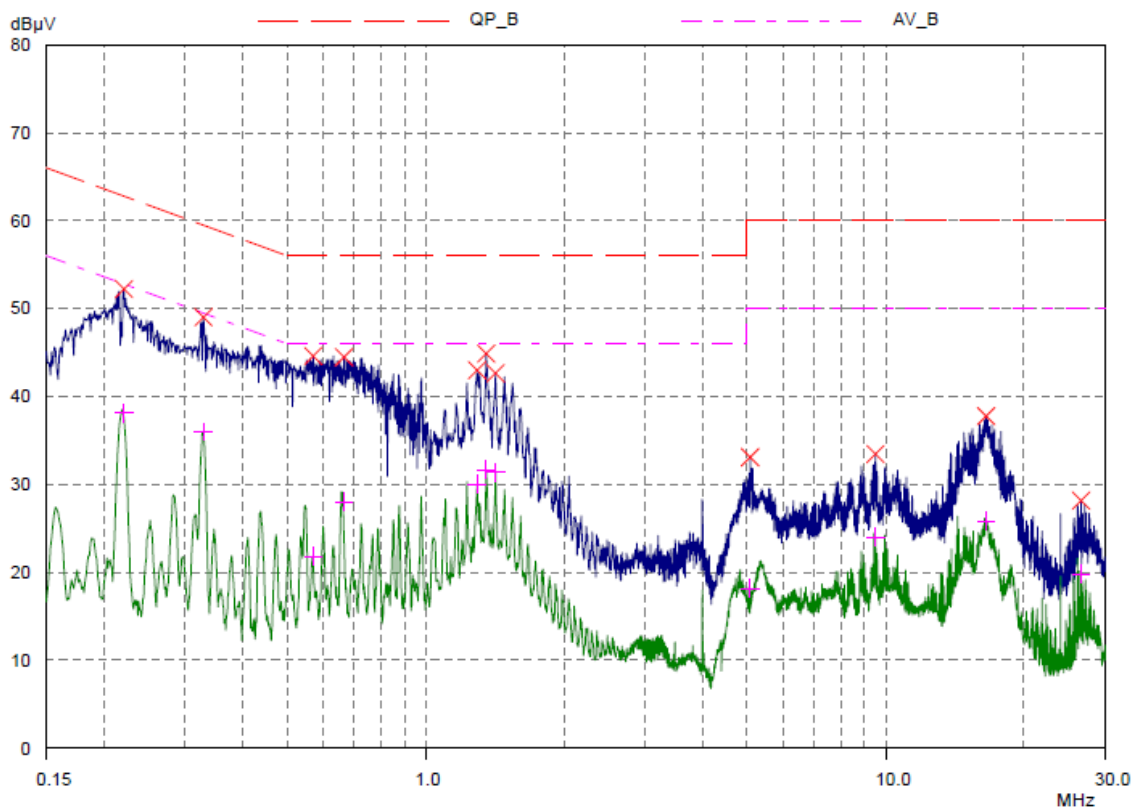

ETL EMC Laboratory
Conducted Emission Test Result

EUT: ETLT180125.0010
 Manuf:
 Op Cond:
 Operator:
 Test Spec:
 Comment: N

Prescan Measurement: Detectors: X PK / + AV
 Meas Time: see scan settings
 Peaks: 16
 Acc Margin: 10 dB

Peak Search Results

Frequency MHz	PK Level dB μ V	PK Limit dB μ V	PK Delta dB
0.221	52.21	62.78	10.57
0.329	48.99	59.48	10.49
0.57	44.59	56.00	11.41
0.665	44.46	56.00	11.54
1.295	42.97	56.00	13.03
1.355	44.87	56.00	11.13
1.42	42.63	56.00	13.37
5.08	33.07	60.00	26.93
9.505	33.44	60.00	26.56
16.53	37.75	60.00	22.25
26.61	28.16	60.00	31.84

Frequency MHz	AV Level dB μ V	AV Limit dB μ V	AV Delta dB
0.221	38.07	52.78	14.71
0.329	35.99	49.48	13.49
0.57	21.82	46.00	24.18
0.665	27.98	46.00	18.02
1.295	30.00	46.00	16.00
1.355	31.67	46.00	14.33
1.42	31.37	46.00	14.63
5.08	18.16	50.00	31.84
9.505	23.97	50.00	26.03
16.53	25.83	50.00	24.17
26.61	19.78	50.00	30.22

* limit exceeded

5.8 Radio Frequency Exposure

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limit

Limits for general population/Uncontrolled exposure

Frequency Range [MHz]	Electric Field Strength (E) [V/m]	Magnetic Field Strength (H) [A/m]	Power Density (S) [mW/cm ²]	Averaging Time E ² , H ² or S [minutes]
0.3 - 1.34	614	1.63	(100)	30
1.34 - 30	824/f	2.19/f	(180/f ²)	30
30 - 300	27.5	0.073	0.2	30
300 - 1 500	--	--	f/1 500	30
1 500 - 100 000	--	--	1.0	30

f = frequency in MHz

*Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance.

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²)
P = power input to the antenna (in appropriate units, e.g., mW)
G = power gain of the antenna in the direction of interest relative to an isotropic radiator
R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Measurement Result:

Maximum peak output power at antenna input	:	-12.63 dBm (0.055 mW)
Prediction distance	:	20 cm
Predication frequency	:	2 462 MHz
Antenna gain(Max)	:	1.9 dBi (1.549 numeric)
Power density at predication frequency at 20 cm	:	0.000 016 82 mW/cm ²
MPE Limit for	:	1 mW/cm ²

Test Result

The power density level at 20 cm is 0.000 016 82 mW/cm² which is below the uncontrolled exposure limit of 1 mW/cm² at 2 412 MHz to 2 462 MHz.

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor - Preamplifier Factor

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation}$$

$$dB(\mu V) = dBm + 107$$

Example : @ 2 537.76 MHz

Limit	=	53.97 dB(μ V/m) (Average)
Reading	=	67.63 dB(μ V)
Antenna Factor + (Cable Loss - Amp Gain)	=	27.78 + (-45.59) = -17.81 dB(μ V/m)
	Total	= 67.63 + (-17.81) = 49.82 dB(μ V/m)
Margin	=	53.97 - 49.82 = 4.15 dB
		= 4.15 dB below Limit

7. List of test equipments used for measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Date	Cal. Due Date
<input checked="" type="checkbox"/>	EMI Test Receiver	ESCI7	ROHDE & SCHWARZ.	100851	17.08.31	18.08.31
<input checked="" type="checkbox"/>	EMI Test Receiver	ESCS30	ROHDE & SCHWARZ.	100087	18.03.12	19.03.12
<input checked="" type="checkbox"/>	PSA Series Spectrum Analyzer	E4440A	Agilent	US40420382	17.09.01	18.09.01
<input checked="" type="checkbox"/>	EMI Test Receiver	ESPI3	R&S	100478	17.08.31	18.08.31
<input checked="" type="checkbox"/>	Two-Line V-Network	ENV216	R&S	101715	18.03.12	19.03.12
<input checked="" type="checkbox"/>	Two-Line V-Network	ENV216	R&S	102055	18.03.12	19.03.12
<input checked="" type="checkbox"/>	Two-Line V-Network	ENV216	R&S	101715	18.03.12	19.03.12
<input checked="" type="checkbox"/>	Wideband Power Sensor	U2022XA	Agilent	MY56040002	17.09.05	18.09.05
<input checked="" type="checkbox"/>	DC Power Supply	DP30-03A	TOYO TECH	16110016	18.03.13	19.03.13
<input checked="" type="checkbox"/>	Bi-Log Antenna (FCC)	VULB9163	Schwarzbeck	01069	17.02.17	19.02.17
<input checked="" type="checkbox"/>	Loop Antenna	6502	EMCO	00033743	16.09.05	18.09.05
<input checked="" type="checkbox"/>	Horn Antenna (FCC)	BBHA 9120D	Schwarzbeck	277	16.10.12	18.10.12
<input checked="" type="checkbox"/>	Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170440	17.12.04	19.12.04
<input checked="" type="checkbox"/>	Amplifier	TK-PA18H	TESTEK	170010-L	18.03.12	19.03.12
<input checked="" type="checkbox"/>	Amplifier	BLWA 0310-1	BONN Elektronik	045672	18.01.31	19.01.31
<input checked="" type="checkbox"/>	Amplifier	JS44-18004000-45-8P	MITEQ Inc.	1568695	17.09.05	18.09.05
<input checked="" type="checkbox"/>	Highpass Filter	WHKX3.0 /18G-6SS	Wainwright Instrument	15	18.03.13	19.03.13
<input checked="" type="checkbox"/>	Highpass Filter	WHNX6-4740-6000-26500-40CC	WAINWRIGHT INSTRUMENT GmbH	1	17.09.04	18.09.04
<input checked="" type="checkbox"/>	Band Reject Filter	WRCGV 2402/2480-2382/2500-52/10SS	Wainwright Instrument	2R	17.08.31	18.08.31
<input checked="" type="checkbox"/>	Turn-Table	TT 1.35 SI	SES	-	N/A	N/A
<input checked="" type="checkbox"/>	Antenna Master	AM 4.5	SES	-	N/A	N/A
<input checked="" type="checkbox"/>	Turn-Table	DS1200-S	Innco Systems GmbH	2740311	N/A	N/A
<input checked="" type="checkbox"/>	Controller	HD 2000	HD GmbH	C/125	N/A	N/A
<input checked="" type="checkbox"/>	Antenna Master	MA4000	AUDIX	N/A	N/A	N/A